

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 165 739 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

08.06.2005 Bulletin 2005/23

(21) Application number: **00925127.3**

(22) Date of filing: **21.03.2000**

(51) Int Cl.7: **C11D 3/42**, C11D 17/06

(86) International application number:
PCT/EP2000/002459

(87) International publication number:
WO 2000/058432 (05.10.2000 Gazette 2000/40)

(54) THE USE OF A BRIGHTENER PIGMENT IN DETERGENTS OR CLEANSERS

VERWENDUNG VON OPTISCHEN AUFHELLERN IN REINIGUNGSMITTELN

UTILISATION D'UN PIGMENT ECLAIRCISSANT DANS DES DETERGENTS OU DES
NETTOYANTS

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **29.03.1999 CH 58999**

(43) Date of publication of application:

02.01.2002 Bulletin 2002/01

(73) Proprietor: **Ciba Specialty Chemicals Holding Inc.**
4057 Basel (CH)

(72) Inventors:

- **PUEBLA, Claudio**
D-79540 Lörrach (DE)

- **KASCHIG, Jürgen**

D-79104 Freiburg (DE)

- **TRABER, Rainer, Hans**
CH-4153 Reinach (CH)

(56) References cited:

EP-A- 0 900 783

DE-A- 4 140 830

GB-A- 2 213 161

Remarks:

The file contains technical information submitted
after the application was filed and not included in this
specification

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 165 739 B1

Description

[0001] The present invention relates to the use of a brightener pigment for increasing the degree of whiteness of detergents or cleaners, of compounds thereof, and of individual raw materials comprising

- (a) a water-insoluble urea-formaldehyde resin and
- (b) a water-soluble fluorescent whitening agent of formula (15),

which use comprises subjecting the pigment obtained from components (a) and (b) to a subsequent treatment with an emulsion of long-chain alcohols, of paraffin waxes or of hydrogenated natural or synthetic resins.

[0002] There is used in accordance with the invention a water-insoluble urea-formaldehyde resin of which the molar ratio of urea to formaldehyde is preferably from 1:1.3 to 2 moles. The urea-formaldehyde resin is also distinguished by a small particle diameter of from 2 to 10 μm and a low BET specific surface area of from 15 to 120 m^2/g .

[0003] The BET specific surface area of the water-insoluble urea-formaldehyde resins is ascertained according to the Brunauer, Emmett and Teller method [cf. J.Am.Chem.Soc. 60, 309-319 (1938), Chemie-Ing.Techn. 32, 349-354 (1960) and 35, 568-589 (1963)] according to DIN 66132.

[0004] The water-insoluble urea-formaldehyde resins, which correspond to component (a), and the preparation of those polymers, are known, for example, from A. Renner: Makromolekulare Chemie 149, 1-27 (1971).

[0005] The component (a) compounds are prepared by reacting formaldehyde with urea in aqueous solution in the above-described ratios. The reaction is carried out preferably in two steps. In the first reaction step, urea is reacted with formaldehyde according to a customary condensation mechanism, resulting in a low-molecular-weight, water-soluble pre-condensate. In the second reaction step, an acid catalyst can be used in order to accelerate the reaction and for crosslinking, an insoluble, finely divided solid being obtained.

[0006] The water content of the reaction solution should never be lower than the total weight of the reactants present in the reaction mixture, and should be higher than the total weight of all the other components in the reaction mixture during the precipitation of the insoluble polymer particles.

[0007] The reaction temperature in the first reaction step is usually in the range from 20 to 100°C. The pH can be adjusted to from 6 to 9 by the addition of a strong, aqueous, inorganic base, such as, for example, sodium hydroxide solution.

[0008] Advantageously, the preparation of the pre-condensate can be carried out in the presence of a surfactant. The surfactant is used, for example, in amounts of from 0.5 to 5 % by weight, based on the total weight of the urea and formaldehyde. Ionic surfactants cause an increase in the specific surface area of the urea-formaldehyde polymer product, whereas non-ionic surfactants have the opposite effect.

[0009] Advantageously, the first reaction step is carried out in the presence of a macromolecular water-soluble protective colloid having polyelectrolytic properties. Examples of such protective colloids include gelatin, tragacanth, agar and polyvinylpyrrolidone, especially methacrylic acid. The amount of protective colloid used can be within a range of, for example, from 0.5 to 5 % by weight, based on the total weight of urea and formaldehyde. Neither polyvinylpyrrolidone nor polymethacrylic acid causes an increase in the specific surface area of the water-insoluble urea-formaldehyde resin.

[0010] One of the most important conditions for the successful preparation of non-meltable, insoluble and finely divided urea-formaldehyde polymers that meet the qualitative requirements of the brightener pigments used in accordance with the invention is the use in the second reaction step of a suitable catalyst for gel formation. Suitable catalysts include, for example, relatively strong inorganic and/or organic acids, such as, for example, sulfuric acid, sulfurous acid, sulfamic acid, phosphoric acid, hydrochloric acid, chloroacetic acid, maleic acid or maleic anhydride. Generally, such gel-formation catalysts should have an ionisation constant in excess of 10^{-4} . Sulfuric acid and its acidic ammonium or amine salts, and also ammonium sulfate, methylamine hydrogen sulfate and ethanolamine hydrogen sulfate, are preferred. The acids are generally used in the form of 1 to 15 % by weight aqueous solutions. As a rough guide, from 20 to 100 mmoles of a crosslinking catalyst are used per mole of urea added. This causes a reduction in the pH of the reaction mixture to from 1 to 3.0 in the second reaction step during the formation of the polymer.

[0011] When sulfamic acid is used, water-insoluble urea-formaldehyde resins having a relatively high specific surface area are generally obtained, the other acids of those mentioned above, especially sulfuric acid and its ammonium or amine salts, having the opposite effect.


[0012] The reaction temperatures in the second, resin-forming reaction step usually reach from 20 to 100°C. Large differences in temperature in the reaction mixture should be avoided during the addition of the catalyst. It is therefore desirable to heat the aqueous catalyst solution to the temperature of the reaction mixture before it is added to that mixture. Generally, a white gel is obtained after only from 15 to 30 seconds. The crosslinking reaction is usually finished after a reaction time of from 30 minutes to 3 hours.

[0013] The insoluble polymer is obtained in the form of a white gel and can be comminuted mechanically, treated with an approximately equal amount of water, adjusted with alkali or ammonium hydroxide to a pH of from 6 to 9, and

then isolated from the aqueous phase, for example by filtration, centrifugation or concentration by evaporation. The drying can be carried out e.g. by spray-drying or convection-drying.

[0014] The gel obtained is then worked up in customary manner, for example by allowing the reaction to proceed to completion, neutralising, where appropriate adding one or more of the fluorescent whitening agents mentioned hereinbelow in cases where the addition of the fluorescent whitening agent is not undertaken until after gelation, and then filtering, washing, drying and, if desired, grinding to obtain a suitable particle size.

[0015] The fluorescent whitening agent of the present invention corresponds to formula (15).

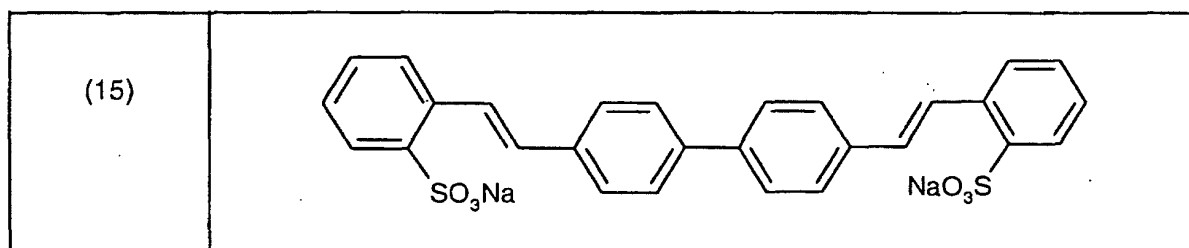

[0016] The fluorescent whitening agent corresponding to component (b) used in accordance with the invention is employed preferably in amounts of from 0.001 to 1.0 % by weight, especially from 0.01 to 0.5 % by weight, and more especially from 0.01 to 0.5 % by weight, based on the total amount of urea-formaldehyde resin. The fluorescent whitening agent can be added to the urea-formaldehyde resin in the form of individual compounds or in the form of mixtures of several individual compounds.

[0017] The brightener pigment used in accordance with the invention comprising components (a) and (b) can, in principle, be used for whitening detergents or cleansers on its own or together with other pigments. Other pigments that can be used include, e.g., talc, titanium dioxide, aluminium oxide, aluminium hydroxide, zinc oxide, chalk, zeolite or clays, e.g. kaolin.

[0018] The brightener pigment used in accordance with the invention is usually prepared by adding the water-soluble fluorescent whitening agent before, during or after gelation. Usually, the procedure comprises dispersing the urea-formaldehyde resin in hot water with a vigorous stirring action. The pH is adjusted to <10 using an aqueous alkali metal hydroxide solution and the water-soluble fluorescent whitening agent is added thereto. The batch is further stirred for some time, cooled, and the pH is adjusted to <3 using a strong acid, especially sulfuric acid. A viscous suspension is obtained which is further processed by customary methods, such as filtration, drying and, if desired, grinding.

[0019] The brightener pigment is subjected to a surface treatment.

[0020] For that purpose, an emulsion of long-chain alcohols, of paraffin waxes, or of hydrogenated natural or synthetic resins, and especially a dodecanol emulsion, is added to the viscous urea-formaldehyde resin/whitening agent suspension. The batch is stirred for a further 10 to 15 minutes at elevated temperature. After cooling, the batch is filtered, dried and ground in customary manner, yielding a surface-treated formaldehyde resin/whitening agent suspension.

[0021] Dazzlingly white organic brightener pigments are obtained which have a very low content of free formaldehyde (typically less than 0.1 % DIN 58187) in which the fluorescent whitening agent has been incorporated or adsorbed. Such products are solid, colloidal particles having an average diameter of from 0.1 to 0.2 μm , which are agglomerated to form pigment particles having an average diameter of from 3 to 20 μm .

[0022] The fluorescently brightened pigments prepared in that manner are excellently suitable for improving the degree of whiteness (improvement in appearance) of commercially available detergents and cleansers, of compounds thereof, and of individual raw materials.

[0023] The brightener pigment used in accordance with the invention is usually incorporated into the detergents or cleansers by first suspending the brightener pigment in water, with stirring, and then adding the detergent or cleanser in question to the resulting suspension with the further addition of water. A creamy slurry is obtained, which is then dried and sieved to yield a detergent or cleanser having a particle size of approximately from > 0.3 to 1 mm.

[0024] In a further embodiment, the fluorescently brightened detergent or cleanser, compounds thereof and individual raw materials are prepared by simply dusting with the brightener pigment in powder form. For that purpose from 0.5 to 20%, typically from 1 to 10%, of brightener pigment based on the component to be whitened is dry-mixed until the particles have been coated with the pigment.

[0025] Suitable compositions that can be treated in accordance with the invention with the brightener pigment comprising components (a) and (b) are detergents or cleansers in the form of powder or granules. Such formulations may be particulate detergents composed of one or more granular components in which at least one granular component is acted upon by the brightener pigment.

[0026] There come into consideration preferably formulations in granular form that have a high bulk density. In ad-

dition to the brightener pigment, the detergent may comprise further ingredients, e.g. surfactants, inorganic and organic builder substances, bleaching agents, substances that have a positive effect on the ability to wash out oil and grease, greying inhibitors, if desired substances that improve the solubility and the rate of dissolution of the individual granular components and/or of the entire formulations, fabric-softening substances, colorants and perfumes, and also alkaline and/or neutral salts in the form of their sodium and/or potassium salts.

[0027] In addition, washing-active or cleaning-active shaped forms, for example detergent tablets, stain-removing salt tablets or water-softening tablets, can be provided in accordance with the invention.

[0028] The washing-active or cleaning-active shaped forms are especially cylindrical shapes or tablets that can be used as detergents, or bleaching agents (stain-removing salts), but can also be used as pretreatment agents, for example as water softeners or bleaching agents. A distinction is drawn between homogeneous (homogeneously distributed ingredients) and heterogeneous (heterogenously distributed ingredients) shaped forms, which have as a special feature a disintegrator, such as, for example, starch, a starch derivative, cellulose or a cellulose derivative, which brings about the disintegration of the washing-active or cleaning-active shaped form. It is possible, in particular, for the degree of whiteness of such a disintegrator to be excellently improved by the brightener pigments used in accordance with the invention.

[0029] The so-treated detergent is distinguished by a very high degree of whiteness, which is substantially higher than that achieved by the discrete addition of organic white pigment and fluorescent whitening agent.

[0030] A further advantage of the detergent or cleanser treated in such a manner is that, during the actual washing operation, the brightener pigment or the fluorescent whitening agent does not contact and is not absorbed by the goods being washed.

[0031] The following Examples illustrate the invention, without the invention being limited thereto.


Example 1:

a. Preparation of a urea-formaldehyde condensation polymer/whitening agent suspension

[0032] 500 ml of water are taken as the initial component and heated to 70°C.

[0033] 100 g of a commercially available urea-formaldehyde condensation polymer (e.g. Pergopack® M2) are suspended in the water and stirred vigorously to achieve a homogeneous distribution. A pH of 10 is established using sodium hydroxide.

[0034] 1.5 g of the fluorescent whitening agent of formula

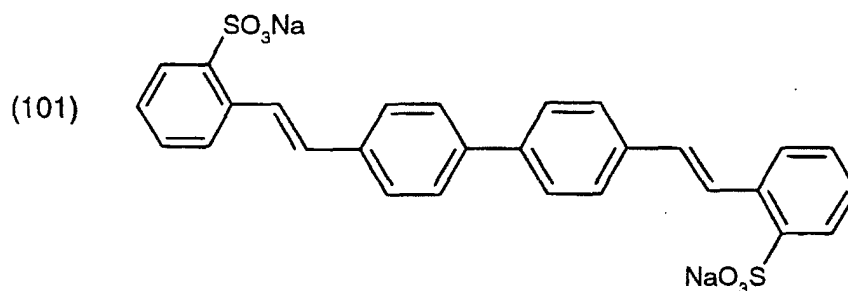

are then added and the batch is stirred for a further 10 minutes. With further stirring, the batch is allowed to cool to 60°C.

b. Surface-treatment and isolation

[0035] The suspension prepared in Step a. is adjusted to a pH of 2.5 using 1N sulfuric acid and heated to 60°C. Since the solution becomes very viscous, vigorous stirring is necessary.

[0036] A dodecanol suspension is then prepared by taking 500 ml of water, heating the water to 90°C, and adding 1 g of dodecane-1,2-diol with stirring and while cooling to 60°C. The dodecanol suspension is added at 60°C, with vigorous stirring, to the prepared whitening agent suspension. The solution slowly becomes very liquid.

[0037] The solution is stirred for a further 10 minutes at 60°C and is cooled with vigorous stirring and subsequently filtered (amount of filtrate: 500 ml).

[0038] The filter cake is dried at 60°C and finely ground.

[0039] Approximately 110 g of a white, finely powdered product are obtained.

[0040] Degree of whiteness of the filtered product: approximately 233 points (degree of whiteness according to Ganz)

and 163 points (CIE).


Example 2:

a. Preparation of a urea-formaldehyde condensation polymer/whitening agent suspension

[0041] 60.0 kg of demineralised water are taken as the initial component and heated to from 65 to 70°C.

[0042] 10.0 kg of a commercially available urea-formaldehyde condensation polymer (e.g. Pergopack® M2) are suspended in the water and stirred vigorously to achieve a homogeneous distribution. A pH of 10 is established using 0.12 kg of 1N sodium hydroxide solution.

[0043] 0.187 kg of the fluorescent whitening agent of formula

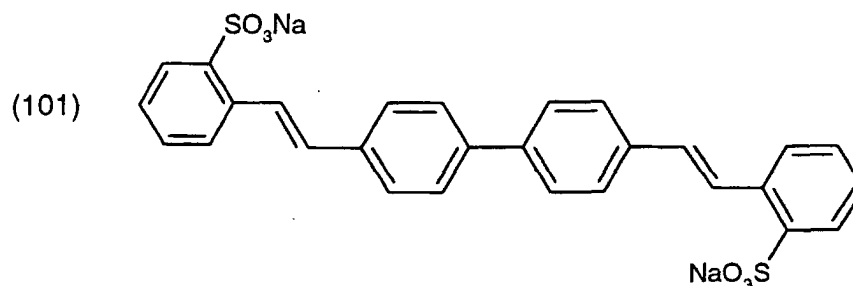

is added and the batch is stirred for a further 10 minutes at from 65 to 70°C.

[0044] The pH is then adjusted to 7 using 0.07 kg of 2N sulfuric acid, and subsequently 4.0 kg of sodium chloride are introduced and the batch is stirred for a further 30 minutes at from 65 to 70°C.

b. Surface-treatment and isolation


[0045] 20.0 kg of demineralised water are introduced into a vessel and heated to from 65 to 70°C. 0.10 kg of 1,2-dodecanediol is then added and the batch is stirred for at least 10 minutes. The resulting emulsion is then added to the suspension prepared in Step a., and the dispersion is stirred for 10 minutes at 60°C and then cooled to a temperature of <40°C. Filtration is then carried out, and the filter cake is dried at 60°C and finely ground.

Example 3:

a. Preparation of a urea-formaldehyde condensation polymer/whitening agent suspension

[0046] 400 ml of demineralised water are taken as the initial component and, with stirring, adjusted to pH 10.4 by the addition of 1N sodium hydroxide solution and heated to 69°C.

[0047] 8.0 g of the fluorescent whitening agent of formula

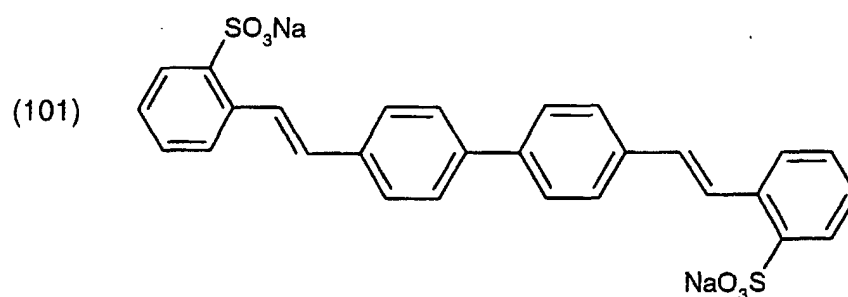

are then added. With stirring, 100.0 g of a commercially available urea-formaldehyde condensation polymer (e.g. Pergopack® M2) are added to the resulting solution, yielding a thick suspension. A pH of 10 is established using 0.12 kg of 1N sodium hydroxide solution. A further 400 ml of demineralised water that has previously been adjusted to pH 10.4

EP 1 165 739 B1

by the addition of 1N sodium hydroxide solution and subsequently heated to 60°C is then added. The suspension is stirred for a further 20 minutes at from 65 to 70°C and then the pH is adjusted to 7 by the addition of 2N sulfuric acid.

b. Surface-treatment and isolation

[0048] 400 ml of demineralised water are taken as the initial component and heated to 90°C. 1.0 g of 1,2-dodecanediol is then added and, with vigorous stirring, allowed to cool to 60°C.

[0049] The resulting emulsion is then added to the suspension prepared in Step a., which has been heated to 60°C, and the dispersion is stirred for 10 minutes at 60°C and then allowed to cool to a temperature of <40°C. The batch is filtered and the filter cake is dried at 60°C and finely ground.

Application Example

[0050] 100 g of a detergent formulation having an improved appearance are prepared using

- (A) 1.481 g of the white pigment prepared in Example 1,
- (B) 98.51 g of ECE detergent formulation and
- (C) from 50 to 60 ml of deionised water.

[0051] In a porcelain dish, (A) is suspended in approximately 20 ml of deionised water, with stirring, using a pestle.

[0052] (B) is gradually added and stirred in. A creamy slurry is formed to which a further 30 to 40 ml of deionised water is added in portions. The resulting smooth slurry is transferred to a shallow porcelain dish and dried for approximately 14 hours in a vacuum cabinet at 60°C and from 425 to 475 mbar.

[0053] After drying, the mass is cooled to room temperature and sieved. The first sieve has a mesh size of from 0.315 to 0.8 mm, and the second a mesh size of < 0.315 mm. Powder having a particle size of < 0.315 mm is discarded.

[0054] The detergent formulation having the desired particle size (0.315 to 0.8 mm) is filled into brown glass bottles.

Measurement of the appearance of the washing powder

[0055] At least 5.5 g of the prepared detergent formulation are conditioned overnight (at least 20 hours) in a controlled environment chamber. The conditions are 25°C and 65 % relative humidity.

[0056] After the conditioning, a tablet is formed by compression and the degree of whiteness according to Ganz is determined.

Execution of washing tests

Test washing machine: Linitest

[0057] Washing is carried out under the following conditions:

dosage	30 g of detergent per kg of fabric
liquor	5:1 (5 ml of tap water per g of fabric)
washing temperature	30°C
number of wash cycles	3
fabric	10 g of bleached cotton (Co-Renforcé)
drying	ironing

[0058] The washing results (determination of the degree of whiteness) are listed in Table 2:

Table 2:

Detergent formulated with	Conc. [%]	Degree of whiteness of detergent	Degree of whiteness of fabric after 1 wash cycle	Degree of whiteness of fabric after 3 wash cycles
brightener pigment according to Example 1	1.48	158	76	85

Table 2: (continued)


Detergent formulated with	Conc. [%]	Degree of whiteness of detergent	Degree of whiteness of fabric after 1 wash cycle	Degree of whiteness of fabric after 3 wash cycles
compound of formula (101) <i>via</i> slurry	0.02	172	99	125
pigment without whitening agent	1.48	59	72	73

[0059] The results in Table 2 show, on the one hand, that the degree of whiteness of the detergent is markedly increased by the brightener pigment used in accordance with the invention and hence results in a considerable improvement in its appearance and, on the other hand, that the material being washed is not affected by the fluorescent whitening agent used.

Claims

1. A use of a brightener pigment for increasing the degree of whiteness of detergents or cleansers, of compounds thereof, and of individual raw materials, comprising

- (a) a water-insoluble urea-formaldehyde resin and
- (b) a water-soluble fluorescent whitening agent of formula (15),

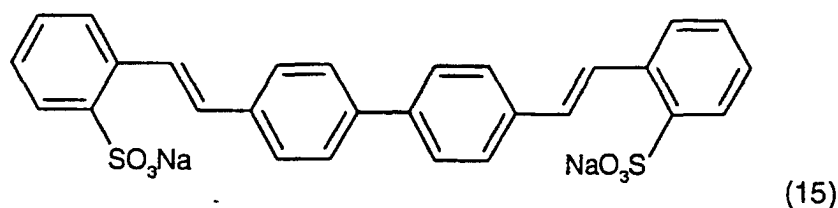

which use comprises subjecting the pigment obtained from components (a) and (b) to a subsequent treatment with an emulsion of long-chain alcohols, of paraffin waxes, or of hydrogenated natural or synthetic resins.

2. A use according to claim 1, wherein the emulsion consists of long-chain alcohols.

3. A use according to any one of claims 1 or 2, wherein there are used, as detergents or cleansers, formulations in powder or granular form or washing-active or cleaning-active shaped forms.

4. A use according to any one of claims 1 to 3, wherein compounds and individual raw materials of detergents or cleansers are used.

5. A method of preparing a brightener pigment comprising

- (a) a water-insoluble urea-formaldehyde resin and
- (b) a water-soluble fluorescent whitening agent of formula (15),

which comprises adding together (a) and (b) and subsequently treating the urea-formaldehyde/whitening agent suspension with an emulsion of long-chain alcohols of paraffin waxes, or of hydrogenated natural or synthetic resins.

6. A method according to claim 5, which comprises carrying out the subsequent surface treatment with a dodecanol emulsion.

7. Detergent or cleanser having an increased degree of whiteness comprising a brightener pigment, comprising


- (a) a water-insoluble urea-formaldehyde resin,
- (b) a water-soluble fluorescent whitening agent of formula (15), and

wherein the brightener pigment obtained from compounds (a) and (b) is subjected to a subsequent treatment with an emulsion of long-chain alcohols of paraffin waxes, or of hydrogenated natural or synthetic resins.

Patentansprüche

1. Verwendung eines Aufhellerspigments zur Erhöhung des Weissgrades von Wasch- oder Reinigungsmitteln, deren Vorprodukten (Compounds), sowie einzelnen Rohprodukten, enthaltend

- (a) ein wasserunlösliches Hamstoff-Formaldehydharz und
- (b) einen wasserlöslichen optischen Aufheller der Formel (15),

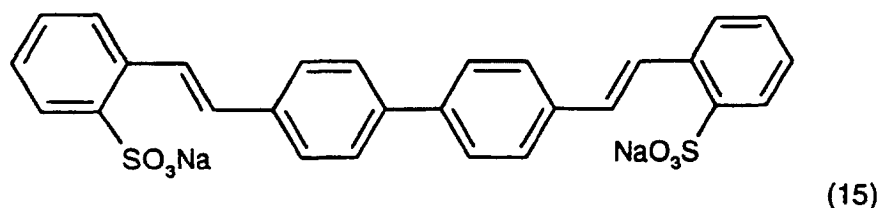

- wobei die Verwendung eine Nachbehandlung des aus den Komponenten (a) und (b) hergestellten Pigmentes umfasst, in der das Pigment mit einer Emulsion aus langkettigen Alkoholen, Parafinwachsen oder hydrogenierten natürlichen oder synthetischen Harzen versehen wird.
2. Verwendung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Emulsion aus langkettigen Alkoholen besteht.
3. Verwendung nach einem der Ansprüche 1 oder 2, **dadurch gekennzeichnet, dass** als Wasch- oder Reinigungsmittel Mittel in Pulver- oder Granulatform oder wasch- oder reinigungsaktive Formkörper verwendet werden.
4. Verwendung nach einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** die Vorprodukte (Compounds) sowie einzelne Rohprodukte von Wasch- oder Reinigungsmitteln verwendet werden.
5. Verfahren zur Herstellung eines Aufhellerspigments, enthaltend

- (a) ein wasserunlösliches Hamstoff-Formaldehydharz und
- (b) einen wasserlöslichen optischen Aufheller der Formel (15),

durch Zusatz von (a) und (b) und anschließende Behandlung der Hamstoff-Formaldehyd-Aufhellersuspension mit einer Emulsion aus langkettigen Alkoholen, Parafinwachsen oder hydrogenierten natürlichen oder synthetischen Harzen.


6. Verfahren nach Anspruch 5, **dadurch gekennzeichnet, dass** man die anschließende Oberflächenbehandlung mit einer Dodecanol-Emulsion durchführt.
7. Wasch- oder Reinigungsmittel mit erhöhtem Weissgrad enthaltend ein Aufhellerspigment, das
- (a) ein wasserunlösliches Hamstoff-Formaldehydharz und
- (b) einen wasserlöslichen optischen Aufheller der Formel (15) enthält,

wobei man das aus den Komponenten (a) und (b) hergestellte Aufhellerspigment mit einer Emulsion aus langkettigen Alkoholen, Parafinwachsen oder hydrogenierten natürlichen oder synthetischen Harzen nachbehandelt.

Revendications

1. Utilisation d'un pigment azurant optique pour augmenter le degré de blancheur de détergents ou nettoyants, de leurs composés, et de matières premières individuelles, comprenant

- (a) une résine urée-formaldéhyde insoluble dans l'eau et
(b) un agent de blanchiment fluorescent soluble dans l'eau de formule (15),

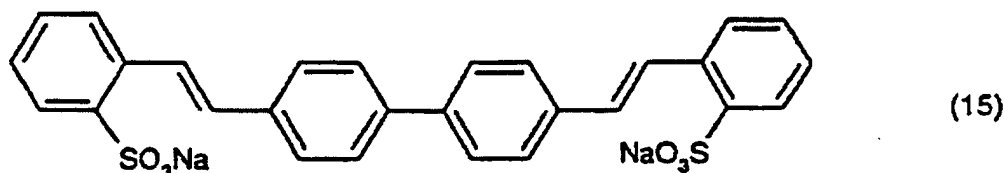

lequel usage comprend l'opération consistant à soumettre le pigment obtenu à partir des composants (a) et (b) à un traitement subséquent avec une émulsion d'alcools à longue chaîne, de cires de paraffine ou de résines hydrogénées naturelles ou synthétiques.

2. Utilisation selon la revendication 1, dans laquelle l'émulsion est constituée d'alcools à longue chaîne.
3. Utilisation selon l'une quelconque des revendications 1 ou 2, dans laquelle on utilise, comme détergents ou nettoyants, des formulations sous forme de poudre ou de granulés ou des mises en forme actives au lavage ou actives au nettoyage.
4. Utilisation selon l'une quelconque des revendications 1 à 3, dans laquelle on utilise des composés et des matières premières individuelles de détergents ou de nettoyants.

5. Procédé de préparation d'un pigment azurant optique comprenant

- (a) une résine urée-formaldéhyde insoluble dans l'eau et
(b) un agent de blanchiment fluorescent soluble dans l'eau de formule (15),

qui comprend l'ajout de (a) et (b) ensemble et ensuite le traitement de la suspension urée-formaldéhyde/agent de blanchiment avec une émulsion d'alcools à longue chaîne, de cires de paraffine ou de résines hydrogénées naturelles ou synthétiques.

6. Procédé selon la revendication 5, qui comprend la réalisation du traitement de surface subséquent avec une émulsion de dodécanol.
7. Détergent ou nettoyant ayant une augmentation du degré de blancheur comprenant un pigment azurant optique, comprenant

- (a) une résine urée-formaldéhyde insoluble dans l'eau et
(b) un agent de blanchiment fluorescent soluble dans l'eau de formule (15), et

dans lequel le pigment azurant optique obtenu à partir des composés (a) et (b) est soumis à un traitement subséquent avec une émulsion d'alcools à longue chaîne, de cires de paraffine ou de résines hydrogénées naturelles ou synthétiques.