




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A43B 5/04	A1	(11) International Publication Number: WO 98/37781 (43) International Publication Date: 3 September 1998 (03.09.98)
(21) International Application Number: PCT/CA98/00139 (22) International Filing Date: 25 February 1998 (25.02.98) (30) Priority Data: 2,198,787 28 February 1997 (28.02.97) CA (71)(72) Applicant and Inventor: DONNELLY, Peter [CA/CA]; 186-916 West Broadway, Vancouver, British Columbia V5Z 1K7 (CA). (74) Agent: LONG, Brian; Long and Cameron, 920-1100 Melville Street, Vancouver, British Columbia V6E 4A6 (CA).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: HEAT MOLDABLE BOOT LINER

(57) Abstract

A heat moldable boot line (10) has an upper portion (14) extending upwardly from a boot portion (12), which has a pair of flaps (16, 17) extending along the foot portion (12), the flaps (16, 17) being adjustable to bring one of the flaps into overlapping relationship relative to the other of the flaps over the wearer's foot. A tongue (24) extends upwardly from the other one of the flaps within the upper portion of the liner (10), which has another pair of flaps (21, 23) intended to be overlapped over the tongue (24) at the lower portion of the wearer's leg. The foot portion (12) includes a heel portion (26) shaped to fit snugly the user's heel. The present liner (10) can be heat-molded in a single-stage molding operation.

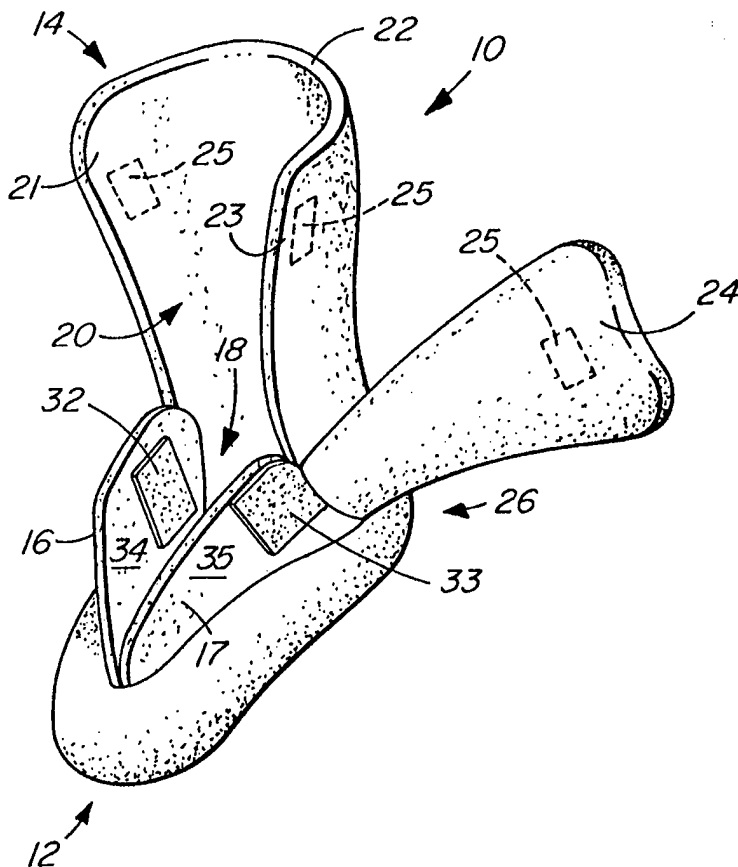

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DESCRIPTION

5

HEAT MOLDABLE BOOT LINER

Technical Field

The present invention relates to a heat moldable boot liner for use, for example, with a ski boot.

10

Background Art

Conventionally, moldable ski boot liners are made of a heat moldable material comprising a heat moldable foam interfaced between outer layers of felt fabric, and such heat moldable materials are readily commercially available.

15

In United States Patent No. 5,673,448, issued October 7, 1997, to Herbert Lang et al., there is disclosed a liner for a sports boot shell and a method of making a custom fitted liner for a sports boot shell which employ a single piece of thermoplastic foam material for the liner. More particularly, a blank made of the thermoplastic foam material is welded or stitched to connect together different portions of the edge of the blank so as to form an unfitted liner having a seam extending from its heel along its underside, and up and over the top of a foot portion of the liner to a gap which extends from a point situated centrally on the wearer's forefoot behind the wearer's toes and between the forward portion of the wearer's arch and the region above the ball of the wearer's foot. From this point, the gap extends upwardly between a pair of flaps or wings to a cuff at the top of the liner.

20

25

30

In use, the unfitted liner is heated in an oven and placed on the wearer's foot, the toes of which are padded to prevent the liner from subsequently holding the wearer's toes immobile. The wings are then wrapped around the wearer's lower leg, with one wing overlapped by the other, and a short nylon stocking is rolled over the liner, after which the wearer's foot with the liner on it is placed in a boot.

- 2 -

However, it has been found in practice that such a liner does not operate satisfactorily because the portions of the liner adjacent the gap, including the wings, tend to become adversely distorted as the wings are wrapped around the wearer's lower leg and as the foot and liner are inserted into the boot. Because the seam extends along the underside of the liner and because the underside of the liner is formed of deformable foam material, the shape of the liner is unstable as the liner is forced into its boot shell. Also, the foam molds itself into the soft parts of the underside of the wearer's foot during the molding operation, which causes pain and discomfort during subsequent use of the molded liner. It was also found that the heel portion of this prior liner tended to become dislocated during the molding operation, thus not only causing distortion of the lower portion of the liner but also causing dislocation of the cuff or top of the liner at the back of the wearer's leg, where the liner is required to be correctly positioned to protect the leg against the cuff or top of the boot shell. In addition, because this prior liner has only two wings, it is difficult to insert the wearer's foot with the liner after the molding of the liner has been completed and the liner material has hardened.

Disclosure of the Invention

It is accordingly an object of the present invention to provide a novel and improved boot liner which facilitates improved molding of the liner to the user's foot.

According to the present invention, there is provided a heat moldable boot liner which comprises a foot portion, an upper portion extending upwardly from the foot portion and including first and second flaps which can be wrapped over the wearer's foot and a tongue extending upwardly from the second flap. The upper portion has third and fourth flaps which can be wrapped over the tongue and the front of a lower portion of the wearer's leg.

When the present boot liner is in use, it is firstly heated to render the liner pliable and is then fitted in an unmolded state to the user's foot. The flaps are then adjusted into their overlapping relationships, with the tongue between the wearer's lower leg portion and the third and fourth flaps. The first and second flaps are preferably secured together, for

- 3 -

example by means of a hook-and-loop fastener, so that the foot portion of the boot is snugly adapted to fit the user's foot. The liner and the wearer's foot in the liner are then inserted into a boot shell so as to mold the liner to the user's foot in a one-stage operation.

5

Brief description of the drawings

The invention will be more readily understood from the following description of a preferred embodiment thereof given, by way of example, with reference to the accompanying drawings, in which:-

10

Figure 1 shows a view in perspective of a boot liner according to the present invention in an opened condition;

Figure 2 shows a heel portion of the liner of Figure 1 during the manufacture of the liner;

15

Figure 3 shows a view of the heel portion of Figure 2 in a finished condition;

Figure 4 shows a view in perspective of the liner of Figure 1 during fitting of the liner onto a wearer's foot (not shown);

20

Figure 5 shows a view in perspective of the liner of Figures 1 and 4 in a partially closed condition;

Figure 6 shows a blank employed in the making of the boot liner of Figures 1 through 5;

25

Figures 7 and 8 show blanks of a tongue and a sole, respectively, forming parts of the liner of Figures 1 through 6; and

Figure 9 shows a view in perspective of the sole of Figure 8 being attached to the remainder of the liner.

30

- 4 -

Description of the Best Mode

The boot liner illustrated in the accompanying drawings and indicated generally by reference numeral 10 is made of commercially available heat moldable boot liner material, such as that described above, and comprises a foot portion indicated generally
5 by reference numeral 12, and an upper portion indicated generally by reference numeral 14.

The foot portion 12 is formed, at its top, with first and second flaps 16 and 17 which define therebetween a gap, indicated generally by reference numeral 18, which extends
10 along the top of the foot portion 12 to the upper portion 14 of the liner and, more particularly, to a gap, indicated generally by reference numeral 20, which extends upwardly from the foot portion 12 to a top edge 22 of the upper portion 14 between third and fourth flaps 21 and 23 forming parts of the upper portion 14.

A tongue 24 is joined, at a lower end of the tongue 24, to the second flap 17 and is dimensioned so that, when the boot liner 10 is closed as shown in Figures 4 and 5, the tongue 24 extends along the front of the lower portion of the wearer's leg, with the tongue 24 extending the entire height of the upper portion 14 of the liner 10, substantially
15 to the top edge 22 of the upper portion 14.

During the manufacture of the boot liner 10 shown in Figure 1, a heel portion, indicated generally by reference numeral 26, of the foot portion 12 is formed so as to be vertically curved, with the heel portion 26 having an externally convex shape, as shown in Figures 4 and 5, and, consequently, a correspondingly concave inner surface, in order to snugly
20 fit the heel of the user. This curved shape of the heel portion 26 is produced by firstly forming a V-shaped cut-out, as indicated generally by reference numeral 28 in Figures 2 and 6, in the heel portion 26 and by the closing together of opposite edges 30 of the cut-out 26 and stitching these edges 30 together as illustrated in Figure 3.

When the boot liner 10 is fitted to the user's foot, the boot liner is firstly heated to render the material of the liner pliable, in known manner, and the boot is then inserted into the liner. The flap 16 is then adjusted so that it is disposed in overlapping relationship
30

- 5 -

relative to the flap 17, as shown in Figure 4, over the wearer's foot. This enables the foot portion 12 to be snugly fitted to the user's foot. As can also be seen from Figure 4, the tongue 24 is located within the upper portion 14 of the liner 10 during this operation.

5 In order to maintain the foot portion 12 in its snugly fitting relationship with the user's foot, a fastener is provided in the form of patches 32 and 33 of hook-and-loop fastener material secured to opposed faces 34 and 35 of the flaps 16 and 17, the faces 34 and 35 being brought into face-to-face relationship with one another so as to interengage the patches 32 and 33 with one another, as shown in Figure 4.

10

After the flaps 16 and 17 have been thus snugly fitted in mutually overlapping relationship, as shown in Figure 5, over the wearer's foot, with the tongue 24 extending up the front of the lower portion of the leg of the wearer, the flaps 21 and 23 are wrapped around the lower leg portion into overlapping relationship with one another and with the

15

The wearer's foot and the liner are then inserted into a boot shell to cause the still-pliable liner to be molded between the foot and the boot shell. The insertion of the foot and the liner into the boot shell may, if desired, be facilitated by covering the liner with a plastic

20

Also, if desired, the upper flaps 21 and 23 may be retained in snugly fitting overlapping relationship around the lower leg by means of a strap (not shown) extending around the

25

When the liner 10 is intended for a snowboard boot shell, as distinct from a ski boot shell, hook-and-loop fastener material patches shown in broken lines in Figure 1 and indicated by reference numeral 25 may be used to secure the flaps 21 and 24 together and to the

30

- 6 -

Since the foot portion 12 can be snugly fitted to the foot of the user, as described above, and retained by the fastener patches 32 and 33, the foot portion 12 remains in position on the user's foot during insertion into the boot shell and resists being moved around the foot, and since the snugness of this fitting and the insertion into the boot shell without
5 dislocation of the liner on the foot are facilitated by the above-described vertical curvature of the heel portion 26, it is found that the liner 10 can be heat molded in a one-stage molding operation, which substantially facilitates and abbreviates the fitting of the liner 10 to the foot of its user.

10 Figure 6 shows a blank, indicated generally by reference numeral 40, of heat moldable material used to make the liner 10.

The blank 40 is formed with a gap 42 which extends between the first and third flaps 16 and 21 and another gap 44, in the form of a slit, which extends between the second and
15 fourth flaps 17 and 23. The gaps 42 and 44, as viewed in Figure 6, are inclined downwardly and convergently towards a heel portion 46 in which the cut-out 28 is formed. These gaps 42 and 44 enable the flaps 16, 17, 21 and 23 to be wrapped snugly around the wearer's foot and leg in such a manner as to counter-act subsequent distortion of the liner during the molding of the liner.

20 More particularly, the gaps 42 and 44 are sufficiently long to ensure that stresses in the flaps 16 and 17 are not transmitted to the flaps 21 and 23, and vice versa, during the fitting and molding of the liner 10.

25 The flap 17 is formed with a straight edge 48 and the tongue 24 is formed from a blank indicated generally by reference numeral 50 in Figure 6, which has a corresponding straight edge 52. The tongue 24 is formed by joining the blank 50 along its edge 52 by stitching or welding to the edge 48 of the flap 17.

30 The boot liner 10 also includes a sole 54, shown in Figure 8, which is firstly formed separate from the blank 40 and then secured, by a joint 55 (Figure 3) along a peripheral

- 7 -

edge 56 (Figure 6) of the sole 54, to a bottom edge 58 of the blank 40, also by stitching or welding.

5 The sole 54 is made of a material which is such that the sole 54 is not molded to the wearer's foot during the fitting and molding of the liner 10. This avoids a "mashy" feel between the foot and the sole, which is undesirable when skiing. The sole 54 also provides stability during the fitting and molding and therefore counteracts dislocation of the sole and the rest of the liner during the fitting and molding of the liner.

10 The sole 54 may, for example, be made of natural gum rubber or a synthetic elastomer, and may be premolded, as a foot bed, to the underside of the wearer's foot.

- 8 -

Claims

1. A heat moldable boot liner, comprising an upper portion (14) extending upwardly from a foot portion (12) which includes first and second flaps (16, 17) which can be wrapped over a wearer's foot with the first flap (16) in overlapping relation to the second flap (17) characterized by a tongue (24) extending upwardly from the second flap (17), the upper portion (14) including third and fourth flaps (21, 23) which can be wrapped over the front of a lower leg portion of the wearer with the third and fourth flaps (21, 23) overlapping one another and overlapping the tongue (24).
5
10
2. A heat moldable boot liner as claimed in claim 1, characterized by a pair of gaps (42, 44) extending between the first and third flaps (16, 42) and the second and fourth flaps (17, 44), respectively.
15
3. A heat moldable boot liner as claimed in claim 1, characterized by a sole (54), formed separately from the foot portion (12), and a joint between the sole (54) and the foot portion (12) extending peripherally around the sole (54).
- 20 4. A heat moldable boot liner as claimed in claim 1, characterized in that the tongue (24) extends upwardly at least substantially to the top of the upper portion (14).
5. A heat moldable boot liner as claimed in claim 1, characterized by a fastener for securing the first flap (16) in the overlapping relation to the second flap (17).
25
6. A heat moldable boot liner as claimed in claim 5, characterized in that the fastener comprises patches (32, 33) of hook-and-loop fastener material secured to the first and second flaps (16, 17).
- 30 7. A heat moldable boot liner as claimed in claim 1, characterized in that the foot portion (12) includes a vertically externally convexedly curved heel portion (26).

- 9 -

8. A heat moldable boot liner as claimed in claim 7, characterized in that the heel portion (26) is formed by a V-shaped cut-out (28) in the foot portion (12), the V-shaped cut-out (28) having opposite edges joined together.
- 5 9. A method of fitting a heat moldable boot liner to a wearer's foot, comprising heating the boot liner (10) to render the liner (10) moldable, inserting the wearer's foot into the liner (10), and wrapping first and second flaps (21,23) on the liner (10) into mutually overlapping relationship over the wearer's foot, characterized by locating a tongue (24) extending from the second flap (17) against the front of a lower leg portion of the wearer, wrapping third and fourth flaps (21,23) on the liner (10) around the front of the lower leg portion of the wearer into overlapping relationship with one another and with the tongue (24), and inserting the liner (10), with the wearer's foot within, into a boot shell to mold the liner (10) between the wearer and the boot shell.
- 10 15
10. A method as claimed in claim 9, characterized by fastening the first and second flaps (16,17) to one another in their mutually overlapping relationship.
- 20 11. A method as claimed in claim 9, characterized by providing the boot liner (10) with a seamless sole (54) joined peripherally of the sole (54) to the liner (10).
- 25 12. A method as claimed in claim 9, characterized by providing the boot liner (10) with a vertically externally conversely curved heel portion (26) so as to snugly fit the wearer's heel.

1/4

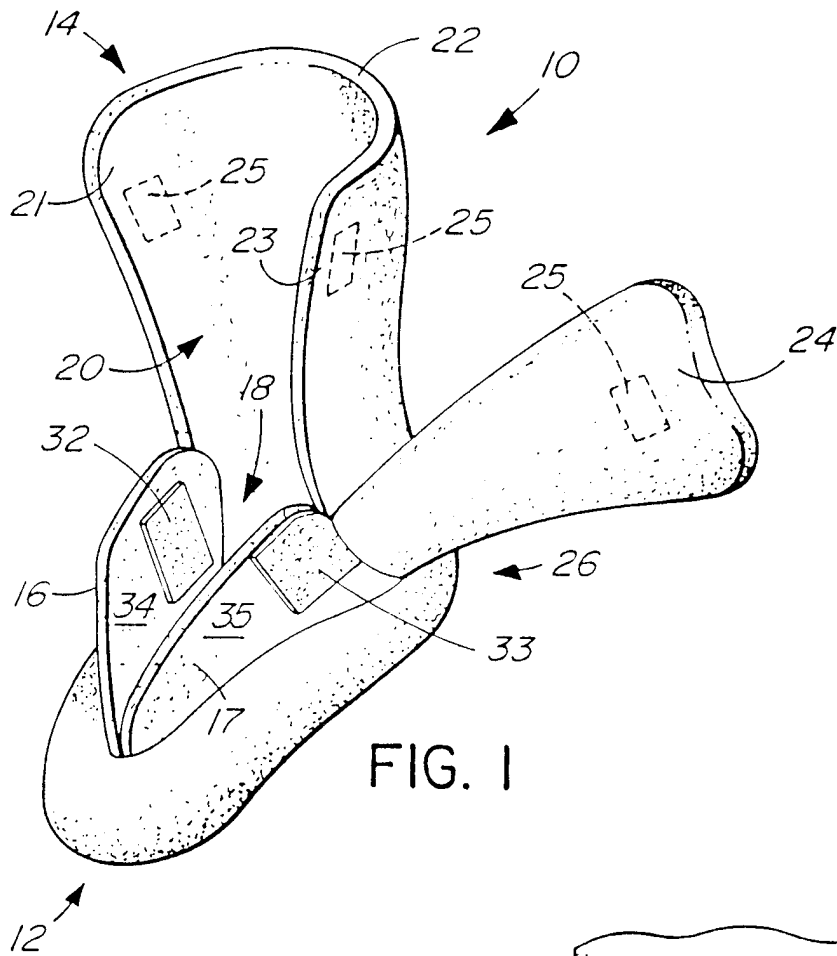


FIG. 1

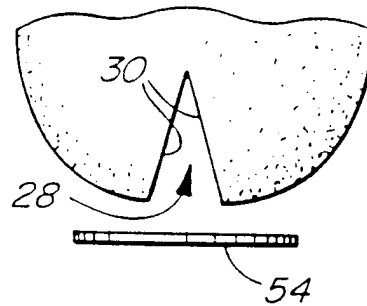


FIG. 2



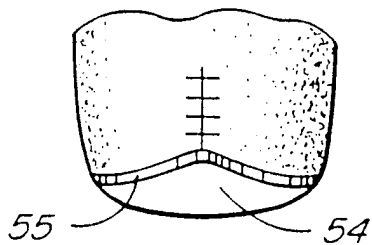


FIG. 3

2/4

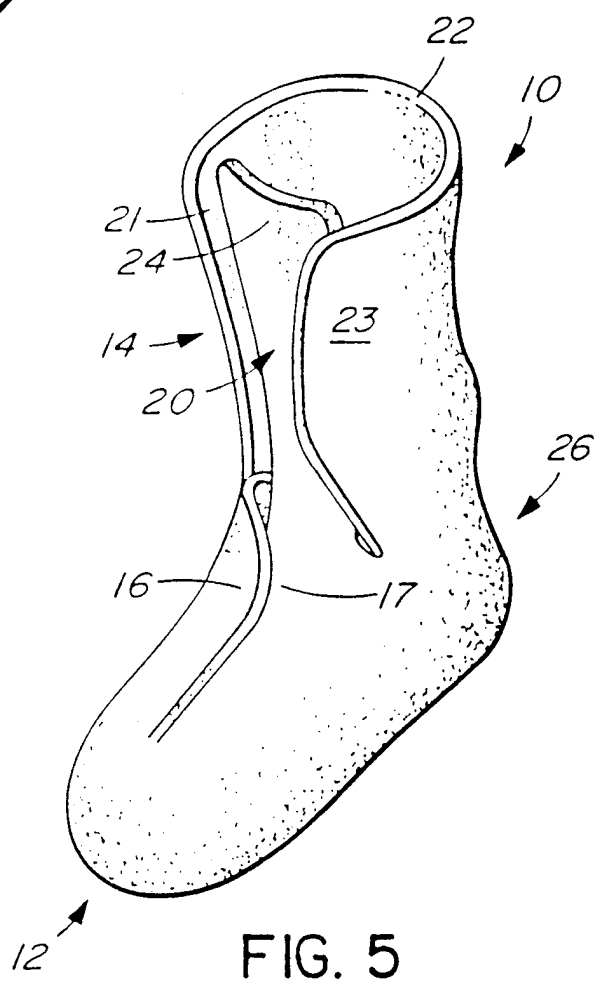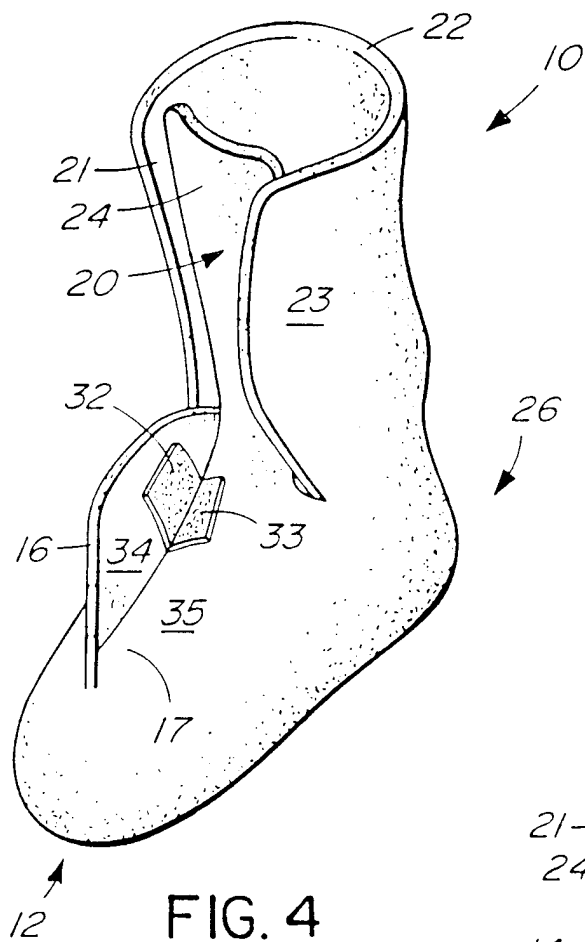

3/4

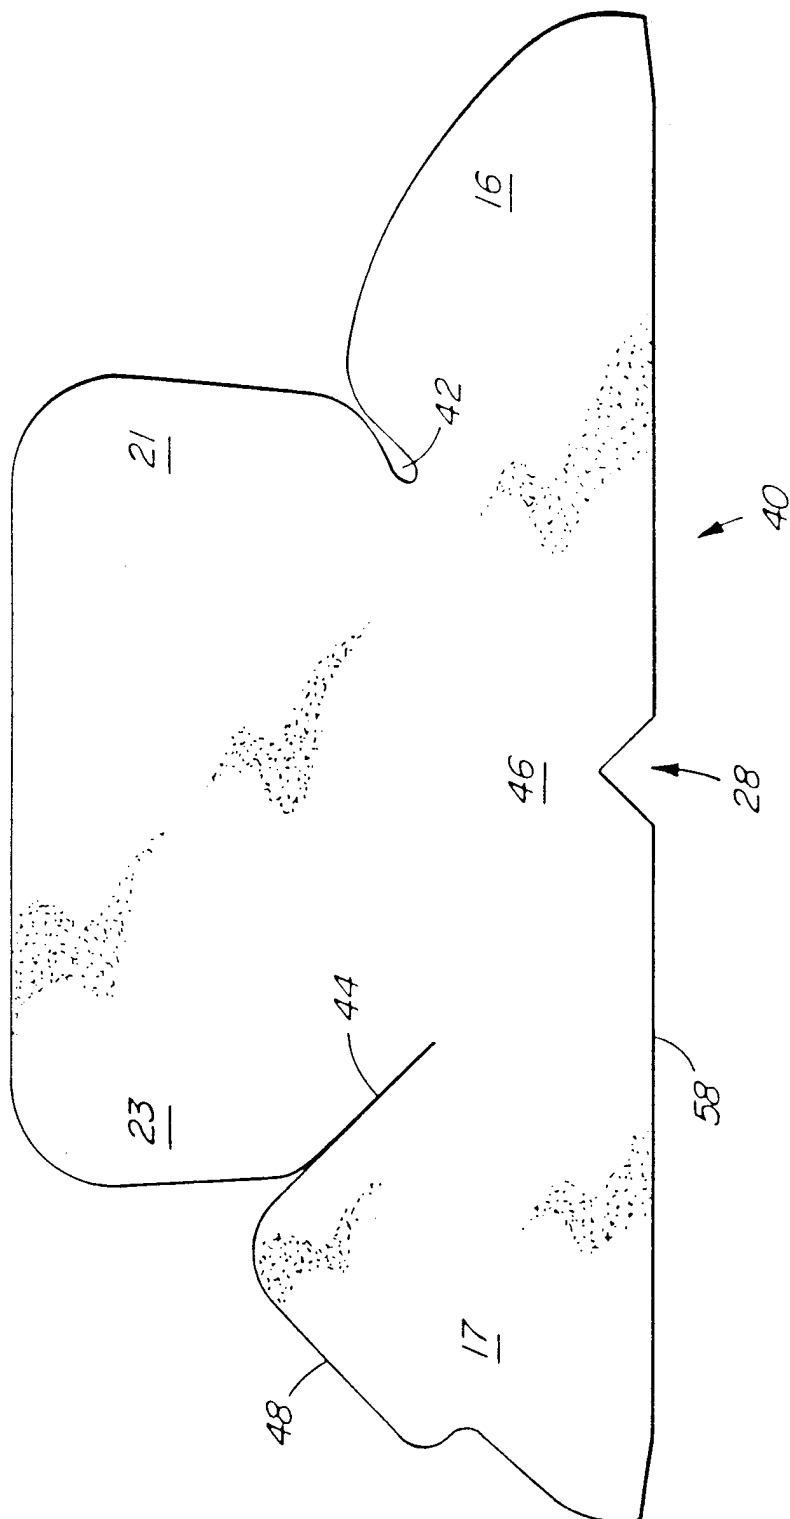


FIG. 6

4/4

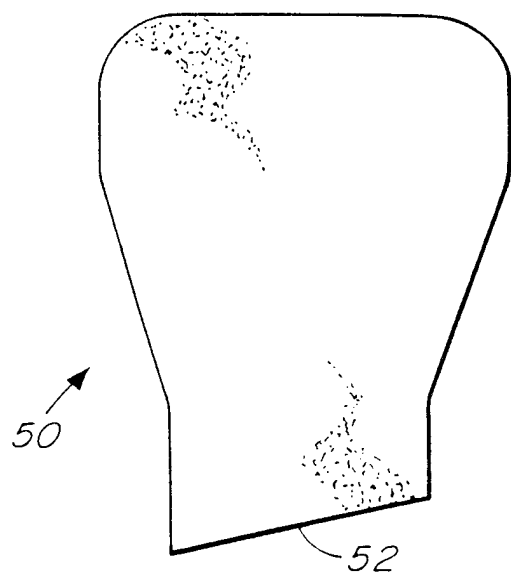


FIG. 7

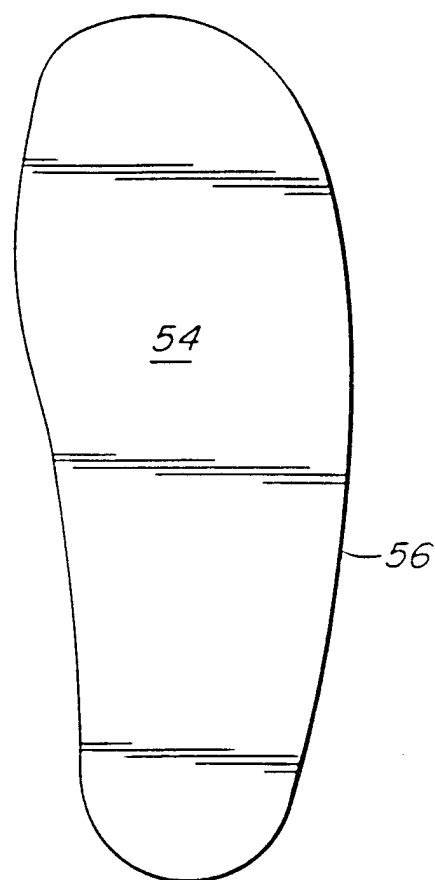


FIG. 8

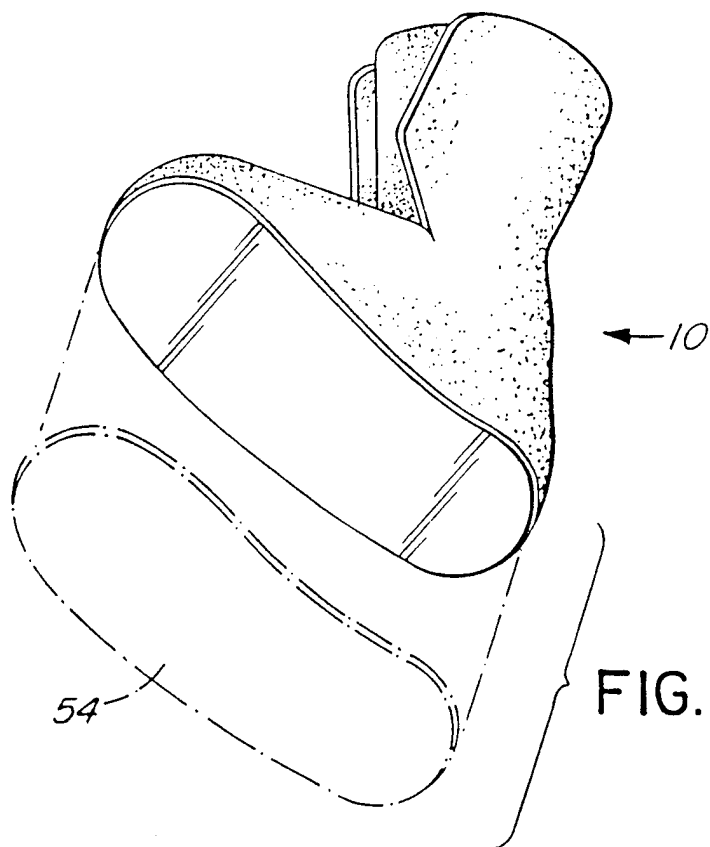


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 98/00139

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A43B5/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A43B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 94 09663 A (INTUITION SPORTS INC.) 11 May 1994 cited in the application see the whole document ---	1,9
A	WO 96 07339 A (S.I.D.A.S.) 14 March 1996 see the whole document ---	1,9
A	EP 0 250 892 A (NORDICA) 7 January 1988 see the whole document -----	3

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

2 July 1998

Date of mailing of the international search report

10/07/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Declerck, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

national Application No

PCT/CA 98/00139

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9409663 A	11-05-1994	AT 151235 T AU 5367894 A CA 2147655 A DE 69309705 D EP 0668730 A JP 8506494 T	15-04-1997 24-05-1994 11-05-1994 15-05-1997 30-08-1995 16-07-1996
WO 9607339 A	14-03-1996	FR 2724295 A AU 3261195 A CA 2199524 A EP 0781102 A	15-03-1996 27-03-1996 14-03-1996 02-07-1997
EP 0250892 A	07-01-1988	DE 3781600 A JP 1796530 C JP 5003281 B JP 63003804 A US 4790082 A	15-10-1992 28-10-1993 14-01-1993 08-01-1988 13-12-1988