


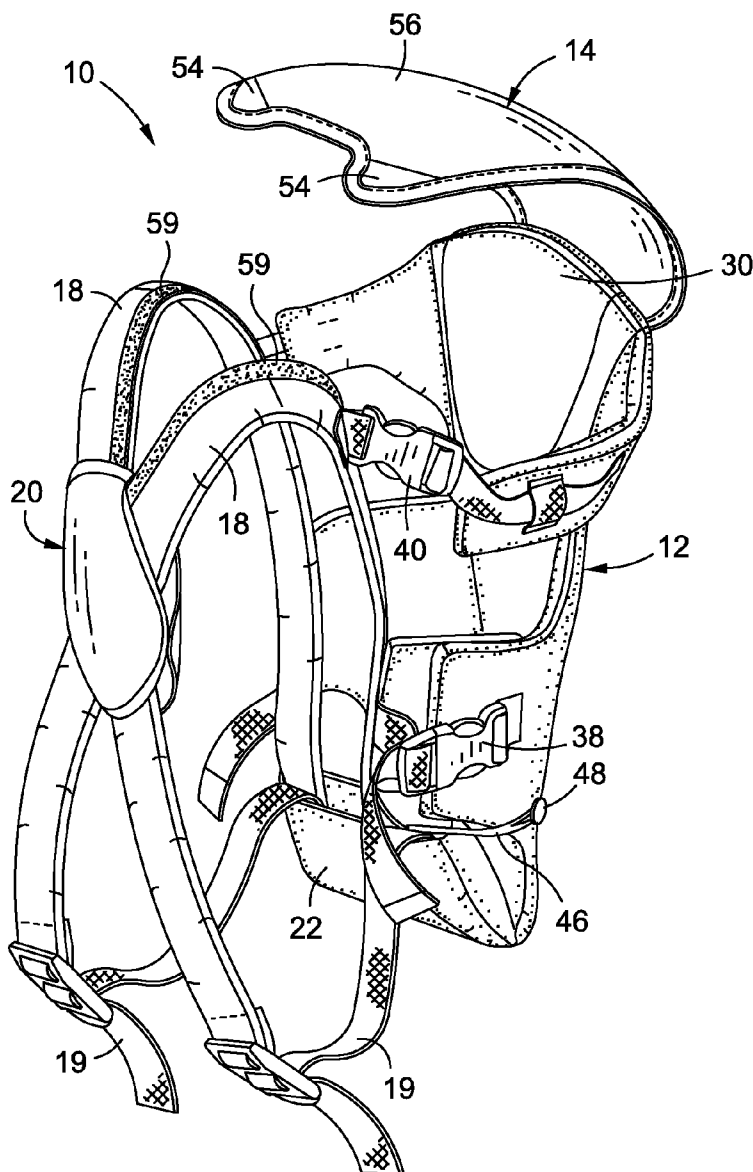

US 20120241487A1

(19) **United States**(12) **Patent Application Publication****Zack et al.**(10) **Pub. No.: US 2012/0241487 A1**(43) **Pub. Date: Sep. 27, 2012**(54) **MULTIFUNCTION INFANT CARRIER**(52) **U.S. Cl. 224/576; 224/160**(76) **Inventors:** **Elizabeth Zack**, Brooklyn, NY
(US); **Sara Lighthall**, San Diego,
CA (US)(57) **ABSTRACT**(21) **Appl. No.: 13/069,832**

In accordance with the present invention, there is provided is an infant carrier adaptable to support an infant in a forward facing position or a rearward facing position. The infant carrier may also be configured to allow for easy adjustment to fit the infant carrier to the specific size of the wearer. The infant carrier may also be configured to be connectable with a bib in a variety of configurations to protect the wearer or infant carrier from fluids or objects which may fall from the infant's mouth. The bib may also be connected to the infant carrier in a position to provide shade to the infant. In this regard, the bib may provide three-in-one functionality to the infant carrier to enhance the overall experience of wearing the carrier for both the wearer and the infant.

(22) **Filed: Mar. 23, 2011****Publication Classification**(51) **Int. Cl.**
A47D 13/02 (2006.01)
A41B 13/10 (2006.01)

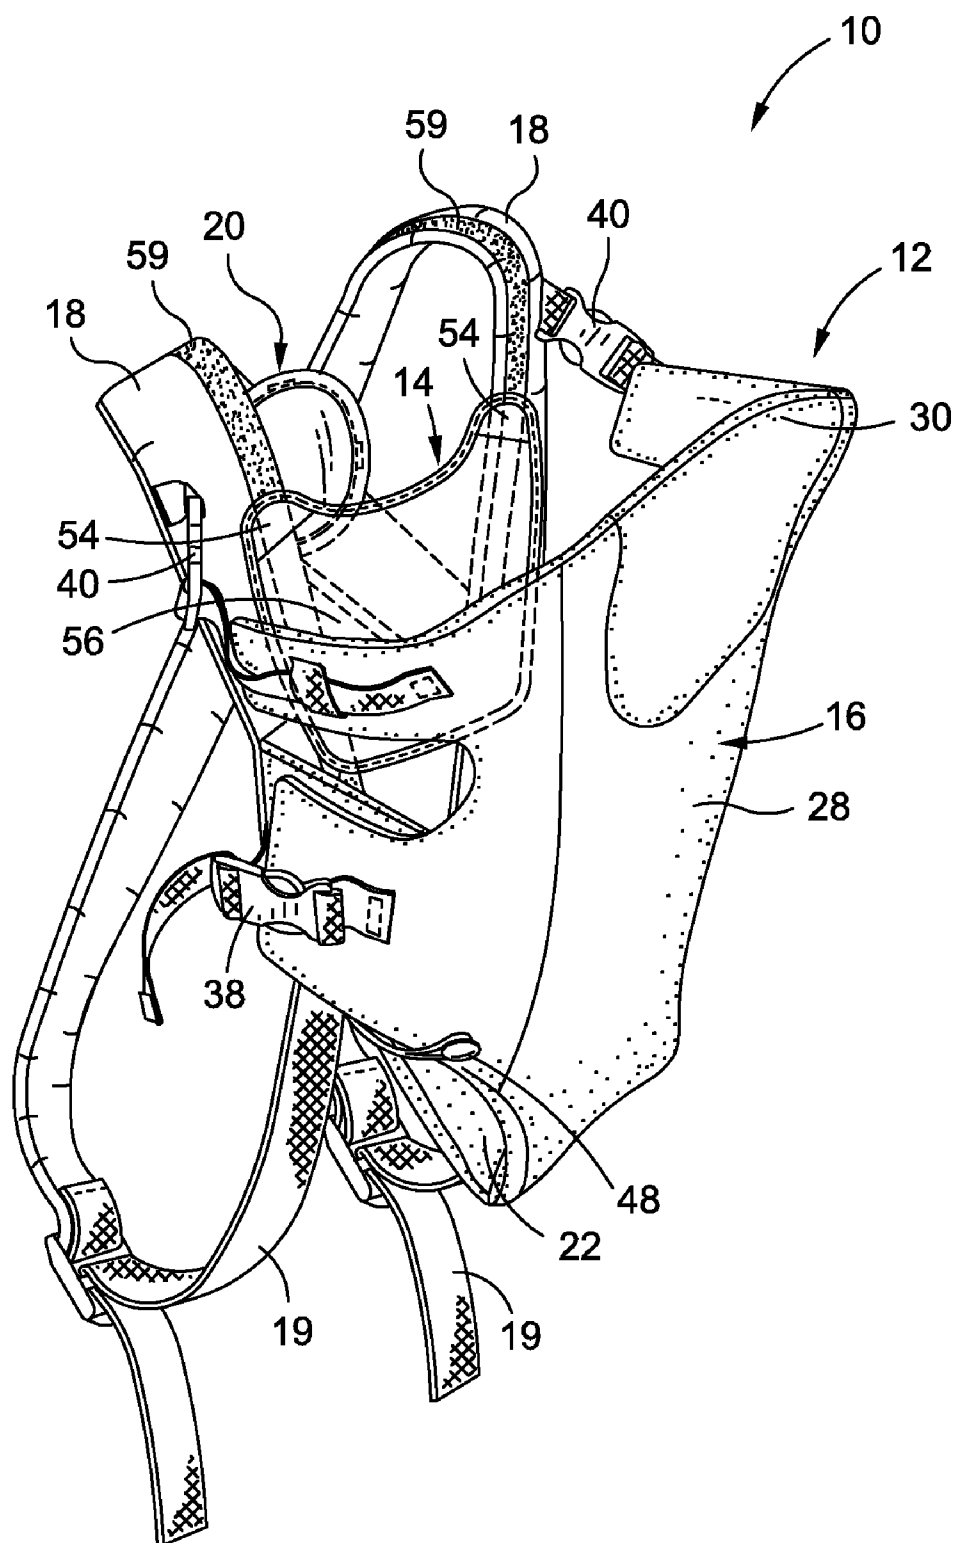


Fig. 1

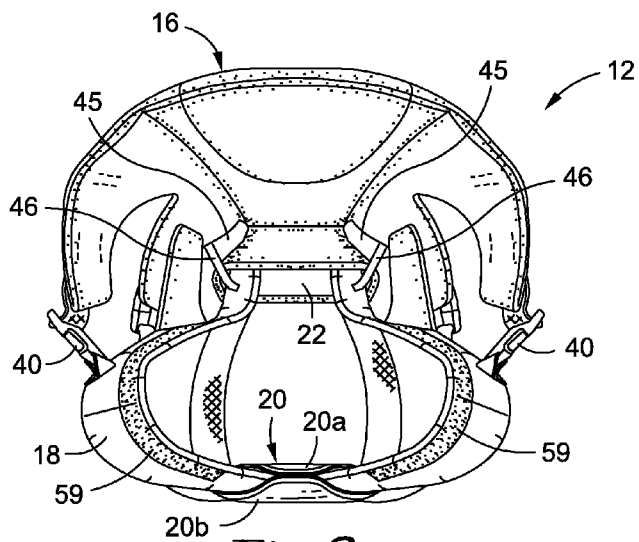


Fig. 2

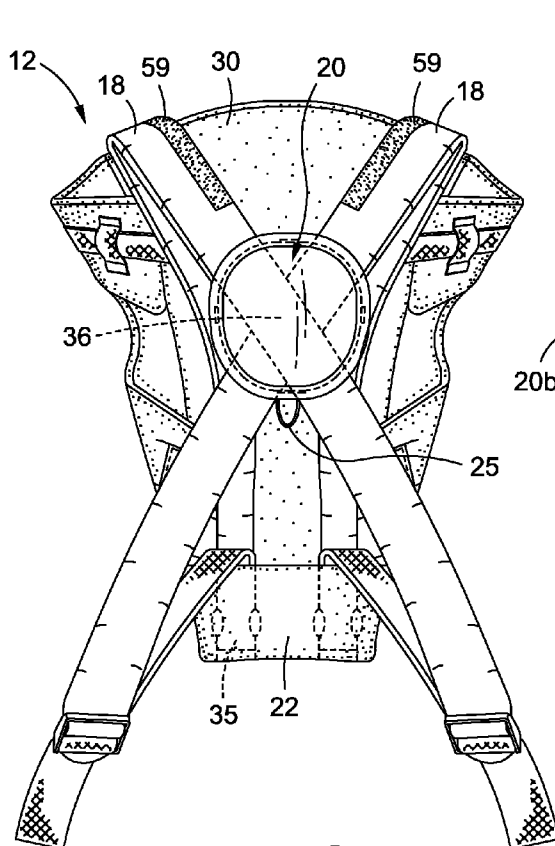


Fig. 3

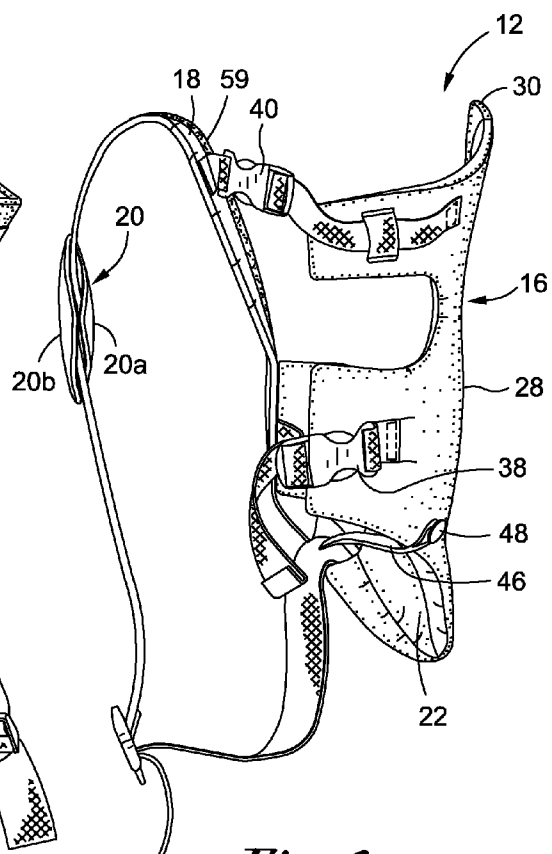


Fig. 4

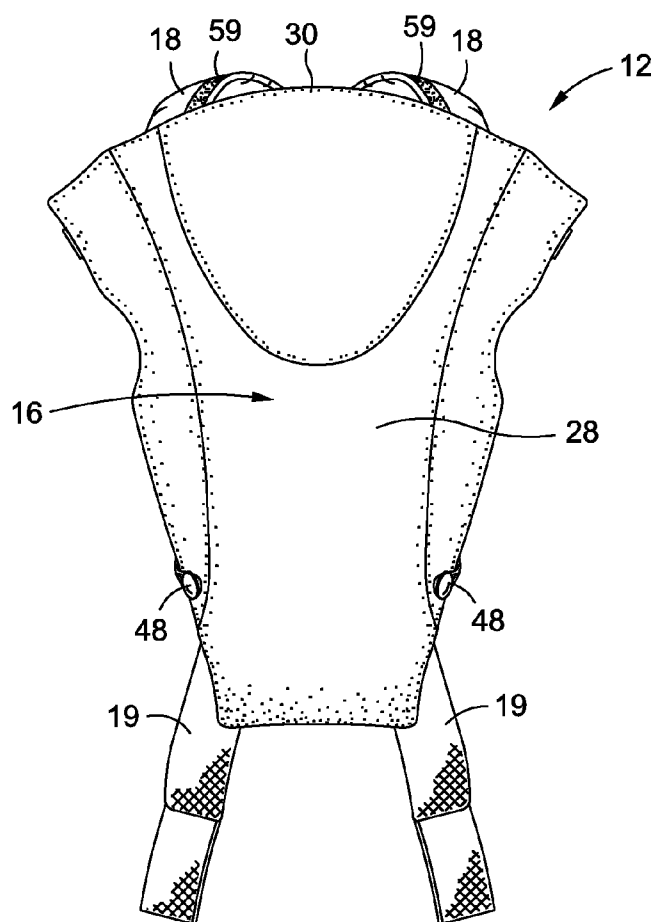


Fig. 5

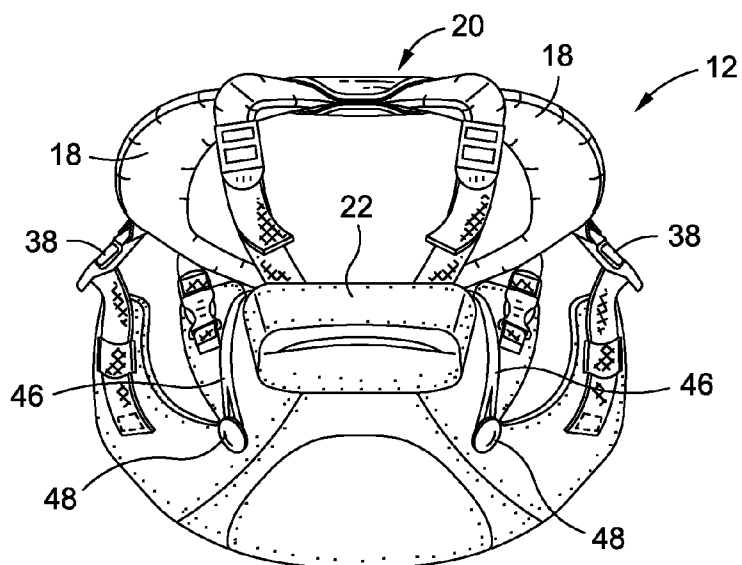
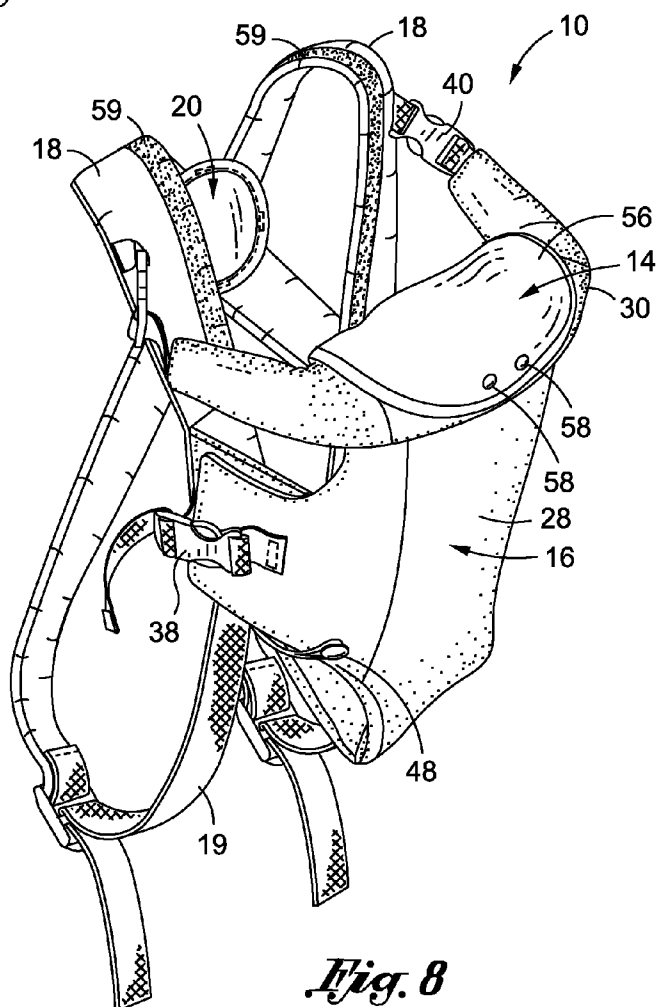
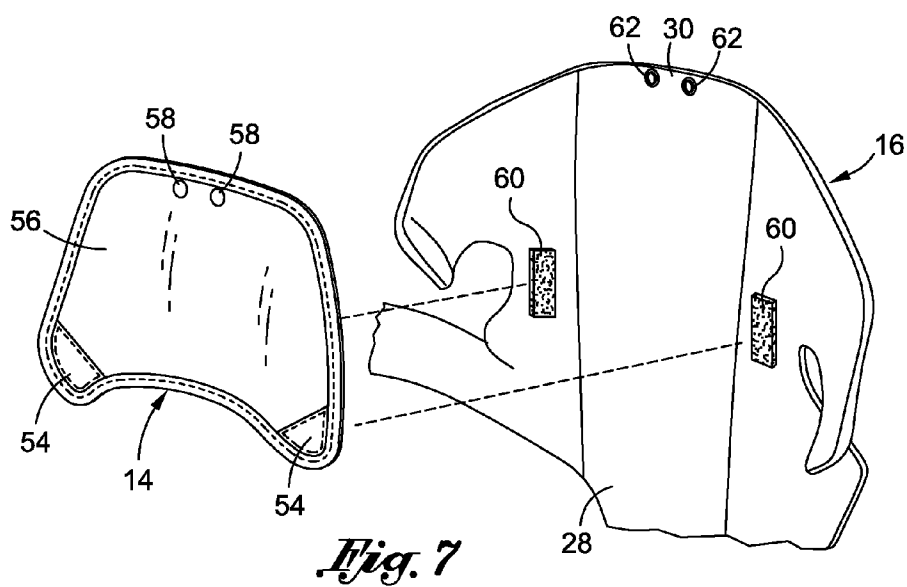


Fig. 6



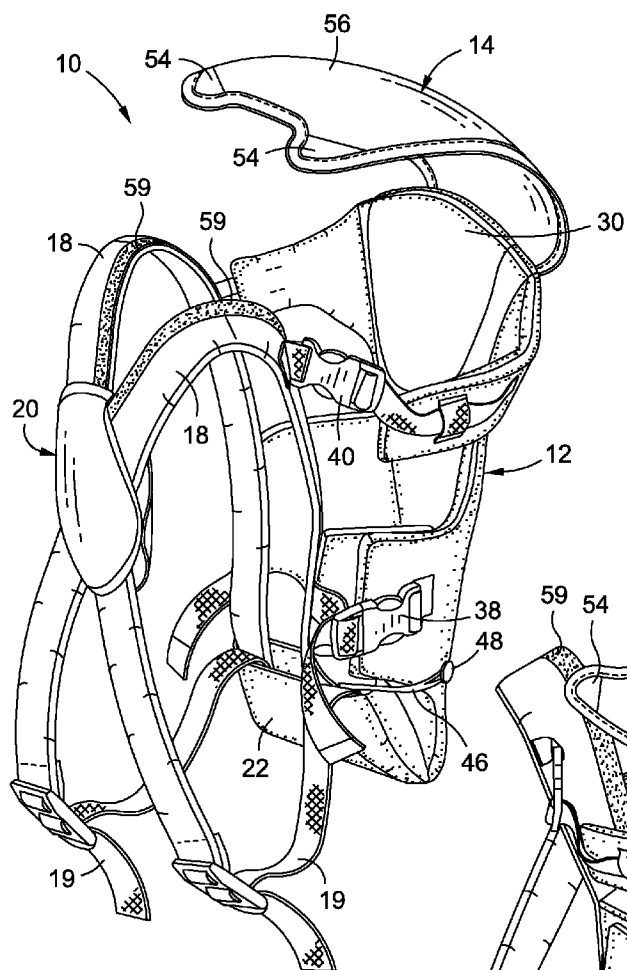


Fig. 9

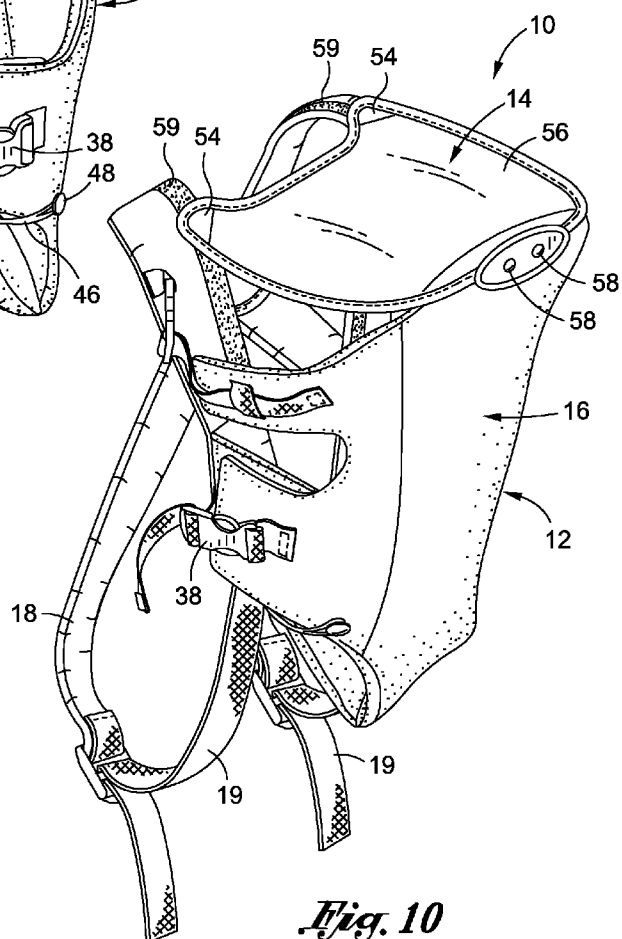


Fig. 10

MULTIFUNCTION INFANT CARRIER**CROSS-REFERENCE TO RELATED APPLICATIONS****[0001]** Not Applicable**STATEMENT RE: FEDERALLY SPONSORED RESEARCH/DEVELOPMENT****[0002]** Not Applicable**BACKGROUND OF THE INVENTION****[0003]** 1. Field of the Invention

[0004] The present invention relates generally to carriers adapted to be worn by an adult in order to support and carry an infant or young child. More particularly, the present invention is directed to an infant carrier having a bib attachment which is adapted to be disposed in a conventional bib position or in a sun-visor position to provide shade for the infant.

[0005] 2. Description of the Related Art

[0006] As is well known to parents of infants or young children, shoulder-supported infant carriers are extremely popular and commonly used to transport an infant or young child. Shoulder supported infant carriers as currently known in the art come in a wide range of designs and styles. A common attribute of these carriers is that they offer “hands free” operation, and allow the adult wearer to carry the infant while performing other activities. One currently known infant carrier is a frame-type carrier which typically supports the infant on the back of the wearer. Currently more popular than frame-type carriers are frameless or soft-sided carriers which typically support the infant on the front or chest of the adult wearer. In this regard, the soft-sided carriers allow for more interaction between the wearer and child.

[0007] Though soft-sided carriers provide certain advantages, they oftentimes possess certain deficiencies which detract from their overall utility. One such deficiency lies in the absence of a structure which protects the wearer or carrier from oral discharge (i.e., vomit, drool, etc.) from the infant. This deficiency is magnified by the fact that when the child is placed within the carrier, the wearer tends to move and be active, which may increase the likelihood that the infant will vomit, especially shortly after a meal.

[0008] Another deficiency lies in the absence of a structure which provides shade for the infant during use. Shortly after birth, young children tend to have sensitive skin, which may easily burn or be damaged by direct exposure to sunlight. As such, conventional infant carriers may leave the infant at risk of suffering from sunburn.

[0009] A further deficiency relates to the adaptability of the infant carrier to accommodate the specific size of the wearer. It is understood that the infant carrier may be used by a wide range of infant care providers (i.e., mother, father, grandparents, aunts, uncles, friends, etc.). As such, it is desirable that the infant carrier be easily adaptable to conform to the size of the various infant care providers which may wear the infant carrier.

[0010] The present invention addresses and overcomes these deficiencies by providing an infant carrier which is easily adaptable to fit snugly on a wearer, wherein the infant carrier includes a bib which may be oriented in a conventional bib position to protect the wearer and infant carrier from oral discharge from the infant, as well as a sun-shade position to

provide shade to the infant. These and other advantages attendant to the present invention will be described in more detail below.

BRIEF SUMMARY OF THE INVENTION

[0011] In accordance with the present invention, there is provided an infant carrier adaptable to support an infant in a forward facing position or a rearward facing position. The infant carrier is also configured to allow for easy adjustment to fit the infant carrier to the specific size of the wearer. The infant carrier is additionally configured to be connectable with a bib in a variety of configurations to protect the wearer or infant carrier from fluids or objects which may fall from the infant's mouth. The bib may also be connected to the infant carrier in a position to provide shade to the infant. In this regard, the bib may provide three-in-one functionality to the infant carrier to enhance the overall experience of wearing the carrier for both the wearer and the infant.

[0012] According to one implementation, the infant carrier includes a pair of shoulder straps and a main panel engageable with the pair of shoulder straps to define a pair of leg openings to receive and support the infant within the infant carrier. The bib includes a pair of attachment tabs and a bib panel connected to the pair of attachment tabs, the pair of attachment tabs being configured to be releasably attachable to the infant carrier.

[0013] The bib may be disposed in a first bib configuration by connecting the attachment tabs to a respective shoulder strap to dispose the bib panel between the pair of shoulder straps. The bib may be deployed in the first bib configuration when the infant is in the rearward facing position.

[0014] The bib may be disposed in a second bib configuration by connecting the attachment tabs to connecting straps formed on the main panel of the infant carrier, such that the bib panel extends from a body portion to a distal portion of the main panel when the infant carrier is in the forward facing position.

[0015] The bib may be disposed in a sun-visor configuration when the infant carrier is in the rearward facing position with the main panel extending above the infant's head. The distal portion of the bib is connected to the main panel and the attachment tabs are connected to the shoulder straps to deploy the bib over the infant to provide shade to the infant.

[0016] The bib and infant carrier may be configured to allow a wearer to easily switch the position of the bib between the first bib configuration, second bib configuration and the sun visor configuration.

[0017] The pair of shoulder straps may be connected to the main panel to assume an overlapping, intersecting configuration to define an intersection point. The infant carrier may additionally include a strap connector coupled to the straps and slidable along the straps to adjust the location of the intersection point to more comfortably fit the wearer.

[0018] The present invention is best understood by reference to the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] These, as well as other features of the present invention, will become more apparent upon reference to the drawings wherein:

[0020] FIG. 1 is an upper perspective view of an infant carrier assembly including an infant carrier and a bib disposed in a first configuration for an infant seated in the infant carrier in a facing-in position;

[0021] FIG. 2 is a top view of an embodiment of the infant carrier;

[0022] FIG. 3 is a rear view of the infant carrier depicted in FIG. 2;

[0023] FIG. 4 is a side view of the infant carrier depicted in FIGS. 2-3;

[0024] FIG. 5 is a front view of the infant carrier depicted in FIGS. 2-4;

[0025] FIG. 6 is a bottom view of the infant carrier depicted in FIGS. 2-5;

[0026] FIG. 7 is an exploded view of the bib and a section of the infant carrier, wherein the bib is in a second configuration for an infant seated in the infant carrier in a facing-out position;

[0027] FIG. 8 is an upper perspective view of the infant carrier assembly with the bib in the second configuration;

[0028] FIG. 9 is an upper perspective view of the infant carrier assembly with the bib partially deployed in a sun-shade configuration to provide shade to an infant seated in the infant carrier; and

[0029] FIG. 10 is an upper perspective view of the infant carrier assembly with the bib completely deployed in the sun-shade configuration.

[0030] Common reference numerals are used throughout the drawings and detailed description to indicate like elements.

DETAILED DESCRIPTION OF THE INVENTION

[0031] Referring now to the drawings wherein the showings are for purposes of illustrating a preferred embodiment of the present invention only, and not for purposes of limiting the same, there is depicted an infant carrier assembly 10 which is specifically adapted to be worn by a wearer to support an infant or young child. The infant carrier assembly 10 includes an infant carrier 12 and a bib 14 detachably engageable with the infant carrier 12. The infant carrier 12 generally includes a main panel 16 and a pair of shoulder straps 18 connected to the main panel 16 to allow a wearer to dispose the infant carrier 12 over the wearer's shoulder to position the main panel 16 in front of the wearer's chest. The infant carrier 12 may include a strap adjuster 20 to adjust the size of the shoulder straps 18 to adapt the carrier 12 to the specific size of the wearer. The infant carrier 12 may also include a pocket 22 to capture fasteners or buckles connecting the straps 18 to the main body 16. The pocket 22 may contain the fasteners or buckles to provide more comfort to the lower abdominal area of the wearer. The bib 14 may be connected to the infant carrier 12 in several different positions to serve a number of different purposes. For instance, the bib 14 may be connected to the infant carrier 12 to serve as a conventional bib to protect the wearer and/or the infant carrier 12 from fluids or objects which may fall from the infant's mouth (see FIGS. 1, 7, and 8). It is additionally contemplated that the bib 14 may be connected to the infant carrier 12 for use as a sun visor to provide shade to the infant (see FIGS. 9 and 10). As such, a single bib 14 may be deployed in all of the above-described configurations to enhance the usage of the infant carrier 12.

[0032] Turning now to the specific structural features of the infant carrier 12, the main panel 16 of the infant carrier 12 includes an inner surface and an opposing outer surface. The

main panel 16 defines a body portion 28 and a distal portion 30 foldable relative to the body portion 28 to adapt the infant carrier 12 from a facing-in configuration to a facing-out configuration. The main panel 16 may be comprised of a medial section and a pair of opposing lateral sections disposed on opposing sides of the medial section. The medial section and lateral sections collectively define a cradling support structure to support an infant adjacent the chest of the wearer. The main panel 16 may preferably be filled with a padded material to comfortably cradle the infant within the carrier 12.

[0033] A pocket 22 is connected to the main panel 16 opposite the distal portion 30. The pocket 22 is sized and configured to capture buckles or connectors used to connect the main panel 16 to the shoulder straps 18, as described in more detail below. The pocket 22 covers the buckles so the buckles do not painfully rub against the wearer's abdomen.

[0034] The main panel 16 is configured to be detachably engageable with the pair of shoulder straps 18. The shoulder straps 18 allow the wearer to transfer the collective load of the carrier 12 and the infant to the wearer's shoulders, similar to a conventional backpack. Along these lines, the straps 18 preferably include a padded material to ease the load on the wearer. The straps 18 include a length adjusting portion 19 to allow the wearer to adjust the overall length of the strap 18 to adjust the strap 18 to comfortably fit the wearer. The length adjusting portion 19 is preferably formed of woven nylon, or similar materials known by those skilled in the art, which are durable and allow for easy length adjustment of the strap 18.

[0035] The shoulder straps 18 and main panel 16 may include a plurality of complimentary fasteners/connectors to facilitate connection therebetween. In the embodiment depicted in the drawings, the main panel 16 and straps 18 are connected via a pair of first connectors 35 (captured by the pocket 22; shown in phantom in FIG. 3), a pair of second connectors 38, and a pair of third connectors 40. Each pair of connectors 35, 38, 40 may include a set of complimentary male and female buckle halves which are cooperatively engageable with each other.

[0036] In order to easily place the infant within the carrier 12, one of the pair of second connectors 38 and one of the pair of third connectors 40 may be disconnected to open up one side of the carrier 12. Once the infant is placed within the carrier 12, the disconnected second connectors 38 and third connectors 40 may be reconnected to secure the infant within the carrier 12. Since only one side of the carrier 12 needs to be opened when placing or removing an infant from the carrier 12, certain embodiments may include a first connector 35, second connector 38 and third connector 40 disposed on a common side of the infant carrier 12, with the opposing side of the infant carrier 12 having a more permanent attachment between the shoulder straps 18 and the main panel 16, such as being sewn together.

[0037] The shoulder straps 18 are disposed in an intersecting and overlapping configuration (see FIG. 3) to define an intersection point 36 where the straps 18 overlap each other. The strap adjuster 20 is connected to the straps 18 such that the intersection point 36 is disposed within the strap adjuster 20. The strap adjuster 20 may include two halves 20a, 20b (see FIG. 3) which are sewn together or otherwise fastened to define four openings through which the shoulder straps 18 pass through. One or both of the strap adjuster halves 20a, 20b may include a padded material disposed therein to rest comfortably adjacent the wearer's back. The strap adjuster 20 is configured to be slidable along the straps 18 to adjust the

position of the shoulder straps **18**, and more specifically, the position of the intersection point **36** relative to the wearer's back for a more comfortable fit for the wearer. By moving the intersection point **36**, the wearer may adjust the load distribution to mitigate muscle soreness or fatigue while wearing the carrier **12**. A loop **25** (see FIG. **3**) may be connected to the strap adjuster **20** to allow a user to easily grab the adjuster **20** for moving the adjuster **20** along the straps **18**.

[0038] The infant carrier **12** defines leg openings **45** (see FIG. **2**) through which an infant's legs may pass through when the infant is placed within the carrier **12**. Along these lines, the leg opening **45** defined by the infant carrier **12** may be too large for smaller infants, allowing the smaller infants to fall out of the carrier **12** through the leg openings. Accordingly, the carrier **12** may include leg straps **46** (see FIGS. **2** and **4**) extending between the shoulder straps **18** and the main body **16** to decrease the size of the leg opening **45** to make it safe for use with smaller infants. The leg straps **46** include a slot configured to receive a button **48** (see FIG. **4**) disposed on the main panel **16**. As the infant becomes bigger, use of the leg straps **46** may not be necessary to ensure the infant is safely secured within the carrier **12**.

[0039] The infant carrier **12** may be adaptable to support an infant in at least two different positions: (1) a facing-out position (i.e., forward position) or (2) a facing-in position (i.e., a rearward position). When the infant is relatively young, the infant may not have developed the strength and coordination to independently support his head. Therefore, it may be suitable to place the infant in the facing-in position wherein the distal portion **30** is disposed in a rearward configuration to provide support behind the infant's head. In the rearward configuration, the distal portion **30** is substantially coplanar with the body portion **28** (see FIG. **1**) and extends behind the infant's head to provide support behind the infant, while the wearer's chest provides frontal support to the infant's head. In the rearward configuration, the pair of third connectors **40** are engaged to maintain the distal portion **30** in the rearward configuration. In other words, the third connectors **40** connect the distal portion **30** to the straps **18** to maintain the distal portion **30** in a coplanar position relative to the body portion **28**.

[0040] As the child grows older and gains the strength and coordination to support his own head, the child may prefer to face out when placed in the carrier **12**. Therefore, the main panel **16** is configured to transition between the rearward configuration to a forward configuration by disconnecting the pair of third connectors **40**, and folding the distal portion **30** relative to the body portion **28** to dispose the distal portion **30** in an overlapping position relative to the body portion **28** (see FIG. **8**). Therefore, when the child is placed in the carrier **12** in the facing-out position, the infant may be able to see in front of the carrier **12**.

[0041] The following discussion now focuses on the use of the bib **14**, which may be connected to the infant carrier **12** in several different positions to add to the features and functionality of the infant carrier assembly **10**. The bib **14** includes a pair of attachment tabs **54** and a bib panel **56**, which may include a distal fastener **58**.

[0042] Referring now specifically to FIG. **1**, infant carrier **12** is shown in a facing-in configuration, with the bib **14** being disposed in a first bib configuration. The bib attachment tabs **54** are attached to bib attachment strips **59** located on the shoulder straps **18** to dispose the bib **14** between the infant and the wearer. In this regard, the bib **14** is used as a conven-

tional bib to protect the wearer's clothing from fluids or objects which may fall out of the infant's mouth. The attachment tabs **54** and bib attachment strips **59** are cooperatively engageable with each other, and are preferably formed of hook and loop fastening material; however, other fasteners known by those skilled in the art may be used without departing from the spirit and scope of the present invention. The bib **14** may be deployed in the first bib configuration before or after the infant is placed within the carrier **12**.

[0043] Referring now to FIGS. **7-8**, the infant carrier **12** is shown in a forward configuration to receive the infant in the facing-out position. In this configuration, the bib **14** is disposed in a second bib configuration with the attachment tabs **54** being connected to bib attachment strips **60** formed on the inner surface of the main panel **16**. The bib panel **56** extends from the body portion **28** to the distal portion **30**, with the distal fastener **58** being fastened to an attachment snap **62** formed on the distal portion **30**. It is contemplated that certain embodiments may not include an attachment snap **62**, in which case the distal end of the bib panel **56** simply hangs over the distal portion **30** of the main panel **16**. In the second bib configuration, the bib **14** serves as a conventional bib, similar to the first bib configuration, to protect the infant carrier **12** from fluids or objects discharged from the infant's mouth. The bib **14** may be connected to the carrier **12** in the second bib configuration before or after the infant is placed within the carrier **12**, and when the infant carrier **12** is in the facing-in position (as shown in FIG. **7**, prior to being transitioned into the facing-out position), or in the facing-out position.

[0044] The attachment tabs **54** and attachment strips **60** are configured to be cooperatively engageable with each other, and are preferably formed of hook and loop fastening material, although other fasteners known in the art may also be used. Furthermore, the distal fastener **58** and attachment snap **62** preferably include complimentary snap-fasteners, but may comprise hook and loop fastening material or other fastening devices known in the art.

[0045] Turning now to FIGS. **9** and **10**, the bib **14** is shown in a third, sun visor configuration to provide shade for the infant disposed within the carrier **12**. In the sun visor configuration, the attachment tabs **54** are connected to the bib attachment strips **59** disposed along the shoulder straps **18**. The distal connector **58** is connected to the attachment snaps **62** to dispose the bib panel **56** over the carrier **12** to provide shade for the infant. When the bib **14** is in the sun visor configuration, the infant carrier **12** is preferably disposed in the facing-in position to extend the distal portion **30** of the main panel **16** above the infant's head to allow the bib **14** to extend over the infant to provide shade to the infant.

[0046] As set forth above, the bib **14** may advantageously provide three-in-one functionality to the infant carrier **12** to significantly enhance the experience of using the carrier **12** for the wearer, as well as the infant. In this regard, the bib **14** may be disposed in the first and second configurations to serve as a conventional bib to position the bib **14** adjacent the infant's mouth to collect fluids or objects discharged from the infant to protect the wearer's clothes, infant's clothes, as well as the infant carrier **12** fabric. The bib **14** may also be connected to the infant carrier **12** in a position to provide shade to the infant, which is critical given the sensitive nature of an infant's skin.

[0047] Although the foregoing discusses an infant carrier **12** and bib **14** disposable in three distinct positions, it is

understood that various implementations of the infant carrier assembly **10** may include an infant carrier **12** and bib **14** configured to be disposable in only one or two of the above described configurations. For instance, one embodiment may include an infant carrier **12** and corresponding bib **14** configured to be disposable in the first bib configuration and the second bib configuration, but not the sun visor configuration. In this regard, the bib **14** may not include a distal connector **58** and the infant carrier **12** may not be outfitted with corresponding attachment snaps **62**. However, such an infant carrier assembly **10** would nevertheless provide two-in-one functionality by including a bib **14** disposable in both the first bib configuration and the second bib configuration to accommodate an infant seated in a facing-in position or a facing-out position.

[0048] The bib **14** is preferably formed from a washable material to allow the wearer to simply remove the bib **14** from the carrier **12** when the bib **14** becomes dirty. In this regard, the wearer may have a number of bibs **14** on hand to easily swap one bib **14** for another when a bib **14** becomes dirty.

[0049] The bib **14** may also include a pattern, design or other indicia displayed thereon to enhance the aesthetic appeal of the carrier **12**. Given that the bib **14** is prominently displayed in both the second bib configuration, as well as the sun visor configuration, various bibs **14** may be used to routinely change the overall appearance of the carrier assembly **10**. Furthermore, different bibs **14** may be used to mark different occasions. For instance, a beach-themed bib **14** may be used if the wearer and infant are going to the beach, whereas a bib **14** having animals displayed thereon may be used if the wearer and infant are planning an outing to the zoo. It is further contemplated that the bib **14** may include patterns, logos, or other indicia corresponding to various holidays, such as fireworks/flags for the Fourth of July, snowmen for winter holidays, a cornucopia for Thanksgiving, etc. Furthermore, if the carrier **12** is used to carry an infant girl, a bib **14** including a pink color may be used, whereas, if the carrier **12** is used to carry an infant boy, a bib **14** including a blue color may be used. As such, the bib **14** allows a wearer to quickly and easily modify the overall appearance of the infant carrier assembly **10** to suit the particular tastes of the wearer or to mark a particular holiday or season.

[0050] This disclosure provides an exemplary embodiment of the present invention. The scope of the present invention is not limited by this exemplary embodiment. Numerous variations, whether explicitly provided for by the specification or implied by the specification, such as variations in structure, dimension, type of material and manufacturing process may be implemented by one of skill in the art in view of this disclosure.

What is claimed is:

1. An infant carrier assembly for carrying an infant, the infant carrier assembly comprising:

an infant carrier including:

a pair of shoulder straps; and

a main panel having a body portion and a distal portion, the main panel being engageable with the pair of shoulder straps to define a pair of leg openings to receive and support the infant within the infant carrier, the main panel being transitional between a rearward configuration wherein the distal portion is substantially coplanar with the body portion and a forward

configuration wherein the distal portion is folded relative to the body portion to overlap the body portion; and

a bib having a pair of attachment tabs and a bib panel connected to the pair of attachment tabs, the pair of attachment tabs being configured to be releasably attachable to the infant carrier in a first bib configuration when the infant carrier is in the rearward configuration to dispose the bib panel between the pair of shoulder straps, and a second bib configuration when the infant carrier is in the forward position to dispose the bib panel adjacent the main panel.

2. The infant carrier assembly of claim 1, wherein the pair of attachment tabs are connected to respective ones of the pair of shoulder straps when the bib is in the first bib configuration.

3. The infant carrier assembly of claim 1, wherein the bib panel extends from the body portion to the distal portion when the bib is in the second bib configuration.

4. The infant carrier assembly of claim 3, wherein the pair of attachment tabs are connected to prescribed locations of the body portion when the bib is in the second bib configuration.

5. The infant carrier assembly of claim 4, wherein the bib panel is connected to a prescribed location of the distal portion when the bib is in the second bib configuration.

6. The infant carrier assembly of claim 1, wherein the bib is configured to be attachable to the infant carrier to assume a sun visor configuration, wherein the pair of attachment tabs are connected to respective ones of the pair of shoulder straps, and the bib panel is attached to the main panel.

7. The infant carrier assembly of claim 6, wherein the bib is connected to the infant carrier in the sun visor configuration when the infant carrier is in the rearward configuration.

8. The infant carrier assembly of claim 6, wherein the bib panel includes a distal portion connected to the distal portion of the main panel when the bib is in the sun visor configuration.

9. The infant carrier assembly of claim 1, further comprising a pair of fasteners configured to engage the distal portion to the pair of shoulder straps to dispose the distal portion in the rearward configuration and to disengage the distal portion from the pair of shoulder straps to dispose the distal portion in the forward configuration.

10. The infant carrier assembly of claim 1, wherein the pair of shoulder straps are connected to the main panel to assume an overlapping, intersecting configuration to define an intersection point.

11. The infant carrier assembly of claim 10, further comprising a strap connector slidably coupled to the pair of shoulder straps, the strap connector being slidable along the pair of shoulder straps to move the intersection point along the pair of shoulder straps.

12. The infant carrier assembly of claim 1, further including a pair of strap fasteners for engaging the pair of shoulder straps to the main panel, the infant carrier further comprising a pocket coupled to the main panel, the pocket being sized and configured to capture the pair of strap fasteners.

13. An infant carrier for carrying an infant, the infant carrier comprising:

a main panel;

a pair of shoulder straps engageable with the main panel to define a pair of leg openings to receive and support the infant within the infant carrier, the pair of shoulder straps

being connected to the main panel to assume an overlapping, intersecting configuration to define an intersection point; and

a strap connector slidably coupled to the pair of shoulder straps, the strap connector being slidable along the pair of shoulder straps to move the intersection point along the pair of shoulder straps.

14. The infant carrier of claim **13**, wherein the main panel includes a body portion and a distal portion moveable relative to the body portion between a rearward configuration wherein the distal portion is substantially coplanar with the body portion, and a forward configuration wherein the distal portion is folded relative to the body portion about a fold line to overlap the body portion.

15. The infant carrier assembly of claim **14**, further comprising a pair of rearward fasteners configured to engage the distal portion to the pair of shoulder straps to dispose the distal portion in the rearward configuration and to disengage the distal portion from the pair of shoulder straps to dispose the distal portion in the forward configuration.

16. An infant carrier for carrying an infant, the infant carrier comprising:

a main panel;

a pair of shoulder straps engageable with the main panel to define a pair of leg openings to receive and support the infant within the infant carrier;

a pair of strap fasteners for engaging the pair of shoulder straps to the main panel; and

a pocket coupled to the main panel, the pocket being sized and configured to capture the pair of strap fasteners.

17. The infant carrier of claim **16**, wherein the main panel includes a body portion and a distal portion moveable relative to the body portion between a rearward configuration wherein the distal portion is substantially coplanar with the body portion, and a forward configuration wherein the distal portion is folded relative to the body portion about a fold line to overlap the body portion.

18. The infant carrier of claim **17**, further comprising a pair of rearward fasteners configured to engage the distal portion to the pair of shoulder straps to dispose the distal portion in the rearward configuration and to disengage the distal portion from the pair of shoulder straps to dispose the distal portion in the forward configuration.

19. The infant carrier of claim **16**, further comprising a bib having a pair of attachment tabs and a bib panel connected to the pair of attachment tabs, the pair of attachment tabs being configured to be releasably attachable to the infant carrier.

20. The infant carrier of claim **16**, wherein the pair of shoulder straps are connected to the main panel to assume an overlapping, intersecting configuration to define an intersection point, the infant carrier further comprising a strap connector slidably coupled to the pair of shoulder straps, the strap connector being slidable along the pair of shoulder straps to move the intersection point along the pair of shoulder straps.

* * * * *