




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B41F 35/00, 31/02	A1	(11) International Publication Number: WO 94/07698 (43) International Publication Date: 14 April 1994 (14.04.94)
(21) International Application Number: PCT/GB93/00864 (22) International Filing Date: 26 April 1993 (26.04.93) (30) Priority data: 9209004.2 25 April 1992 (25.04.92) GB (71) Applicant (for all designated States except US): PRINTING PRESS SERVICES (HYDROSYSTEMS) LTD [GB/GB]; Sellars Street, Preston PR2 5EU (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): McMANAMON, David [GB/GB]; McMANAMON, Stephen [GB/GB]; Ingle Cottage, Walker Lane, Fulwood, Preston PR2 7AN (GB). (74) Agents: FUNGE, Harry et al.; M'Caw & Co., 41-51 Royal Exchange, Cross Street, Manchester M2 7BD (GB).		(81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.

(54) Title: IMPROVEMENTS IN OR RELATING TO PRINTING MACHINES

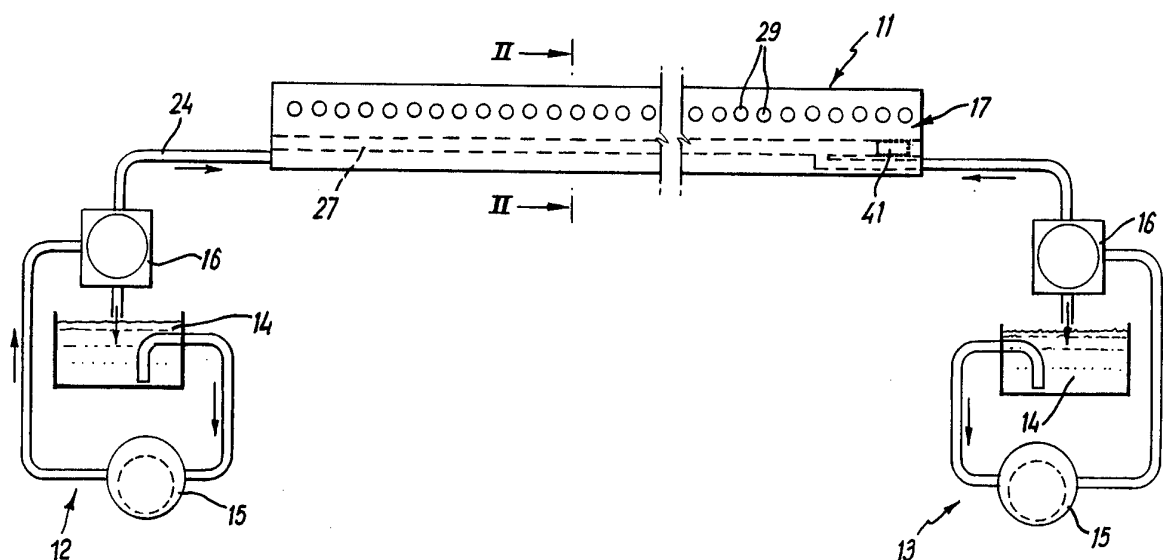

(57) Abstract

A method and apparatus are proposed for cleaning the ink chamber (27) of the ink rail (11) of a printing machine ink supply system and from which ink is delivered to an ink roller through a multiplicity of side-by-side stepped feed holes (29) in the rail (11), the method and apparatus utilising a plug (41) freely slidable within the chamber (27) and adapted to purge the chamber (27) of ink present in advance of the plug (41) on its movement longitudinally of the chamber. In analogous manner the plug (41) may be used to effect a colour change as between ink sources provided at opposite ends of the rail.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NE	Niger
BE	Belgium	GN	Guinea	NL	Netherlands
BF	Burkina Faso	GR	Greece	NO	Norway
BG	Bulgaria	HU	Hungary	NZ	New Zealand
BJ	Benin	IE	Ireland	PL	Poland
BR	Brazil	IT	Italy	PT	Portugal
BY	Belarus	JP	Japan	RO	Romania
CA	Canada	KP	Democratic People's Republic of Korea	RU	Russian Federation
CF	Central African Republic	KR	Republic of Korea	SD	Sudan
CG	Congo	KZ	Kazakhstan	SE	Sweden
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovak Republic
CM	Cameroon	LU	Luxembourg	SN	Senegal
CN	China	LV	Latvia	TD	Chad
CS	Czechoslovakia	MC	Monaco	TG	Togo
CZ	Czech Republic	MG	Madagascar	UA	Ukraine
DE	Germany	ML	Mali	US	United States of America
DK	Denmark	MN	Mongolia	UZ	Uzbekistan
ES	Spain			VN	Viet Nam
FI	Finland				

- 1 -

IMPROVEMENTS IN OR RELATING TO PRINTING MACHINES

The invention concerns improvements in or relating to printing machines, and has more particular reference to the supply of ink or other fluid, hereinafter referred to simply as ink if the context so permits, to the printing roller thereof.

In the printing art, on colour change the need exists not only to replace one ink supply with another but also to remove ink of the previous colour from the various feed passages between the ink supply and the printing roller and to clean such passages. Conventional practice is to discard any residual ink and to flush out the relevant passages with an appropriate cleaning material. Not only does such practice give rise to a significant machine down time but the discarded ink represents a financial loss of substantial proportions.

In GB-A-2258845 there is disclosed a means for supplying ink to a printing roller of a printing machine, the means including an elongate ink rail, an ink chamber in said rail and extending in the longitudinal direction thereof, a multiplicity of spaced parallel feed passages in said rail having respective outlet orifices at a common surface of said rail, the feed passages extending between said common surface and the said ink chamber, and means controlling the flow of ink to the feed passages.

The object of the present invention is to provide a means whereby ink supply means, particularly though not

- 2 -

exclusively an ink or fluid supply means as aforesaid, might be cleaned in a ready and efficient manner, without the need to discard residual ink present at colour change.

According to one aspect of the present invention there is proposed a method of cleaning and/or recovering ink from the ink supply means of a printing machine on colour change, the ink supply means including an elongate chamber defining an ink reservoir to which ink is fed from a supply and from which ink is delivered to the printing roller, the method including the steps of providing a plug of a transverse cross-section corresponding to that of the elongate chamber, the plug being a close but sliding fit within the chamber, and moving said plug longitudinally of the said chamber to purge said chamber of ink and, preferably, to return said ink to the said supply.

According to another aspect of the invention there is proposed a method of effecting colour change in the ink supply system of a printing machine, the ink supply system including an elongate chamber defining an ink reservoir to which ink is fed from a supply and from which ink is delivered to the printing roller, ink being supplied to the opposite ends of the elongate chamber from respective differently coloured supplies thereof, the method including the steps of providing a plug within the chamber, the plug being a close but sliding fit therein, and moving the plug longitudinally of the chamber to purge the chamber of the redundant colour and allow feed to the said chamber of the

- 3 -

replacement colour.

According to a preferred feature, the plug is moved longitudinally of the elongate chamber by feed pressure applied to the replacement ink.

It is to be appreciated that, whilst in the case of colour change the plug will traverse the full length of the elongate chamber, it is contemplated that by moving the plug through a part only of the length of the chamber such chamber can operate to deliver ink of a given colour to a respective part of the printing roller and ink of a different colour to the balance of the chamber.

Indeed, it may be possible, subject to the provision of suitable locking means, for example magnetic, to provide multiple plugs whereby the elongate chamber might be divided into individual sections each delivering ink of a respective colour to a respective axial extent of the printing roller, shift of the plugs being effected by the pressure of the incoming ink, any necessary provision being made to supply ink to an intermediate section of the chamber.

The invention also includes apparatus for practising the method as aforesaid, and, according to a further aspect of the present invention there is proposed an ink supply system for a printing machine, the system including an elongate ink rail, an ink chamber in said ink rail and extending in the longitudinal direction thereof, a multiplicity of parallel feed passages in said rail having respective outlet orifices at a common surface of said rail,

- 4 -

the feed passages extending between said common surface and said chamber, characterised by a plug within said chamber as a close fit therein, the plug being movable longitudinally of said chamber.

The invention will now be described further, by way of example only, with reference to the accompanying diagrammatic drawings illustrating two embodiment thereof and in which: -

Fig. 1 is a diagrammatic front elevation of an arrangement for supplying ink to the printing roller of a newspaper printing machine;

Fig. 2 is a section on line II-II of Fig. 1;

Fig. 3 is an enlarged sectional elevation showing the plug in position within the ink chamber; and

Figs. 4a to 4c show, in diagrammatic side elevation an alternative arrangement and the successive steps in cleaning the arrangement and effecting colour change.

Referring now to the drawings, and particularly to Fig. 1 thereof, an ink supply arrangement for a printing machine comprises an ink rail 11 of a length in excess of the intended printing width and feed means 12, 13 for supplying ink to the respective ends of the rail, each feed means 12, 13 including an ink reservoir 14, a positive displacement pump 15 and a density control valve 16 to which ink from the reservoir 14 is fed by the pump 15 and from which ink is supplied to the rail 11.

The ink rail 11, see now Fig. 2, comprises an

- 5 -

elongate, generally rectangular body 17, that face 18 of the body 17 intended for disposition in closely spaced opposed relationship with the roller (not shown) to which the ink is to be applied being of concave, part-cylindrical form of a curvature approximating to that of the said roller. The body 17 is conveniently of aluminium and is split along its horizontal centre line to give upper and lower body parts 19, 21.

The upper face 22 of the lower body part 21 includes a channel 23 of semi-circular transverse cross-section to which ink is fed from the density control valve 16 through feed pipe 24.

The lower face 25 of the upper body part 19 has a channel 26 of like semi-circular transverse cross section to that provided in the lower body part 21, the channels 23, 26 in the respective body parts being arranged in superimposed register to define a circular ink chamber 27 in the body. In contra-distinction to the lower body part 21, the upper body part 19 further includes a groove 28 longitudinally thereof and as an extension of the channel 26 into the body part, the groove 28 being of rectangular transverse cross section and being for a purpose hereafter to be made apparent.

A multiplicity of stepped holes 29 is provided in side-by-side disposition in the upper body part, the said holes extending parallel to the lower face 25 of said body part and throughout the full extent thereof. The stepped holes 29 are so positioned as to pass through and

transversely of the groove 28 and are each such as to provide an outer section, an intermediate section and an inner section of successively reducing diameters.

That part of the concave face 18 provided by the upper body part 19 is slotted in register with the inner section 31 of each stepped hole, the slots (not shown) preferably being of arcuate section when considered in the longitudinal direction thereof with the slots of the successive stepped holes 29 being in alignment longitudinally of the body part and merging one with another to give a continuous slot at the surface of the body part of cyclically varying depth.

Each stepped hole 29 receives a cylindrical key 32 into engagement therewith, the key 32 being movable axially of the stepped hole and being engageable with a flank 33 of the groove 29. The key is mounted in a bush 34 seated in sealed relationship in the outer section of a respective stepped hole 29 and is screw-threadedly engaged therewith so as to be movable to or from engagement with the said flank 33. The bush 34 has an hexagonal flange at its outer end which seats against the upper body part 19, thereby to ensure accuracy of location of the bush 34 axially of the stepped hole 29. Outwardly of the bush the key 32 is secured to cylindrical collar 35 of sleeve-like form, there being a control slot 36 in the annular end face of the collar 35 to receive a radial pin 37 carried by a displacement means 38.

The displacement means 38 consists of a stepping

- 7 -

motor, moving in 200 increments per revolution, drivingly connected with the key 32, whereby the key 32 is rotated for selective adjustment longitudinally of the bush 34, and thus relative to the step formed by flank 33, thereby to vary the cross-sectional dimensions of the flow passage between channel 27 and the inner section 39 of the stepped hole 29.

In use, ink is delivered to the ink chamber 27 in the ink rail 11 from one or other feed means 12, 13 by the relevant positive displacement pump 15, a proportion of the ink delivered by such pump 15 passing to the chamber 27 and the balance returned to the reservoir 14 according to the setting of the density control valve 16.

Ink fed to the ink chamber 27 fills such chamber from the bottom, and thus no ink can be applied to the roller until such chamber is full and the ink therein is under pressure.

From the ink chamber 27 ink passes to the roller through the inner section 39 of the respective stepped holes 29 in the upper body part 19, the rate of feed at each position being variable according to the position of the respective key 32 relative to the adjacent end of such inner hole section.

As will be appreciated, each key is individually controllable as to rate of feed according to the setting of that key whilst the rate of delivery of the ink rail as a whole, and thus from the keys considered collectively, is variable by adjustment of the shuttle valve member.

- 8 -

Thus far the structure is in accordance with the disclosure of the prior application aforesaid.

The present invention contemplates the provision of a plug within the ink chamber for controlled movement longitudinally thereof, the plug 41 being of cylindrical form and being a close but sliding fit within the chamber 27. The plug is grooved at its cylindrical surface to receive O-rings 42 into engagement therewith, as shown in Fig. 3, the said O-rings serving to provide a seal between the plug and the opposing cylindrical surface of the chamber.

Assuming that inks of different respective colours are provided in the reservoirs at the respective ends of the rail, the plug is located at one end of the ink chamber, being that end remote from the feed means in use, and serves to isolate the ink of the respective feed means 12, 13. If it is required to effect a colour change, the plug is moved longitudinally of the ink chamber under the effect of the line pressure of the replacement ink, the plug purging the chamber of ink present therein and returning such ink to the now non-effective feed means. It has been found that the effective seal between the plug and chamber surface provided by the O-rings not only maintains the ink of the two feed means in mutual isolation, but the O-rings remove ink from the surface of the chamber, and avoid contamination of the incoming ink.

Any ink present in the stepped holes 29, which ink is of only minimal quantity, is discharged by the new ink at

the onset of printing, and in practical terms there is no contamination of the replacement colour ink after initial operation of the printing press with the replacement colour ink.

It is to be appreciated that means, for example magnetic means, may be provided to locate the plug at a position intermediate the ends of the chamber, so as effectively to provide the facility for delivering ink of two different colours to the respective sides of the printing machine, the two colours being isolated by the plug.

As a further development, several plugs may be utilised simultaneously to divide the ink chamber into a corresponding number of sections each fed with ink of a requisite colour and in an appropriate manner.

If it is required to provide a facility for cleaning the ink chamber, and indeed also the printing press, with appropriate cleaning fluids, ink is purged from the chamber in analogous manner to that mentioned above, but instead of effecting movement of the plug by utilising the line pressure of the incoming ink, a supply of cleaning fluid will be connected with the chamber and the pressure of that fluid can be used to move the plug. The cleaning fluid will pass through the stepped holes and onto the printing roll, or indeed any intermediate transfer rolls, passing through the printing machine in like manner to ink and being available for application to the printing roll so as to clean the same.

- 10 -

An alternative arrangement and sequence of operations for cleaning and colour change is shown in Figs. 4a to 4c.

Referring now to Fig. 4a, and proceeding on the basis that the chamber 27 is initially charged with ink of a first colour delivered from pump 42 through feed pipe 43, the plug 41 being positioned at the right hand end of the chamber, the ink keys (not shown) being closed and the ink pumps being inoperative, cleaning agent is applied to the back of the plug and serves to drive such plug to the opposite end of the chamber, thereby purging the chamber of any residual ink and returning such ink to the relevant ink reservoir. The ink keys are then opened to allow passage therethrough and on to the ink roller of the cleaning agent. After a requisite period of time the feed of cleaning fluid is discontinued and pressure air is introduced into the chamber to return the plug to the right hand end thereof (Fig. 4b), such motion discharging the cleaning agent from the chamber. The pressure air serves also to blow any cleaning agent present in the ink keys from such keys.

The supply of pressure air is discontinued and the valve through which such air passes to the chamber is closed. Pump 44, which delivers ink of a second colour to the chamber through feed pipe 45, is turned on to charge the chamber with ink of that second colour, and such ink is delivered to and passes through the ink keys (Fig. 4c). After ink feed for a predetermined period of time the cleaning process is

- 11 -

completed, and the arrangement readied for printing. It is to be appreciated that suitable valving, for example solenoid controlled valving, will be provided to allow introduction of cleaning fluid and pressure air, as required.

Whilst the concept hereinproposed is intended for use particularly with the ink supply arrangement of the patent application aforesaid, the concept may be applied to any supply arrangement having an ink chamber of substantially uniform cross-section from which ink is fed to the printing roller or to transfer rollers, the plug being of a cross-section corresponding to the transverse cross-section of the chamber.

The invention does enable the recovery of material quantities of ink which would otherwise be discarded, and thus offers significant financial savings. Furthermore, the invention does provide a means whereby colour change or cleaning can be effected in a simple manner with the minimum of machine down-time, such being particularly important in the context of high speed newspaper machines.

Claims

1. A method of cleaning and/or recovering ink from the supply means of a printing machine on colour change, the ink supply means including an elongate chamber defining an ink reservoir to which ink is fed from a supply and from which ink is delivered to the printing roller, the method including the steps of providing a plug of a transverse cross-section corresponding to that of the elongate chamber, the plug being a close but sliding fit within the chamber, and moving said plug longitudinally of the said chamber to purge said chamber of ink and, preferably, to return said ink to the said supply.

2. A method of effecting colour change in the ink supply system of a printing machine, the ink supply system including an elongate chamber defining an ink reservoir to which ink is fed from a supply and from which ink is delivered to the printing roller, ink being supplied to the opposite ends of the elongate chamber from respective differently coloured supplies thereof, the method including the steps of providing a plug within the chamber, the plug being a close but sliding fit therein, and moving the plug longitudinally of the chamber to purge the chamber of the redundant colour and allow feed to the said chamber of the replacement colour.

3. The method as claimed in claim 1 or 2, including the step of applying fluid under pressure to the plug to effect movement thereof longitudinally of the chamber.

- 13 -

4. An ink supply system for a printing machine, the system including an elongate ink rail, an ink chamber in said ink rail and extending in the longitudinal direction thereof, a multiplicity of parallel feed passages in said rail having respective outlet orifices at a common surface of said rail, the feed passages extending between said common surface and said chamber, characterised by a plug within said chamber as a close fit therein, the plug being movable longitudinally of said chamber.

5. An ink supply system as claimed in claim 4, further including sealing means on the plug engaging in sealing relationship with the chamber.

6. An ink supply system as claimed in claim 5, wherein the sealing means comprise O-rings seated in respective grooves provided in the cylindrical surface of the plug.

7. An ink supply system as claimed in any one of claims 4 to 6, wherein movement of the plug longitudinally of the chamber is pressure fluid induced.

8. An ink supply system as claimed in any one of claims 4 to 6, further including solenoids operable to effect movement of the plug longitudinally of the chamber.

9. An ink supply system as claimed in any one of claims 4 to 8, further including means adapted to locate the plug at a selected position intermediate the ends of the chamber.

10. An ink supply system as claimed in any one of claims 4 to 9, including a plurality of plugs separately

movable longitudinally of the chamber to and between selected positions therein.






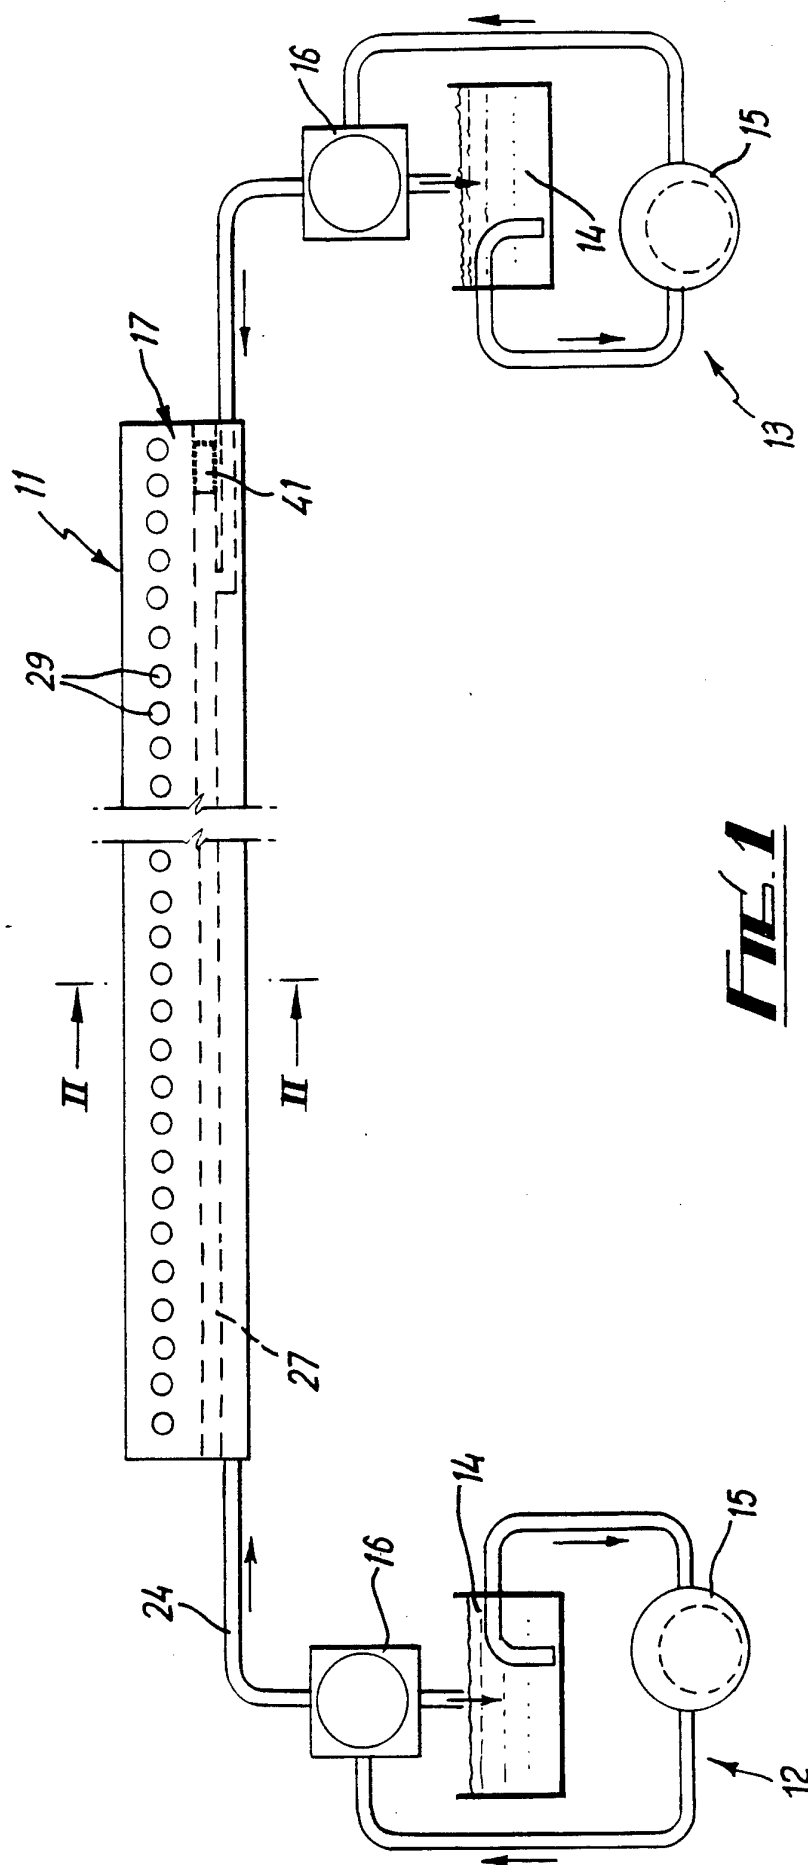


FIG. 1

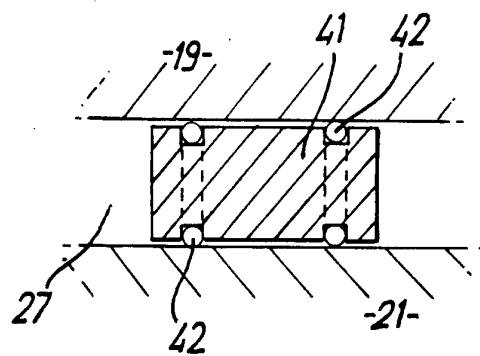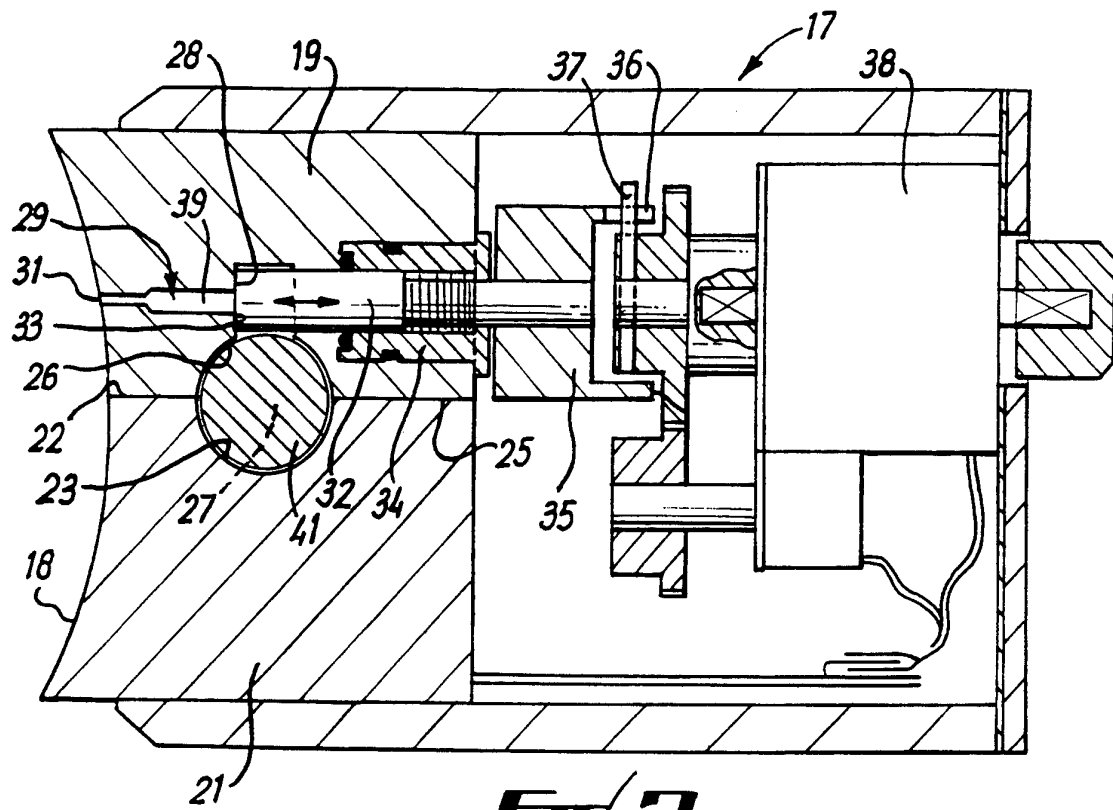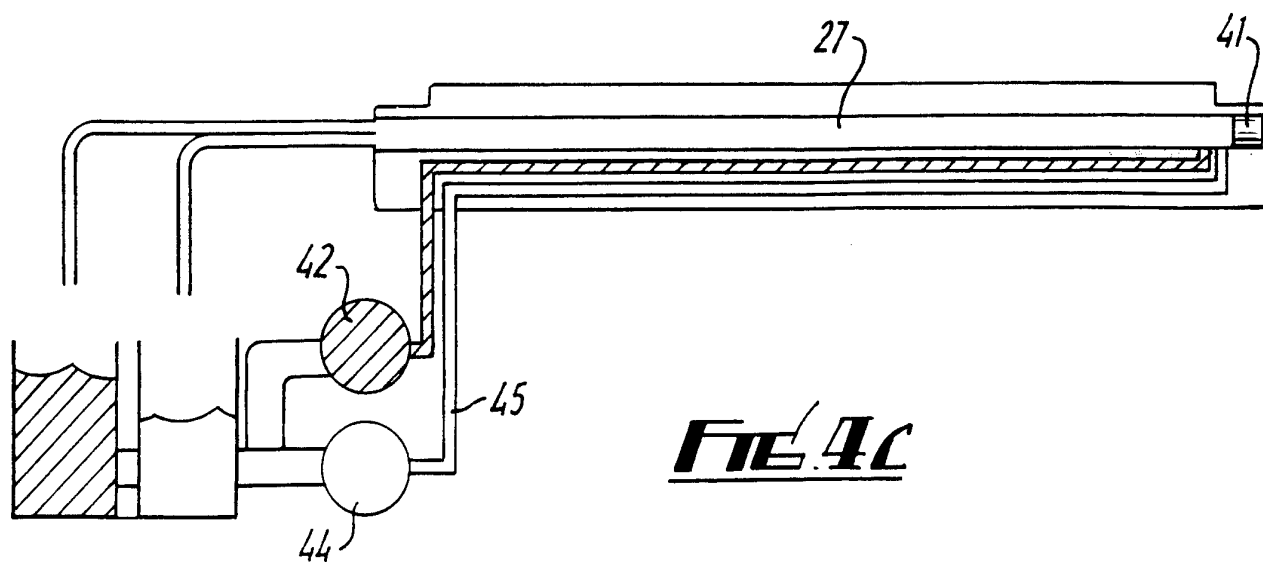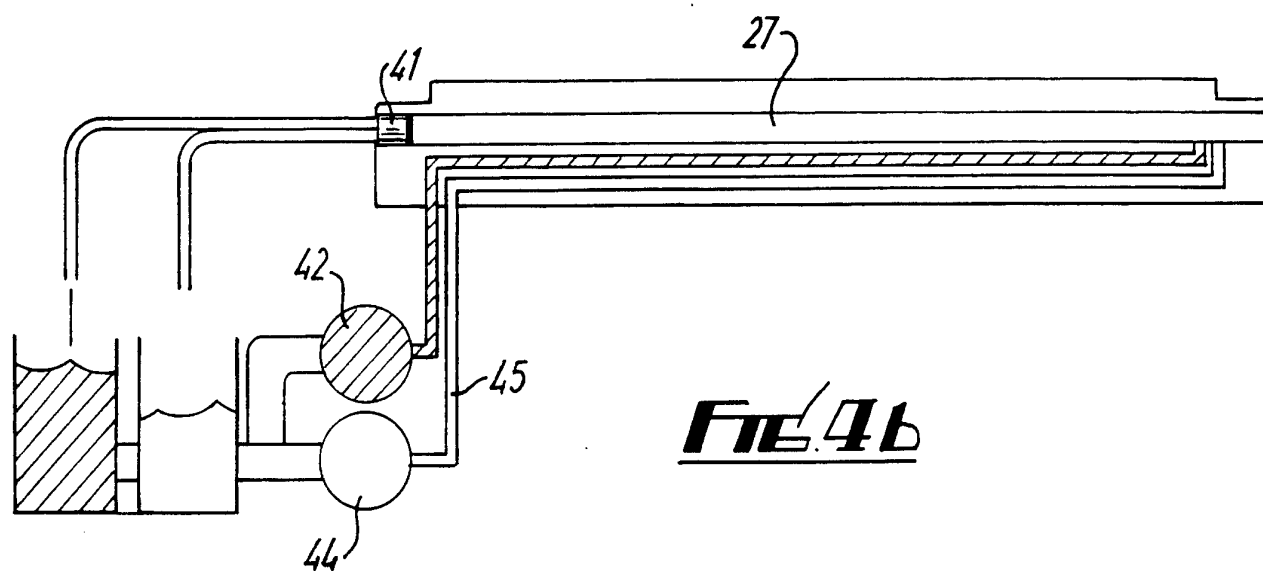

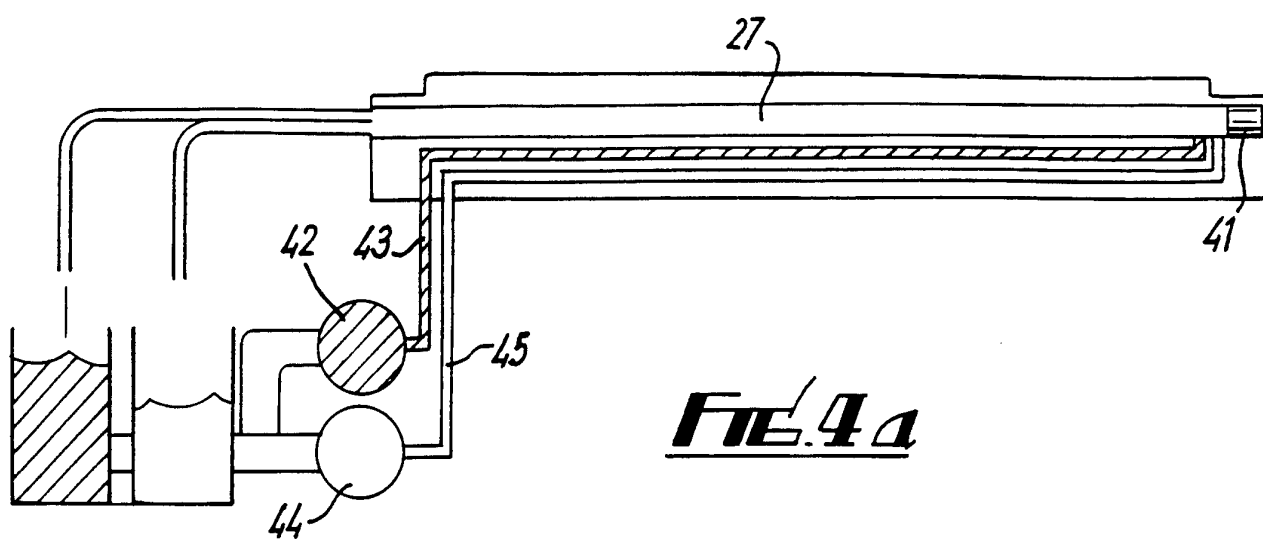

INTERNATIONAL SEARCH REPORT

PCT/GB 93/00864

International Application No

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int.Cl. 5 B41F35/00; B41F31/02		
II. FIELDS SEARCHED		
Minimum Documentation Searched ⁷		
Classification System	Classification Symbols	
Int.Cl. 5	B41F ; B41L	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched ⁸		
III. DOCUMENTS CONSIDERED TO BE RELEVANT⁹		
Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	AT,B,338 209 (P. ZIMMER) 10 August 1977 see page 3, line 24 - page 4, line 25; figure 5	1,3-10
P,A	EP,A,0 523 989 (D. E. MCMANAMON) 20 January 1993 see the whole document	1,3-10
P,A	& GB,A,2 258 845 cited in the application	
A	EP,A,0 382 347 (THE WARD MACHINERY COMPANY) 16 August 1990	
A	EP,A,0 368 485 (VICKERS PLC) 16 May 1990	
¹⁰ Special categories of cited documents : ¹⁰ "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
IV. CERTIFICATION		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
06 SEPTEMBER 1993		24. 09. 93
International Searching Authority		Signature of Authorized Officer
EUROPEAN PATENT OFFICE		BOURSEAU A.M.

**ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.**

GB 9300864
SA 73936

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report.
The members are as contained in the European Patent Office EDP file on

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 06/09/93

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
AT-B-338209	10-08-77	AT-A, B 338209	10-08-77
EP-A-0523989	20-01-93	GB-A- 2258845	24-02-93
EP-A-0382347	16-08-90	US-A- 5003876	02-04-91
		JP-A- 2270555	05-11-90
EP-A-0368485	16-05-90	JP-A- 2243347	27-09-90
		US-A- 5054392	08-10-91