



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : C08F 210/02	A2	(11) International Publication Number: WO 92/12185 (43) International Publication Date: 23 July 1992 (23.07.92)
(21) International Application Number: PCT/US91/09447 (22) International Filing Date: 16 December 1991 (16.12.91) (30) Priority data: 633,352 27 December 1990 (27.12.90) US 781,516 22 October 1991 (22.10.91) US (71) Applicant: EXXON CHEMICAL PATENTS INC. [US/ US]; 1900 East Linden Avenue, Linden, NJ 07036-0710 (US). (72) Inventor: AUSTIN, Richard, Graham ; 4810 River Hill Drive, Kingwood, TX 77345 (US). (74) Agents: BELL, Catherine, L. et al.; Exxon Chemical Com- pany, 5200 Bayway Drive, Baytown, TX 77522-5200 (US).		(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (Eu- ropean patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European pa- tent), MC (European patent), NL (European patent), SE (European patent). Published <i>Without international search report and to be republished upon receipt of that report.</i>
(54) Title: PHOTODEGRADABLE AND BIODEGRADABLE POLYETHYLENE COPOLYMERS		
$-\left[-\left(\text{CH}_2\overset{\text{C}}{\parallel}\text{O}-\left(\text{CH}_2\right)_4-\right)_x-\left(\text{CH}_2\text{CH}_2\right)_y-\right]- \quad (\text{I})$ $-\left[-\left(\text{CH}_2\text{CH}_2-\right)_y-\left(-\text{CH}_2\overset{\text{O}}{\parallel}\text{C}-\text{O}-\left(\text{CH}_2\right)_4-\right)_x-\left(-\overset{\text{O}}{\parallel}\text{C}-\right)_z-\right]- \quad (\text{II})$		
(57) Abstract Ethylene, 2-methylene-1,3-dioxepane, and optionally carbon monoxide are reacted in the presence of a free radical catalyst to form a biodegradable and optionally photodegradable polymer represented by formula (I), where x and y are integers, or (II), where x, y and z are integers.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	RU	Russian Federation
CG	Congo	KP	Democratic People's Republic of Korea	SD	Sudan
CH	Switzerland	KR	Republic of Korea	SE	Sweden
CI	Côte d'Ivoire	LI	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
DE	Germany	MC	Monaco	TG	Togo
DK	Denmark			US	United States of America

PHOTODEGRADABLE AND BIODEGRADABLE POLYETHYLENE COPOLYMERS

This invention is a continuation-in-part of earlier filed USSN 633,352, filed December 27, 1990.

5 BACKGROUND OF THE INVENTION


Environmental degradation of synthetic polymers occurs at varying rates and to varying degrees depending on the polymer and its environment. Such degradations are catalyzed by light, heat, air, 10 water, microorganisms, and from mechanical forces such as wind, rain, vehicular traffic, etc. Enhancing the stability and/or the degradability of polymers is generally accomplished by additives, changing the polymer backbone, introduction of 15 functional groups, or by blending with appropriate fillers. However, many of these techniques for reducing degradation also result in detrimental properties in the polymer produced.

20 SUMMARY OF THE INVENTION

Therefore, it is an object of the present invention to provide a process which produces in high yield a copolymer having good biodegradability, and a high yield terpolymer having good 25 biodegradability and photodegradability.


- 2 -

The present invention provides a process for making a biodegradable copolymer by polymerizing a reaction mixture of ethylene and 2-methylene-1,3-dioxepane. The reaction mixture can be heated to a temperature of about 150 to 260°C at a pressure of between 350 and 3500 kg/cm² in the presence of an initiator, thereby reacting the ethylene with the 2-methylene-1,3-dioxepane to form a biodegradable polymer represented by the formula



where x and y are integers, and having a molecular weight of at least about 7,000.

The present invention also provides a process for making a terpolymer of ethylene and 2-methylene-1,3-dioxepane with carbon monoxide which in addition to biodegradability has good photodegradability characteristics. The terpolymer is represented by the general formula




- 3 -

where x, y and z are integers, and where the ethyl,
 ester and keto groups are randomly or uniformly
 distributed in the terpolymer along the backbone of
 the terpolymer, according to the varying
 5 concentrations of the groups. The terpolymer has a
 molecular weight of at least about 7,000.

DETAILED DESCRIPTION OF THE INVENTION

In the present invention, a polymer is produced
 10 having ester groups inserted into its polyethylene
 backbone. These ester groups increase the
 biodegradability of the polymer, by allowing for the
 breakdown of the polymer at the ester groups. After
 the polymer has been sufficiently broken down, it
 15 can be assimilated by microorganisms.


In producing the copolymer of the present
 invention, ethylene and 2-methylene-1,3-dioxepane
 (MDOP) are reacted according to the following
 equation:

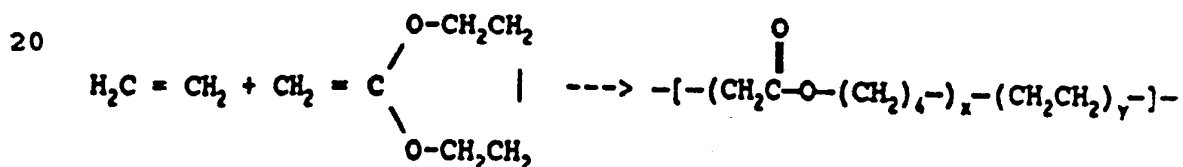

where x and y are integers. The copolymer so
 produced has a molecular weight greater 7,000,
 25 preferably, greater than 20,000 and most preferably,
 greater than 50,000. The mole percentage of ester

groups in the copolymers of the invention generally varies between about 0.05% and 20 mole % with a preferred range of 2 to 15 mole %; and a most preferred percentage of 6 to 10 mole %.

5 The terpolymer is produced by additionally reacting carbon monoxide with ethylene and MDOP according to the following equation:

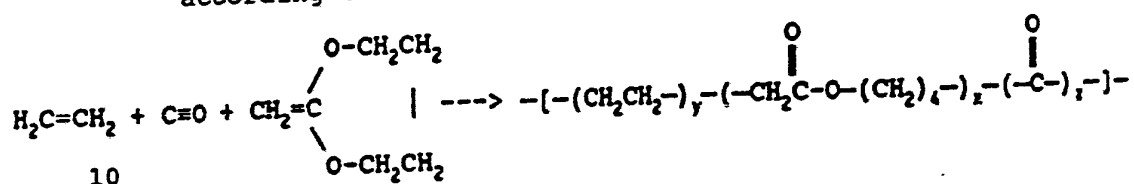

where x, y and z are integers. The terpolymer exhibits better photodegradability than the copolymer, because the additional carbonyl groups in the polymer cleave upon absorbing light such as
 15 sunlight or UV light. The terpolymer can be both photodegradable and biodegradable because both the ester and the carbonyl functionalize. This is a particularly desirable combination in many applications for the terpolymer. The terpolymer so
 20 produced has a molecular weight greater 7,000, preferably, greater than 20,000 and most preferably, greater than 50,000. The mole percentage of ester groups in the terpolymers of the invention generally varies between 0.05% and 20% with a preferred range
 25 of 2 mole % to 15 mole % and a most preferred range of 6 to 10%. The mole percentage of carbonyl groups

- 5 -

in the terpolymer of the invention generally varies between about 0.1% and 20%, with a preferred range of about 5 to 10 wt. % and a most preferred range of about 0.9 to 5 wt. %.

5 The copolymer of the invention is conveniently prepared by a high pressure polymerization process in which ethylene and an appropriate amount of MDOP as determined by the product desired are polymerized at a temperature of about 150 to 260°C and at a
10 pressure of 350 to 3500 kg/cm², preferably about 1700 to 2500 kg/cm². The terpolymer of the invention is prepared using similar conditions with the addition of carbon monoxide to the mixture. The polymerization may be effected in a convenient
15 autoclave or tubular reactor.

 Optionally, a chain transfer agent or modifier may be introduced into the reaction vessel to adjust the melt index of the product. The amount of chain transfer agent used therefore depends on the agent
20 chosen and the final melt index sought, as well as the reaction conditions employed. Typically the amount of chain transfer agent will be from 0 to 25% of the reactor feed. The use of chain transfer agents is well known and given the requirements
25 specified herein for the melt index of the polymer it is believed to be within the competence of one

- 6 -

skilled in the art to determine a suitable agent and rate of addition empirically. By way of illustration it may be said that suitable agents include those with C_8 (chain transfer constant) values (measured at 1360 atmospheres and 130°C for homopolymerization of ethylene) of up to 1.0 and include hydrogen, acetone, butyraldehyde, cyclohexanone, 1-butene, propionaldehyde, propylene, butane and isobutylene. C_8 values of up to 0.3 are preferred. It has been found that propionaldehyde is a convenient chain transfer agent, and that propionaldehyde at 200 ppm was very convenient.

It is to be noted that in some instances there will be incorporation of the chain transfer agent into the copolymer or terpolymer. For example, when isobutylene is employed the product can be effectively an ethylene/MDOP/isobutylene terpolymer. As used herein, the term "copolymer" includes polymers containing such additional comonomers. In the case of the terpolymer containing carbon monoxide, the incorporation can produce an ethylene/CO/MDOP isobutylene tetrapolymer. As used herein, the term "terpolymer" includes polymers containing such additional comonomers.

The polymerization will usually be initiated by a free radical catalyst such as a peroxide. Also,

- 7 -

conventional additives such as antioxidants and carriers for the catalyst may be present according to conventional practice.

In general, the copolymer and terpolymer of
5 this invention can be used in any application where low density polyethylene is used. Among the many uses, a few are listed below for illustration:

For example, the polymers of this invention can be melt blown (bottles, etc.), and spun bonded
10 (fibers, fabric, ropes, twines, cords, etc.) made into non-wovens (diaper lining, disposable clothes, etc.) and made into films, garbage bags, strapping materials and molded parts.

The invention will now be described in more
15 detail by way of the following examples.

EXAMPLES 1 - 16

Ethylene was introduced at 45 kg/cm² into a compressor where it was compressed to about 150 kg/cm², then MDOP and chain transfer agent were added and the combined feed was further compressed to approximately 2000 kg/cm². The various amounts of MDOP are listed in Table I. The high pressure feed was then introduced into an autoclave fitted with a stirrer. 200 ppm of propionaldehyde, a free radical catalyst, were introduced into the autoclave. The autoclave was heated to maintain the desired reaction temperature of between 180 to 230°C.

The formed copolymer, together with unreacted material and impurities were taken via a line to a high pressure separator. Unreacted monomer from the separator was recycled via a heat exchanger to a small compressor. Impurities were separated off in a purge. The data for 16 runs of this process made at various temperatures, ethylene weight percents, MDOP weight percent, initiator conditions are shown in Table 1.

In all of the runs the pressure is 2007 kg/cm², the run time is 40 seconds, and the initiator was t-butyl peroxyvalate present at a concentration of 150 to 200 ppm.

- 9 -

Runs 13, 14 and 16 had initiator present at 150 ppm. All other runs had initiator present at 200 ppm.

The resulting polymer was then analyzed. Those 5 data are present in Table 1 below.

Table 1

Run	Molecular Weight	Mole % Ester in Product	Wt. % Dioxepane (MDOP) in Feed	Temp., °C	Wt. % Ethylene in Feed
1	100,836	0.11	1	189	98.5
2	73,823	0.17	2	188	97.5
3	70,215	0.25	2	188	97.5
4	71,217	0.25	2	188	97.5
5	77,051	0.41	4	191	97.5
6	60,010	0.43	4	184	97.5
7	60,341	0.39	4	191	97.5
8	73,800	0.33	2	210	97.5
9	71,119	0.30	2	222	97.5
10	70,283	0.29	2	222	97.5
11	83,286	0.34	2	180	97.5
12	129,212	0.25	2	191	97.5
13	115,163	0.25	2	184	97.5
14	141,758	0.29	2	181	97.5
15	42,327	3.20	25	188	74.5
16	64,942	3.10	25	197	74.5

EXAMPLE 2

The procedure of Example 1 was followed, except that carbon monoxide was added to the feed in order to incorporate carbonyl groups along the backbone of the polymer. The runs were made at various temperatures. The composition and results of these runs are shown in Table 2 below. In all of the runs the pressure is 2007 kg/cm², the run time is 40 seconds, and the initiator is t-butyl peroxyphthalate present at a concentration of 200 ppm.

Table 2

Run	Molecular Weight	Mole % Ester in Product	Wt. % CO in Feed	Mole % Carbonyl in Product	Wt. % Dioxepane (MDOP) in Feed	Temp. °C	Wt. % Ethylene in Feed
17	63,464	0.31	1.0	6.1	2	183	96.5
18	53,579	0.16	1.0	8.3	2	184	96.5
19	55,240	0.35	1.0	8.8	2	188	96.5
20	52,547	0.10	1.0	5.4	1	194	97.5
21	49,498	0.09	1.0	5.2	1	191	97.5
22	55,493	0.10	1.0	7.6	1	191	97.5
23	25,428	0.70	.25	1.6	10	188	89.3

- 11 -


Claims:

1. A process for making a biodegradable polymer comprising:

mixing ethylene with 2-methylene-1,3-dioxepane to form a reaction mixture;

heating the reaction mixture to about 150 to 260°C at a pressure of about 350 to 3500 kg/cm²; and

reacting said mixture in the presence of a free radical initiator catalyst to form a biodegradable polymer having a molecular weight of at least about 7,000, and being represented by the formula



wherein x and y are integers.

2. The process of claim 1, wherein said polymer has a molecular weight of at least about 20,000.

3. The process of claim 1, wherein said polymer has a molecular weight of at least about 50,000.

4. The process of claim 1, wherein said polymer comprises 0.05% to about 20 mole % ester groups.

5. A polymer made according the process of claim 1.


- 12 -

6. A process for making a biodegradable polymer comprising:

mixing ethylene with 2-methylene-1,3-dioxepane and carbon monoxide to form a reaction mixture;

heating the reaction mixture to about 150 to 260°C, at a pressure of about 350 to 3500 kg/cm²; and

reacting said mixture in the presence of a free radical initiator catalyst to form a biodegradable and photodegradable polymer having a molecular weight of at least about 7,000 and being represented by the formula



where x, y and z are integers.

7. The process of claim 6, wherein said polymer has a molecular weight of at least about 20,000.

8. The process of claim 6, wherein said polymer has a molecular weight of at least about 50,000.

9. The process of claim 6, wherein said polymer comprises about 0.05% to about 20 mole % ester groups.

- 13 -

10. The process of claim 6, wherein said polymer comprises about 0.5% to about 20 mole % carbonyl groups.
11. A polymer made according to the process of claim 6.