



US008406728B2

(12) **United States Patent**  
**Dickinson et al.**

(10) **Patent No.:** **US 8,406,728 B2**  
(45) **Date of Patent:** **\*Mar. 26, 2013**

(54) **ENHANCED 911 NETWORK ACCESS FOR CALL CENTERS**

4,494,119 A 1/1985 Wimbush  
4,625,081 A 11/1986 Lotio  
4,651,156 A 3/1987 Martinez  
4,706,275 A 11/1987 Kamil  
4,868,570 A 9/1989 Davis  
4,891,638 A 1/1990 Davis  
4,891,650 A 1/1990 Sheffer  
4,952,928 A 8/1990 Carroll

(75) Inventors: **Richard Dickinson**, Auburn, WA (US);  
**John Gordon Hines**, Kirkland, WA (US);  
**Jonathan Croy**, Seattle, WA (US)

(73) Assignee: **TeleCommunication Systems, Inc.**,  
Annapolis, MD (US)

(Continued)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

WO PCT/SE98/01887 10/1998  
WO WO99/22546 5/1999

**FOREIGN PATENT DOCUMENTS**

(Continued)

This patent is subject to a terminal disclaimer.

**OTHER PUBLICATIONS**

(21) Appl. No.: **13/437,213**

Intrado Inc., Qwest Detailed SR/ALI to MPC/GMLC Interface Specification for TCP/IP Implementation of TIA/EIA/J-STD-036 E2 with Phase I Location Description Addition, Intrado Informed Response; Apr. 2004; Issue 1.11; pp. 1-57.

(22) Filed: **Apr. 2, 2012**

(65) **Prior Publication Data**

US 2012/0287826 A1 Nov. 15, 2012

(Continued)

**Related U.S. Application Data**

(63) Continuation of application No. 11/354,861, filed on Feb. 16, 2006, now Pat. No. 8,150,363.

*Primary Examiner* — Olumide T Ajibade Akonai

(74) *Attorney, Agent, or Firm* — William H. Bollman

(51) **Int. Cl.**

**H04M 11/04** (2006.01)

(57) **ABSTRACT**

(52) **U.S. Cl.** ..... **455/404.1**; 455/404.2; 455/521;  
455/560; 455/561; 455/562.1; 370/351; 370/352;  
370/354; 370/356; 379/37; 379/45; 379/49

An emergency call (e.g., a 911 call, an alarm company call) forwarded by a telematics call center is routed over the switched PSTN to a Voice Over Internet Protocol (VoIP) call server, where the switched call is converted to a session initiating protocol (SIP) packetized IP call for presentation to an emergency services gateway, which reconverts the call to TDM and connects to a selective router via dedicated circuits, gaining full access to the Enhanced 911 network. This provides a PSAP receiving a call from a telematics call center or other call center with all features available in an Enhanced 911 network, e.g., callback number of the 911 caller, and location of the 911 caller. Location of the caller is provided using a VoIP positioning center (VPC).

(58) **Field of Classification Search** ..... 455/403,  
455/404.1, 404.2, 414.1, 521, 560, 561, 562.1;  
370/351–356


See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

1,103,073 A 7/1914 O'Connell  
4,445,118 A 4/1984 Kuroda

**16 Claims, 3 Drawing Sheets**

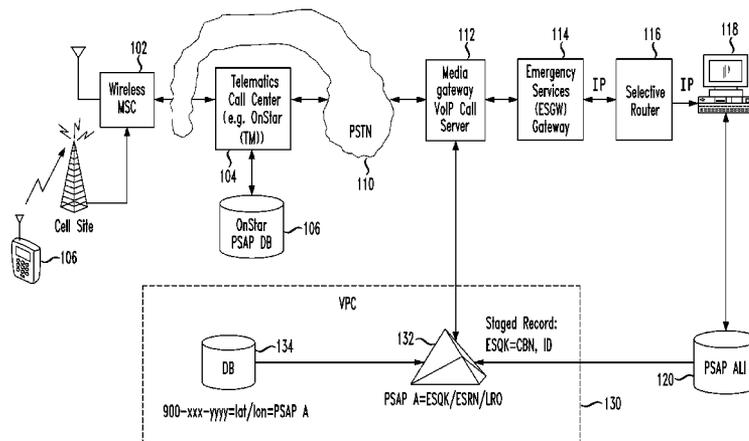

U.S. PATENT DOCUMENTS					
4,972,484 A	11/1990	Theile	5,552,772 A	9/1996	Janky
5,014,206 A	5/1991	Scribner	5,555,286 A	9/1996	Tendler
5,043,736 A	8/1991	Darnell	5,568,119 A	10/1996	Schipper
5,055,851 A	10/1991	Sheffer	5,568,153 A	10/1996	Beliveau
5,068,656 A	11/1991	Sutherland	5,574,648 A	11/1996	Pilley
5,068,891 A	11/1991	Marshall	5,579,372 A	11/1996	Astrom
5,070,329 A	12/1991	Jasinaki	5,588,009 A	12/1996	Will
5,081,667 A	1/1992	Drori	5,592,535 A	1/1997	Klotz
5,119,104 A	6/1992	Heller	5,594,780 A	1/1997	Wiedeman
5,126,722 A	6/1992	Kamis	5,604,486 A	2/1997	Lauro
5,144,283 A	9/1992	Arens	5,606,313 A	2/1997	Allen
5,161,180 A	11/1992	Chavous	5,606,618 A	2/1997	Lokhoff
5,166,972 A	11/1992	Smith	5,606,850 A	3/1997	Nakamura
5,177,478 A	1/1993	Wagai	5,610,815 A	3/1997	Gudat
5,193,215 A	3/1993	Olmer	5,614,890 A	3/1997	Fox
5,208,756 A	5/1993	Song	5,615,116 A	3/1997	Gudat
5,214,789 A	5/1993	George	5,621,793 A	4/1997	Bednarek
5,218,367 A	6/1993	Sheffer	5,628,051 A	5/1997	Salin
5,223,844 A	6/1993	Mansell	5,629,693 A	5/1997	Janky
5,239,570 A	8/1993	Koster	5,633,912 A	5/1997	Tsoi
5,265,630 A	11/1993	Hartmann	5,636,276 A	6/1997	Brugger
5,266,944 A	11/1993	Carroll	5,661,652 A	8/1997	Sprague
5,283,570 A	2/1994	DeLuca	5,661,755 A	8/1997	Van de Kerkhof
5,289,527 A	2/1994	Tiedemann	5,682,600 A	10/1997	Salin
5,293,642 A	3/1994	Lo	5,689,245 A	11/1997	Noreen
5,299,132 A	3/1994	Wortham	5,699,053 A	12/1997	Jonsson
5,301,354 A	4/1994	Schwendeman	5,731,785 A	3/1998	Lemelson
5,311,516 A	5/1994	Kuznicke	5,740,534 A	4/1998	Ayerst
5,325,302 A	6/1994	Izidon	5,761,618 A	6/1998	Lynch
5,327,529 A	7/1994	Fults	5,765,152 A	6/1998	Erickson
5,334,974 A	8/1994	Simms	5,767,795 A	6/1998	Schaphorst
5,335,246 A	8/1994	Yokey	5,768,509 A	6/1998	Gunluk
5,343,493 A	8/1994	Karimulah	5,771,353 A	6/1998	Eggleston
5,347,568 A	9/1994	Moody	5,774,533 A	6/1998	Patel
5,351,235 A	9/1994	Lahtinen	5,774,670 A	6/1998	Montulli
5,361,212 A	11/1994	Class	5,787,357 A	7/1998	Salin
5,363,425 A	11/1994	Mufti	5,794,142 A	8/1998	Vanttila
5,365,451 A	11/1994	Wang	5,797,094 A	8/1998	Houde
5,374,936 A	12/1994	Feng	5,797,096 A	8/1998	Lupien
5,379,451 A	1/1995	Nakagoshi	5,802,492 A	9/1998	DeLorme
5,381,338 A	1/1995	Wysocki	5,806,000 A	9/1998	Vo
5,387,993 A	2/1995	Heller	5,809,415 A	9/1998	Rossmann
5,388,147 A	2/1995	Grimes	5,812,086 A	9/1998	Bertiger
5,390,339 A	2/1995	Bruckert	5,812,087 A	9/1998	Krasner
5,394,158 A	2/1995	Chia	5,822,700 A	10/1998	Hult
5,396,227 A	3/1995	Carroll	5,828,740 A	10/1998	Khuc
5,398,190 A	3/1995	Wortham	5,841,396 A	11/1998	Krasner
5,406,614 A	4/1995	Hara	5,857,201 A	1/1999	Wright, Jr.
5,418,537 A	5/1995	Bird	5,864,667 A	1/1999	Barkam
5,422,813 A	6/1995	Schuchman	5,874,914 A	2/1999	Krasner
5,423,076 A	6/1995	Westergren	5,896,369 A	4/1999	Warsta
5,434,789 A	7/1995	Fraker	5,920,821 A	7/1999	Seazholtz
5,454,024 A	9/1995	Lebowitz	5,922,074 A	7/1999	Richard
5,461,390 A	10/1995	Hosher	5,930,250 A	7/1999	Klok
5,470,233 A	11/1995	Fruchterman	5,953,398 A	9/1999	Hill
5,479,408 A	12/1995	Will	5,960,362 A	9/1999	Grob
5,479,482 A	12/1995	Grimes	5,974,054 A	10/1999	Couts
5,485,161 A	1/1996	Vaughn	5,978,685 A	11/1999	Laiho
5,485,163 A	1/1996	Singer	5,983,099 A	11/1999	Yao
5,488,563 A	1/1996	Chazelle	5,987,323 A	11/1999	Huotari
5,494,091 A	2/1996	Freeman	5,998,111 A	12/1999	Abe
5,497,149 A	3/1996	Fast	5,999,124 A	12/1999	Sheynblat
5,504,491 A	4/1996	Chapman	6,014,602 A	1/2000	Kithil
5,506,886 A	4/1996	Maine	6,032,051 A	2/2000	Hall
5,508,931 A	4/1996	Snider	6,035,025 A	3/2000	Hanson
5,513,243 A	4/1996	Kage	6,049,710 A	4/2000	Nilsson
5,515,287 A	5/1996	Hakoyama	6,052,081 A	4/2000	Krasner
5,517,199 A	5/1996	DiMattei	6,058,300 A	5/2000	Hanson
5,519,403 A	5/1996	Bickley	6,061,018 A	5/2000	Sheynblat
5,530,655 A	6/1996	Lokhoff	6,061,346 A	5/2000	Nordman
5,530,914 A	6/1996	McPheters	6,064,336 A	5/2000	Krasner
5,532,690 A	7/1996	Hertel	6,064,875 A	5/2000	Morgan
5,535,434 A	7/1996	Siddoway	6,067,045 A	5/2000	Castelloe
5,539,395 A	7/1996	Buss	6,070,067 A	5/2000	Nguyen
5,539,398 A	7/1996	Hall	6,075,982 A	6/2000	Donovan
5,539,829 A	7/1996	Lokhoff	6,081,229 A	6/2000	Soliman
5,543,776 A	8/1996	L'Esperance	6,081,508 A	6/2000	West
5,546,445 A	8/1996	Dennison	6,085,320 A	7/2000	Kaliski, Jr.
			6,101,378 A	8/2000	Barabash

6,108,533	A	8/2000	Brohoff	6,477,150	B1	11/2002	Maggenti
6,122,503	A	9/2000	Daly	6,504,491	B1	1/2003	Christians
6,122,520	A	9/2000	Want	6,505,049	B1	1/2003	Dorenbosch
6,124,810	A	9/2000	Segal	6,510,387	B2	1/2003	Fuchs
6,131,067	A	10/2000	Girerd	6,512,922	B1	1/2003	Burg
6,133,874	A	10/2000	Krasner	6,512,930	B2	1/2003	Sandegren
6,134,316	A	10/2000	Kallioniemi	6,515,623	B2	2/2003	Johnson
6,134,483	A	10/2000	Vayanos	6,519,466	B2	2/2003	Pande
6,148,197	A	11/2000	Bridges	6,522,682	B1	2/2003	Kohli
6,148,198	A	11/2000	Anderson	6,526,026	B1	2/2003	Menon
6,149,353	A	11/2000	Nilsson	6,529,500	B1	3/2003	Pandharipande
6,150,980	A	11/2000	Krasner	6,529,829	B2	3/2003	Turetzky
6,154,172	A	11/2000	Piccionelli	6,531,982	B1	3/2003	White
6,169,891	B1	1/2001	Gorham	6,538,757	B1	3/2003	Sansone
6,169,901	B1	1/2001	Boucher	6,539,200	B1	3/2003	Schiff
6,169,902	B1	1/2001	Kawamoto	6,539,232	B2	3/2003	Hendrey et al.
6,173,181	B1	1/2001	Losh	6,539,304	B1	3/2003	Chansarkar
6,178,505	B1	1/2001	Schneider	6,542,464	B1	4/2003	Takeda
6,178,506	B1	1/2001	Quick, Jr.	6,542,734	B1	4/2003	Abrol
6,181,935	B1	1/2001	Gossman	6,542,743	B1	4/2003	Soliman
6,181,939	B1	1/2001	Ahvenainen	6,549,776	B1	4/2003	Joong
6,188,354	B1	2/2001	Soliman	6,549,844	B1	4/2003	Egberts
6,188,752	B1	2/2001	Lesley	6,556,832	B1	4/2003	Soliman
6,188,909	B1	2/2001	Alanara	6,560,461	B1	5/2003	Fomukong
6,189,098	B1	2/2001	Kaliski, Jr.	6,560,534	B2	5/2003	Abraham
6,195,557	B1	2/2001	Havinis	6,564,261	B1	5/2003	Gudjonsson
6,198,431	B1	3/2001	Gibson	6,570,530	B2	5/2003	Gaal
6,199,045	B1	3/2001	Giniger	6,571,095	B1	5/2003	Koodli
6,199,113	B1	3/2001	Alegre	6,574,558	B2	6/2003	Kohli
6,205,330	B1	3/2001	Winbladh	6,580,390	B1	6/2003	Hay
6,208,290	B1	3/2001	Krasner	6,584,552	B1	6/2003	Kuno
6,208,854	B1	3/2001	Roberts	6,587,691	B1	7/2003	Granstam
6,215,441	B1	4/2001	Moeglein	6,594,500	B2	7/2003	Bender
6,219,557	B1	4/2001	Havinis	6,597,311	B2	7/2003	Sheynblat
6,223,046	B1	4/2001	Hamill-Keays	6,600,927	B2	7/2003	Hamilton
6,226,529	B1	5/2001	Bruno	6,603,973	B1	8/2003	Foladare
6,239,742	B1	5/2001	Krasner	6,606,495	B1	8/2003	Korpi
6,247,135	B1	6/2001	Feaugue	6,606,554	B2	8/2003	Edge
6,249,680	B1	6/2001	Wax	6,609,004	B1	8/2003	Morse
6,249,744	B1	6/2001	Morita	6,611,757	B2	8/2003	Brodie
6,249,873	B1	6/2001	Richard	6,618,670	B1	9/2003	Chansarkar
6,253,074	B1	6/2001	Carlsson	6,621,452	B2	9/2003	Knockeart
6,253,203	B1	6/2001	O'Flaherty	6,621,810	B1	9/2003	Leung
6,260,147	B1	7/2001	Quick, Jr.	6,628,233	B2	9/2003	Knockeart
6,266,614	B1	7/2001	Alumbaugh	6,633,255	B2	10/2003	Krasner
6,275,692	B1	8/2001	Skog	6,640,184	B1	10/2003	Rabe
6,275,849	B1	8/2001	Ludwig	6,650,288	B1	11/2003	Pitt
6,278,701	B1	8/2001	Ayyagari	6,661,372	B1	12/2003	Girerd
6,289,373	B1	9/2001	Dezozno	6,665,539	B2	12/2003	Sih
6,297,768	B1	10/2001	Allen, Jr.	6,665,541	B1	12/2003	Krasner
6,307,504	B1	10/2001	Sheynblat	6,671,620	B1	12/2003	Garin
6,308,269	B2	10/2001	Proidl	6,677,894	B2	1/2004	Sheynblat
6,313,786	B1	11/2001	Sheynblat et al.	6,680,694	B1	1/2004	Knockeart
6,317,594	B1	11/2001	Gossman et al.	6,687,504	B1	2/2004	Raith
6,321,091	B1	11/2001	Holland	6,691,019	B2	2/2004	Seeley
6,321,092	B1	11/2001	Fitch	6,694,258	B2	2/2004	Johnson
6,321,257	B1	11/2001	Kotola	6,694,351	B1	2/2004	Shaffer
6,324,542	B1	11/2001	Wright, Jr. et al.	6,697,629	B1	2/2004	Grilli
6,327,473	B1	12/2001	Soliman	6,698,195	B1	3/2004	Hellinger
6,327,479	B1	12/2001	Mikkola	6,701,144	B2	3/2004	Kirbas
6,333,919	B2	12/2001	Gaffney	6,703,971	B2	3/2004	Pande
6,360,093	B1	3/2002	Ross	6,703,972	B2	3/2004	Van Diggelen
6,360,102	B1	3/2002	Havinis	6,704,651	B2	3/2004	Van Diggelen
6,363,254	B1	3/2002	Jones	6,707,421	B1	3/2004	Drury
6,367,019	B1	4/2002	Ansell	6,714,793	B1	3/2004	Carey
6,370,389	B1	4/2002	Isomursu	6,718,174	B2	4/2004	Vayanos
6,377,209	B1	4/2002	Krasner	6,720,915	B2	4/2004	Sheynblat
6,400,314	B1	6/2002	Krasner	6,721,578	B2	4/2004	Minear
6,400,958	B1	6/2002	Isomursu	6,721,871	B2	4/2004	Piispanen
6,411,254	B1	6/2002	Moeglein	6,724,342	B2	4/2004	Bloebaum
6,421,002	B2	7/2002	Krasner	6,725,159	B2	4/2004	Krasner
6,427,001	B1	7/2002	Contractor	6,728,701	B1	4/2004	Stoica
6,433,734	B1	8/2002	Krasner	6,731,940	B1	5/2004	Nagendran
6,434,381	B1	8/2002	Moore	6,734,821	B2	5/2004	Van Diggelen
6,442,391	B1	8/2002	Johansson	6,738,013	B2	5/2004	Orler
6,449,473	B1	9/2002	Raivisto	6,738,800	B1	5/2004	Aquilon
6,449,476	B1	9/2002	Hutchison, IV	6,741,842	B2	5/2004	Goldberg
6,456,852	B2	9/2002	Bar	6,744,856	B2	6/2004	Karnik
6,463,272	B1	10/2002	Wallace	6,744,858	B1	6/2004	Ryan

US 8,406,728 B2

6,745,038	B2	6/2004	Callaway, Jr.	6,968,044	B2	11/2005	Beason
6,747,596	B2	6/2004	Orler	6,970,917	B1	11/2005	Kushwaha
6,748,195	B1	6/2004	Phillips	6,973,320	B2	12/2005	Brown
6,751,464	B1	6/2004	Burg	6,975,266	B2	12/2005	Abraham
6,756,938	B2	6/2004	Zhao	6,978,453	B2	12/2005	Rao
6,757,544	B2	6/2004	Rangarajan	6,980,816	B2	12/2005	Rohler
6,771,742	B2	8/2004	McCalmont	6,985,747	B2	1/2006	Chithambaram
6,772,340	B1	8/2004	Peinado	6,993,355	B1	1/2006	Pershan
6,775,267	B1	8/2004	Kung	6,996,720	B1	2/2006	DeMello
6,775,534	B2	8/2004	Lindgren	6,999,782	B2	2/2006	Shaughnessy
6,775,655	B1	8/2004	Peinado	7,024,321	B1	4/2006	Deninger
6,775,802	B2	8/2004	Gaal	7,024,393	B1	4/2006	Peinado
6,778,136	B2	8/2004	Gronemeyer	7,047,411	B1	5/2006	DeMello
6,778,885	B2	8/2004	Agashe	7,065,351	B2	6/2006	Carter
6,781,963	B2	8/2004	Crockett	7,065,507	B2	6/2006	Mohammed
6,788,249	B1	9/2004	Farmer	7,072,667	B2	7/2006	Olrik
6,795,444	B1	9/2004	Vo	7,079,857	B2	7/2006	Maggenti
6,795,699	B1	9/2004	McCraw	7,103,018	B1	9/2006	Hansen
6,799,049	B1	9/2004	Zellner	7,103,574	B1	9/2006	Peinado
6,799,050	B1	9/2004	Krasner	7,106,717	B2	9/2006	Rousseau
6,801,159	B2	10/2004	Swope	7,113,128	B1	9/2006	Pitt
6,804,524	B1	10/2004	Vandermeijden	7,136,466	B1	11/2006	Gao
6,807,534	B1	10/2004	Erickson	7,136,838	B1	11/2006	Peinado
6,810,323	B1	10/2004	Bullock	7,151,946	B2	12/2006	Maggenti
6,813,264	B2	11/2004	Vassilovski	7,171,220	B2	1/2007	Belcea
6,813,560	B2	11/2004	Van Diggelen	7,174,153	B2	2/2007	Ehlers
6,816,111	B2	11/2004	Krasner	7,177,397	B2	2/2007	McCalmont
6,816,710	B2	11/2004	Krasner	7,177,398	B2	2/2007	Meer
6,816,719	B1	11/2004	Heinonen	7,177,399	B2	2/2007	Dawson
6,816,734	B2	11/2004	Wong	7,184,418	B1	2/2007	Baba
6,820,269	B2	11/2004	Baucke et al.	7,194,249	B2	3/2007	Phillips
6,829,475	B1	12/2004	Lee	7,200,380	B2	4/2007	Havlark
6,832,373	B2	12/2004	O'Neill	7,209,758	B1	4/2007	Moll
6,839,020	B2	1/2005	Geier	7,209,969	B2	4/2007	Lahti
6,839,021	B2	1/2005	Sheynblat	7,218,940	B2	5/2007	Niemenmaa
6,839,417	B2	1/2005	Weisman	7,221,959	B2	5/2007	Lindqvist
6,842,715	B1	1/2005	Gaal	7,245,900	B1	7/2007	Lamb
6,847,618	B2	1/2005	Laurson	7,246,187	B1	7/2007	Ezra
6,847,822	B1	1/2005	Dennison	7,260,186	B2	8/2007	Zhu
6,853,916	B2	2/2005	Fuchs	7,260,384	B2	8/2007	Bales
6,856,282	B2	2/2005	Mauro	7,269,428	B1	9/2007	Wallenius
6,861,980	B1	3/2005	Rowitch	7,302,582	B2	11/2007	Snapp
6,865,171	B1	3/2005	Nilsson	7,321,773	B2	1/2008	Hines
6,865,395	B2	3/2005	Riley	7,330,899	B2	2/2008	Wong
6,867,733	B2	3/2005	Sandhu	7,333,480	B1	2/2008	Clarke
6,867,734	B2	3/2005	Voor	7,366,157	B1	4/2008	Valentine
6,873,854	B2	3/2005	Crockett	7,369,508	B2	5/2008	Parantainen
6,876,734	B1	4/2005	Summers	7,369,530	B2	5/2008	Keagy
6,882,850	B2	4/2005	McConnell et al.	7,382,773	B2	6/2008	Schoeneberger
6,885,940	B2	4/2005	Brodie	7,392,240	B2	6/2008	Scriffignano
6,888,497	B2	5/2005	King	7,394,896	B2	7/2008	Norton
6,888,932	B2	5/2005	Snip	7,412,049	B1	8/2008	Koch
6,895,238	B2	5/2005	Newell	7,424,293	B2	9/2008	Zhu
6,895,249	B2	5/2005	Gaal	7,426,380	B2	9/2008	Hines
6,900,758	B1	5/2005	Mann	7,428,571	B2	9/2008	Ichimura
6,903,684	B1	6/2005	Simic	7,436,785	B1	10/2008	McMullen
6,904,029	B2	6/2005	Fors	7,440,442	B2	10/2008	Grabelsky
6,907,224	B2	6/2005	Younis	7,450,951	B2	11/2008	Vimpari
6,907,238	B2	6/2005	Leung	7,453,990	B2	11/2008	Welenson
6,912,230	B1	6/2005	Salkini	7,495,608	B1	2/2009	Chen
6,912,395	B2	6/2005	Benes	7,519,353	B2	4/2009	Stevens
6,912,545	B1	6/2005	Lundy	7,573,982	B2	8/2009	Breen
6,915,208	B2	7/2005	Garin	7,602,886	B1	10/2009	Beech
6,917,331	B2	7/2005	Gronemeyer	7,617,287	B2	11/2009	Vella
6,930,634	B2	8/2005	Peng	7,623,447	B1	11/2009	Faccin
6,937,187	B2	8/2005	Van Diggelen	7,702,081	B1	4/2010	Klesper
6,937,872	B2	8/2005	Krasner	7,747,258	B2	6/2010	Farmer
6,940,826	B1	9/2005	Simard	7,764,961	B2	7/2010	Zhu
6,940,950	B2	9/2005	Dickinson	7,783,297	B2	8/2010	Ishii
6,941,144	B2	9/2005	Stein	7,787,611	B1	8/2010	Kotelly
6,944,540	B2	9/2005	King	7,881,233	B2	2/2011	Biesel
6,947,772	B2	9/2005	Minear	7,937,067	B2	5/2011	Maier
6,950,058	B1	9/2005	Davis	8,005,683	B2	8/2011	Tessel
6,957,068	B2	10/2005	Hutchison	8,027,658	B2	9/2011	Suryanarayana
6,957,073	B2	10/2005	Bye	8,060,389	B2	11/2011	Johnson
6,961,562	B2	11/2005	Ross	8,150,363	B2 *	4/2012	Dickinson et al. .... 455/404.1
6,963,557	B2	11/2005	Knox	2001/0011247	A1	8/2001	O'Flaherty
6,965,754	B2	11/2005	King	2001/0040886	A1	11/2001	Jimenez
6,965,767	B2	11/2005	Maggenti	2002/0037735	A1	3/2002	Maggenti

2002/0052214	A1	5/2002	Maggenti	2004/0247090	A1	12/2004	Nurmela
2002/0058515	A1	5/2002	Holler	2004/0258021	A1	12/2004	Kashimoto
2002/0061760	A1	5/2002	Maggenti	2004/0267445	A1	12/2004	De Luca
2002/0069529	A1	6/2002	Wieres	2005/0003797	A1	1/2005	Baldwin
2002/0077083	A1	6/2002	Zellner	2005/0021769	A1	1/2005	Kim
2002/0077084	A1	6/2002	Zellner	2005/0028034	A1	2/2005	Gantman
2002/0077118	A1	6/2002	Zellner	2005/0030977	A1	2/2005	Casey
2002/0077897	A1	6/2002	Zellner	2005/0039178	A1	2/2005	Marolia
2002/0085538	A1	7/2002	Leung	2005/0041578	A1	2/2005	Huotari
2002/0086676	A1	7/2002	Hendrey	2005/0043037	A1	2/2005	Loppe
2002/0102996	A1	8/2002	Jenkins	2005/0048987	A1	3/2005	Glass
2002/0102999	A1	8/2002	Maggenti	2005/0063519	A1	3/2005	James
2002/0111172	A1	8/2002	DeWolf	2005/0071671	A1	3/2005	Karaoguz
2002/0112047	A1	8/2002	Kushwaha	2005/0074107	A1	4/2005	Renner
2002/0118650	A1	8/2002	Jagadeesan	2005/0078612	A1	4/2005	Lang
2002/0118796	A1	8/2002	Menard	2005/0083911	A1	4/2005	Grabelsky
2002/0123327	A1	9/2002	Vataja	2005/0085257	A1	4/2005	Laird
2002/0126656	A1	9/2002	Park	2005/0086467	A1	4/2005	Asokan
2002/0158777	A1	10/2002	Flick	2005/0090236	A1	4/2005	Schwinke
2002/0173317	A1	11/2002	Nykanen	2005/0838911		4/2005	Chuang
2002/0191595	A1	12/2002	Mar	2005/0101335	A1	5/2005	Kelly
2003/0009277	A1	1/2003	Fan	2005/0107673	A1	5/2005	Ball
2003/0009602	A1	1/2003	Jacobs	2005/0111630	A1	5/2005	Potorny
2003/0012148	A1	1/2003	Peters	2005/0112030	A1	5/2005	Gaus
2003/0013449	A1	1/2003	Hose	2005/0119012	A1	6/2005	Merheb
2003/0016804	A1	1/2003	Sheha	2005/0134504	A1	6/2005	Harwood
2003/0026245	A1	2/2003	Ejzak	2005/0136885	A1	6/2005	Kaltsukis
2003/0037163	A1	2/2003	Kitada	2005/0149430	A1	7/2005	Williams
2003/0040272	A1	2/2003	Lelievre	2005/0174991	A1	8/2005	Keagy
2003/0044654	A1	3/2003	Holt	2005/0186937	A1	8/2005	Graham
2003/0065788	A1	4/2003	Salomaki	2005/0190892	A1	9/2005	Dawson
2003/0072318	A1	4/2003	Lam	2005/0192822	A1	9/2005	Hartenstein
2003/0078064	A1	4/2003	Chan	2005/0201358	A1	9/2005	Nelson
2003/0081557	A1	5/2003	Mettala	2005/0201529	A1	9/2005	Nelson
2003/0086539	A1	5/2003	McCalmont	2005/0209995	A1	9/2005	Aksu
2003/0096623	A1	5/2003	Kim	2005/0213716	A1	9/2005	Zhu
2003/0101329	A1	5/2003	Lahti	2005/0232252	A1	10/2005	Hoover
2003/0101341	A1	5/2003	Kettler	2005/0238156	A1	10/2005	Turner
2003/0103484	A1	6/2003	Oommen	2005/0255857	A1	11/2005	Kim
2003/0108176	A1	6/2003	Kung	2005/0259675	A1	11/2005	Tuohino
2003/0109245	A1	6/2003	McCalmont	2005/0261002	A1	11/2005	Cheng
2003/0114157	A1	6/2003	Spitz	2005/0265318	A1	12/2005	Khartabil
2003/0118160	A1	6/2003	Holt	2005/0271029	A1	12/2005	Iffland
2003/0119521	A1	6/2003	Tipnis	2005/0282518	A1	12/2005	D' Evelyn
2003/0119528	A1	6/2003	Pew	2005/0289097	A1	12/2005	Trossen
2003/0137961	A1	7/2003	Tsirsis	2006/0008065	A1	1/2006	Longman et al.
2003/0148757	A1	8/2003	Meer	2006/0010200	A1	1/2006	Mousseau
2003/0153340	A1	8/2003	Crockett	2006/0023747	A1	2/2006	Koren et al.
2003/0153341	A1	8/2003	Crockett	2006/0026288	A1	2/2006	Acharya
2003/0153342	A1	8/2003	Crockett	2006/0053225	A1	3/2006	Poikselka
2003/0153343	A1	8/2003	Crockett	2006/0058049	A1	3/2006	McLaughlin
2003/0161298	A1	8/2003	Bergman	2006/0058102	A1	3/2006	Nguyen et al.
2003/0186709	A1	10/2003	Rhodes	2006/0068753	A1	3/2006	Karpen
2003/0196105	A1	10/2003	Fineberg	2006/0069503	A1	3/2006	Suomela et al.
2003/0204640	A1	10/2003	Sahinoja	2006/0072729	A1	4/2006	Lee et al.
2003/0223381	A1	12/2003	Schroderus	2006/0077911	A1	4/2006	Shaffer
2004/0002326	A1	1/2004	Maher	2006/0078094	A1	4/2006	Breen
2004/0032485	A1	2/2004	Stephens	2006/0088152	A1	4/2006	Green
2004/0043775	A1	3/2004	Kennedy	2006/0104306	A1	5/2006	Adamczyk
2004/0044623	A1	3/2004	Wake	2006/0120517	A1	6/2006	Moon
2004/0047461	A1	3/2004	Weisman et al.	2006/0128395	A1	6/2006	Muhonen
2004/0068724	A1	4/2004	Gardner	2006/0135132	A1	6/2006	Cai
2004/0076277	A1	4/2004	Kuusinen	2006/0135177	A1	6/2006	Winterbottom
2004/0098497	A1	5/2004	Banet	2006/0188083	A1	8/2006	Breen
2004/0132465	A1	7/2004	Mattila	2006/0193447	A1	8/2006	Schwartz
2004/0150518	A1	8/2004	Phillips	2006/0212558	A1	9/2006	Sahinoja
2004/0152493	A1	8/2004	Phillips	2006/0212562	A1	9/2006	Kushwaha
2004/0176123	A1	9/2004	Chin	2006/0222151	A1	10/2006	Goldman et al.
2004/0181689	A1	9/2004	Kiyoto	2006/0233338	A1	10/2006	Venkata
2004/0184584	A1	9/2004	McCalmont	2006/0234639	A1	10/2006	Kushwaha
2004/0190497	A1	9/2004	Knox	2006/0234698	A1	10/2006	Fok
2004/0192271	A1	9/2004	Eisner	2006/0250987	A1	11/2006	White
2004/0198332	A1	10/2004	Lundsgaard	2006/0258380	A1	11/2006	Liebowitz
2004/0198386	A1	10/2004	Dupray	2006/0259365	A1	11/2006	Agarwal et al.
2004/0203575	A1	10/2004	Chin	2006/0281437	A1	12/2006	Cook
2004/0203732	A1	10/2004	Brusilovsky	2006/0293024	A1	12/2006	Benco
2004/0205151	A1	10/2004	Sprigg	2006/0293066	A1	12/2006	Edge
2004/0229632	A1	11/2004	Flynn	2007/0003024	A1	1/2007	Olivier
2004/0242238	A1	12/2004	Wang	2007/0014282	A1	1/2007	Mitchell

2007/0019614	A1	1/2007	Hoffmann
2007/0021908	A1	1/2007	Jaugilas
2007/0022011	A1	1/2007	Altberg et al.
2007/0026854	A1	2/2007	Nath
2007/0026871	A1	2/2007	Wager
2007/0027997	A1	2/2007	Polk
2007/0030539	A1	2/2007	Nath
2007/0036139	A1	2/2007	Patel
2007/0041513	A1	2/2007	Gende
2007/0049288	A1	3/2007	Lamprecht
2007/0060097	A1	3/2007	Edge
2007/0081635	A1	4/2007	Croak
2007/0115941	A1	5/2007	Patel
2007/0121601	A1	5/2007	Kikinis
2007/0149213	A1	6/2007	Lamba
2007/0160036	A1	7/2007	Smith
2007/0162228	A1	7/2007	Mitchell
2007/0201623	A1	8/2007	Hines
2007/0206568	A1	9/2007	Silver
2007/0206613	A1	9/2007	Silver
2007/0242660	A1	10/2007	Xu
2007/0263610	A1	11/2007	Mitchell
2007/0263611	A1	11/2007	Mitchell
2007/0270164	A1	11/2007	Maier
2007/0293205	A1	12/2007	Henderson
2008/0032703	A1	2/2008	Krumm
2008/0037715	A1	2/2008	Prozeniuk
2008/0063153	A1	3/2008	Krivorot
2008/0065775	A1	3/2008	Polk
2008/0081646	A1	4/2008	Morin
2008/1178595		5/2008	Shahidi
2008/0160953	A1	7/2008	Mia
2008/0214202	A1	9/2008	Toomey
2009/0128404	A1	5/2009	Martino
2010/0003954	A1	1/2010	Greene
2010/0119049	A1	5/2010	Clark
2010/0198933	A1	8/2010	Smith
2011/0113060	A1	5/2011	Martini
2011/0273568	A1	11/2011	Lagassey
2012/0001750	A1	1/2012	Monroe
2012/0189107	A1	7/2012	Dickinson

FOREIGN PATENT DOCUMENTS

WO	PCT/GB00/04499	11/2000
WO	WO02/11407	2/2002
WO	PCT/US03/028369	10/2003

WO	WO2004/098213	11/2004
WO	PCT/US05/022090	6/2005
WO	WO2005/051033	6/2005

OTHER PUBLICATIONS

Nars Haran, U.S. Cellular, Packet Data—Roaming and LBS Overview, Nov. 2, 2007, pp. 1-15.

Andrew Yeow, BCE, LBS Roaming Summit, Sep. 19, 2006, pp. 1-8.

Mike McMullen, Sprint, LBS Roaming Summit, Sep. 19, 2006.

Bhalla et al, TELUS, Technology Strategy—LBS Roaming Summit, Sep. 19, 2006.

Alfredo Aguirre, Ilusacell, First and Only Carrier in Mexico with a 3G CDMA Network, 2007.

International Search Report in PCT/US2008/01441 dated May 16, 2008.

Le-Pond Chin, Jyh-Hong Wen, Ting-Way Liu, the Study of the Interconnection of GSM Mobile Communication System Over IP based Network, May 6, 2001, IEEE, Vehicular Technology Conference, vol. 3, pp. 2219-2223.

Yilin Ahao, Efficient and reliable data transmission for cellular and GPS based mayday systems, Nov. 1997, IEEE, IEEE Conference on Intelligent Transportation System, 1997. ITSC 97, 555-559.

European Search Report in Appl. No. EP06827172 dated Dec. 29, 2009.

International Search Report in PCT/US/2010/01938 dated Sep. 30, 2010.

Location Based Services V2 Roaming Support (non proprietary), 80-V8470-2NP A, dated Jan. 27, 2005, pp. 1-56.

Schulzrinne et al., Emergency Services for Internet Telephony Systems draft-schulzrinne-sipping-emergency-arch, IETF Standard Working Draft, Feb. 4, 2004, 1-22.


European Search Report in European appl. No. 06851433.0-2413 dated Aug. 8, 2008.


"Location Services (LCS); Functional Description; stage 2; ETSI TS 101 724," ETSI Standards, Jun. 2004 (2004-2006), XPO14016068, sect. 4, section 5.6.6., fig 3, sect. 7.6.2, fig. 30.

Intrado MSAG Prep for E911 Program and Documentation. Intrado Inc., Longmont, Co. Sep. 14, 2006. Accesses: Nov. 8, 2011. Idaho PSAP Standards Committee. Idaho Emergency Communications Commission, [http://idahodispatch.com/index.php?option=com\\_documan&task+doc\\_download&gid+3&itemid+7](http://idahodispatch.com/index.php?option=com_documan&task+doc_download&gid+3&itemid+7).

\* cited by examiner

FIG. 1

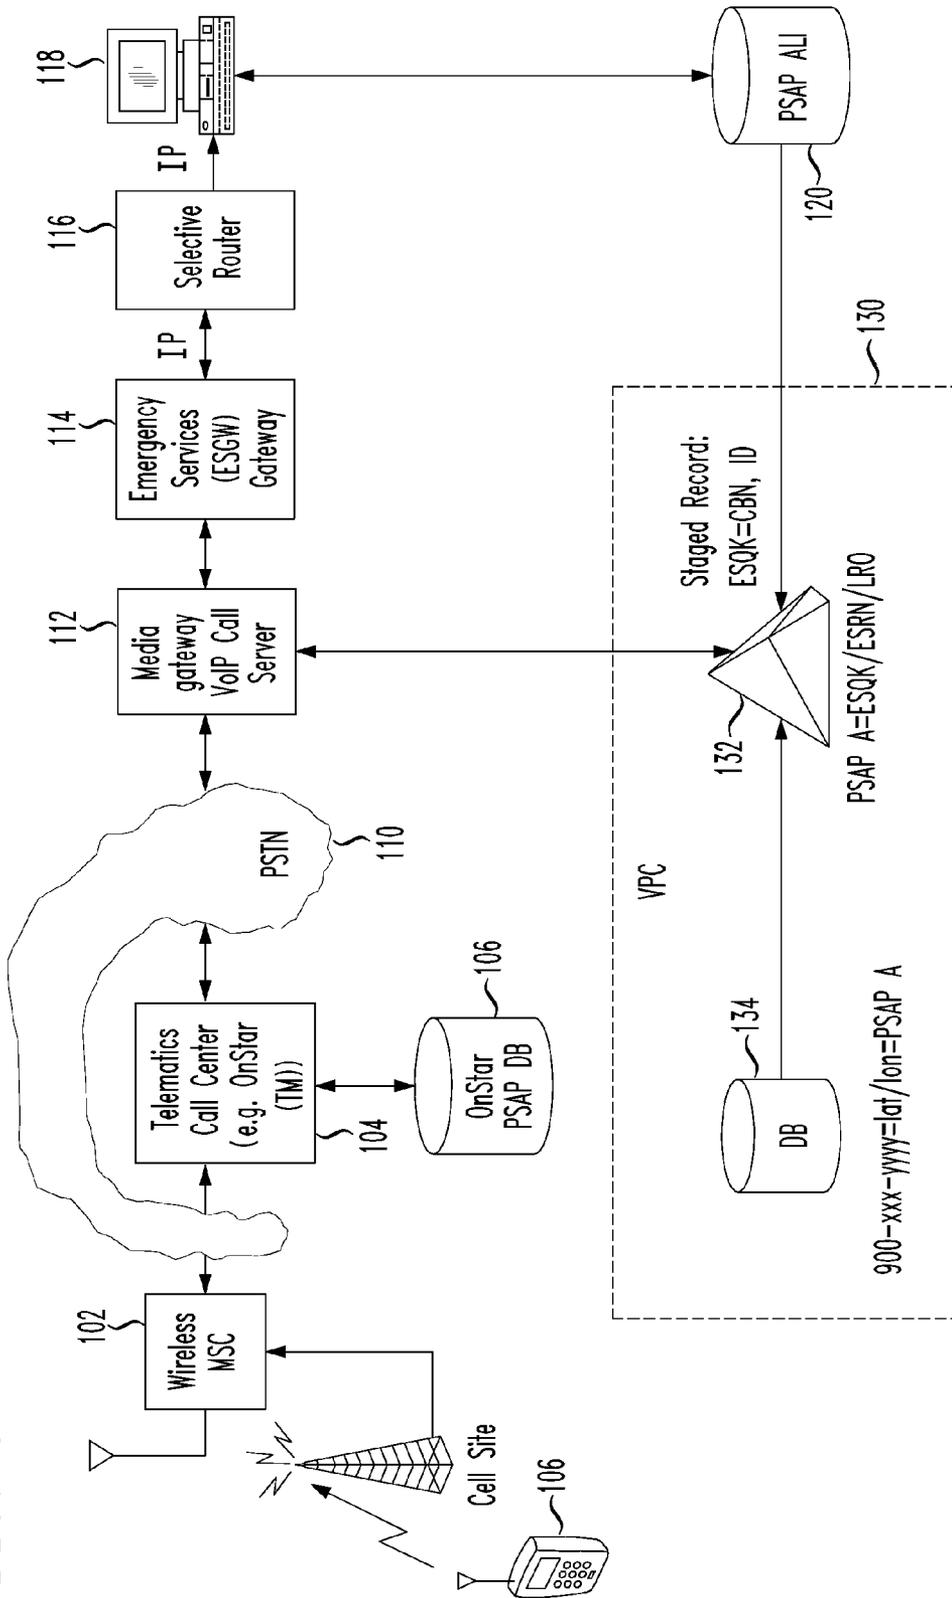

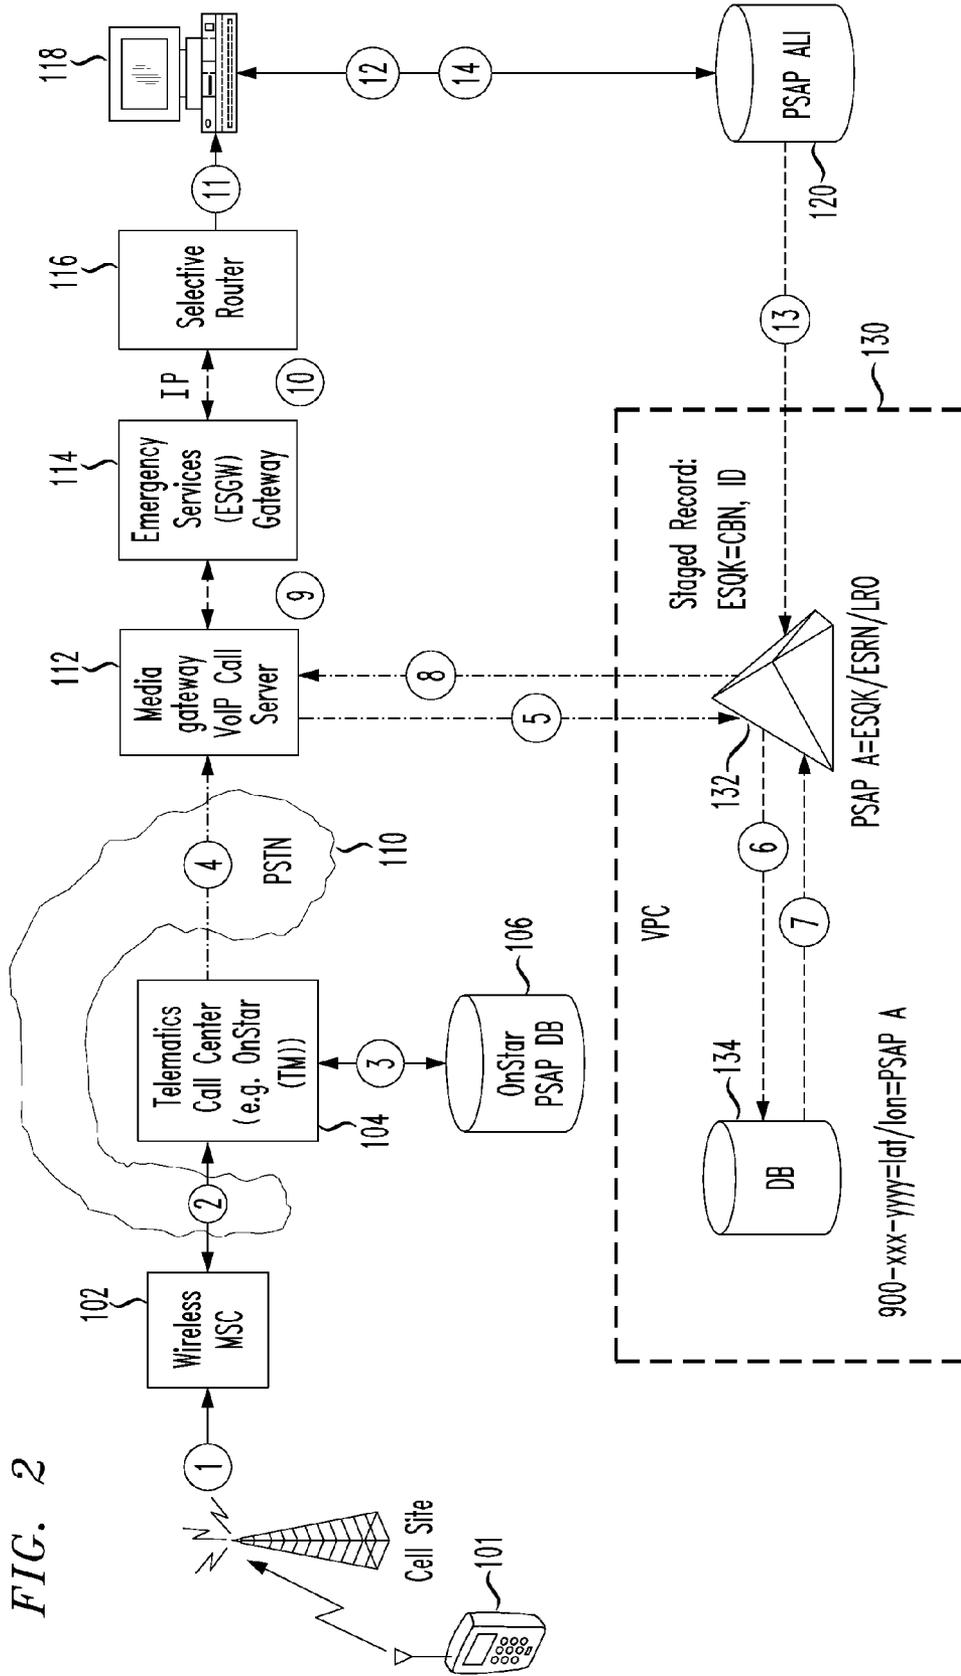

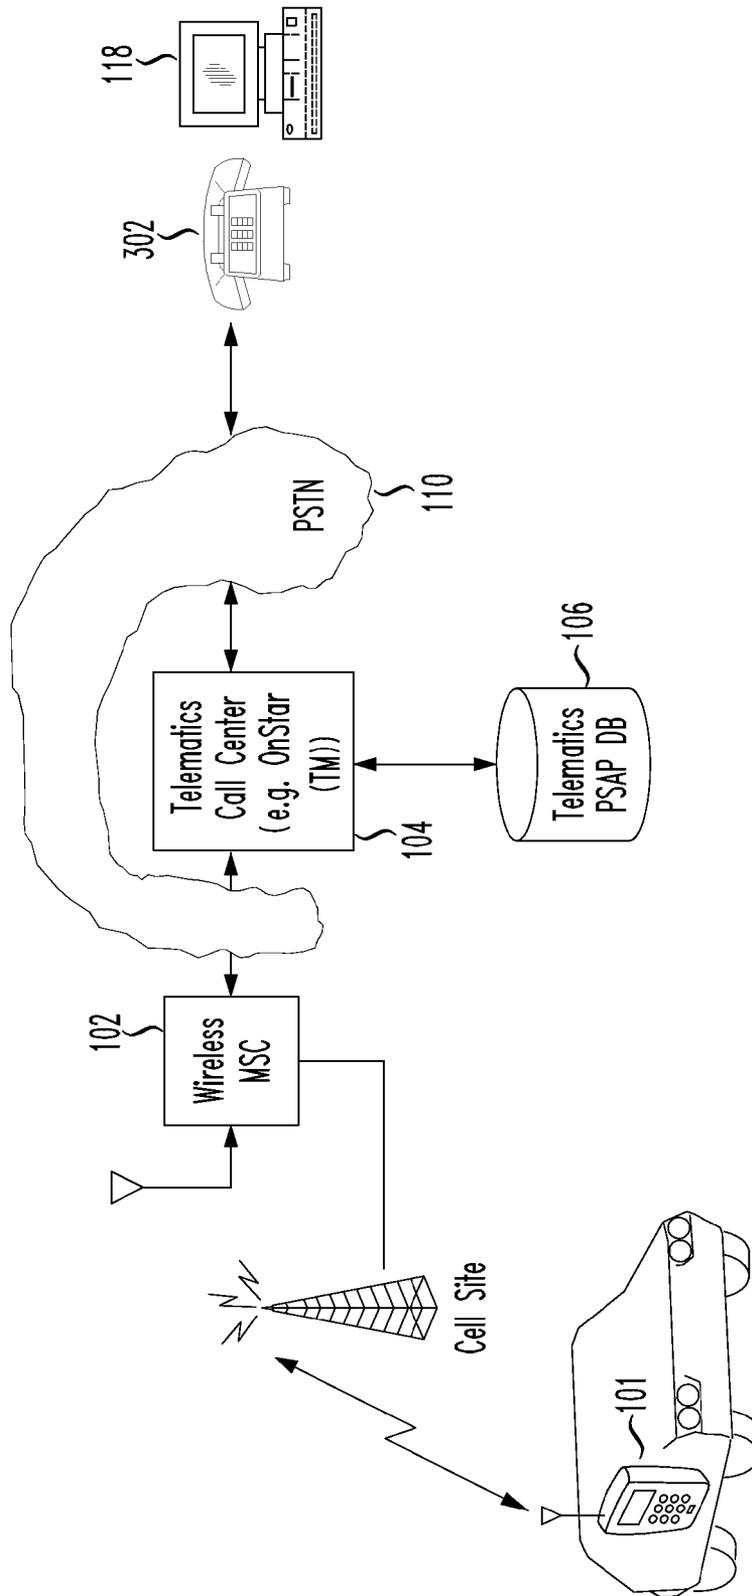


FIG. 3  
(PRIOR ART)

## ENHANCED E911 NETWORK ACCESS FOR CALL CENTERS

The present invention is a continuation of U.S. patent application Ser. No. 11/354,861, entitled "Enhanced E911 Network for Call Centers," filed on Feb. 16, 2006, now U.S. Pat. No. 8,150,363, the entirety of which is incorporated herein by reference.

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

This invention relates generally to E9-1-1 emergency phone calls. More particularly, it relates to emergency E9-1-1 calls using Voice Over Internet Protocol (VoIP), originating from centralized call centers.

#### 2. Background of the Related Art

911 is a phone number widely recognized as an emergency phone number that is used by emergency dispatch personnel, among other things, to determine a location of a caller. Enhanced 911 (E911) is defined by the transmission of callback number and location information to the relevant public safety answering point (PSAP). A PSAP is the endpoint of an emergency services call. PSAPs are responsible for answering emergency services calls. E911 may be implemented for landline and/or mobile devices. Some Public Safety Access Points (PSAPs) are not enhanced, and thus do not receive the callback or location information from any phone, landline or mobile.

Many cars built today include a telematics system. The word "telematics", in its broadest sense, relates to the combination of computers and wireless telecommunications technologies. More recently, the term "telematics" has evolved to refer to automobile systems that combine global positioning satellite (GPS) tracking and other wireless communications for automatic roadside assistance and remote diagnostics. General Motors Corp. first popularized automotive telematics with its OnStar™ system. Mercedes-Benz offers a similar system called TeleAid™. The use of the word "telematics" throughout the current specification is intended to refer to the later definition of more recent recognition, i.e., to mean automotive telematics.

Many new vehicles are equipped with wireless-based telematics units providing services controlled by voice commands. One successful telematics system is available from OnStar Corp. (www.onstar.com). According to OnStar, OnStar brings together emergency service providers, wireless telephone, and satellite technologies to help protect a driver, and keep them connected on the road.

As part of the telematics system, a telematics unit including a cellular circuit is located within the vehicle, and powered by the vehicle's battery. Telematics units were originally analog-only, but have migrated to analog/digital-ready, and finally to dual-mode analog/digital. Dual-mode analog/digital telematics units operate on both the analog and digital wireless networks.

With a suitable subscription to use of a telematics operations center such as OnStar, a driver or passenger in a vehicle including a telematics unit has access to a voice-activated calling feature in their vehicle, just in case their hand-held cell phone is lost, forgotten or has a low battery. They can pre-purchase OnStar Hands-Free Calling minutes to use on the road. Such packages are typically billed to a credit card they keep on file with OnStar. They can order minutes packages by pushing the phone or white-dot button at any time.

Conventional telematics units are also capable of providing location information to a requesting wireless network, using

a Global Positioning Satellite (GPS) mounted in the vehicle, or using other location technology within the wireless network. When a vehicle occupant pushes a given button in the vehicle, essentially calling the telematics operations center, the telematics operations center identifies the vehicle's location. Moreover, if their air bag deploys, the location of the vehicle can be reported to the telematics operations center. So it's only when the button is pushed to contact the telematics operations center, or when the telematics operations center is responding to an emergency signal, that the telematics operations center is provided with a location of the vehicle.

Today, most telematics companies and more generally alarm companies monitor signals from customers' car, home or business. The monitoring is usually centralized in a single location for customer locations across the country (e.g., a station in Columbus, Ohio might monitor homes throughout the country for a given monitoring company. In more global companies, an alarm or other monitoring company might monitor alarm signals from homes in the United States from a centralized command center located in Bombay, India.

Thus, in today's global economy, when a customer places an emergency call such as a 911 call (or automated alarm system emergency call), the call may be routed very far away, and in some instances half-way across the world. The telematics operator must then transfer the 911 call to the relevant 911 center (public safety access point (PSAP)). However, this transfer must take place over the Public Switched Telephone Network (PSTN) because such transfer, cannot conventionally be gained to the PSAP's existing Enhanced 911 (E911) dedicated network where location and callback number of the originating 911 caller are provided. Moreover, note that even the call related information (e.g., CallerID) provided with the call would relate to the identity and location of the centralized telematics center—not to the callback number and certainly not the location of the customer originally dialing 911.

FIG. 3 shows conventional relevant systems in an emergency 911 call made via a telematics call center.

In particular, as shown in FIG. 3, a telematics unit **101** within a car dials 911. The 911 call is serviced by a cell site of a service provider, which includes a given mobile servicing center (MSC) **102**. The MSC **102** passes the 911 call on to its relevant telematics call center **104**. The telematics call center **104** may be, e.g., an ONSTAR™ call center.

The operator at the telematics call center **104** that handles the 911 call of its own subscriber obtains the identity and location information of the 911 caller. Based on the current location of the 911 caller, the operator performs a query of a telematics PSAP database **106** to determine a unique 10-digit phone number of the proper local PSAP physically responsible for the location of the 911 caller.

The operator at the telematics call center **104** then forwards the 911 caller to the PSAP by dialing its 10-digit phone number via the public switched telephone network (PSTN) **110**.

Unfortunately, calls that arrive at the PSAP in this manner do not include call-back number (Automatic Number Identification (ANI)) and location information (Automatic Location Identification (ALI)). Moreover, the PSTN telephone **302** at the PSAP **118** is typically not answered with the same priority as are calls that originate on its E911 network. In addition, these calls are typically not recorded or time-stamped by PSAP equipment as are calls that arrive via the E911 network.

Trials have been conducted in which a local exchange carrier (LEC) has permitted access to a selective router for the E911 network via the PSTN. In this trial, the LEC designated a specific 10-digit telephone number. A caller has their emer-

gency call transferred to this 10-digit telephone number, which is then call-forwarded within the central office to the selective router, which then forwards the call to the correct PSAP based upon the digits dialed. However, this solution suffers the same significant drawbacks as that shown in FIG. 3, i.e., that callback number and location are not provided to the responsible PSAP.

Other conventional technology relies on the PSAP having separate, second set of phone equipment capable of receiving proprietary data from the telematics center **104**. But this solution would be prohibitively costly to implement nationwide for each telematics center, not to mention take up valuable space inside a PSAP center. Thus, the costs and disruption caused by the need for new hardware has little congestion control, making this a rather undesirable solution.

There is the need for a simple and effective solution to providing easy and full access to the Enhanced 911 network of an emergency services provider (e.g., PSAP) from users of a centralized call center, e.g., telematics call center, alarm call center, etc.

#### SUMMARY OF THE INVENTION

An emergency call (e.g., a 911 call, an alarm company call) forwarded by a telematics or other call center is routed over the switched PSTN to a Voice Over Internet Protocol (VoIP) call server, where the switched call is converted to a session initiating protocol (SIP) packetized IP call for presentation to an emergency services gateway (ESGW), which converts the call back to TDM and routes the call to a local selective router, thus gaining full access to the Enhanced 911 network. This provides a PSAP receiving a call from a telematics call center or other call center with all features available in an Enhanced 911 network, e.g., callback number of the 911 call center, and location of the 911 call center. Identification of the call center and the call-back number of the call center is provided using existing ALI circuits between a VoIP positioning center (VPC) and the PSAP's ALI database. The call center operator may update the VPC database with the caller's actual location and phone number, which can in turn be transmitted to the PSAP via existing ALI links.

In accordance with the principles of the present invention, a method of providing a call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) comprises determining a unique PSAP having jurisdictional responsibility for a physical current location of a caller to the call center. The caller is forwarded via a switched telephone network to a VoIP call server. The switched telephone call is converted into a session initiating protocol (SIP) packetized phone call. A VoIP positioning center is queried from the VoIP call server for call routing instructions for the SIP packetized phone call. The SIP packetized phone call is forwarded based on the call routing instructions to an emergency services gateway (ESGW) for conversion back to TDM and subsequent routing to the correct selective router.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows an exemplary E911 architecture including E911 network access provided to a telematics call center or other call center, in accordance with the principles of the present invention.

FIG. 2 shows an exemplary call flow tracing an emergency 911 call from a telematics subscriber source to the appropriate PSAP, in accordance with the principles of the present invention.

FIG. 3 shows conventional relevant systems in an emergency 911 call made via a telematics call center.

#### DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

In accordance with the principles of the present invention, an emergency call (e.g., 911 call, alarm company call) forwarded by a telematics call center is routed over the switched PSTN to a Voice Over Internet Protocol (VoIP) call server, where the switched call is converted to a packetized IP call for presentation to an emergency services gateway, gaining access to the Enhanced 911 network. Location of the caller is provided using a VoIP positioning center (VPC).

Voice Over IP (VoIP) is a technology that has been developed as an alternative telephony technology to the conventional telephony service (e.g. PSTN). VoIP takes advantage of high speed Internet data networks, and is able to provide low cost telephony services to end users. VoIP technology emulates a phone call, but instead of using a circuit based system such as the telephone network, utilizes packetized data transmission techniques most notably implemented in the Internet.

Voice-Over-Internet Protocol (VoIP) emulates a phone call, but instead of using a circuit based system such as the telephone network, utilizes packetized data transmission techniques most notably implemented in the Internet.

VoIP phone calls are routed to a VoIP voice gateway, from which they are passed on to their destination VoIP device. Conventional VoIP voice gateways (i.e., soft switches) are typically located in only a few places across the country. A soft switch is a programmable network switch that can process the signaling for all types of packet protocols. Also known as a 'media gateway controller,' 'call agent,' or 'call server,' such devices are used by carriers that support converged communications services by integrating SS7 telephone signaling with packet networks. Softswitches can support, e.g., IP, DSL, ATM and frame relay.

Because VoIP is Internet Protocol (IP) based, call related information such as CallerID type services may not be available or accurate. A location of a given VoIP device may be provisioned to be at a given geographic location, or queried from a home location register (HLR) in a mobile system.

FIG. 1 shows an exemplary E911 architecture including E911 network access provided to a telematics call center or other call center, in accordance with the principles of the present invention.

The present invention applies VoIP technology in lieu of the switched telephone connectivity of the PSTN to route calls to a media gateway/VoIP call server **112**. The switched call is converted into a packetized call using Internet Protocol (IP), and is routed via the internet to the ESGW **114** closest to the appropriate selective router for the destination PSAP. The ESGW converts the packetized IP data back into traditional TDM, and routes the call to the intended selective router **116** via dedicated TDM trunks, where it enters the E911 network. A selective router is the node in an emergency services network that performs enhanced call routing for 911 calls.

An example will be used to further illustrate the inventive architecture. In this example, a telematics unit **101** within a car dials 911. The 911 call is serviced by a cell site of a service provider, which includes a given mobile servicing center (MSC) **102**. The MSC **102** forwards the 911 call on to its relevant telematics call center **104** via the PSTN. The telematics call center **104** may be, e.g., an ONSTAR™ call center, and may be located anywhere in the country or anywhere in the world.

The operator at the telematics call center **104** that handles the 911 call of its own subscriber obtains the nature of the call, as well as the identity and location of the 911 caller. The identity and location of the 911 call from the subscriber is most often received by the call center **104** over the open phone line to their subscriber. Equipment to receive the exact location of the subscriber is expensive, but necessary only at the centralized telematics call center. The thousands of PSAPs in the country do not have the same equipment, as it would be prohibitively expensive.

Based on the current location of the 911 caller, the operator performs a query of a telematics PSAP database **106** to determine a local PSAP physically responsible for that location, as well as a unique 10-digit phone number to access the Enhanced 911 network of that PSAP.

The operator at the telematics call center **104** handling the 911 call forwards the emergency call to a given media gateway/VoIP call server **112** by dialing the designated 10-digit number for that PSAP.

To determine the appropriate PSAP and ESGW, the VoIP call server **112** queries a VoIP positioning center (VPC) **130**. The VPC includes SIP connectivity to the VoIP call server **112**. The VoIP call server **112** may also process VoIP calls. Using the 10-digit phone number dialed by the call center operator **104**, the VPC queries the database **134** to determine the corresponding PSAP. The VPC then assigns an Emergency Services Query Key (ESQK) to the call and relays this routing key back to the VoIP Call Server **112**.

The VoIP call server **112** passes the 911 emergency call on to an emergency service gateway ESGW **114**, which in turn passes the 911 emergency call on to the desired PSAP **118**. An ESGW resides in a VoIP service provider's network, and is responsible for integrating the session initiating protocol (SIP) network with the emergency services network (TDM). An ESGW **114** network includes dedicated voice trunks to selective routers in the Enhanced 911 (E911) network for any/all PSAPs being served (ideally a national network). The ESGW **114** routes 911 calls to the appropriate selective router, based on the ESRN/ESQK it receives.

The selective router **116** is provisioned with emergency services query keys (ESQKs) with ALI steering. (The ESQK is a digit string that uniquely identifies an ongoing emergency services call and is used to correlate the emergency services call with the associated data messages. It may also identify an emergency services zone and may be used to route the call through the network. The ESQK is similar to an ESRK in wireless E911 networks.)

A subscriber location database (SLDB) **134** is also provisioned. Preferably the SLDB **134** is configured so that no modifications are required to the core conventional existing VoIP E9-1-1 network. The SLDB **134** is used to relate a Session Initiated Protocol (SIP) Universal Resource Identifier (URI) or a telephone number to a PSAP.

In the given embodiments the SLDB **134** includes a listing of a series of "subscribers", in which each subscriber is really a specific PSAP with a designated 1-900-xxx-yyyy phone number. Note that the phone number does not need to be a 1-900 number as this is used as an example only. This is also a useful technique for billing the call center for this service.

In the disclosed embodiments, the address of this "subscriber" is the latitude/longitude (lat/lon) of a centroid of the jurisdiction of the relevant PSAP. Alternatively, in databases that use tables in lieu of GIS for routing determination, the address of the "subscriber" can be any valid address within the jurisdiction of the PSAP.

FIG. 2 shows an exemplary call flow tracing an emergency 911 call from a telematics subscriber source to the appropriate PSAP, in accordance with the principles of the present invention.

In particular, as shown in FIG. 2, a caller or automated calling device **101** contacts a local security monitoring company or roadside assistance operator or similar third party call center **104**. As an example shown in step 1, a caller **101** dials 911, which is serviced through a wireless MSC **102** and passed on to the relevant telematics call center, e.g., an OnSTAR™ call center. In the given example, the wireless MSC **102** may be part of a wireless carrier's network, with the 911 call being forwarded to the relevant telematics call center **104**. Alternatively, the MSC **102** may be part of a large wireless network used by the telematics company itself.

The 911 call may be placed using an SOS or similar single-press button located in a car for use in emergency situations, automatically in the event of an accident, etc. Alternatively, the phone user may simply dial 911 in a manual cell phone call from a mobile phone, either integrated into a vehicle or entirely separate from a vehicle.

In step 2, a wireless MSC **102** routes the incoming emergency call to a telematics call center **104** (e.g., an ONSTAR™ or TeleAid™ call center). In the given example this routing includes use of the PSTN **110**, though this need not be the case in all applications.

The call taker at the call center **104** who receives the 911 call from the caller **101** determines that this is an emergency call that must be referred to the local 911 PSAP.

Thus, in step 3, the telematics call taker queries an existing telematics PSAP database **106** to determine the correct PSAP to which the call should be routed. Of course, to save time step 3 may be performed simultaneous with, or even prior to, the call taker's determination that the call from the mobile user **101** is an emergency call.

In step 4, a telematics dispatcher dials (could be the same person and/or equipment as the call taker) a NPA-xxx-yyyy number designated for the determined PSAP. For instance, the call taker at the call center **104** then dials 1-900-xxx-yyyy, a designated number for that PSAP **118**, and prepares to conduct a conference call with the caller **101** and the PSAP **118**.

The call is then routed, via the PSTN **110**, to a designated VoIP call server **112**. The VoIP call server **112** may be co-located with a media gateway, which serves to convert TDM to IP. The VoIP call server **112** routes the resulting IP calls much like a traditional telephone switch routes a TDM call.

The VoIP call server **112** receives the ANI (caller ID) of the call center. The VoIP media gateway **112** reformats the call from time division multiplex (TDM) or code division multiplexed (CDM) into session initiation protocol (SIP). The VoIP Call Server rearranges the dialed digits, putting the DID that was dialed in step iii (e.g., 1-900-xxx-yyyy) in the FROM field and putting the ANI of the call center into the Just-in-Time callback number (JIT CBN) field within the P-Asserted Identity in the SIP Invite. (Session initiated protocol (SIP) is an IP-based protocol defined in IETF RFCs 3261 and 2543, the entirety of which are expressly incorporated herein by reference. SIP is one of two dominant messaging protocols used by the VoIP industry.)

Importantly, the VoIP Media Gateway/call server **112** converts the TDM or CDM protocol of the incoming switched network phone call to packet data using session initiation protocol (SIP), and vice versa, meaning that packetized VoIP information coming from a relevant PSAP is converted into a switched connection with the 911 caller, terminated at the VoIP call server **112**.

In step 5, the VoIP call server **112** holds the call while querying the VPC **130**. The Invite is received by the VPC **130** for call routing instructions.

The VPC **130** is an application that determines the appropriate PSAP, based on the location of the 911 caller **101**, returns associated routing instructions to the VoIP network, and provides the call center's identity and the callback number to the PSAP through the automatic location identifier (ALI). (An ALI is a database that relates a specific telephone number to an address. This database accepts a PSAP query with a telephone number and responds with an address. In the case of an ESQK, the ALI database steers (redirects) the query to the appropriate VoIP positioning center and steers the response back to the querying PSAP).

A SIP Invite command may be used for the query from the Call Server **112** to the VPC **130**. The disclosed SIP Invite command preferably includes the following parameters:

- a) The "from" field  
=the dialed digits from the call center (NPA-xxx-yyyy)
- b) The "to" field  
=911
- c) The JIT CBN field  
=callback number of the call center

In step 6, the VoIP positioning center **132** queries an ERDB (SLDB) **134** for call routing instructions based upon the dialed NPA-xxx-yyyy number. The ERDB **134** relates the dialed number to the address of that phone number (lat/lon of the PSAP jurisdictional centroid) and determines the appropriate PSAP to receive the call. Within the ERDB **134**, each phone number corresponds to a different PSAP.

In step 7, the ERDB **134** responds to the VPC **130** with the identity of the appropriate PSAP to serve the caller **101**. The VPC **130** assigns an ESQK and emergency services routing number (ESRN) to the call and stages an ALI record. The ESRN is a 10-digit number that specifies the selective router to be used to route a call. The ALI record contains the phone number of the call center **104**, based upon the ANI that accompanied the call. If the call center **104** is capable of sending the ANI of the actual end user, then this can be staged in the VPC ALI record.

Further call processing is otherwise per the conventional NENA i2 VoIP standard:

For instance, in step 8, the VoIP positioning center **130** assigns an emergency services query key (ESQK) appropriate to that PSAP, and stages a record with the call center CBN and call center company ID.

The VoIP positioning center **130** responds to the VoIP call server **112** with the ESQK, emergency services routing number (ESRN), and last routing option (LRO). (The LRO is routing information sent by the VPC **130** that provides a "last chance" destination for a call, for example the contingency routing number (CRN) or a routing number associated with a national call center.

In step 9, the VoIP call server **112** uses the ESRN to route the call to the correct emergency services gateway (ESGW) **114**.

The VoIP call server **112** uses the received ESRN to determine the appropriate ESGW **114** and routes the call appropriately to the correct emergency services gateway (ESGW) **114**. The ESGW **114** uses the ESRN to determine the appropriate selective router **116**. For simplicity and clarity of description, only one ESGW **114** and one selective router **116** are pictured in FIG. 2.

In step 10, the ESGW **114** performs media conversion by converting the SIP protocol (and vice versa in the opposite communication direction), and uses the ESRN to route the call to the correct selective router **116**, along with the ESQK.

In step 11, the selective router **116** routes the ESQK to the PSAP **118**.

In step 12, the PSAP **118** queries the automatic location identifier (ALI) database **120** using the ESQK.

In step 13, the ALI database **120** steers the query to the VoIP positioning center (VPC) **130**, per previously provisioned steering tables. The VPC **130** responds with a staged record that includes the callback number (CBN) and call center company ID. In the preferred embodiments, no latitude/longitude (lat/lon) is sent in the ALI record, although such data could be forwarded if it is available.

In step 14, the ALI database **120** forwards the callback number (CBN) and call center ID to the requesting PSAP **118**.

In accordance with the present invention, benefits are derived by routing 911 calls via the Enhanced E911 network. Moreover, PSAPs can utilize all available technologies available to them in an Enhanced E911 network such as CAD, selective transfer, etc. when responding to a call from a telematics or other call center.

The present invention makes possible the transfer of mis-routed or defaulted VoIP calls from a VoIP default call center to the appropriate PSAP via the Enhanced E911 network. In conventional systems defaulted calls must be routed via the PSTN.

This invention saves taxpayers money by allowing PSAPs to discontinue designated PSTN lines. This invention also increases the speed with which emergency services (responders) can be dispatched and provides recorded documentation of conversations that are typically available on calls received via the E911 network, but not via the PSTN.

The present invention has particular relevance for use by any alarm monitoring company, telematics call center, or emergency call center that monitors incoming calls. The invention has significant benefit in the use by automotive roadside assistance call centers like OnStar™, TeleAid, etc.

While the invention has been described with reference to the exemplary embodiments thereof, those skilled in the art will be able to make various modifications to the described embodiments of the invention without departing from the true spirit and scope of the invention.

What is claimed is:

1. A method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP), comprising:

receiving a switched phone call from a telematics call center, via a switched telephone network, at a VoIP call server;

converting, at said VoIP call server, said switched telephone call into an Internet Protocol (IP) based packetized phone call;

querying a VoIP positioning center for call routing information to route said SIP packetized phone call to a particular PSAP, said VoIP positioning center query comprising a telematics call center telephone number;

receiving said call routing information from said VoIP positioning center; and

establishing, via said VoIP call server, a conference call with said IP based packetized phone call, said telematics call center, and said particular PSAP based on said call routing information.

2. The method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 1, further comprising:

forwarding a Time Division Multiplexed (TDM) phone call via a dedicated trunk line to a selective router serving said particular PSAP.

9

3. The method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 1, wherein:

said an Internet Protocol (IP) based packetized phone call is a session initiating protocol (SIP) packetized phone call.

4. The method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 1, wherein:

said telematics call center is one of ONSTAR™, ATX, Cross Country, or ADT.

5. The method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 1, wherein:

said telematics call center is an alarm monitoring center.

6. The method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 1, wherein:

said switched telephone call is received at said VoIP call server via a public switched telephone network (PSTN).

7. The method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 1, further comprising:

determining a unique PSAP having jurisdictional responsibility for a physical current location of a caller to said telematics call center.

8. The method of providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 1, further comprising:

receiving from said VoIP positioning center said call routing information for said SIP packetized phone call.

9. System for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP), comprising:

a receiver, at a VoIP call server, to receive a switched phone call, via a switched telephone network, from said telematics call center;

a converter, at said VoIP call server, to convert said switched telephone call into an Internet Protocol (IP) based packetized phone call; and

a database querying module to query a VoIP positioning center for call routing information to route said SIP packetized phone call to a particular PSAP, said query comprising a telematics call center telephone number; and

10

a routing information receiver to receive said call routing information from said VoIP positioning center; wherein a conference call is established with said IP based packetized phone call, said telematics call center, and said particular PSAP based on said call routing information.

10. The system for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 9, further comprising:

means for forwarding a Time Division Multiplexed (TDM) phone call to a selective router serving said particular PSAP.

11. The system for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 9, wherein:

said an Internet Protocol (IP) based packetized phone call is a session initiating protocol (SIP) packetized phone call.

12. The system for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 9, wherein:

said telematics call center is an ONSTAR™ call center.

13. The system for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 9, wherein:

said telematics call center is an alarm monitoring center.

14. The system for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 9, wherein:

said means for forwarding said caller via a switched telephone network forwards via a public switched telephone network (PSTN).

15. The system for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 9, further comprising:

an emergency services gateway to determine a unique PSAP having jurisdictional responsibility for a physical current location of said phone call to said telematics call center.

16. The system for providing a telematics call center with access to an Enhanced 911 network supporting a public safety answering point (PSAP) according to claim 9, wherein:

said VoIP call server forwards said SIP packetized phone call based on said call routing information to an emergency services gateway.

\* \* \* \* \*