



- (51) **International Patent Classification:**
H01H 3/00 (2006.01) *H01H 3/26* (2006.01)
- (21) **International Application Number:**
PCT/US2016/066964
- (22) **International Filing Date:**
15 December 2016 (15.12.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
14/988,642 5 January 2016 (05.01.2016) US
- (71) **Applicant:** ECOLINK INTELLIGENT TECHNOLOGY, INC. [US/US]; 2055 Corte Del Nopal, Carlsbad, California 92011 (US).
- (72) **Inventors:** BAILEY, Michael; 2055 Corte Del Nopal, Carlsbad, California 92011 (US). WANG, Eric; No. 56, Kaian 3rd St., Tainan City (TW). HUANG, Jerry; No. 56, Kaian 3rd St., Tainan City (TW).
- (74) **Agents:** JAROSIK, Gary R. et al.; Greenberg Traurig, LLP, 77 W. Wacker Drive, Suite 3100, Chicago, Illinois 60601-1732 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** REMOTE CONTROLLED SWITCH COVER

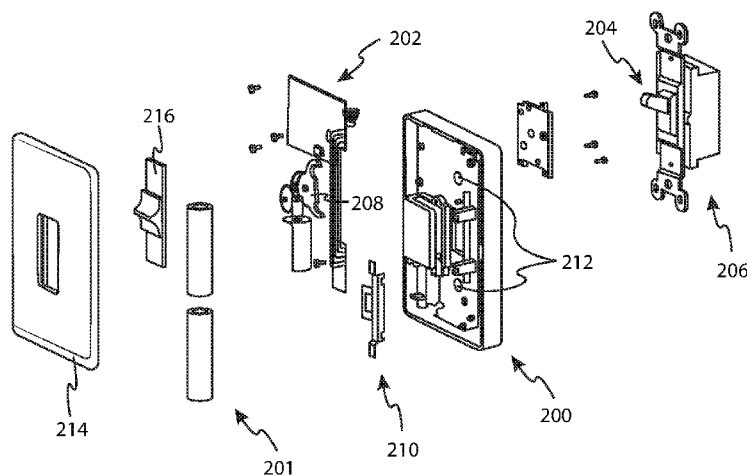


FIG. 2

(57) **Abstract:** A light switch cover for converting a standard toggle switch into a remote-controlled toggle switch comprising a switch toggle member for acting upon a toggle light switch member to place the toggle light switch member into either an on position or an off position, a gear train, an electric motor, coupled to the gear train, for driving the gear train in a first direction to cause the switch toggle member to place the toggle light switch member into the on position, and for driving the gear train in a second direction to cause the switch toggle member to place the toggle light switch member into the off position, motor driving circuitry coupled to the electric motor, a receiver for receiving signals that cause actuation of the standard toggle switch, and processing circuitry coupled to the receiver and the motor driving circuitry.



REMOTE CONTROLLED SWITCH COVER

BACKGROUND

I. CROSS-REFERENCE TO RELATED APPLICATIONS

[001] The present application is a continuation-in-part of U.S. patent application No. 14/825,117 filed on August 12, 2015, which claims the benefit of U.S. Provisional Application No. 62/036,581, filed on August 12, 2014, the entirety of both which are incorporated by reference herein.

II. Field of Use

[002] The present application relates generally to the home automation and control arts. More specifically, embodiments of the present invention relate to remote control of electrical devices.

III. Description of the Related Art

[003] Home automation and control has been gaining popularity in recent years, allowing homeowners to remotely monitor and control various devices in their home. For example, the Nest thermostat has revolutionized the home thermostat market by intelligently learning the usage habits of home occupants, while also allowing remote control of the thermostat via the Internet. Wi-Fi enabled light bulbs are becoming increasingly common, allowing remote control of lights. A variety of other remote control devices are available, including devices that open/close garage doors, turn on/off pool/spa equipment, turn on/off sprinkler systems, etc.

[004] The popularity of being able to control lighting is of particular interest to many consumers. However, it is generally necessary to purchase expensive equipment to enable such a feature, such as expensive Wi-Fi capable light bulbs, or Wi-Fi enabled light switches. Such Wi-Fi enabled light switches typically require replacement of the entire light switch, which potentially requires access to household AC voltages. Understandably, many homeowners are incapable or unwilling to perform such re-wiring.

[005] It would be desirable, therefore, to enable homeowners to retrofit their existing electrical switches in order to add remote control capabilities to turn lights and other electrical devices on and off without having to purchase expensive lighting equipment or having to replace entire light switches.

SUMMARY

[006] The embodiments described herein relate to apparatus, systems, and methods for converting a standard toggle switch into a remote controlled toggle switch using an inventive switch cover. In one embodiment, the switch cover comprises a switch toggle member for acting upon a toggle light switch member to place the toggle light switch member into either an on position or an off position, a gear train coupled to the switch toggle member that causes the switch toggle member to act upon the toggle light switch member, an electric motor, coupled to the gear train, for driving the gear train in a first direction to cause the switch toggle member to place the toggle light switch member into the on position, and for driving the gear train in a second direction to cause the switch toggle member to place the toggle light switch member into the off position, motor driving circuitry coupled to the electric motor, a receiver for receiving signals that cause actuation of the standard toggle switch, and processing circuitry coupled to the receiver and the motor driving circuitry that causes the light switch cover to receive a signal to turn the toggle switch into the on position and, in response, causing the electric motor to rotate in a direction to cause the switch toggle member to place the toggle light switch member into the on position..

BRIEF DESCRIPTION OF THE DRAWINGS

[007] The features, advantages, and objects of the present invention will become more apparent from the detailed description as set forth below, when taken in conjunction with the drawings in which like referenced characters identify correspondingly throughout, and wherein:

[008] FIG. 1 is a perspective view of one embodiment of a remote controlled switch cover assembly, for use with a standard toggle switch;

[009] FIG. 2 shows an exploded view of one embodiment of the remote controlled switch cover assembly of Fig. 1;

[0010] FIG. 3 illustrates a side, cutaway view of one embodiment of remote light switch cover assembly, installed over an existing, standard toggle switch assembly;

[0011] FIG. 4 is a top, plan view of one embodiment of remote controlled switch cover assembly;

- [0012] FIG. 5a is a perspective view of the remote controlled switch cover assembly shown in FIGs. 1-4, showing a switch toggle member in a neutral position;
- [0013] FIG. 5b is a top, plan view of the remote controlled switch cover assembly shown in FIG. 5a, showing the switch toggle member rotated counter-clockwise from the neutral position;
- [0014] FIG. 5c is a top, plan view of the remote controlled switch cover assembly shown in FIG. 5a, showing the switch toggle member rotated clockwise from the neutral position;
- [0015] Fig. 6 illustrates a functional block diagram of one embodiment of a remote controlled switch cover assembly in accordance with the teachings herein;
- [0016] FIG. 7 is a perspective view of the remote controlled switch cover assembly as shown in FIGs. 1-6, with the toggle light switch member in an “on” position, with switch the switch toggle member in the neutral position; and
- [0017] FIG. 8 is a flow diagram of one embodiment of a method for remote control of a standard toggle switch performed by the remote controlled switch cover assembly shown in FIGs. 1-8, in accordance with the teachings herein.

DETAILED DESCRIPTION

- [0018] Embodiments of the present invention allow a conventional electrical switch to be converted into a remote-controlled switch simply and economically. In one embodiment, a conventional toggle switch is converted into a remote-controlled switch by simply replacing its switch cover with a switch cover in accordance with the teachings herein.
- [0019] A remote controlled switch cover assembly may be used to convert a standard, existing toggle switch to one that can be controlled remotely, for example wirelessly using a keyfob or by using a smartphone, tablet, or other personal electronic device through via a local gateway device, or via the Internet and a local gateway device, in instances where the controller is located remotely from the toggle switch. In some embodiments, a remote controlled switch may be controlled via a local security panel or home automation gateway, either alone or in conjunction with the aforementioned wireless devices. In one embodiment, the remote controlled switch cover assembly is used in conjunction with a standard toggle switch used to apply and remove household AC voltages to electrical devices such as lights or other common household appliances or devices.
- [0020] Fig. 1 is a perspective view of one embodiment of a remote controlled switch cover assembly 100, for use with a standard toggle switch commonly found in homes and

businesses to apply and remove power to lights or other common appliances or devices. Remote controlled switch cover assembly **100** in one embodiment is approximately 20 millimeters thick, 76 millimeters wide, and **114** millimeters long, as shown. It is designed to be placed over an existing toggle switch after its switch cover has been removed. This allows an easy retrofit to convert an existing toggle switch into a remote-controlled toggle switch, while still allowing the existing toggle switch to be operated manually.

[0021] Fig. **2** shows an exploded view of one embodiment of remote controlled switch cover assembly **100**. It comprises a main body **200** that holds one or more batteries **201** (in this case 2 AA batteries) for providing power to electronics **202** located on or within main body **200**, such as such as a receiver for receiving wireless signals to operate remote controlled light switch assembly **100**, i.e., commands to move a toggle light switch member **204** of an existing, standard toggle switch assembly **206** from “on” to “off” or vice versa, a switch toggle member **208** for manipulation of toggle light switch member **204**, and a switch position member **210** for providing an indication of the position of toggle light switch member **204**, e.g., “on” or “off”, “up” or “down”, “1” or “0”, etc. Main body **200** is installed over an existing toggle switch after its switch cover has been removed. The same switch cover used to cover the existing switch may be used to cover the main body, or a custom switch cover **214** may be used to fit the dimensions of the main body. In one embodiment, two holes **212** are formed through a surface of the main body **200** that align with cover mounting threads of standard toggle switch assembly **206**, and two fastening devices, sized and shaped for placement through the two holes, respectively, and for engaging the mounting threads of standard toggle switch assembly **206** to secure remote controlled switch cover assembly **100** to standard toggle switch assembly **206**. Installation of light switch cover assembly **100** is as easy as installing batteries into main body **200**, and replacing the standard toggle switch cover of standard toggle switch assembly **206** with light switch cover assembly **100**. In one embodiment, a toggle cover **216** may be used for placement over toggle light switch member **204** which is available to users of remote light switch cover assembly **100** to manually operate light switch cover assembly **100**.

[0022] Fig. **3** illustrates a side, cutaway view of one embodiment of remote light switch cover assembly **100**, installed over an existing, standard toggle switch assembly **206**. As shown, toggle cover **216** is slidably seated between toggle light switch member **204** and custom switch cover **214**. Two prongs **300** extend downward from toggle cover **216**, spaced far apart enough to allow toggle light switch member **204** to seat between the

prongs **300**. In this arrangement, toggle cover **216** may be positioned up and down within cutout **302** of custom switch cover **214**, causing toggle light switch member **204** to change state as toggle cover **216** is positioned between an “on” or up position and “off” or down position. In other embodiments, toggle cover **216** is not used, and toggle light switch member **204** protrudes through cutout **302**, allowing direct manipulation of toggle light switch member **204** by a user to manually operate standard toggle switch assembly **206**.

[0023] Fig. **4** is a top plan view of one embodiment of remote controlled switch cover assembly **100**. Shown are main body **200**, existing toggle light switch member **204**, electric motor **400**, motor drive gear **401**, gear train **402**, toggle position switch **404**, switch toggle member **208** comprising a first end **406** and a second end **408**, and switch position member **210**, among others. Not all of these components are necessary in some embodiments.

[0024] Main body **200** may be placed directly over standard toggle switch assembly **206** after its existing switch cover has been removed, with toggle light switch member **204** in either an up or down position. In FIG. **4**, toggle light switch member **204** is shown as being in the “up” position, which for discussion purposes, represents the “on” position. Main body **200** is secured to standard toggle switch assembly **206** via two screws **428** that are sized, shaped and spaced to standard-sized threaded cover mounting holes typically found on standard toggle switch assemblies.

[0025] After remote controlled switch cover assembly **100** has been installed over standard toggle switch assembly **206**, second end **408** of switch toggle member **208** is situated just above an upper surface of toggle light switch member **204** when toggle light switch member **204** is in an “on” or “up” position, as shown. Alternatively, remote controlled switch cover assembly **100** could be placed over standard toggle switch assembly **206** when toggle light switch member **204** is in an “off” or “down” position. Referring back to FIG. **4**, switch position member **210** is shown having a longitudinal member **410** with ends **412** and **414** located at opposing ends of longitudinal member **410**, an upper horizontal member **416** and a lower horizontal member **418**. In one embodiment, distal ends of upper horizontal member **416** and lower horizontal member **418** are joined together by vertical member **420**, forming a square frame through which toggle light switch member **204** is placed therethrough.

[0026] In the position shown in FIG. **4**, end **412** is situated away from position switch **404**, causing position switch **404** to be in a first condition, either “open” or “closed”, depending on whether toggle position switch **404** is a normally open switch or a normally closed

switch. Toggle position switch **404** changes state as end **412** comes into contact with toggle position switch **404** when toggle light switch member **204** is placed into the “off” position. Toggle position switch **404**, thus, is used to determine the position of toggle light switch member **204** to be in an off position. In another embodiment, a second toggle position switch (not shown) may be located under end **414** when toggle light switch member **204** is in the “on” position. In this embodiment, one or both toggle position switches may be used to determine the position of toggle light switch member **204**. If only one position switch is used, it may be inferred that standard toggle switch assembly **206** is in an on or off condition when the one position switch is activated and in an opposite condition when the one position switch is deactivated. In one embodiment, signals from one or both switches are used by processing circuitry **202** to determine when toggle light switch member **204** has been placed into one position or the other, in order to stop rotation of motor **400**, as will be explained later herein.

[0027] One of the benefits of remote controlled switch cover assembly **100** is the ability to allow manual manipulation of toggle light switch member **204** by a user without damaging various components of remote controlled switch cover assembly **100**, such as gear train **402**, motor **400** or switch toggle member **208**. As shown in Fig. 4, switch toggle member **208** resides in a “neutral position” after moving toggle light switch member **204** to an “on” or “off” position remotely. This position allows a user to manually turn toggle light switch member **204** to an opposite position without interference from moving switch toggle member **208**. Referring to FIG. 4, when a user manually turns toggle light switch member **204** off, toggle light switch member **204** does not move switch toggle member **208** due to the distance between first end **406** and second end **408** being spaced far apart enough to allow unfettered travel of toggle light switch member **204**. The neutral position refers to a position of switch toggle member **208** approximately midway to toggle light switch member **204**, approximated by a position of lower horizontal member **418**. In other words, the neutral position refers to a position of switch toggle member **208** that allows toggle light switch member **204** to be manually positioned without moving switch toggle member **208**.

[0028] When remote controlled switch cover assembly **100** is operated remotely (e.g., by receiving a wired or wireless signal from a remote device), switch toggle member **208** is moved by gear train **402** as it is turned by motor drive gear **401** of motor **400**. When remotely turning toggle light switch member **204** off, motor **400** is energized to turn gear train **402** in one direction, causing switch toggle member **208** to rotate in a clockwise

direction, causing second end **408** to push down against the top surface of toggle light switch member **204** until either switch toggle member **208** is moved a predetermined distance to cause toggle light switch member **204** to change to the off position or until toggle position switch **404** changes state when end **412** contacts toggle position switch **404** when toggle light switch member **204** has moved to the off position. In other embodiments, switch toggle member **208** may be configured to move linearly up and down to operate on toggle light switch member **204**, rather than rotationally as shown in the embodiment of FIG. 4. Rotation of switch toggle member **208** occurs as a result of teeth **426**, formed onto a concave edge of switch toggle member **208**, meshing with one of the gears of gear train **402**, and turns as gear train **402** is rotated as a result of motor **400** and motor drive gear **401** operating on gear train **402**.

[0029] After switch toggle member **208** has placed toggle light switch member **204** into the off position, motor **400** begins turning the opposite direction, causing switch toggle member **208** to rotate counter-clockwise back to the neutral position, shown in FIG. 5a, with first end **406** resting against or near a lower surface of toggle light switch member **204**.

[0030] Remote operation of remote controlled switch cover assembly **100** occurs when a user wishes to remotely manipulate toggle light switch member **204** to turn lights on or off for example, using a device which sends wireless signals to a receiver located on or within main body **200**, such as a keyfob, smartphone, tablet, home automation gateway, security panel, etc. A receiver as part of electronics **202**, or a separate receiver, receives wireless or wired signals from the device and provides the signals to circuitry that controls motor **400**, and therefore motion of switch toggle member **208**, in order to manipulate toggle light switch member **204** to the “on” or “off” state. For example, when a command is received from a remote device instructing remote controlled switch cover assembly **100** to turn lights on, the receiver receives the wireless signal from the device and provides a downconverted baseband signal to motor control circuitry, such as a processor and/or discrete components such as one or more transistors, capacitors, resistors, etc. and power circuitry capable of rotating motor **400**. The power circuitry then provides a power signal to electric motor **400**, typically a low-power DC motor, which causes electric motor **400** to rotate in a first direction, which in turn causes motor drive gear **401** to turn in a first direction. Motor drive gear **401** is in mechanical communication with gear train **402**, which comprises a gear ratio that effectively reduces the speed of electric motor to a lower speed for use in moving switch toggle member **208**. Gear train **402** is in mechanical

communication with switch toggle member **208** via teeth **426**, which causes switch toggle member **208** rotate in a first direction, causing toggle light switch member **204** to move to either the on or off position. In one embodiment, the motor control circuitry receives a signal from toggle position switch **404** when switch toggle member **208** has moved far enough to cause standard toggle switch assembly **206** to change state. In other embodiments, the number of rotations of motor drive gear are counted or a rotational position of one or more gears of gear train **402** are determined to indicate that standard toggle switch assembly **206** has been placed in a different state. At that point, motor control circuitry causes motor **400** to rotate in a second direction opposite of the first direction, which in turn causes motor drive gear **401** to turn in a second direction opposite of the first direction, causing switch toggle member **208** to rotate back to the neutral position. Electronics **202** determines when switch toggle member **208** is in the neutral position when it receives a signal from position switch **422**, which changes state when second end **408** comes into contact with position switch **422**. In one embodiment, second end **408** comprises an extension **424** which makes contact with position switch **422**. In general, electronics **202** receives a signal from a sensor of some kind when switch toggle member **208** is in the neutral state.

[0031] Determination of when toggle light switch member **204** has been placed into either the “on” or “off” position may be accomplished in a number of different ways. In one embodiment, one or more gear hubs of the gears of gear train **402** could comprise one or more deformities, for example knobs or cams, that may interact with a position switch similar to position switches **422** or **404** as described in US patent application serial number 14/825,117, owned by the applicant of the present disclosure, the entire contents of which are incorporated herein. The deformities are located on the hub(s) at such points to coincide with a desired limit of movement of switch toggle member **208**, either up or down, as well as a point indicative of the neutral position.

[0032] Remote controlled switch cover assembly **100** may additionally comprise means to transmit information to a remote location, such as a home security panel, home automation system, smartphone, tablet, or some other device. The means may form a portion of electronics **202**. The type of information that may be transmitted may comprise the state of toggle light switch member **204** (e.g., “on” or “off”, “up” or “down”), battery status (e.g., warning signal sent when battery is low), supervisory signal to indicate the presence and operational confirmation of remote controlled switch cover assembly **100**, and/or a signal indicative of detected movement, e.g., by a motion sensor (not shown) optionally

integrated into remote controlled switch cover assembly **100**. In this embodiment, the circuitry may provide information for transmission to a transmitter located within main body **200**. In another embodiment, the transceiver is part of a transceiver/receiver combination, such as one of a variety of transceivers widely available in the marketplace today. Further, the circuitry may provide one or more types of information periodically, such as once per hour, or upon receipt of a command from a remote device to provide one or more types of information.

[0033] When used in conjunction with a motion sensor, for example an integrated PIR detector, the remote controlled switch cover assembly may automatically turn lights on or off when people enter or leave a room. When the motion sensor detects movement, indicative of activity in a room, the motion sensor may provide a signal to the circuitry, indicative of such. In response, the circuitry may cause electronic motor **400** to rotate in order to place toggle light switch member **204** into the “on” position. Similarly, if the motion sensor does not detect movement in the room for more than a predetermined time period, such as 10 minutes, the circuitry may cause the electric motor to rotate to turn toggle light switch member **204** to the “off” position.

[0034] In a related embodiment, the remote controlled switch cover assembly may turn toggle light switch member **204** on or off as a result of receiving a signal from a remote device, indicative of when activity is detected in a room. For example, a stand-alone motion sensor could sense motion in a room, and then report that finding to a home security panel. The home security panel might then transmit a command to remote controlled switch cover assembly **100** to turn toggle light switch member **204** to the “on” position. In one embodiment, the stand-alone motion sensor is located in one room (such as a foyer) and remote controlled switch cover assembly **100** is located in another room, such as a living room, so that when the motion sensor detects movement, the home security panel can send a signal to remote controlled switch cover assembly **100** in the living room, so that the living room is lit, for example, when a person enters his/her home.

[0035] In another embodiment, remote controlled switch cover assembly **100** could be used in conjunction with a typical, manually operated light switch, such as in an application where hallway lighting is controlled by two switches, one located at each end of the hallway. This may be referred to by those skilled in the art as a “three-way circuit”. In this embodiment, remote controlled switch cover assembly **100** could transmit a status signal to a remote device such as a home security panel, home automation system, or internet gateway, with a light status of whether the hall light is “on” or “off”. Such a

determination may be made using a current-sensing device, such as a coil, integrated circuit, and/or other circuitry to sense current flowing through toggle light switch member **204** in conjunction with a known position of toggle light switch member **204** detected by toggle position switch **404**. A storage device, such as an electronic memory, flip-flop, or discrete circuitry can be used to store the position of toggle light switch member **204**, e.g., either “up” or “down”. The same storage device, or a different one, may store the light status as well using the current sensor. Thus, at any time, remote controlled switch cover assembly **100** knows which position toggle light switch member **204** is in currently and whether the light is on or off. Then, if a command is received to either turn the light on or off from the device, the circuitry can determine whether switch toggle member **208** must be activated and, if so, what direction to move switch toggle member **208**, depending on whether the command is to turn the light on or off and what position toggle light switch member **204** is currently in. For example, in a three-way application that uses a regular switch and remote controlled switch cover assembly **100**, if toggle light switch member **204** is in an “up” position and the current sensor determines that current is flowing through toggle light switch member **204**, an indication may be stored within the memory(ies), indicating that toggle light switch member **204** is in the “up” position and that the light is on. Thereafter, if the regular light switch is manipulated, turning the light off, the current sensor detects the loss of current, and the circuitry stores the current status of the light, i.e., “off” in the memory. Then, if a command is received by remote controlled switch cover assembly **100** to turn the light on, the circuitry may read the memor(ies) to determine the present light status and know that the light is off, and that toggle light switch member **204** is in the “up” position. Knowing this, circuitry **202** provides a signal to motor **400** to turn the motor drive gear in a way that will turn cause switch toggle member **208** to move in a direction to place toggle light switch member **204** into an opposite position, in this example, in the “down” position.

[0036] FIG. 5b is a top, plan view of remote controlled switch cover assembly **100** showing switch toggle member **208** rotated counter-clockwise from the neutral position where it has just positioned toggle light switch member **204** into the “on” or “up” position. First end **406** is shown resting against a lower surface of toggle light switch member **204**.

[0037] Conversely, FIG. 5c is a top, plan view of the same embodiment of remote controlled switch cover assembly **100** as shown in FIG. 5b, showing switch toggle member **208** rotated clockwise from the neutral position where it has just positioned toggle

light switch member **204** into the “off” or “down” position. Second end **408** is shown resting against an upper surface of toggle light switch member **204**.

[0038] Fig. **6** illustrates a functional block diagram of one embodiment of remote controlled switch cover assembly **100**, shown comprising processing circuitry **200**, memory **602**, transceiver **604**, electric motor **400**, gear train **402**, switch toggle member **208**, current sensor **606**, motion sensor **608**, and motor driving circuitry **610**. It should be understood that in some embodiments, not all of the functional blocks shown in FIG. **6** are necessary for the proper operation of the remote controlled switch cover assembly **100** and that some functionality has been omitted for purposes of clarity.

[0039] The processing circuitry **200** comprises a general-purpose microprocessor, microcontroller or microcomputer, well known in the art and/or a custom or semi-custom ASIC, and/or discrete components able to carry out the functionality required for operation of remote controlled switch cover assembly **100**. Processing circuitry **200** is selected based on power-consumption properties and space considerations, as remote controlled switch cover assembly **100** typically operates on batteries and a small form factor is desirable. In the case of a microprocessor, microcontroller, microcomputer or ASIC, processing circuitry **200** generally executes processor-executable instructions stored in one or more memories **602** that control the functionality of remote controlled switch cover assembly **100**. Examples of memory **602** include one or more electronic memories such as RAM, ROM, flash memory, EEPROMs, UVPROMs, etc. or virtually any other type of electronic, optical, or mechanical memory device, but excludes propagated signals. Memory **602** could alternatively comprise an integrated circuit, such as a flip-flop, or even discrete components, such as one or more transistors, resistors, capacitors, etc.

[0040] Transceiver **604** comprises circuitry necessary to transmit and receive communication signals, including messages, commands, status information, requests, etc., between remote controlled switch cover assembly **100** and one or more remote devices such as wireless phones, mobile computers and tablet computers, wearable devices, etc., either directly or through a local device such as a gateway, security panel, or home automation panel. Such circuitry is well known in the art and may comprise Bluetooth, Wi-Fi, RF, optical, or ultrasonic circuitry, among others.

[0041] Motion sensor **608** comprises any device that is able to detect movement of a person within range of remote controlled switch cover assembly **100**. In one embodiment, a PIR detector is used, although other types of motion sensors may be used in the alternative, keeping the low power requirement of remote controlled switch cover

assembly **100** in mind. In another embodiment, motion sensor **608** comprises a passive infrared sensor. In other embodiments, motion sensor **608** may comprise a light-beam interruption detector, a sonic transducer, a reed switch or a pressure sensitive floor device.

[0042] Current sensor **606** comprises a device to detect the presence of alternating current that is conducted through toggle light switch member **204**. Typically, current sensor **606** comprises a coil, integrated circuit, and/or discrete components to wirelessly determine changes in flux occurring as a result of a change in current through toggle light switch member **204**. Current sensor **606** provides a signal indicative of the current to the processing circuitry **200**.

[0043] The motor driving circuitry **610** is coupled to processing circuitry **200** and provides one or more relatively high power signals to motor **400** that cause motor **400** to rotate in one direction or the other. Such circuitry is well-known in the art.

[0044] FIG. 7 is a perspective view of the embodiment of remote controlled switch cover assembly **100** as shown in FIGs. 1-6. This view shows toggle light switch member **204** in an “on” position, with switch toggle member **208** shown in the neutral position. In this embodiment, position switch **700** provides a signal to processing circuitry **200** when toggle light switch member **204** is in the “on” position, e.g., as end **414** contacts position switch **700** via movement of toggle light switch member **204** to the “on” position by switch toggle member **208**.

[0045] FIG. 8 is a flow diagram of one embodiment of a method for remote control of a standard toggle switch performed by remote controlled switch cover assembly **100** in accordance with the teachings herein. It should be understood that the steps described below could be performed in a different order, or comprise a greater or fewer number of steps in other embodiments, and that some minor method steps have been omitted for clarity.

[0046] At block **800**, transceiver **604** (or a receiver in an embodiment where a transmitter is not used) receives a wired or wireless signal to actuate switch toggle member **208**, to turn lights on or off, for example. The wired or wireless signal may originate from a smart phone, mobile computer, fixed computer, home automation gateway, security system, or some other device known in the art. The signal may comprise a specific instruction to turn a light on or off, or it may comprise an instruction to simply change the state of switch toggle member **208** from its current position to an alternative position.

[0047] At block **802**, in response to receiving the signal at block **900**, processing circuitry **200** activates electric motor **400** that causes gear train **402** to turn in a first direction,

commensurate with moving toggle light switch member **204** to a position indicated by the signal (e.g., “on”, “off” or “toggle”). In practice, processing circuitry **200** provides a signal to motor driving circuitry **610** which in turn provides a power signal to motor **400**. This, in turn, causes gear train **402** to act on switch toggle member **208**, causing switch toggle member **208** to move either up or down.

[0048] At block **804**, processing circuitry **200** detects when switch toggle member **208** has actuated toggle light switch member **204**, i.e., when switch toggle member **208** has been placed in either the “on” or “off” position and/or when switch toggle member **208** has activated or deactivated position switch **404**. This detection is performed in accordance with the teachings previously discussed above, in some embodiments, using position switch **404** and/or **700**.

[0049] At block **806**, in response to detecting when switch toggle member **208** has been placed in either the “on” or “off” position and/or when switch toggle member **208** has activated or deactivated position switch **404**, processing circuitry **200** causes electric motor **400** to rotate in a reverse direction (again, by providing a signal to motor driving circuitry **610**) from the first direction, which causes switch toggle member **208** to reverse direction and move back towards the neutral position.

[0050] At block **808**, processing circuitry **200** detects when switch toggle member **208** is in the neutral position, as previously discussed above. In one embodiment, a signal is provided by position switch **422** as extension **424** contacts position switch **422**.

[0051] At block **810**, in response to detecting when switch toggle member **208** is in the neutral position, processing circuitry **200** causes the electric motor to stop rotating (by sending a signal to motor driving circuitry **610**), causing switch toggle member **208** to cease movement.

[0052] At block **812**, processing circuitry may cause a signal to be transmitted via transceiver **604** to a remote location, such as a security panel, home automation gateway, smart phone, mobile computing device, etc., indicating the position of toggle light switch member **204**, e.g. either “on” or “off”.

[0053] The methods or steps described in connection with the embodiments disclosed herein may be embodied directly in hardware or embodied in machine-readable instructions executed by a processor, or a combination of both. The machine-readable instructions may reside in RAM memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. An exemplary storage medium is coupled

to the processor such that the processor can read information from, and write information to, the storage medium. In the alternative, the storage medium may be integral to the processor. The processor and the storage medium may reside in an ASIC. In the alternative, the processor and the storage medium may reside as discrete components.

[0054] Accordingly, an embodiment of the invention may comprise a non-transitory processor-readable media embodying code or machine-readable instructions to implement the teachings, methods, processes, algorithms, steps and/or functions disclosed herein.

[0055] While the foregoing disclosure shows illustrative embodiments of the invention, it should be noted that various changes and modifications could be made herein without departing from the scope of the invention as defined by the appended claims. The functions, steps and/or actions of the method claims in accordance with the embodiments of the invention described herein need not be performed in any particular order. Furthermore, although elements of the invention may be described or claimed in the singular, the plural is contemplated unless limitation to the singular is explicitly stated.

CLAIMS

We claim:

1. A light switch cover for converting a standard toggle switch into a remote-controlled toggle switch, comprising:
 - a switch toggle member for acting upon a toggle light switch member to place the toggle light switch member into either an on position or an off position;
 - a gear train coupled to the switch toggle member that causes the switch toggle member to act upon the toggle light switch member;
 - an electric motor, coupled to the gear train, for driving the gear train in a first direction to cause the switch toggle member to place the toggle light switch member into the on position, and for driving the gear train in a second direction to cause the switch toggle member to place the toggle light switch member into the off position;
 - motor driving circuitry coupled to the electric motor;
 - a receiver for receiving signals that cause actuation of the standard toggle switch;
 - and
 - processing circuitry coupled to the receiver and the motor driving circuitry that causes the light switch cover to receive a signal to turn the toggle switch into the on position and, in response, causing the electric motor to rotate in a direction to cause the switch toggle member to place the toggle light switch member into the on position.

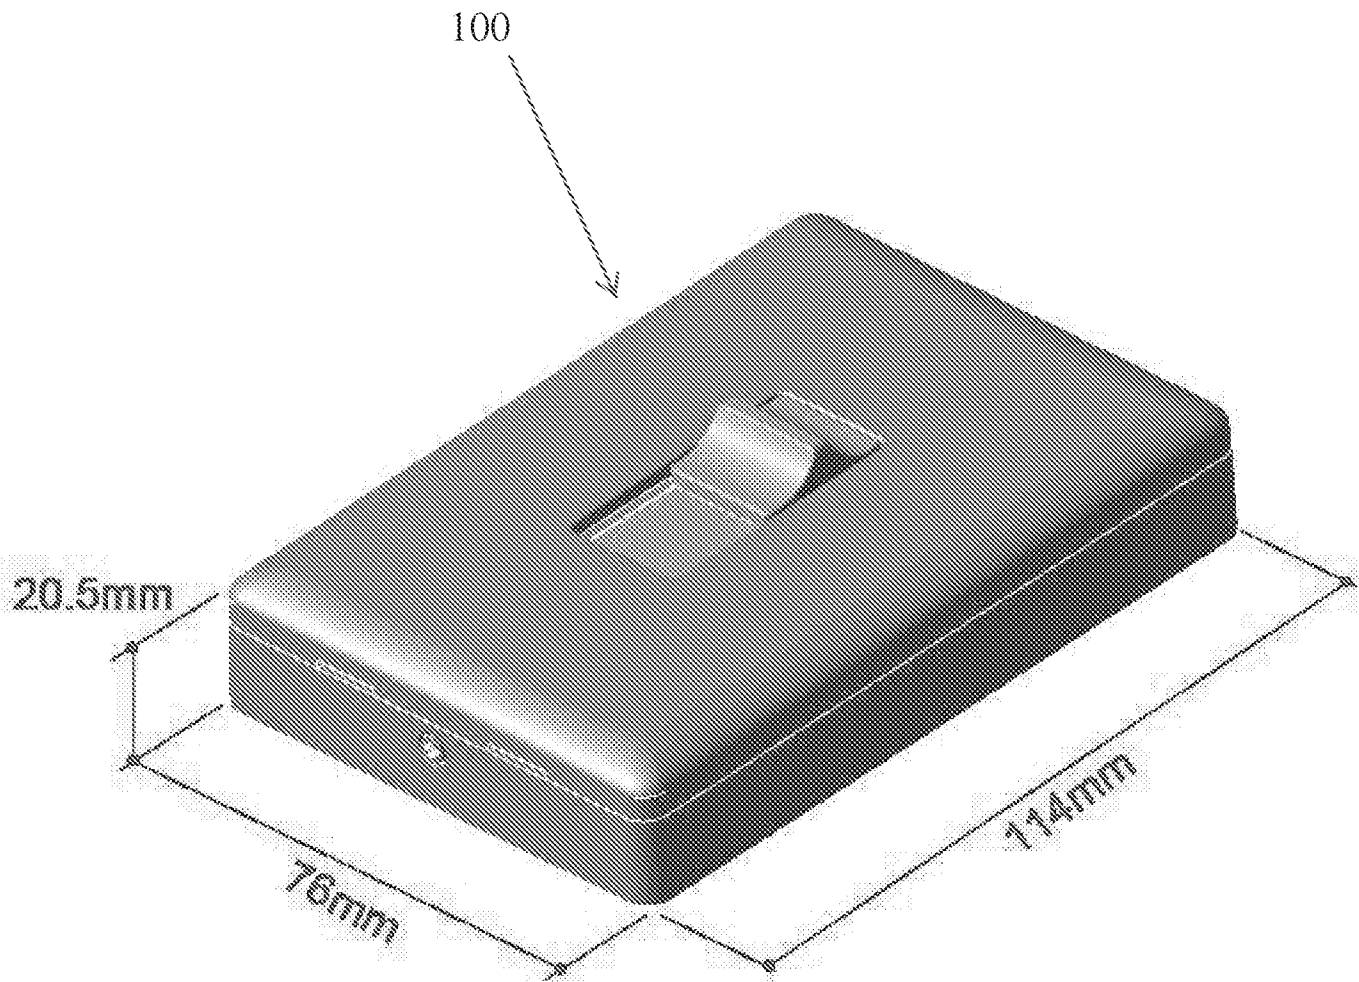


FIG.1

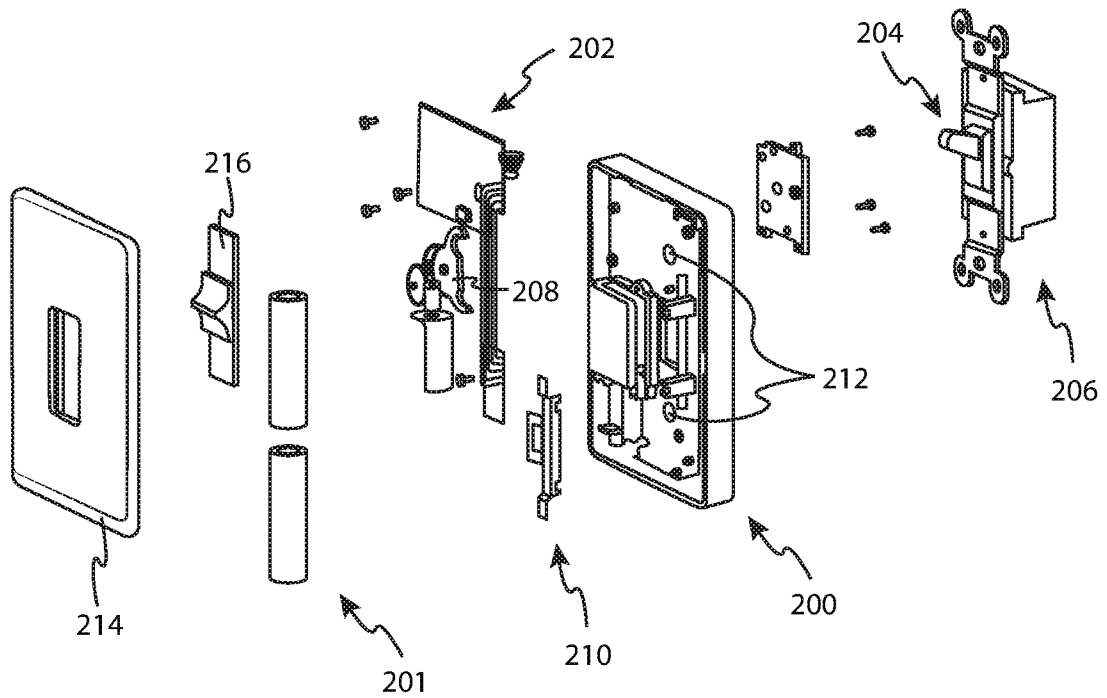


FIG. 2

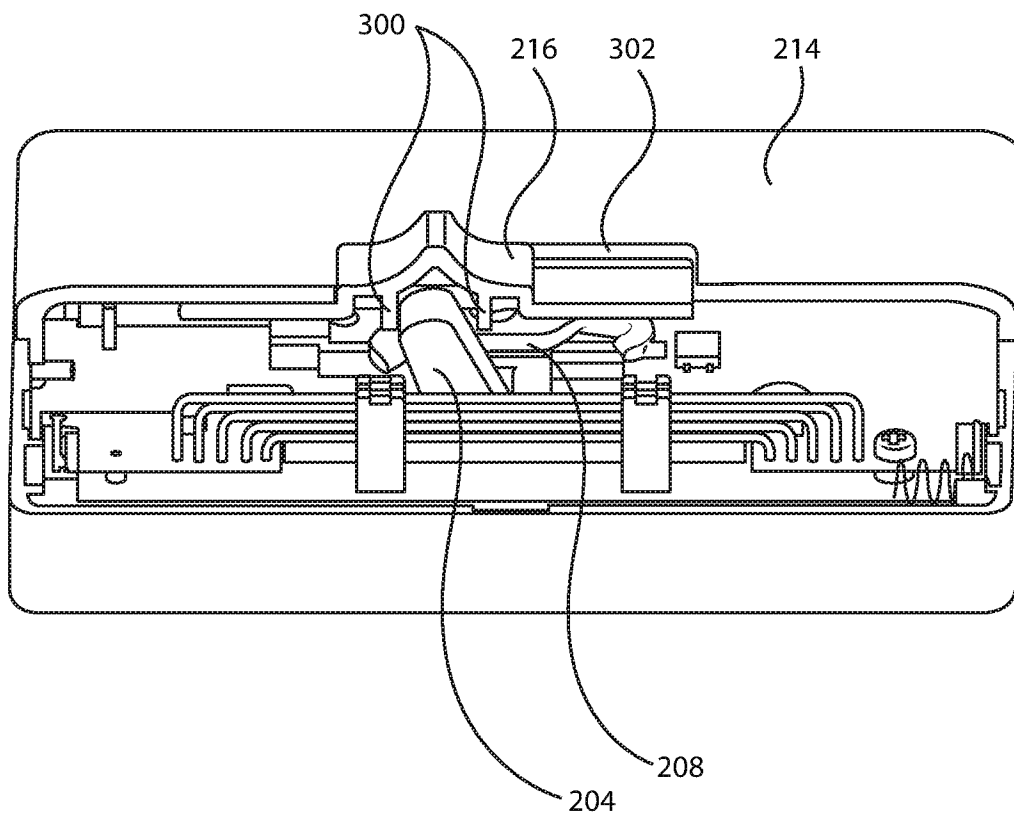
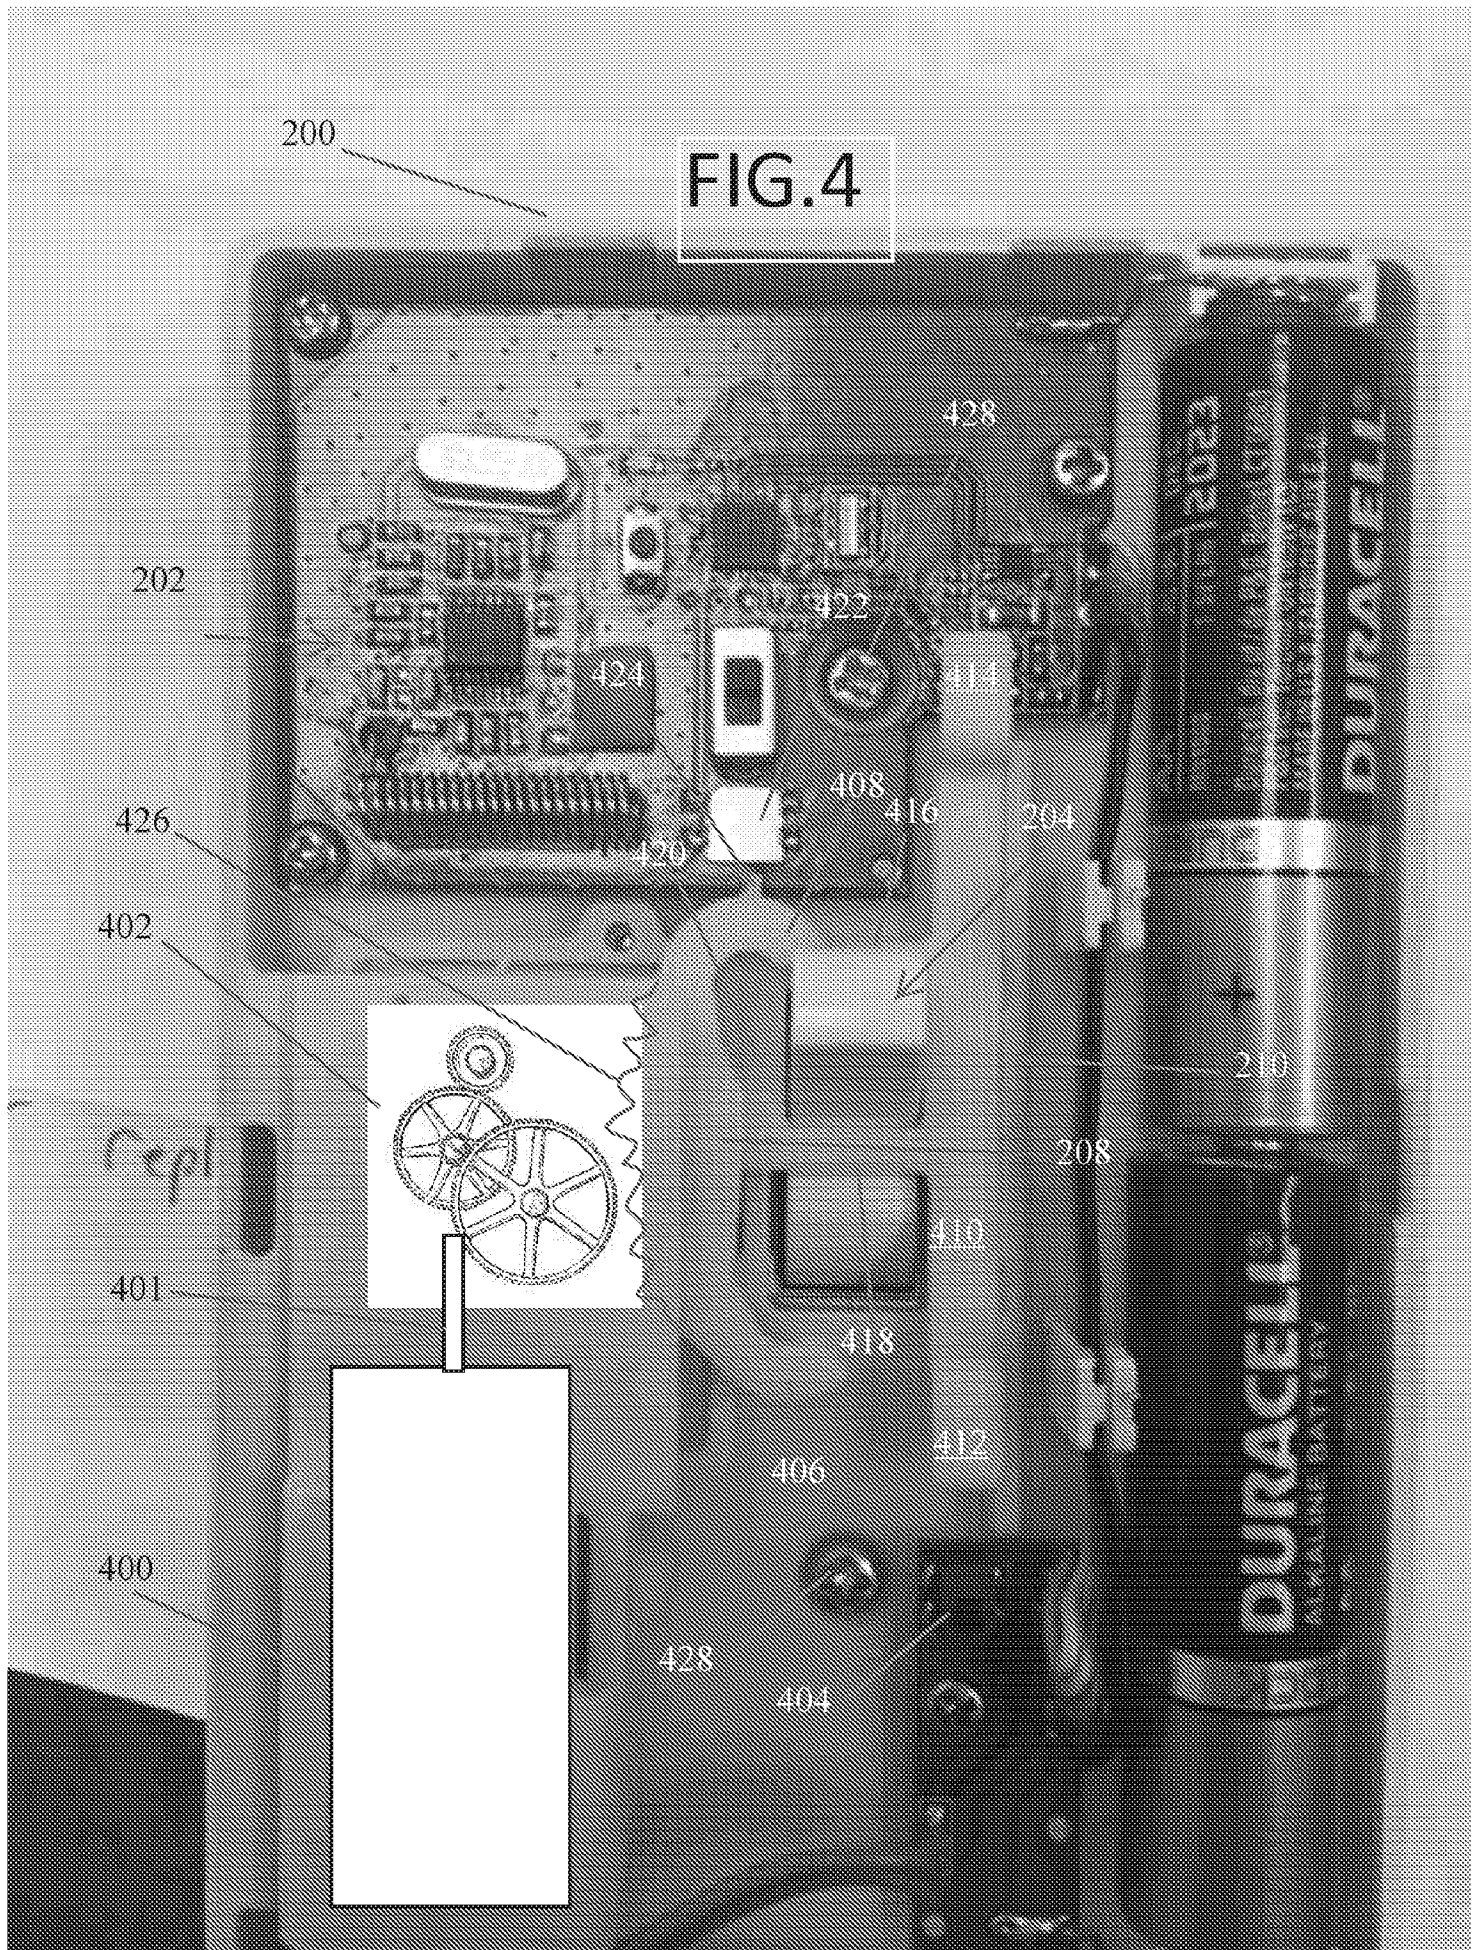


FIG. 3



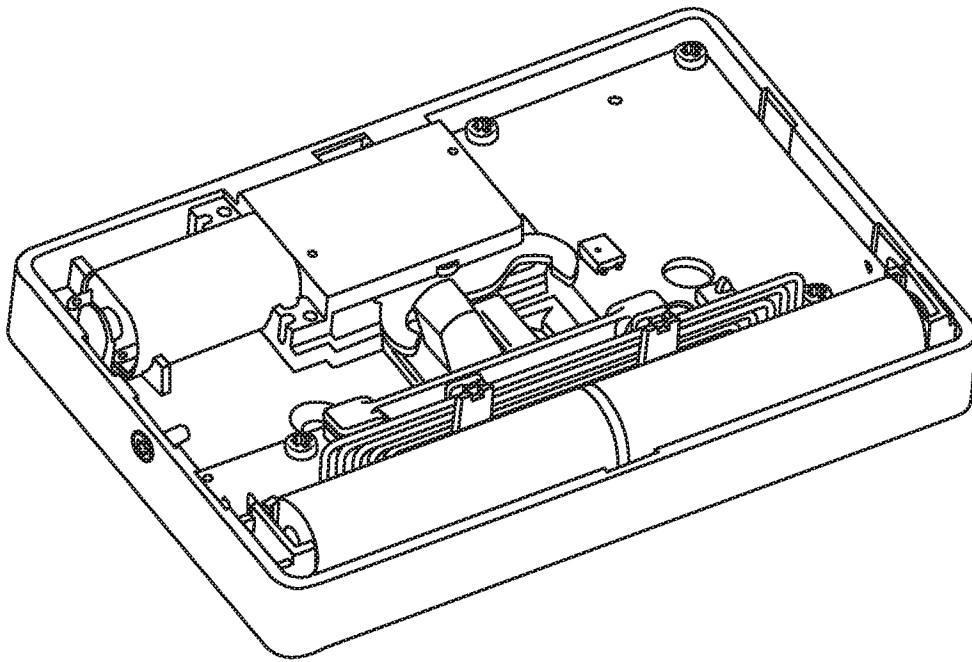


FIG. 5A

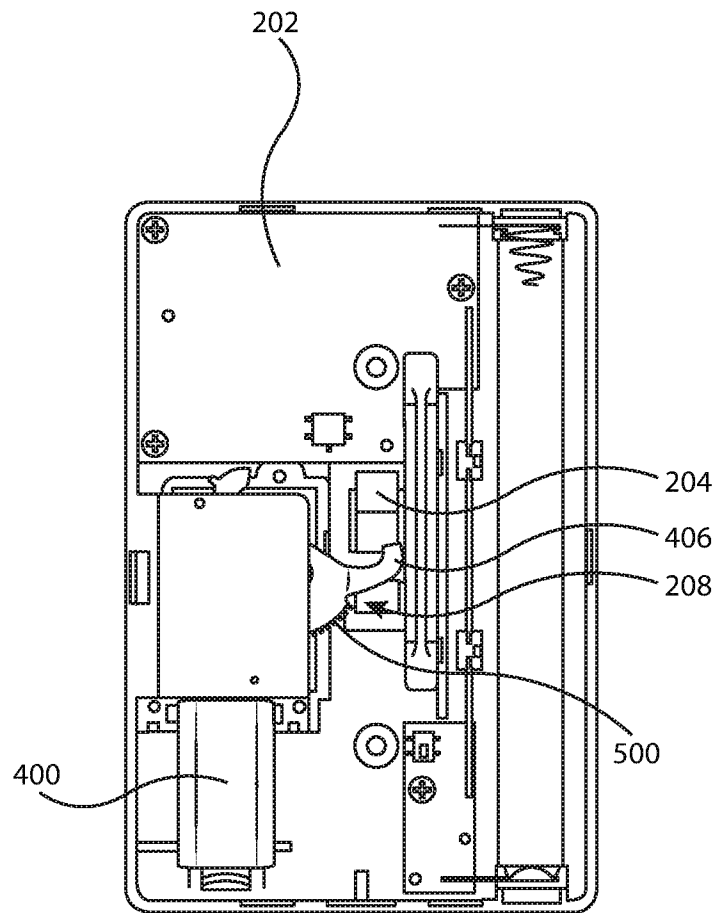


FIG. 5B

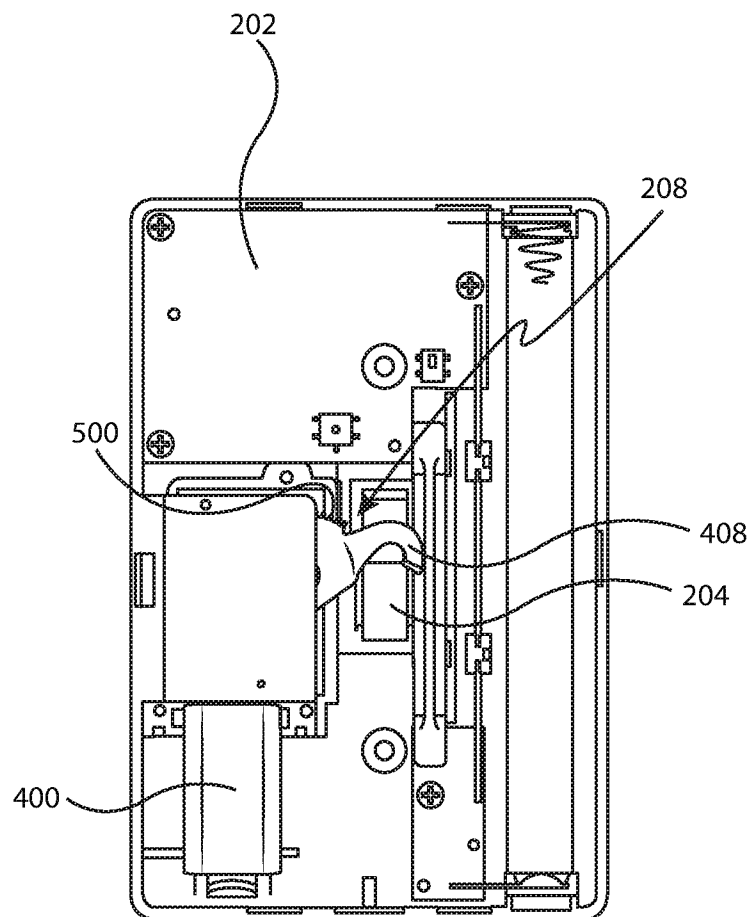


FIG. 5C

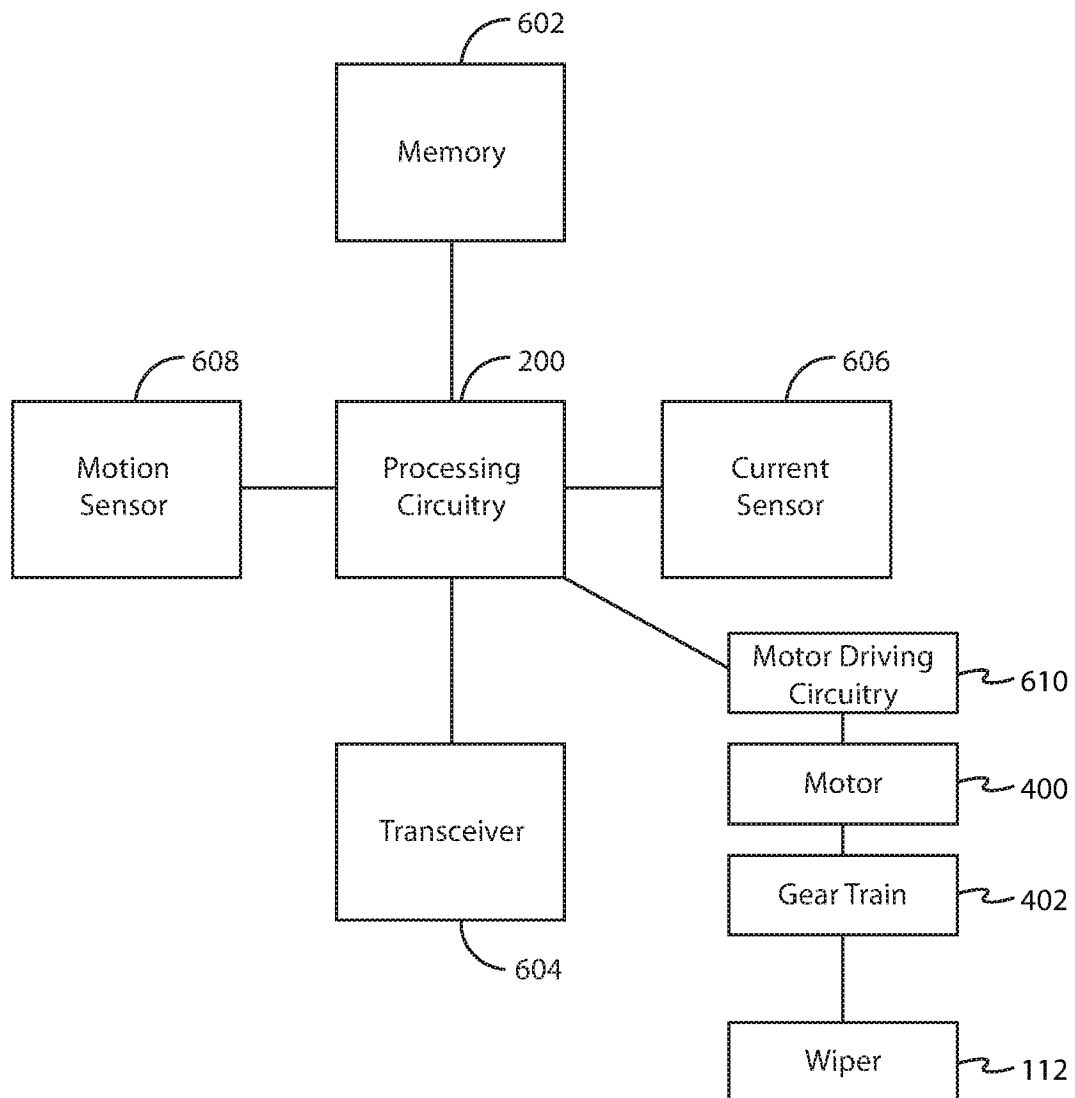


FIG. 6

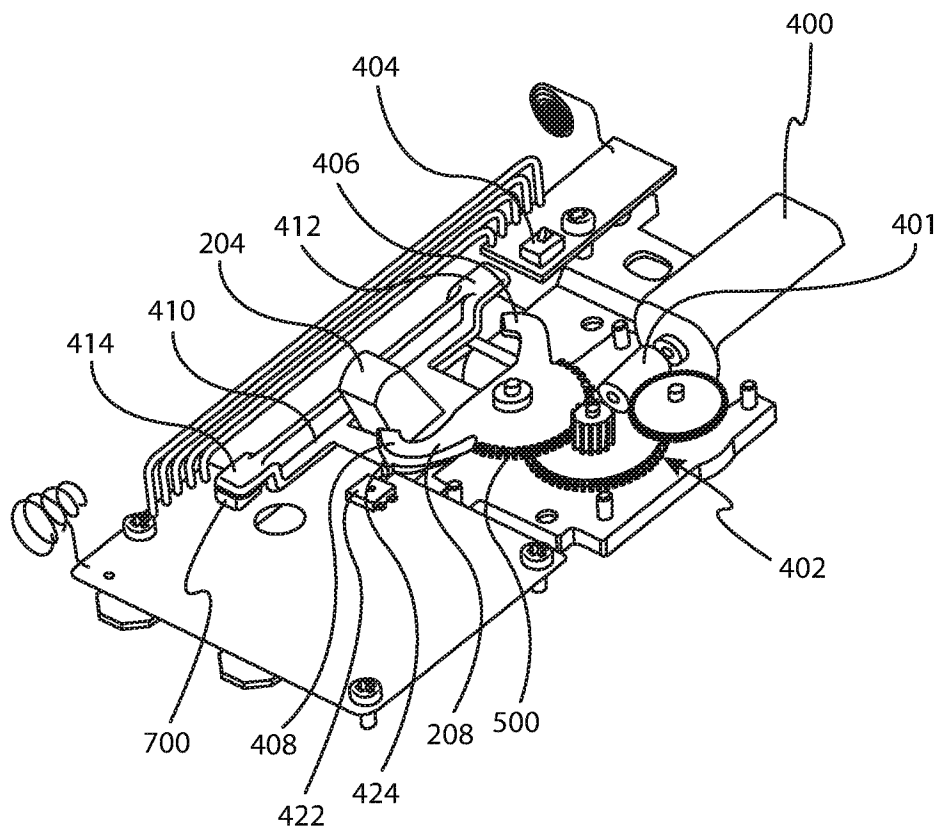


FIG. 7

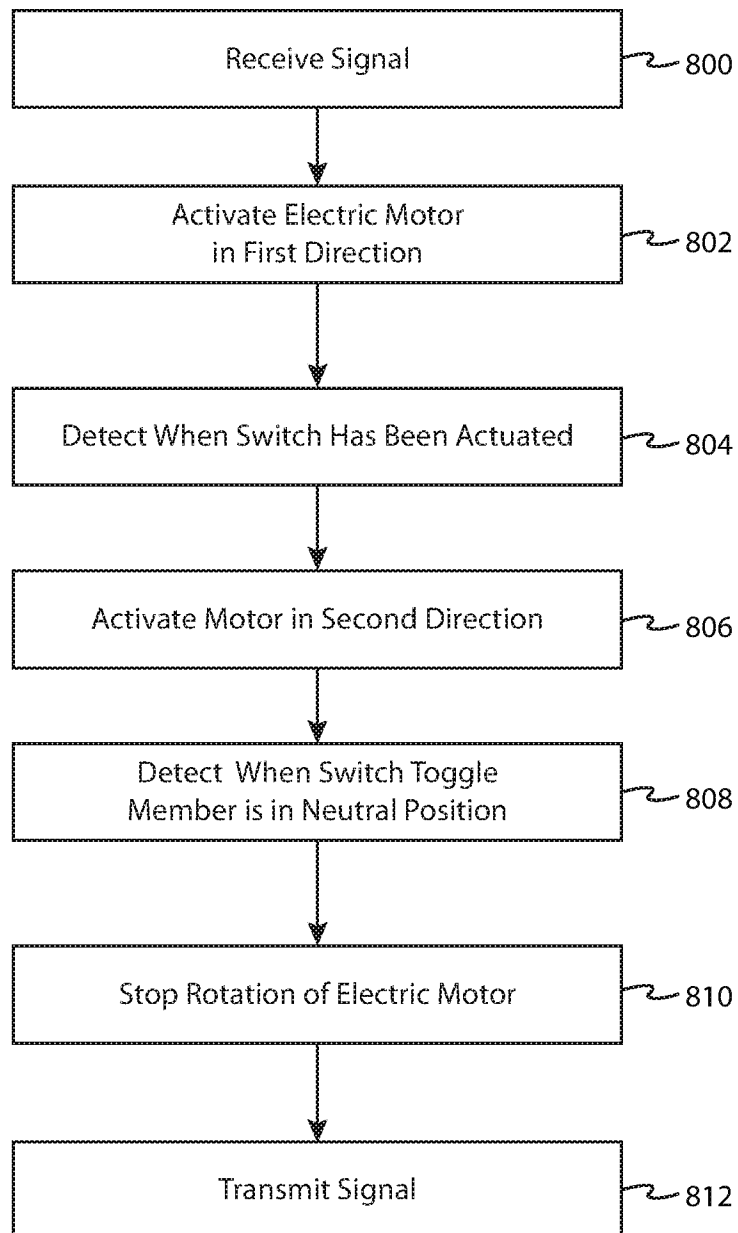


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 16/66964

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H01H 3/00, H01H 3/26 (2017.01)*

CPC - H01H 3/02, H01H 3/20, H01H 2003/266, H01H 3/40, H01H 9/02, H01H 2071/565, H01H 71/70

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

CPC - H01H3/02, H01H3/22, H01H2003/266, H01H3/40, H01H2071/565, H01H71/70

IPC(8) - H01H3/00, H01H3/26 (2017.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CPC - H01H3/02, H01H3/2*, H01H2003/266, H01H3/40, H01H9/02, H01H2071/565, H01H71/70, H01H19/02, H01H3/227, Y10T307/806, H01H9/54, H01H2300/03, Y02B20/44; IPC(8) - H01H3/00, H01H3/26 (2017.01)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Patbase; Google Web, Google Patent

Search terms used: light wall switch plate actuate operate move motor gear direction reverse remote

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2009/0288937 A1 (AGRONIN et al.) 26 November 2009 (26.11.2009), Fig 22, 23; para [0113]-[0125]	1
Y	US 2013/0342029 A1 (MANS) 26 December 2013 (26.12.2013), Fig 1, 2; para [0005], [0036], [0037], [0039], [0042]-[0044], [0053].	1
Y	US 2012/0292174 A1 (MAH et al.) 22 November 2012 (22.11.2012), abstract; para [0048], [0004], [0005], [0043]-[0054]; Fig 7, 8	1
Y	US 8,084,700 B1 (MASSARO et al.) 27 December 2011 (27.12.2011), abstract; col 10, ln 50-51; col 8, ln 56-58; col 12, ln 16-33; col 2, ln 51-67; col 3, ln 7-14	1
A	US 2015/0228426 A1 (ROMANO et al.) 13 August 2015 (13.08.2015), entire document	1
A	US 5,693,923 A (GULA et al.) 02 December 1997 (02.12.1997), entire document	1
A	US 4,912,376 A (STRICK) 27 March 1990 (27.03.1990), entire document	1
A	US 2005/0082150 A1 (GRAY JR.) 21 April 2005 (21.04.2005), entire document	1
A	US 5,955,796 A (NILSSEN) 21 September 1999 (21.09.1999), entire document	1



Further documents are listed in the continuation of Box C.



* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

09 February 2017

Date of mailing of the international search report

27 MAR 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774