



(22) Date de dépôt/Filing Date: 2001/05/23

(41) Mise à la disp. pub./Open to Public Insp.: 2001/11/25

(45) Date de délivrance/Issue Date: 2013/11/19

(30) Priorité/Priority: 2000/05/25 (EP00810454.9)

(51) Cl.Int./Int.Cl. *H04L 9/32* (2006.01),
E05B 47/00 (2006.01), *G07C 9/00* (2006.01)


(72) Inventeurs/Inventors:
SCHUSTER, KILIAN, CH;
FRIEDLI, PAUL, CH

(73) Propriétaire/Owner:
INVENTIO AG, CH

(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : METHODE DE LANCEMENT DE PROCEDURES POUR IMMEUBLE

(54) Title: METHOD OF INITIATING A PROCEDURE WITHIN A BUILDING

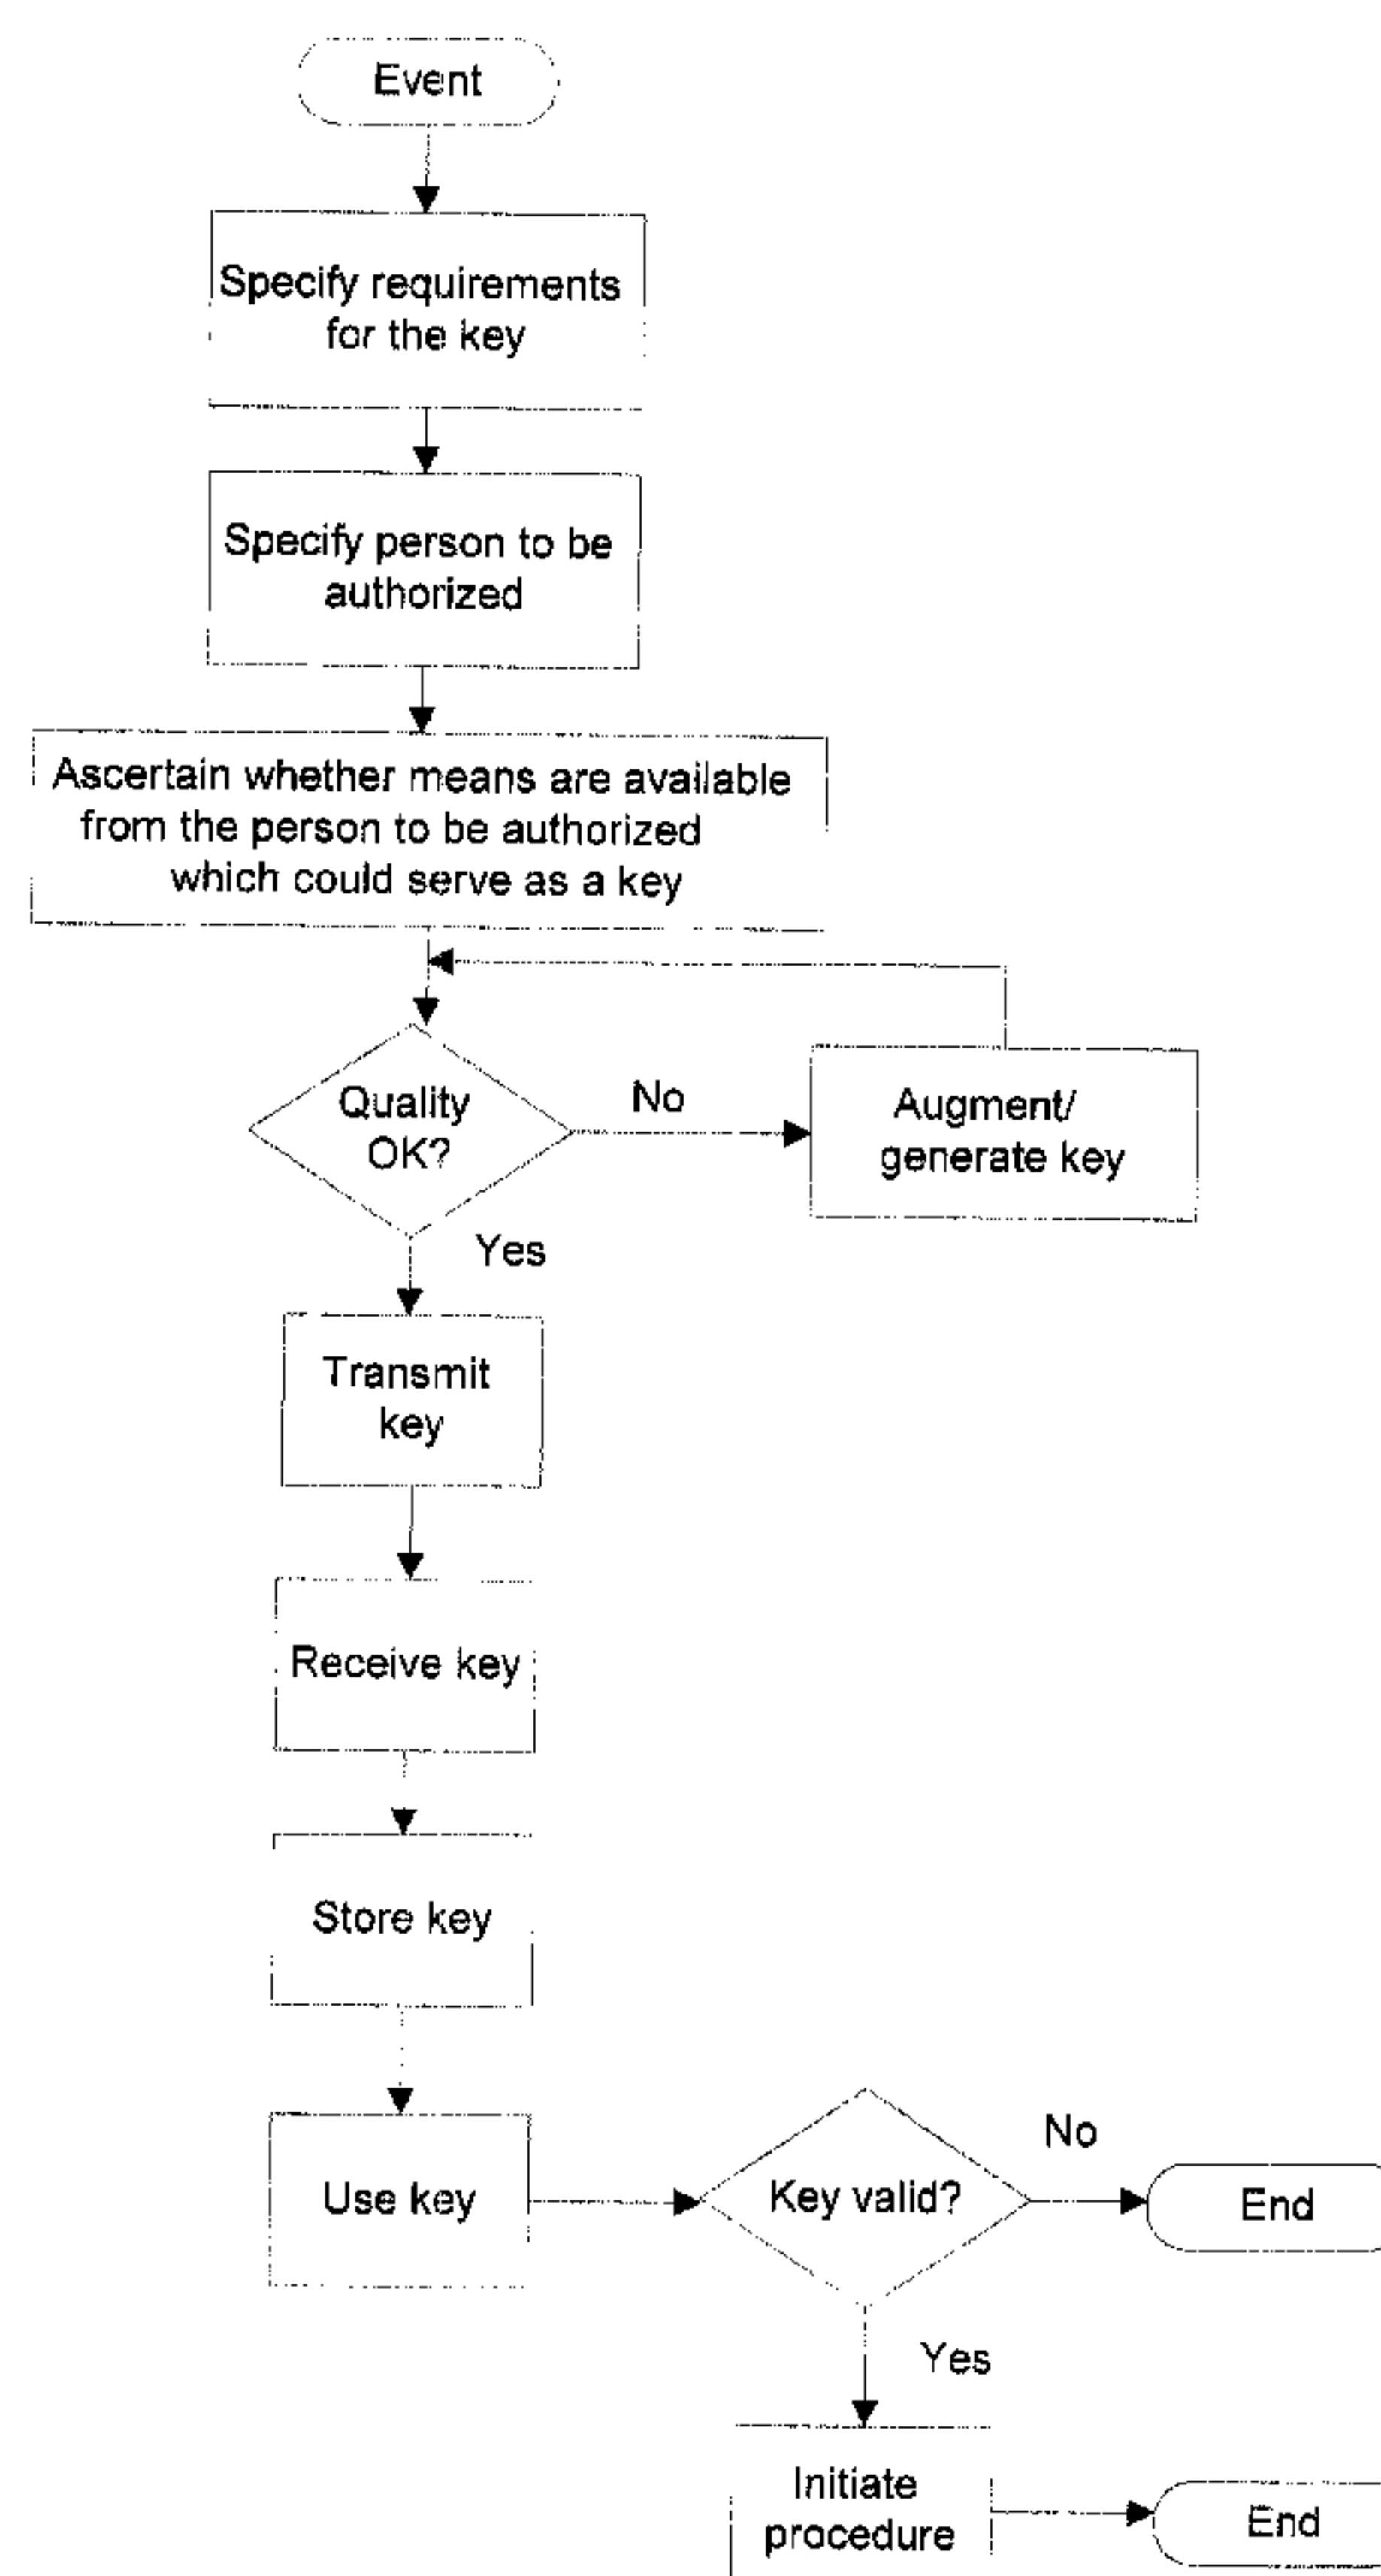

(57) Abrégé/Abstract:

With the method according to the invention for initiating a procedure within a building, a virtual key is generated by a certain event and transmitted to a person. If the authorized person identifies himself by means of the key, a procedure, for example making an elevator available, is initiated within the building.



Abstract**Method for initiating a procedure within a building**

5 With the method according to the invention for initiating
a procedure within a building, a virtual key is generated
by a certain event and transmitted to a person. If the
authorized person identifies himself by means of the key,
a procedure, for example making an elevator available, is
10 initiated within the building.

Description**Method of Initiating a Procedure Within a Building**

- 5 The invention relates to a method of initiating a procedure within a building.

Modern buildings, especially complex buildings, today have a comprehensive infrastructure such as, for example, doors
10 in the entrance area and if necessary, on each floor, with electronic access control, turnstiles with electronic access control, and elevator installations which are also equipped with access monitoring.

- 15 If a person in this building suddenly needs the urgent assistance of a physician, a sequence of procedures must be performed without hindrances occurring. Firstly, the person who needs assistance must communicate to another person that he/she needs assistance and to what extent.
20 This other person must then inform the emergency physician and ensure that the building personnel know of the emergency physician's visit, receive the emergency physician, allow him/her through the safety barriers in the building, and guide the emergency physician to the
25 respective floor and into the respective room in the building where the person requiring assistance is. As well as this, the building personnel must be comprehensively and correctly informed and instructed. Inadvertently incorrect information can have fatal consequences.
30 Furthermore, the emergency physician must be able to reach the person requiring assistance as quickly as possible.

This requires a high administrative outlay, and the personnel must be comprehensively trained.

A further case can be that an order is placed by a person
5 working in the building, or a resident of the building.
For some reason or other, however, this person or the
resident cannot take delivery of the goods or services
themselves. The person or resident must therefore actively
arrange that the goods or service which have been ordered
10 can also be received. As a rule, this can be done by the
person or resident instructing another person, who then
takes on this task for them. If no such person is
available, or if there is a misunderstanding, the ordered
goods or service cannot be received, which can again have
15 corresponding consequences.

If a building cleaning service has to clean and care for
certain parts of the building at certain times, the
cleaning personnel must be given corresponding rights of
20 entry. This is generally done by handing to the cleaning
personnel one or more mechanical keys which are not able
to unlock certain doors. When this is done, there is no
guarantee that the person who has possession of this key
is also a member of the cleaning personnel. There is a
25 further problem in that if the key is lost, substantial
damage can occur. In this situation misuse cannot be ruled
out.

If a resident of the building expects several guests, he
30 must provide each individual visitor who reports to
reception with access to the building and if necessary,

each time anew give a description of the way to find him in the building. Under certain circumstances this can be quite tedious.

If in the building or in an apartment of the building a one-time or rarely repeating service is performed, authorization of access for the service personnel can only be arranged with high administrative outlay. Either a person must accompany the service personnel, or a mechanical key must be made available for the service personnel, which requires a certain amount of trust in advance and increases the danger of misuse.

An objective of the invention is therefore to specify a method of initiating a procedure within a building by means of which certain components of the infrastructure of the building can be automatically and faultlessly made available to an authorized person in a safe manner.

The objective is fulfilled by the method of the present invention.

In one aspect of the present invention, there is provided a method of initiating a procedure within a building with which a certain event causes a virtual key to be generated; with which the key is transmitted to a person; and with which a procedure is initiated within the building when the authorized person identifies himself with the key.

In a further aspect of the present invention, there is provided a method of initiating a procedure within a building

3a

comprising the steps of defining at least one initiating event for said procedure; defining at least one requirement for at least one procedure; defining at least one person to be authorized to perform said procedure; detecting said initiating event; generating a virtual key based on said requirement for said person; transmitting said virtual key to said person; detecting an entered virtual key; checking the validity of said entered virtual key; and initiating said procedure within the building if said validity check is positive.

In another aspect, the present invention resides in a method of initiating a procedure within a building comprising the steps of: defining at least one initiating event for the procedure which event does not involve a person arriving at the building, and further defining different procedures for different initiating events; defining at least one security requirement for the procedure, and further defining different security requirement for the different procedures; defining at least one person to be authorized to perform the procedure; detecting the occurrence of the at least one initiating event wherein the at least one person does not define the at least one initiating event and does not cause the occurrence of the at least one initiating event; generating a virtual key for the at least one person based on the at least one requirement detecting the occurrence of the at least one initiating event and prior to the at least one person arriving at the building, wherein the step of generating the virtual key includes the steps of assigning an encrypted code to the virtual key, and adding a signature to the virtual key; transmitting virtual key to the at least one person using wireless device, and further transmitting

3b

different virtual keys to the at least one person for the different initiating events; detecting use of the virtual key by the at least one person in the building; checking the validity of the virtual key, including identifying the at least one person as a recipient of the transmitted virtual key by the signature; and initiating said procedure within the building if the validity check is positive wherein initiating the procedure consists of performing at least one of the steps of: opening of at least one door of the building; making at least one elevator available; opening of at least one elevator door; and performing said steps a. through i. in an access control computer system associated with the building.

In still another aspect, the present invention resides in a method of initiating a procedure within a building comprising the steps of: defining at least one initiating event for the procedure which event does not involve a person arriving at the building, and further defining different procedures for different initiating events; defining at least one of a security requirement and an availability requirement for the procedure, and further defining different security requirement for the different procedures; defining at least one person to be authorized to perform the procedure; detecting the occurrence of the at least one initiating event wherein the at least one person does not define the at least one initiating event and does not cause the occurrence of the at least one initiating event; generating a virtual key for the at least one based on the at least one requirement detecting the occurrence of the at least one initiating event and prior to the at least one person arriving at the building, wherein the step of generating the virtual key includes the steps of assigning

3c

an encrypted code to the virtual key, and adding a signature to the virtual key; transmitting virtual key to the at least one person using wireless devices; detecting use of the virtual key by the at least one person in the building; checking the validity of the virtual key, including identifying the at least one person as a recipient of the transmitted virtual key by the signature; initiating said procedure within the building if the validity check is positive wherein initiating the procedure consists of performing at least one of the steps of: opening of at least one door of the building; making at least one elevator available; opening of at least one elevator door; and performing said steps a. through i. in an access control computer system associated with the building.

With the method according to the invention for initiating a procedure in a building, a virtual key is generated by a certain event. The virtual key is then communicated to a person. If the authorized person identifies himself by

means of the key, the procedure is initiated in the building.

It is advantageous for the key to be assigned a certain
5 code by means of an encryption method.

Furthermore, it is an advantage to add to the key a
signature with which the recipient of the key can identify
himself to third parties as the person authorized to use
10 it.

It is also an advantage for the type of procedure to be
made dependent on the type of event.

15 It is advantageous for the procedure to control an
elevator situated in a building.

Another advantageous further development of the invention
is that the person to whom the key is communicated is made
20 to depend on the type of event.

Moreover, it can be checked whether for the person to whom
the key is communicated a key already exists and if so,
whether it is being used with modification.

25

A further advantage of the invention is that the means
which the person to be authorized has available to
identify himself are ascertained, and a suitable one of
them is selected.

30

In a further embodiment of the invention, if a key already exists, it is checked whether this fulfils the security requirements and if necessary, a new or augmented key is generated.

5

It is advantageous for the person to identify himself when receiving the key.

The invention is explained in greater detail below by
10 reference to a figure.

The figure shows a flowchart for the method according to the invention of initiating a procedure within a building.

15 As shown in the figure, the initiating element is a certain event. As already mentioned above, the event can be an emergency call, an order, a request such as for a cleaning service, an invitation, or a periodically recurring event such as, for example, monitoring a
20 condition, or a service.

The type of event determines what requirements are specified for a key which is to be generated. For example, if a fire occurs in the building, the requirements for the
25 security of the key must be set less high and the requirements for the availability of the key must be set higher. If, however, the initiating event is giving to a cleaning service the task of cleaning the building, the security requirements for the key to be issued must be set
30 significantly higher. This means that in this case, the danger of misusing the key must be kept as low as

possible, whereas in case of fire, access to the building must be guaranteed under all circumstances. In consequence, different types of event place different requirements on the key to be issued.

5

The term key or virtual key is to be understood as a code.

It is also through the event that the person to be authorized is defined. If, for example, the initiating
10 event is an emergency call, for this event the emergency physician must be called, whereas if the initiating event is a personal invitation of a resident of the building, the guest or guests must be invited.

15 Whether the requirements for the key are defined first, and then those for the persons(s) to be authorized, depends on the circumstances describing the system.

After this, it must be ascertained whether means are
20 available from the person to be authorized which can be used as a key. Examples of possible means are communication means such as a telephone, mobile radio, pager, or PC.

25 Examples of possible means for a key are a secret word, a secret number, a sentence, a symbol, or a picture.

After the requirements for the key have been defined, and the person who is to be authorized has been defined, and
30 it has been ascertained whether means are available from the person to be authorized which can be used as the key,

it is checked whether the quality of a key which may be present fulfils the requirements. If this is not the case, a new key is generated, or else the key which is present is augmented to the extent necessary to fulfil the
5 requirements for the key.

After a suitable key has been generated, it is communicated to the authorized person. The type of transmission depends on the means available to the
10 authorized person. If the authorized person has a mobile radio telephone, the transmission can take place over an interface of air. However, if the key must be transmitted to a fax device, wired transmission is generally used. The type of communication of the key depends on the technical
15 circumstances.

If necessary, identification of the authorized person can already take place when the key is received. This can be done, for example, with biometric characteristics such as
20 the voice of the recipient, or his fingerprint. After the key has been received and, if necessary, the person authorized to use it has identified himself, the key is stored on the means of transmission available to the authorized person. However, this is not absolutely
25 essential. The person authorized to use the key can remember it himself.

As soon as the person authorized to use the key arrives at the respective building, the key comes into use. Depending
30 on the key, use of the key takes place by entering the secret number, the secret word, or similar on a keyboard,

or detection of the key in spoken form by a microphone on the building, or the biometric features of the person authorized to use the key by a corresponding biometric sensor arranged on the building.

5

After the key has been entered, a check is made of the key for validity. If the key is recognized to be invalid, for example if the key can only be used for a specified period of time and is used later than this, it is rejected. The
10 person does not obtain access to the building, the procedure is not initiated.

On the other hand, if the key is recognized as valid, the procedure is initiated, for example the doors of the
15 building are opened, the elevator is made available, the elevator doors opened, and any security barriers which may be present are released. A further procedure can be transmission of a message to the sender of the key. Further, the user of the key can be given information
20 about the way to get to the person who sent the key. A greeting to the person authorized to use the key, or other items of information left for the authorized user, can now be delivered. The initiated procedure can also include an automatic trip of the elevator to the destination floor.
25 Finally, the procedure can also be a receipt for delivery of the goods or service.

By means of the invention, an electronic key for granting access to certain areas as a result of external events,
30 for example an order by mail, a request for help, detection of fire, and so on is automatically generated

and delivered. This means that the initiating event automatically implies the requirement for access, and that the necessary steps (provision and dispatching of the key) are taken. For example, a request for an emergency
5 physician by means of an emergency transmitter causes a code to be delivered to the physician. With this, the physician identifies himself to the access control system, so as to be able to reach the patient unhindered.

10 The electronic key can, for example, be implemented in the form of a binarily represented number or sequence of numbers. The relevant persons involved in generating the key, and in distributing and using the key, are the ordering person (for example the person to be visited),
15 the visitor, and an administrator. When doing so, various forms and methods of identification and authentication are possible such as those provided by public key cryptography. In this connection, reference should be made to the publication of R. L. Rivest, A. Schamir, and L.
20 Adleman "A Method for Obtaining Digital Signatures and Public-key Cryptosystems", 1977. In that work, a coding method is described with which an encryption key is publicly accessible without the decryption key being made publicly accessible. The method is also known as the RSA
25 method.

In a simple embodiment of the key, the key can be augmented with a PIN code, an identifier, a telephone number, or a secret word. Greater protection against
30 misuse can be obtained by using a public key as authentication, and corresponding encryption methods for

communication. When doing so, in a first phase public keys based on authentication are used. If a user is to be granted access or other rights, he receives these rights securely sent to him in numerical form and by means of the public key. When using the rights, decryption takes place which ensures that the declared rights as, for example, of access are granted by an authorized source. Furthermore, a method of signing can be added which enables corresponding proof to third parties.

10

The key can contain various items of information. It is possible that a part of the key is a signature of the recipient or the administrator. A further part of the key can be the initiating event itself. It is even possible to add items of information to the key which contain, for example, the access rights, i.e. who may have access to where, and when. Further, the type of right can be documented in the key. Finally, it is also possible to store in the key only a reference or a pointer which indicates the address in storage under which the administrator has stored the additional information.

15

20

Depending on the specific application, the key can be stored completely or partially in one or more places. If the key is stored completely in several places this means high redundancy and therefore high certainty of access, but also a high danger of misuse. Storing the key in its complete form in several places can be helpful, for example in case of fire in the building.

25

30

The items of information stored in the key can be transmitted to the building's own receiver via, for example, an infrared interface (IRDA) or a bluetooth radio interface of a mobile radio telephone.

5

IRDA (Infrared Data Association) defines an infrared communication standard. It can be used to create wireless connections with a range of between 0 and 1 meter and a data transmission rate of between 9600 and 16 Mbaud.

10

Bluetooth is intended for short-range voice and data traffic at radio frequencies of 2.4 GHz in the ISM band. Its range lies between 10 cm and 10 m but can be extended up to 100 m by increasing the transmission power.

15

Generation and distribution of the key can also be performed by different sources such as, for example, an alarm trigger, the building administrator, or a third source. Generation of the key is automatically based on an indication such as that given by triggering of an alarm.

20

With receipt of the key, other items of information and instructions can be transmitted such as, for example, a sketch showing the way, a restriction on visiting times, or operating instructions.

25

When the key is used it is possible, for example, for the purpose of informing or authenticating the user, to create a communication connection between the key transmitter and the key bearer.

30

Furthermore, it is possible to inform the sender of the key if the key has not been used after expiry of a certain period of time. It is also possible to modify the rights granted to the authorized user, so that the authorized
5 user is no longer authorized to use the key, or only with limitations. As well as this, the rights of all keys can be modified. This can be of significance if a number of keys have been distributed, but from now on only some of them may be used.

10

The sender of the key or the administrator can be notified if the key functions incorrectly and/or there are attempts at manipulation.

15 The key can be embedded in a higher-level program so that, for example, an operating program can be transmitted together with the key to a mobile telephone with WAP browser. The telephone can then be used as an operating interface inter alia to make use of the key.

20

Furthermore, it is possible to charge a fee for each use of the key which can depend on the type of key and the action or procedure which is initiated. Charging can be to the key owner, in other words the authorized user, the
25 sender of the key, or someone else.

As well as this, it is possible to use the key to switch to a special operating mode when the key is used. This could be especially important for the fire service in case
30 of fire, so they can control an elevator.

If a key is used, this can be indicated visually and/or acoustically.

If a key is not used, this can cause certain actions to be initiated, such as a reminder message to the recipient of the key.

Further, when the key is used, additional information can be transmitted to the lock, in other words the electronic recipient. The type of information can then be determined by the key itself and/or requested by the lock. The information can contain, for example, details of the visitor such as personnel number, preferred room temperature, or ability to communicate.

We claim:

1. A method of initiating a procedure within a building comprising the steps of:
 - 5 a. defining at least one initiating event for the procedure which event does not involve a person arriving at the building, and further defining different procedures for different initiating events;
 - 10 b. defining at least one security requirement for the procedure, and further defining different security requirement for the different procedures;
 - c. defining at least one person to be authorized to perform the procedure;
 - 15 d. detecting the occurrence of the at least one initiating event wherein the at least one person does not define the at least one initiating event and does not cause the occurrence of the at least one initiating event;
 - 20 e. generating a virtual key for the at least one person based on the at least one requirement detecting the occurrence of the at least one initiating event and prior to the at least one person arriving at the building, wherein the step of
25 generating the virtual key includes the steps of assigning an encrypted code to the virtual key, and adding a signature to the virtual key;
 - f. transmitting virtual key to the at least one person using wireless device, and further transmitting
30 different virtual keys to the at least one person for the different initiating events;
 - g. detecting use of the virtual key by the at least one person in the building;
 - h. checking the validity of the virtual key, including
35 identifying the at least one person as a recipient

of the transmitted virtual key by the signature; and initiating said procedure within the building if the validity check is positive wherein initiating the procedure consists of performing at least one of the steps of: opening of at least one door of the building; making at least one elevator available; opening of at least one elevator door; and

i. performing said steps a. through i. in an access control computer system associated with the building.

2. The method according to claim 1 further comprising the step of storing the virtual key partially or completely.

3. The method according to claim 1 further comprising the step of identifying the at least one person with biometric characteristics.

4. The method according to claim 1 further comprising performing said step i. as at least one of the steps of: initiating a control procedure of an elevator in the building; initiating a medical assistance procedure; initiating a building cleaning procedure; and initiating a guest reception procedure.

5. A method of initiating a procedure within a building comprising the steps of:

a. defining at least one initiating event for the procedure which event does not involve a person arriving at the building, and further defining different procedures for different initiating events;

b. defining at least one of a security requirement and an availability requirement for the procedure, and

further defining different security requirement for the different procedures;

c. defining at least one person to be authorized to perform the procedure;

5 d. detecting the occurrence of the at least one initiating event wherein the at least one person does not define the at least one initiating event and does not cause the occurrence of the at least one initiating event;

10 e. generating a virtual key for the at least one based on the at least one requirement detecting the occurrence of the at least one initiating event and prior to the at least one person arriving at the building, wherein the step of generating the virtual
15 key includes the steps of assigning an encrypted code to the virtual key, and adding a signature to the virtual key;

f. transmitting virtual key to the at least one person using wireless devices;

20 g. detecting use of the virtual key by the at least one person in the building;

h. checking the validity of the virtual key, including identifying the at least one person as a recipient of the transmitted virtual key by the signature;

25 i. initiating said procedure within the building if the validity check is positive wherein initiating the procedure consists of performing at least one of the steps of: opening of at least one door of the building; making at least one elevator available;
30 opening of at least one elevator door; and

j. performing said steps a. through i. in an access control computer system associated with the building.

