

13566/88

RECEIVED AND ACCEPTED

FORM 1

602068

20-7-90

SPPUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

APPLICATION FOR A STANDARD PATENT

Shell Internationale Research Maatschappij B.V., a Netherlands Company, of Carel van Bylandtlaan 30, 2596 HR, The Hague, THE NETHERLANDS, hereby apply for the grant of a standard patent for an invention entitled:

Process for the Preparation of Fibre-reinforced Polyvinyl Chloride Composites

which is described in the accompanying complete specification.

Details of basic application(s):-

<u>Basic Applic. No:</u>	<u>Country:</u>	<u>Application Date:</u>
8707319	UNITED KINGDOM	26 March 1987

The address for service is:-

Spruson & Ferguson
Patent Attorneys
Level 33 St Martins Tower
31 Market Street
Sydney New South Wales Australia

DATED this TWENTY THIRD day of MARCH 1988

Shell Internationale Research Maatschappij B.V.





By:

H. J. Anderson

Registered Patent Attorney

TO: THE COMMISSIONER OF PATENTS
OUR REF: 52015
S&F CODE: 61750

5845/3

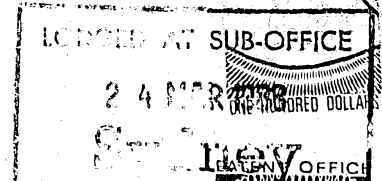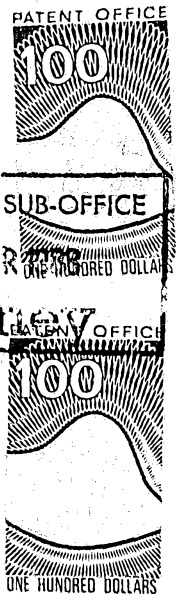

SPRUSON & FERGUSON

COMMONWEALTH OF AUSTRALIA
PATENTS ACT 1952

DECLARATION IN SUPPORT OF A
CONVENTION APPLICATION FOR A PATENT

In support of the Convention Application made for a patent for an invention entitled:

Process for the preparation of fibre-reinforced polyvinyl chloride composites

I, Onno Aalbers, of Carel van Bylandtlaan 30, 2596 HR The Hague, the Netherlands, do solemnly and sincerely declare as follows:-

1. I am authorised by SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V., the applicant for the patent to make this declaration on its behalf.
2. The basic application(s) as defined by Section 141 of the Act was/were made in the United Kingdom on 26th March, 1987 by SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.
3. Seetha COLEMAN-KAMMULA, a British national, and Josephus Hubertus VAN DEURSEN, a Netherlands national, all of Badhuisweg 3, 1031 CM Amsterdam, the Netherlands

(respectively), ~~is~~/are the actual inventor(s) of the invention and the facts upon which the applicant is entitled to make the application are as follows:

The Applicant is the assignee of the actual inventor(s).

4. The basic application(s) referred to in paragraph 2 of this Declaration was/were the first application(s) made in a Convention country in respect of the invention the subject of the application.

DECLARED at The Hague this 22nd day of February 1987

.....
Onno Aalbers

TO: THE COMMISSIONER OF PATENTS
AUSTRALIA

(12) PATENT ABRIDGMENT (11) Document No. AU-B-13566/88
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 602068

(54) Title
PROCESS FOR THE PREPARATION OF FIBRE-REINFORCED POLYVINYL CHLORIDE COMPOSITES

International Patent Classification(s)
(51)⁴ C08F 251/02 C08J 005/04 C08L 027/06 C08L 051/02

(21) Application No. : 13566/88 (22) Application Date : 24.03.88

(30) Priority Data

(31) Number (32) Date (33) Country
8707319 26.03.87 GB UNITED KINGDOM

(43) Publication Date : 29.09.88

(44) Publication Date of Accepted Application : 27.09.90

(71) Applicant(s)
SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V.

(72) Inventor(s)
SEETHA COLEMAN-KAMMULA; JOSEPHUS HUBERTUS VAN DEURSEN

(74) Attorney or Agent
SPRUSON & FERGUSON, GPO Box 3898, SYDNEY NSW 2001

(57) Claim

1. A process for the preparation of reinforced polyvinyl chloride (PVC) composites, containing PVC-grafted cellulose fibre material as reinforcing component, which process comprises the following steps:
Step A: grafting vinyl chloride onto a cellulose fibre material, by polymerization in an aqueous medium in the presence of a polymerization initiator based on a metal which complexes to hydroxyl and/or 1,2-dihydroxy groups, thus providing a reaction product which is essentially a mixture of PVC-grafted cellulose fibre material and PVC homopolymer,
Step B: isolating the reaction product from the aqueous medium as under Step A, and
Step C: employing the isolated reaction product as under Step B to prepare said reinforced PVC composite via a thermal moulding process.
3. A process as claimed in claim 1 or 2, wherein said metal is cerium.

602068

S & F Ref: 52015

FORM 10

COMMONWEALTH OF AUSTRALIA

PATENTS ACT 1952

COMPLETE SPECIFICATION

(ORIGINAL)

FOR OFFICE USE:

Class Int. Class

Complete Specification Lodged:
Accepted:
Published:

Priority:

Related Art:

This document contains the
amendments made under
Section 49 and is correct
printing.

Name and Address
of Applicant:

Shell Internationale Research Maatschappij B.V.
Carel van Bylandtlaan 30
2596 HR
The Hague
THE NETHERLANDS

Address for Service:

Spruson & Ferguson, Patent Attorneys
Level 33 St Martins Tower, 31 Market Street
Sydney, New South Wales, 2000, Australia

Complete Specification for the invention entitled:

Process for the Preparation of Fibre-reinforced Polyvinyl
Chloride Composites

The following statement is a full description of this invention, including the
best method of performing it known to me/us

A B S T R A C T

PROCESS FOR THE PREPARATION OF FIBRE-REINFORCED
POLYVINYL CHLORIDE COMPOSITES

A process for the preparation of reinforced polyvinyl chloride (PVC) composites containing PVC-grafted cellulose fibre material as reinforcing component, which comprises:

- Step A - grafting vinyl chloride onto a cellulose fibre material by polymerization in an aqueous medium in the presence of a polymerization initiator based on a metal which complexes to hydroxyl and/or 1,2-dihydroxy groups, thus providing a reaction product which is essentially a mixture of PVC-grafted cellulose fibre material and PVC homopolymer,
- Step B - isolating the reaction product from the aqueous medium as under Step A, and
- Step C - employing the isolated reaction product as under Step B to prepare a composite via a thermal moulding process.

PROCESS FOR THE PREPARATION OF FIBRE-REINFORCED
POLYVINYL CHLORIDE COMPOSITES

The invention relates to a process for the preparation of reinforced polyvinyl chloride (PVC) composites containing PCV-grafted cellulose fibre material as reinforcing component.

5 The technique to incorporate fibres into a polymer matrix in the preparation of fibre-reinforced composites, is well known. The performance of such composites is not only related to the nature and the amount of fibres employed in the preparation of the
10 composites, but also governed by the degree of fibre dispersion in the polymer matrix. The fibre dispersion can often be enhanced by submitting the fibres to a pretreatment.

 In French Patent Application, publication number
15 2370766 a process for fibre pretreatment is disclosed wherein a cellulosic fibrous material is treated with an olefinically unsaturated monomer in the presence of a peroxy type initiator, a so-called grafting process. In example 12 of said application, wherein a
20 lignocellulose is grafted with styrene monomer in the presence of t-butyl hydroperoxide, the dried reaction product of the grafting reaction is subsequently used for the preparation of test specimens via a moulding process at elevated temperature. As vinyl chloride is
25 stated to be a suitable olefinically unsaturated monomer for the process as disclosed in the application mentioned hereinbefore, it could be expected for said process to be also suitable for the production of

PVC-grafted cellulose fibres, even though no experimental data concerning the use of vinyl chloride is given. However all attempts by the applicant to prepare PVC-grafted cellulose according to the process described hereinbefore employing vinyl chloride as the olefinically unsaturated monomer in combination with different peroxy type initiators, failed. In virtually all the experiments the grafting percentage obtained was zero. Hence said process does not solve the problem of how to prepare reinforced PVC composites containing PVC-grafted cellulose fibres as the reinforcing component.

Therefore the problem underlying the present invention is finding a method which will make it possible to prepare reinforced PVC composites containing a PVC-grafted cellulose as the reinforcing component.

Tappi, July 1962, Vol 45, No 7, p 145-150, deals with the upgrading of the performance of certain cellulosic materials, i.e. bleached kraft pulp for paper making, which comprises treating said pulp with vinyl chloride and ceric ammonium nitrate in an aqueous medium and isolating the grafted cellulose from the reaction product, said reaction product being a mixture of PVC-grafted cellulose, generally present in a content of up to 30% by weight, and co-produced PVC homopolymer generally present in a content of at least 70% by weight. The yield of grafted cellulose obtained, was considered to be too low for use in paper making.

Surprisingly, it has now been found that the grafting procedure described hereinbefore which did not prove to be successful in upgrading the performance of cellulose for paper making, is eminently suited to provide grafted cellulose for the production of

reinforced PVC composites containing grafted cellulose as the reinforcing component.

The invention, therefore, provides a process for the preparation of reinforced PVC composites, containing PVC-grafted cellulose fibre material as reinforcing component, which process comprises the following steps:

Step A - grafting vinyl chloride onto a cellulose fibre material, by polymerization in an aqueous medium in the presence of a polymerization initiator based on a metal which complexes to hydroxyl and/or 1,2-dihydroxy groups thus providing a reaction product which is essentially a mixture of PVC-grafted cellulose fibre material and PVC homopolymer,

Step B - isolating the reaction product from the aqueous medium as under Step A, and

Step C - employing the isolated reaction product as under Step B to prepare said reinforced PVC composite via a thermal moulding process.

As mentioned hereinbefore the performance of reinforced polymer composites is closely related to the degree of dispersion of the reinforcing component in the polymer matrix. In general dispersion of the reinforcing component will not only require a separate process step, but moreover conditions such as high temperature and/or high shear, which may sometimes result in a certain degree of degradation of the polymer or the reinforcing component, reduction of the fibre length. Hence a process for the preparation of reinforced polymer composites which does not require such a dispersion step would be a great improvement. The

process of the present invention offers such an improvement, as the precursor of the reinforcing component, i.e. the cellulose fibre material, and the precursor of the polymer matrix, i.e. vinyl chloride are contacted when the viscosity in the reactor is still relatively low, thus intimate mixing can be achieved in situ without degradation occurring. During the subsequent grafting/polymerization reaction a slurry is produced containing an intimate mixture of PVC homopolymer and PVC-grafted cellulose fibre material, i.e. a PVC homopolymer wherein the reinforcing component is present in a high degree of dispersion.

The process according to the present invention has a further advantage in that in the preparation of the PVC-grafted cellulose fibre material it is possible, by adjusting one or more process parameters, to vary more or less independently the add-on percentage of the cellulose, i.e. the percentage weight increase of the cellulose as a result of PVC grafting, as well as the PVC homopolymer content in the reaction product. The process thus offers the possibility of producing mixtures of PVC homopolymers and PVC-grafted cellulose of widely differing compositions while maintaining the high standards of the dispersion of the reinforcing component.

The cellulose fibre material which may be used in the preparation of the reinforcing component in the process of the present invention may originate from widely different sources and includes for example, cellulose fibres from hard wood, soft wood, cotton linters and flax.

The fibre dimensions are not critical but in order to achieve the highest degree of reinforcement there is a preference for long fibres, e.g. 2 mm and longer.

The cellulose fibre material and vinyl chloride will generally be used in a weight ratio in the range of from 5-95 to 55-45 w/w.

5 The metal-based polymerization initiators which may conveniently be employed in the process of the present invention are those wherein the or at least a metal has hydroxyl and/or 1,2-dihydroxy group complexing properties. Such metal compounds are known e.g. from The Chemistry and Technology of Cellulosic Copolymers, by A. Hebeish and J.T. Guthrie, Springer Verlag, 1981 and include cerium-, cobalt-, manganese- and vanadium-based compounds. Cerium-based polymerization initiators are preferred and include cerium ammonium nitrate and cerium ammonium sulphate. 10 Cerium ammonium nitrate is a preferred cerium-based polymerization initiator. 15

The metal-based polymerization initiators mentioned hereinbefore will generally be employed in an amount in the range of from 1.7×10^{-5} to 1.25×10^{-2} mol of metal having complexing properties, per gram of cellulose material and preferably in the range of from 3.4×10^{-5} to 2×10^{-4} mol per gram of cellulose material. 20

The grafting of the cellulose material will generally be carried out at a temperature in the range of from 20 to 70 °C. Preferably the reaction is conducted at a temperature in the range of from 30 to 50 °C. 25

The grafting reaction may be carried out by introducing all the reactants e.g. the cellulose fibre material, vinyl chloride and the initiator in the reactor before commencing the reaction. Alternatively only a part of the vinyl chloride and/or the initiator is introduced before commencing the polymerization, while the residual amount(s) is (or are) added in one 30 35

or more additions during the polymerization. Which mode of addition is employed may amongst others be determined by the composition of the reaction product required. The add-on percentage appears to be affected by the cellulose-vinyl chloride ratio, by the mode of initiator and vinyl chloride addition and the reaction time while the PVC homopolymer content appears to be primarily governed by reaction time and to a lesser extent by the ratio of cellulose and vinyl chloride. The highest add-on percentages appear to be obtained with a multiple vinyl chloride addition combined with a more or less continuous addition of a part of the initiator during the polymerization.

The percentage add-on which may be obtained during the grafting reaction in the process of the present invention may vary from less than 5 to more than 150 %w. Preferably the percentage add-on is in the range from 20 to 55 %w.

At the end of the grafting reaction the unreacted vinyl chloride is flashed off and the polymeric reaction product may be isolated from the aqueous slurry e.g. by filtration over a sieve or deposition on preformed screen at atmospheric or sub-atmospheric pressure. After washing with water and/or an alcohol such as ethyl alcohol, the filter cake obtained may be dried and used for the preparation of the reinforced PVC composites as mentioned hereinbefore.

Prior to drying, the filter cake may be pressed under one or more rollers, and after drying the obtained sheet may be introduced into a mould and compression moulded in one or more steps at elevated temperature. Alternatively the dried filter cake may be introduced into e.g. an extruder and the composite may subsequently be produced via compression or injection moulding.

Should the composition of the reaction product be deficient in PVC homopolymer then this deficiency can be remedied by the addition of separately prepared PVC homopolymer, e.g. by mixing PVC homopolymer powder into the vinyl chloride-free aqueous slurry obtained at the end of the cellulose grafting reaction step, or by dry-blending with the reaction product. Alternatively it is also possible to employ e.g. a grafted cellulose-rich reaction product as a grafted cellulose masterbatch and disperse said masterbatch into the required amount of PVC homopolymer or another type of suitable polymer matrix, which dispersion may conveniently be conducted on a two-roller mill.

The process of the present invention should not be interpreted to be restricted to the preparation of reinforced composites based on rigid PVC, as the preparation of reinforced PVC composites based on flexible PVC is also considered to be part of the invention. Such flexible PVC composites may conveniently be obtained by dispersing the isolated reaction product of the grafting reaction into a suitable plasticizer, to provide composites wherein the plasticizer to PVC weight ratio is in the range of from 30:100 to 80:100 w/w.

As both at least a considerable part of reinforcing component in the composite as well as the polymer matrix are based on PVC, the composite will almost certainly require the presence of at least a stabilizer for PVC, for which any conventional PVC-stabilizer or stabilizer system may be employed. PVC-stabilizers are known from the technical literature such as "Encyclopedia of PVC" Vol. 1, published by Marcel Dekker, New York 1976.

The incorporation of the stabilizer may conveniently be effected by dissolving the stabilizing

compound or compounds in a solvent which has good wetting properties for PVC, e.g. isooctane, and mixing the obtained solution with the reaction product and subsequently evaporating the solvent. The stage at which the stabilizing compound(s) is (or are) incorporated is not critical, and may conveniently be carried out before or after isolating the reaction product from the reaction medium.

The composition of the composites may optionally include additives such as for example, processing aids, release agents as well as pigments, fillers and dyes. Such components may be added at any convenient stage during the process according to the present invention.

The invention will be further illustrated by the following examples for which the following information is provided:

a) Abbreviations Used:

CAN : cerium ammonium nitrate
VC : vinyl chloride
DOP : dioctyl phthalate
ESO : epoxidized soyabean oil

b) Cellulose Types:

A : defluffed paperpulp
B : eucalyptus
C : cotton linters
D : whatman

c) Procedure for analyzing "grafted" cellulose:

A weighed sample of dried reaction product is extracted with tetrahydrofuran (THF) in a Soxhlet apparatus for 20 h, resulting in a THF-soluble fraction being PVC homopolymer and a THF-insoluble fraction being PVC-grafted cellulose. Both fractions are dried and weighed.

d) Procedure for calculating the composition of the "grafted" cellulose:

Definitions used:

5 M : weight of vinyl chloride introduced into the reactor

W : weight of cellulose

G_c : weight of THF-insoluble fraction (PVC-grafted cellulose)

10 h : weight of THF-soluble fraction (PVC homopolymer)

G : weight of grafted PVC, = $(G_c - W)$

Percentage VC conversion = $\frac{G + h}{M} \times 100\%$

" Add-on = $\frac{G}{W} \times 100\%$

" Efficiency = $\frac{G}{G + h} \times 100\%$

15 e) Additives used:

Epoxidized soyabean oil, Edenol D 81 (trade name) ex Henkel.

Mark LC 299: Ba/Cd stabilizer ex Lancro Chemicals.

20 Example I

Preparation of PVC-grafted cellulose via a batch process, wherein all the reactants are present in the reactor before the reaction commences.

25 The preparation of the PVC-grafted cellulose was conducted in a 9 l stainless steel autoclave, containing 7 l of demineralized water. The cellulose was dispersed in the water and the obtained slurry was deaerated. Next a solution of

ceric ammonium nitrate in nitric acid and vinyl chloride were introduced into the reactor. Under moderate stirring the reactor contents were heated to and maintained at the temperature for a length of time as indicated in Table 1 hereinafter. Table 1 furthermore shows the quantities of the reactants used in each of the experiments. Subsequently the unreacted vinyl chloride was flashed off and the reaction product was isolated by draining, washed with water and ethanol, dried and analysed to provide the product data as given in Table 1.

Example II

Preparation of PVC-grafted cellulose via a batch process wherein the vinyl chloride and the initiator solution were introduced via a staged addition

The preparation of PVC-grafted cellulose as in Example I was repeated with the exception that only a part of the vinyl chloride and the initiator had been introduced into the reactor before starting the reaction while the remainder of these reactants were introduced during the reaction via a staged addition. The compositions of the reaction products thus obtained are given in Table 2 together with the corresponding process data.

Example III

Preparation of reinforced rigid PVC composites

Reinforced PVC composites were prepared employing reaction products as prepared according to Examples I and II. The powdered reaction products were treated with a 2 %w solution of Irgastab MOK-17 (trade name) in isooctane in an amount sufficient to provide a composition which

contained 1.5 %w stabilizer on reaction product. Subsequently the isooctane was removed by evaporation at 20 °C under sub-atmospheric pressure. The stabilized reaction product was dispersed in excess (about a hundred fold) water, and when required sufficient PVC powder (CARINA S 60-12 trade name) was stirred into the slurry to obtain a composite with the desired cellulose content. The dispersed particles were isolated from the aqueous slurry by depositing the slurry on a dewatering screen to achieve fast draining of the water. The resulting water-containing sheets were compressed while still on the screen with e.g. a metal roller to remove more water.

Subsequently the sheets were removed from the screen and dried in air at ambient temperature (about 20 °C) under sub-atmospheric pressure. The dried sheets were subsequently transferred to a flat 2 mm mould and heated to 180 °C under a pressure of 20 bar. Upon reaching 180 °C heating was continued for 1 min under a pressure of 200 bar. The resulting composites were used to prepare test samples for testing a number of mechanical properties following the NEN 7105 (September 1981) test method. Comparative test specimens were prepared based on non-reinforced PVC-composites employing CARINA S 60-12. The mechanical properties together with the corresponding composite compositions are given in Table 3.

Example IV

Preparation of flexible reinforced PVC composites

The reaction product as prepared according to experiment 8 was dispersed in dioctyl phthalate and mixed, when required with PVC-powder CARINA S 70-16 (trade name) together with three additives

in the ratios as indicated in Table 4 hereinafter. The mixtures were subsequently gelated and homogenized on a two-roller mill at 160 °C for 5 minutes. The sheets were pressed into 2 mm thick composites following the same procedure as mentioned in Example III hereinbefore. The tensile modulus of the thus obtained flexible composites was measured according to B.S. 2782 Part III 1970, method 301 E. The results obtained and the corresponding composite compositions are given in Table 4 hereinafter together with those of a non-reinforced flexible PVC composite.

5

10

Table 1

Exp.	Cellulose g	CAN * (100%) g	VC g	Temp. °C	Time Min.	Product g	VC Conversion %	Add-On %	Efficiency %
1	62.5 (A)	2.3	190	40	19	90.6	15	24	54
2	62.5 "	2.3	190	40	33	137	40	38	32
3	62.5 "	2.3	190	40	48	157	50	40	28
4	62.5 "	2.3	190	40	150	175	69	55	26
5	62.5 "	2.3	290	40	150	294	80	69	19
6	62.5 "	2.3	570	40	150	310	43	67	17
7	62.5 "	6.9	570	40	260	214	26	57	24
8	50 (B)	1.8	150	40	630	136	57	49	31
9	50 (C)	1.8	150	40	660	124	50	47	31
10	50 (C)	1.8	150	40	900	136	57	54	38
11	50 (D)	1.8	150	40	900	105	37	25	23
12	62.5 "	2.3	190	31	150	156	50	25	16
13	125 "	2.3	350	31	150	385	79	47	22
14	62.5 "	2.3	190	31	70	124	32	33	24
15	500 "	9.2	150	31	150	1625	86	67	30

* dissolved in 45 ml 1 N nitric acid.

Table 2

Exp	Cellulose g	CAN (100%)			VC		
		In Reactor g	Added g	Mode of Addition	In Reactor g	Added g	Mode of Addition
16	62.5 (A)	2.3	4.6	2x2.3g**	190	380	2x190g**
17	125 "	2.3	4.6	2x2.3g**	350	700	2x350g**
18	62.5 "	2.3	4.6	C*	190	380	2x190g**
19	62.5 "	2.3	4.6	C*	190	380	2x190g**

C* Continuous addition

** indicates two additions of

Exp	Temp °C	Time Min.	Product g	VC	Add-On %	Efficiency %
				Conversion %		
16	40	120	509	88	112	16
17	40	139	1030	86	114	16
18	40	150	525	81	134	18
19	40	240	555	86	130	17

Table 3

Exp	Reaction Product (Stabilized)		PVC Powder	Cellulose Content	Add-On	Flexural Modulus	Tensile Modulus
	From Exp	g	g	%	%	GPa	GPa
20	9	15	-	38	47	-	7.6
21	9	15	4	30	47	-	6.8
22	9	15	23	15	47	-	4.9
23	11	x*	-	48	25	-	7.7
24	12	x*	-	40	25	7.4	7.0
25	13	x*	-	32	47	7.5	6.3
26	14	x*	-	50	33	9.4	8.5
27	16	x*	-	31	67	5.8	6.5
28	17	x*	-	12	114	4.7	4.5
Comparative Experiment	-	-	x*	-	-	3.2	2.3

* Indicates that amount of material used is not important as no other component was added.

Table 4

Exp	Reaction Product		DOP	PVC Powder	ESO	LC 299	Stearic Acid	Cellulose Content	Tensile Modulus
	Form	Exp							
29	8	26.1	65	84.1	1.98	1.98	0.33	6.2	41.8
30	8	52.6	65	68.0	1.98	1.98	0.33	12.5	32.2
Comparative Experiment	-	-	65	100	1.98	1.98	0.33	-	14.5

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A process for the preparation of reinforced polyvinyl chloride (PVC) composites, containing PVC-grafted cellulose fibre material as reinforcing component, which process comprises the following steps:
5 Step A: grafting vinyl chloride onto a cellulose fibre material, by polymerization in an aqueous medium in the presence of a polymerization initiator based on a metal which complexes to hydroxyl and/or 1,2-dihydroxy groups, thus
10 providing a reaction product which is essentially a mixture of PVC-grafted cellulose fibre material and PVC homopolymer,
Step B: isolating the reaction product from the aqueous medium as under Step A, and
15 Step C: employing the isolated reaction product as under Step B to prepare said reinforced PVC composite via a thermal moulding process.
2. A process as claimed in Claim 1, wherein the polymerization initiator is employed in a ratio in the
20 range of from 1.7×10^{-5} to 1.25×10^{-2} mol of said metal per gram of cellulose.
3. A process as claimed in claim 1 or 2, wherein said metal is cerium.
4. A process as claimed in any of the preceding
25 claims, wherein a staged addition of the initiator is employed.
5. A process as claimed in Claim 4, wherein a part of the initiator is introduced before starting the polymerization and the remainder is added continuously
30 during the polymerization.

6. A process as claimed in any of the preceding claims, wherein a staged addition of the vinyl chloride is employed.

5 7. A process as claimed in any of the preceding claims, wherein the grafting reaction is conducted at a temperature in the range of from 20 to 70 °C.

10 8. A process as claimed in any of the preceding claims, wherein the cellulose fibre material and the vinyl chloride are used in a weight ratio in the range of from 5-95 to 55-45 w/w.

15 9. A process as claimed in any of the preceding claims, wherein a PVC stabilizer is incorporated in the reaction product of the grafting reaction, before or after isolating the reaction product from the aqueous medium.

10. A process as claimed in any of the preceding claims, wherein separately prepared PVC homopolymer is mixed with the reaction product before or after isolation from the aqueous medium.

20 11. A process as claimed in any of the preceding claims, wherein the reaction product is mixed with a PVC plasticizer.

25 12. A process as claimed in claim 11, wherein a weight ratio of plasticizer to PVC in the range of from 30:100 to 80:100 is used.

13. A process for the preparation of reinforced polyvinyl chloride (PVC) composites which process is substantially as herein described with reference to Example III or Example IV but excluding any experiment therein for comparative purposes.

~~14. The invention substantially as herein described~~

DATED this TWENTY-SECOND day of MARCH 1988
Shell Internationale Research Maatschappij B.V.

Patent Attorneys for the Applicant
SPRUSON & FERGUSON

