

March 3, 1953


E. ALLGAIER

2,629,941

EDUCATIONAL DEVICE FOR DEMONSTRATING THE
PRINCIPLE OF INTERNAL-COMBUSTION ENGINES

Filed July 20, 1950

2 SHEETS—SHEET 1

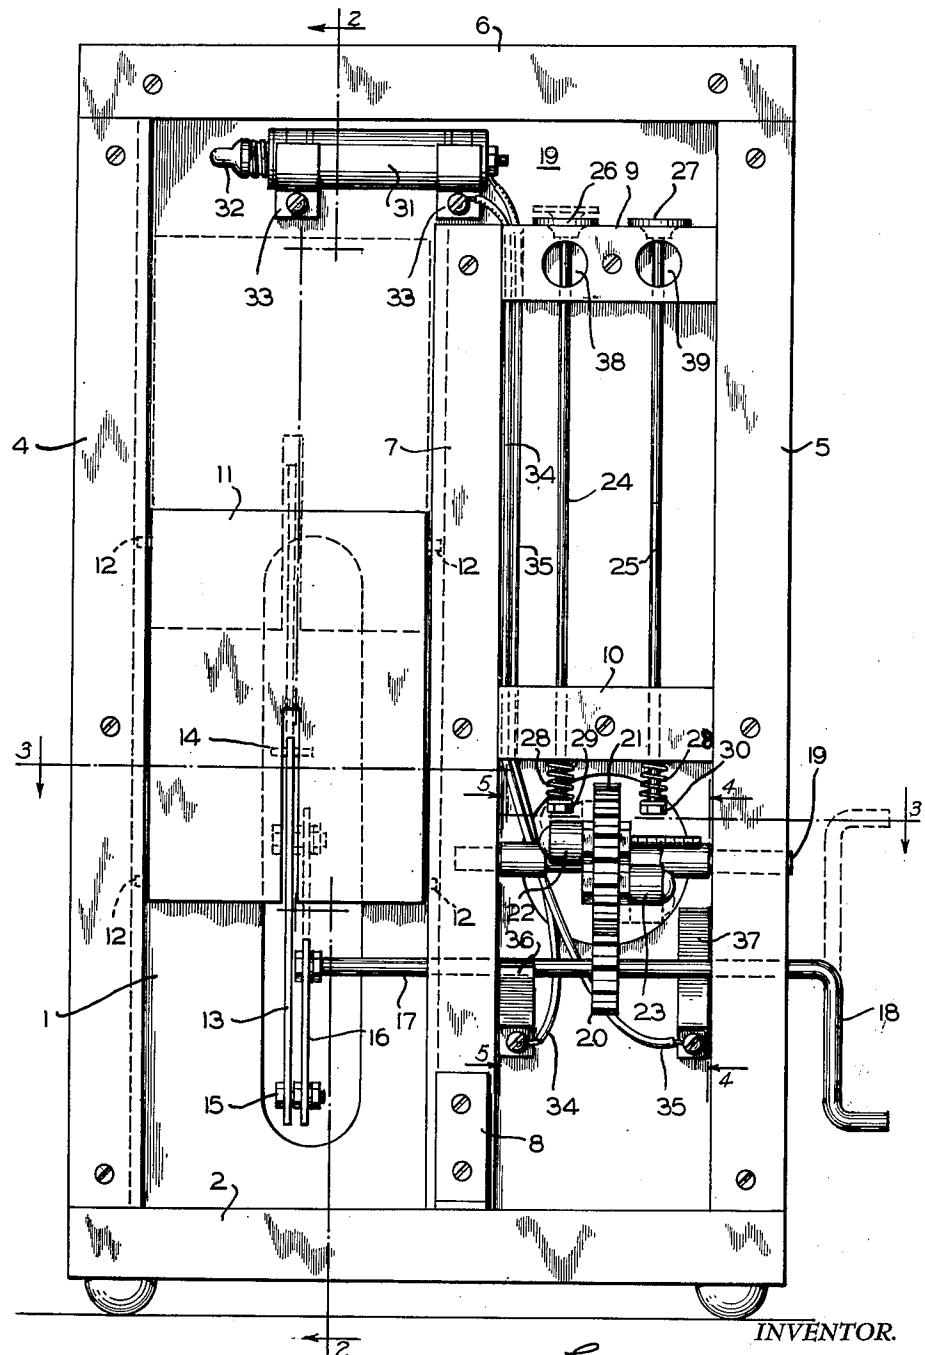

INVENTOR.

Carl Allgaier
By Albert H. Kichner

ATTORNEY

Fig. 1

March 3, 1953


E. ALLGAIER

2,629,941

EDUCATIONAL DEVICE FOR DEMONSTRATING THE
PRINCIPLE OF INTERNAL-COMBUSTION ENGINES

Filed July 20, 1950

2 SHEETS—SHEET 2

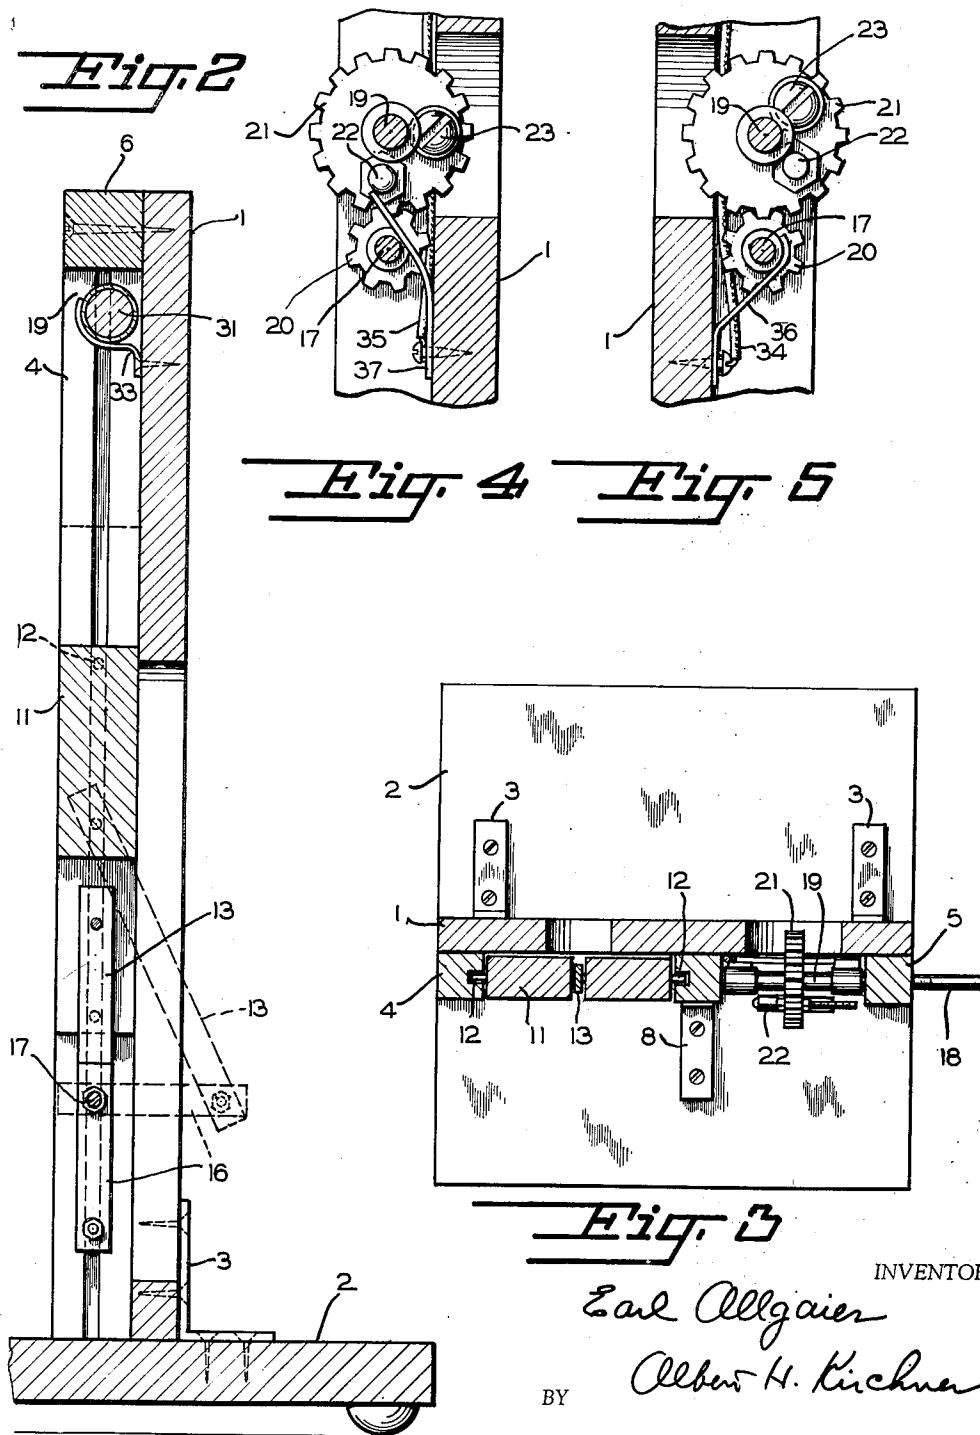

INVENTOR

Carl Allgaier

Albert H. Kirchner

BY

ATTORNEY

UNITED STATES PATENT OFFICE

2,629,941

EDUCATIONAL DEVICE FOR DEMONSTRATING THE PRINCIPLE OF INTERNAL-COMBUSTION ENGINES

Earl Allgaier, Arlington County, Va.

Application July 20, 1950, Serial No. 174,898

1 Claim. (Cl. 35—13)

1

The present invention relates to educational devices, and more particularly provides demonstration apparatus useful in teaching the structural and operative principles of the four-cycle internal combustion engine commonly used in automotive vehicles.

A primary object of the invention is to provide a device of the class indicated which will be simple and inexpensive to construct and which will graphically depict in an impressive manner the operative relationship and sequential movements of the pistons, crankshaft, camshaft, valves and related elements of the standard type of internal combustion engine, including also, in a full and preferred embodiment, the action of the sparkplugs.

To this end the device comprises, generally speaking, an open framework in which elements representative of the actual mechanical parts of a four-cycle engine can be hand-operated to show the compression, power, exhaust, and intake strokes of the piston, with the related movements of the exhaust and intake valves.

A preferred embodiment of the invention is depicted in the accompanying drawings, in which:

Figure 1 is a front elevational view of the device;

Fig. 2 is a vertical sectional view taken along the line 2—2 of Fig. 1;

Fig. 3 is a horizontal sectional view taken along the line 3—3 of Fig. 1;

Fig. 4 is a detail sectional view taken along the line 4—4 of Fig. 1; and

Fig. 5 is a detail vertical sectional view taken along the line 5—5 of Fig. 1.

In these drawings the reference numeral 1 designates an upright generally rectangular backing board, conveniently made of wood, mounted on a horizontal base 2 as by means of the small metal angles 3 shown in Figs. 2 and 3. Side risers 4 and 5 and a connecting top strip 6 are fastened to the front surface of the backing board as by means of wood screws, and approximately midway between the risers is an upright partition strip member 7 fastened to the base 2 by a metal angle 8 and to the backing board by screws and terminating at its upper end a short distance below the top 6. The partition 7 is connected to the riser 5 by a pair of vertically spaced transverse blocks 9 and 10. The block 9 has its upper surface in the transverse plane of the top of the partition 7, and the lower block 10 is spaced about midway between the block 9 and the base 2.

All the foregoing members are securely and

2

permanently connected together to form a rigid framework generally closed at its back and open at its front.

A block of wood or the like 11, representing a piston, is mounted for sliding movement in the space between the riser 4 and the partition 7, as by grooving the oppositely facing inner surfaces of the elements 4 and 7 to receive studs 12 outstanding from the block. The block is kerfed centrally upwardly from its lower end to about its horizontal middle plane, to receive a metal blade 13 acting as a connecting rod which is pivoted in the kerf by a pin 14 functioning in the manner of a wrist pin. The lower end of the connecting rod is pin-connected at 15 to a similar but shorter blade 16 which functions as a crank arm and is rigidly connected at its other end to a rod 17, representative of a crankshaft which is journaled in the partition 7 and riser 5 and projects from the latter as a handle 18.

It will be evident that manual rotation of the handle 18 will turn the shaft 17 and cause the block 11 to reciprocate in the manner of a piston in the space between the riser 4 and partition 7, which space is consequently representative of an engine cylinder.

The stroke is proportioned with relation to the heights of the riser 4 and partition 7 so that the limit of the upward movement of the block 11 is at about the level of the top of the partition. The space 19 above this top is thus representative of the combustion chamber of the engine.

A short camshaft 19 is journaled in the riser 5 and partition 7 parallel to the crankshaft 17 and about midway between the crankshaft and the lower block 10. The camshaft is driven from the crankshaft by means of a small pinion 20 splined on the camshaft and meshed with a gear 21 fixed on the camshaft. The ratio of the gear and pinion is two to one, so that two complete rotations of the crankshaft are required to turn the camshaft through a single complete rotation.

Cam-simulating elements are operatively related to the camshaft, as by affixing studs 22 and 23 to the gear 21. These elements may take the form of simple bolts projecting laterally out from opposite sides of the gear, paralleling the axis of the camshaft, and they may be provided with bushings sleeved around the bolt shanks and rotatable thereon.

Each of the cam elements, when rotated about the axis of the camshaft, is arranged to strike and lift one of a pair of valve stems 24, 25, which extend down through aligned openings in the upper and lower blocks 9 and 10. The valve stems

3

carry at their upper ends valve-simulating heads 26, 27, which normally seat down against the top surface of the upper block under the influence of coil springs 28, 29, compressed between the bottom surface of the lower block 10 and enlargements, such as nuts 29, 30, acting as cam followers, on the lower ends of the valve stems.

These enlargements 29, 30, are engaged by the cam elements 22, 23, respectively when the cam-shaft is rotated, and the engagement serves to lift the valves 26, 27. The lifting is sequential and cyclic as the cam-shaft turns, and of course occurs only while the respective enlargement is being engaged by the respective cam element 22 or 23, the springs serving to seat the valves after the cams turn out of engagement with the enlargements.

The cams 22, 23, are "timed" by properly spacing them peripherally around the gear 21, and by properly positioning them relatively to the connection of the piston block 11 relatively to the crankshaft 17, so that they will move to open and closed positions in the manner of intake and exhaust valves in proper relation to the movements of the piston 11, as will be more fully explained hereinafter.

To simulate ignition, a small electric lamp, battery and circuit may be used. I prefer to employ a self-contained assembly, such as the miniature flashlight 31 having a bulb 32, bracketed as by clips 33 above the stroke limit of the piston block 11, or above the communicating space over the valves 26, 27, i. e., in the space corresponding to the combustion chamber of the represented engine. The bulb 32 is arranged for flashing illumination to represent the sparking of a sparkplug cyclically during operation of the device, and to this end the battery-bulb circuit may include a pair of lead wires 34, 35, connected to a switch device which will close the circuit when and only when the piston block 11 approaches the end of that movement which represents its compression stroke. This of course is at the end of each alternate rising movement of the block.

In the preferred embodiment the lead wire 34 is connected to a brush 36 which wipes the crank-shaft 17 and hence is electrically connected through the pinion 20 and gear 21 to the cam-shaft 19. A second brush 37 is connected to the other lead wire 35 and extends in position to be engaged by a contact on the cam-shaft, which may be the elongated bolt on which the cam element 22 is formed. The brush 37 is so bent that the bolt of the cam element 22 will be wiped by it when the piston block 11 is at or near the end of one of its two up-strokes in the cycle. This contact completes the circuit and the bulb 32 lights.

In operation the handle 18 is manually turned. Assuming the parts to be in the position shown in Fig. 1, and the handle to be rotated clockwise as viewed from the right-hand side of Fig. 1, the two valves 26, 27, are in seated position and the piston block 11 rises. This is the compression stroke of the engine. When the handle has been turned 180°, to the dotted line position in Fig. 1, the piston has risen to its dotted line position, and the bolt of cam element 22 comes into contact with the brush 37 flashing the bulb 32 to indicate ignition. A slight further rotation of the handle opens the circuit, extinguishing the bulb, and the piston block moves down on its power stroke until the handle 18 resumes its full line position in Fig. 1. Continued rotation of

4

the handle then brings the cam element 23 into engagement with the enlargement 30 of the valve stem 25, so that valve 27 rises on further turning of the handle, accompanied by upward movement of the piston block. This is the exhaust stroke, and products of combustion in the cylinder and combustion chamber 19 are assumed to be exhausted past the raised valve 27, which thus represents the exhaust valve.

With the handle 18 turned again to its dotted line position, both valves are in closed position and the piston block is at the top of the cylinder. On further rotation of the handle the cam element 22 lifts the valve 26 as the piston begins its downward stroke on intake. Thus the valve 26 functions as an intake valve, remaining open during substantially all of this downward movement of the piston block.

The valve closes at the end of the intake stroke and the parts are again in the position first described, the cycle having been completed.

To make the representation even more realistic, the block 9 may be drilled to represent intake and exhaust ports 38, 39, open to the front of the device and communicating with the valve seats and undersides of the valves.

It will be evident that the device is easily and inexpensively constructed and extremely simple. It has been very effectively used to demonstrate the principle of the four cycle internal combustion engine universally used in automotive vehicles and has the advantages of being attractive and of inviting operation by the student.

The illustrated embodiment is the preferred one, but it is capable of being modified by changes in the specifically shown and described elements and by elimination of some of them without departure from the principles of the invention as defined by the appended claim.

I claim:

An educational device for demonstrating the principle of a four-cycle internal combustion engine comprising a base, a backing board supported by the base, and two side framing members and an intermediate partition member secured to the backing board to provide two upright side by side vertically elongated spaces both open at the front and connected across their tops by a transverse open area whereby one of said spaces represents a cylinder and said area represents a combustion chamber, a block representing a piston slidable in the cylinder-representing space, a pair of valves opening in said area and having operating rods extending slidably down into the other of the spaces, a shaft representing a crankshaft journaled in the lower portion of the device and connected with the block for rotation in response to sliding reciprocation of the block, a camshaft journaled in said other space between the crankshaft and the lower ends of the rods, cams mounted on the camshaft and operative on the lower ends of the rods, and reduction gearing connecting the two shafts to cause the valves to open and close in the manner of inlet and exhaust valves as the block reciprocates in the manner of the power, exhaust, intake and compression strokes of a piston, in combination with an electric light bulb positioned in the area representing the combustion chamber, a battery for said bulb, and a pair of contacts in circuit with the battery and bulb including a fixed contact and a contact movable with the camshaft to engage the fixed contact and close the circuit to light the bulb in representation of the ignition action of a spark plug.

2,629,941

5

on each alternate rise of the block representing the terminal portion of the compression stroke of a piston.

EARL ALLGAIER.

REFERENCES CITED

The following references are of record in the file of this patent:

6

UNITED STATES PATENTS

Number	Name	Date
508,247	Schwab et al.	Nov. 7, 1893
800,000	Melrose	Sept. 19, 1905
5 2,008,634	Aird	July 16, 1935
2,166,818	Miceli	July 18, 1939

FOREIGN PATENTS

Number	Country	Date
10 566,731	Germany	Dec. 20, 1932
577,899	Germany	June 7, 1937