



- (51) **International Patent Classification:**
E04B 1/348 (2006.01) *E04B 9/32* (2006.01)
- (21) **International Application Number:**
PCT/IB2013/061301
- (22) **International Filing Date:**
24 December 2013 (24.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
605325 24 December 2012 (24.12.2012) NZ
- (72) **Inventor; and**
- (71) **Applicant : RYAN, Grant** [NZ/NZ]; 2 Rhodesvale Terrace, Cashmere, Christchurch, 8022 (NZ).
- (74) **Agent: REDPATH, Ashlin;** 61 Treeton Place Wakefield, Nelson, 7025 (NZ).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,


BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** A DWELLING

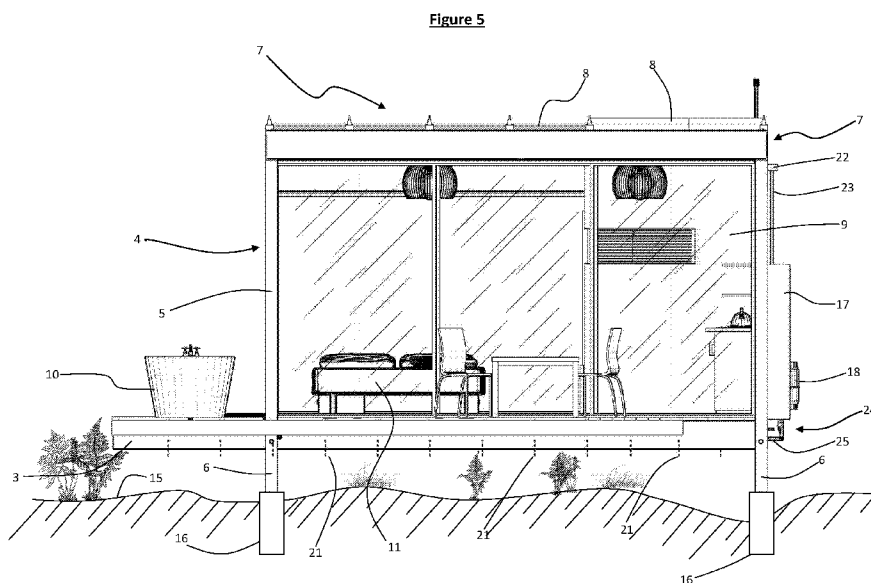

(57) **Abstract:** A terrestrial dwelling (1) including a floor (2) with at least one floor section (3) orientated substantially horizontally in use. The dwelling includes at least one wall (4), including at least one wall section (5) projecting substantially upwardly from the floor section (3). A dwelling support (6) is configured to at least partially elevate the floor section (3) above a terrain surface (15). A roof (7) with at least one roof section (8) is attached to an upper portion of said wall (4) wherein the dwelling (1) is configured to provide at least partial atmospheric transparency to at least partially allow atmospheric elements including light incident on the dwelling (1) above the floor (2) to reach the terrain surface (15) under the dwelling (1).

TITLE: A Dwelling**Technical Field**

The present invention relates generally to a building, shelter, dwelling or the like. In particular, the present invention relates to buildings possessing at least partial visual,
5 environmental or atmospheric transparency.

Background Art

Environmental awareness has become increasingly prominent in the mainstream consciousness of governments, companies, organisations and individuals. Recognition of the need to minimize the impact of human activities and our habitations
10 on the environment are being incorporated as a significant metric in assessing the viability of many new buildings, particularly in areas of recognised natural beauty, sensitivity and/or rarity.

Many countries now place strict conditions for the erection of any structure, shelter, or habitation in such areas of high conservation value. Planning restrictions, consents,
15 covenants, and myriad other forms of restrictions may apply not only to the structure's nature and configuration but also the on-site effects of its construction method.

It is widely held as self-evident that such regulatory and even statutory restrictions used to safeguard the environment will become even more prevalent and pervasive in the future. In some regions, even placement of a tent or the regular parking of
20 campervan/motorhomes on the same position for more than a short period is prohibited due to the detrimental deprivation of light and moisture on the flora and fauna covered by the tent/campervan.

However, the very same facets of the environment that are at the heart of such protective measures are also the main reasons people are attracted to such areas.

There is thus a paradox in trying to prevent any adverse impact from humans in areas of recognised beauty and attractiveness, whilst simultaneously seeking to avoid impairing the actual enjoyment experienced by being in the area.

Attempts have been made to provide a minimal impact on the earth's surface by use
5 of unorthodox structures such as tree-houses, suspended tents and the like. While their elevation from the ground does allow the atmospheric elements uninterrupted passage to the ground underneath, they pose significant practicality complications which would deter many users. It would thus be desirable to provide a structure or dwelling capable of a minimal impact on its environment.

10 Whilst hiking, mountain biking, trail running, kayaking and the like can all bring humans into temporary or periodic contact with the countryside, it is nevertheless necessary to provide some form of shelter to enable humans to enjoy a more prolonged exposure to the countryside, particularly for overnight periods. Many forms of shelters have been devised to provide accommodation for recreational/leisure
15 pursuits. Such recreational shelters are intended to provide at least some enhancement its user's experience of their environment, in contrast to application-specific structures such as emergency shelters, military, civil engineering, industrial or administrative structures for example.

However, such existing recreational structures face the antagonistic design
20 requirements of exposing the users to the environment, whilst also protecting them from inclement or adverse weather. Typically, increasing the weather protection and comfort of a structure results in an increased structure weight and cost as more substantial material and techniques (e.g. solid walls and roofs, windows, decking, verandas, foundations, permanent beds, furniture, toilets and kitchen utilities) are
25 incorporated. Inevitably, construction techniques such as solid walls and the like separate the occupants from direct immersion in their environment.

A direct immersion in the environment can be achieved by non-permanent structures such as bivouacs, tents, and so forth. However, tents and bivouacs are typically considered uncomfortable, compromised or restrictive in inclement conditions, requiring sealing of the entranceways and openings and thus obturating the users
5 from their environment.

The capacity to witness and be exposed to the dynamics and visuals of bad weather whilst being sheltered in comfort holds strong appeal for many people. Indeed, the degree to which a dwelling allows an occupant to see, feel, smell, and/or touch the environment can be instrumental to their connection with, and sense of enjoyment of,
10 the environment. Ideally, a recreational dwelling would protect occupants from wind, rain, and excessive cold or heat, while still allowing the occupants a feeling of immersion with their surroundings.

It would thus be highly desirable to provide a recreational dwelling capable of a minimal impact on its environment whilst protecting occupants from inclement
15 weather.

All references, including any patents or patent applications cited in this specification are hereby incorporated by reference. No admission is made that any reference constitutes prior art. The discussion of the references states what their authors assert, and the applicants reserve the right to challenge the accuracy and pertinency
20 of the cited documents. It will be clearly understood that, although a number of prior art publications are referred to herein; this reference does not constitute an admission that any of these documents form part of the common general knowledge in the art, in New Zealand or in any other country.

It is acknowledged that the term 'comprise' may, under varying jurisdictions, be
25 attributed with either an exclusive or an inclusive meaning. For the purpose of this specification, and unless otherwise noted, the term 'comprise' shall have an inclusive

meaning - i.e. that it will be taken to mean an inclusion of not only the listed components it directly references, but also other non-specified components or elements. This rationale will also be used when the term 'comprised' or 'comprising' is used in relation to one or more steps in a method or process.

- 5 It is an object of the present invention to address the foregoing problems or at least to provide the public with a useful choice.

Further aspects and advantages of the present invention will become apparent from the ensuing description which is given by way of example only.

Disclosure of Invention

- 10 According to a preferred aspect, the present invention provides a terrestrial *dwelling* including:

- a *floor* including at least one *floor section*, orientated substantially horizontally in use;
- at least one *wall* including at least one *wall section*, projecting substantially
15 upwardly from said *floor section*;
- a *dwelling support*, configured to at least partially elevate the *floor section* above a terrain surface,

wherein said *dwelling* is configured to provide at least partial atmospheric transparency.

- 20 Atmospheric transparency as used herein refers to the capacity of the *dwelling* to at least partially allow atmospheric elements incident on the *dwelling* above the *floor* to reach the terrain surface under the *dwelling*. Thus, the *dwelling* is in effect at least partially atmospherically transparent insofar as the net effect on any flora and fauna (i.e. the biota) located on the terrain surface under the *dwelling*. The sub-dwelling

biota therefore experiences substantially equivalent atmospheric conditions under the *dwelling* as the uncovered biota adjacent to the *dwelling*. It can be seen therefore that despite its presence, the *dwelling* contributes a minimal effect on its environment.

Preferably said *dwelling* also includes a *roof* including at least one *roof section*
5 attached to an upper portion of said *wall*. However, it should be understood the *dwelling* is not restricted to any specific configuration of *walls* and/or a roof.

As an illustration, a *dwelling* configuration such as a 'lean-to' may combine the function and role of both a *wall* and *roof section* and as such are incorporated within the scope of the invention.

10 Said dwelling may be configured with any desired facilities according to its intended purpose, e.g. recreational, residential, administration and so forth. According to one embodiment, said dwelling includes one or more of a:

- toilet;
- bed;
- 15 - cooking facilities;
- washbasin;
- Shower or bath;
- plumbing;
- heating source.

20 According to one embodiment, said *dwelling support* includes at least one *floor section support*, located beneath at least one *floor section* to support and at least partially elevate the *floor section* above the terrain surface. In an alternative embodiment, the *dwelling support* includes at least one *suspension element*, configured in use to suspend the *dwelling* from an anchor point affixed to the terrain

surface. The *dwelling* may thus be suspended from one or more trees, above a ravine, stream or from the side of a ledge or the like.

The *dwelling* may be configured with a floor substantially coterminous with said *wall sections* or have one or more floor sections projecting beyond the perimeter of the *wall sections* to form decking, walkways or the like. In either case, the outer perimeter of the floor presents a *dwelling footprint* which defines the overlapping coverage of the *dwelling* over the terrain surface in plan view.

According to one aspect, said *dwelling* configuration is atmospherically transparent to at least one (and preferably two or more) atmospheric elements selected from the group comprising;

- rain and/or any other forms of airborne moisture;
- light, and
- wind.

The above-described atmospheric elements are key components affecting the sustainability of any life forms present under the *dwelling*. As the *floor* of the *dwelling* is at least partially elevated above the terrain surface, it is clearly possible to allow wind to pass underneath simply by ensuring at least a portion of the *dwelling* perimeter under the *floor* is open, allowing airflow therethrough.

In contrast however, the persistent obstruction of sunlight and/or moisture is typically terminal for plants. Whilst some plant and fungus may grow in moist environments without direct sunlight, it will be readily appreciated that the creation of such an environment by placement of a *dwelling* is nevertheless significantly altering the environment.

To allow incident light to reach the terrain surface under the *dwelling*, either the light must be deflected or reflected around the *floor* and *walls* or pass through the *dwelling*.

Glazed or otherwise transparent materials are well known for use in construction for windows, doors, skylights, panels and even roofs. It is unusual however to employ such materials for *flooring* purposes. Glass panels have been employed as *flooring* in specialised instances such as observation portals in overhanging sections of high
5 towers, bridges, walkways or stairs. The intended primary purpose of such panels is to permit human observation of the area below the panel and not to permit the passageway of light to support organic life beneath.

According to one embodiment, at least one said *floor section* is transparent.

Preferably, at least one *wall section* is transparent.

10 According to one embodiment, at least one *roof section* is transparent.

Preferably, said transparent *floor section* and transparent *wall section* are mutually positioned to at least partially allow light incident on the transparent *wall section* to reach the terrain surface under the *floor* by passing through said transparent *floor section*.

15 Preferably, said transparent *floor section* and transparent *roof section* are mutually positioned to at least partially allow light incident on the transparent *roof section* to reach the terrain surface under the *floor* by passing through said transparent *floor section*.

The transparent *wall sections* may be formed as windows, doors, complete *wall*
20 panels or any combination of same.

Although elevated buildings are well known (e.g. hillside dwellings built on piles, support beams and the like) and substantially transparent buildings are known (e.g. green-houses), it is not known to combine both characteristics for the specific purpose of allowing sunlight to pass through the *dwelling* and fall on the terrain surface below.

It will be appreciated that depending on the local climate and on a *dwelling's* configuration and orientation sufficient rain and other airborne moisture may be deposited underneath the *dwelling* to allow plants to grow.

To minimise the impact of the *dwelling* on the biota beneath the *floor*, it will be appreciated however that the same quantity and distribution of the moisture that would otherwise have been received on the terrain surface needs to be provided. Thus, according to a further aspect of the present invention, said *dwelling* is configured to provide at least partial atmospheric transparency to atmospheric elements in the form of rain and/or any other forms of airborne moisture.

When moisture, e.g. rain, strikes a non-absorbent surface of any structure, the moisture follows the most direct gravitational path downwards. Typically, rain water run-off from roofs is collected at a periphery by guttering before being channelled down a *wall* via a downpipe to a storm water system (if present), rain collection tank, detention tank, and/or discharged directly into the local environment.

Clearly a potentially large volume of water discharged from a point source (e.g. a drainpipe outlet) can cause erosion and/or flooding problems without careful management and maintenance. Moreover, such arrangements clearly have a detrimental impact on the environment by artificially drying the area under the building and increasing the water deposited at the storm water discharge point.

The present invention substantively ameliorates these difficulties by allowing the rainwater incident on at least a portion of the *dwelling* to be routed around the *dwelling* and re-dispersed underneath the *floor* onto the terrain surface below.

According to one embodiment, the *dwelling* is configured to divert the moisture incident on at least one:

- *roof* section;

- *wall section*, and/or
- uncovered *floor section* forming a walkway or deck area exterior to the *dwelling's wall sections*,

to be re-dispersed under the *floor* onto the terrain surface below.

- 5 The incident moisture may be diverted by any convenient method including, but not limited to;

- collecting *roof* run-off in at least one *roof* periphery gutter;
- allowing *roof* run-off to travel down a *wall section*;
- allowing *roof* run-off to drip into collectors located substantially at the *floor*
10 level;
- collecting *roof* run-off into a water storage or detention tank;
- transferring moisture run-off from the *roof* and/or *walls* to one or more apertured conduits, drippers, sprinklers, or other *irrigation distribution system* beneath the elevated *floor*, and/or
15 - any combination or permutation of same.

Possible configurations to facilitate the transfer of the incident moisture to the terrain surface under the *dwelling floor* may range from simple, gravity-operated conduits to more elaborate fluid distribution systems. Clearly, for the example of a simplified, minimalist *dwelling* placed in a remote location without a connection to the national
20 power grid, a maintenance-free, gravity operated system offers attractions. Alternative adaptations that may be applicable in such situations include a degree of electro-mechanical intervention in the distribution and the timing/volume control of the moisture, preferably powered by a self-sustaining source such as a solar photovoltaic panel.

In simplified applications, the water collected from the incident moisture may simply be channelled along a network of small diameter irrigation tubing with a plurality of small, evenly-spaced outlets to facilitate a uniform distribution of the fluid over the terrain surface.

- 5 In one embodiment, the irrigation tubing may conveniently be attached to support joists located underneath the *floor sections*.

It will be appreciated that when the *dwelling* construction includes a predominance of transparent *wall sections* and *floor sections*, the occupants can even witness the moisture from the *roof* and *walls* being re-distributed underneath the *dwelling*.

- 10 In a further embodiment, the collected moisture may be temporarily stored in a detention tank that provides a water reserve for drinking and bathing/showering. The detention tank would thus operate to fill to a predetermined level, whereupon any excess collected fluid bypasses, or overflows from the tank straight to fluid irrigation outlets beneath the *dwelling*. Any grey water produced by the bathing/showering can
15 also be diverted straight to the irrigation system, provided any soaps or detergent agent used are compatible with the appropriate environmental restrictions for that area. The next rainfall will then re-fill the detention tank to said predetermined level before being diverted to the irrigation outlets.

- The biota present below the *dwelling* is thus still provided with a substantially
20 comparable degree of moisture and light to that received without the presence of the *dwelling*. This greatly minimises the impact of the *dwelling* on the environment, to the extent that even a tent or campervan positioned in the same location would cause greater environmental harm. It can be thus seen that the present invention offers the ability for users to enjoy the comfort of sheltered accommodation in areas of high
25 natural beauty without the accommodation damaging the very environment that attracted the users.

The present invention may be further optimised to provide the occupants with immersion in their environment, while maintaining a minimal environmental footprint.

Forming the *dwelling* as a relatively small structure, e.g. holiday accommodation suitable for two occupants, enables the *dwelling* to be placed in restricted spaces of
5 environmental interest unfeasible for conventional buildings, such as in woodlands, near streams, gullies, small islands and so on.

A small size and lightweight construction not only results in less construction materials (and thus a small environmental manufacturing cost) but also reduces the weight of the *dwelling*. Conventional construction methods typically require the use of heavy
10 permanent materials (e.g. bricks, concrete, wooden *wall* cladding, tiled roofing etc.) to ensure durability and weather resistance with a commensurate need for foundations with an appropriate load capacity. Common foundation methods such as strip, slab, pad, raft or pile foundations all require appreciable earthworks. Not only is the terrain surface covered by the actual footprint of the building permanently altered, there is
15 usually a significant disruption to the terrain around the building perimeter during construction. In contrast, the *dwelling* according to present invention is capable of being supported above the terrain by a variety of techniques which have a negligible impact on the environment.

As previously discussed, the *dwelling* may be suspended above the terrain surface by
20 one of more *suspension elements*, attached to anchor points affixed to the terrain surface. The anchor points may be any appropriate natural features such as trees, rock features or outcrops and/or purpose-made ground anchors, rock bolts or the like. Such fittings may be secured in position with minimal disturbance to the environment and require negligible installation time.

25 The majority of settings would however typically use a non-suspended *dwelling*, where the *dwelling support* is formed from at least one *floor section support*, located beneath

at least one *floor section* to support to at least partially elevate the *floor section* above a terrain surface. In such configurations the *dwelling* may be secured to the terrain surface by one or more *terrain mounts* in the form of micro piles, spikes or similar ground-piercing fittings. The *terrain mounts* may be separate, discrete elements, to
5 which the *floor section supports* are attached, or be formed as continuous elements whereby the terrain mounts are incorporated as part of the *floor section supports* and formed as a single element. In either configuration, the *terrain mounts* are first inserted into the terrain surface to act as secure mounting points on which *dwelling* is secured.

10 According to one embodiment, the *dwelling* is formed as a substantially rigid skeletal frame to which *floor sections*, *wall sections* and *roof sections* are attached. Although such framing is ideally suited to the properties of steel, alternatives such as wood, or composites are also possible. The use of a skeleton framework with attached cladding of (predominately transparent) panels also facilitates modular construction,
15 whereby variations in the size, layout and orientation of the *dwelling* components may be readily produced by various permutations and combinations of the modules without substantial re-design. The minimalistic nature of the construction also minimises unnecessary environmental impact by minimising the quantity of material resources required, and the time to manufacture the components and assemble the final
20 *dwelling*. The light-weight modular construction of the *dwelling* also aides ease of transportation. The whole *dwelling* can be shipped to site in a kit-form for assembly, or pre-assembled and fitted straight onto the terrain mounts from a truck or even by helicopter.

Preferably the *floor*, *wall* and *roof* sections are predominately transparent. In order to
25 meet what is widely considered to be a minimum standard of comfort, recreational accommodation is expected to include at least a:

- toilet;
- personal washing/bathing facility, and
- bed.

Regardless of whether the *dwelling* is located in a position with complete privacy,
5 incapable of being overlooked by third parties, most users would still prefer to use a
toilet that is not visible through transparent *walls*. There is consequently no need to
form at least the *wall sections* or *floor sections* bounding the toilet with transparent
material.

Similarly, it is impractical to make a bed from transparent materials and thus the bed
10 *floor* panel immediately below the bed need not necessarily offer any advantages by
being transparent. It is an unavoidable practical consideration that various utilities and
services are more readily routed through a conventional non-transparent *wall section*.

Thus, according to one embodiment of the present invention, the *dwelling* includes a
bathroom area with opaque *wall sections*. The remainder of the *dwelling* may be
15 formed from transparent panels such as glass, transparent plastics, Perspex or
similar, to provide the occupants with substantially unimpeded visibility of the
environment.

Although the *wall section* surrounding a shower may optionally be made opaque or
translucent, users may, according to personal taste and proclivities, prefer to have a
20 transparent bathing and/or showering experience. This may be provided in a number
of different arrangements.

In a more conservative arrangement, the shower may be configured with opaque or
translucent *walls*, whilst the shower *floor* and/or *roof* is transparent. This allows more
privacy, whilst allowing the user to see the terrain below and sky above whilst
25 showering.

A bath may likewise be made with a transparent base and/or sides. According to preference, the bath may be placed either;

- on the *dwelling floor*, inside the *walls* or on an exterior deck, or
- recessed into the *dwelling floor*, either inside the *walls* or on an exterior deck.

5 Temperature regulation inside the dwelling may be provided by numerous conventional means. Due to the relatively small volume of the dwelling, a compact gas, liquid or solid fuel burner can provide sufficient heat during cold weather. In site with an electrical power supply, reverse-cycle air-conditioning units may provide temperature control at both extremes. Excess sunlight may be regulated to avoid
10 overheating or glare by internal blinds. The user-controllability of blinds also caters well for different privacy requirements according to the specifics of the location and/or users preferences.

In addition to shading sunlight, temperature and humidity may be regulated by opening/closing doors or windows and/or vents. In high humidity environments where
15 heating is not a primary consideration, portions of the dwelling walls and/or floor may be formed as apertured sections, such as a mesh, grid, latticework, framework or the like. Such materials may also be used for decking and walkway portions in any climate.

Buildings with substantially transparent *walls* are already known in the art, such as
20 green-houses for sheltered plant growth and accommodation buildings. They do not however provide the following capacities to further immerse to occupants in their environment, namely:

- the transparent *roof* provides an untrammelled view of the day and night sky;
- the transparent *floor sections*, in conjunction with the elevated position of the
25 *floor* above the terrain surface, allow the occupants to see directly and

obliquely downwards to see the environment immediately underneath and surrounding the *dwelling*. The occupant's elevated position, viewing the surrounding scenery through a substantially transparent structure engenders a feeling akin to floating above the environment, without being too high to feel immersed and connected to the surrounding environment.

- some of the *wall* sections and *roof* sections may be configured to be retractable, openable and/or removable in benign weather to further remove any barriers between the occupants and their surroundings.

There are tangible advantages in positioning the *dwelling* within a certain elevation above the terrain surface below. If this distance is too high;

- the occupants must negotiate some form of ascent/descent system such as ladders, stairs, or lift systems. This can be burdensome and cumbersome for the occupants, particularly if the site requires a steep climb to ingress/egress the *dwelling*;
- there is an increased risk of injury of a fall from a significant height;
- there is a detachment of the occupant from feeling connected to the environment and instead gives a perspective analogous to being in a plane, tower, or other 'man-made' vantage point.
- building compliance regulations typically prescribe some form of barrier for any living spaces elevated more than a predetermined height. Thus, any walkways, stairs, deck areas, or parts of the house that can be opened such as sliding doors, would require a protective guard rail, fence, barrier, balustrade or the like. Such protective measures not only add to the cost and complexity of the *dwelling*, they add yet another obstruction between the occupants and the environment.

However, a difficulty in placing the *dwelling* sufficiently close to the terrain surface to avoid the above draw-backs has hitherto resulted in an unavoidable impact on the environment as described previously.

Thus, according to one aspect of the present invention, said *dwelling* is elevated
5 above the terrain surface by a vertical distance such that at least part of the *floor* is below the regulatory maximum drop height requiring a protective barrier for the location of the *dwelling*.

Whilst the specific figures for a maximum drop height without a barrier vary between countries (e.g. New Zealand has a maximum drop height of 1m) it has been found that
10 the drop height should be less than approximately 1.5m and more preferably less than 1.1m. It will be appreciated that the terrain surface may not be uniformly level and that non-exposed portions of the *dwelling* may exceed that drop height without departing from the scope of the invention.

The present invention thus provides an environmentally friendly, primarily recreational
15 accommodation, capable of even being sited in areas of environmental sensitivity without adversely impacting its building site, and without depriving the biota beneath the dwelling from the environmental elements, rain, sunlight and wind. In essence the dwelling is transparent to the atmosphere, generating less impact on-site than a tent or motorhome.

20 As used herein, the following terms are defined as follows

'*Dwelling*'; – includes any habitable structure, building, shelter, cabin, house, crib, bach, including recreational and non-recreational *dwelling*s.

'Moisture'; - includes any airborne moisture, mist, fog, rain, spray, and/or drizzle.

'Wind'; - includes any atmospherically created air movements.

'Light'; - includes direct, reflected, indirect, and/or scattered sunlight and/or moonlight.

'Transparent', 'transparent panels', 'transparent materials'; - includes material that are transparent to at least one of light, moisture and wind, said materials including glass, and any clear plastics, acrylics and the like. Other non-opaque materials, gratings, mesh, latticework, perforated panels, netting and the like may also be used in parts of the dwelling as transparent panels, though it will be appreciated that at least the transparent roof sections are only formed from solid, non-perforated transparent materials.

Brief Description of Drawings

Further aspects and advantages of the present invention will become apparent from the following description which is given by way of example only and with reference to the accompanying drawings in which:

Figure 1 shows a first preferred embodiment of the present invention in the form of a *dwelling* shown from a first front perspective;

Figure 2 shows the *dwelling* of figure 1, shown from a first rear perspective;

Figure 3 shows the *dwelling* of figure 1, shown from a second rear perspective;

Figure 4 shows the *dwelling* of figure 1, shown from a second rear perspective;

Figure 5 shows a front elevation of the *dwelling* of figure 1;

Figure 6 shows a first side elevation of the *dwelling* of figure 1;

Figure 7 shows a second side elevation of the *dwelling* of figure 1;

Figure 8 shows a schematic side elevation of the interaction of light on the *dwelling* of figure 1;

Figure 9a shows a schematic side elevation of the interaction of rain water on the *dwelling* of figure 1;

Figure 9b shows a schematic side elevation of the interaction of rain water on a dwelling according to a further preferred embodiment of the present invention;

Figure 10 shows a further preferred embodiment of the present invention in the form of a *dwelling* shown from a first front perspective;

Figure 11 shows the dwelling of figure 10, shown with a sliding divider in an extended position.

Figure 12 shows a further preferred embodiment of the present invention in the form of a *dwelling* suspended over a precipice;

Figure 13 shows a front elevation of the *dwelling* of figure 12 suspended between two trees over a river;

Figure 14 shows a first front perspective of the *dwelling* of figure 12;

Figure 15 shows a first lower rear perspective of the *dwelling* of figure 12;

Figure 16 shows a second front elevation of the *dwelling* of figure 12;

Figure 17 shows a first plan view of the *dwelling* of figure 12;

Best Modes for Carrying out the Invention

Reference numerals for figures 1 -11.

(1) <i>dwelling</i> (2) <i>floor</i> (3) <i>floor section</i> (4) <i>wall</i> (5) <i>wall section</i>	(22) <i>roof gutter</i> (23) <i>downpipe</i> (24) <i>irrigation distribution system</i> (25) <i>irrigation tubing</i> (26) <i>joists</i>
---	--

(6) <i>floor section support</i>	(27) <i>floor gutter</i>
(7) <i>roof</i>	(28) <i>common service wall</i>
(8) <i>roof section</i>	(29) <i>sliding divider</i>
(9) <i>bathroom</i>	(30) <i>suspension element</i>
(10) <i>outside bath</i>	(31) <i>anchor point</i>
(11) <i>double bed</i>	(32) <i>support pole</i>
(12) <i>indoor lighting</i>	(33) <i>tree</i>
(13) <i>stove</i>	(34) <i>water feature</i>
(14) <i>deck</i>	(35) <i>solar panel</i>
(15) <i>terrain surface</i>	(36) <i>heater</i>
(16) <i>terrain mount</i>	(37) <i>flue</i>
(17) <i>water detention tank</i>	(38) <i>partition wall</i>
(18) <i>gas storage bottle</i>	(39) <i>toilet</i>
(19) <i>gas cooker</i>	(40) <i>shower cubical</i>
(20) <i>sunlight</i>	(41) <i>wall/door</i>
(21) <i>rain water</i>	(100) <i>dwelling</i>

Figures 1 - 9 show a first embodiment of the present invention of a structure in the form of a recreational *dwelling* (1) configured to provide at least partial atmospheric transparency, and including:

- a *floor* (2), comprised of a plurality of individual *floor sections* (3);
- 5 - four *walls* (4), comprised of a plurality of individual *wall sections* (5),
- a *dwelling support* in the form of four *floor section supports* (6),
- a *roof* (7) including a plurality of individual *roof sections* (8)

The *dwelling* (1) shown in figures 1 - 9 is shown by way of illustration only and the invention is not necessarily limited to same. Although configured as a minimalistic cabin for a couple, many alternative configurations may be utilised within the scope of the present invention. Intended as relatively short-stay holiday usage accommodation for individuals who wish to be highly immersed in their environment, the *dwelling* (1) is specifically intended to be sited in areas of high natural beauty, preferably private and isolated at least by line of sight from any other human habitations of activities.

15 The *dwelling* (1) includes a bathroom (9), an outside bath (10), a double bed (11), indoor pendant lighting (12) and a small stove (13).

The dwelling *walls* (4) define a substantially cuboid volume with a mono-pitch roof (7) with a deck (14) area projecting along one of the long and short sides. The *roof* (7) slopes upwards from a lower edge at the rearward edge along the long side of the cuboid towards the deck area (14) on the opposing side.

- 5 The *wall sections* (5) facing the deck area (14) are formed from sliding glass doors (either stacking or bi-fold) allowing the interior of the *dwelling* (1) to be almost completely opened to the environment.

Although in alternative embodiments (shown in figures 12 – 13 and described further below) the *dwelling* (1) may be suspended above the terrain surface (15) by
10 appropriate *dwelling supports*, the embodiment shown in figures 1 -9 is sited directly on the terrain surface by *dwelling supports* in the form of four *floor section supports* (6). The individual *floor section support* (6) attach to a corresponding *terrain mount* (16) which are inserted into the terrain surface (15). The *terrain mounts* (16) (shown in figure 5 only) may take any convenient form including micro piles, spikes or
15 similar ground-piercing fittings. Whilst figure 5 shows the *terrain mounts* (16) as separate elements, bolted to the *floor section supports* (6), they may be formed together as integral elements.

The *floor* (2), *walls* (4), and *roof* (7) are constructed from a steel framework predominately forming rectangular sections (forming the *floor section*, *wall sections*
20 and *roof sections* (3, 5, 8) respectively) which are clad, in-filled, or overlaid with a transparent or opaque panel according to their role and location.

According to the first preferred embodiment illustrated, all the *floor sections* (3) and *roof sections* (8) apart from those bounding the bathroom (9) are transparent glazed panels. The *wall sections* (5) forming the bathroom (9) are also opaque as well as the
25 adjacent side *wall* (4) which contains the services for the *dwelling* (1) including:

- a water detention tank (17), and
- gas supply lines from an exterior gas storage bottle (18) to a gas cooker (19) and heater (not shown).

The remaining *wall sections* (5) are configured as glass sliding doors. Thus, when the weather permits, both the glass panels of the three non-opaque *walls* (4) may be retracted towards the opaque *wall* (4), completely opening the *dwelling* (1) up to the atmosphere. In one embodiment, the transparent *roof sections* (8) may be configured to also retract towards the bathroom (9) to provide further immersion with the environment.

A key feature of the dwelling is its ability to minimise the impact on the environment. Although constructed from durable materials, the *dwelling* (1) is configured to be effectively 'invisible' or 'transparent' from the perspective of the existing biota adjacent and underneath the *dwelling* (1). The *terrain surface* (15) under the *dwelling* (1) is able to receive substantially the same light and atmospheric moisture as it would have received without the presence of the dwelling (1). This atmospheric transparency is achieved by a number of techniques.

In any environment, the salient atmospheric elements affecting the biota are the wind, light and moisture incident on the terrain surface.

As the *dwelling* (1) is elevated above the *terrain surface* (15) solely by the four elongate *floor section supports* (6), wind is able to pass freely under the elevated floor (2).

Light incident on the dwelling is also able to reach the *terrain surface* (15) by virtue of the transparent *wall sections* (5) and the transparent *floor sections* (3). Figure 8 illustrates schematically how sunlight (20) striking deck (14) directly is able to penetrate the transparent glass of the deck (14) and reach the *terrain surface* (15)

below. Sunlight (20) striking the glass wall sections (5) passes in a direct line through into the dwelling interior before passing through the glass floor sections (3) until reaching the *terrain surface* (15) below. It will also be readily appreciated that even through the trajectory and solar elevation angle of the sun varies annually and throughout the day, light is still able to reach the *terrain surface* (15). Considering the situation at the extremities of the sun's elevation;

- at very shallow incident (low) angles, sunlight (20) will still pass through the dwelling (1) as described above and may also pass directly under the floor (7) to the terrain surface (15) without striking the *dwelling* (1);
- at high incident angles, sunlight (20) may strike, and pass through, the transparent *roof sections* (8) before passing through either a transparent *floor section* (3) or a *wall section* (5) and then reaching the *terrain surface* (15).

The flora in the potential shadow of the *dwelling* (1) is thus actually still illuminated with light and able to photosynthesise.

The interaction of airborne moisture in the form of rain (coming into contact with the *dwelling* (1) is shown schematically in figures 9a and 9b. In the embodiment shown in figure 9a, rain (21) falling on the roof (7) runs downwards and falls from the lower roof perimeter into a roof gutter (22) positioned at the top of the adjacent wall (4). The rain water (21) then flows through a downpipe (23) down the outside of the wall (4) until reaching an *irrigation distribution system* (24) located below the level of floor (2). The *irrigation distribution system* (24) is a network of irrigation tubing (25) attached to a plurality of joists (26) spanning the underside of the floor (2).

In embodiments such as that shown in figures 1 – 9a, where the deck (14) surface formed from transparent *floor sections* (3) of solid panels of glass, the deck (14) surface is inclined slightly to allow the incident rain (21) to run off towards a floor gutter (27) at the edge of the deck (14) before feeding into the *irrigation distribution*

system (23). Numerous alternative methods may be employed to re-distribute the rainwater (from the upper surfaces of the dwelling to the *terrain surface* (15) under the dwelling (1). In the alternative embodiment shown in figure 9b, the roof gutter (22) is replaced with a further floor gutter (27) positioned at the bottom of the wall section (5) beneath the low-side of the roof (7), allowing the occupants to watch rainwater passing down the walls (4) and/or the deck (14) before being redistributed to the terrain surface (15) by the *irrigation distribution system* (23).

While figure 9 shows a simplified diagrammatic representation of the rainwater flow (21), figures 1-7 show the incorporation of the water detention tank (17) into the exterior of the opaque wall (4) adjacent the bathroom (9).

In order to provide the occupants with an environmentally friendly water supply for domestic use, the rain (21) collected from the roof gutter (22) is temporarily stored in a detention tank (17). When the detention tank (17) is filled to a predetermined level, any excess rain water (21) collected bypasses, or overflows from the tank (17) straight to the irrigation distribution system (24).

Water consumption by the occupants is then replenished by subsequent rainfalls. The detention tank (17) refills to said predetermined level before being diverted to the irrigation distribution system (24). It will be appreciated that some dwellings (1) may, according to the occupants water requirements and the frequency and volume of rain fall, incorporate a separate or supplementary water supply and storage system to the rain-filled detention tank (17).

The present invention thus substantially provides a *dwelling* (1) with effective atmospheric transparency to the elements of wind, light (20) and moisture (21).

It is possible to allow the *terrain surface* (15) beneath a building to receive all these atmospheric elements without interference by simply raising a conventional dwelling

sufficiently high above the terrain surface (15). However, raising the dwelling height excessively poses significant drawbacks, namely;

- the difficulty and inconvenience in access to and from a dwelling that is high above the terrain surface;
- 5 - minimizing the feeling of immersion in, and connection between, the occupants and their environment which is replaced instead with an artificial or surreal 'bird's eye' viewpoint, and
- the risk of injury from a fall, and/or the hindrance (both visually and physically) of safety barriers, guards rails and the like to the user's experience of the
- 10 surrounding environment.

However, to bring a dwelling to within a sufficient height from the terrain surface to overcome these drawbacks would adversely affect the biota under the dwelling without the atmospheric transparency of the present invention.

In the embodiment of the present invention shown in figures 1-9, the floor/deck (2, 14)
15 is elevated less than 1m from the terrain surface, which complies with New Zealand building regulations for decks and walkways to avoid need for a railing/barrier. The modular nature of the dwelling (1) not only simplifies construction of the sub-components such as the walls (4), floor (2), roof (7), deck (14) and bathroom (9), it facilitates design modification whereby individual floor/wall/roof sections (3, 5, 8) may
20 be added/subtracted to alter shapes, sizes and ratios. On a larger scale, the entire *dwelling* (1) from the embodiment shown in figures 1 - 9 may be combined together to create larger dwellings (100) as shown in figures 10 - 11.

The dwelling (100) in figures 10 and 11 essentially comprises two *dwellings* (1), joined together. One of the *dwellings* (1) is configured as a mirror image of the other to
25 enable the two *dwellings* (1) to utilise an opaque service wall (28) to act as a common dividing wall. This enables, for example, a family with children, or two couples to

share the same environment whilst still maintaining some privacy from each other. Figure 11 shows an optional retractable sliding divider (29), in an extended position, subdividing the decks (14) on both halves of the *dwelling* (100).

Figures 12 and 13 show a further embodiment of the *dwelling* (1), suspended above
5 the terrain surface (15) by one of more *suspension elements* (30), attached to *anchor points* (31) affixed to the terrain surface (15). The *anchor points* (31) may be any appropriate natural features such as trees (32) (shown in figure 13), rock features or outcrops and/or purpose-made ground anchors, rock bolts, support poles (33) (as shown in figure 12) or the like. Figure 12 shows the dwelling (1) located on a terrain
10 surface (15) with a rearward portion of the dwelling (1) at the edge of a precipice, whilst the remainder of the dwelling (1) projects into free space, suspended by *suspension elements* (30). At one end, the *suspension elements* (30) are attached to an outer perimeter of the joists (26) at the apex of the deck (14), whilst the other end is shown attached to an anchor point (31) in the form of a support pole (33). The
15 occupants of the dwelling (1) are thus able to see the view downwards through the transparent floor sections (3) as well as the wall sections (5) and roof sections (8).

Figure 13 shows the dwelling (1) suspended between two anchor points (31) in the form of two trees (32) spanning a natural water feature (34), e.g. a river, stream, brook or the like. The dwelling (1) is suspended by suspension elements (30) attached at
20 each apex of the floor (2) and roof (7). It will be readily understood however that numerous alternative means of suspension are possible as a matter of design choice. The dwelling (1) is accessed by a ladder (42) extending from the terrain surface (15) to a platform (43) extending from the deck (14).

Figures 14 – 16 show greater detail of the embodiment of figures 12 and 13 in the
25 form of a dwelling (1) substantially similar to the embodiment of figures 1- 9. The embodiment shown differs in layout configuration, whereby the side deck (14) and

external bath (10) have been omitted and the floor space of internal living area correspondingly increased. A series of solar panels (35) are mounted above the wall (4) adjacent the deck (14). The solar panels (35) provide not only electrical power, but a degree of sun shading without obscuring the view. A heater (36) of some appropriate configuration and output (e.g. wood burner, gas, multi-fuel, bio-ethanol or the like) provides warmth during inclement weather and vents through a roof flue (37).

The bathroom (9) is separated from the living/sleep area by a transverse partition wall (38). The bathroom (9) contains a toilet (39) and shower cubical (40) mutually separate by an inner bathroom wall and door (41). The shower cubical (40) is constructed with a transparent floor (3) and (optionally) with at least one transparent wall section (5).

Forming the shower cubical (40) floor and wall sections from a solid transparent material such as glass advantageously provides a waterproof surface suitable for wet-room use without further treatment or additional layers/structures.

Similarly, the toilet (39) may be formed with a transparent floor section (3), while the wall sections (5) may be transparent or opaque according to user/owner preference.

Aspects of the present invention have been described by way of example only and it should be appreciated that modifications and additions may be made thereto without departing from the scope thereof.

Claims:1. A terrestrial *dwelling* including:

- a *floor* including at least one *floor section*, orientated substantially horizontally in use;
- at least one *wall* including at least one *wall section*, projecting substantially upwardly from said *floor section*;
- a *dwelling support*, configured to at least partially elevate the *floor section* above a terrain surface;
- a *roof* with at least one *roof section* attached to an upper portion of said *wall*

wherein said *dwelling* is configured to provide at least partial atmospheric transparency to at least partially allow atmospheric elements including light incident on the *dwelling* above the *floor* to reach the terrain surface under the *dwelling*.

2. A dwelling as claimed in claim 1, wherein said *dwelling* configuration is also atmospherically transparent to rain and any other forms of airborne moisture.
3. A dwelling as claimed in claim 1 or claim 2, wherein said *dwelling support* includes at least one *floor section support*, located beneath at least one *floor section* to support and at least partially elevate the *floor section* above the terrain surface.
4. A dwelling as claimed in claim 1 or claim 2, wherein the *dwelling support* includes at least one *suspension element*, configured in use to suspend the *dwelling* from an anchor point affixed to the terrain surface.
5. A dwelling as claimed in any one of claims 1- 4, wherein said *dwelling* configuration is also atmospherically transparent to wind.
6. A dwelling as claimed in any one of claims 1- 5, wherein at least one said *floor section* and at least one said *wall section* and/or said *roof section* is transparent.
7. A dwelling as claimed in any one of claims 1- 5, wherein a transparent *floor section* and a transparent *wall section* are mutually positioned to at least partially allow light incident on the transparent *wall section* to reach the terrain surface under the *floor* by passing through said transparent *floor section*.
8. A dwelling as claimed in any one of claims 1- 5, wherein a transparent *floor section* and a transparent *roof section* are mutually positioned to at least partially allow light incident on the transparent *roof section* to reach the terrain surface under the *floor* by passing through said transparent *floor section*.
9. A dwelling as claimed in any one of claims 1- 8, configured to divert the moisture incident on at least one:
 - *roof section*;
 - *wall section*, and/or

- uncovered *floor section* forming a walkway or deck area exterior to the *dwelling's wall sections*,
to be re-dispersed under the *floor* onto the terrain surface below.
10. A dwelling as claimed in claim 9, wherein said incident moisture is diverted via:
- at least one *roof* periphery gutter;
 - a *wall section*;
 - collectors located substantially at the *floor* level;
 - a water storage or detention tank;
 - the *roof* and/or *walls* to one or more apertured conduits, drippers, sprinklers, or other *irrigation distribution system* beneath the elevated *floor*, and/or
 - any combination or permutation of same.
11. A dwelling as claimed in claim 9 or claim 10, wherein the water collected from the incident moisture is channelled along a network of irrigation tubing with a plurality of spaced outlets.
12. A dwelling as claimed in claim 11, wherein said irrigation tubing is attached to support joists located underneath the *floor sections*.
13. A dwelling as claimed in claim 9, wherein said incident moisture is diverted via a temporary storage in a detention tank.
14. A dwelling as claimed in claim 13, wherein the detention tank is configured to fill to a predetermined level, whereupon any excess collected fluid bypasses, or overflows from the tank straight to fluid irrigation outlets beneath the dwelling.
15. A dwelling as claimed in claim 3, securable to a terrain surface by one or more *terrain mounts* formed as
- separate, discrete elements, to which the *floor section supports* are attached, or
 - continuous elements whereby the terrain mounts are incorporated as part of the *floor section supports* and formed as a single element.
16. A dwelling as claimed in any one of claims 1 - 15, formed as a substantially rigid skeletal frame to which *floor sections*, *wall sections* and *roof sections* are attached.
17. A dwelling as claimed in any one of claims 1 - 16, wherein at least one said *floor section* is elevated between 0.3 – 1.5m above the terrain surface.
18. A dwelling as claimed in claim 17, wherein at least part one said *floor section* is elevated between 0.5 – 1.1m above the terrain surface.
19. A dwelling as claimed in any one of claims 1-18, wherein at least 50% of said floor is transparent.

20. A dwelling as claimed in claim 19, wherein at least 50% of said roof is transparent.
21. A dwelling as claimed in claim 19 or claim 20, wherein at least 50% of said walls are transparent.

Figure 1

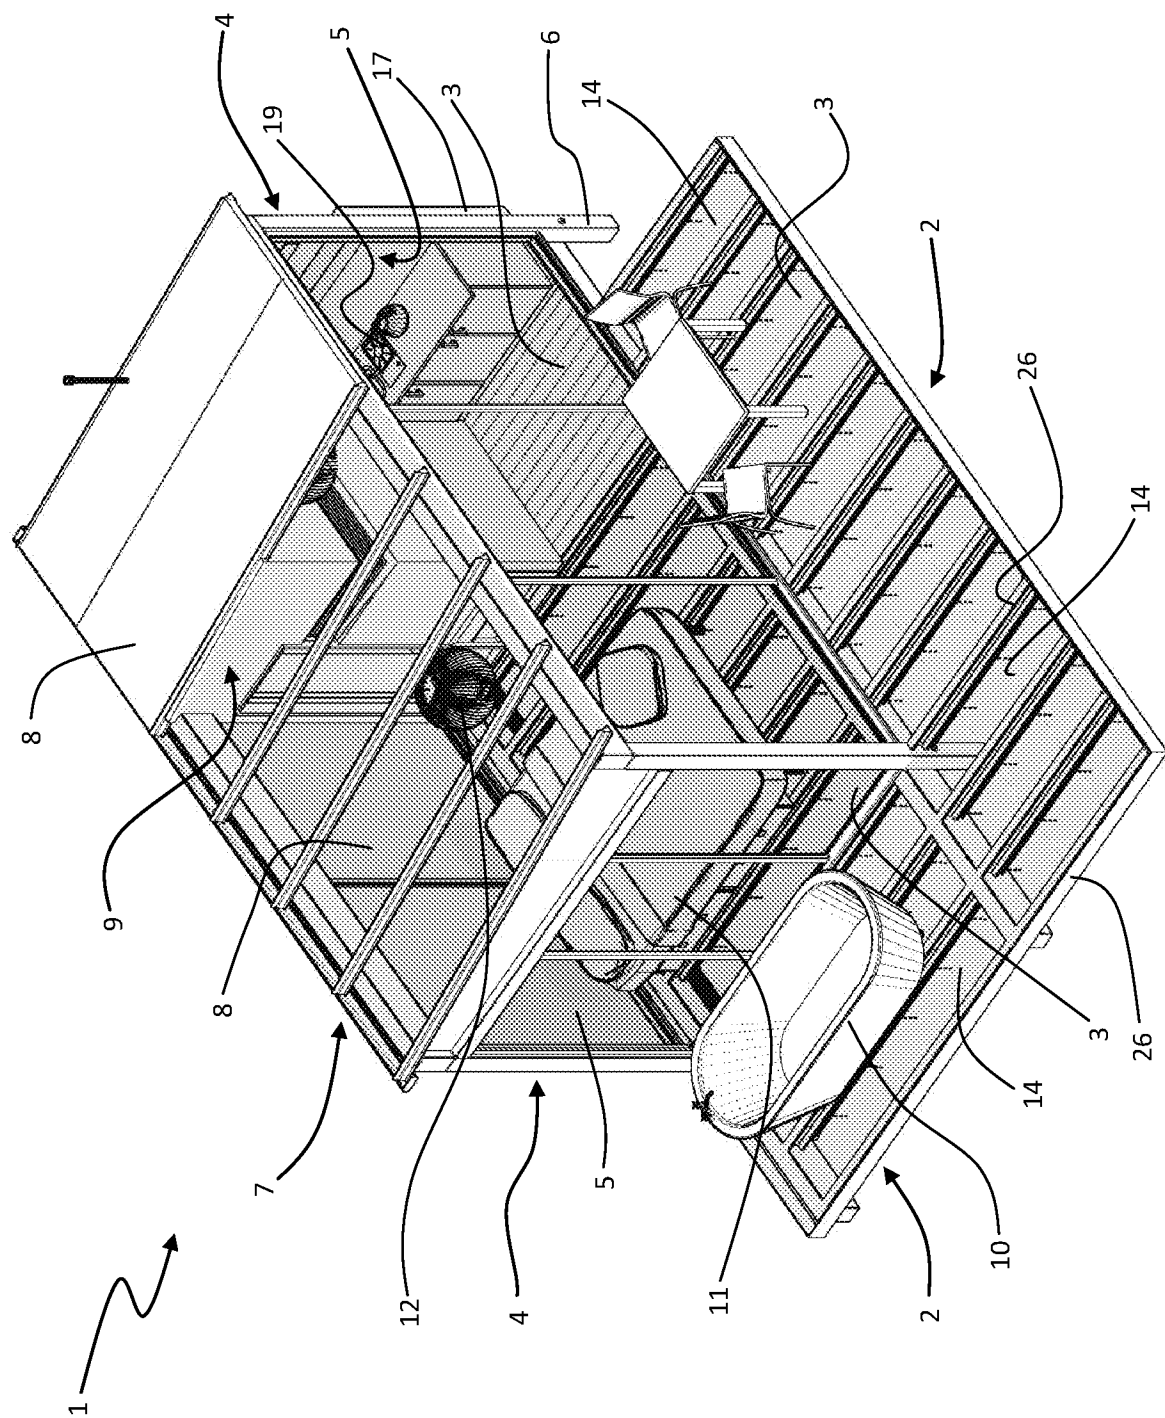


Figure 2

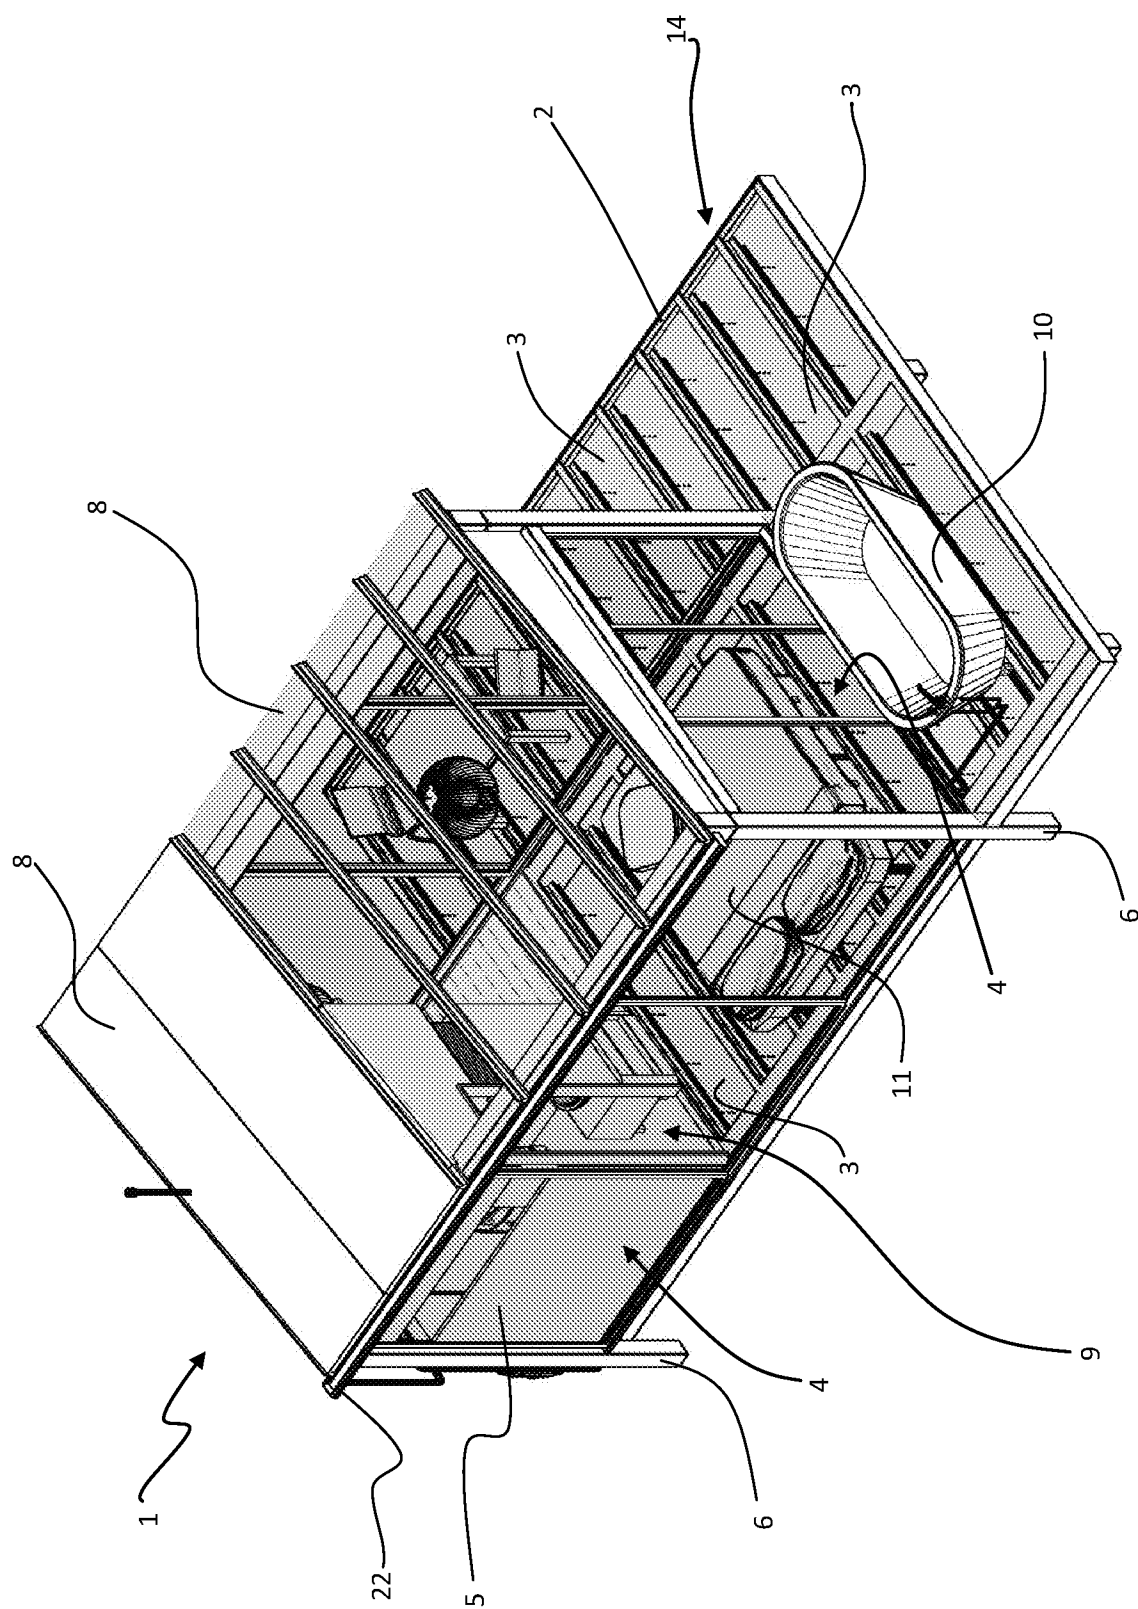


Figure 3

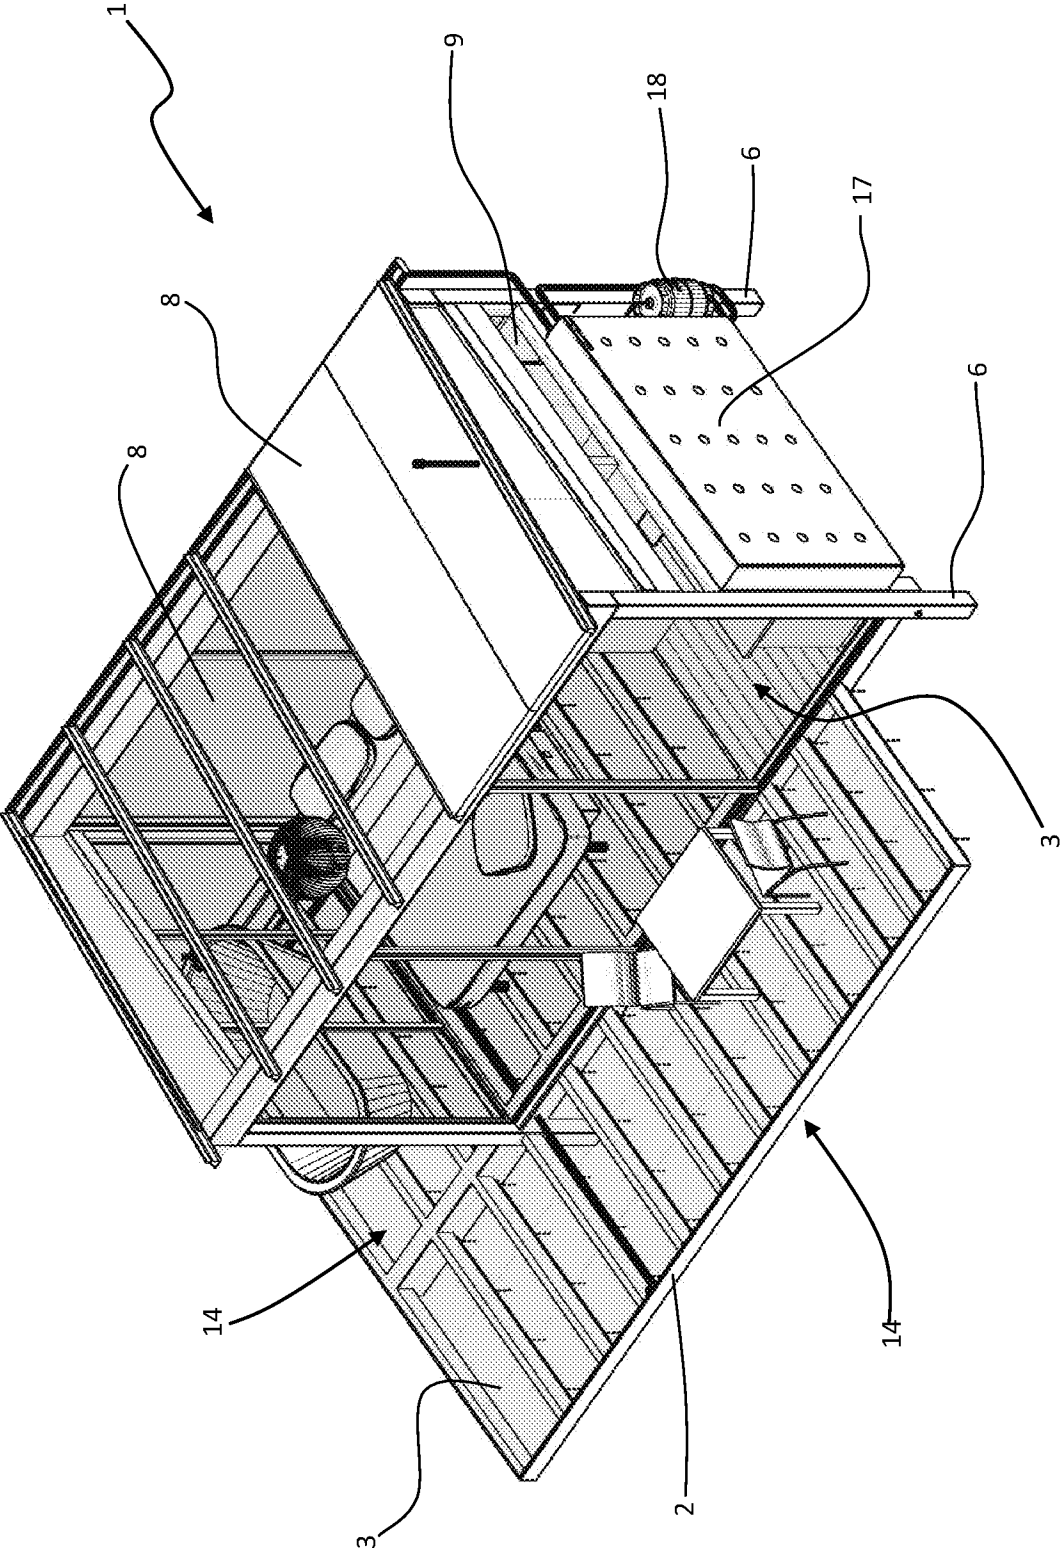


Figure 4

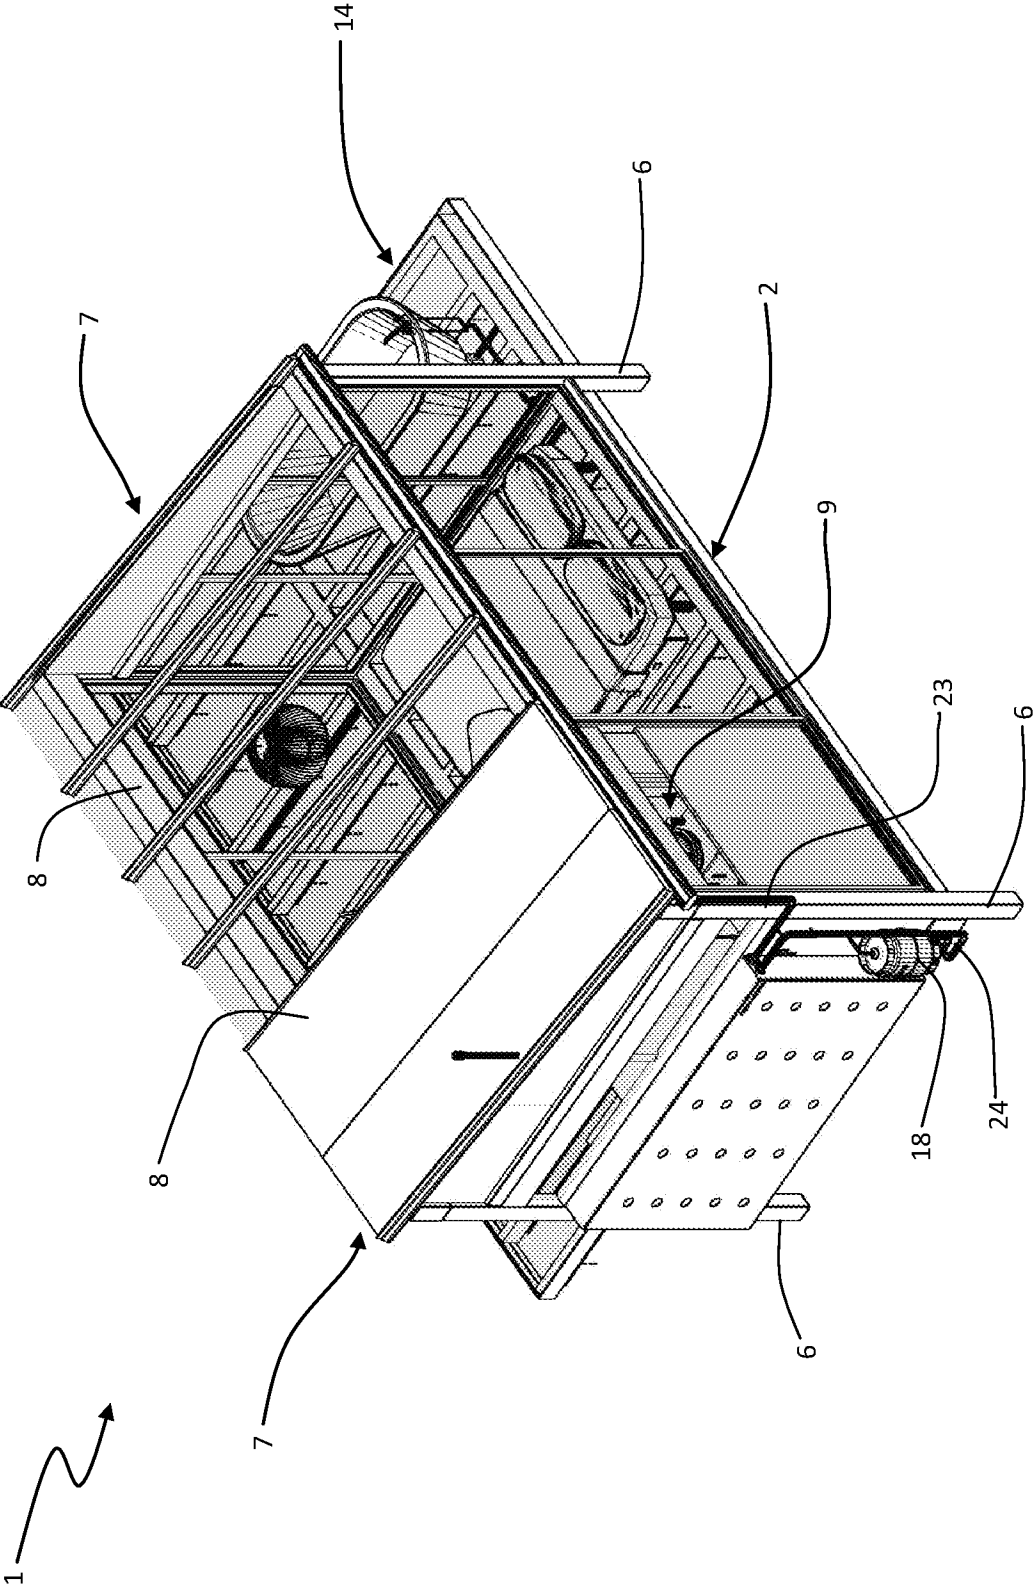


Figure 5

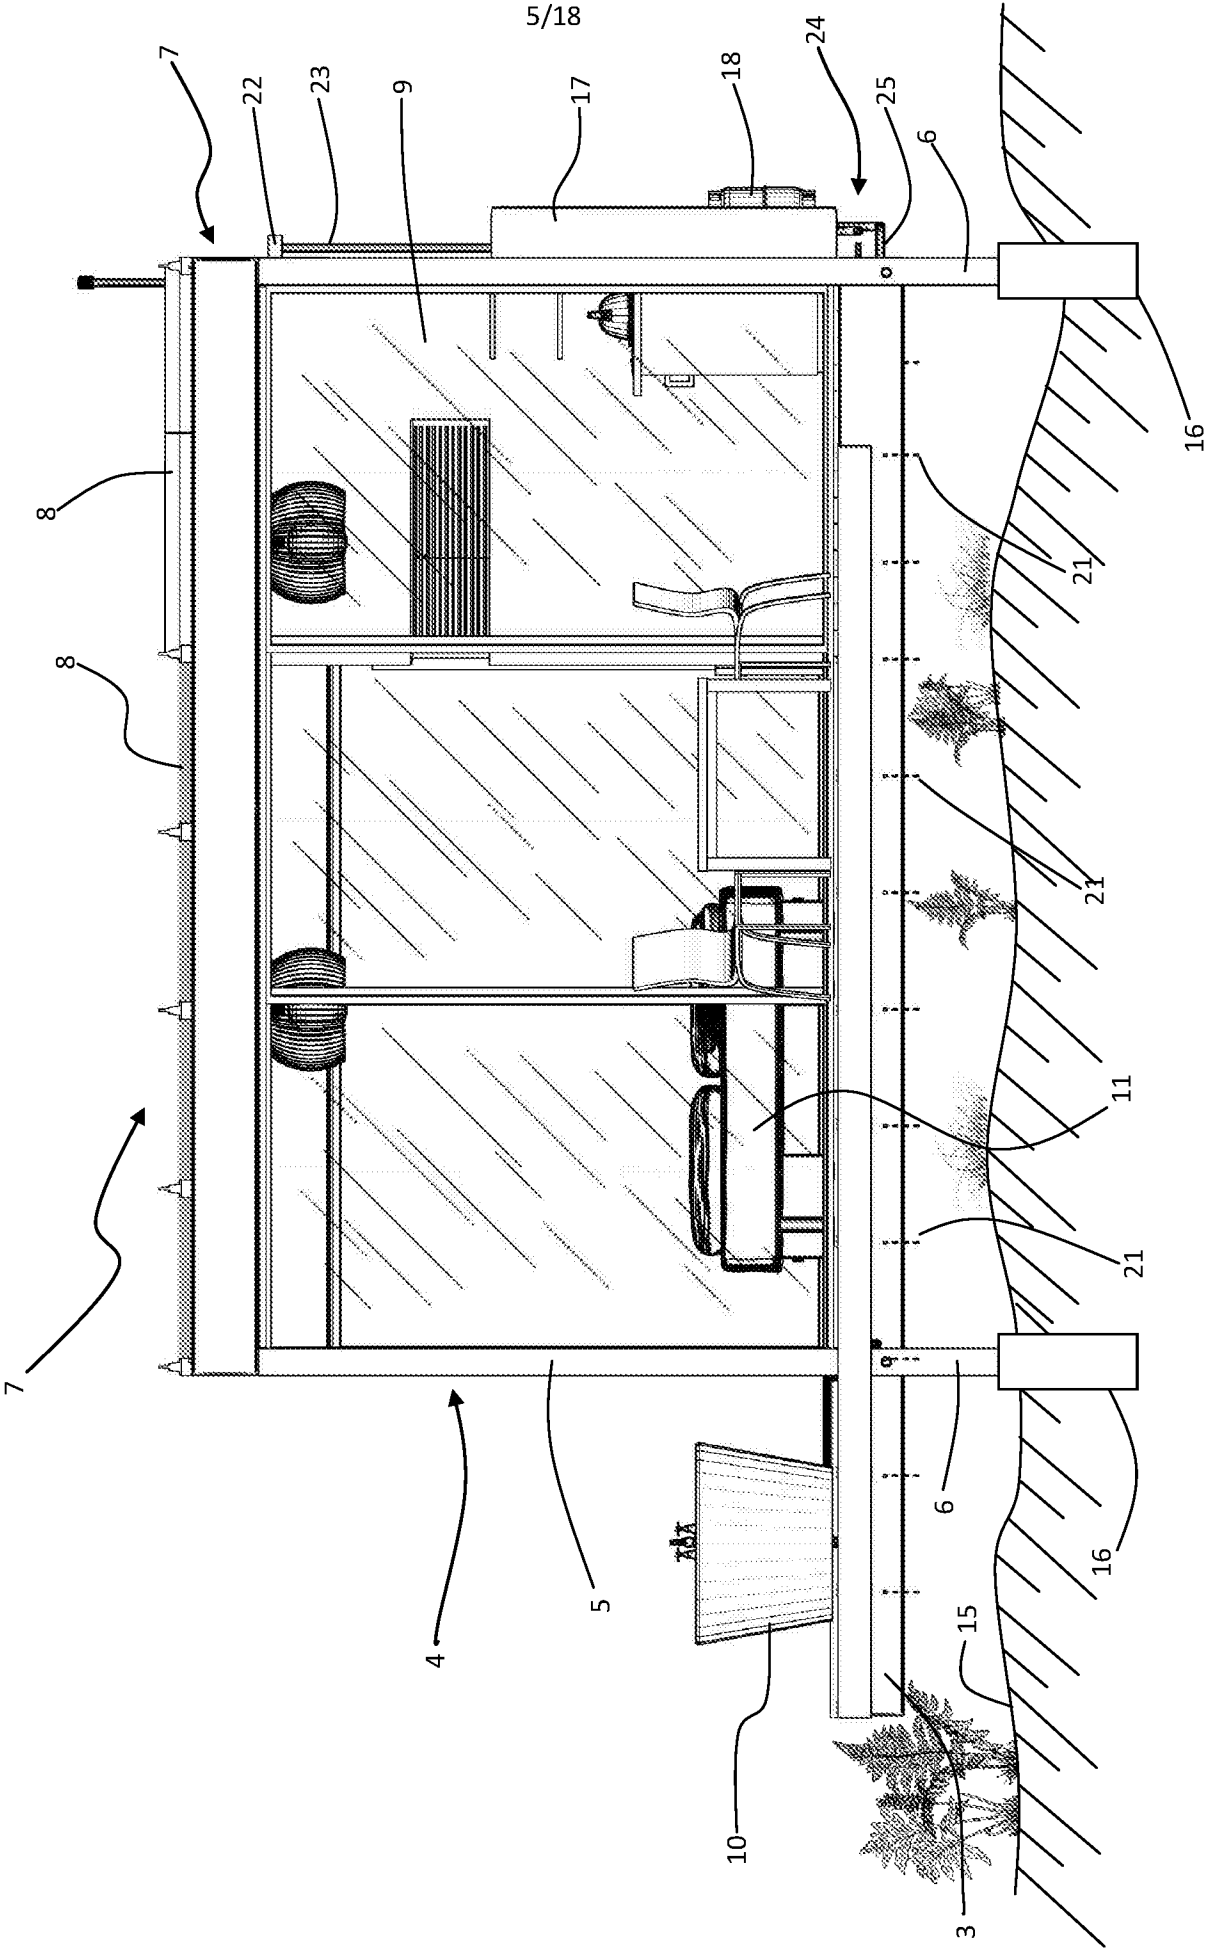


Figure 6

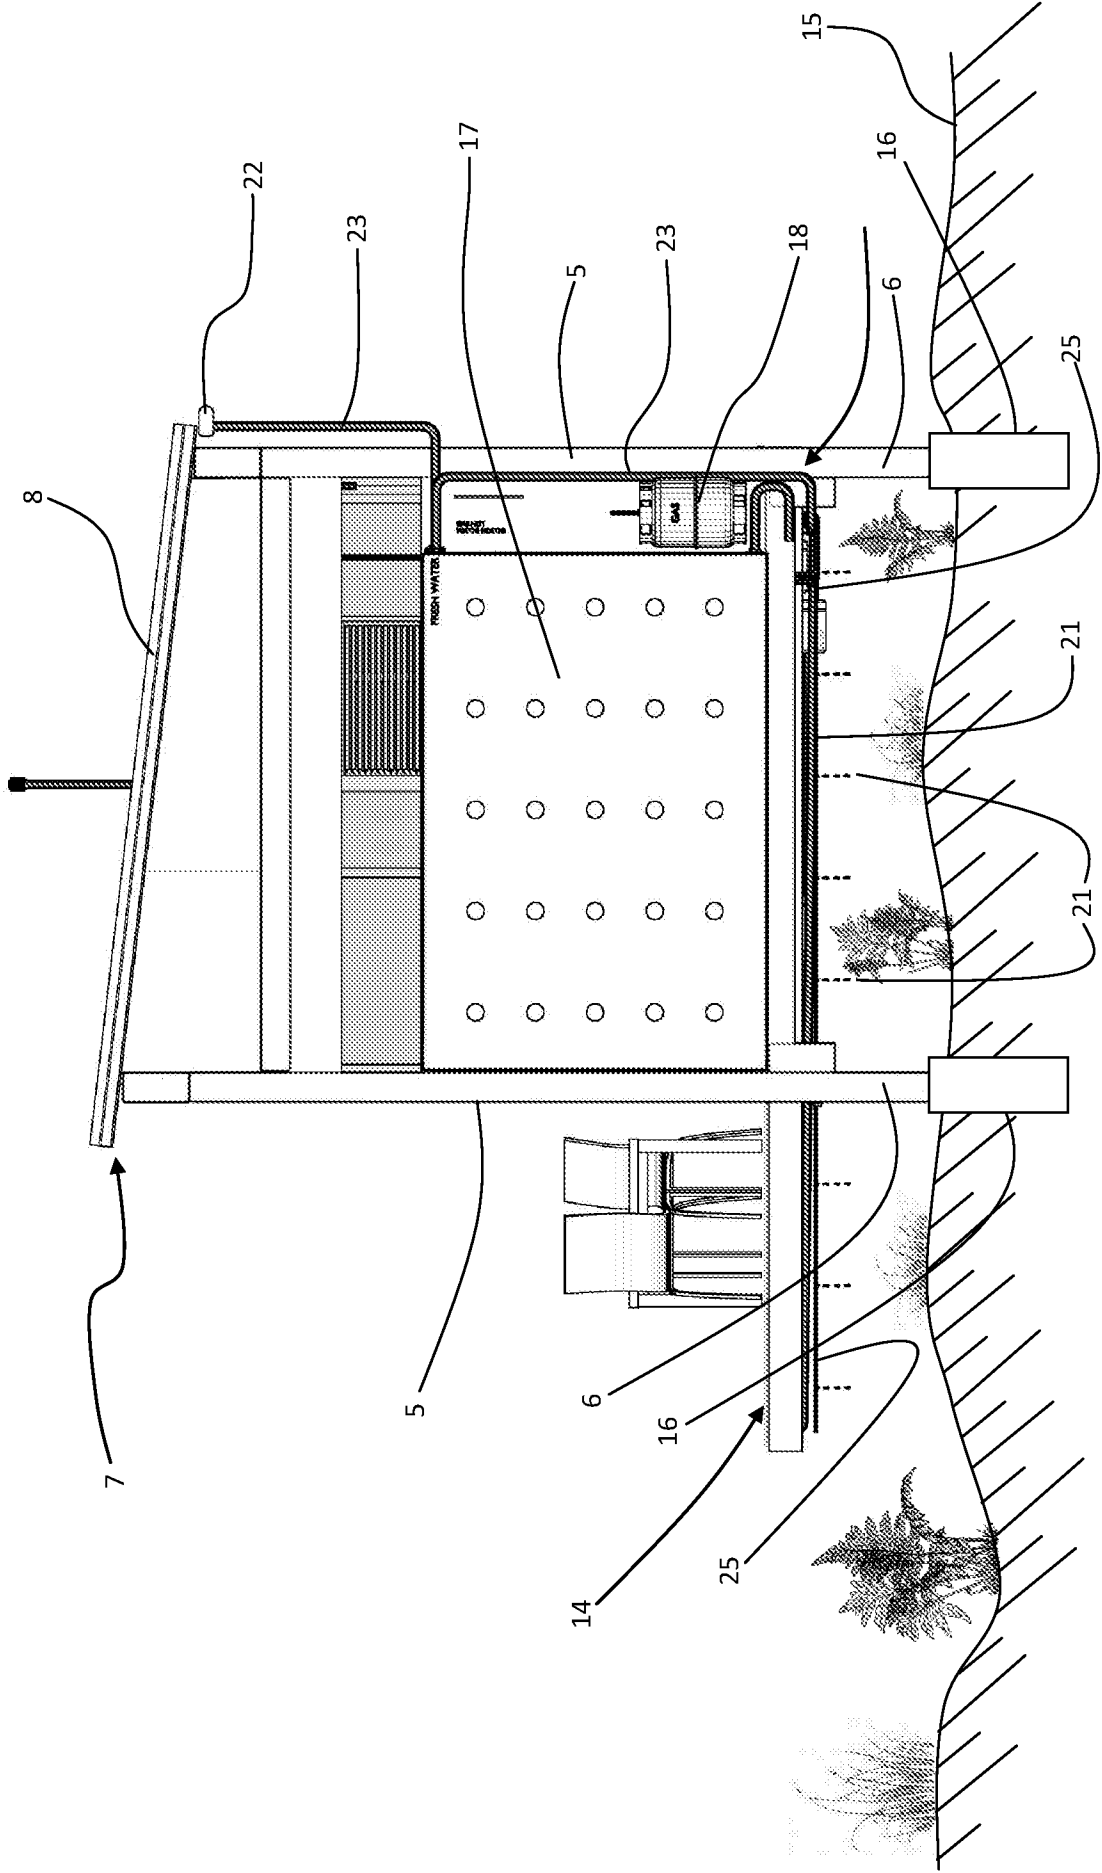


Figure 7

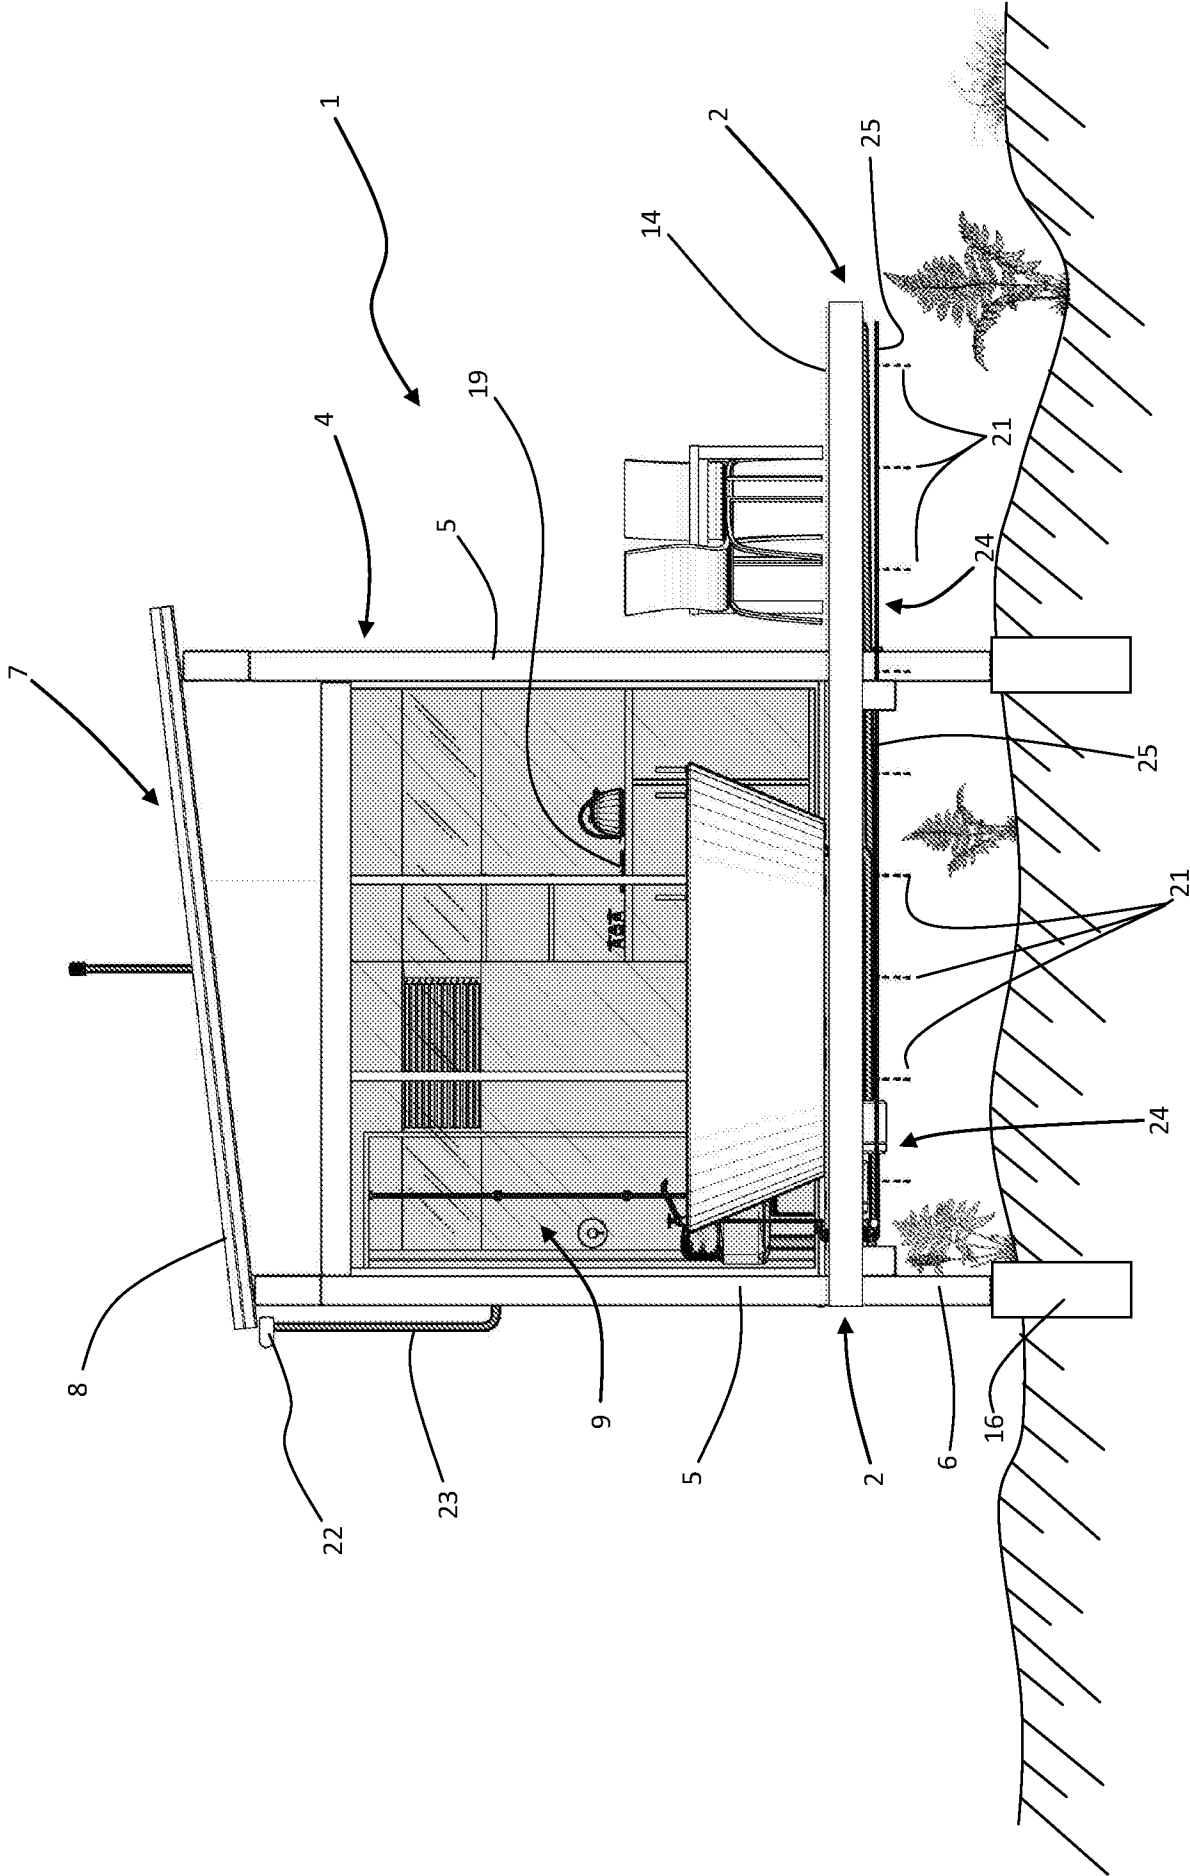


Figure 8

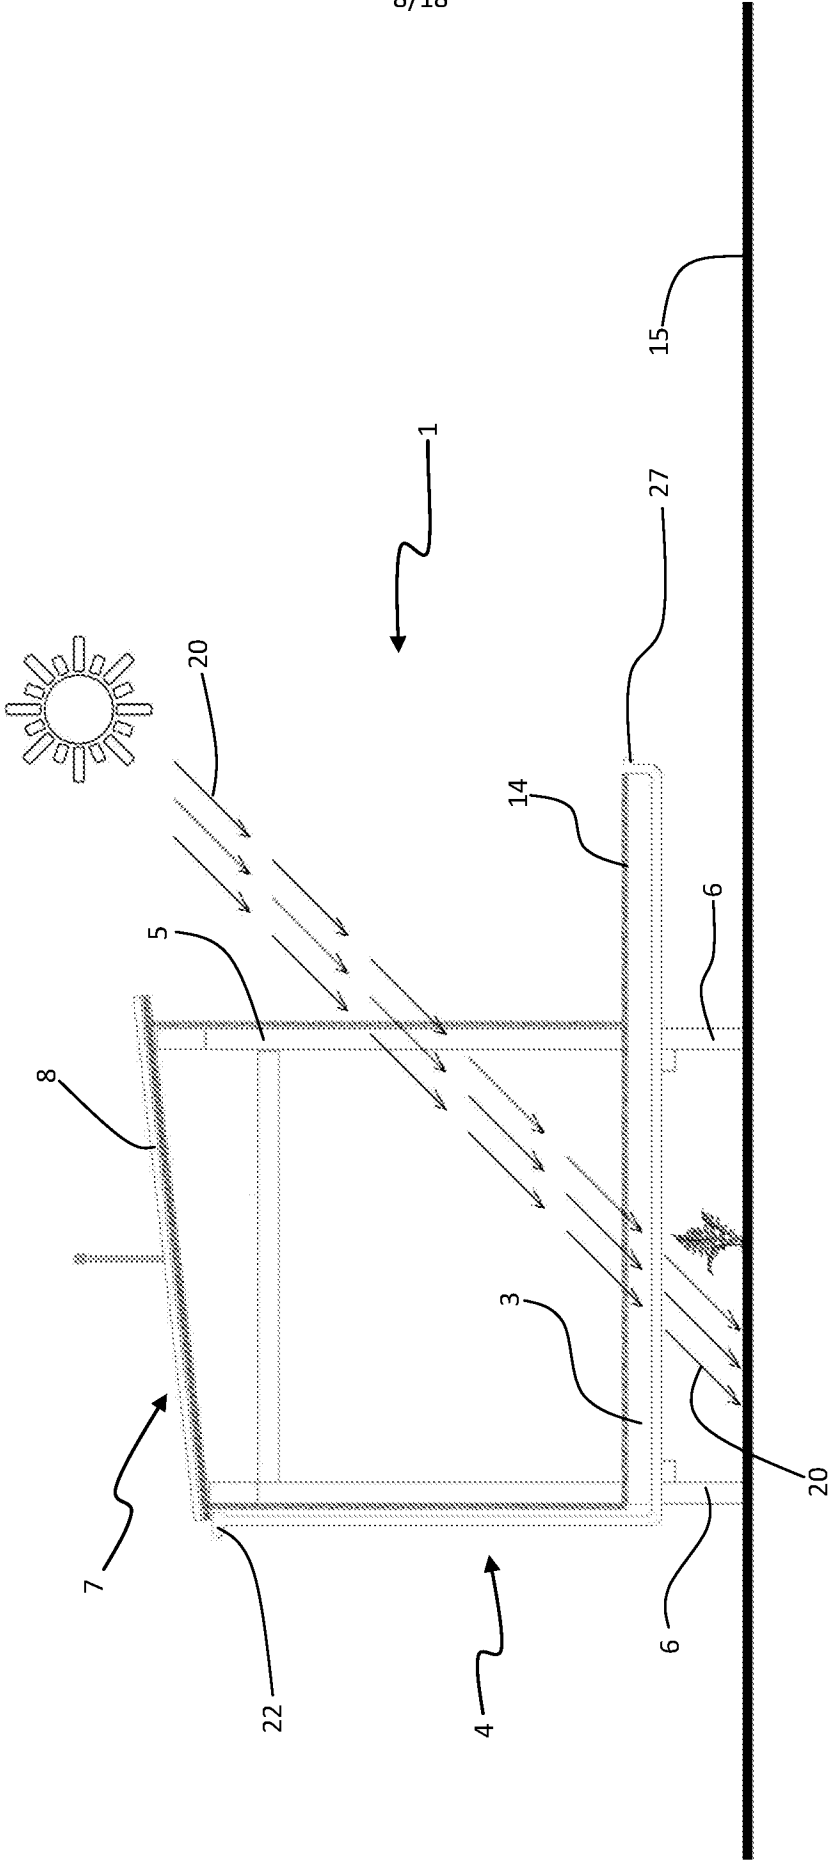


Figure 9b

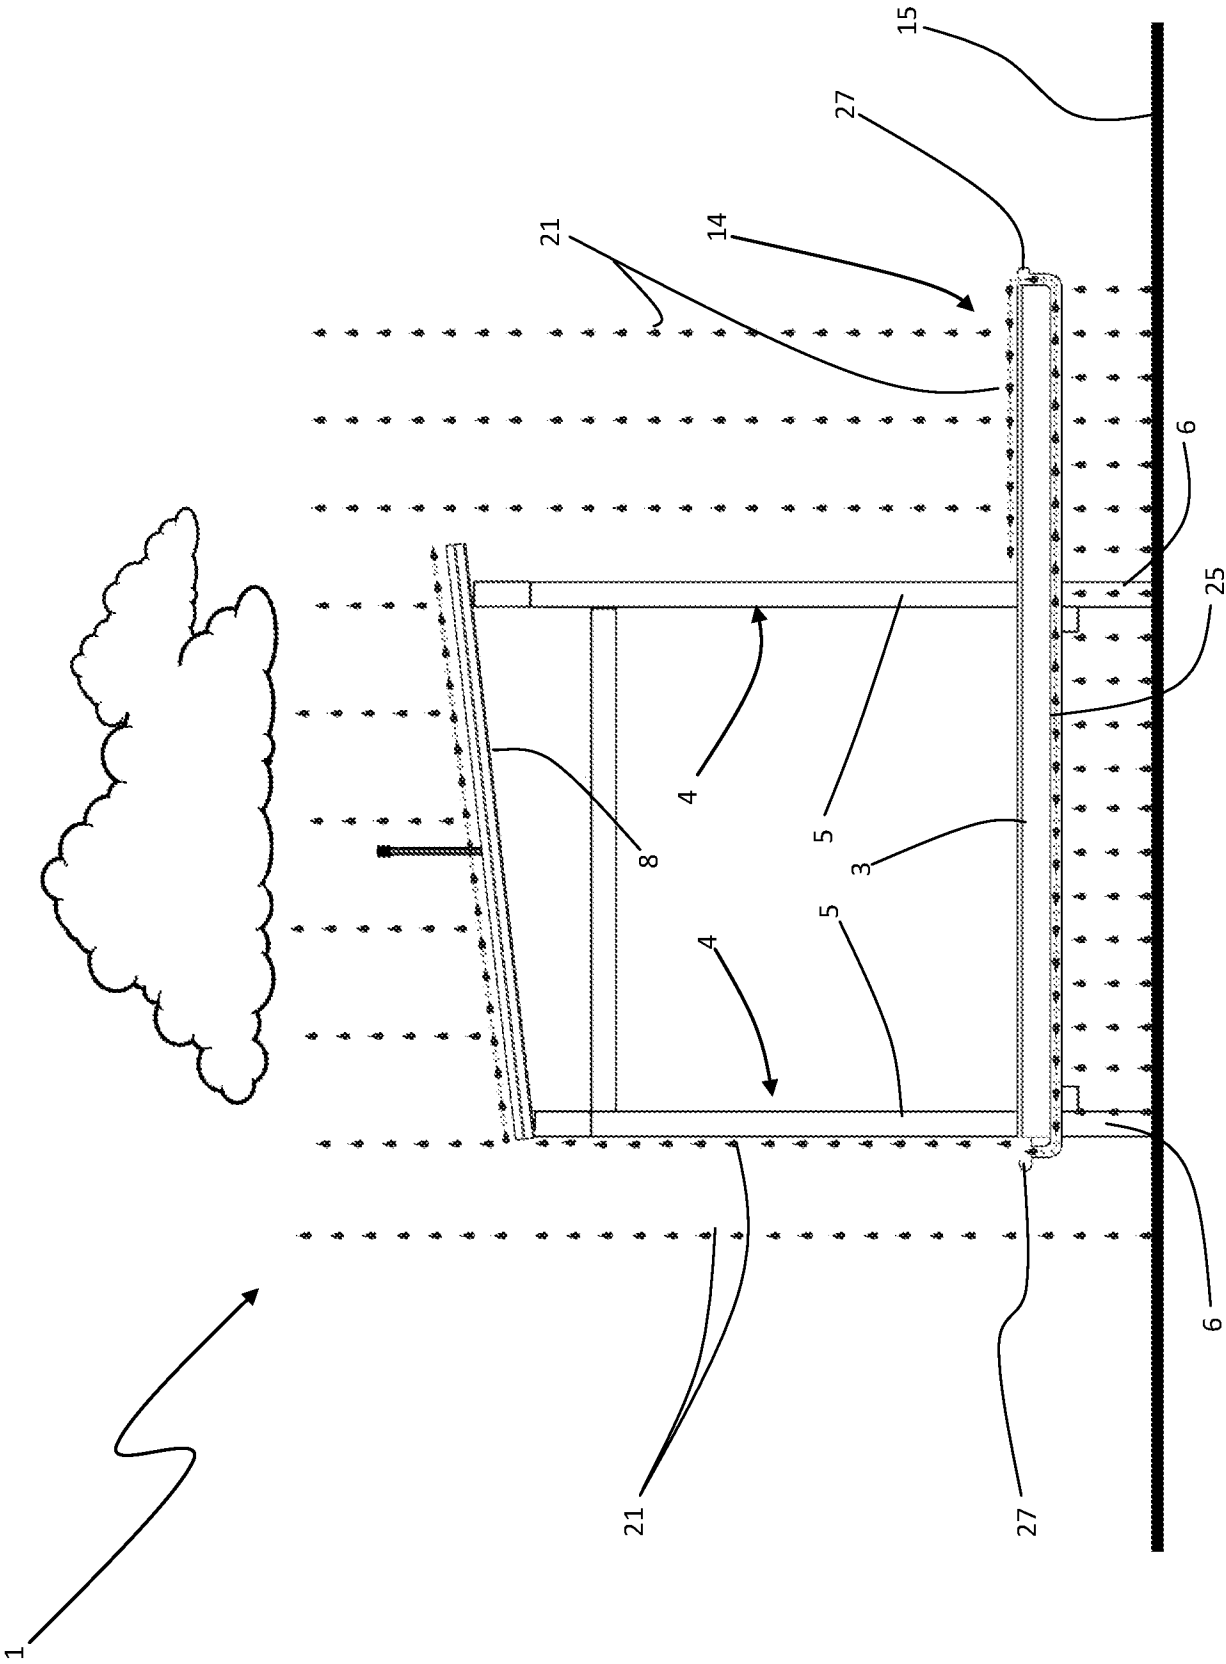


Figure 10

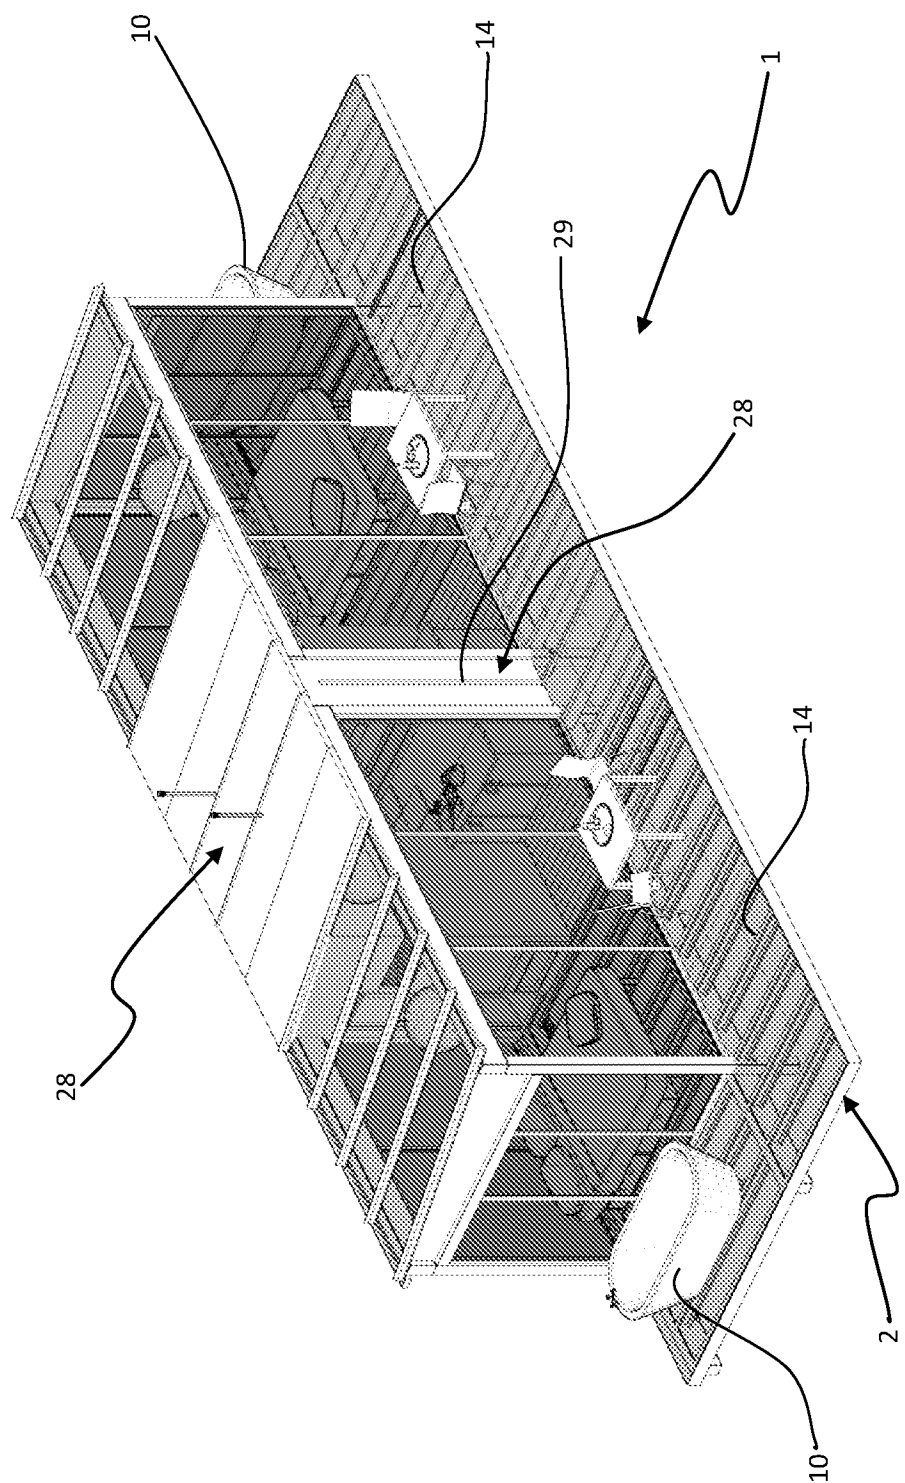


Figure 11

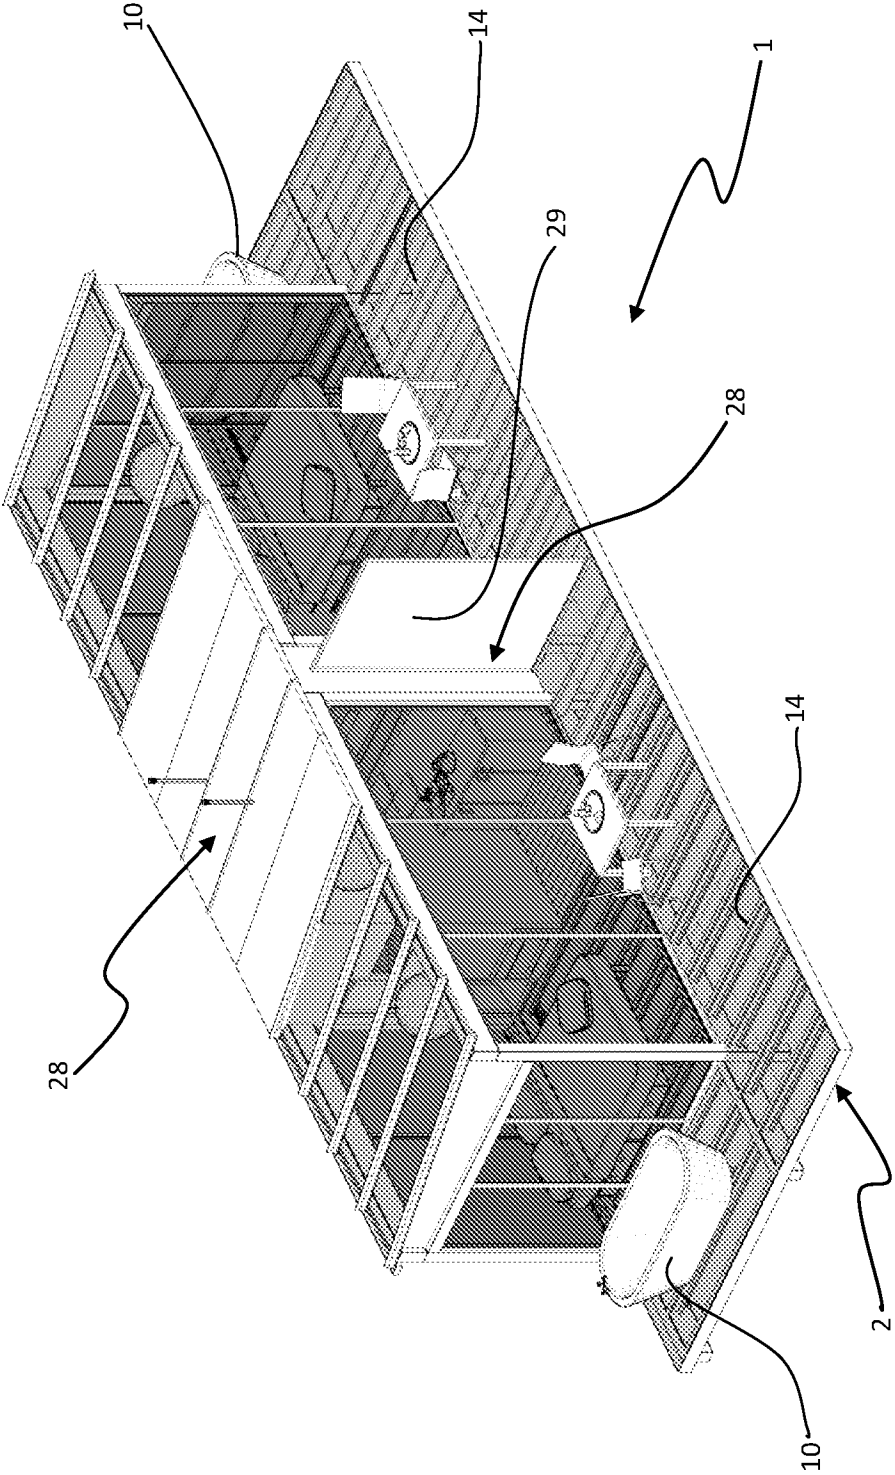


Figure 12

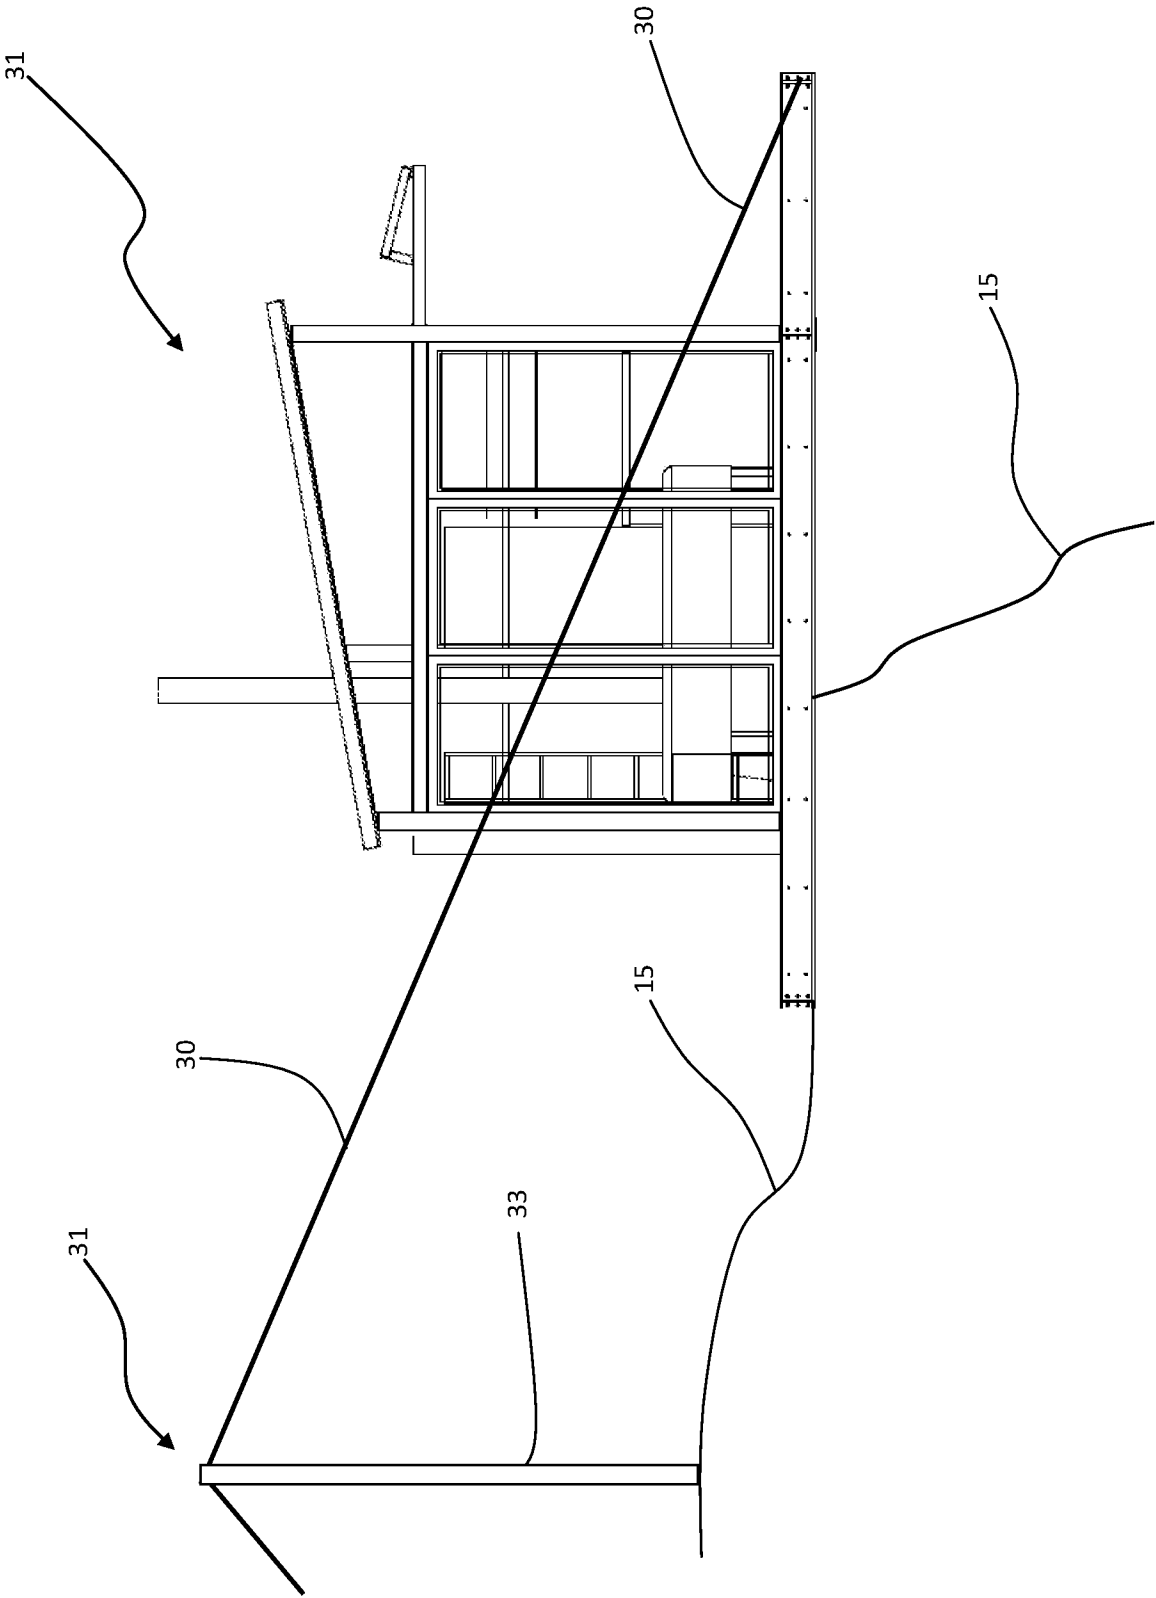


Figure 13

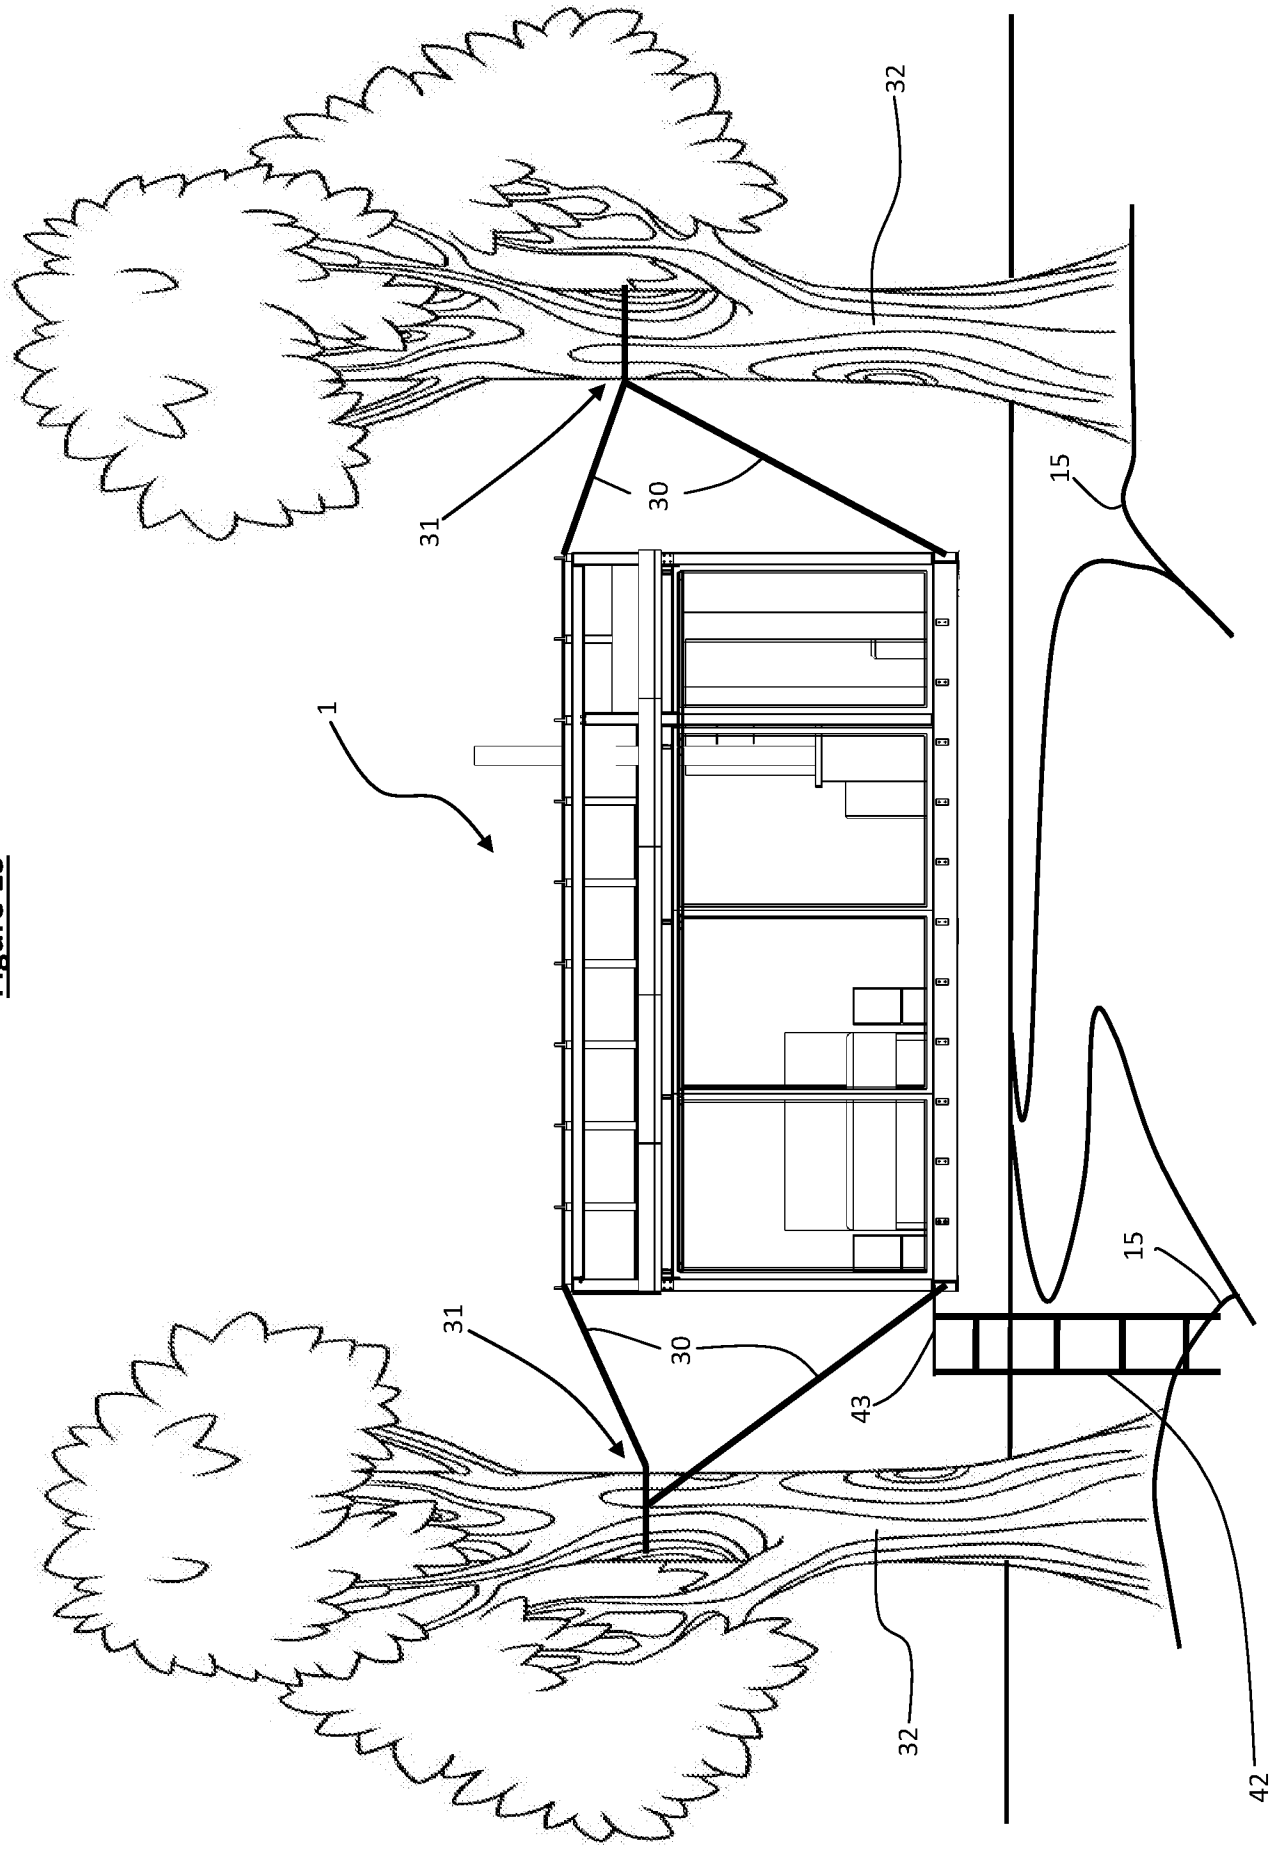


Figure 14

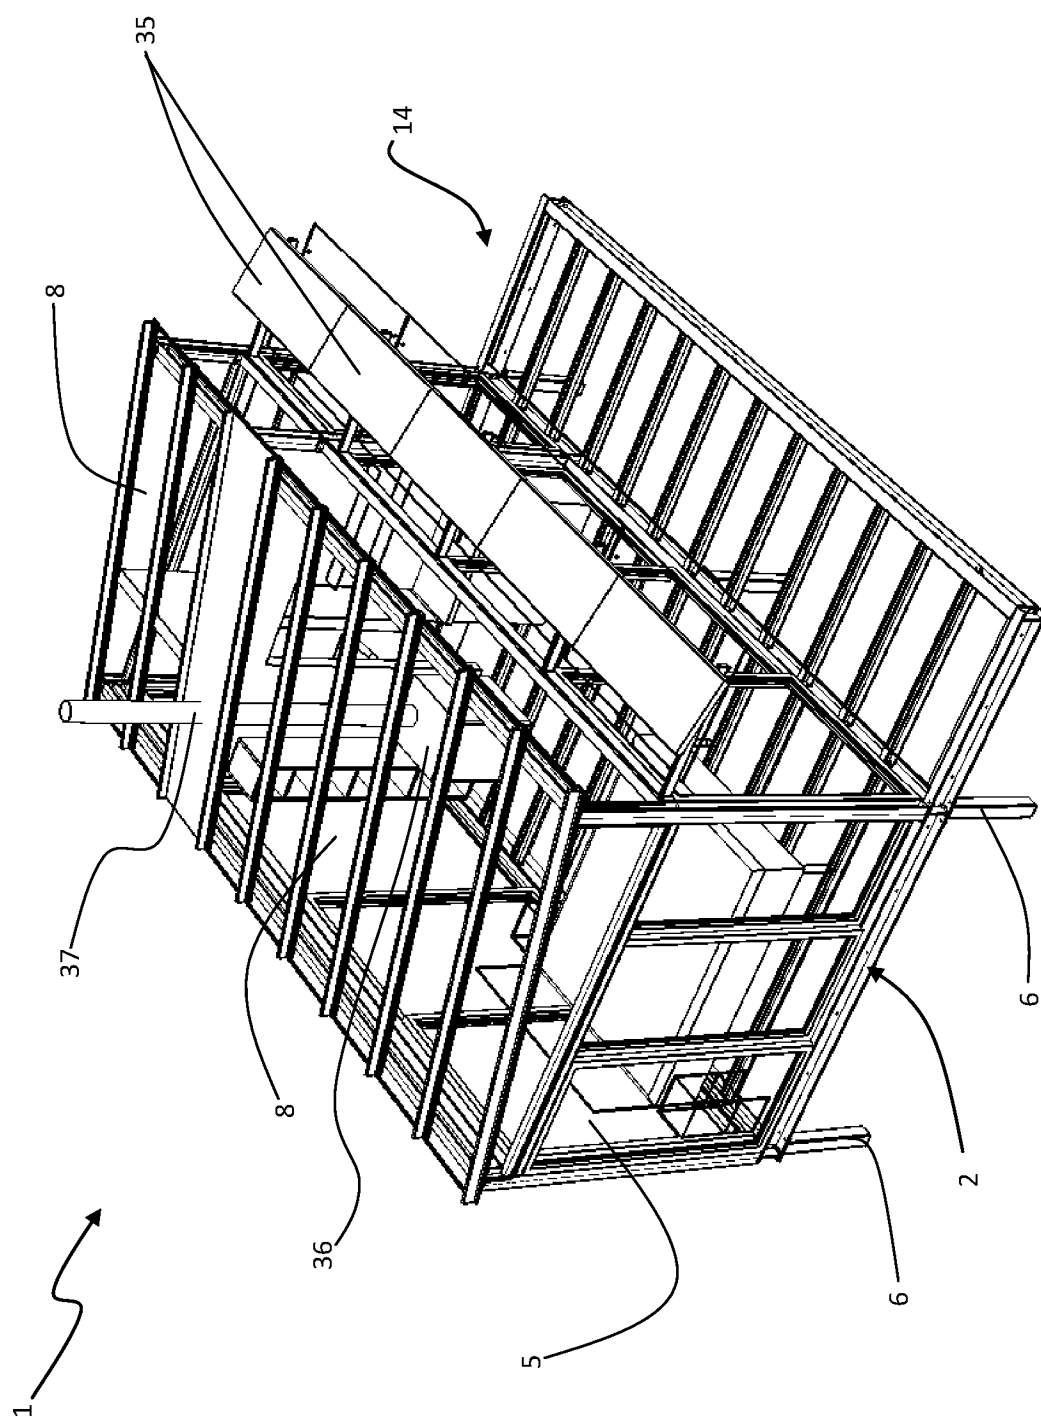


Figure 15

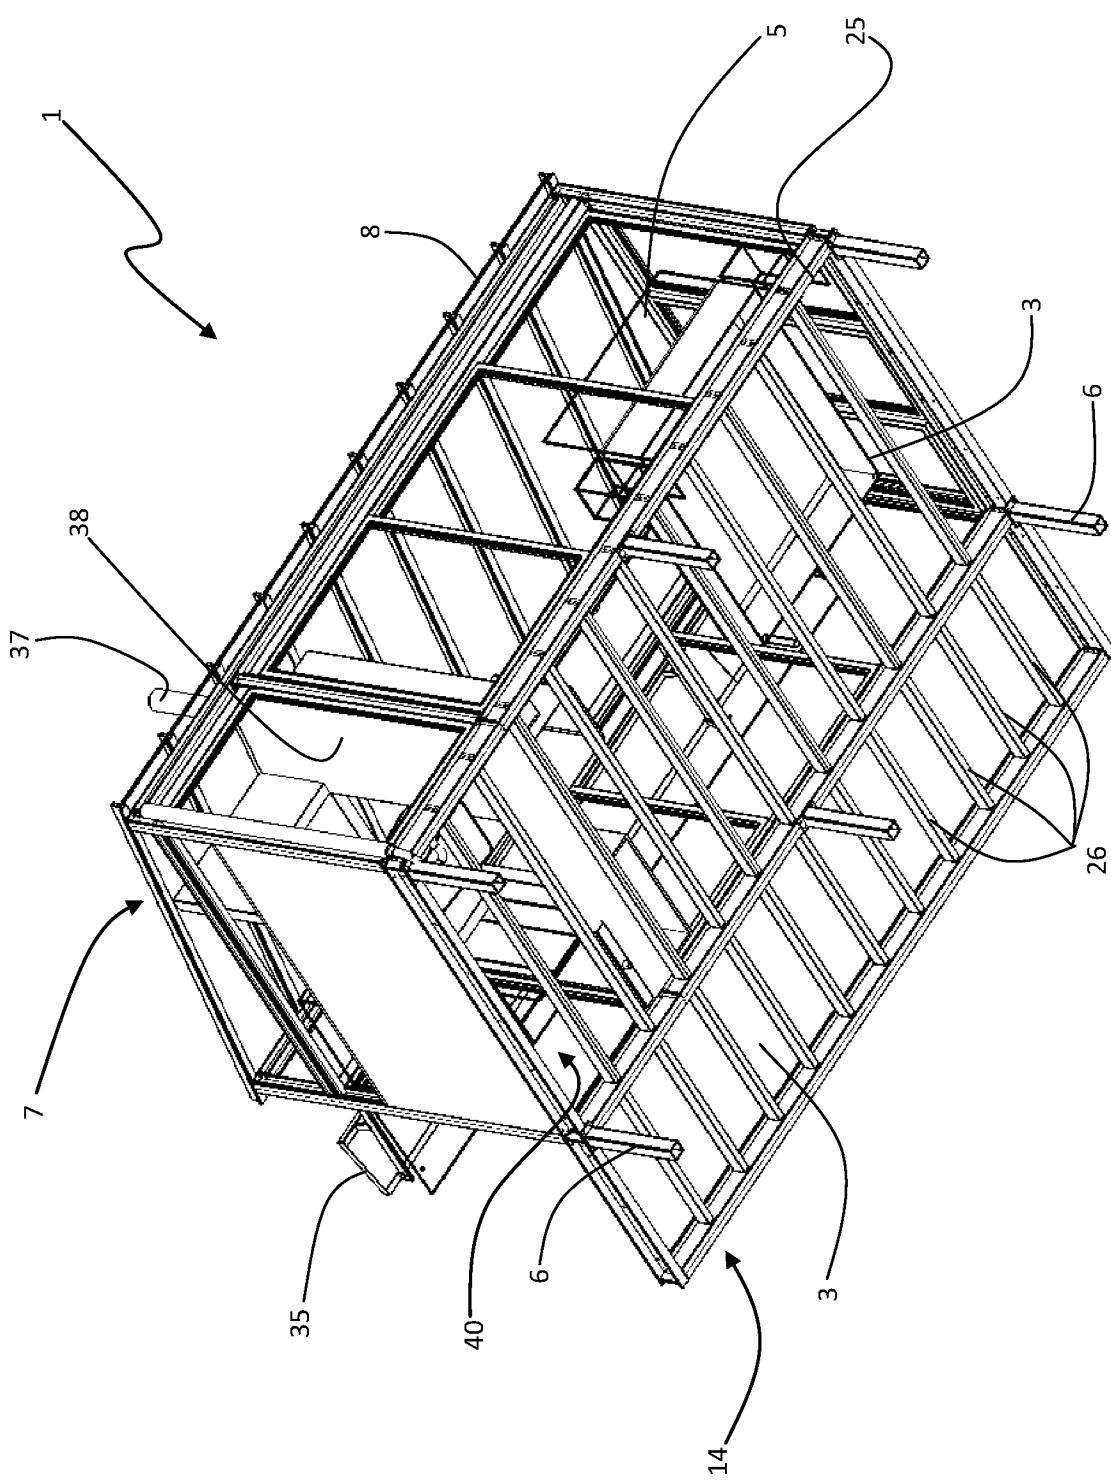


Figure 16


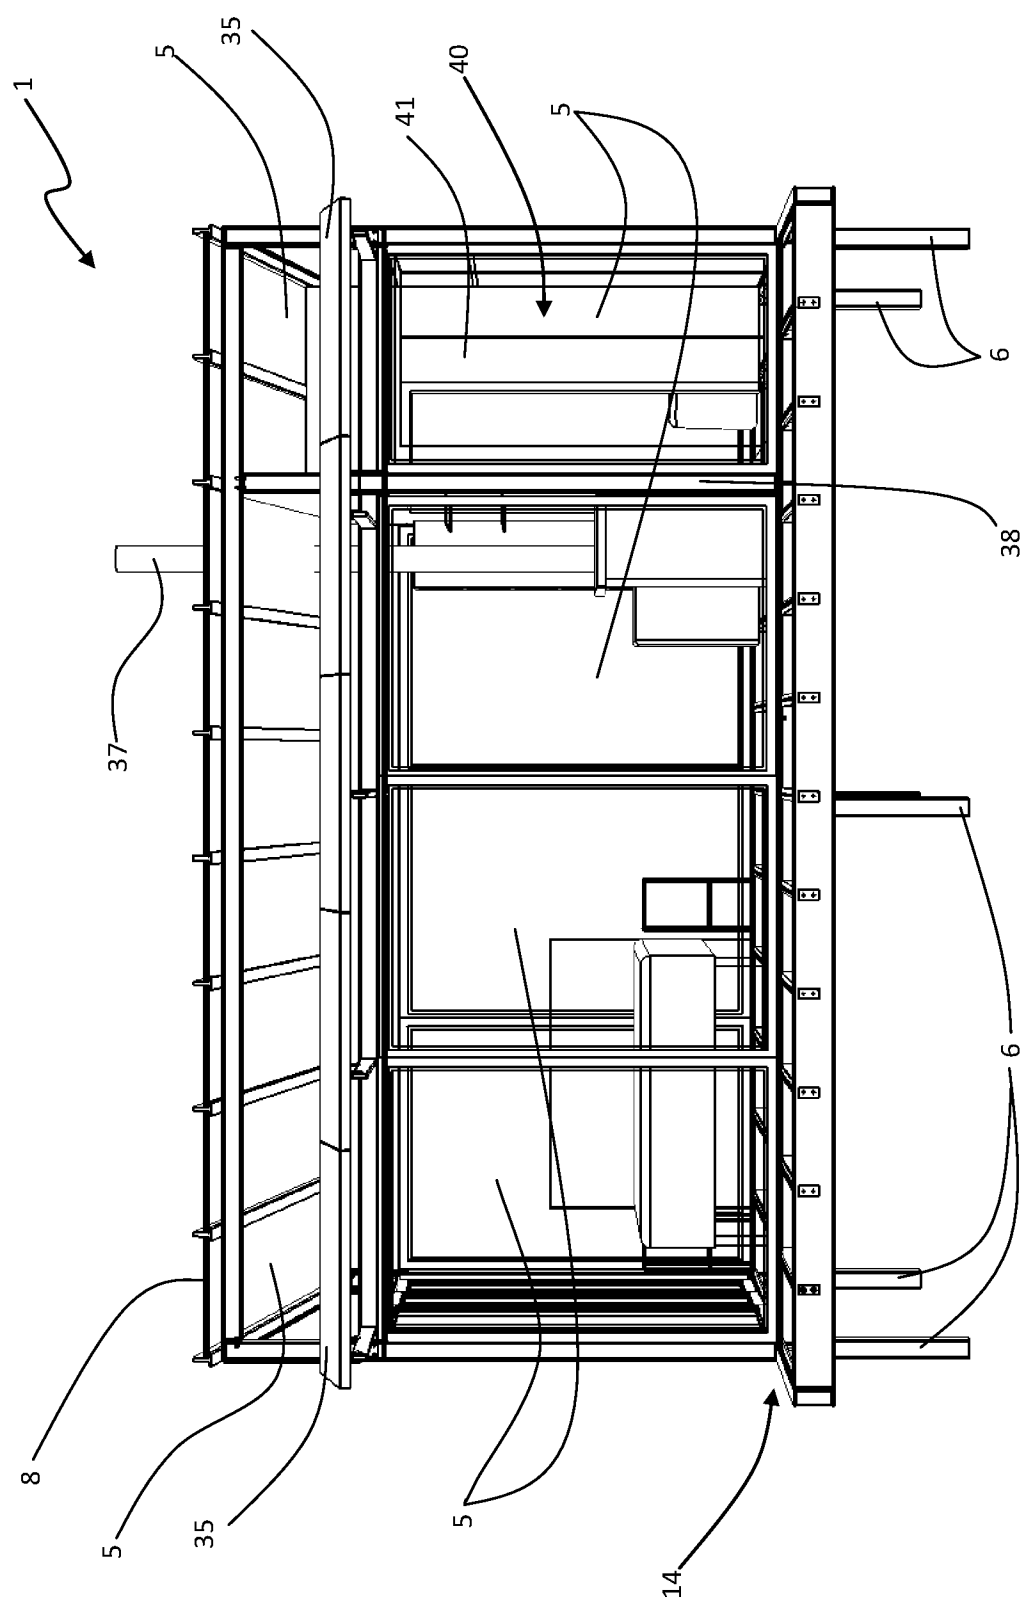


Figure 17

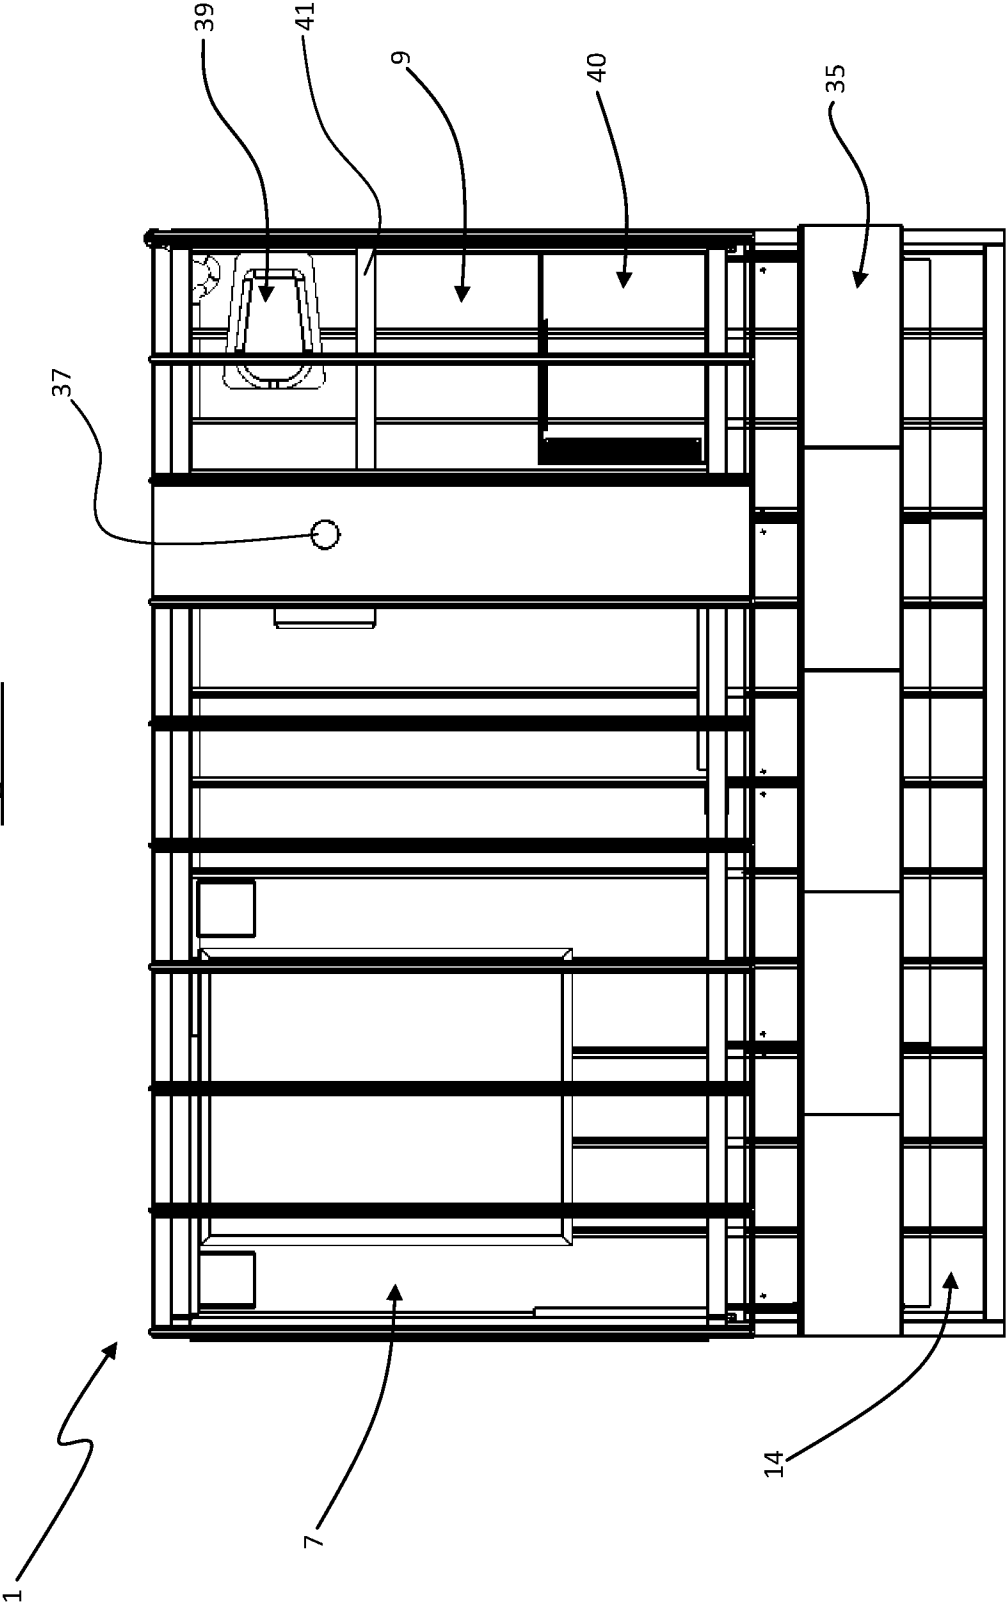

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2013/061301**A. CLASSIFICATION OF SUBJECT MATTER****E04B 1/348(2006.01)i, E04B 9/32(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E04B 1/348; E04B 1/70; E04H 1/02; E04B 1/34; E04B 1/35; E04H 1/12; E04B 1/343; E04B 9/32

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: dwelling, floor, wall, roof, dwelling support, atmospheric transparency, light incident, terrain surface, and elevate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010-0275526 A1 (SUN, YIJING) 04 November 2010	1-3, 15
Y	See paragraphs [0075]-[0079], [0085], [0095]-[0100] and figures 1A-1D, 4A-4B.	4
Y	CN 202324688 U (YAHGEE MODULAR HOUSE CO., LTD.) 11 July 2012	4
	See paragraph [0031] and figure 2.	
A	JP 06-158730 A (SEKISUI CHEM CO., LTD.) 07 June 1994	1-4, 15
	See paragraphs [0014]-[0015], [0020]-[0022] and figures 1, 3.	
A	JP 11-062279 A (SEKISUI HOUSE LTD.) 05 March 1999	1-4, 15
	See paragraphs [0011]-[0015] and figure 1.	
A	JP 06-066036 A (SATO KOGYO K.K.) 08 March 1994	1-4, 15
	See paragraphs [0008]-[0010] and figures 1, 4.	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 April 2014 (11.04.2014)

Date of mailing of the international search report

14 April 2014 (14.04.2014)

Name and mailing address of the ISA/KR


International Application Division
Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

CHOI, Hyun Goo

Telephone No. +82-42-481-8288



INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2013/061301**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 10,12-14,18,20-21
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
Claims 10, 12-14, 18 and 20-21 are unclear, because they refer to multiple dependent claims which do not comply with PCT Rule 6.4(a). Therefore, claims 10, 12-14, 18 and 20-21 are contrary to PCT Article 6.
3. ☒ Claims Nos.: 5-9,11,16-17,19
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of any additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2013/061301

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0275526 A1	04/11/2010	None	
CN 202324688 U	11/07/2012	None	
JP 06-158730 A	07/06/1994	None	
JP 11-062279 A	05/03/1999	None	
JP 06-066036 A	08/03/1994	None	