(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 604 972 B1

(12) EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
23.07.1997 Bulletin 1997/30

(51) Int. Cl.[6]: **B01D 63/02**, B01D 63/10

(21) Application number: **93121002.5**

(22) Date of filing: **28.12.1993**

(54) Hollow fiber membrane fabric - containing cartridges and modules having solvent-resistant thermoplastic tube sheets and methods for making the same

Gewebekartuschen mit Hohlfasermembranen und Module mit lösungsmittelbeständigen Rohrplatten aus thermoplastischem Kunststoff sowie Herstellungsverfahren

Cartouches de tissu avec membrane à fibres creuses et modules ayant des plaques tubulaires en matière thermoplastique résistant aux solvents et méthodes de fabrication

(84) Designated Contracting States:
BE DE FR GB IT NL

(30) Priority: **31.12.1992 US 999054**

(43) Date of publication of application:
06.07.1994 Bulletin 1994/27

(73) Proprietor: **HOECHST CELANESE CORPORATION**
Somerville, N.J. 08876 (US)

(72) Inventors:
- **Huang, Xiaoyan**
  Charlotte, North Carolina 28210 (US)
- **Delozier, J. Clift**
  Fort Mill, South Carolina 29715 (US)
- **Prasad, Ravi**
  Charlotte, North Carolina 28210 (US)
- **Runkle, Charles J.**
  Charlotte, North Carolina 28277 (US)
- **Shuey, Harry F.**
  San Dimas, CA 91773 (US)

(74) Representative: **von Kreisler, Alek, Dipl.-Chem. et al**
Patentanwälte,
von Kreisler-Selting-Werner,
Bahnhofsvorplatz 1 (Deichmannhaus)
50667 Köln (DE)

(56) References cited:
EP-A- 0 554 567
US-A- 4 929 259
US-A- 5 186 832

- **PATENT ABSTRACTS OF JAPAN vol. 16, no. 261 (C-0950) 12 June 1992 & JP-A-04 063 117 (KITZ CORP) 28 February 1992**
- **PATENT ABSTRACTS OF JAPAN vol. 13, no. 313 (C-618) (3661) 17 July 1989 & JP-A-01 099 610 (MITSUBISHI RAYON CO LTD) 18 April 1989**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 604 972 B1

Description

Background

This invention relates to the field of spiral-type hollow fiber membrane fabric-containing cartridges and modules for separations and other phase contact applications. In particular, this invention relates to an improved cartridge or module having tube sheets which are fabricated from solvent-resistant thermoplastic resins. The teachings of this invention can, if desired, be used in conjunction with the subject matter of applicant's U.S. Patent Nos. 5,352,361 (entitled "Spiral-Wound Hollow Fiber Membrane Fabric Cartridges and Modules Having Flow-Directing Baffles"), 5,264,171 (entitled "Method of Making Spiral-Wound Hollow Fiber Membrane Fabric Cartridges and Modules Having Flow-Directing Baffles"), and 5,186,832 (entitled "Spiral-Wound Hollow Fiber Membrane Fabric Cartridges and Modules Having Integral Turbulence Promotors").

There is a great deal of prior art relating to the structure, fabrication and use of spiral-type hollow fiber-containing cartridges. Among the early disclosures of such devices are Mahon U.S. Patent No. 3,228,877 and McLain U.S. Patent No. 3,422,008.

In general, a bundle of hollow fibers is positioned around and parallel to the longitudinal axis of a rod-shaped core (which may be a hollow mandrel and may or may not be removed after the bundle is fabricated), the ends of the hollow fiber bundle are potted in tube sheets, and the cartridge is fitted into a pressure housing suitably ported to facilitate feed, permeate and concentrate flows, to constitute a complete module.

More recently, the art has improved such cartridges by forming the hollow fibers into a fabric-like web in which the hollow fibers, parallel to the core axis, are held in place relative to each other by transverse filaments which may or may not also be hollow fibers. The development of these hollow fiber membrane fabrics was an important step in the evolution of this technology, because the fabric both makes unnecessary the manual handling of a random bundle of loose hollow fibers, and facilitates the construction of spiral-wound modules having the hollow fibers spaced and oriented in a highly regular fashion (EP-A-0 554 567, filing date 24.12.92, publication date 11.08.93).

Despite these developments, the challenge to optimize the operability, efficiency and durability of these hollow fiber-containing cartridges has continued. With the development of hollow fiber membrane fabrics, the limiting factor in building a module becomes the fabrication of the tube sheets. The classic hollow fiber potting processes include gravity potting and centrifugal potting. In gravity potting, a resinous potting material is introduced into each of the bundle ends, one at a time, and allowed to settle into the end of the bundle and cure. In centrifugal potting, the bundle is inserted into the housing, the assembly is spun on its midpoint to create centrifugal force at both bundle ends, resinous potting material is introduced into the shell-side space near both bundle ends, and the resinous potting material is allowed to cure. (See generally, Mahon U.S. Patent No. 3,228,877; Maxwell et al U.S. Patent No. 3,339,341; Geary et al U.S. Patent No. 3,442,002; Davis et al U.S. Patent No. 3,962,094; Opersteny et al U.S. Patent No. 4,369,605; and Chu et al U.S. Patent No. 4,865,735). Among the many drawbacks of these procedures are the following: (1) these are labor-intensive manual processes; (2) being manual processes, these procedures do not yield nodules of uniformly high quality; (3) the potting resins tend to wick along the dry portions of the hollow fibers, especially in the dipping process; (4) the potting resins must have a sufficiently low viscosity to readily flow among the closely spaced hollow fibers and wet all adjacent hollow fiber surfaces, especially in the case of the centrifugal process; (5) the inherent requirement in these procedures that the potting resin must readily flow among the hollow fibers limits the acceptable potting resins in terms of both solvent resistance and mechanical durability after cure; (6) whenever the curing reaction in the potting resin is exothermic, heat buildup within the tube sheet area, particularly the center of the tube sheet, can lead to catastrophic meltdown of the adjacent hollow fiber ends, markedly reducing the operative portion of the bundle or even rendering the module useless (attempts to conventionally pot a cartridge having a diameter greater than about 10 cm (four inches) will so fail, unless a resin such as an epoxy or polyurethane resin having low solvent resistance, or a resin including fillers (to conduct heat and/or act as a diluent, reducing the proportion of the total potting resin composition which must undergo exothermic cure), is used; the low exotherm in curing such a resin results in poor curing quality and accordingly poor solvent resistance and/or mechanical properties); (7) gaps or air bubbles in the potting resin due to inadequate flow may cause leaks in the cartridge; (8) the materials conventionally used as potting resins and having good solvent resistance tend to be brittle (e.g., low molecular weight polyethylene); (9) the materials conventionally used as potting resins and being rubbery tend to have poor solvent resistance (e.g., polyurethane); and (10) both the centrifugal and gravity potting techniques necessitate at least one shell-side port on the side of the module housing, into which the potting resin is poured. If such ports are to be used in later module operation, multiple modules cannot be connected in series without exterior piping or specially-designed pressure housings.

Poor tube sheet solvent resistance and mechanical durability can have great impact on the performance features of the resulting modules. The feasible operating environments of the hollow fiber-fabric - containing cartridges and modules ideally would include all types of solvents. No hollow fiber - forming material is inert to all solvents, but conventionally-available hollow-fiber spinning technology does make available a wide range of hollow fiber types. Assuming that one has chosen an appropriate type of hollow fiber for a particular application or range of applications, and formed a

fabric from the hollow fibers, poor solvent resistance in the potting resin can result in failure of the cartridge or module, thus limiting the capability of the hollow fibers themselves. Similarly, the purpose of the tube sheets is to isolate the lumenside and shell-side portions of the cartridge or module from each other. If the tube sheet material cracks or otherwise disintegrates, total failure of the module occurs. Unfortunately, the conventional methods of tube sheet production (centrifugal casting and gravity potting), require a high degree of potting resin flowability, thus limiting the range of usable potting resins in terms of molecular weight, viscosity and other properties and encouraging the development of solvent-induced and mechanical degradation.

Some attempts have been made to overcome one or more of these difficulties by depositing potting material to form tube sheets simultaneously while the hollow fiber bundle is being formed. For example, the Mahon et al U.S. Patent No. 3,755,034 discloses a process in which (1) two monofilaments are continuously unwound in parallel spaced-apart fashion from spools and onto a mandrel; (2) one or more continuous hollow fibers are continuously unwound transversely across and around the two filaments, forming a planar web of hollow fibers which nearly are mutually parallel and nearly are parallel to the longitudinal axis of the mandrel; (3) the web is wound spirally onto the mandrel; and (4) a band of solidifiable resin is applied adjacent to one or each end of the hollow fibers (near the filament) and subsequently cured to form a resinous tube sheet. Epoxy resins and silicone rubbers are suggested for forming the tube sheets; and the use of hypodermic needles as potting resin dispensing heads is disclosed. The Schrader U.S. Patent No. 3,728,425 takes a different approach: (1) a single continuous hollow fiber is wound transversely around an elongated cylindrical mandrel core analogously to a bundle of kite string; (2) a band of resin is simultaneously applied at each end of the core, forming tube sheets, and is cured. Polyepoxide resin is disclosed for use, and Schrader employs applicators as shown in Figure 2 to apply the bands of resin. The Krueger et al U.S. Patent No. 5,059,374 discloses that the tube sheets may be formed about the ends of a hollow fiber bundle simultaneously with laying down of the fibers, such as by dripping resin along the fibers as the fibers are laid down. Krueger mentions a number of materials that can serve as tube sheet resins, including polyolefins and polyamides. See also, Sargent et al U.S. Patent No. 3,722,695; Francisoud et al U.S. Patent No. 4,343,668; and applicants U.S. patent Nos. 5,264,171; 5,352,361 and 5,186,832.

Other prior art disclosures broadly suggesting the use of thermoplastics including polyolefins as tube sheet resins have also been made. For example, the Tigner U.S. Patent No. 4,138,460 asserts that the choice of material for potting fiber tows to make tube sheets is controlled to a large extent by the viscosity characteristics of the selected material, which should preferably have a viscosity in the range of 100 to 5,000 mPa • s (centipoise)at a temperature below 150°C, and is preferably a thermoplastic. Polyethylenes, polypropylenes, and copolymers and mixtures thereof can be used; and reference is made to compositions using low molecular weight polyethylene resins (See a similar disclosure in Lipps et al U.S. Patent No. 4,211,597 and Lipps et al U.S. Patent No. 4,231,871, which further note that low viscosity resins tend to completely wet and encapsulate the hollow fibers in shorter times and are therefore preferred). The Brauer et al, U.S. Patent Reissue No. 31,389 reviews certain materials previously used to fabricate tube sheets, and notes that many of them, including polyolefins and olefin copolymers, have been found deficient in one aspect or another. (See also, Maxwell et al U.S. Patent No. 3,339,341; Davis et al U.S. Patent No. 3,962,094; Zampini U.S. Patent No. 4,323,453; Fritzsche et al U.S. Patent No. 4,323,454; Otstot et al U.S. Patent No. 4,686,039; Opersteny et al U.S. Patent No. 4,369,605; and Chu et al U.S. Patent No. 4,865,735).

The need continues for improved methods and materials for making tube sheets which will more closely approach the solvent resistance and mechanical durability of the hollow fibers themselves.

Summary of the Invention

According to the invention, a method of fabricating a spiral-type hollow fiber membrane fabric-containing cartridge is provided, comprising the following steps:

a. forming a plurality of hollow fiber membranes each having a lumen, into a fabric-like array having a warp and a weft, in which the hollow fibers substantially are mutually-parallel and constitute the fabric weft, and are held in spaced-apart relationship by filaments constituting the fabric warp; then

b. winding the array upon an axis which is substantially parallel to the hollow fibers into a spirally-wound membrane bundle having two bundle ends and a cylindrical exterior surface; and

c. simultaneously with step (b.), extruding in molten form a high-strength, solvent resistant thermoplastic resin having a melting point at least 20 °C below the melting point of the hollow fibers, having a cristallinity of at least 30 %, and having a melt flow index from greater than 0.1 to 150 grams/10 minutes; and directing said resin onto each of the two bundle ends to thereby pot each of the two bundle ends in said resin, serving to seal the bundle end into an adjacent monolithic tube sheet, a portion of the bundle between the two tube sheets being free from resin to form a shell-side region; and then

d. exposing the lumen ends of the hollow fibers constituting at least a first one of the bundle ends to communicate with the exterior of the bundle.

The invention also provides improved spiral-type hollow fiber membrane fabric-containing cartridges, prepared by the foregoing method and a method of fabricating a spiral-type hollow fiber membrane fabric-containing module including tube sheets having improved solvent resistance and mechanical durability, comprising the following steps:

a. forming a plurality of hollow fiber membranes each having a lumen, into a fabric-like array having a warp and a weft, in which the hollow fibers substantially are mutually-parallel and constitute the fabric weft, and are held in spaced-apart relationship by filaments constituting the fabric warp; then
b. winding the array upon an axis which is substantially parallel to the hollow fibers into a spirally-wound membrane bundle having two bundle ends and a cylindrical exterior surface; and
c. simultaneously with step (b.), extruding in molten form a high-strength, solvent resistant thermoplastic resin having a melting point at least 10 °C below the melting point of the hollow fibers, and having a melt flow index between 0.1 to 150 grams/10 minutes; and directing said resin onto each of the two bundle ends to thereby pot each of the two bundle ends in said resin, serving to seal the bundle end into an adjacent monolithic tube sheet, a portion of the bundle between the two tube sheets being free from resin to form a shell-side region; then
d. exposing the lumen ends of the hollow fibers constituting at least a first one of the bundle ends to communicate with the exterior of the bundle; then
e. inserting the bundle into a housing for the bundle having first and second housing ends and a cylindrical housing interior and being suitably shaped to contain the membrane bundle, having means adjacent the first housing end sealing the tube sheet adjacent the first bundle end to the cylindrical housing interior, said housing which contains the bundle defining two regions mutually communicating through the membrane including (1) a shell-side space exterior to the portion of the bundle between the tube sheets and within the housing, and (2) a space including the hollow fiber lumens and the first bundle end; then
f. applying first end cap means adjacent the first housing end and suitably shaped, together with the cylindrical housing interior and the first bundle end, to seal the first housing end and define a first chamber communicating with the membrane lumens; and
g. applying second end cap means adjacent the second housing end and suitably shaped, together with the cylindrical housing interior and the second bundle end, to seal the second housing end and define a second chamber; and
h. providing shell-side access means in the housing, including at least one port communicating with the shell-side space, arranged to permit fluid injection and withdrawal therethrough; and
i. providing at least one port communicating with the first chamber in the housing, arranged to permit fluid injection and withdrawal therethrough.

Further embodiments will be detailed in the discussion below, and defined in the appended claims.

Brief Description of the Drawings

Figure 1 is a schematic drawing of a method for making a cartridge according to the invention, in which tube sheets are fabricated by extrusion of a solvent resistant thermoplastic resin which is directly applied to each of the bundle ends.

Figure 2 is a cross sectional photograph of a tube sheet prepared according to the method of Figure 1, magnified by a factor of twenty with an optical microscope.

Figure 3 is a cross sectional photograph of a tube sheet prepared according to the method of Figure 1, magnified by a factor of 250 with a scanning electron microscope.

Figure 4 is a schematic drawing of a cartridge made according to the method of Figure 1, in which the tube sheets and a perimeter sealing means are simultaneously fabricated by extrusion of solvent resistant resin which is directly applied to the hollow fiber membrane fabric.

Figure 5 is a schematic drawing of a cartridge made according to the method of Figure 1, in which the tube sheets and an axial sealing means are simultaneously fabricated by extrusion of solvent resistant resin which is directly applied to the hollow fiber membrane fabric.

Figure 6 is a cross-sectional drawing of a module according to Figure 5.

Detailed Description of the Invention

This invention provides improvements in the art of spiral-type hollow fiber membrane fabric-containing cartridges and modules for separations and other phase contact applications. The term "phase contact" is used herein to generally describe any process involving mass transfer.

The improvements provided by this invention primarily reside in the tube sheets in which the hollow fiber membrane fabric is potted. The primary purpose of this invention is to provide improved solvent resistance and mechanical durability in the tube sheets, and to thereby extend the utility and useful life of the overall cartridges and modules. Accord-

ingly, in the practice of this invention, the tube sheets must be fabricated from a high-strength, solvent resistant thermoplastic resin, and the resin must be extruded at an elevated temperature to form a molten band of potting material that is directed onto the surface of the hollow fiber membrane fabric to be potted. In preferred embodiments, the solvent resistant thermoplastic resin is a polyolefin resin. The other components of the cartridges and modules can be fabricated from any suitable conventionally-known materials. Preferably, such other components themselves also demonstrate exceptional solvent resistance and mechanical durability. Most preferably, they are also fabricated from polyolefin materials.

The requirements according to this invention that the tube sheets must be fabricated from a high-strength, solvent resistant thermoplastic resin which is delivered to the hollow fiber membrane fabric by extrusion at an elevated temperature to form a molten band of potting material, yield tube sheets having performance properties dramatically different than those produced by the conventional technology. Among the performance advantages of the tube sheets of the invention (and cartridges and modules containing them) are the following: (1) the process of forming the tube sheets can be automated - the fabric winding and tube sheet resin deposition occur simultaneously and continuously; (2) the automation ensures that the tube sheets will be highly uniform, and the resultant repeatability of the process makes possible its quantitative optimization; (3) the potting resin is a thermoplastic material chosen expressly for its optimum solvent resistance and mechanical durability; (4) the need for the potting resin to have a relatively low viscosity (as with the conventional gravity- and centrifugal-potting methods) can be disregarded; (5) the wicking problem is eliminated; (6) the limitations imposed by exothermic potting resin curing reactions are eliminated, both because there is no exotherm in the thermoplastic resin, and because the progressive buildup of the tube sheets while the outer surface of the nascent tube sheets rotates on the cartridge axis, promotes heat dissipation; (7) the problems resulting from gaps and air bubbles in the potting resin, potentially causing leaks in the cartridge, are eliminated; (8) the tube sheets are neither rubbery nor brittle, but plastic with high tensile- and flexural-modulus and high strength (e.g., the tube sheet polymer has high elongation at break), so the process of trimming the tube sheet ends to expose the lumens is simple, reliable and does not itself damage the hollow fibers; (9) module ports can be configured based on the desired phase contact system design, disregarding the conventional need for means for delivering potting resin to the bundle ends; (10) since resin curing is immediately complete upon cooling as the tube sheet is fabricated, there is no need to allow hours or even days for the curing process, resulting in increased productivity; and (11) according to preferred embodiments in which polyolefin resins are used, these materials are virtually inert, resulting in substantial reductions in the handling dangers and ultimate toxicity attending conventional resins such as polyepoxides and polyurethanes. The elimination of the problems resulting from gravity- or centrifugal- potting with exothermically-curing potting resins yields a special advantage: according to the invention, cartridges of any desired diameter can be uniformly potted in high quality tube sheets. The size of the resulting cartridges is limited only by the width of the hollow fiber membrane fabric and the physical size of the cartridge-winding means. For example, given a hollow fiber membrane fabric formed of 3.7 m (12 feet) long hollow fibers, a module 3.7 m (12 feet) long and 1.8 m (6 feet) in diameter could be made. Such a module would be large enough to handle industrial-scale phase contact fluid processing needs.

We will now treat the various components of the cartridges and modules in order, along with their means of assembly. This discussion will first make reference to the conventional technology for the materials, fabrication and operation of generally conventional devices, and then return to the improvements according to this invention. Although we assume the reader's understanding of the conventional technology, further reference can be made to the specific Examples and related Figures 1 - 6 below.

The hollow fibers suitable for use in the invention generally include all such materials which can be formed into spiral-type membrane-containing cartridges for separations and other phase contact applications. These hollow fibers may, for example, be microporous, foraminous, or allow diffusion transfer. Hollow fibers of relatively large diameter (sometimes referred to as "tubular membranes") can also be used provided that they have sufficient structural strength to maintain their shape in the bundle. Suitable hollow fibers, described by dimensions and other structural features, and including processes for such manufacture, are disclosed, for example, in the following U.S. patents:

Fujii U.S. Patent No. 4,293,418; Kuzumoto U.S. Patent No. 4,430,219; Banner U.S. Patent No. 4,758,341; Sekino U.S. Patent No. 4,781,834; Akasu U.S. Patent No. 4,911,846; Caskey U.S. Patent No. 4,961,760; and Bikson U.S. Patent No. 5,026,479. The hollow fibers can be fabricated from any material demonstrating acceptable solvent resistance and mechanical durability. Preferably, the hollow fibers are made from a thermoplastic resin. More preferably, they are made from the same thermoplastic resin as is selected as the solvent resistant thermoplastic resin for potting the hollow fiber membrane fabric. Most preferably, the hollow fibers are made from polyolefins. The hollow fibers must be adequately capable of being wet by contact with the chosen solvent resistant thermoplastic potting resin. Polyolefin hollow fibers which are hydrophobic and demonstrate desirable solvent resistance and mechanical durability, and means for fabricating the same, are disclosed in Soehngen et al U.S. Patent No. 4,290,987; Lowery et al U.S. Patent No. 4,405,688; Lowery et al U.S. Patent No. 4,541,981; and Fisher et al U.S. Patent No. 5,013,439.

It should be noted that the solvent resistance of crystallizable polymers such as polyolefin materials increases along with increasing crystallinity. Accordingly, steps that can be conventionally undertaken to increase the crystallinity of such hollow fibers (for example, annealing) will increase the solvent resistance of the hollow fibers.

The selected hollow fibers are then fabricated into a fabric-like array for assembly into the cartridge. Generally, the principal benefit of incorporating the hollow fibers into a fabric-like array rather than using loose fibers is that the fabric structure holds adjacent hollow fibers in a spaced-apart, mutually parallel relationship. This configuration promotes regularity of the bundle and resultant uniformity in fluid flow dynamics. In preferred embodiments, the hollow fibers constitute the weft of a fabric, e.g., are placed transversely between warp filaments by the guide elements of a loom. Given that the hollow fibers constituting the fabric weft must be held in place by warp filaments, such warp can take any form as taught in the art for fabric-like hollow fiber arrays for spiral bundle production. For example, the warp filaments can themselves be solid or also be hollow fibers, and the fabric construction can be selected from the variety taught by the art. The fabric can, alternatively, be prepared by substituting warp for weft and weft for warp, so that the hollow fibers, constituting the warp, are held by weft filaments. Hence, the terms "warp" and "weft" are used interchangeably hereinafter, and merely designate two groups of filaments or fibers which are oriented transversely to one another to yield a fabric-like web. The weft fibers can be fabricated from any material demonstrating acceptable solvent resistance and mechanical durability; preferably, they are made from the same resin as is used to make the hollow fibers. Suitable hollow fiber-containing fabric-like arrays, including their construction, structure and performance, are taught, for example, in the following U.S. patents:

Kohl U.S. Patent No. 3,557,962; Barer U.S. Patent No. 4,460,641; Akasu U.S. Patent No. 4,911,846; and Baurmeister U.S. Patent No. 4,940,617; see also European Patent Application No. 0,093,677, published November 9, 1983; and German Democratic Republic Patent Application No. 233,946, published March 19, 1986.

According to preferred embodiments, a rod-shaped core is located at the longitudinal axis of the cartridge (if desired, this core can be temporarily placed at the axis, and removed following bundle fabrication). Although a solid rod can be used solely to provide structural support for the cartridge, hollow core mandrels are preferred. Core mandrels generally have a longitudinal axis and a cylindrical exterior surface, an axial bore, and perforations along the surface which communicate with the bore. Typical mandrels have cylindrical interior and exterior surfaces; however it is within the scope of the invention to employ mandrels having other surfaces, for example, mandrels having multi-sided geometric cross-sections (pentagonal, hexagonal), and mandrels whose bores contain internal axial flow dividers or core plugs which are installed or integrally formed in the mandrel. In this regard, the term "cylindrical" as used herein refers to the general shape of a hollow fiber membrane fabric after it has been spirally-wound onto a cylindrical mandrel or core (or itself). Were, for example, a mandrel of rectangular cross-section to be used (which use is within the contemplation of the invention), then the resulting spirally-wound bundle would tend initially to itself appear rectangular with rounded corners, in cross-section (as the spiral winding continues, such a bundle will gradually tend toward a cylindrical cross-section). The purpose of the perforations along the mandrel surface which communicate with the bore, is to facilitate fluid flow between the bundle and the mandrel bore along the mandrel's longitudinal axis. The mandrel perforations can take various shapes, such as round holes and elongated slits. In cases among the various embodiments of the invention in which it is desirable to control flow volumes of fluid out of or into the mandrel bore across its length, the mandrel perforations along the length of the bore can be sized and shaped accordingly. The perforations can also be confined to selected portions of the mandrel length to control flow volumes and paths (e.g., co-current or countercurrent). The overall length of the mandrel can also be adjusted to suit particular needs. The mandrel should be fabricated from a material demonstrating acceptable solvent resistance and mechanical durability. Preferably, the mandrel is made from a thermoplastic resin. More preferably, the mandrel is made from the same thermoplastic resin as is selected as the solvent resistant thermoplastic resin for potting the hollow fiber membrane fabric. Most preferably, the mandrel is made from a polyolefin resin. Solvent resistant metals can also be used. Suitable mandrels are disclosed in the following U.S. patents:

Kuzumoto U.S. Patent No. 4,430,219; and Caskey U.S. Patent No. 4,961,760.

The process steps discussed immediately below are carried out conventionally, and as such will only be briefly mentioned. Further information on them can be found, for example, in the following U.S. patents:

Caskey U.S. Patent No. 4,961,760; and Bikson U.S. Patent No. 5,026,479.

The fabric-like array is wound onto the mandrel surface (or itself, if no mandrel is used) to form a spirally-wound, cylindrically-shaped membrane bundle having two bundle ends communicating with the mandrel bore. Assuming that the selected fabric consists of hollow fiber weft held together by solid warp filaments, then an end of the fabric is preferably aligned so that the hollow fibers are substantially parallel to the mandrel axis, the fabric end is attached to the mandrel (e.g. by clamping or adhesive), and the assembly is wound up into a cylinder. If, alternatively, a fabric having both weft and warp hollow fibers is used, then it may be desirable in certain applications to seal the warp fibers into communication with the mandrel perforations, and eliminate direct communication between the mandrel bore and the shell-side region. It is well known in the art that hollow fiber-containing fabric-like arrays can be wound helically onto a core surface, so that the hollow fibers proceed along a helical path with respect to the axis, with their two ends located at opposite ends of the core. This invention can readily be practiced with such arrays; it is also not strictly required (although preferred), that the hollow fibers are mutually parallel.

Next, still referring to the conventional technology, the two ends of the bundle are potted in resinous potting material serving to seal each of the bundle ends into a monolithic tube sheet. A variety of materials and several conventional

methods for carrying out potting to form tube sheets are well known in the art, as shown, for example, in the Caskey U.S. Patent No. 4,961,760.

When the potting process is completed, a substantial portion of the bundle (between the two tube sheets) will be free from resinous potting material, and one or both of the potted ends of the bundle are then trimmed so that the lumen ends of each hollow fiber at the trimmed end(s) will be exposed.

Finally, the potted bundle is fitted into a suitable housing to constitute a nodule. Generally, the housing should have two open ends and a cylindrical interior, and be suitably shaped to contain the membrane bundle. After the bundle is installed in the housing, the tube sheet(s) adjacent to the bundle end(s) with exposed lumens is(are) sealed to the cylindrical interior of the housing, to positively prevent fluid flow between the shell side and the lumen side without passage through the membrane. At this point, the cartridge has been divided into two regions mutually communicating through the membrane including (1) a shell-side space which is exterior to the portion of the bundle between the tube sheets and is within the housing, and (2) a space including the hollow fiber lumens and the exposed bundle end(s). Next, end cap means suitably shaped to seal each of the two open housing ends are provided. These end caps, together with the housing interior and the bundle ends, serve to define two chambers, one or both of which communicate with the membrane lumens. To facilitate fluid introduction and recovery, suitable ports are provided for the housing. In embodiments where no mandrel is present, the housing must have at least one port communicating with the shell-side space, arranged to permit fluid injection and withdrawal therethrough. In embodiments including a mandrel, such ports are optional. In all embodiments of the invention, the housing must have at least one port communicating with the lumen side, arranged to permit fluid injection and withdrawal therethrough. Multiple ports can be provided, if desired. These considerations are further discussed in the prior art, including Caskey U.S. Patent No. 4,961,760.

According to the invention, the tube sheets must be fabricated from a high-strength, solvent resistant thermoplastic resin, and the resin must be extruded at an elevated temperature to form a molten band of potting material that is directed onto the surface of the hollow fiber membrane fabric to be potted. The thermoplastic resin for use in accordance with the invention must exhibit the following properties.

Melt Flow Index. This is the single most important factor in choosing a thermoplastic resin for use. The thermoplastic must have a melt flow index ("MI") which is high enough so that the resin will flow during the potting process, and low enough so that it will (1) remain where it is deposited (not "run") and (2) not become brittle when it solidifies. The MI should be greater than 0.1 to 150 grams/10 minutes, preferably from greater than 0.1 to

50 grams/10 minutes, more preferably 1 to 40 grams/10 minutes, and most preferably 5 to 20 grams/10 minutes (ASTM Method D1238-85; 2160 grams/10 minutes; all melt flow index values in this application are tested and expressed using this method and conditions; melt flow index should generally be measured according to ASTM Method D1238-85, or if not specified there, then at a temperature between 50 to 70°C above the sample's melting point). We note that resin viscosity is highly relevant to conventional gravity- and centrifugal-potting methods, because the ability of the resin to properly flow among the hollow fibers is crucial. In practicing the methods of the invention, however, melt flow index is the more appropriate measure of resin flow properties, because of the high viscosity of the resins which we employ. To illustrate the point, we consider polyethylene as an example. For polyethylene, a melt flow index of 150 roughly corresponds to a viscosity of 500 kPa • s (5,000,000 poise; at 190°C).

A melt flow index of .01 for polyethylene, on the other hand, theoretically corresponds to a viscosity of roughly 8,000 MPa • s (80,000,000,000 poise; at 190°C), and cannot be easily measured - for that reason, such a viscosity is usually calculated by converting a melt flow index measurement into viscosity. (A melt flow index range of 5 - 20 for polyethylene corresponds to a viscosity range of roughly 20 to 4 MPa • s (200,000,000 to 40,000,000 poise; at 190°C), again theoretically). The conversion of viscosity data into corresponding melt flow index is carried out by theoretical calculations as known by those skilled in the art. The estimated viscosity values for polyethylene reported here were calculated from measured melt flow index values according to Equation 2.3-19 on page 46 of Transport Phenomena, R. Bird et al, Wiley & Sons, New York; in combination with Figure 2 of ATSM Method D1238-85, pp. 555 - 565. Similarly, elongation of the resin at break (expressed as a percentage of the pre-stretched length) and tensile- and flexural-modulus (normally expressed in megapascals, or "MPa") both decrease with increasing melt flow index. Both high elongation at break and modulus are desirable, and hence resins having a relatively low melt flow index are preferred.

Melting Point. Thermoplastic polymers can be either "crystalline" or amorphous. In general, no thermoplastic polymer is completely "crystalline" : there is always an amorphous component. (The exception to this is single crystal polymers, which are laboratory curiosities prepared on a minute scale at high expense). On the other hand, an amorphous polymer can be completely amorphous. Which designation (crystalline or amorphous) is given to a particular polymer sample is simply a subjective judgement based on the relative influence of crystalline and amorphous components on the behavior of the sample. We explain this because it is the crystalline portions of a thermoplastic resin, if any, that have a true melting point temperature (T_m). The amorphous portions of crystalline and amorphous materials will gradually soften rather than melt. Hence, amorphous portions do not have a melting point. In order to permit selection of thermoplastic resins suitable for use in this invention, we need to establish objective tests. The melting points of crystalline components can be measured conventionally using a differential scanning calorimeter. One common expression of the softening phenomenon in amorphous polymers is the glass transition temperature (T_g), which is the temperature

at which the amorphous material changes between glassy and rubbery states. The glass transition temperature can also be measured conventionally using a differential scanning calorimeter. In the case of a material having significant proportions of both crystalline and amorphous components (i.e., a "crystalline" polymer), both T_g and T_m can be measured. T_m will be higher than T_g and will tend to govern the overall behavior of the polymer sample in becoming sufficiently fluidized to enable its extrusion. In the case of a truly amorphous polymer, there will be no T_m, and T_g will govern the polymer's behavior. Another measure of both T_g and T_m is the Vicat Softening Temperature (T_v), which is determined using ASTM Designation : D 1525 - 91 "Standard Test Method for Vicat Softening Temperature of Plastics". (See also, Whelan et al, The Dynisco Extrusion Processors Handbook, page 34 (1988). In the case of a crystalline polymer, T_v corresponds to T_m. For an amorphous polymer, T_v corresponds to T_g. In accordance with the above, T_g, T_m and T_v of a given polymer are measured as appropriate, and

determination is made as explained directly below, as to whether the polymer can be used to practice the teachings of this invention. (Where not explicitly designated, "melting point" means T_m in the case of a "crystalline" polymer; and means T_g in the case of a truly amorphous polymer; "Vicat Softening Temperature" will be considered synonymous with T_m and T_g as explained above; it being understood that these values are analogous measures of the approximate point at which a resin at least begins to change from a solid to liquid state). In general, a thermoplastic resin for use according to the invention should melt at a temperature at least

10°C below the melting point of the chosen hollow fibers, more preferably at a temperature at least 20°C below the melting point of the chosen hollow fibers. Crystalline polypropylene melts at 160°C; hence, where crystalline polypropylene hollow fibers are used, a polyethylene resin melting at 135°C or less is preferred for potting the tube sheets (HDPE has a melting point of 125°C to 135°C; LLDPE has a melting point of 115°C to 130°C; and LDPE has a melting point of 105°C to 115°C).

Given the above requirements, any thermoplastic resin (1) otherwise having appropriate solvent resistance for the solvent environment in a particular desired end use application, and (2) having adequate capability of wetting the surface of the chosen hollow fibers (to result in a tube sheet without voids), can be employed as the potting resin. As nonlimiting examples, the potting resin can be selected from homopolymers, copolymers, mixtures and blends of the following: polyolefins, polycarbonates, cellulosics, polysulfones, polyamides (including nylons), polyesters, flourine-plastics (including polytetrafluoroethylene), polyacrylates and polystyrenes. (Blends are a special type of mixture in which the components are mixed at a molecular level; mixtures can be less homogeneous, and may have more than one phase).

According to preferred embodiments, the thermoplastic potting resin is a polyolefin homopolymer, copolymer, blend or mixture. For example, the resin can be polyethylene, polypropylene, poly-1-butene, polypentene, polyhexene, polymethylhexene, polyheptene, polymethylpentene, or crosslinkable polyethylene (in case of the latter, the resin is applied at a suitable temperature to catalyze the crosslinking reaction, resulting in enhanced solvent resistance and mechanical properties). Other olefin polymers, e.g., block and random copolymers of one or more olefins and non-olefins, as well as blends and mixtures of these polymers can also be used. In embodiments where such other olefin polymers are used, the essential nature of the overall resin is preferably that of a polyolefin - i.e., the polyolefin preferably constitutes at least

50%, more preferably at least 60% of the overall potting resin, and even more preferably, virtually 100% (by weight). As we have previously noted 100% olefin polymers are most preferred.

Crystallinity. Where a polyolefin potting resin is used, the resin preferably exhibits a crystallinity of at least 30%. (Crystallinity is conventionally measured using differential scanning calorimetry "DSC"). The solvent resistance of polyolefins is directly proportional to their crystallinity. Accordingly, polyolefin polymers with high crystallinity are most preferred. Polyethylene by nature is crystalline, and the degree of crystallinity can be controlled by copolymerization of ethylene with higher ethylenically-unsaturated hydrocarbons. Depending on the polymerization catalyst and process employed, polypropylene is either "crystalline" (i.e., 60% crystalline and 40% amorphous by weight fraction) or amorphous (up to 100% amorphous, by weight fraction). In the case of polypropylene, crystalline polymer is normally acceptable; completely amorphous polypropylene is less preferred. However, due to its nonpolar nature, even completely amorphous polypropylene will demonstrate greater solvent resistance than polyurethane or epoxy adhesives in particular polar solvent environments. In the case of polyethylene, there are four primary types of crystalline polymer to consider: high density polyethylene ("HDPE", 60% to 80% crystalline); linear low density polyethylene ("LLDPE", 40% to 60% crystalline); low density polyethylene ("LDPE", 30% crystalline); and very low density polyethylene ("VLDPE", less than

30% to 40% crystalline). All are acceptable, HDPE being most preferred. Even VLDPE is advantageous where the potted membranes will be exposed to polar solvents, because of its nonpolar nature. Crystallinity of these polyethylene polymers is proportional to the polymer density (degree of chain branching) in grams/liter. For example, HDPE has a density of 0.941 to

0.965g/ml; LLDPE has a density of 0.916 to 0.940g/ml; LDPE has a density of 0.910 to 0.925g/ml; and VLDPE has a density of .880 to .910g/ml. Although pure amorphous polymers are generally not preferred, they can be used if blended or mixed with partially-crystalline polymers; preferably the crystallinity (by weight fraction) of the overall blend

or mixture is at least 30%. Other olefin polymers, e.g., block and random copolymers of one or more olefins, can also be used, the crystallinity again preferably being maintained at 30% or higher.

Average Molecular Weight. Two commonly-accepted expressions of the average molecular weight of a polymer are "weight average molecular weight" and "number average molecular weight". We choose to use the former. Weight average molecular weight (expressed in grams/mole) is determined by calculating, for each molecular component of the polymer sample, the molar weight of the component in grams, and multiplying that molar weight by the mass of such component in the sample; then taking the sum of such calculations for each component; and finally, dividing the sum by the total mass of the sample. Empirically, weight average molecular weight can be determined by separating the components of the sample polymer from each other, finding the mass of each, and performing the above calculation. The separation can be done by (1) gel permeation chromatography (which functions by size exclusion of the components) or (2) dissolving the sample in a suitable solvent, distilling the solution, and collecting the components separately. The competing factors of (1) processability, which is optimized with a low molecular weight polymer, and (2) mechanical properties (including durability and resistance to cracking), which develop with entanglement of polymer molecules, are optimized with a high molecular weight polymer, should be balanced. Considering thermoplastics generally, reliance on the above guidelines for melt flow index will be adequate to select appropriate polymers for use as potting resins. According to preferred embodiments in which the potting resin is a polyolefin, entanglement (using polyethylene as an example) begins at a weight average molecular weight of 1,250. More specifically, we have found that a weight average molecular weight of at least 10,000 (where polyethylene resin is used) is preferred to ensure adequate mechanical properties. Broadly, the polyolefin resin will preferably have a weight average molecular weight between 10,000 to 500,000 grams/mole; and more preferably, it has a weight average molecular weight between 20,000 to 50,000 grams/mole. Ultra high molecular weight polyethylene, which generally has a weight average molecular weight of 1,000,000 grams/mole or more (and is

70-80% crystalline) can be used, but its extrusion requires very high pressure generally making its use less desirable.

For the remainder of this specification we will often refer specifically to polyolefin resins as the preferred materials for use as the potting resin. However, the invention is broadly applicable to thermoplastic resins having the above-defined required properties and optionally possessing the above-defined preferred properties.

The solvent resistant polyolefin resins selected for use according to preferred embodiments of the invention exhibit viscosities above 50 Pa • s (50,000 centipoise) corresponding to a melt flow index of 150, and consequently cannot be effectively used to pot the hollow fiber membrane fabric by gravity- or centrifugal-potting techniques. Hence, according to the invention, the preferred solvent resistant polyolefin resins are applied to the surface of the hollow fiber membrane fabric simultaneously while the hollow fiber membrane fabric is being wound to form a spirally-wound, cylindrically-shaped membrane bundle. More particularly, the fabric-like array is wound onto the mandrel surface (or itself, if no mandrel is used) to form a spirally-wound, cylindrically-shaped membrane bundle having two bundle ends communicating with the mandrel bore. As the hollow fiber membrane fabric is wound onto the mandrel surface, the fabric forms a nip with the surface. The solvent resistant polyolefin resin is extruded at an elevated temperature, yielding a molten band of resin of suitable width and thickness to make the tube sheet; and the molten band is continuously directed onto the surface of the hollow fiber membrane fabric. By "extrusion" is meant a process of forcibly driving the resin through a heated die, yielding a molten continuous stream of resin shaped in accordance with the chosen die. The temperature at which a given resin is extruded (i.e., as it exits the extruder die) is preferably 50 to 70°C above the polymer's melting point. This will ensure that the resin is sufficiently mobilized to flow, but not so fluidized that it will "run" (not stay where it is deposited). However, the temperature of the molten resin at the point of contact with the hollow fiber membrane fabric must also be carefully chosen to be at least 10°C below the temperature at which the chosen hollow fibers begin to melt or soften sufficiently to substantially deform or collapse the lumens, more preferably at a temperature at least 20°C below such temperature for the chosen hollow fibers. The point of contact temperature can be controlled by adjusting a variety of parameters in a manner that those of ordinary skill in the extrusion art will readily understand, including: the temperature of the various heating zones of the extruder, especially at the die orifice, the flow rate of the resin through the extruder, the take up distance between the die orifice and the point of contact (which allows the resin to cool), the speed of the advancing fabric, thickness of the band of molten resin, and the temperature and pressure applied by the compression roller (if employed). As the fabric is wound up onto the core (or mandrel), the relative speeds of travel of the core and extruder need to be adjusted: if the core is driven at a constant speed (in revolutions/minute), its circumference will steadily increase in speed. However, it is preferable to adjust the extruder speed (upward) instead of adjusting the core speed (downward), because (1) extruder speeds can be easily adjusted, and (2) maintaining the speed of motion of the molten resin in air constant (and high) will aid in maintaining the resin point-of-contact temperature. The result of this process is the application of solvent resistant resin lines at both bundle ends beginning at the unwound edge of the fabric facing and adjacent the nip with the axis, and proceeding along the fabric edge, forming continuous tube sheets at both bundle ends extending to the perimeter of the bundle. Preferably, the advancing molten band makes contact with the fabric in the vicinity of the nip. In one embodiment, the molten band makes contact with the side of the fabric which faces away from the nip; optionally in conjunction with this embodiment, a compressing roller meets with

the molten band in the vicinity of the nip to press the molten band into the fabric. In another embodiment, the molten band makes contact with the side of the fabric which faces toward the nip: in this case, the nip itself presses the molten band into the fabric; optionally, a compressing roller can be added to apply additional pressure. This pressure should be regulated to ensure that the resin adequately flows through the fabric to eliminate all gaps and voids, but not so high that an inadequate amount of resin remains among the fibers to seal them into a monolithic tube sheet. The compressing rollers can be heated to a controlled temperature to maintain fluidity of the solvent resistant resin as needed; or they can be cooled to aid in heat dissipation and solidification of the resin. The solvent resistant resin need not be directly employed to fabricate a spirally-wound, cylindrically-shaped membrane bundle: following extrusion, the molten band of resin can be allowed to solidify, and subsequently can be re-heated by any suitable means restoring it to a molten state while retaining its desired shape, and then directed onto the fabric to produce a tube sheet.

In optional embodiments, the application of the molten band of resin is discontinued after all of the desired hollow fiber membrane fabric has been wound into the spirally-wound, cylindrically-shaped membrane bundle but before the thickness of the tube sheets (radius of the bundle measured from the longitudinal axis of the mandrel) is sufficient for the tube sheets to be sealed directly to the cylindrical housing interior. The tube sheets are then extended by appropriate application of further resin. For example, resin application is continued until the desired tube sheet diameter is achieved. Alternatively, molds of suitable size can be placed over the tube sheets of the potted bundle after all of the hollow fiber membrane fabric has been applied, and resin can be injected conventionally. If needed, the tube sheets can be machined down to precise needed dimensions for module installation. The tube sheets can then be sealed to the cylindrical housing interior as needed, by simply applying an appropriate amount of solvent resistant resin to the perimeters of the tube sheets. Alternatively, ring-shaped fittings of appropriate dimensions designed to tightly rest against the end of the cylindrical housing interior can be fabricated (e.g., injection molded), and adhesively attached to the perimeters of the tube sheets.

EXAMPLES

Tube Sheet Preparation

Polypropylene hollow fiber membrane fabric samples were potted according to the invention to form tube sheets, using each of the four commercially-available polyethylene resins listed below in Table 1. The apparatus is schematically illustrated in Figure 1. Except in the cases of DOWLEX® 2035 and Dow 12350N polyethylene resins, the polyolefin resin 10 was placed in a hopper 20 which fed the resin 10 into a Hakke one-inch single-screw extruder 30 (25:1 length/diameter; 2:1 compression) fitted with a 10.2 cm (four-inch) ribbon die 40 (orifice thickness adjusted to 0.2 centimeters). In the cases of DOWLEX® 2035 and Dow 12350N polyethylene resins, the same procedure was followed except that the extruder was a Hakke one-inch twin-screw extruder 30 (25:1 length/diameter; 2:1 compression) fitted with a 10.2 cm (four-inch) ribbon die 40 (orifice thickness adjusted to 0.2 centimeters). The power suppy for the extruder was a Hakke Rheocord 90 development torque rheometer (not shown) which was electrically wired to control the extruder screw speed and the temperatures in zones 1 - 5 of the extruder barrel. The Rheometer was set to control Zones 1 to 5 (the former being adjacent to the hopper, and the latter being at the die orifice) successively passed by the resin during extrusion, so that the desired resin temperature was reached at the die orifice. The resin 10 exited the extruder 30 through the ribbon die 40 having a rectangular orifice (not shown) having a set width of 10 centimeters and thickness adjusted to 0.2 centimeters, as a molten stream 50 of resin 10 moving in the direction of the arrow x. (In the Figure, three molten streams 50 are depicted. In the actual trials, only one ribbon die was used, and only one molten stream was produced, to pot one end of the fabric bundle. However, the addition of a second ribbon die to pot the other end of the bundle is shown for illustrative purposes. The third molten stream 50 between the other two, will be discussed later. (The ribbon die thickness was adjustable from .05 to .2 centimeters). The stream 50 of resin 10 was stretched down by gravity to a width of about one inch over the take up distance and directed to make contact with the hollow fiber membrane fabric 60 fed from fabric feed roll 70 and advancing in the direction of the arrow y at a point 80 near the nip 90 formed between the mandrel 100 and the fabric 60, whereupon it continued to move in the direction indicated by the arrow z. An optional compressing roller 110 (which was used with (and only with) all trials on the Dow 12350N resin and on the Dow 17350N resin, and there unheated) forced the stream 50 of resin 10 into the fabric 60. The mandrel 100 was advanced by a shaft driven by a variable-speed motor (not shown) to take up the advancing hollow fiber membrane fabric 60 potted with resin 10.

Table 1

Polyethylene Resins					
Name	Resin Type	Density[1]	Melt Flow Index[2]	Melting Point[3]	Elongation at Break[4]
DOWLEX® 2035	LLDPE	0.919	6.0	97[6]	650
HOSTALEN®[7,10] GM 5010T2	HDPE	0.953	0.1	130	N.A.[8]
HOSTALEN®[10] GC 7260	HDPE	0.957	8.0	128	800+
Dow[9] 12350N	HDPE	0.950	12.0	123[6]	1,000
Dow 17350N	HDPE	0.950	17.0	123	900

[1] Grams per milliliter (g/ml).
[2] ASTM Method D1238-85; 190°C; 2160 grams/10 minutes.
[3] Degrees Centigrade (°C.).
[4] Expressed as a percentage of the pre-stretched length.
[5] DOWLEX® products are made by the Dow Chemical Company.
[6] Vicat Softening Temperature in degrees Centigrade (°C.), this data point only; determined in accordance with ASTM - D-1525.
[7] HOSTALEN is a registered trademark of Hoechst Aktiengesellschaft.
[8] Data not available.
[9] Available from the Dow Chemical Company.
[10] Comparative Example

The particular processing conditions which were employed with each resin sample, and the qualitative results, are summarized in Table 2. Additionally, in the Dow 12350N HDPE trial, the extruder screws were turning at 33 rpm; Zones 1 - 5 of the extruder barrel were set at 130°C, 155°C, 175°C, 175°C and 175°C, respectively; the recorded polymer melt temperatures at Zones 3 and 5, respectively were 185°C and 184°C; and the pressure in the barrel at Zones 3 and 5, respectively was 8.14 and 11.93 bar (118 and 173 psi). In the Dow 2035 LLDPE trial, the extruder screws were turning at 44 rpm; Zones 1 - 5 of the extruder barrel were set at 163°C (325°F), 218°C (425°F), 232°C (450°F), 238°C (460°F), and 238°C (460°F), respectively; the recorded polymer melt temperatures at Zones 4 and 5, respectively were 229°C (444°F) and 274°C (525°F); and the pressure in the barrel at Zones 3 and 5, respectively was 4.07 and 4.83 bar (59 and 70 psi).

Table 2

Process and Results				
Name	Type	Extrusion Temperature[1]	Take Up Distance[2]	Results
DOWLEX® 2035	LLDPE	238	1.0 (0,305 m)	Good flow; sealed the fibers well.
HOSTALEN®[4] GM 5010T2	HDPE	260	N.A.[3]	Very poor flow; viscosity too high; unusable.
HOSTALEN®[4] GC 7260	HDPE	190	0.5 (0,152 m)	Good flow; temperature too high; fibers damaged.
Dow 12350N	HDPE	175	0.5 (0,152 m)	Good flow; sealed the fibers well.
Dow 17350N	HDPE	160	0.5 (0,152 m)	Good flow; sealed the fibers well; the low extrusion temperature is an advantage.

[1] Die temperature (Zone 5) of extruder barrel in degrees Centigrade.
[2] Expressed in linear feet measured from the die orifice to the point of contact between the molten resin and the fabric.
[3] Unmeasurable.
[4] Comparative Example

Discussion of Results

The DOWLEX® 2035 LLDPE having a MI of 6g/10 min flowed well and resulted in good sealing of the fabric. Although the extrusion temperature was very high, the take up distance was sufficient to cool the resin so that the hollow fibers were not damaged by the contact; and the resin's low melting point allowed it to remain molten despite the cooling.

The HOSTALEN® GM 5010T2 HDPE demonstrated very poor flow due to its extremely low melt flow index and consequent high melt viscosity. Adhesion of the resin to the hollow fibers was very poor and the potting was unsuccessful.

The HOSTALEN® GC 7260 HDPE flowed well at an extrusion temperature of 190°C. However, at this temperature and a take up distance of 15.2 cm (0.5 feet), the moltenpolyethylene started to melt the hollow fibers on contact. Lowering the extrusion temperature or extending the take up distance resulted in resin flow inadequate to effectively pot the hollow fibers.

The Dow 12350N HDPE has a relatively high melt flow index (12.0 g/10min) compared with the other resins tested. This resin flowed very well at a relatively low extrusion temperature (175°C). The resin completely filled the spaces between the hollow fibers and sealed all gaps. After complete curing, the tube sheet was cut to yield cross-sectional samples of the potted hollow fibers. Figures 2 and 3 respectively show optical microscope (magnification factor of 20), and scanning electron microscope (magnification factor of 250) cross-sectional views of hollow fibers in the tube sheet. Both of these Figures confirm that there are no gaps around the potted hollow fibers, and that the hollow fibers remain cylindrical with unobstructed lumens.

Solvent Resistance Studies

We know from data available in the literature ("HOSTALEN® and HOSTALEN PP®, Resistance to Chemicals and Other Media", Hoechst Plastics, May 1987; and "Chemical Resistance of Plastic Molding Materials", Dow Chemical Co., Plastics Dept., 1968) that the solvent resistance of high density polyethylene is equivalent to or better than that of polypropylene. As shown in Table 3 below, we would expect polyethylene to demonstrate equal performance (as compared with polypropylene) in methyl ethyl ketone, methyl isobutyl ketone and alcohol; better performance in amyl acetate, and slightly better performance in xylene.

Table 3

Solvent Resistance						
Name	Testing Temperature	MEK[1]	MIBK[2]	AmAc[3]	Alcohol	Xylene
PP[4]	60°C	L[5]	L	N[6]	R[7]	N
	20°C	R	R	L	R	N
HDPE	60°C	L	L	R	R	N
	20°C	R	R	R	R	L

[1] methyl ethyl ketone.
[2] methyl isobutyl ketone.
[3] amyl acetate.
[4] polypropylene.
[5] resistant to a limited degree; swelling between 3 - 8 percent by volume.
[6] not resistant; swelling in excess of 8 percent by volume.
[7] resistant; swelling less than 3 percent by volume.

We carried out actual tests on the DOWLEX® 2035 LLDPE, HOSTALEN® GC 7260 HDPE, Dow 12350N HDPE and Dow 17350N HDPE with the same solvents to assess the solvent resistance of these resins. The tests were conducted by pouring resin pellets into aluminum weighing pans and heating the pellets in a convection oven for 30 minutes at 180°C to produce disk-shaped resin samples. The disk-shaped sampled were then immersed in the various solvents for the time periods indicated in Table 4, and swelling was monitored by measuring the weight increase of the samples. The results are summarized in Table 4. The data show that the DOWLEX® 2035 LLDPE had poor solvent resistance, especially at 50°C. All three of the HDPE samples tested, HOSTALEN® GC 7260, Dow 12350N and Dow 17350N, demonstrated good solvent resistance overall, with limited resistance to xylene. Since HDPE yields much better results than LLDPE, these data confirm that high density (crystallinity) is important in providing good solvent resistance. Review of the melt flow indices of these resins shows that despite the lower melt flow index (higher molecular weight) of the DOWLEX® 2035 LLDPE, the three HDPE samples gave better results. This indicates that high density is more important than low melt flow index (high molecular weight) in determining resin solvent resistance.

Table 4

Solvent Resistance Tests						
Name	Testing Temperature	Swelling[4]				
		MEK[1]	MIBK[2]	AmAc[3]	ETOH[5]	Xylene[6]
DOWLEX®[8] 2035	50°C	4.2	5.1	8.4	0.4	37
	R.T.[7]	1.0	1.2	2.1	0.2	17
HOSTALEN®[8] GC 7260	50°C	1.0	0.9	1.5	0	7.1
	R.T.	0.3	0.3	0.6	0	3.5
Dow 12350N	50°C	0.9	1.0	1.5	0.0	8.8
	R.T.	0.6	0.2	0.4	0.0	4.0
Dow 17350N	50°C	0.8	0.9	1.6	0.0	8.3
	R.T.	0.2	0.1	0.4	0.0	3.1

[1] methyl ethyl ketone.
[2] methyl isobutyl ketone.
[3] amyl acetate.
[4] expressed as a percentage of the pre-testing volume, by weight. Data were taken after fourteen days of continuous sample immersion in the solvent.
[5] ETOH - 95% ethanol and 5% methanol (weight/weight).
[6] Specifically, meta-xylene.
[7] room temperature (about 25°C). [8] Comparative Example

In further optional embodiments, this invention can be combined with the teachings of copending U.S. patent application serial No.: 07/816,511 entitled, "Spiral-Wound Hollow Fiber Membrane Fabric Cartridges and Modules Having Flow-Directing Baffles", by simultaneously forming baffles in the bundle while potting the bundle in tube sheets. Only the portions of those teachings essential to an understanding of how to make such combinations are set forth here. More particularly, that application discloses the addition of at least one axially-symmetrical baffle (hereinafter "sealing means") formed within the shell-side region of the hollow fiber bundle in a shape which is rotationally symmetrical about the axis. These sealing means create radial cross-flow between the shell-side region and the hollow fiber lumens; the benefits of such radial cross-flow include: reduced channeling and development of boundary layers (tangential flow of fluid past the hollow fibers without membrane surface contact) and increased direct contact between fluids and membrane surfaces (and hence, greater phase contact and more efficient cartridge performance). The various process embodiments discussed above concerning application of the molten resin to form the tube sheets can also be applied to making the sealing means. As needs dictate, the solvent resistant resins used to form the sealing means and tube sheets can be the same or different; preferably, the same resin is used.

Referring to Figure 4, a schematic drawing of a module is shown, in which hollow fiber fabric bundle (1) is contained in housing (2), surrounding mandrel (12). A single radially-symmetrical disc-shaped perimeter sealing means (3a, 3b) extends from the perimeter (4a, 4b) of the bundle (1) to a distance (13a, 13b) from the mandrel (12), and a core plug (14) is provided in the bore of the mandrel (12) at the point where the perimeter sealing means (3a, 3b) approaches the surface of the mandrel (12). As shown by the arrows (y, z), feed fluid enters the upstream mandrel port (15), is forced radially outward by the core plug (14) into the shell-side of the bundle (1), passes through the unobstructed axial subportion (16a, 16b) of the bundle (1), and exits through the downstream mandrel port (17). Since there is no blockage in the bore of the mandrel (12) downstream of the single core plug (14), the core plug (14) is preferably located near the downstream mandrel port (17) to minimize stagnant areas in the shell-side flow. Permeate is collected in the lumen-side and withdrawn at one or both off-center lumen ports (18, 19) at the ends of the bundle (1). Alternatively (not shown), feed can be introduced in the lumen-side at one of the off-center lumen ports (18, 19) at the ends of the bundle (1), and a sweep fluid can be introduced through the upstream mandrel port (15) or downstream mandrel port (17) to carry away permeate.

Shell-side fluid must be prevented from exterior channeling whenever a bundle includes one or more perimeter sealing means - i.e., flow along the outside perimeter of the bundle. This is accomplished by providing impermeable wrapping means covering the exterior cylindrical surface of the bundle. This can be either a coating or web-like impermeable layer or equivalent means affixed to the exterior cylindrical surface of the bundle. When such a wrapping means

is present, perimeter sealing means are placed in sealing engagement with the impermeable wrapping means. In embodiments where no mandrel is present, an opening must be provided in the impermeable wrapping means to allow at least one port ("shell-side access means") communicating with the shell-side space, to be placed on the side of the bundle. The edges of the impermeable wrapping means surrounding the shell-side access means should be sealed to the shell-side access means to prevent leakage from the shell-side space.

In many cases it will be desirable to provide a hollow mandrel, as discussed above, to serve as the core for the module. In such cases, the feed fluid can be directed into the center of the bundle through the mandrel, instead of being directed into a side of the housing (the latter of which detracts from radial flow, because the flow enters the bundle only on one side). In such cases, it is necessary to supplement the radially-symmetrical sealing means with one or more core plugs which may be installed or integrally formed in the mandrel, to prevent the feed from simply flowing straight through the mandrel bore without entering the bundle. Core plugs in general are known in the art, as shown in the following U.S. patents:

Schell U.S. Patent No. 3,872,014; Foreman U.S. Patent No. 4,033,878; Caskey U.S. Patent 4,961,760; Herczeg U.S. Patent No. 4,997,564; and Reddy U.S. Patent No. 5,034,126.

Fabrication of the module schematically shown in Figure 4 proceeds as described above (the mandrel serving as the axis), the tube sheets being formed simultaneously as the fabric is wound until the fabric has been wound up to the predetermined distance from its axis. As schematically shown in Figure 1 as the central molten stream 50 of resin 10 (between the other two molten streams), an additional molten band of solvent resistant resin (which is preferably the same resin as is used to produce the tube sheets, is then continuously applied along with the continuing application of resin to form the tube sheets, beginning at the unwound edge of the fabric facing and adjacent the nip with the wound portion, and preferably at the midway point between the two bundle ends, and proceeding in a line perpendicular to the axis (x), forming a continuous seal extending to the perimeter of the bundle. This seal has a planar disc-like monolithic shape.

Figure 5 schematically illustrates a module in which hollow fiber fabric bundle (1) is contained in housing (2), surrounding mandrel (12). A single radially-symmetrical disc-shaped axial sealing means (20a, 20b) extends from the surface of the mandrel (12) to a distance (11a, 11b) from the cylindrical housing interior (38), and a core plug (14) is provided in the bore of the mandrel (12) at the point where the axial sealing means meets the surface of the mandrel (12). As shown by the arrows (y, z), feed fluid enters the upstream mandrel port (15), is forced radially outward by the core plug (14) and axial sealing means (20a, 20b) into the shell-side of the bundle (1), passes through the unobstructed perimeter sub-portion (21a, 21b) of the bundle (1), and exits through the downstream mandrel port (17). Again, since there is no blockage in the bore of the mandrel (12) downstream of the single core plug (14), the core plug (14) is preferably located near the downstream mandrel port (17) to minimize stagnant areas in the shell-side flow. Perimeate is collected in the lumen-side and withdrawn through the off-center lumen ports (18, 19) at one or both ends of the bundle (1). Alternatively (not shown), feed can be introduced in the lumen-side at one of the off-center lumen ports (18, 19) at the ends of the bundle (1), and a sweep fluid can be introduced through the upstream mandrel port (15) or downstream mandrel port (17) to carry away permeate. As schematically shown in Figure 1 as the central molten stream 50 of resin 10 (between the other two molten streams), the axial sealing means (20a, 20b) is constructed by continuously directing a molten band of solvent resistant resin onto the hollow fiber membrane fabric (simultaneously with the application of resin to form the tube sheets), beginning at the module axis and proceeding in a direction perpendicular to the axis outward along the unwound edge of the fabric facing and adjacent the advancing nip with the wound portion, until the desired distance from the cylindrical housing interior (38) is reached.

Figure 6 is a cross-sectional drawing of a module according to Figure 5. This drawing shows a plurality of hollow fibers in the bundle (1), drawn much larger than scale. The bundle (1) surrounds a mandrel (12) centered on the axis (x), and is contained by a housing (2). At the midpoint of the mandrel (12) is a core plug (14), and adjacent thereto, an axial sealing means (20a, 20b). The bundle (1) is potted at both ends in tube sheets (24, 25). End caps (26, 27) are fitted over the tube sheets (24, 25) forming chambers (28, 29). The housing (2) is fitted at both ends with o-rings (30, 31) in sealing engagement with the tube sheets (24, 25); and o-rings (32, 33) in sealing engagement with the end caps (26, 27). The mandrel (12) is fitted at both ends with tubes (34, 35) which are each fitted with two o-rings (36, 37) in sealing engagement with the bore of the mandrel (12) which respectively serve to guide feed fluid from the upstream mandrel port (15) into the mandrel (12), and from the mandrel (12) to the downstream mandrel port (17). As shown by the arrows (y, z), feed fluid enters the mandrel (12) through the upstream mandrel port (15), and is forced radially through the shell-side of the bundle (1) by the core plug (14) and axial sealing means (20a, 20b). The fluid flows through the unobstructed perimeter sub-portion (21a, 21b) of the bundle (1), and flows inwardly toward the mandrel (12) to exit as concentrate through the downstream mandrel port (17). Permeate is collected at the lumen-side port (18). A second lumen port (19) has been added at the downstream end of the bundle (1). This modification makes it possible to introduce a sweep fluid at one of the lumen ports (18) and (19), and to withdraw it, together with feed fluid components that have permeated from the shell-side space through the membrane, at the other one of the lumen ports.

Attention should be paid to the width and thickness of the molten bands of solvent resistant resin applied to produce the tube sheets and sealing means, respectively. Concerning the tube sheets, the width of the band as applied to the

hollow fiber membrane fabric is dictated by a balance of the competing goals to (1) provide adequate adhesive force to prevent failure of the tube sheets (the tube sheets must withstand the full operating pressure of the cartridge), and (2) maximize the hollow fiber surface area which is exposed to shell side fluid contact, and minimize the distance between successive layers of hollow fiber membrane fabric in the cartridge (thereby further maximizing the hollow fiber surface area in the cartridge). Further, the thickness of the band should be adjusted to both (1) provide enough volume of resin to completely coat the portion of the hollow fibers to be potted, while again (2) maximizing the hollow fiber surface area which is exposed to shell side fluid contact. Preferably, an adjustable ribbon die is used to extrude the resin. For example, a ribbon die having an adjustable thickness of .05 - .2 centimeters and a width of 10.2 cm (4 inches) can be used. The ribbon die dimensions and take up distance are then empirically adjusted to result, after stretching of the resin over the take up distance and according reduction in its width and thickness, in a resin band of appropriate thickness which will result in the formation of a tube sheet of desired width. Typically, tube sheets having a width of about one to one-and-one-half inches are preferred on bundles having a diameter up to about 10.2 cm (4 inches); bundles having larger diameters generally require tube sheets of proportionately greater width.

Generally, the width of the axial- and perimeter-sealing means can be more narrow than that of the tube sheets, because (1) it is desirable to minimize the shell-side space consumed by the sealing means and attendant reduction in the module's mass transfer efficiency, and (2) the sealing means need not withstand the full operating pressure. In additional embodiments, one or more of each of the above two types of sealing means are employed together. Although the discussion above has been directed to sealing means in planar disc form oriented perpendicular to the module axis, sealing means having other shapes which are axially-symmetrical and rotationally symmetrical about the axis may be provided where desired.

The extrusion dies to be employed can be chosen on a case by case basis, as dictated by the needed shape, size and number of molten resin bands. Where a cartridge having tube sheets at both ends is to be made, a die having two orifices appropriately spaced and positioned is preferably used. If one or more sealing means are to be fabricated in the bundle, appropriate further die orifices can be added, together with means to open and close the orifices as needed to make the sealing means. Such opening and closing means can be automatically controlled. In preferred embodiments, dies that will produce ribbon-shaped bands of molten resin (ribbon dies) are employed: whereas the width of the bands must be sufficient to withstand operating pressures, the relative thickness of the deposited resin should be consistent with the thickness of the fabric.

In a particularly preferred embodiment of the invention, the components of the cartridge (hollow fiber membrane fabric and solvent resistant resin) are all polyolefin materials. In this manner, the materials constituting the hollow fiber membrane fabric and solvent resistant resin can be matched in terms of solvent resistance to specific classes of solvents. Hence, the overall nonpolarity of the cartridge, its resistance to polar solvents, and predictability of the cartridge's performance in particular application environments can be simultaneously maximized.

Whereas the cartridge components are fabricated from polymeric materials in part due to processability requirements, the other components making up a module can be chosen from a wide range of materials which have even greater solvent resistance and mechanical durability. However, in particular applications, fabrication of some or all module components from polyolefin materials may also be desirable.

The spiral-type hollow fiber membrane fabric-containing cartridges and modules of the invention are generally operated in a manner similar to conventional cartridges and modules. Accordingly, suitable operating procedures are disclosed in the following U.S. patents:

Banner U.S. Patent No. 4,758,341; Holland U.S. Patent No. 4,855,058; and Caskey U.S. Patent No. 4,961,760. More particularly, a fluid can be introduced into the bundle lumens at either or both potted ends, and allowed to diffuse out of the fibers into the shell-side region. The permeated fluid can then be collected at either the mandrel (through the perforations) or at the cartridge perimeter, or both. Alternatively, a fluid can be introduced at one or both ends of the mandrel through the bore and allowed to diffuse through the mandrel perforations into the shell-side region. Fluid which permeates through the fibers into their lumens can then be collected at one or both of the potted bundle ends; and concentrate remaining in the shell-side region can be collected at the cartridge perimeter. Ports to facilitate these permutations can be built into the module housing at the bundle ends and on the cylindrical exterior of the housing as needed.

End use applications for the spiral-type hollow fiber membrane fabric-containing cartridges and modules of the invention include the end uses for conventional cartridges and modules as disclosed in the art. For example, the end uses disclosed in the following U.S. patents are contemplated:

Holland U.S. Patent No. 4,855,058; Baurmeister U.S. Patent No. 4,940,617; and Caskey U.S. Patent No. 4,961,760. In general, gaseous fluids will flow more evenly and freely through the bundle than liquids, whose resistance to free flow increases with viscosity.

Claims

1. A method of fabricating a spiral-type hollow fiber membrane fabric-containing cartridge including tube sheets having improved solvent resistance and mechanical durability, comprising the following steps:

a. forming a plurality of hollow fiber membranes each having a lumen, into a fabric-like array having a warp and a weft, in which the hollow fibers substantially are mutually-parallel and constitute the fabric weft, and are held in spaced-apart relationship by filaments constituting the fabric warp; then

b. winding the array upon an axis which is substantially parallel to the hollow fibers into a spirally-wound membrane bundle having two bundle ends and a cylindrical exterior surface; and

c. simultaneously with step (b.), extruding in molten form a high-strength, solvent resistant thermoplastic resin having a melting point at least 20 °C below the melting point of the hollow fibers, having a cristallinity of at least 30 %, and having a melt flow index from greater than 0.1 to 150 grams/10 minutes; and directing said resin onto each of the two bundle ends to thereby pot each of the two bundle ends in said resin, serving to seal the bundle end into an adjacent monolithic tube sheet, a portion of the bundle between the two tube sheets being free from resin to form a shell-side region; and then

d. exposing the lumen ends of the hollow fibers constituting at least a first one of the bundle ends to communicate with the exterior of the bundle.

2. The method of claim 1, in which the high-strength, solvent resistant thermoplastic resin has a melt flow index from greater than 0.1 to 50 grams/10 minutes.

3. The method of claim 1, in which the high-strength, solvent resistant thermoplastic resin has a melt flow index between 1 and 40 grams/10 minutes.

4. The method of claim 1, in which the high-strength, solvent resistant thermoplastic resin has a melt flow index between 5 and 20 grams/10 minutes.

5. The method of claim 1, in which the axis is constituted by a hollow mandrel having a longitudinal axis and a cylindrical exterior surface, an axial bore, and perforations along the surface which communicate with the bore.

6. The method of claim 1, in which the lumen ends of the hollow fibers constituting both of the bundle ends are exposed to communicate with the exterior of the bundle.

7. The method of claim 1, comprising further steps as follows:

e. subsequent to step (b), covering the cylindrical exterior surface of the bundle with an impermeable wrapping means; and

f. simultaneously with step (b), forming at least one axially-symmetrical sealing means from high-strength, solvent resistant thermoplastic resin within the shell-side region in a shape which is rotationally symmetrical about the axis, said sealing means being in sealing engagement with the impermeable wrapping means and extending to a distance away from the axis, forming an axial sub-portion of the shell-side region which is unobstructed to fluid flow, said sealing means dividing the shell-side region into two shell-side portions in mutual fluid communication through the sub-portion.

8. The method of claim 1, in which the high-strength, solvent resistant thermoplastic resin is a polyolefin homopolymer, copolymer, blend or mixture comprising one or more members of the group consisting of polyethylene, polypropylene, poly-1-butene, polypentene, polyhexene, polymethylhexene, polyheptene and polymethylpentene.

9. The method of claim 8, in which the high-strength, solvent resistant thermoplastic resin has a weight average molecular weight between 10,000 and 500,000 grams per mole.

10. The method of claim 8 or 9, in which the high-strength, solvent resistant thermoplastic resin is a high density polyethylene homopolymer having a crystallinity of 60% to 80%.

11. The method of claim 9, in which the high-strength, solvent resistant thermoplastic resin has a weight average molecular weight between 20,000 and 50,000 grams/mole.

12. The method of claim 8, in which the hollow fibers are made from a polypropylene homopolymer having a melting point of 160° Centigrade, and the high-strength, solvent resistant thermoplastic resin is a polyethylene homopolymer having a melting point of 135 °C or less.

13. A spiral-type hollow fiber membrane fabric-containing cartridge including tube sheets having improved solvent resistance and mechanical durability, fabricated by the method of claim 1, 5, 6, 7, 8, 9, 10 or 12.

14. A method of fabricating a spiral-type hollow fiber membrane fabric-containing module including tube sheets having improved solvent resistance and mechanical durability, comprising the following steps:

a. forming a plurality of hollow fiber membranes each having a lumen, into a fabric-like array having a warp and a weft, in which the hollow fibers substantially are mutually-parallel and constitute the fabric weft, and are held in spaced-apart relationship by filaments constituting the fabric warp; then
b. winding the array upon an axis which is substantially parallel to the hollow fibers into a spirally-wound membrane bundle having two bundle ends and a cylindrical exterior surface; and
c. simultaneously with step (b.), extruding in molten form a high-strength, solvent resistant thermoplastic resin having a melting point at least 10 °C below the melting point of the hollow fibers, and having a melt flow index between 0.1 to 150 grams/10 minutes; and directing said resin onto each of the two bundle ends to thereby pot each of the two bundle ends in said resin, serving to seal the bundle end into an adjacent monolithic tube sheet, a portion of the bundle between the two tube sheets being free from resin to form a shell-side region; then
d. exposing the lumen ends of the hollow fibers constituting at least a first one of the bundle ends to communicate with the exterior of the bundle; then
e. inserting the bundle into a housing for the bundle having first and second housing ends and a cylindrical housing interior and being suitably shaped to contain the membrane bundle, having means adjacent the first housing end sealing the tube sheet adjacent the first bundle end to the cylindrical housing interior, said housing which contains the bundle defining two regions mutually communicating through the membrane including (1) a shell-side space exterior to the portion of the bundle between the tube sheets and within the housing, and (2) a space including the hollow fiber lumens and the first bundle end; then
f. applying first end cap means adjacent the first housing end and suitably shaped, together with the cylindrical housing interior and the first bundle end, to seal the first housing end and define a first chamber communicating with the membrane lumens; and
g. applying second end cap means adjacent the second housing end and suitably shaped, together with the cylindrical housing interior and the second bundle end, to seal the second housing end and define a second chamber; and
h. providing shell-side access means in the housing, including at least one port communicating with the shell-side space, arranged to permit fluid injection and withdrawal therethrough; and
i. providing at least one port communicating with the first chamber in the housing, arranged to permit fluid injection and withdrawal therethrough.

15. The method of claim 14, comprising further steps as follows:

e. simultaneously with step (b) , forming at least one axially-symmetrical sealing means from high-strength, solvent resistant thermoplastic resin within the shell-side region in a shape which is rotationally symmetrical about the axis, said sealing means intersecting the axis and extending to a perimeter which is located at a distance away from the cylindrical housing interior, forming a sub-portion of the shell-side region between the cylindrical interior of the housing and the perimeter of the sealing means which is unobstructed to fluid flow, said sealing means dividing the shell-side region into two shell-side portions in mutual fluid communication through the sub-portion.

16. A spiral-type hollow fiber membrane fabric-containing module including tube sheets having improved solvent resistance and mechanical durability, fabricated by the method of claim 14 or 15.

Patentansprüche

1. Verfahren zur Herstellung einer ein Hohlfasermembran-Gewebe vom Spiraltyp enthaltenden Kartusche, die Schlauchfolien mit verbesserter Lösungsmittelbeständigkeit und mechanischer Haltbarkeit umschließt, umfassend die folgenden Schritte:

a. Formen einer Mehrzahl von Hohlfasermembranen, von denen jede ein Lumen aufweist, in eine gewebeartige Anordnung mit Kette und Schuß, in der die Hohlfasern im wesentlichen parallel zueinander sind und den Schuß des Gewebes darstellen und durch Filamente, die die Kette des Gewebes darstellen, in einer räumlich voneinander getrennten Beziehung gehalten werden; dann das

b. Aufwickeln der Anordnung auf eine im wesentlichen parallel zu den Hohlfasern befindliche Achse in ein spiralförmig gewickeltes Membranbündel mit zwei Bündelenden und einer zylindrischen Außenoberfläche und

c. gleichzeitig mit Schritt (b.) das Extrudieren in geschmolzener Form eines hochfesten, lösungsmittelbeständigen, thermoplastischen Harzes mit einein Schmelzpunkt, der wenigstens 20 °C unter dem Schmelzpunkt der Hohlfasern liegt, mit einer Kristallinität von wenigstens 30 % und mit einem Schmelzflußindex von mehr als 0,1 bis 150 g/10 min, und das Leiten des Harzes auf jedes der beiden Bündelenden, um dadurch jedes der beiden Bündelenden in dein Harz einzukapseln, was dazu dient, das Bündelende in einer angrenzenden monolithischen Schlauchfolie zu siegeln, wobei ein Teil des Bündels zwischen den beiden Schlauchfolien frei von dem Harz ist, wodurch ein Hüllen-Seitenbereich gebildet wird; und dann das

d. Freilegen der Lumen-Enden der wenigstens ein erstes Bündelende bildenden Hohlfasern, damit sie mit dem Äußeren des Bündels in Verbindung stehen.

2. Verfahren nach Anspruch 1, wobei das hochfeste, lösungsmittelbeständige, thermoplastische Harz einen Schmelzflußindex von mehr als 0,1 bis 50 g/10 min aufweist.

3. Verfahren nach Anspruch 1, wobei das hochfeste, lösungsmittelbeständige, thermoplastische Harz einen Schmelzflußindex zwischen 1 und 40 g/10 min aufweist.

4. Verfahren nach Anspruch 1, wobei das hochfeste, lösungsmittelbeständige, thermoplastische Harz einen Schmelzflußindex zwischen 5 und 20 g/10 min aufweist.

5. Verfahren nach Anspruch 1, wobei die Achse aus einem hohlen Formkern mit einer Längsachse und einer zylindrischen Außenoberfläche, einer axialen Bohrung und mit der Bohrung in Verbindung stehenden Perforationen entlang der Oberfläche besteht.

6. Verfahren nach Anspruch 1, wobei die Lumen-Enden der die beiden Bündelenden darstellenden Hohlfasern freigelegt werden, damit sie mit dem Äußeren des Bündels in Verbindung stehen.

7. Verfahren nach Anspruch 1, weiterhin umfassend die folgenden Schritte:

e. nach Schritt (b) das Abdecken der zylindrischen Außenoberfläche des Bündels mit einen undurchlässigen Mittel zum Umhüllen; und

f. gleichzeitig mit Schritt (b) das Bilden wenigstens eines axialsymmetrischen, siegelnden Mittels aus hochfestem, lösungsmittelbeständigen, thermoplastischen Harz innerhalb des Hüllen-Seitenbereiches in einer um die Achse rotationssymmetrischen Form, wobei das siegelnde Mittel sich in einem siegelnden Eingriff mit den undurchlässigen Mittel zum Umhüllen befindet und sich bis zu einer gewissen Entfernung von der Achse erstreckt, wodurch ein axialer Teilbereich des Hüllen-Seitenbereiches gebildet wird, der einen Fluidstrom nicht blockiert, wobei das siegelnde Mittel den Hüllen-Seitenbereich in zwei Hüllen-Seitenbereiche unterteilt, die durch den Teilbereich hindurch in wechselseitiger Fluid-Kommunikation stehen.

8. Verfahren nach Anspruch 1, wobei das hochfeste, lösungsmittelbeständige, thermoplastische Harz ein Polyolefin-Homopolymer, -Copolymer, -gemisch oder eine Polyolefinmischung ist, umfassend einen oder mehrere Bestandteile der aus Polyethylen, Polypropylen, Poly-1-buten, Polypenten, Polyhexen, Polymethylhexen, Polyhepten und Polymethylpenten bestehenden Gruppe.

9. Verfahren nach Anspruch 8, wobei das hochfeste, lösungsmittelbeständige, thermoplastische- Harz ein Massenmittel der Molmasse von 10 000 bis 500 000 g/mol aufweist.

10. Verfahren nach Anspruch 8 oder 9, wobei das hochfeste, lösungsmittelbeständige, thermoplastische Harz ein Polyethylen-Homopolymer mit hoher Dichte mit einer Kristallinität von 60 % bis 80 % ist.

11. Verfahren nach Anspruch 9, wobei das hochfeste, lösungsmittelbeständige, thermoplastische Harz ein Massenmittel der Molmasse von 20 000 bis 50 000 g/mol aufweist.

12. Verfahren nach Anspruch 8, wobei die Hohlfasern aus einem Polypropylen-Homopolymer mit einem Schmelzpunkt von 160 °C hergestellt sind und das hochfeste, lösungsmittelbeständige, thermoplastische Harz ein Polyethylen-Homopolymer mit einen Schmelzpunkt von 135 °C oder niedriger ist.

13. Hohlfasermembran-Gewebe vom Spiraltyp enthaltende Kartusche, umfassend Schlauchfolien mit verbesserter

Lösungsmittelbeständigkeit und mechanischer Haltbarkeit, hergestellt durch das Verfahren nach Anspruch 1, 5, 6, 7, 8, 9, 10 oder 12.

14. Verfahren zur Herstellung eines ein Hohlfasermembran-Gewebe vom Spiraltyp enthaltenden Moduls, umfassend Schlauchfolien mit verbesserter Lösungsmittelbeständigkeit und mechanischer Haltbarkeit, umfassend die folgenden Schritte:

a. Formen einer Mehrzahl von Hohlfasermembranen, von denen jede ein Lumen aufweist, in eine gewebeartige Anordnung mit Kette und Schuß, in der die Hohlfasern im wesentlichen parallel zueinander sind und den Schuß des Gewebes darstellen und durch Filamente, die die Kette des Gewebes darstellen, in einer räumlich voneinander getrennten Beziehung gehalten werden; dann

b. Aufwickeln der Anordnung auf eine im wesentlichen parallel zu den Hohlfasern befindliche Achse in ein spiralförmig gewickeltes Membranbündel mit zwei Bündelenden und einer zylindrischen Außenoberfläche und

c. gleichzeitig mit Schritt (b.) das Extrudieren in geschmolzener Form eines hochfesten, lösungsmittelbeständigen, thermoplastischen Harzes mit einem Schmelzpunkt, der wenigstens 10 °C unter dem Schmelzpunkt der Hohlfasern liegt, und einen Schmelzflußindex von 0,1 bis 150 g/10 min aufweist, und das Leiten des Harzes auf jedes der beiden Bündelenden, um dadurch jedes der beiden Bündelenden in dem Harz einzukapseln, was dazu dient, das Bündelende in einer angrenzenden monolithischen Schlauchfolie zu siegeln, wobei ein Teil des Bündels zwischen den beiden Schlauchfolien frei von dem Harz ist, wodurch ein Hüllen-Seitenbereich gebildet wird; dann das

d. Freilegen der Lumen-Enden der wenigstens ein erstes Bündelende bildenden Hohlfasern, damit sie mit dem Äußeren des Bündels in Verbindung stehen; dann das

e. Einführen des Bündels in ein Gehäuse für das Bündel, das ein erstes und ein zweites Gehäuseende und ein zylindrisches Gehäuseinneres aufweist und auf geeignete Weise geformt ist, um das Membranbündel aufzunehmen, das Mittel neben dem ersten Gehäuseende aufweist, wodurch die Schlauchfolie neben dem ersten Bündelende an das Innere des zylindrischen Gehäuses gesiegelt wird, wobei das das Bündel enthaltende Gehäuse zwei durch die Membran miteinander kommunizierende Bereiche definiert, umfassend (1) einen Hüllen-Seitenraum außerhalb des Teils des Bündels zwischen den Schlauchfolien und innerhalb des Gehäuses und (2) einen Raum, der die Hohlfaser-Lumen und das erste Bündelende einschließt; dann das

f. Anbringen eines ersten Endverschlußmittels neben dem ersten Gehäuseende, das mit dem Inneren des zylindrischen Gehäuses und dem ersten Bündelende auf geeignete Weise geformt ist, um das erste Gehäuseende zu siegeln und eine erste, mit den Membran-Lumen in Verbindung stehende Kammer zu definieren; und das

g. Anbringen eines zweiten Endverschlußmittels neben dem zweiten Gehäuseende, das mit dem Inneren des zylindrischen Gehäuses und dem zweiten Bündelende auf geeignete Weise geformt ist, um das zweite Gehäuseende zu siegeln und eine zweite Kammer zu definieren; und das

h. Herstellen eines Mittels zum Zugang zur Hüllenseite im Gehäuse, umfassend wenigstens eine, mit dem Hüllen-Seitenraum in Verbindung stehende Öffnung, die so angeordnet ist, daß das Einspritzen und Ableiten von Fluid dadurch ermöglicht wird; und das

i. Herstellen wenigstens einer, mit der ersten Kammer im Gehäuse in Verbindung stehenden Öffnung, die so angeordnet ist, daß das Einspritzen und Ableiten von Fluid dadurch ermöglicht wird.

15. Verfahren nach Anspruch 14, umfassend die weiteren, folgenden Schritte:

e. gleichzeitig mit Schritt (b) das Bilden wenigstens eines axialsymmetrischen, siegelnden Mittels aus hochfestem, lösungsmittelbeständigen, thermoplastischen Harz innerhalb des Hüllen-Seitenbereiches in einer um die Achse rotationssymmetrischen Form, wobei das siegelnde Mittel die Achse schneidet und sich bis zu einen Umfang erstreckt, der sich in einer gewissen Entfernung vom zylindrischen Gehäuseinneren befindet, wodurch ein Teilbereich des Hüllen-Seitenbereiches zwischen dem zylindrischen Gehäuseinneren und dem Umfang des siegelnden Mittels gebildet wird, der einen Fluidstrom nicht blockiert, wobei das siegelnde Mittel den Hüllen-Seitenbereich in zwei Hüllen-Seitenbereiche unterteilt, die durch den Teilbereich in wechselseitiger Fluid-

Kommunikation stehen.

16. Hohlfasermembran-Gewebe vom Spiraltyp enthaltendes Modul, umfassend Schlauchfolien mit verbesserter Lösungsmittelbeständigkeit und mechanischer Haltbarkeit, hergestellt durch das Verfahren nach Anspruch 14 oder 15.

Revendications

1. Procédé de fabrication d'une cartouche contenant une étoffe à membrane à fibres creuses du type en spirale comprenant des plaques tubulaires ayant une résistance aux solvants et une durabilité mécanique accrues, comprenant les étapes suivantes dans lesquelles :

   a. on forme plusieurs membranes à fibres creuses ayant chacune un canal, en un réseau analogue à une étoffe ayant une chaîne et une trame, dans lequel les fibres creuses sont sensiblement parallèles entre elles et constituent la trame de l'étoffe, et sont maintenues espacées les unes des autres par des filaments constituant la chaîne de l'étoffe ; puis
   b. on bobine le réseau sur un axe qui est sensiblement parallèle aux fibres creuses en un rouleau de membrane enroulée en spirale ayant deux extrémités de rouleau et une surface extérieure cylindrique ; et
   c. simultanément à l'étape (b.), on extrude sous une forme fondue une résine thermoplastique à haute résistance, résistant au solvant, ayant un point de fusion inférieur d'au moins 20°C au point de fusion des fibres creuses, ayant une cristallinité d'au moins 30 % et ayant un indice de fluidité à l'état fondu allant de plus de 0,1 jusqu'à 150 grammes/10 minutes ; et on dirige ladite résine sur chacune des deux extrémités du faisceau pour enrober ainsi chacune des deux extrémités du faisceau dans ladite résine, ce qui sert à sceller l'extrémité du faisceau dans une plaque tubulaire monolithique adjacente, une partie du faisceau comprise entre les deux plaques tubulaires étant exempte de résine pour former une zone côté calandre ; et ensuite
   d. à mettre à découvert les extrémités des canaux des fibres creuses constituant au moins une première des extrémités du faisceau pour qu'elles communiquent avec l'extérieur du faisceau.

2. Procédé selon la revendication 1, dans lequel la résine thermoplastique à haute résistance, résistant au solvant, possède un indice de fluidité à l'état fondu allant de plus de 0,1 jusqu'à 50 grammes/10 minutes.

3. Procédé selon la revendication 1, dans lequel la résine thermoplastique à haute résistance, résistant au solvant, possède un indice de fluidité à l'état fondu compris entre 1 et 40 grammes/10 minutes.

4. Procédé selon la revendication 1, dans lequel la résine thermoplastique à haute résistance, résistant au solvant, possède un indice de fluidité à l'état fondu compris entre 5 et 20 grammes/10 minutes.

5. Procédé selon la revendication 1, dans lequel l'axe est constitué par un mandrin creux ayant un axe longitudinal et une surface extérieure cylindrique, un alésage axial et des perforations le long de la surface qui communiquent avec l'alésage.

6. Procédé selon la revendication 1, dans lequel les extrémités des canaux des fibres creuses constituant les deux extrémités du faisceau sont mises à découvert pour communiquer avec l'extérieur du faisceau.

7. Procédé selon la revendication 1, comprenant en outre les étapes suivantes dans lesquelles :

   e. après l'étape (b) , on recouvre la surface extérieure cylindrique du faisceau d'un moyen imperméable d'enveloppement ; et
   f. simultanément à l'étape (b), on forme au moins un moyen d'obturation étanche, à symétrie d'axe, en une résine thermoplastique à haute résistance, résistant au solvant, dans la zone côté calandre, en une forme qui présente une symétrie de rotation autour de l'axe, ledit moyen d'obturation étanche coopérant de façon étanche avec le moyen d'enveloppement imperméable et s'étendant sur une certaine distance à partir de l'axe, formant une partie secondaire axiale de la zone côté calandre qui ne fait pas obstacle à l'écoulement de fluide, lesdits moyens d'obturation étanche divisant la zone côté calandre en deux parties côté calandre en communication mutuelle de fluide à travers la partie secondaire.

8. Procédé selon la revendication 1, dans lequel la résine thermoplastique à haute résistance, résistant au solvant, est un homopolymère, un copolymère, un composé ou un mélange de polyoléfines comprenant un ou plusieurs des éléments du groupe constitué du polyéthylène, du polypropylène, du poly-1-butène, du polypentène, du poly-

hexène, du polyméthylhexène, du polyheptène et du polyméthylpentène.

9. Procédé selon la revendication 8, dans lequel la résine thermoplastique à haute résistance, résistant au solvant, possède une moyenne en poids du poids moléculaire comprise entre 10 000 et 500 000 grammes par mole.

10. Procédé selon la revendication 8 ou 9, dans lequel la résine thermoplastique à haute résistance, résistant au solvant, est un homopolymère de polyéthylène à haute densité ayant une cristallinité de 60 % à 80 %.

11. Procédé selon la revendication 9, dans lequel la résine thermoplastique à haute résistance, résistant au solvant, possède une moyenne en poids du poids moléculaire comprise entre 20 000 et 50 000 grammes/mole.

12. Procédé selon la revendication 8, dans lequel les fibres creuses sont formées d'un homopolymère de polypropylène ayant un point de fusion de 160° centigrades, et la résine thermoplastique à haute résistance, résistant au solvant, est un homopolymère de polyéthylène ayant un point de fusion de 135°C ou moins.

13. Cartouche contenant une étoffe à membrane à fibres creuses du type en spirale, comprenant des plaques tubulaires ayant une résistance aux solvants et une durabilité mécanique améliorées, fabriquée par le procédé de la revendication 1, 5, 6, 7, 8, 9, 10 ou 12.

14. Procédé de fabrication d'un module contenant une étoffe à membrane à fibres creuses du type en spirale, comprenant des plaques tubulaires ayant une résistance aux solvants et une durabilité mécanique améliorées, comprenant les étapes suivantes dans lesquelles :

a. on forme plusieurs membranes à fibres creuses ayant chacune un canal, en un réseau analogue à une étoffe ayant une chaîne et une trame, dans lequel les fibres creuses sont sensiblement parallèles entre elles et constituent la trame de l'étoffe, et sont maintenues espacées les unes des autres par des filaments constituant la chaîne de l'étoffe ; puis
b. on enroule le réseau sur un axe qui est sensiblement parallèle aux fibres creuses en un faisceau formé par la membrane enroulée en spirale ayant deux extrémités de faisceau et une surface extérieure cylindrique ; et
c. simultanément à l'étape (b.), on extrude sous une forme fondue une résine thermoplastique à haute résistance, résistant au solvant, ayant un point de fusion inférieur d'au moins 10°C au point de fusion des fibres creuses, et ayant un indice de fluidité à l'état fondu compris entre 0,1 jusqu'à 150 grammes/10 minutes ; et on dirige ladite résine sur chacune des deux extrémités du faisceau pour enrober ainsi chacune des deux extrémités du faisceau dans ladite résine, ce qui sert à sceller l'extrémité de faisceau dans une plaque tubulaire monolithique adjacente, une partie du faisceau comprise entre les deux plaques tubulaires étant exempte de résine pour former une zone côté calandre ; puis
d. on met à découvert les extrémités des canaux des fibres creuses constituant au moins une première des extrémités du faisceau pour communiquer avec l'extérieur du faisceau ; puis
e. on introduit le faisceau dans un corps pour le faisceau ayant des première et seconde extrémités de corps et une surface intérieure cylindrique de corps et présentant une forme appropriée pour contenir le faisceau formé par la membrane, ayant des moyens adjacents à la première extrémité du corps, scellant de façon étanche la plaque tubulaire adjacente à la première extrémité du faisceau à la surface intérieure cylindrique du corps, ledit corps, qui contient le faisceau, définissant deux zones communiquant entre elles à travers la membrane, comprenant (1) un espace côté calandre extérieur à la partie du faisceau comprise entre les plaques tubulaires et à l'intérieur du corps, et (2) un espace comprenant les canaux des fibres creuses et la première extrémité du faisceau ; puis
f. on applique un premier moyen à chapeau d'extrémité adjacent à la première extrémité du corps et convenablement configuré, avec l'intérieur cylindrique du corps et la première extrémité du faisceau, pour sceller de façon étanche la première extrémité du corps et définir une première chambre communiquant avec les canaux de la membrane ; et
g. on applique un second moyen à chapeau d'extrémité adjacent à la seconde extrémité du corps et convenablement configuré, avec l'intérieur cylindrique du corps et la seconde extrémité du faisceau, pour sceller de façon étanche la seconde extrémité du corps et définir une seconde chambre et
h. on met en place un moyen d'accès côté calandre dans le corps, comprenant au moins un orifice communiquant avec l'espace côté calandre, agencé pour permettre l'injection d'un fluide et le retrait du fluide à travers lui ; et
i. on prévoit au moins un orifice communiquant avec la première chambre dans le corps, agencé pour permettre une injection et un retrait de fluide à travers lui.

15. Procédé selon la revendication 14, comprenant en outre les étapes suivantes dans lesquelles :

e. simultanément à l'étape (b), on forme au moins un moyen de scellement étanche à symétrie d'axe en résine thermoplastique à haute résistance, résistant au solvant, à l'intérieur de la zone côté calandre, en une forme qui présente une symétrie de rotation autour de l'axe, ledit moyen de scellement étanche coupant l'axe et s'étendant jusqu'à un périmètre qui est espace d'une certaine distance de l'intérieur cylindrique du corps, formant une partie secondaire de la zone côté calandre entre l'intérieur cylindrique du corps et le périmètre du moyen de scellement étanche, qui ne fait pas obstacle à l'écoulement d'un fluide, ledit moyen de scellement étanche divisant la zone côté calandre en deux parties côté calandre en communication mutuelle de fluide par l'intermédiaire de la partie secondaire.

16. Module contenant une étoffe à membrane à fibres creuses du type en spirale, comprenant les plaques tubulaires présentant une résistance aux solvants et une durabilité mécanique améliorées, fabriqué par le procédé de la revendication 14 ou 15.

FIG. 1

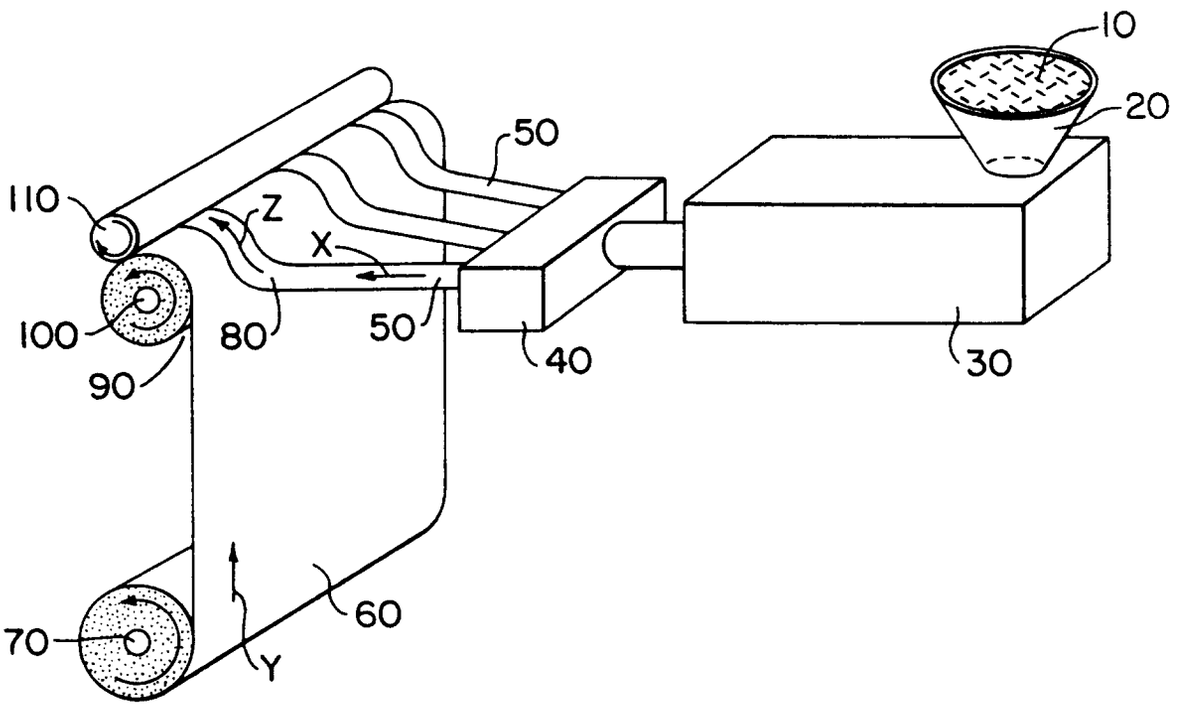

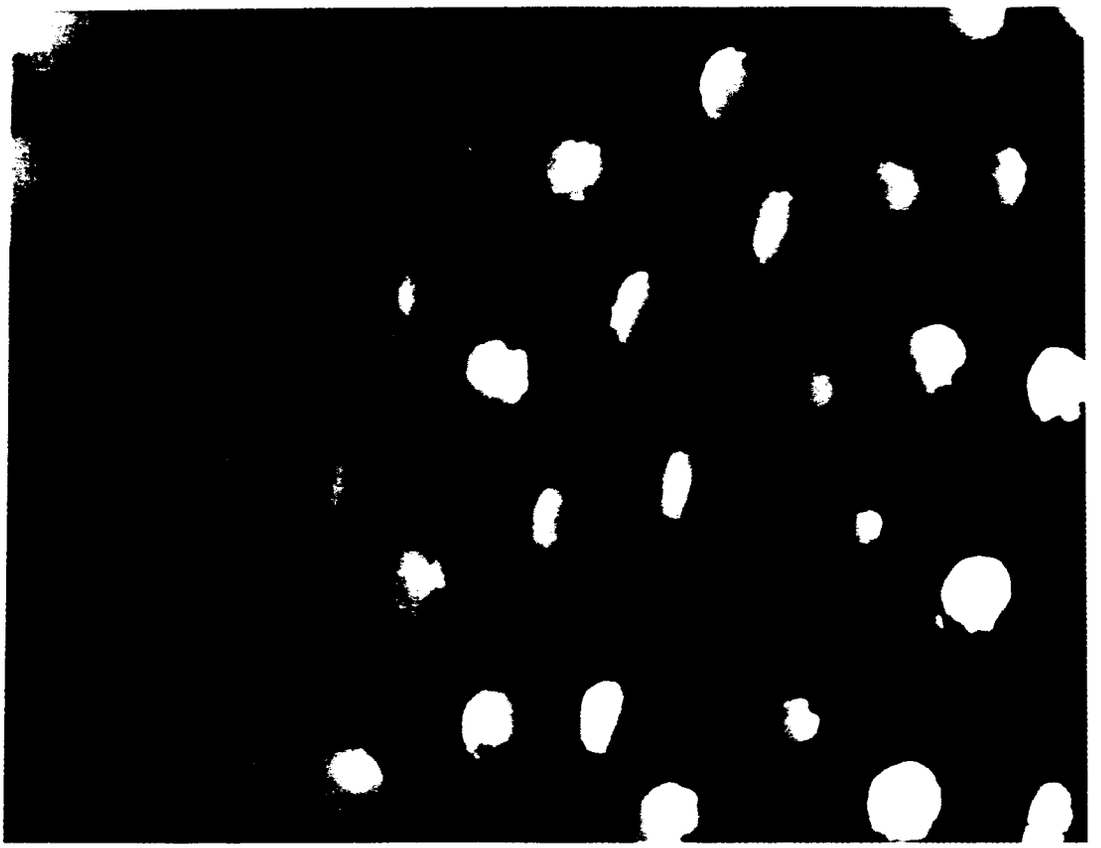

FIG. 2

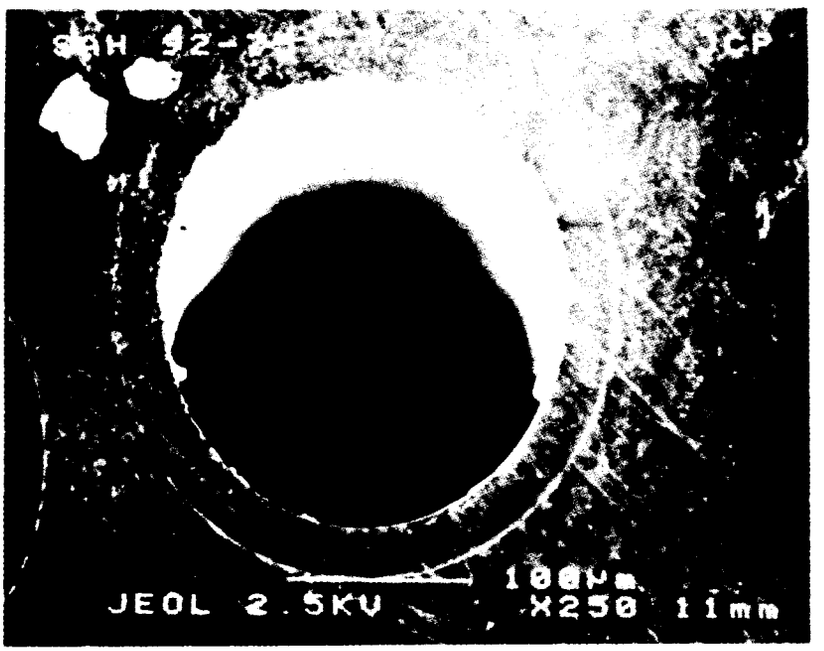

FIG. 3

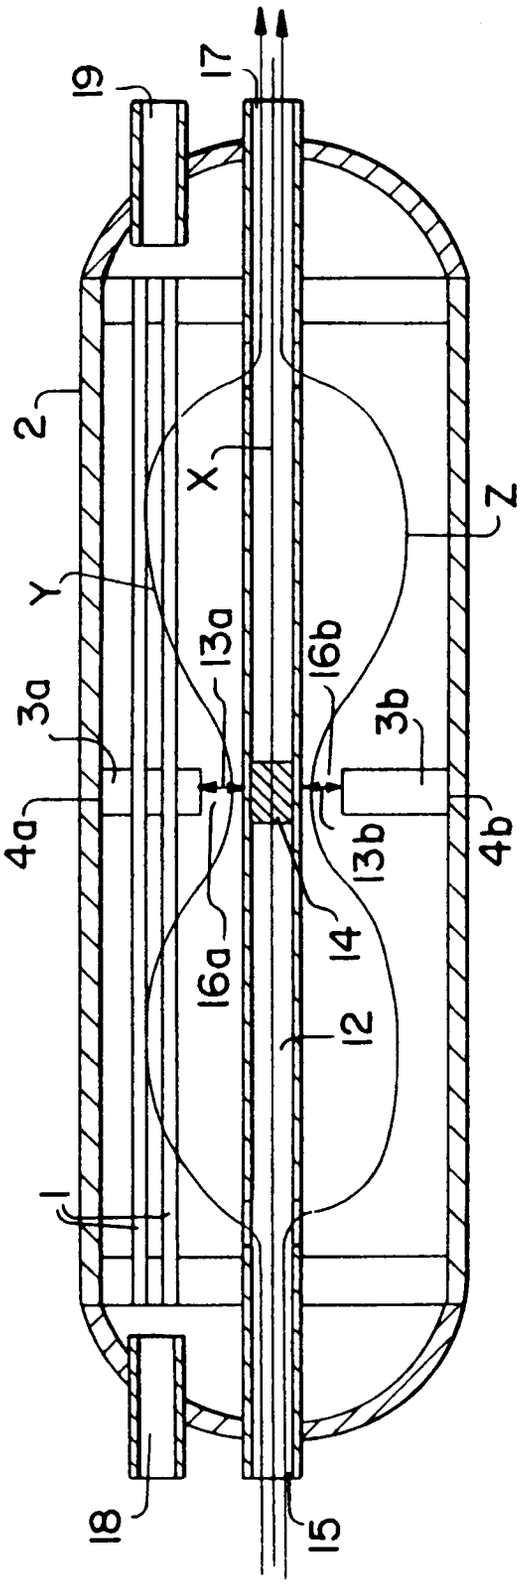

FIG. 4

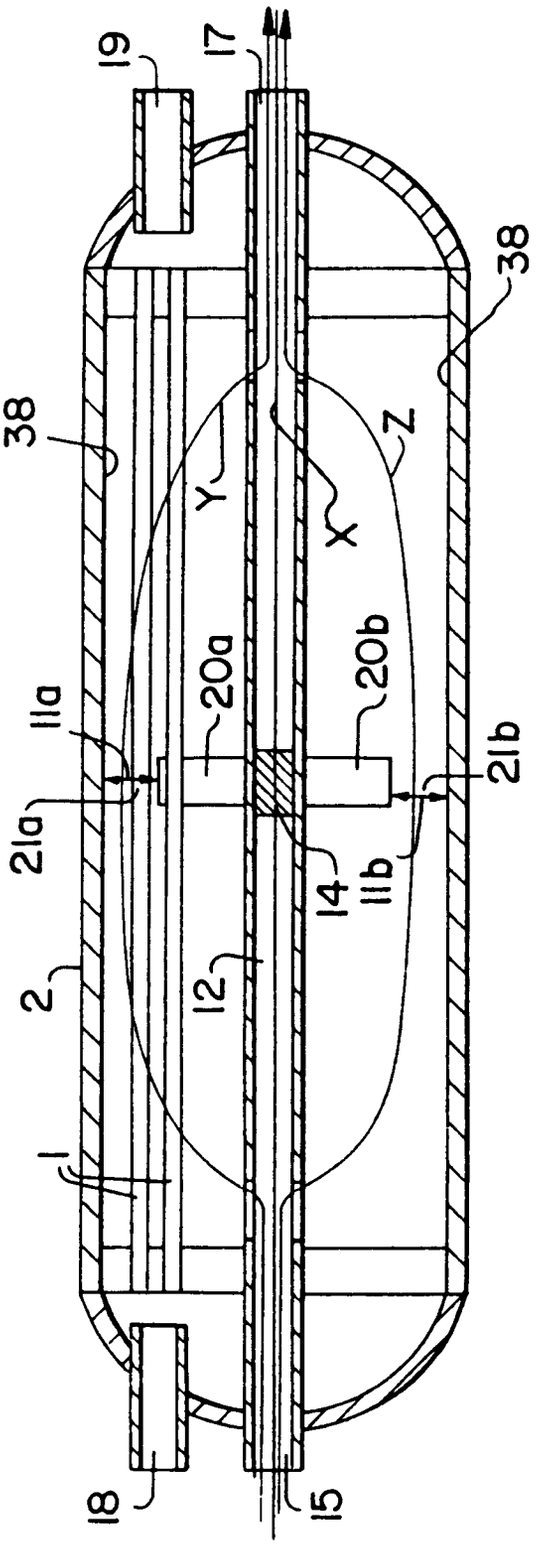

FIG. 5

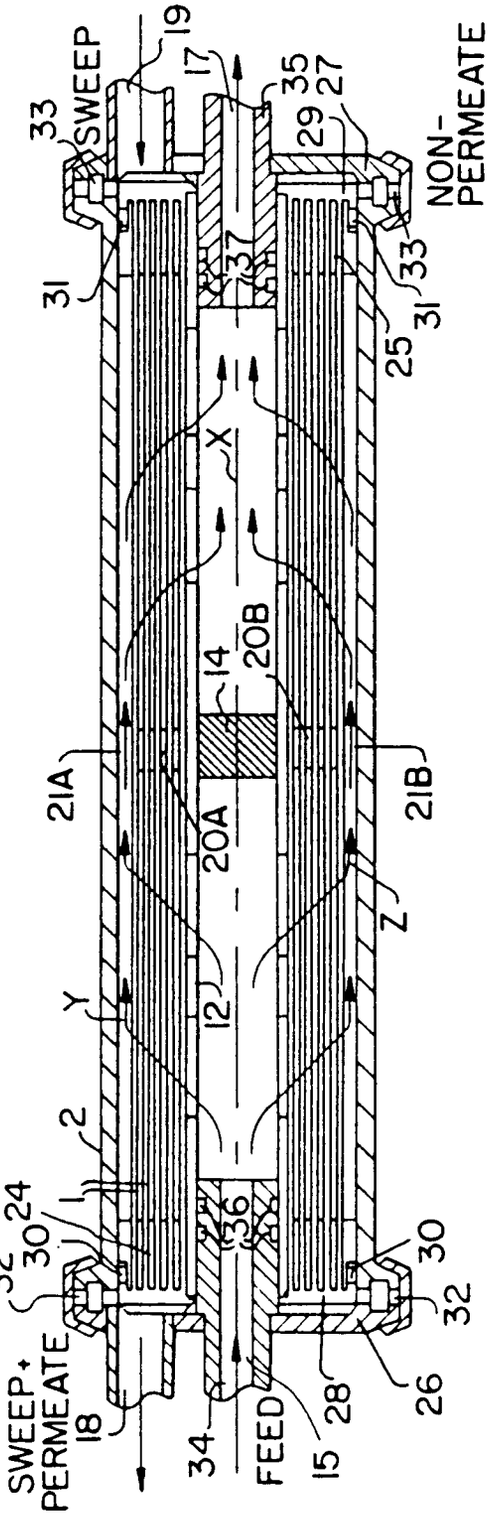
SWEEP
NON-
PERMEATE
SWEEP+
PERMEATE
FEED
19
17
35
27
29
33
31
37
25
X
14
20B
21A
21B
20A
Z
Y
12
2
1
24
30
32
36
34
18
15
28
26

FIG. 6