



(11)

EP 2 086 843 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
06.02.2013 Bulletin 2013/06

(21) Application number: **07825214.5**(22) Date of filing: **27.09.2007**

(51) Int Cl.:

B65B 25/10 (2006.01) **B65B 59/04** (2006.01)
B65B 65/00 (2006.01) **B65B 61/18** (2006.01)
B65C 1/02 (2006.01) **B65C 9/10** (2006.01)
B65C 9/14 (2006.01) **B65C 9/30** (2006.01)

(86) International application number:
PCT/IB2007/002843(87) International publication number:
WO 2008/041082 (10.04.2008 Gazette 2008/15)

(54) APPARATUS FOR PACKAGING A PRODUCT

VORRICHTUNG ZUR VERPACKUNG EINES PRODUKTS

APPAREIL POUR CONDITIONNER UN PRODUIT

(84) Designated Contracting States:

**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **03.10.2006 IT BO20060682**

(43) Date of publication of application:

12.08.2009 Bulletin 2009/33

(60) Divisional application:

10182105.6 / 2 277 782

(73) Proprietor: **CORAZZA S.p.A.**

40128 Bologna (IT)

(72) Inventor: **VIGNOLI, Terenzio**
I-40128 Bologna (IT)(74) Representative: **Fanzini, Valeriano**
Bugnion S.p.A.
Via di Corticella, 87
40128 Bologna (IT)

(56) References cited:

EP-A- 0 268 917	EP-A- 1 067 063
EP-A- 1 094 005	WO-A-03/091043
WO-A-2004/063017	WO-A-2005/058701
CH-A- 533 561	DE-A1- 2 115 656
DE-A1- 19 859 060	GB-A- 2 217 288
US-A- 2 033 849	US-A- 3 835 619
US-A- 5 122 216	

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionTechnical Field

[0001] This invention relates to an apparatus for packaging a product, in particular for wrapping the product in a piece of suitable wrapping material.

[0002] The product to be packaged is preferably a food product, especially a pasty food product such as processed cheese, a stock cube, butter, margarine and the like. The product might, however also be a semi-liquid or a solid food product such as yoghurt or a mature cheese, respectively.

Background Art

[0003] Packaging apparatus, in particular for pasty food products such as processed cheese portions, are known in prior art.

[0004] One disadvantage of prior art apparatus for packaging pasty products is that some parts of the apparatus are difficult to access, causing problems to personnel responsible for sanitizing the apparatus and creating a real risk to the hygiene and healthiness of the product being packaged.

[0005] Another disadvantageous aspect of prior art machines relates to their configuration which does not allow operators to monitor all the parts of a machine simultaneously and thus making it difficult take prompt action when required. That is because in prior art machines of this kind, some working areas are hidden or screened from each other.

[0006] WO2005/058701 discloses a packaging machine for triangular pieces of processed cheese to be collected into circular packages, wherein, from a production strip for providing shell die-cut portions, said die-cut portions are cutout by a shearing or cutting station directly arranged above a rotary horizontal table supporting the die-cut portions for conveying them to the following processing stations with label placing means being radially placed at the rotary horizontal table or supports. EP1094005 discloses an apparatus for packaging a food product, in particular a pasty food product such as a processed cheese portion, a stock cube, butter, margarine and the like, in a wrapper made from a blank of suitable shape which is folded to make the package to receive the product and comprising, wherein the apparatus comprises means for feeding a blank from which the wrapper is made, and wherein said blank is cut from a respective web on which respective means apply the labels. WO03/091043 discloses an apparatus for feeding elements for wrapping a pasty, liquid or semi-liquid food product, in particular, processed cheese, comprising means for dispensing tear strips, means for dispensing wrapper sheets and means for dispensing labels, and means for assembling the wrapper elements consisting of a continuously revolving wheel divided into zones for retaining the wrapper elements, wherein the label placing

means comprises a respective belt underneath the assembling means.

Disclosure of the Invention

[0007] It is provided a packaging apparatus, in particular for food products, especially pasty food products such as processed cheese, stock cubes, butter, margarine and the like, to be wrapped preferably in a suitable wrapper, the apparatus comprising a mounting frame, operating means for preparing the package and means for driving said operating means, the apparatus being characterized in that the mounting frame comprises partition means which extend lengthways along the apparatus, and from which the corresponding operating means in turn extend and which separate the operating means from the drive means.

[0008] Thus, the operating means which make the package are totally separate from the respective drive means, with obvious advantages in terms of packaging hygiene and accessibility to machine parts, since personnel responsible for operating the machine can easily access the operating parts from one side of the machine, while the drive elements are on the opposite side.

[0009] This also makes it easier and quicker to sanitize the apparatus.

[0010] Other advantageous aspects of the apparatus according to the invention are set out in the other claims.

Brief Description of the Drawings

[0011] These and other technical characteristics of the invention are clearly described in the appended claims and the advantages of the invention are apparent from the detailed description which follows, with reference to the accompanying drawings which illustrate a preferred embodiment of it provided merely by way of example without restricting the scope of the inventive concept, and in which:

- 40 - Figure 1 is a perspective view of a preferred embodiment of the apparatus according to the invention;
- 45 - Figure 2 is a perspective view of the preferred embodiment of the apparatus according to the invention, illustrating the package closing means in the raised condition;
- 50 - Figure 3 is a perspective view showing only the package being made up;
- 55 - Figure 4 is a perspective view of the preferred embodiment of the invention shown from the side opposite the views of Figures 1 and 2;
- Figure 5 is a perspective detail view showing the label application means of the preferred embodiment of the apparatus according to the invention;
- Figure 6 is a side view showing only the means for feeding the cup-shaped wrappers in the preferred embodiment of the apparatus according to the invention.

Description of the Preferred Embodiments of the Invention

[0012] The accompanying drawings show a preferred embodiment 10 of the packaging apparatus according to the invention, in particular for packaging a food product.

[0013] The apparatus is especially suitable for packaging a pasty food product such as processed cheese, stock cubes, butter, margarine and the like.

[0014] The apparatus might, however, also be suitably adapted for use in packaging other products, be they semi-liquid, pasty, or solid, such as for example mature cheese portions.

[0015] The apparatus according to the invention packages the product in a wrapper made from a film, in particular a plastic film or a film in the form of aluminium foil. Preferably, however, the wrapping film used is made from a foldable material, that is to say, a material that keeps the folded shape imparted to it.

[0016] The wrapper comprises a sheet obtained from the film cut into a suitable shape and folded in such a way as to enclose the product.

[0017] Besides the sheet of plastic film, aluminium foil or other material, the package also comprises means, in the form of at least one plastic tape, for tearing and opening the wrapper and a label if necessary. It will be understood, however, that the apparatus according to the invention might also make packages without tearing and opening means and/or without labels.

[0018] The finished package may be triangular, in the shape of the sector of a circle, quadrangular or other desired shape.

[0019] In this description, the term "parts" of the wrapper in the plural form is used to mean either the plurality of parts mentioned above, that is to say, the sheet, the means for tearing and opening the wrapper and the label or only the sheet when the apparatus is used to make wrappers comprised of the sheet only, or both the sheet and the tear means, or both the sheet and the label, in the case of wrappers comprising only two parts. Obviously, wrapper parts other than the ones specified here might also be contemplated.

[0020] As illustrated, the apparatus 10 comprises a mounting frame 12 and operating means for preparing the wrapper from the respective parts, as described in more detail below, and which are driven by respective drive means, which are not illustrated in detail in the accompanying drawings.

[0021] Advantageously, the mounting frame 12 defines partition means 120 which extend lengthways along the apparatus, that is to say, in the direction in which the packages being formed are fed and which mount operating means that are separated from the respecting drive means by the partition means 120 themselves.

[0022] This means that the operating means which make the package are totally separate from the respective drive means, with obvious advantages in terms of packaging hygiene and accessibility to machine parts,

since personnel responsible for operating the machine can easily access the operating parts from one side of the machine, while the drive elements are on the opposite side.

[0023] Thus, much time is saved because personnel attending to the apparatus do not need to move from one place to another as they do with machinery made according to prior art.

[0024] The apparatus is also very easy to clean, making its sanitization a quick and easy task.

[0025] The partition means 120 are advantageously embodied as a flat longitudinal wall 120 that extends in a straight line in front of an operator standing beside the apparatus and facing the operating means of the apparatus, as may be inferred from Figures 1, 2 and 4.

[0026] As illustrated, the frame 12 also comprises a transversal wall 121 upstream, a transversal wall 122 downstream, and a covering top wall 123. Obviously, the apparatus may be completed by walls and doors, preferably transparent, covering the operating area where the packages are made.

[0027] Means 124, 125, 126 are also provided for supporting the frame on the floor, which protrude transversally from the partition means 120 and which extend under the operating means of the apparatus.

[0028] These means for support on the floor comprise a plurality of feet 124, 125, 126, distributed lengthways, the feet 124 and 126 being located at the upstream and downstream ends of the apparatus and the foot 125 substantially half way along the apparatus.

[0029] The wall 120 has respective holes made in it, not illustrated in detail in the drawings, through which the operating means that make the packages are connected to the drive means on the other side (not shown) of the longitudinal wall 120. Shafts or other suitable transmission means for the respective drive elements extend through these holes.

[0030] The apparatus according to the invention comprises means 14 for feeding the parts used to make the wrapper.

[0031] More specifically, the feed means 14 assemble the parts of the wrapper, as will become more evident in the rest of the description below.

[0032] Advantageously, the means 14 for feeding the wrapper parts extend transversally from the partition means 120 and are rotatable about a horizontal or substantially horizontal axis O.

[0033] Advantageously, these means for feeding the wrapper parts rotate in clockwise direction, as indicated by the arrow W in Figure 1. Clockwise in this case refers to the direction of rotation as viewed by an observer facing the partition wall 120 and looking at the rotatable means 14.

[0034] It is thus possible to obtain a more convenient and advantageous layout of the devices that dispense the parts of the wrapper.

[0035] According to present apparatus, the means 14 for feeding the wrapper parts move with alternating mo-

tion, moving forward and stopping at the operating stations where the wrapper parts are assembled.

[0036] The means 14 for feeding the wrapper parts comprise an outer surface having a shaped profile that defines a plurality of circumferentially distributed sites 141 designed to accommodate the wrapper parts, and in particular, to progressively accommodate the parts of a single wrapper.

[0037] According to another aspect, the feed means 14 comprise a plurality of transversally aligned sites which make it possible to advance a plurality of parallel rows of respective wrapper parts. More specifically, each circumferential face of the roller-like means for feeding and assembling the parts of the wrapper affords a first, a second, a third and a fourth site, labelled 141 a, 141 b, 141 c and 141 d and transversally aligned with each other.

[0038] The roller-like means 14 for feeding the wrapper parts thus comprise a revolving member 142 having a plurality of flat faces 143 where the sites 141 for accommodating the wrapper parts are made.

[0039] The flat faces 143 are wide surfaces circumferentially distributed and extending in a direction perpendicular to respective radii extending from the axis of rotation "O" of the roller means 142.

[0040] The wide flat faces 143 are separated from each other by shorter circumferential sections 144.

[0041] As a whole, the faces 143 for accommodating the wrapper parts extend at right angles to planes passing through the axis "O" and through the centre line of the respective face 143 and make with the adjacent faces, or sites, 143 an orientation angle greater than 135°.

[0042] In practice, the lateral surface of the roller 14 has a generally polygonal shape with long sides and short sides, the sites for accommodating the parts of the wrapper being made at the long sides. More specifically, the outer profile of the roller-like member has a generally octagonal shape defining eight consecutive faces for accommodating the parts of the wrapper.

[0043] In particular, the sites 141 for accommodating the parts of the wrapper comprise a surface 145 for supporting the parts and means for retaining the parts on the supporting surface 145. The retaining means are embodied as suction means comprising holes in the area, or surface, 145 that supports the respective part, and conduits that put the suction holes at each site selectively in communication with a vacuum source. The suction holes and conduits are not illustrated in detail in the accompanying drawings.

[0044] As illustrated, the roller 14 for feeding the wrapper parts extends from the vertical partition wall 120, said roller being driven by a respective axial shaft, not illustrated in the drawings, which extends through a large hole made in an area upstream of the partition wall 120.

[0045] The roller means 14 may be associated removably with the apparatus and there may be a plurality or set of roller means to be used according to process requirements, in particular according to the size of the pack-

age to be made.

[0046] Means 16 are advantageously provided for placing tear tape means on respective sites 141 of the means 14 for feeding the parts of the wrapper.

[0047] As illustrated in Figure 3, the tear tape means comprise a first tear tape 2 and a second tear tape 3 which are suitably crossed over each other, as shown in Figure 3, in a manner well known to experts in the trade and therefore not explained in further detail. Other tear tape configurations are also imaginable, however.

[0048] In particular, there are four means 161a, 161b, 161c, 161d for placing tear tapes 2 on respective transversally aligned sites on the feed roller 14.

[0049] As shown, the tear tape placing means 16 also comprise second means 162a, 162b, 162c, 162d for placing respective second tear tapes 3.

[0050] As illustrated, the means 16 for placing the tear tape means are advantageously mounted under the means 14 for feeding the parts of the wrapper.

[0051] Further, as illustrated, the means for placing the second tear tapes 3 are mounted downstream and, in particular, immediately downstream of the means that place the first tapes 2 in the direction in which the wrapper parts are fed by said feed means.

[0052] Thus, while the first tear tape placing means place the four rows of first tear tapes 2 on respective downward facing sites of the feed means 14, the means for placing four parallel rows of second tear tapes 3 operate on the adjacent sites, that is to say, the sites on the part of the feed means 14 facing down and to one side.

[0053] It will be understood, however, that tear tape placing means which can place differently shaped tear tapes in a different manner might also be used instead of the means described here.

[0054] The means for placing the tear tapes 2, 3 are mounted on respective mounting means, not illustrated in the drawings, which extend transversally in cantilever fashion from the partition means 120.

[0055] As illustrated, each of the means for placing a respective tear tape comprises means for mounting respective rolls of film from which the tear tape is obtained, means for feeding the tear tape film and means for cutting the tear tape from the film, which is preferably a plastic film. The means for feeding and cutting the tear tape film are not illustrated in detail in the accompanying drawings.

[0056] Means for guiding the tear tape placing means may be provided to enable the placing means themselves to be pulled out and, if necessary, lifted in order to change the tear tape film roll.

[0057] Means 18 are also advantageously provided for placing the sheet constituting the main body of the wrapper on a respective site of the means 14 for feeding the parts of the wrapper.

[0058] In particular, the sheet is placed over the first and second tear tapes 2 and 3, as illustrated in Figure 3, where the sheet is denoted by the reference numeral 4.

[0059] More specifically, the means for placing the sheet 4 are designed to place four parallel rows of sheets

on transversally aligned sites on the feed roller 14.

[0060] As illustrated, the means 18 for placing the sheet 4 on the wrapper part feed means are mounted downstream of the tear tape placing means 16 in the direction in which the wrapper parts are fed by the feed means 14.

[0061] In particular, the sheet placing means 18 extend beside the feed means 14 and are designed to place the sheets 4 on respective transversally aligned sites 141a, 141b, 141c, 141d on the part of the feed means 14 facing up and to one side.

[0062] In practice, between the means that place the second tear tapes 3 and the means that place the sheets 4, there is an empty station, corresponding to the sites on the vertically positioned face of the lateral surface of the roller 14, there being cutting means mounted alongside the vertically positioned sites for cutting the wrapper sheets 4 from the film 1, as described in more detail below.

[0063] The means for placing the sheets comprise means for feeding the film 1 and means for cutting the film. The means for cutting and feeding the wrapper sheet film 1 are not illustrated in detail in the accompanying drawings.

[0064] The means 18 for placing the sheets 4 on the feed means 14 also comprise means for gripping the cut sheets 4 and means for guiding said gripper means.

[0065] The sheet 4 gripper means, not illustrated in detail in the accompanying drawings, are guided by respective guide devices or means 182, comprising rails 182a, 182b, 182c, 182d for respective sheet 4 gripper means.

[0066] These straight rails 182a, 182b, 182c, 182d extend in divergent directions starting from the position where the sheet is picked up to the position where the sheet is delivered to the respective site on the feed means 14. As illustrated, the ends of the longitudinal guide rails 182a, 182b, 182c, 182d are mounted on respective crossbars 182e, 182f.

[0067] The guide means 182, which are not illustrated in detail in the drawings, are removably associated with the apparatus and extend transversally in cantilever fashion from the partition wall 120.

[0068] It is contemplated the provision of a plurality, or set, of devices, or means, 182 for guiding the sheet gripper means, comprising different rails 182a, 182b, 182c, 182d, having substantially the same length for a suitable longitudinal stroke of the sheet gripper means and a different angle of relative divergence in order to allow guiding of gripper means for different package sizes, that is to say, to allow the sheets to be placed in different transversal positions according to the size of the sheet and package being made.

[0069] In other terms, for each different sheet size, the guide means or devices have guide rails 182a, 182b, 182c, 182d whose respective ends 182'a, 182'b, 182'c, 182'd in the area where the sheets are picked up are at substantially the same transversal distance d'a, d'b, d'c

from each other but whose ends 182'a, 182'b, 182'c, 182'd in the area where the sheets are dispensed are at different transversal distances d'a, d'b, d'c from one guide device to another, as may be inferred from Figure 4.

[0070] This greatly facilitates changeover from one size to another. It is sufficient to substitute the guide means 182 with other guide means suitable for another size. Thus, complicated and time-consuming changeover adjustments are minimized and made simpler than in prior art machines.

[0071] In particular, in addition to the guide means, the means for gripping and cutting the sheets must also be changed since they are mounted directly on the guide means.

[0072] The invention also contemplates the provision of advantageous means 20 for joining the sheet 4 to the tear tapes 2 and 3. These joining means are embodied as respective sealing means that extend transversally in cantilever fashion from the partition wall 120 and are located at a position corresponding to and facing the upward facing sites on the horizontally positioned face 141 of the lateral surface of the means 14 that feed the wrapper parts.

[0073] The sealing means 20 move downwards to join the heat-sealable face of the sheet 4 to the tear tapes 2 and 3 and up again to a position where the feed means can turn freely.

[0074] The sealing means 20 are mounted downstream and, in particular, immediately downstream of the sheet 4 placing means 18 in the direction in which the feed means 14 advance.

[0075] Positioning the sealing plate 20 above the roller means 14 for feeding the wrapper parts enables the label magazines to extend over the sealing means 20, as explained in more detail below.

[0076] The sealing means 20 are located on the side of the feed means 14 opposite the side where the tear tape placing means are located.

[0077] The apparatus also advantageously comprises means 22 for placing a label, denoted by the reference numeral 5 in Figure 3, on a respective site on the wrapper part feed means 14, and in particular, in such a way as to place the label 5 over the respective sheet 4.

[0078] Further, as illustrated in Figure 5, the label placing means 22 are mounted above the wrapper part feed means 14 and downstream and, in particular, immediately downstream of the sealing means 20 and of the sheet 4 placing means, in the direction in which the wrapper parts are fed by said feed means 14.

[0079] The means 22 for placing a label on the respective sheet are also mounted on respective mounting means which extend transversally in cantilever fashion from the partition wall 120.

[0080] The label placing means comprise label accommodating means 122 in the form of a plurality of magazines 122a, 122b, 122c, 122d, extending in a straight line at an angle to the vertical and above the sealing means 20, as mentioned previously.

[0081] In practice, the placing means 22 place four labels on respective wrapper sites 141a, 141b, 141c, 141d.

[0082] The label placing means 22 comprise means 121 which pick up the label 5 from the accommodating means 122 and transfer it to the feed means 14, and which are in the form of corresponding revolving means that turn in the same direction as the wrapper part feed means 14.

[0083] The label placing means also comprise means 123 for dispensing an adhesive material to the labels 5 held by the label pickup and transfer means 121.

[0084] The label placing means thus comprise a revolving roller extending transversally from the wall 120 and having a plurality of transversally aligned sites - in particular, four transversally aligned sites - there being, for each single label fed by the means 121, four operating positions, namely, a position where the label is picked up from the magazine, a position where adhesive is applied to it, an idle position and, lastly, a position where the label is transferred to the means 14 that feed all the wrapper parts. These operating positions correspond to 90° angular movements of the label roller.

[0085] In particular, the label roller has an outer surface with sites on it for accommodating the labels and comprising a surface on which the labels are supported and means for retaining the labels on the supporting surface. These retaining means are, in particular, embodied as suction means comprising holes in the area, or surface that supports the label, and conduits that put the suction holes at each site selectively in communication with a vacuum source. The suction holes and conduits are not illustrated in detail in the accompanying drawings.

[0086] In practice, the labels are placed on respective sites on the part of the wrapper feed means 14 facing up and to one side of the feed means 14, in particular, facing the downstream section of the machine 10.

[0087] The label placing means 22 are located on the side of the feed means 14 opposite the side where the tear tape placing means 16 are located.

[0088] Means are also advantageously provided for creasing the respective sheets 4 at a respective site 141 of the means 14 for feeding the parts of the wrapper.

[0089] The creases 6, shown in Figure 3, are made in the sheet 4 in order to facilitate its subsequent folding into a shape suitable for receiving the product.

[0090] In the apparatus according to the invention, the creases 6 on the sheet are advantageously made when the latter is on the revolving feed means 14. This greatly simplifies the structure compared to prior art machines.

[0091] Also advantageously, the sheet creasing means, operating at 24 and not specifically illustrated in the accompanying drawings, are positioned alongside the wrapper part feed means 14 on the side of the latter opposite the side where the sheet 4 placing means are located.

[0092] In practice, the means for making at least one crease 6 on the sheets operate on the vertically oriented sites facing the downstream section of the machine:

[0093] Advantageously, the means for making a crease 6 on the sheet 4 are mounted, relative to the direction in which the wrapper parts are fed by said feed means 14, downstream and, in particular, immediately downstream of the label placing means 22 and also downstream of the means 18 that place the sheet 4 on the feed means 14.

[0094] Advantageously, the sheet creasing means also comprise four transversally aligned operating elements extending transversally in cantilever fashion from the partition means 120.

[0095] The wrapper creasing means, operating at 24, are located on the side of the feed means 14 opposite the side where the sheet placing means 18 are located.

[0096] According to another advantageous aspect, means 26 are provided for picking up the wrapper from a respective site on the wrapper part feed means 14.

[0097] These wrapper pickup means 26 are positioned alongside the wrapper part feed means and are designed to pick up the wrapper from the sites on the part of the feed means 14 facing down and to one side, that is to say, those facing the downstream section of the machine.

[0098] The wrapper pickup means 26 are located on the side of the feed means 14 opposite the side where the sheet placing means are located.

[0099] Advantageously, the wrapper pickup means are located immediately downstream of the creasing means 24 in the direction in which the wrapper parts are fed by the feed means 14.

[0100] The wrapper pick up means take the form of a rocker element 26, which is pivoted in line with the roller 24a that advances the means for feeding the wrapper in the containing condition, that is to say, when the wrapper has been folded into a cup-shaped shape, as may be inferred from Figure 5, and are designed to hold the wrappers at the top or engaging the top faces of the sheets after receiving them from first means, not illustrated in detail in the accompanying drawings, for picking up the sheets directly from the assembly roller and which hold them at the bottom or engage the bottom faces of the sheets.

[0101] The assembled wrappers 4 are thus delivered by the rocker elements 26 to downstream means for forming the wrapper, said sheets being applied or rested on a horizontal, or substantially horizontal surface of the forming means, also illustrated in Figure 6.

[0102] Upstream of the wrapper part feed means 14 means are provided for feeding the film 1 from which the wrappers are made.

[0103] Advantageously, these film 1 feed means, labelled 30 in the drawings, extend transversally from the frame partition means 120.

[0104] In practice, the film feed means comprise a transversal shaft 30 that mounts a roll 31 into which the transversal shaft 30 extends from the longitudinal wall 120 from which the other operating means of the apparatus also extend, in particular, the assembly means 14 and the related means for placing the parts of the wrap-

per.

[0105] Thus, the operator has all the operating parts of the machine in front of him/her and can easily supervise operations and take prompt action when necessary, for example when the roll 31 needs to be changed.

[0106] Advantageously, the level at which the film feed means 30 extend above the supporting surface of the apparatus 10 is lower than the level occupied by the means 14 that feed the wrapper parts.

[0107] Advantageously, the film feed means 30 rotate in clockwise direction and comprise respective transmission means 32 positioned above the shaft 30 and designed to make the film 1 unwound from the roll 31 follow a vertical or substantially vertical path. The transmission means are embodied as rollers 32 located between the roll mounting shaft 30 and the wrapper part feed means 14.

[0108] As illustrated, the sheet 4 placing means 18, which are mounted on the side facing the end upstream of the assembly means 14, are also located between the latter and the wrapper sheet web feed area.

[0109] Means are also advantageously provided for shaping the wrapper, said means being designed to form a cup-shaped container suitable for receiving the product portion.

[0110] The wrapper shaping means comprise forming means 40 and means 42 for pushing the wrapper into the forming means 40.

[0111] More specifically, the shaping means comprise hoppers 40 having a vertical, or axial, open-ended cavity of suitable size and designed to give the wrapper a cup-shaped shape, each of these hoppers being of a type well known to experts in the trade.

[0112] The shaping means 40 are mounted on respective mounting means which extend transversally in cantilever fashion from the partition means 120.

[0113] The means 42 that push the flat sheets into the hoppers - there being four hoppers aligned with each other and fixedly connected to the partition wall 120 - in turn comprise respective pistons 42 that move vertically between a raised position that enables the still flat sheets to be placed in position above the hoppers, and a lowered position in which the pistons extend downwardly past the bottoms of the shaping hoppers.

[0114] This pushing movement of the pistons gives the wrapper sheets a cupped shape and causes them to be placed on respective means, labelled 44 in their entirety in the drawings, which feed the cup-shaped wrappers lengthways and which extend under the hoppers 40.

[0115] The pushing means 42 are also mounted on respective mounting means which extend transversally in cantilever fashion from the partition means 120, in a position above the hoppers 40.

[0116] As just mentioned, means 44 are provided for feeding the cup-shaped wrappers lengthways.

[0117] The means for feeding the cup-shaped wrappers lengthways comprise supporting means, or pockets, 46 - four parallel rows of transversally aligned pockets

being provided - mounted on respective belt means 48, in particular comprising a first and a second lateral belt 48a and 48b, forming an endless belt of pockets 46 driven by respective wheels 46a, 46b which are in turn driven and supported by shafts protruding from the transversal wall 120.

[0118] The belts 48a, 48b mount transversal blocks that support a plurality of pockets 46, four in this embodiment, for accommodating the shaped wrapper sheets.

[0119] The mounting shafts for the wheel 46a, 46b that support and feed the belt 44 also constitute mounting means that extend transversally in cantilever fashion from the partition wall 120.

[0120] Means 50 are also provided for filling the wrapper, said means 50 being mounted on means which protrude transversally from the partition means 120.

[0121] In particular, the filling means 50 comprise a plurality of nozzles - in this embodiment, four nozzles - for dispensing the pasty product and which, as illustrated, are transversally aligned with each other.

[0122] Means, labelled 52 in their entirety in the accompanying drawings, are also provided for applying a cap on the wrapper, said means being located immediately downstream of the product dispensing means 50 and, like the dispensing means 50, being positioned above the belt 44 that feeds the cup-shaped containers.

[0123] The cap application means 52 are mounted on respective mounting means which extend transversally in cantilever fashion from the partition means 120.

[0124] The cap application means 52 can also be moved between a working position and a different position where they can be easily cleaned.

[0125] In particular, the cap application means can be moved between a lowered working position and a raised position, illustrated in Figure 2.

[0126] The means for mounting the cap application means 52 have a fixed part, not illustrated in Figure 2, and a mobile part, labelled 152, which extends transversally of the apparatus and is pivotally mounted in such a way that it can swing on the fixed part at the partition wall 120.

[0127] Means 54 are also provided for folding the cap retaining tabs. As known, the cap retaining tabs are the ends of the wrapper that extend above the product portion inside the wrapper and which are folded over the cap in such a way as to retain it.

[0128] As illustrated, the means 54 for folding the cap retaining tabs are mounted on respective mounting means which extend transversally in cantilever fashion from the partition means 120.

[0129] The means 54 for folding the cap retaining tabs can move from a lowered working position and a second, raised position where they can, for example, be cleaned, as illustrated in Figure 2.

[0130] Means are provided for mounting the means 54 that fold the cap retaining tabs, said mounting means having a fixed part 154 and a mobile part 155 that moves relative to the fixed part 154.

[0131] In particular, the mobile part 155 extends transversally of the apparatus 10 and swings from the fixed part on pivoting means 155a at the longitudinal partition wall 120.

[0132] Means 56 are also provided for sealing the retaining tabs to the cap under them.

[0133] The means for sealing the retaining tabs to the cap are mounted on respective mounting means which extend transversally in cantilever fashion from the partition means 120.

[0134] In particular, the means 56 for sealing the retaining tabs to the cap can be moved between a lowered position and a second position. More specifically, the means for sealing the retaining tabs to the cap can be moved between a lowered working position, that is to say, the position where they seal the tabs to the cap, and a raised position where the respective sealing plates 156' can be cleaned.

[0135] The means for mounting the sealing plate 156' comprise a fixed part 156 and a part 157 that is mobile relative to the fixed part 156. In particular, the mobile part 157 extends transversally of the apparatus and swings from the fixed part on pivoting means 156a at the longitudinal partition wall 120.

[0136] Means 147 are provided for positioning the cup-shaped, filled wrapper at a height such that the top of the product is at a predetermined, desired height.

[0137] The means 147 for positioning the wrapper in height are embodied as longitudinal guide means 147 located at the wrapper feed means 44.

[0138] The guide means 147 for lifting the cup-shaped wrapper are located at the wrapper feed means 44.

[0139] As illustrated, the wrapper holding means 46 comprise, for supporting the bottom of the wrapper, a base 146a having an extension 146b that protrudes downwardly through a respective conduit 46' under the fixed part of the wrapper holding means or blocks 46, said downwardly protruding extension 146b having a bottom contact end 146'b that runs in the guide means 147.

[0140] By sliding in the guide means, the height of the wrapper can be suitably adjusted to fold the cap retaining tabs in such a way as to obtain a "sharp" edge or a "soft" edge, that is to say a straight edge or a more rounded edge, according to packaging requirements.

[0141] The means 147 for positioning the wrapper in height are removably connected to the apparatus and, more specifically, the invention contemplates the provision of a plurality of means 147 for positioning the wrapper in height, selectable according to requirements.

[0142] The removable connecting means consist of screws and brackets labelled 148 and 149 in Figure 6.

[0143] In particular, the guide means 147 are embodied as respective longitudinal bars with suitably shaped top ends 147a. More specifically, there are four transversally aligned bars for driving the mobile bases or means 146a that lift the wrapper being formed.

[0144] The mounting means of the height positioning means 147 also extend transversally of the partition wall

120.

[0145] Downstream of the cap sealing means, in an area labelled 58 in Figure 1, respective means may be provided for grouping the packages.

5 [0146] The invention described above is susceptible of industrial application and may be modified and adapted in several ways without thereby departing from the scope of the inventive concept. Moreover, all the details of the invention may be substituted by technically equivalent elements.

Claims

15 1. A packaging apparatus (10), for pasty food products such as processed cheese, stock cubes, butter, margarine and the like, to be wrapped in a suitable wrapper, the wrapper comprises a sheet obtained from the film cut into a suitable shape and to be folded in such a way as to enclose the product; the apparatus comprising a mounting frame (12), operating means for preparing the package and means for driving said operating means; the apparatus further comprising means (14) for feeding the parts of the wrapper and means (22) for placing a label (5) on a respective site of the means (14) for feeding the parts of the wrapper; the apparatus comprising a longitudinal wall (120) that separates corresponding operating means from the respective drive means, and being characterized in that the label placing means (22) comprise means (121), in the form of revolving roller, which pick up the labels from accommodating means (122) and transfer them to the means (14) that feed the parts of the wrapper, in that the label placing means (22) are mounted on respective mounting means that extend transversally from the partition wall (120), and in that the label placing means have, for each single label fed by the means (121), four operating positions, namely, a position where the label is picked up from the magazine, a position where adhesive is applied to it, an idle position, and a position where the label is transferred to the means (14) that feed all the wrapper parts; said operating positions correspond to 90° angular movements of the label roller.

20 2. The apparatus according claim 1, characterized in that the means (22) for placing the label (5) are mounted above the means (14) that feed the parts of the wrapper.

25 3. The apparatus any of the foregoing claims, characterized in that the label placing means (22) are, relative to the direction in which the wrapper parts are fed by the feed means (14), mounted downstream of the sheet placing means.

30 4. The apparatus any of the foregoing claims, charac-

35

40

45

50

55

terized in that the means (122) that accommodate the labels are mounted above the joining means (20).

5. The apparatus according to any of the foregoing claims, **characterized in that** the label placing means (22) comprise means (123) for dispensing an adhesive material to the labels positioned on the label pick up and transfer means (121).

10. The apparatus according to any of the foregoing claims, **characterized in that** the means (22) for placing the label are, relative to the direction in which the wrapper parts are fed by the feed means, mounted in such a way that the label is placed on a site that is immediately downstream of the site for the first tear tape on which the joining means (20) operate.

15. The apparatus according to any of the foregoing claims, **characterized in that** the mounting frame (12) comprises partition means (120) which extend lengthways along the apparatus, and from which the corresponding operating means in turn extend and which separate the operating means from the drive means.

20. The apparatus according to claim 7, **characterized in that** it comprises a longitudinal wall (120) that separates corresponding operating means from the respective drive means.

25. The apparatus according to claim 8, **characterized in that** the label placing means (22) extend transversally from the wall (120).

30. The apparatus according to any of the foregoing claims, **characterized in that** the means (14) for feeding the parts of the wrapper comprise a revolving body defining a plurality of circumferentially distributed sites (141) for accommodating the wrapper parts.

35. The apparatus according to any of the foregoing claims, **characterized in that** the means (14) for feeding the parts of the wrapper extend transversally from the partition means (120).

40. The apparatus according to any of the foregoing claims, **characterised in that** it comprises means (16) for placing tear tape means (2, 3) on respective sites of the wrapper part feed means (14).

45. The apparatus according to any of the foregoing claims, **characterised in that** it comprises means (18) for placing the sheet (4) constituting the main body of the wrapper on a respective site of the means (14) for feeding the parts of the wrapper.

5. The apparatus according to any of the foregoing claims, **characterised in that** the means (22) for placing a label place the label (5) over the respective sheet (4).

10. The apparatus according to any of the foregoing claims, **characterised in that** the label placing means (22) are located on the side of the feed means (14) opposite the side where the tear tape placing means (16) are located.

Patentansprüche

15. Verpackungsvorrichtung (10) für mit geeigneten Umhüllungen zu umhüllende pastöse Lebensmittelprodukte wie Schmelzkäse, Brühwürfel, Butter, Margarine und Ähnlichem, wobei die Umhüllung ein Blatt umfasst, das vom Film erhalten wurde, der in eine geeignete Form geschnitten wurde und derart zu falten ist, dass das Produkt umschlossen wird; wobei die Vorrichtung einen Befestigungsrahmen (12), Betriebsmittel zur Vorbereitung der Verpackung und Mittel zum Antrieb der Betriebsmittel umfasst; wobei die Vorrichtung ferner Mittel (14) zum Zuführen der Umhüllungsteile und Mittel (22) zum Platzieren eines Etiketts (5) an einer entsprechenden Stelle der Mittel (14) zum Zuführen der Umhüllungsteile umfasst; wobei die Vorrichtung eine Längswand (120) umfasst, die entsprechende Betriebsmittel von den entsprechenden Antriebsmitteln trennt und **dadurch gekennzeichnet ist, dass** die Etikettplatziermittel (22) Mittel (121) in Form einer Drehrolle umfassen, welche die Etiketten von Unterbringungsmitteln (122) aufnehmen und sie an die Mittel (14) übertragen, welche die Umhüllungsteile zuführen, dass die Etikettplatziermittel (22) auf entsprechenden Befestigungsmitteln befestigt sind, die sich transversal von der Trennwand (120) erstrecken und dass die Etikettplatziermittel für jedes einzelne, von den Mitteln (121) zugeführte Etikett vier Betriebspunkten aufweisen, nämlich eine Position, in der das Etikett vom Magazin entnommen wird, eine Position, in der Klebstoff darauf aufgetragen wird, eine Ruheposition und eine Position, in der das Etikett an die Mittel (14) übertragen wird, die alle Umhüllungsteile zuführen; wobei die Betriebspunkten 90°-Winkelbewegungen der Etikettrolle entsprechen.

20. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** die Mittel (22) zum Platzieren des Etiketts (5) über den Mitteln (14) befestigt sind, welche die Umhüllungsteile zuführen.

25. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Etikettplatziermittel (22) im Vergleich zur Richtung, in der die Umhüllungsteile von den Zuführmitteln (14)

zugeführt werden, hinter den Blattplatziermitteln befestigt sind.

4. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Mittel (122), welche die Etiketten unterbringen, über den Verbindungsmitteln (20) befestigt sind. 5

5. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Etikettplatziermittel (22) Mittel (123) zur Ausgabe eines Klebstoffmaterials an die Etiketten umfassen, die auf den Mitteln (121) zur Aufnahme und Übertragung von Etiketten positioniert sind. 10

6. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Mittel (22) zum Platzieren des Etiketts im Vergleich zur Richtung, in der die Umhüllungsteile von den Zuführmitteln zugeführt werden, derart befestigt sind, dass das Etikett an einer Stelle platziert wird, die sich unmittelbar hinter der Stelle des ersten Reißbands befindet, an der die Verbindungsmittel (20) arbeiten. 15

7. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** der Befestigungsrahmen (12) Trennmittel (120) umfasst, die sich der Länge nach entlang der Vorrichtung erstrecken und von denen sich wiederum die entsprechenden Betriebsmittel erstrecken und welche die Betriebsmittel von den Antriebsmitteln trennen. 20

8. Vorrichtung nach Anspruch 7, **dadurch gekennzeichnet, dass** sie eine Längswand (120) umfasst, die entsprechende Betriebsmittel von den entsprechenden Antriebsmitteln trennt. 25

9. Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, dass** sich die Etikettplatziermittel (22) transversal von der Wand (120) erstrecken. 30

10. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Mittel (14) zum Zuführen der Umhüllungsteile einen Drehkörper umfassen, der eine Vielzahl von um den Umfang herum verteilten Stellen (141) zur Unterbringung der Umhüllungsteile definiert. 35

11. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** sich die Mittel (14) zum Zuführen der Umhüllungsteile transversal von den Trennmitteln (120) erstrecken. 40

12. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** sie Mittel (16) zum Platzieren von Reißbändern (2, 3) an entsprechenden Stellen der Mittel (14) zum Zurühren der Umhüllungsteile umfasst. 45

13. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** sie Mittel (18) zum Platzieren des den Hauptkörper der Umhüllung bildenden Blattes (4) an einer entsprechenden Stelle der Mittel (14) zum Zuführen der Umhüllungsteile umfasst. 50

14. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Mittel (22) zum Platzieren eines Etiketts das Etikett (5) auf dem entsprechenden Blatt (4) platzieren. 55

15. Vorrichtung nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Mittel (22) zum Platzieren von Etiketten an der Seite der Zuführmittel (14) gegenüber der Seite liegen, an der sich die Mittel (16) zum Platzieren von Reißbändern befinden.

Revendications

- Appareil (10) conditionnant des produits alimentaires pâteux, comme du fromage fondu, des bouillons-cubes, du beurre, de la margarine et ainsi de suite, à emballer dans une enveloppe appropriée, l'enveloppe comprend une feuille obtenue à partir du film coupé suivant une forme adaptée et pour être rabattu de manière à contenir le produit; l'appareil comprenant un cadre de montage (12), un moyen de fonctionnement pour préparer l'emballage et un moyen pour faire fonctionner ledit moyen de fonctionnement; l'appareil comprenant également un moyen (14) pour alimenter les parties de l'enveloppe et un moyen (22) pour placer une étiquette (5) sur un endroit respectif du moyen (14) pour alimenter les parties de l'enveloppe; l'appareil comprenant une paroi longitudinale (120) qui sépare le moyen opérationnel correspondant du moyen d'entraînement respectif, et étant **caractérisé en ce que** le moyen de placement de l'étiquette (22) comprend un moyen (121), sous forme de rouleau tournant qui prélève les étiquettes du moyen d'ajustage (122) et les transfère vers le moyen (14) qui alimente les parties de l'enveloppe, **en ce que** le moyen de placement de l'étiquette (22) est monté sur le moyen de montage respectif qui s'étend transversalement à partir de la paroi de séparation (120) et **en ce que** le moyen de placement de l'étiquette présente, pour chaque étiquette alimentée par le moyen (121), quatre positions opérationnelles, à savoir une position dans laquelle l'étiquette est prélevée dans le magasin, une position dans laquelle de la colle est appliquée sur l'étiquette, une position de ralenti et une position dans laquelle l'étiquette est transférée vers le moyen (14) qui alimente toutes les parties de l'enveloppe ; lesdites positions opérationnelles correspondent à des mouvements angulaires à 90° du rouleau d'étiquette.

quettes.

2. Appareil selon la revendication 1, **caractérisé en ce que** le moyen (22) de placement de l'étiquette (5) est monté au-dessus du moyen (14) qui alimente les parties de l'enveloppe.

3. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen de placement de l'étiquette (22) est monté, par rapport au sens d'alimentation des parties de l'enveloppe de la part du moyen d'alimentation (14), en aval du moyen de placement de la feuille.

4. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen (122) qui loge les étiquettes est monté au-dessus du moyen de raccordement (20).

5. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen de placement de l'étiquette (22) comprend un moyen (123) pour distribuer un matériau adhésif sur les étiquettes positionnées sur le moyen de prélèvement et de transfert de l'étiquette(121).

6. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen (22) de placement de l'étiquette est monté, par rapport au sens d'alimentation des parties de l'enveloppe de la part du moyen d'alimentation, de manière à ce que l'étiquette soit placée à un endroit immédiatement en aval de l'endroit pour la première languette de préhension sur laquelle opère le moyen de raccordement (20).

7. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le cadre de montage (12) comprend un moyen de séparation (120) qui se développe dans le sens de la longueur le long de l'appareil, et à partir duquel le moyen opérationnel correspondant se développe à son tour et qui sépare le moyen opérationnel du moyen d'entraînement.

8. Appareil selon la revendication 7, **caractérisé en ce qu'il** comprend une paroi longitudinale (120) qui sépare le moyen opérationnel correspondant du moyen d'entraînement respectif.

9. Appareil selon la revendication 8, **caractérisé en ce que** le moyen de placement de l'étiquette (22) se développe transversalement à partir de la paroi (120).

10. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen (14) d'alimentation des parties de l'enveloppe comprend un corps rotatif définissant une pluralité d'endroits distribués de façon circonférentielle (141) pour loger les parties de l'enveloppe.

5 11. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen (14) pour alimenter les parties de l'enveloppe se développe transversalement à partir du moyen de séparation (120).

10 12. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce qu'il** comprend un moyen (16) pour placer le moyen de la languette de préhension (2, 3) aux endroits respectifs du moyen d'alimentation des parties de l'enveloppe (14).

15 13. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce qu'il** comprend un moyen (18) pour placer la feuille (4) constituant le corps principal de l'enveloppe sur un endroit respectif du moyen (14) pour alimenter les parties de l'enveloppe.

20 14. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen (22) pour placer une étiquette place l'étiquette (5) au-dessus de la feuille respective (4).

25 15. Appareil selon l'une quelconque des revendications précédentes, **caractérisé en ce que** le moyen de placement de l'étiquette (22) est situé sur le côté du moyen d'alimentation (14) du côté opposé à celui où se trouve le moyen de placement de la languette de préhension (16).

30 35

30 40

35 45

40

45

50

55

FIG. 1

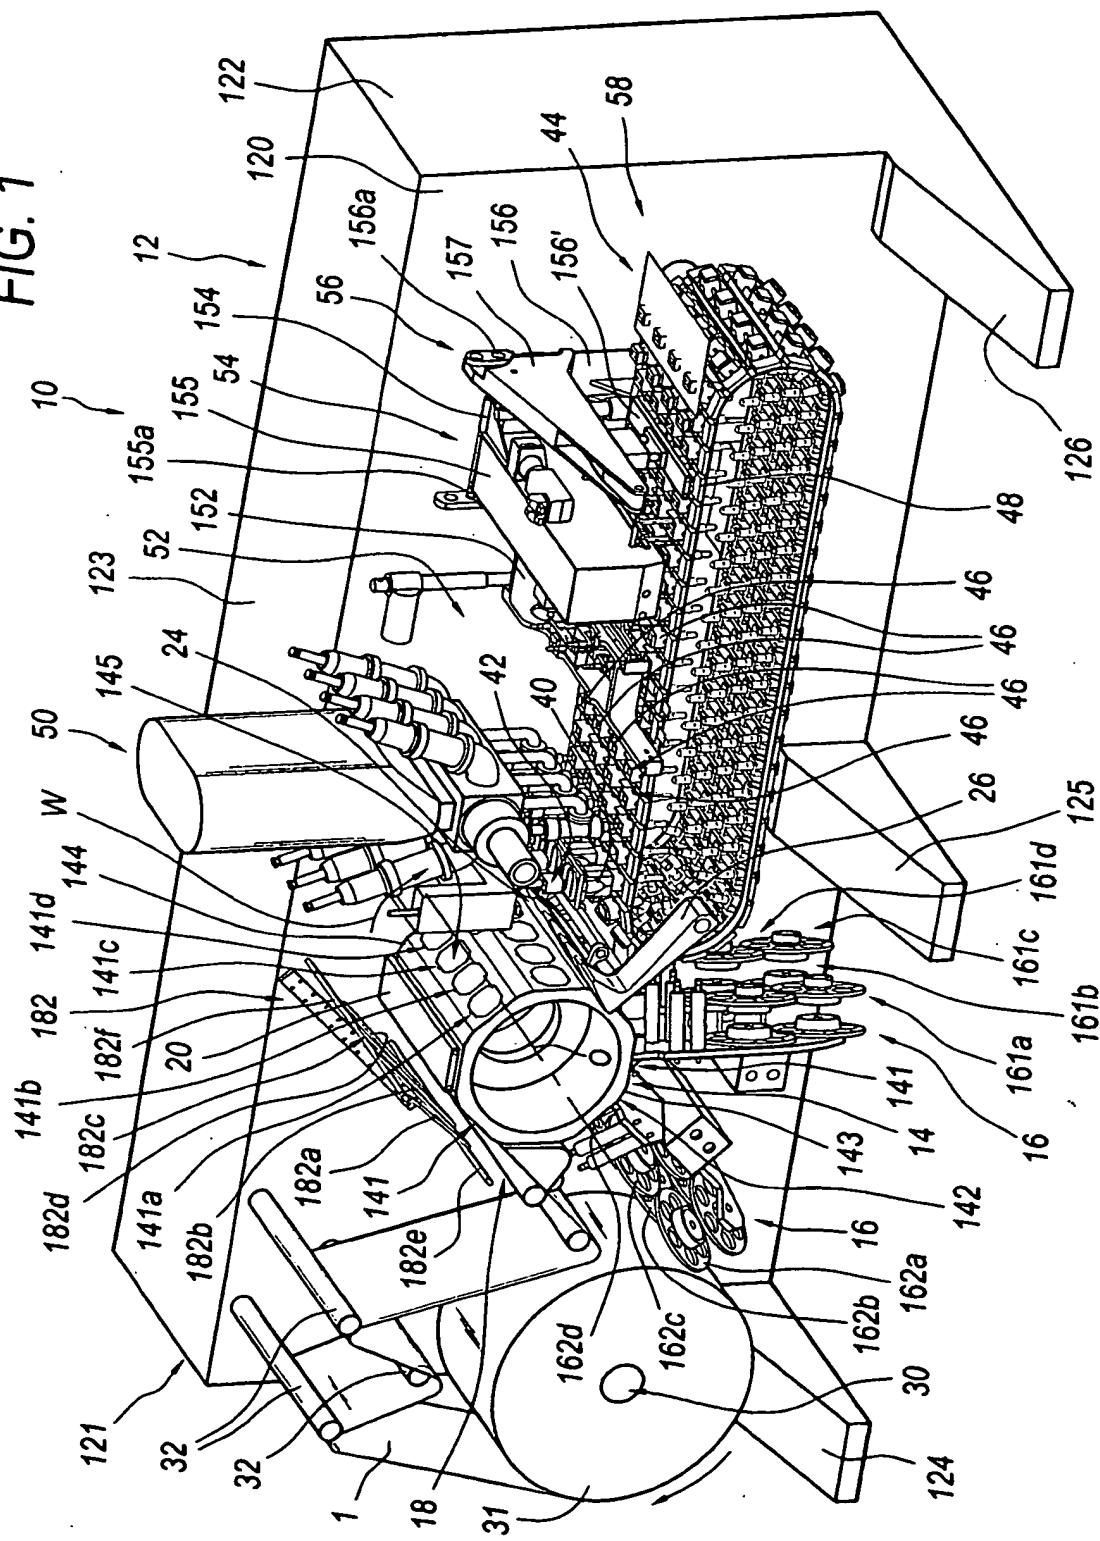


FIG. 2

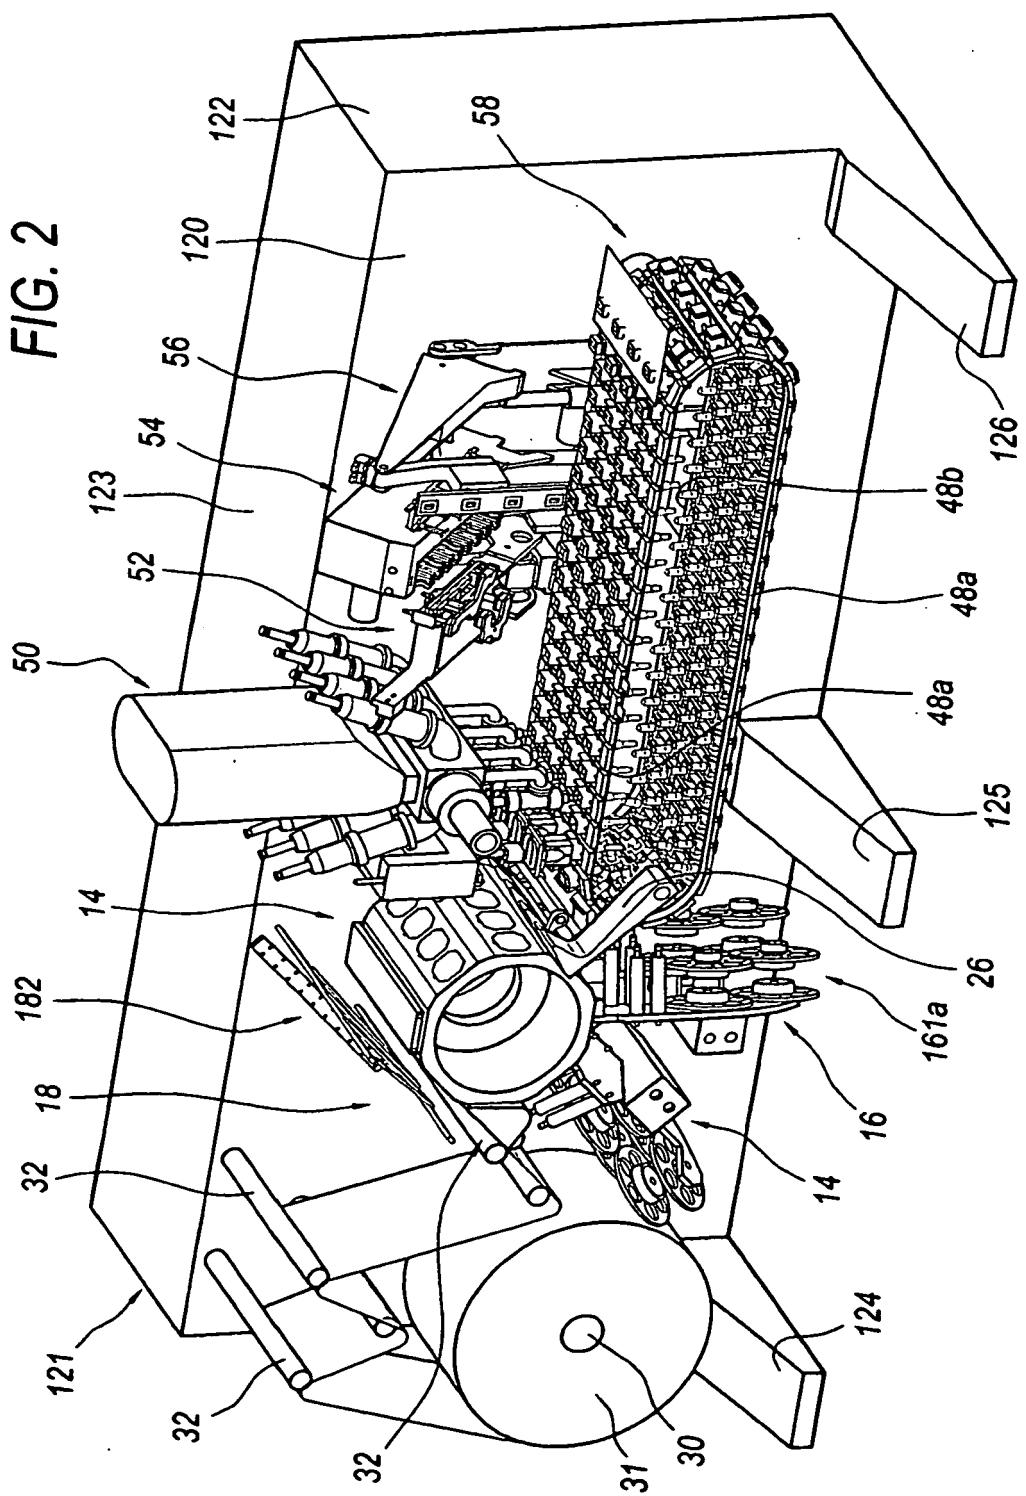
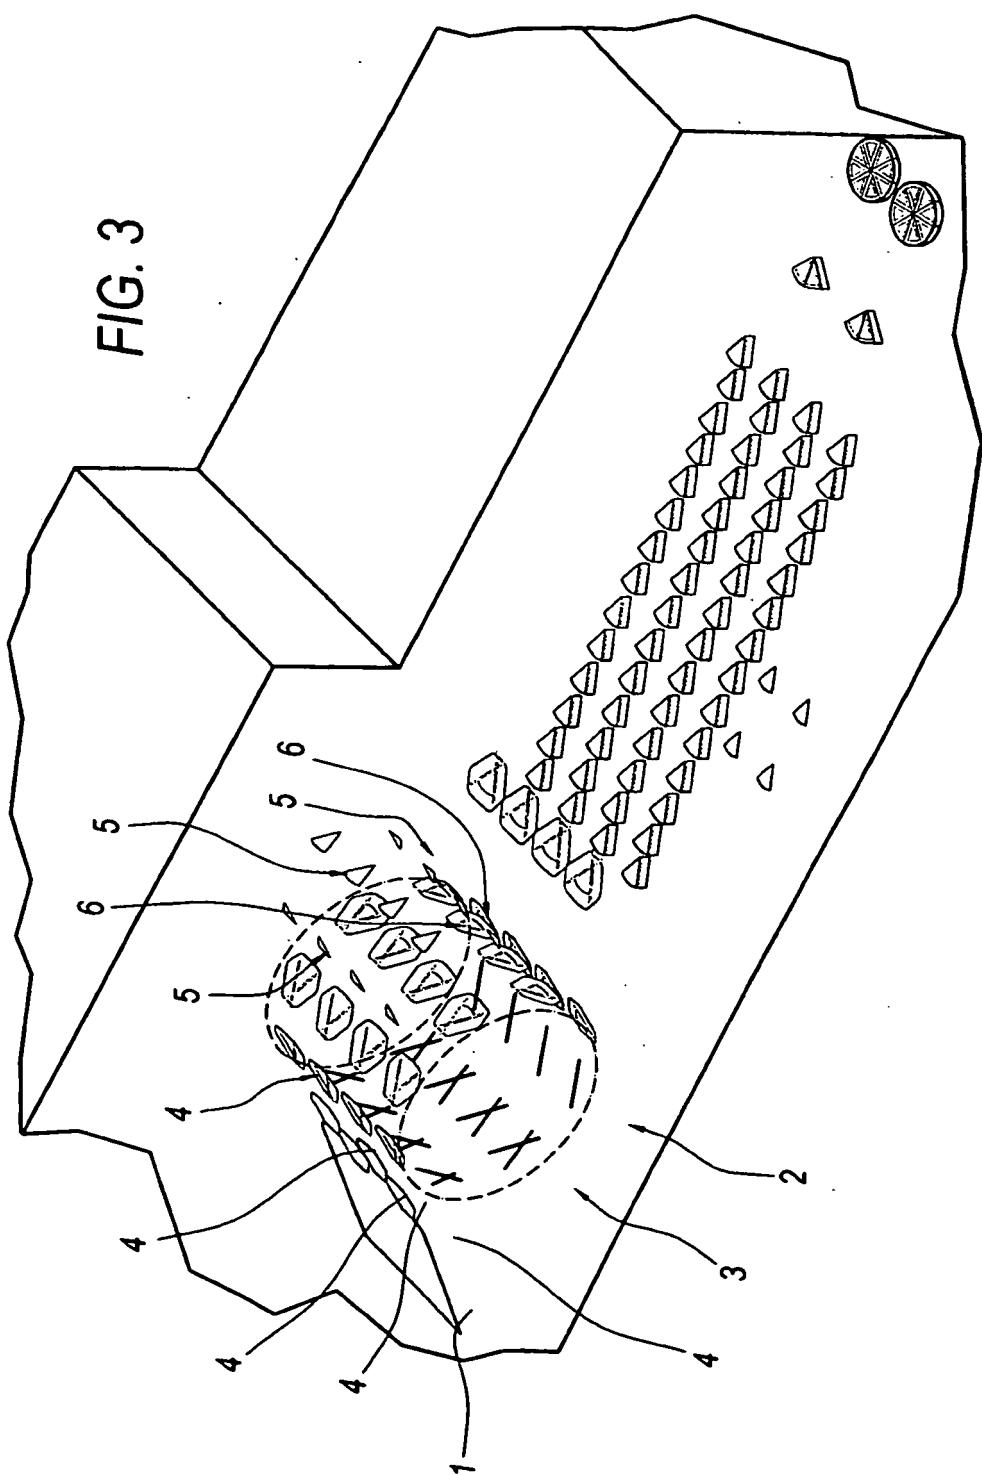
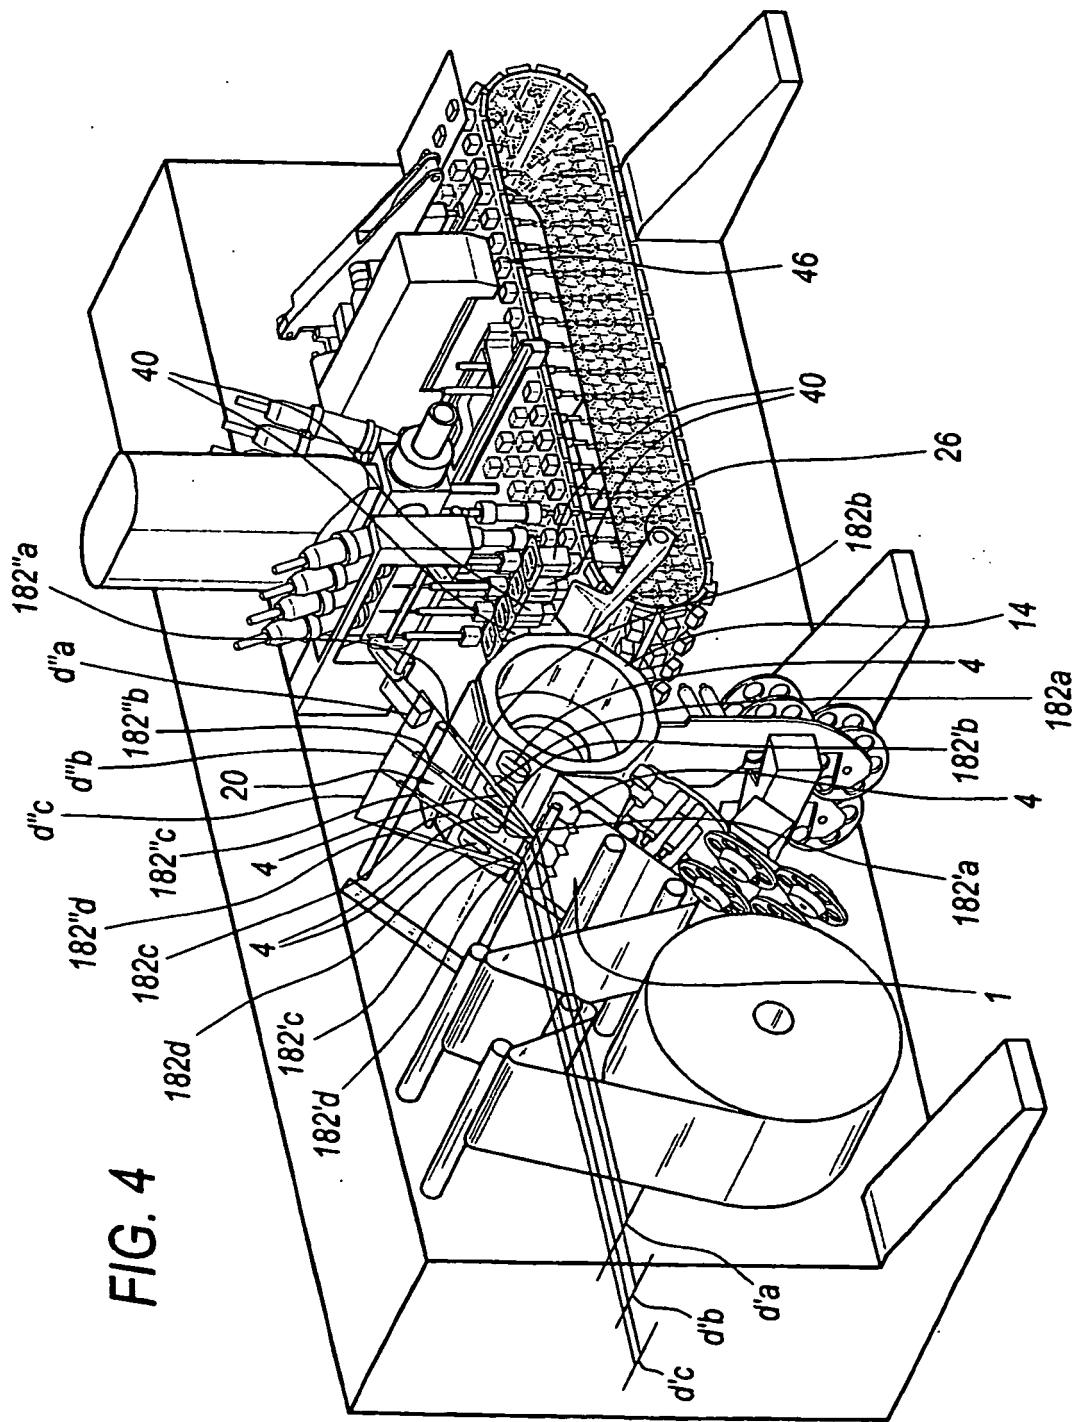


FIG. 3






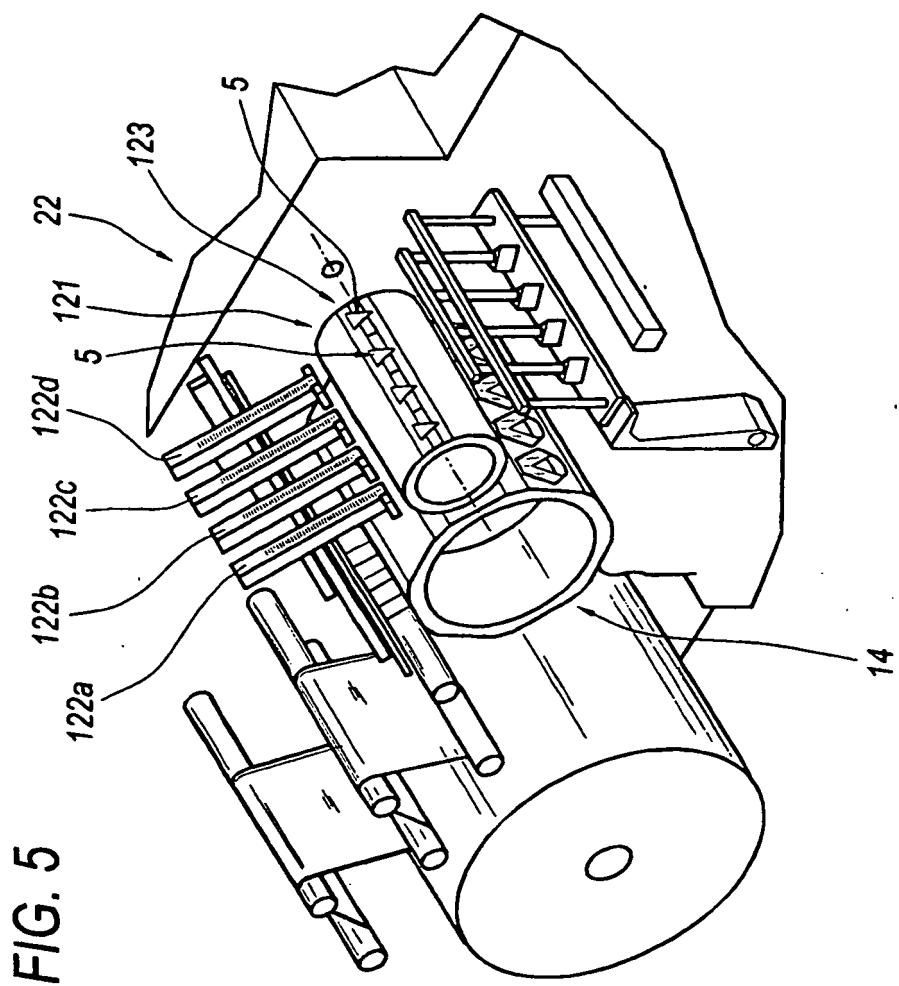


FIG. 6

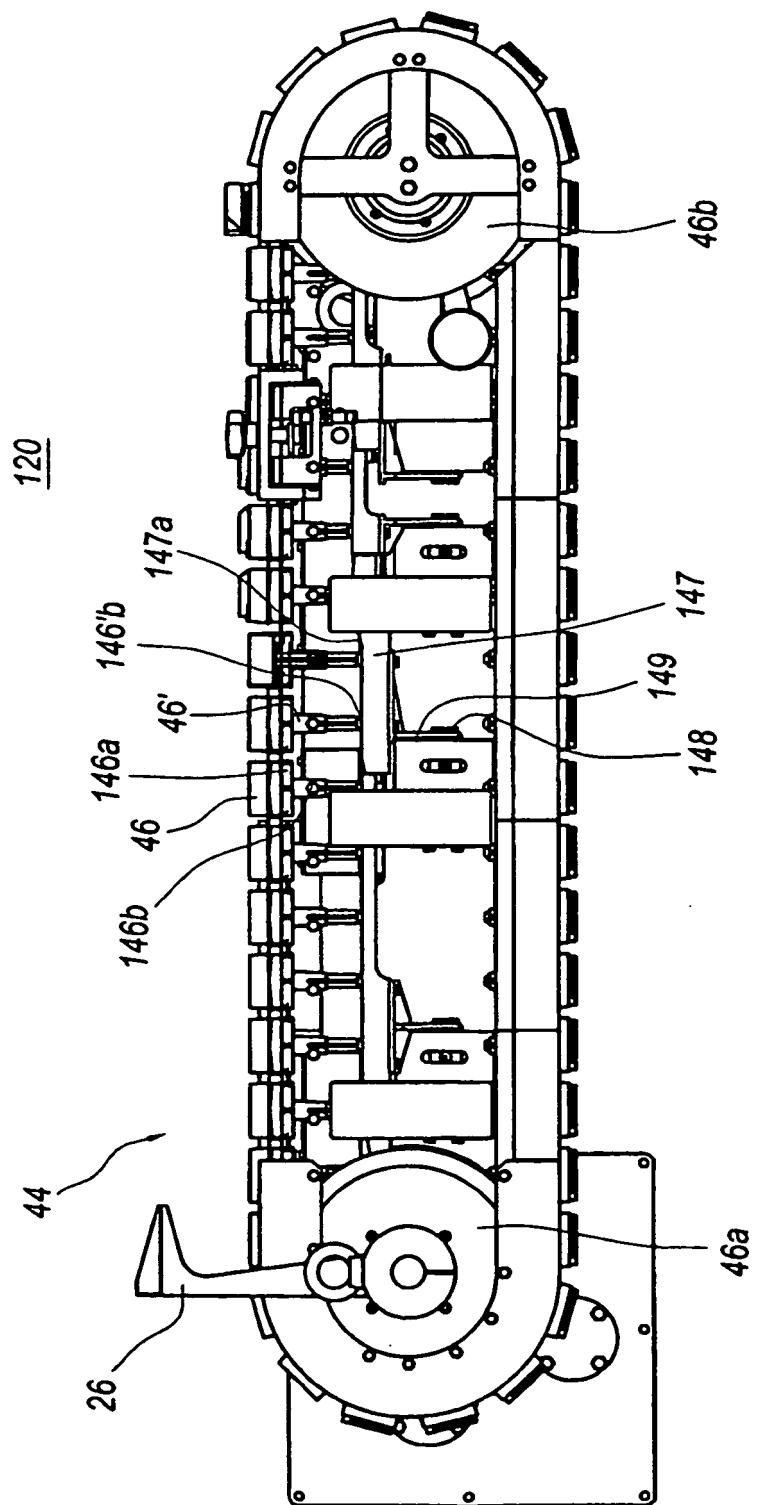

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2005058701 A [0006]
- EP 1094005 A [0006]
- WO 03091043 A [0006]