



(51) International Patent Classification:
H02B 11/24 (2006.01)

(21) International Application Number:
PCT/EP2012/053823

(22) International Filing Date:
6 March 2012 (06.03.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/042,512 8 March 2011 (08.03.2011) US

(71) Applicant (for all designated States except US): **EATON INDUSTRIES GMBH** [DE/DE]; Hein-Moeller-Strasse 7-11, 53115 Bonn (DE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): **KRIECHEL, Ralph** [DE/DE]; Eisensteingrube 28, 53347 Alfter (DE). **KUTSCHE, Wolfgang** [DE/DE]; Brabanterstr. 12, 53919 Weilerswist (DE). **BOGDON, Erik** [US/US]; 10 Carol Drive, Carnegie, Pennsylvania 15106 (US). **KOZAR, Aron** [US/US]; 2071 route 68, Zelienople, Pennsylvania 16063 (US). **RODGERS, Craig** [US/US]; 2105 Timbeaglen Drive, Imperial, Pennsylvania 15126 (US).

(74) Agent: **LEADBETTER, Benedict**; Eaton Industries Manufacturing GmbH, Route de la Longeraie 7, CH-1110 Morges (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

[Continued on next page]

(54) Title: FLEXIBLE COVER FOR CONTACTS OF A PLUG-IN OR WITHDRAWABLE UNIT

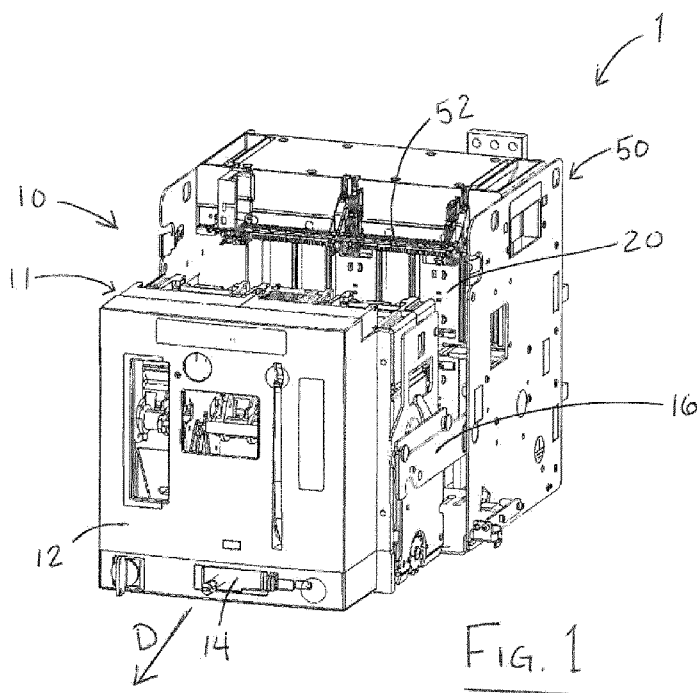

(57) Abstract: A shutter (20) for insulating electrical contacts (54) includes a first panel (22) having a first opening (30) and a second panel (24) having a second opening (30). The first opening is offset from the second opening when the shutter is in a closed position. The second panel (24) includes a first guide (34) configured to react to a pressure of a phase barrier (60) of an insertable withdrawable unit (10) thereon to move the second panel in a first sliding direction relative to the first panel such that the first and second openings align so as to allow an electrical contact to extend therethrough. A spring housing (100) having a spring disposed therein between at least two support legs (102, 103) is slidably disposable in the first panel (22) and extends through the second panel (24).



(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

FLEXIBLE COVER FOR CONTACTS OF A PLUG-IN OR WITHDRAWABLE UNIT FIELD

- 10 The present invention relates generally to a flexible cover, or shutter, for insulating contacts of a plug-in or withdrawable unit.

BACKGROUND

- Switchgears are a combination of electrical components, such as switches, fuses and circuit breakers, which are used in electrical systems to connect and disconnect all or part of the electrical systems. Electrical cabinets, for example, for a plant, often house one or more switchgears for different electrical systems, operated by one or more sources of power, which are controlled by the switchgears. These switchgears can be provided as plug-in or withdrawable units that are installed into the cabinets so as to electrically connect to main and auxiliary contacts within the cabinet.
- 15
- 20 In order to prevent accidental touching and dangerous exposure to the active electrical contacts in the cabinet, in particular when inserting or removing withdrawable units, or when not all available spaces within the cabinet are in use, the contacts of the cabinet are covered by an insulating screen. This insulating screen can be a flexible cover or shutter which completely covers the contacts in a closed state and exposes the contacts in an open state.
- 25 The shutter is formed from an insulating material and protects the contacts from accidental touching until a withdrawable unit is to be installed, during which the shutter opens to expose the contacts and connect the contacts to contact cages of the withdrawable unit in a safe manner. When the withdrawable unit is removed, the shutter transitions again to a closed state. The withdrawable units are used so that it is relatively easy to perform maintenance on switchgears or replace them. To test the protection against direct contact that is provided by the shutter, a test can be performed according to established standards for protection against direct contact and intrusion of foreign particles.
- 30

5 Shutters having various opening and closing mechanisms are known. U.S. Patent No. 7,067,747 and International Application Publication No. WO 02/087041 describe protective plates which are opened by operating levers. U.S. Patent No. 6,031,191 describes a protective plate which is opened with pivoting rocker arms. U.S. Patent Application Publication No. 2009/0000926 describes shutter plates that are moved by pivoting-V-shaped
10 linkages attached to a telescoping rod.

SUMMARY

Applicants have discovered that existing shutters do not provide adequate protection since the motion of the shutters are too complex and involve too many components to provide a safe, reliable and consistent opening or closing of the shutters while inserting or removing
15 withdrawable units. In particular, shutters which rely on, for example, levers, rocker arms and telescoping rods introduce forces on the withdrawable unit which are transverse or oblique to the desired motion of the withdrawable unit, which is directly perpendicular to the contacts in the cabinet. Accordingly, it has been determined that the existing shutters can not always provide adequate protection. Moreover, such shutters require many components and
20 are more complex to use and more expensive to make than necessary. Thus, a shutter that is simple, safe and reliable is needed.

In an embodiment, the present invention provides a shutter for insulating electrical contacts including a first panel having a first opening and a second panel having a second opening. The first opening is offset from the second opening when the shutter is in a closed position.
25 The second panel includes a first guide configured to react to a pressure of a phase barrier of an insertable withdrawable unit thereon to move the second panel in a first sliding direction relative to the first panel such that the first and second openings align so as to allow an electrical contact to extend therethrough. A spring housing having a spring disposed therein between at least two support legs is slidably disposable in the first panel and extends through
30 the second panel.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be described in even greater detail below based on the exemplary figures. The invention is not limited to the exemplary embodiments. Other features and

5 advantages of various embodiments of the present invention will become apparent by reading the following detailed description with reference to the attached drawings which illustrate the following:

FIG. 1 is a perspective view of a withdrawable unit in a pulled-out position;

FIG. 2 is a perspective view of the withdrawable unit in a disconnected position;

10 FIG. 3 is a perspective view of the withdrawable unit in a connected position;

FIG. 4 is a perspective view of the a fix-mounted part of the withdrawable unit;

FIG. 5 is a perspective view showing phase barriers and contact cages of the withdrawable unit approaching a pair of shutters installed in a cabinet housing in a pulled-out and closed position according to an embodiment of the present invention;

15 FIG. 6 is a detailed view of detail X of FIG. 5 with the shutter in a pushed back and open position in accordance with an embodiment of the present invention;

FIG. 7 is a perspective view of the cabinet housing with the shutters in the closed position;

FIG. 8 is an exploded view of the cabinet housing of FIG. 7;

FIG. 9 is a detailed view of detail Y of FIG. 8;

20 FIG. 10 is a front perspective view of the shutter in the open position;

FIG. 11 is a rear perspective view of the shutter in the closed position;

FIG. 12 is a detailed view of a spring and spring housing being installed into the shutter according to an embodiment of the present invention;

FIG. 13 is a sectional view of the fix-mounted part of FIG. 5 taken along section A-A;

25 FIG. 14 is a detailed view of detail Z of FIG. 13; and

- 5 FIGS. 15 and 16 are detailed views of the operation of the shutter in accordance with an embodiment of the present invention and respectively show the phase barriers approaching the shutter and having transitioned the shutter to the pushed back and open position.

Like reference numerals are used in the drawing figures to connote like components.

DETAILED DESCRIPTION

- 10 Referring to FIGS. 1-3, a switchgear 1 includes a withdrawable unit 10 including, for example, a circuit breaker 14 within the housing of the withdrawable unit 10 at the front withdrawable part 11 thereof. The withdrawable part 11 can be pulled away from or pressed toward a fix-mounted part 50 in direction D. The fix-mounted part 50 is typically mounted in an electrical cabinet adjacent to other withdrawable units. To ensure a controlled motion
15 directly inwards and outwards from the fix-mounted part 50 in direction D, the withdrawable unit 10 can be provided with guide rails 16 or other components that are able to stabilize the withdrawable unit 10 and guide withdrawable part 11 along direction D to the pulled-out position shown in FIG. 1. From the pulled-out position, the withdrawable unit 10 can be removed or pushed inward to a disconnected position shown in FIG. 2 in which the electrical
20 contacts, including auxiliary contacts 52, are not engaged. From the disconnected position, the withdrawable unit 10 can be pressed in further, for example, using a wrecking tool, to a connected position shown in FIG. 3, in which the electrical contacts are connected as explained in further detail below.

- Referring to FIG. 4, the fix-mounted part 50 of the withdrawable unit 10 is provided to be
25 mounted within an electrical cabinet with the cabinet housing 70 disposed at the back of the fix-mounted part 50. In the embodiment shown, a pair of shutters 20 are disposed in front of the cabinet housing 70 so as to cover electrical contacts of the cabinet housing 70.

- Any number of withdrawable units 10 can be provided within an electrical cabinet depending on the number of electrical systems or applications that require control. For example, when
30 operating different machinery, such as a welder or drill press, circuit breakers 14 having different ratings can be provided safely and easily by removing the withdrawable part 11 from the pulled-out position of FIG. 1 and replacing it with a withdrawable part 11 of a withdrawable unit 10 having the desired circuit breaker rating for the application. However,

5 it is undesirable to cut off power since other electrical systems controlled by the electrical cabinet would then be cut off from power as well. Thus, shutters 20 are provided in accordance with an embodiment of the present invention so as to protect the active electrical contacts of the cabinet, during replacement of the withdrawable part 11, from accidental touching. Moreover, where a plant does not use all available connections in the electrical
10 cabinet, the shutters 20 can still be mounted on the cabinet housing 70, with or without the fix-mounted part 50 (see FIGS. 4 and 7, respectively), such that the active electrical contacts are still insulated and protected from accidental touching, even when not in use.

For example, as shown in FIG. 7, an empty space of the cabinet housing 70 can include mounted shutters 20 to protect the active contacts until such time as a withdrawable unit 10 is
15 to be installed to control a new electrical system or application. The cabinet housing 70 can include an extension 72 between the shutters 20 having clips 74 that hold the shutters 20 in the pulled-out and closed position until the installation of a withdrawable unit 10, in which case, the clips 74 also allow for the shutters 20 to be pushed back to the open position. Additionally, lock supports 42 on the shutters 20 can be provided such that a lock can extend
20 through the extension. In an embodiment, the lock supports 42 are U-shaped brackets extending through the shutter 20 which allow for the insertion of a lock through the extension 72 and, if desired, through another adjacent lock support 42 of an adjacent shutter 20. Alternatively, the lock supports 42 on adjacent shutters 20 can be locked directly together. Locks can be desired to prevent unauthorized access to the electrical contacts. For example,
25 locking the shutters 20 can prevent the stealing of electric power or copper components, as well as prevent an unknowing person from accidentally opening the shutters 20.

Referring to FIG. 5, the cabinet housing 70 is shown in greater detail with the shutters 20 being in a pulled-out and closed position. A portion of the withdrawable part 11 is also shown with housing 12 removed in order to illustrate the operation of the withdrawable unit
30 10. Phase barriers 60, which in the embodiment shown are configured as vertically-oriented blades, are preferably formed from an electrically-insulating material and attached at the rear of the withdrawable part 11. Likewise, contact cages 62 are attached, for example, via contact cage supports 64, made from an electrically-insulating material, to the rear of the withdrawable part 11. However, it is noted that, depending on the electrical standard, such as
35 the IEC standard used in Europe or the UL standard used in the United States, the contact

5 cages 62 can be attached respectively to either the withdrawable unit 10 or the circuit breaker 14.

FIG. 6 is a detailed view of detail X of FIG. 5, however, with the withdrawable unit 10 having been moved from the disconnected position of FIG. 2 to the connected position of FIG. 3. In having done so, as the withdrawable part 11 is pressed toward the cabinet housing
10 70, the phase barriers 60 enter between first and second guides 34, 35 of the shutter 20 and move them in opposite directions to transition the shutter 20 to a pressed back and open position of FIG. 6 in which the main contacts 54 extend through openings 30 of the shutter 20. The operation of the shutter 20 is explained in greater detail below with reference to an embodiment shown in FIGS. 10-16. Further, as the withdrawable unit 10 is moved from the
15 disconnected to the connected position, the auxiliary contacts 52 connect and the main contacts 54 engage with the contact cages 62 of the circuit breaker 14.

Referring to FIG. 8, the shutters 20 are shown exploded away from the cabinet housing 70 in order to illustrate the interior of the cabinet housing 70. Accordingly, the main contacts 54 which were covered and protected by the shutters 20 are now visible at the rear of cabinet
20 housing 70. Additionally, it can be seen that the extension 74 can also serve as a barrier to electrically insulate between vertically-adjacent main contacts 54. As better shown in FIG. 9, which is a detailed view of detail Y of FIG. 8, mounting holes 76 are disposed between horizontally-adjacent main contacts 54 and can include entering guides 78 for an easier mounting of the shutters 20, as explained below with reference to FIG. 14. Different
25 configurations of main contacts 54 and mounting holes 76 in the cabinet housing 70 are also possible. With different configurations, spring housings 100 can be moved to correspond to the positions of the mounting holes 76 and the positions of phase barriers 60 and/or extensions 72 can also be moved in order to separate adjacent sets of main contacts 54. Moreover, in one embodiment, the mounting holes 76 are not provided.

30 In the embodiment shown in FIGS. 10 and 11, the shutter 20 includes a front panel 22, a middle panel 24 and a rear panel 26. The panels 22, 24, 26 can be slidably retained adjacent to one another using shutter clips 28 disposed at the top and bottom sides of the shutter 20 and/or using shutter clips 28 disposed within the panels which attach to adjacent panels through sliding support holes 46 or at sliding support extensions 47 disposed at the ends of

5 one or more of the panels 22, 24, 26. Additionally or alternatively, rails or guides could be provided at the top and bottom, or between, the panels 22, 24, 26 to hold the panels 22, 24, 26 together and/or to facilitate the relative sliding motion of the panels 22, 24, 26 with respect to each other when opening and closing the shutter 20.

10 Each of the panels 22, 23, 24 include openings 30 which correspond to the positions of the main contacts 54 when the shutter 20 is in the open position as shown in FIG. 10. When the shutter 20 is in a closed position as shown in FIG. 11, the openings 30 of the each of the panels 22, 24, 26 are offset from one another such that the shutter 20 covers the area in front of the main contacts 54.

15 The front panel 22 includes spring mounts 48 configured to slidably retain the spring housings 100. In the embodiment shown, the spring mounts 48 are semi-circular holes corresponding to the profile of support legs 102, 103. However, in different embodiments, for example where the spring housing 100 has a different shape such as rectangular with straight support legs 102, 103, the spring mounts 48 could instead be rectangular holes corresponding to the profile of the support legs 102, 103.

20 The front panel 22 also includes a first aperture 38 through which a first guide 34 disposed on a front face of the middle panel 24 extends. The middle panel 24 includes a second aperture 39 through which a second guide 35 disposed on a front face of the rear panel 26 extends. Each of the apertures 38, 39 are of sufficient size to allow for the lateral sliding of the middle and rear panels 24, 26 when the shutter 20 is opened. Additionally, the middle and rear
25 panels 24, 26 include spring clearance holes 44 through which the spring housings 100 extend and which are likewise of sufficient size to allow for the lateral sliding of the middle and rear panels 24, 26 when the shutter 20 is opened.

Referring to FIGS. 15 and 16, which respectively show in detailed views the shutter 20 in the closed position and the shutter 20 in the open position, the shutter 20 is opened by the motion
30 of phase barriers 60 of the withdrawable unit 10 when moved from the disconnected to connected position (see FIGS. 2 and 3). As the phase barrier 60 is pushed in with the withdrawable part 11, the phase barrier 60 contacts between the first and second guides 34, 35. In the embodiment shown, the guides 34, 35 are configured as inclined surfaces 40 which

5 overlap in the path of the phase barrier 60 in the motion of phase barriers 60 of the withdrawable unit 10 when moved from the disconnected to connected position. Accordingly, as the phase barrier 60 travels directly inward and down the inclined surfaces 40 of the guides 34, 35, they slide in separate directions with the first guide 34 causing the middle panel 24 to move in a first direction (e.g., laterally left) and the second guide causing
10 the rear panel 26 to move in a second direction opposite the first direction (e.g., laterally right). In this example, the openings 30 of the middle panel 24 can be offset to the right of the openings 30 of the front panel 22 and the openings 30 of the rear panel 26 can be offset to the left of the openings 30 of the front panel 22 such that the relative sliding motion of the middle and rear panels 24, 26 provided by the guides 34, 35 respectively attached thereto
15 cause the openings 30 in each of the panels 22, 24, 26 to align and open the shutter 20. As described above, the first guide 34 of the middle panel 24 slides within the first aperture 38 in the front panel 22 and the second guide 35 of the rear panel 26 slides within the second aperture 38 in the middle panel 24.

The guides 34, 35 in the embodiment shown also include straight sections 41 below the
20 inclined surfaces 40 which abut the phase barrier 60 once the movement provided by the guides 34, 35 has opened the shutter such that main contacts 54 can extend through the aligned openings 30 of the panels 22, 24, 26. From this opened position of the shutter 20, continued movement of the phase barrier 60 presses the panels 22, 24, 26 of the shutter 20 rearwards toward the cabinet housing 70 so that the main contacts 54 extend through the
25 openings 30 of panels 22, 24, 26, and continues until the shutter is in a pushed back and open position shown in FIG. 16. While the shutter 20 is pushed back, the spring housing 100 remains relatively stationary and thus the spring mounts 48 slide along the support legs 102, 103 as is also shown in FIG. 16. This aids in guiding the shutter directly back towards the cabinet housing 70, especially since a base 112 of the spring housing 100 is maintained in
30 axial alignment by the mounting holes 76 as shown in FIG. 13. Preferably, the openings 30 are at least substantially aligned, and are slightly larger, and shaped similar to, than the profiles of the main contacts 54 to allow some clearance for the main contacts 54 to extend through. However it is also possible to oversize one or more of the openings 30 on one or more of the panels 22, 24, 26.

5 Other types of guides 34, 35 are also possible. For example, the guides 34, 35 can be arcuate, with or without straight sections 41. Further, in an embodiment having only a front panel 22 and a rear panel 26, only guide 35 is provided. In this embodiment, the guide 35 can be longer in order to effect a greater lateral movement of the rear panel 26 relative to the stationary front panel 22, if necessary, to align openings 30 such that the main contacts 54 are
10 able to extend therethrough. Further, a rotational opening of the shutter 20 is also possible. For example, the guides 34, 35 can be provided along an opening, such as apertures 38, 39, that is configured as an arcuate path to rotate the middle and/or rear panel 24, 26 so that the openings 30 of the panels 22, 24, 26 align sufficiently for there to be enough space through which the main contacts 54 can extend.

15 The assembly of the spring housing 100 into the shutters 20 in accordance with an embodiment of the present invention will be explained with reference to FIG. 12. In a first step, a spring 110 disposed between the support legs 102, 103 is compressed toward a base 112 of the spring housing 100. In a second step, the support legs 102, 103 are pressed toward one another and, in a third step, are inserted through the spring clearance holes 44 of the
20 middle and rear panels, 24, 26 and into the spring mounts 48 of the front panel 22. As shown in FIGS. 15 and 16. The support legs 102, 103 include clip ends 106, which in the embodiment shown, are configured as flanges that extend outward from the support legs 102, 103 so as to prevent the spring housing 100 from becoming detached when the bias of the spring 110 presses against the rear panel 26 of the shutter 20. The clip ends 106 also include
25 inclined surfaces 108 to facilitate the insertion of the clip ends 106 into the spring mounts 48. In an embodiment, the third step of inserting the clip ends 106 of the support legs 102, 103 into spring mounts 48 can also perform steps one and two in that the spring will be compressed at the rear of the front panel 22 while being inserted and the support legs will be pressed toward each other by the inclined surfaces 108 of the clip ends 106 as they are
30 inserted into the spring mounts 48. It is advantageous, however, to configure the spring 110 so that it fits relatively snugly within the spring housing 100 and between the support legs 102, 103 in order to stabilize the spring 110 and avoid bending, thereby providing a more controlled motion and ensuring a greater clearance and leakage distance as discussed below. In this case, it is also advantageous to perform all three steps when assembling the spring
35 housing 100 into the shutter 20.

5 Referring to FIGS. 13 and 14, the phase barriers 60 enter between the guides 34, 35 in direction E. As described above, the guides 34, 35 are then forced in opposite directions to slide the openings 30 of the middle and rear panels 24, 26 into substantial alignment with the openings 30 of the front panel in order to open the shutter 20. The phase barriers 60 also press the shutter 20 back against the force of the spring 110 toward the rear of the cabinet housing 70, thereby allowing the main contacts 54 to extend through the openings 30 and contact the contact cages 62 such that the withdrawable unit 10 is in the connected position of FIG. 3. When disconnecting the withdrawable unit 10 (see FIG. 2), the force of the springs 110 press the shutter 20 back forward to the pulled-out and closed position.

15 The spring housing 100 according to an embodiment of the present invention increases the leakage distance and clearance C between the spring 110 and the main contacts 54, which are typically made of copper, by at least partially surrounding the spring 110, thereby decreasing the likelihood of an arc forming therebetween. Moreover, the clearance C is also stably maintained since the base 112 stabilizes the spring housing 100 within the mounting holes 76 of the cabinet housing 70. The mounting holes 76 can include entering guides 78 and the base 112 can include corresponding entering guides 114 which allow the shutter 20 to be easily mounted by a customer within an electrical cabinet.

20 As described above, it is possible to use only two panels, for example, the front panel 22 and rear panel 26. Additionally, the order of the panels 22, 24, 26 may be interchanged such that, for example, the front and middle panels 22, 24 slide relative to the rear panel 26, which would then contain the spring mounts 48. Moreover, the shutter 20 can be used for a variety of installations and the same shutter can be used for both the line and load side.

30 While the invention has been particularly shown and described with reference to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention. Further, the present invention is not limited to the embodiments described herein; reference should be had to the appended claims

5

CLAIMS

What is claimed is:

1. A shutter for insulating electrical contacts comprising:

10 a first panel including a first opening and a second panel including a second opening, the first opening being offset from the second opening when the shutter is in a closed position, the second panel including a first guide configured to react to a pressure of a phase barrier of an insertable withdrawable unit thereon to move the second panel in a first sliding direction relative to the first panel such that the first and second openings align so as to allow an electrical contact to extend therethrough; and

15 a spring housing having a spring disposed therein between at least two support legs slidably disposable in the first panel and extending through the second panel.

2. The shutter according to claim 1, further comprising a third panel including a third opening that is offset from the first and second openings when the shutter is in the closed position, the third panel including a second guide overlapping the first guide in a direction of movement of the phase barrier and configured to react to the pressure of the phase barrier
20 thereon to move the third panel in a second sliding direction relative to the first panel.

3. The shutter according to claim 2, wherein the second sliding direction is opposite to the first sliding direction.

4. The shutter according to claim 3, wherein the guides include inclined surfaces that are inclined toward one another in the direction of movement of the phase barrier.

25 5. The shutter according to claim 1, wherein the spring housing includes a base configured to be held by a mounting hole of a cabinet housing so as to provide a stabile clearance on each side of the spring between the spring and the electrical contacts.

6. The shutter according to claim 5, wherein the mounting hole includes an entering guide and the base includes a corresponding entering guide.

- 5 7. The shutter according to claim 5, wherein the spring is formed from a metal and disposed in close arrangement with the at least two support legs.
8. The shutter according to claim 1, wherein the spring is disposed so as to be compressed by the first panel as the withdrawable unit is inserted toward a connected position with the electrical contact.
- 10 9. The shutter according to claim 1, further comprising three additional spring housings slidably disposable in the first panel with the spring housing arranged so as to be evenly positioned between adjacent pairs of electrical contacts.
10. The shutter according to claim 1, wherein the at least two support legs include clip ends that are connectable in the first panel through spring mounts in the first panel.
- 15 11. The shutter according to claim 1, further comprising a lock support configured to lock the shutter in the closed position.
12. A withdrawable unit for an electrical cabinet comprising:
- a withdrawable part including a circuit breaker, at least one phase barrier and at least one contact cage;
- 20 a fix-mounted part configured to mount to a cabinet housing that includes electrical contacts, the withdrawable part being movable in the fix-mounted part from a disconnected position to a connected position in which the at least one contact cage makes contact with at least one of the electrical contacts; and
- a shutter configured to mount on the cabinet housing so as to cover the
- 25 electrical contacts, the shutter including:
- a first panel including a first opening and a second panel including a second opening, the first opening being offset from the second opening when the withdrawable part is in the disconnected position, the second panel including a first guide configured to react to a pressure of the at least one
- 30 phase barrier when the withdrawable part is moved to the connected position to move the second panel in a first sliding direction relative to the first panel

5 such that the first and second openings align so as to allow the at least one of the electrical contacts to extend therethrough; and

 a spring housing having a spring disposed therein between at least two support legs slidably disposable in the first panel and extending through the second panel.

10 13. The withdrawable unit according to claim 12, wherein the shutter further comprises a third panel including a third opening that is offset from the first and second openings when the shutter is in a closed position, the third panel including a second guide overlapping the first guide in a direction of movement of the phase barrier and configured to react to the pressure of the phase barrier thereon to move the third panel in a second sliding direction
15 relative to the first panel.

14. The withdrawable unit according to claim 12, wherein the spring housing includes a base configured to be supported within a mounting hole of the cabinet housing.

15. The withdrawable unit according to claim 14, wherein each mounting hole includes an entering guide and each base includes a corresponding entering guide.

20 16. A method of assembling a shutter comprising:

 compressing a spring disposed in a spring housing between at least two support legs;



 pressing the at least two support legs toward one another; and



 inserting the at least two support legs into spring mounts of a first panel through a sliding support hole of a second panel that is adjacent the first panel such
25 that the spring is biased against the first panel and allows the second panel to be slidable relative to the first panel so as to open and close the shutter.

17. The method according to claim 16, further comprising installing the shutter in a cabinet housing so as to cover electrical contacts.

18. The method according to claim 17, wherein the step of installing the shutter further
30 includes aligning a base of the spring housing with a mounting hole of the cabinet housing.

- 5 19. The method according to claim 18, wherein the aligning is provided by an entering guide of the mounting hole and a corresponding entering guide of the base such that the base is closely held in the mounting hole.
20. The method according to claim 17, wherein the step of installing the shutter further includes fastening the shutter to clips of an extension of the cabinet housing so as to allow the
10 shutter to move in the clips toward the electrical contacts.

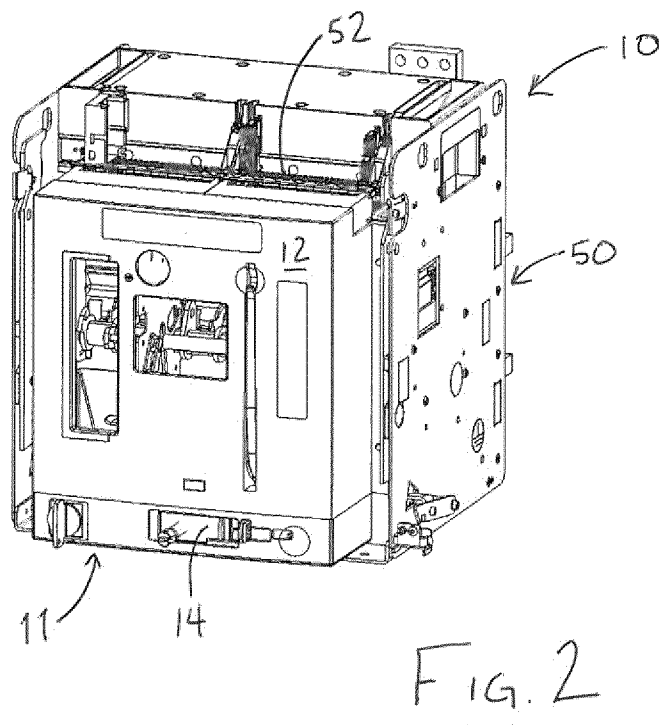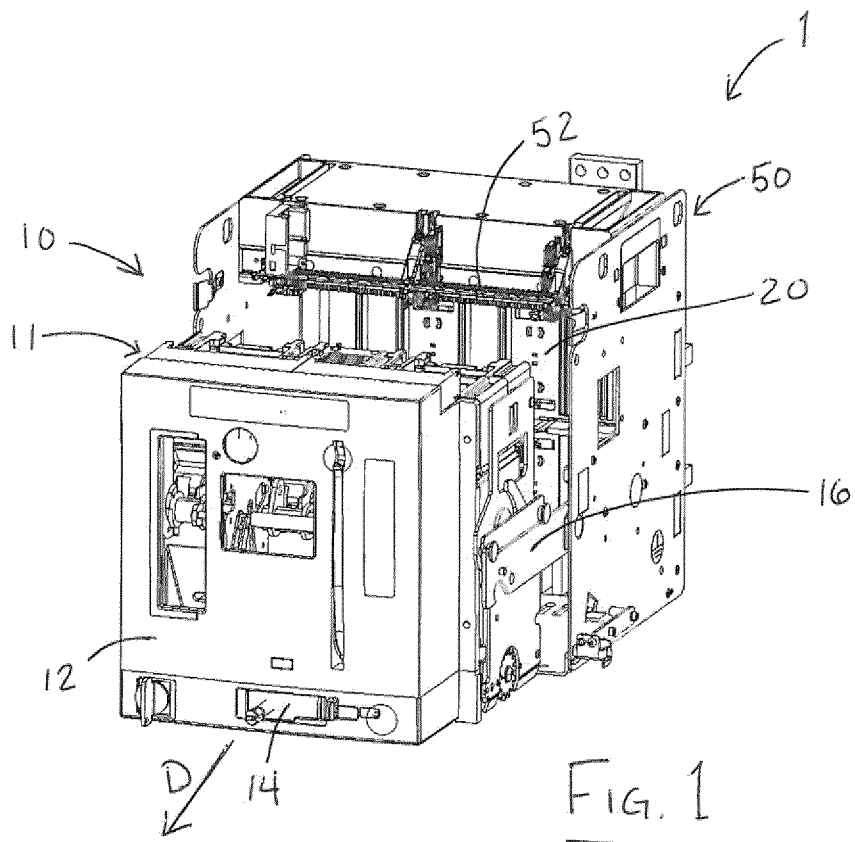

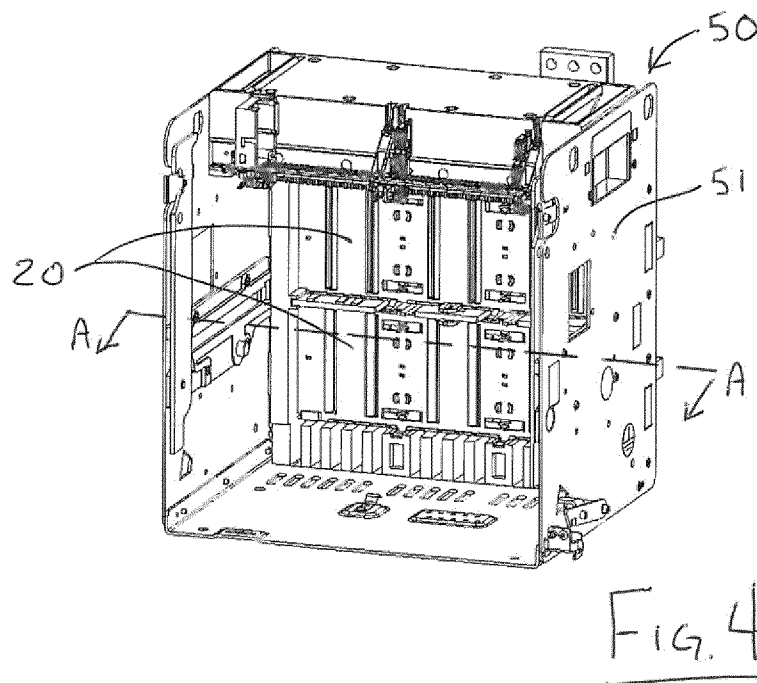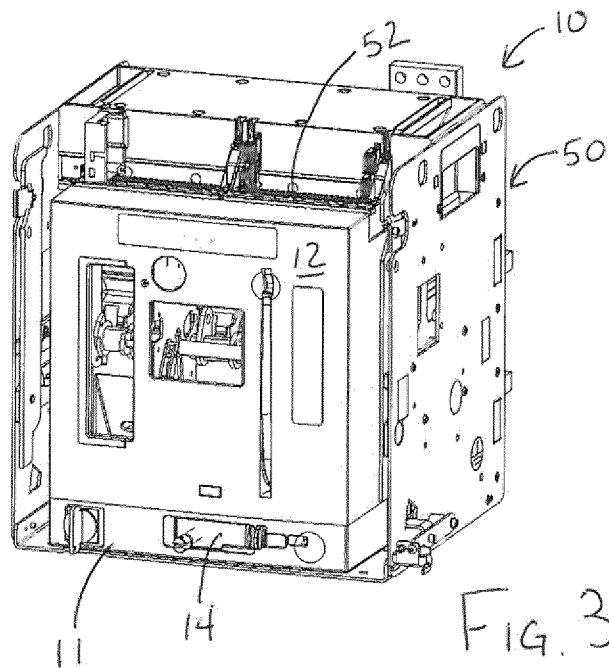

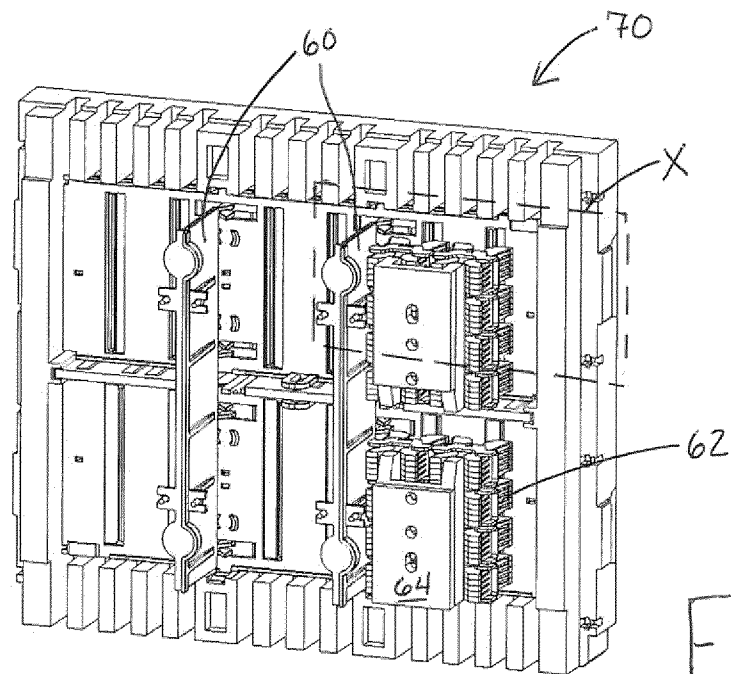


Fig. 5

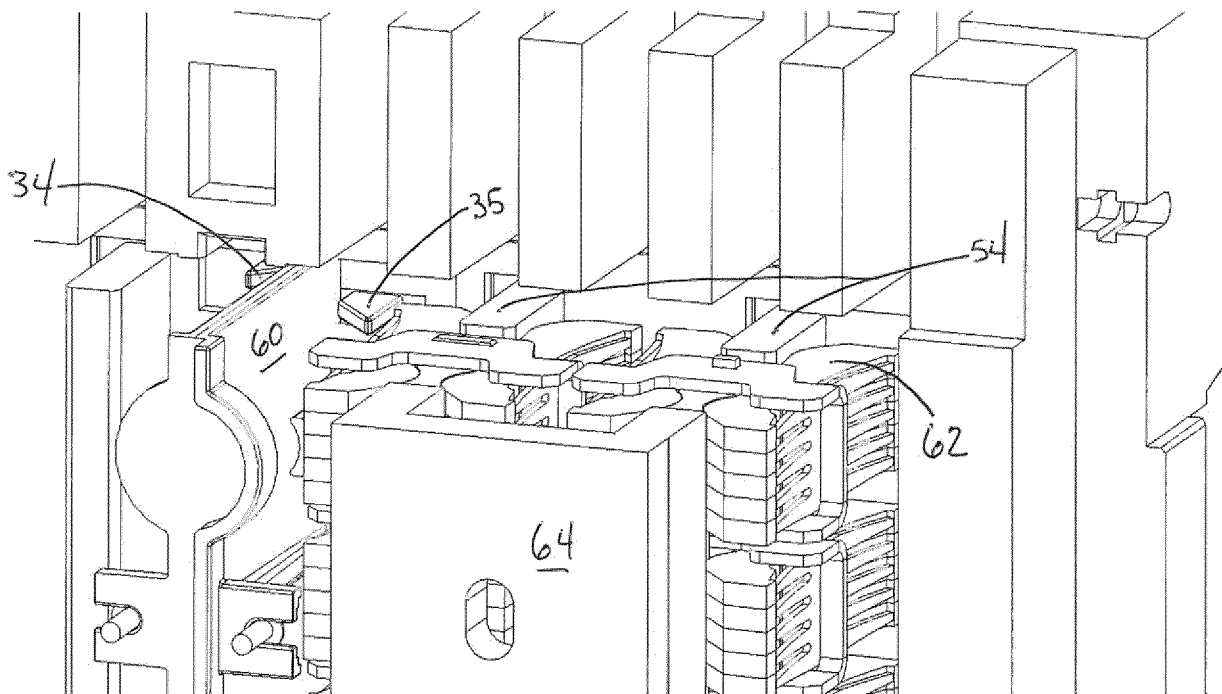


Fig. 6

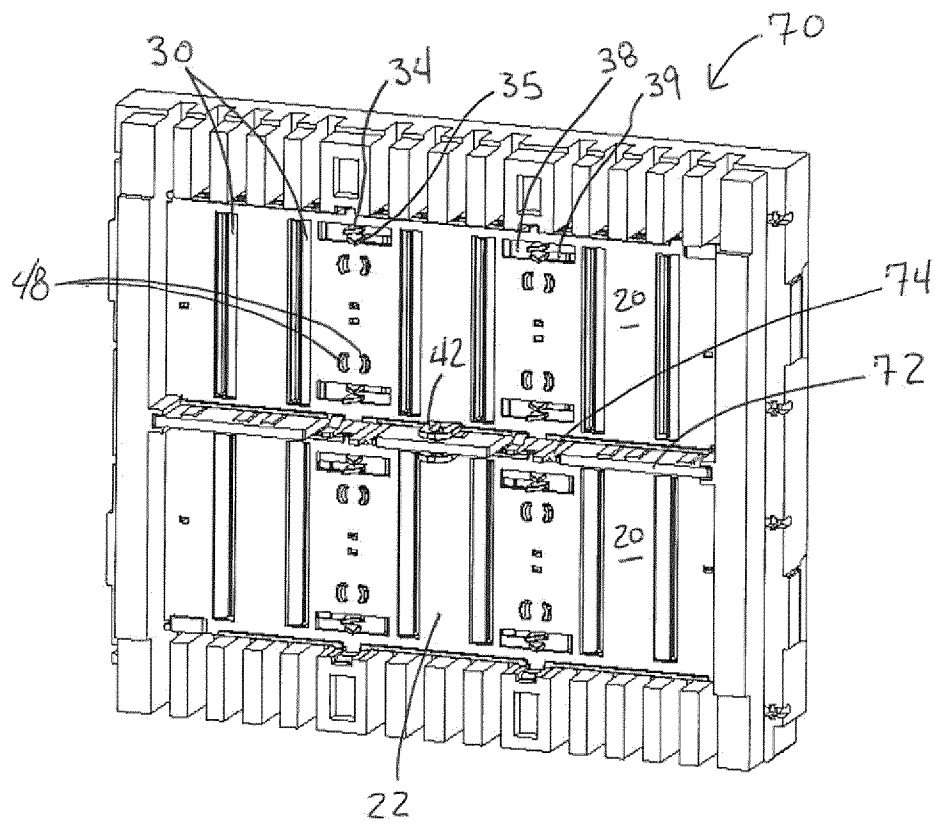
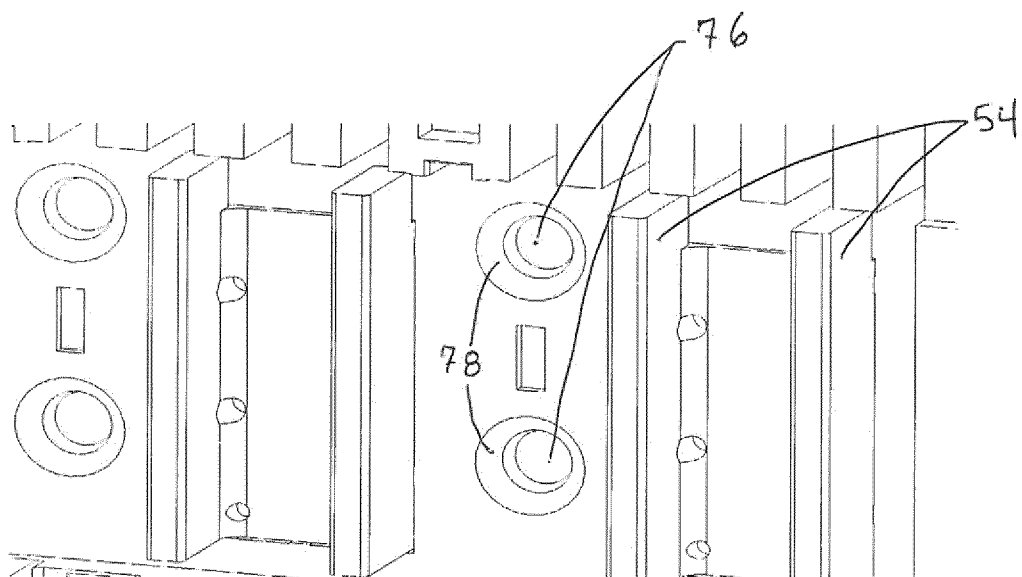
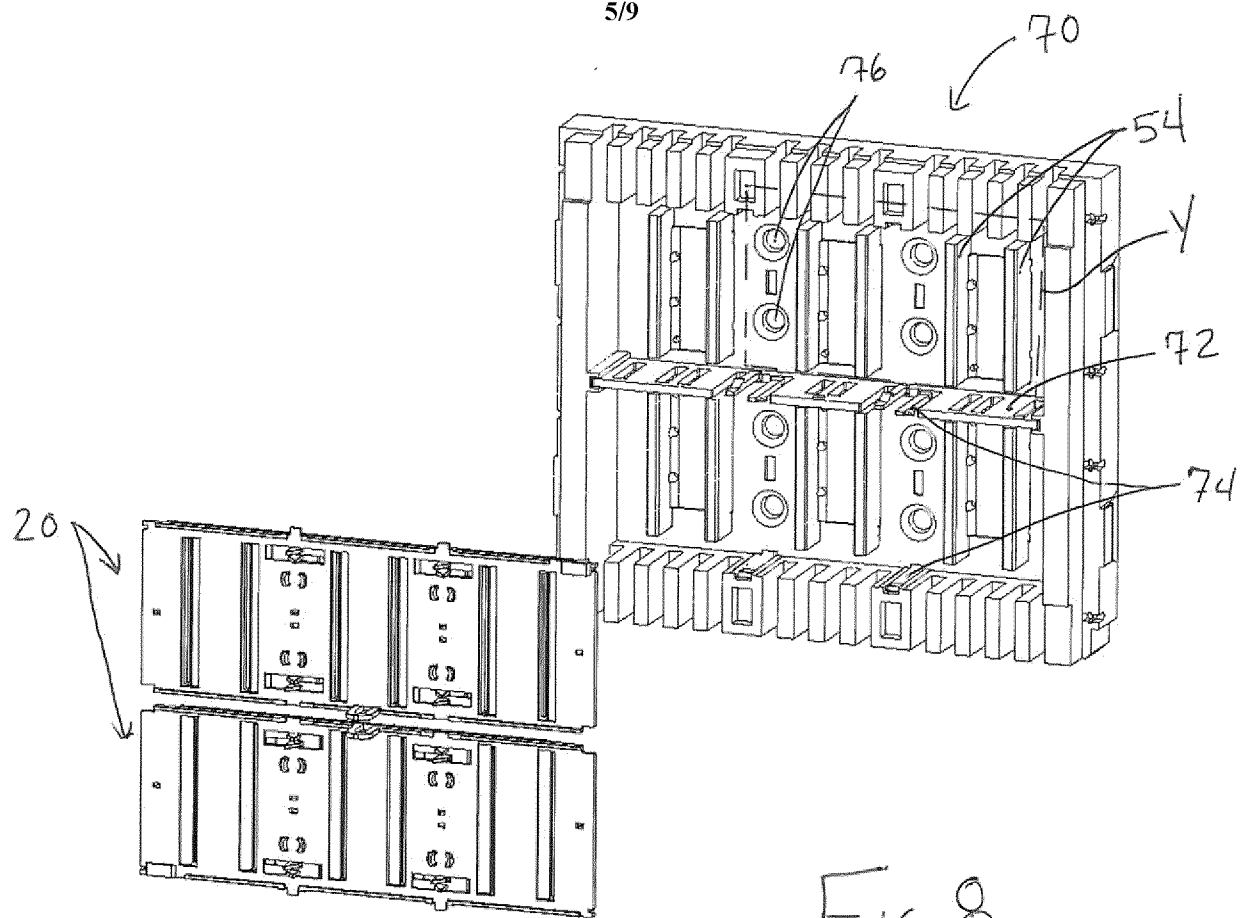


Fig. 7



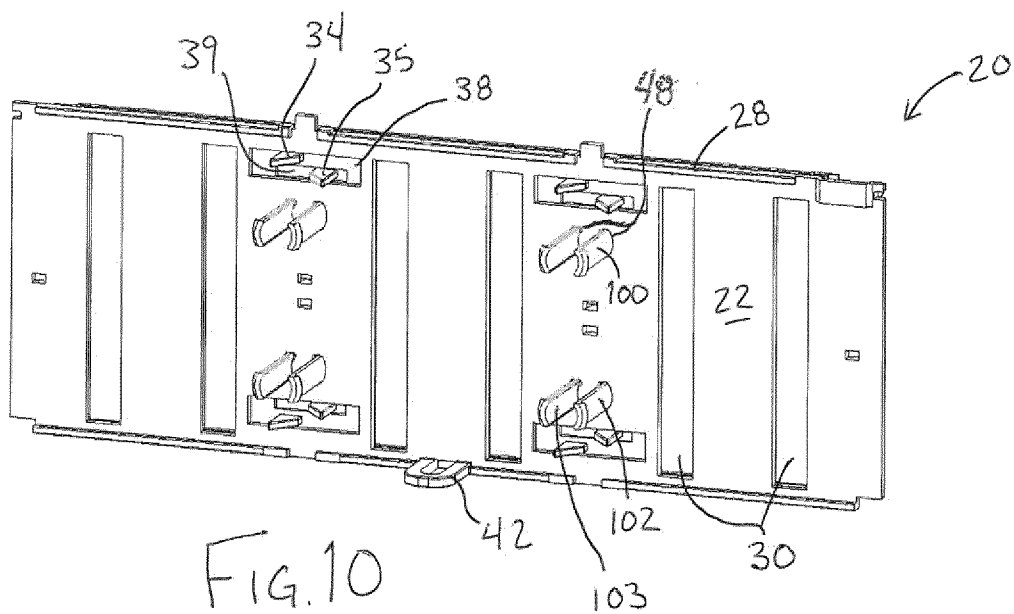


FIG. 10

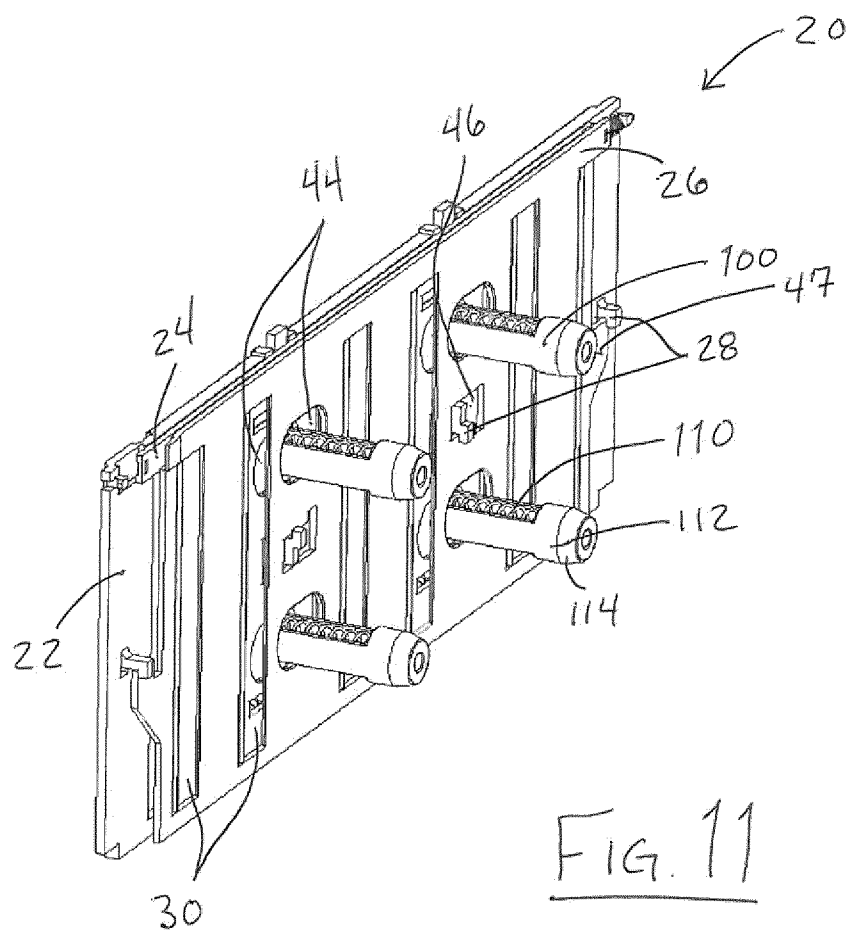


FIG. 11

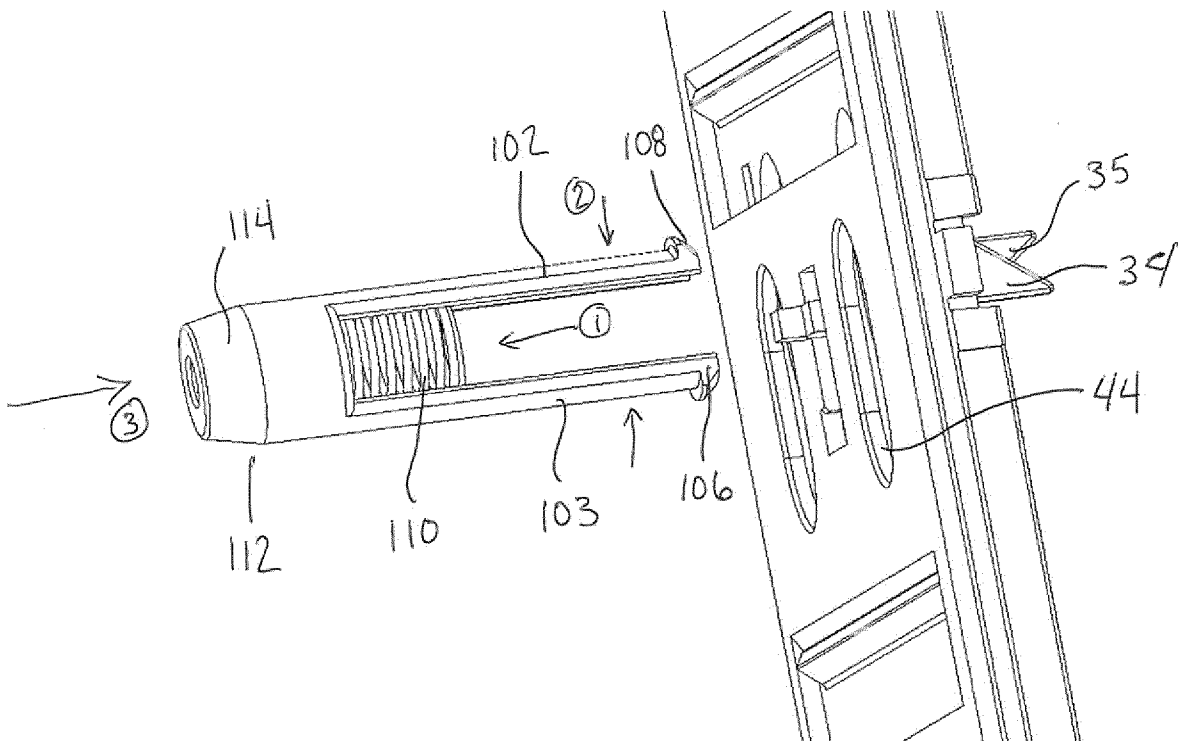
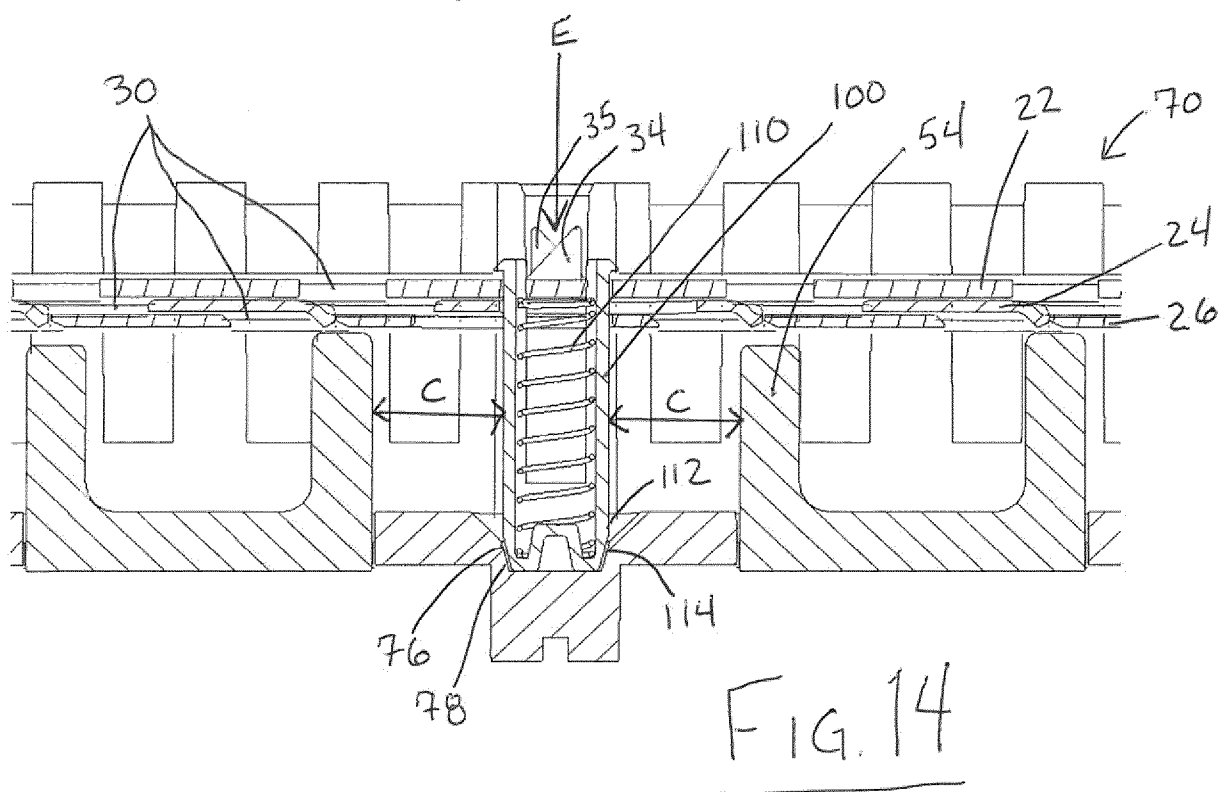
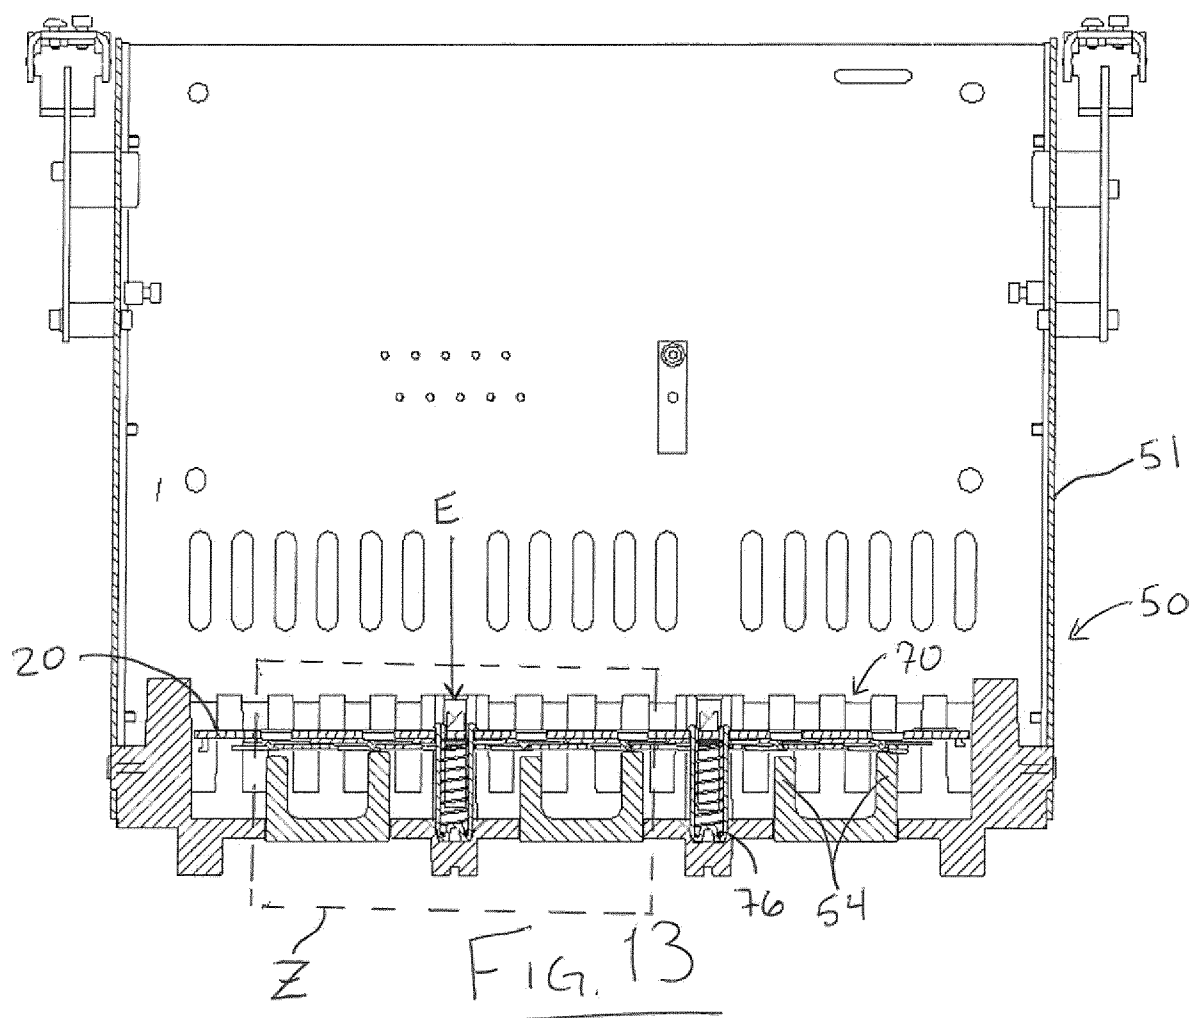


FIG. 12



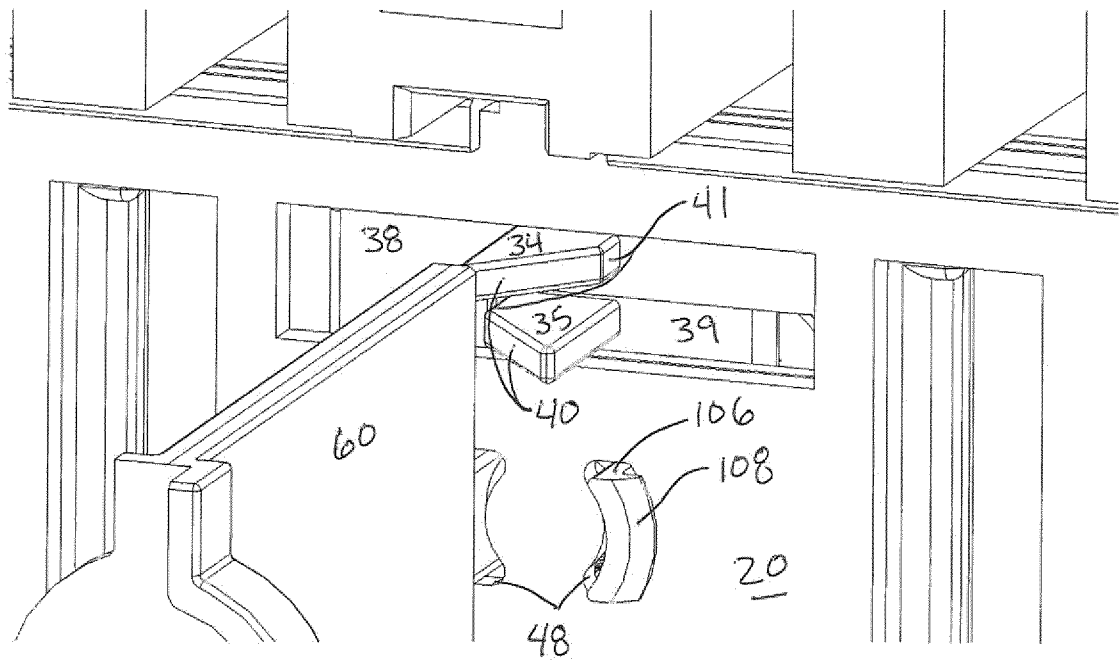


FIG. 15

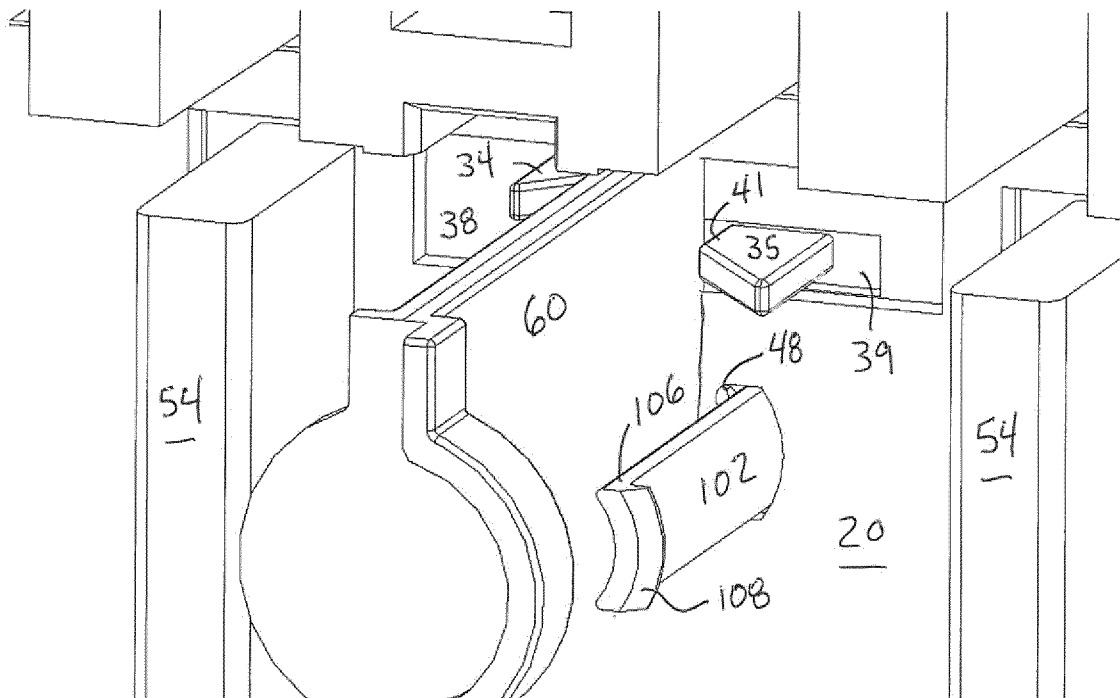


FIG. 16

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/053823

A. CLASSIFICATION OF SUBJECT MATTER
INV. H02B11/24
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 53 120180 A (TERASAKI DENKI SANGYO KK) 20 October 1978 (1978-10-20) figures 1-4	1,16,17
A	JP 62 051903 U (UNKNOWN) 31 March 1987 (1987-03-31) figures 1, 2, 5	1-4
A	US 2009/000926 A1 (BUXTON CLIFFORD A [US] ET AL) 1 January 2009 (2009-01-01) cited in the application paragraph [0037]; figures 2, 3, 4	1,16
A	US 5 486 978 A (FISHOVITZ ANTHONY J [US]) 23 January 1996 (1996-01-23) figures 3, 4, 7	1,16



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 August 2012

Date of mailing of the international search report

10/08/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Starck, Thierry

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/053823

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 53120180	A	20-10-1978	JP 1231615 C 26-09-1984
			JP 53120180 A 20-10-1978
			JP 59006563 B 13-02-1984

JP 62051903	U	31-03-1987	NONE

US 20090000926	A1	01-01-2009	DE 10342596 B3 12-05-2005
			US 20090000926 A1 01-01-2009
			WO 2005027288 A1 24-03-2005

US 5486978	A	23-01-1996	AU 688125 B2 05-03-1998
			AU 3447695 A 09-05-1996
			BR 9504912 A 02-09-1997
			CA 2162074 A1 05-05-1996
			GB 2294812 A 08-05-1996
			US 5486978 A 23-01-1996
