




(86) Date de dépôt PCT/PCT Filing Date: 1997/03/17
 (87) Date publication PCT/PCT Publication Date: 1997/09/25
 (45) Date de délivrance/Issue Date: 2007/05/29
 (85) Entrée phase nationale/National Entry: 1998/09/15
 (86) N° demande PCT/PCT Application No.: DK 1997/000117
 (87) N° publication PCT/PCT Publication No.: 1997/034513
 (30) Priorité/Priority: 1996/03/15 (DK300/96)

(51) Cl.Int./Int.Cl. *B66F 3/28* (2006.01),
A47B 51/00 (2006.01), *A47B 9/02* (2006.01),
A47C 19/04 (2006.01), *A47C 3/30* (2006.01),
B25H 1/16 (2006.01), *B66F 3/25* (2006.01)
 (72) Inventeur/Inventor:
 BROCHMANN, OLE FLEMMING, DK
 (73) Propriétaire/Owner:
 BROCHMANN, OLE FLEMMING, DK
 (74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : SYSTEME HYDRAULIQUE DE LEVAGE ET D'ABAISSEMENT POUR UNE TABLE DE TRAVAIL, UN LIT OU UN MEUBLE DE REPOS OU UN AUTRE OBJET LOURD
 (54) Title: HYDRAULIC LIFTING-LOWERING-SYSTEM FOR A WORKING TABLE, A COUCH OR LYING FURNITURE OR ANOTHER HEAVY OBJECT

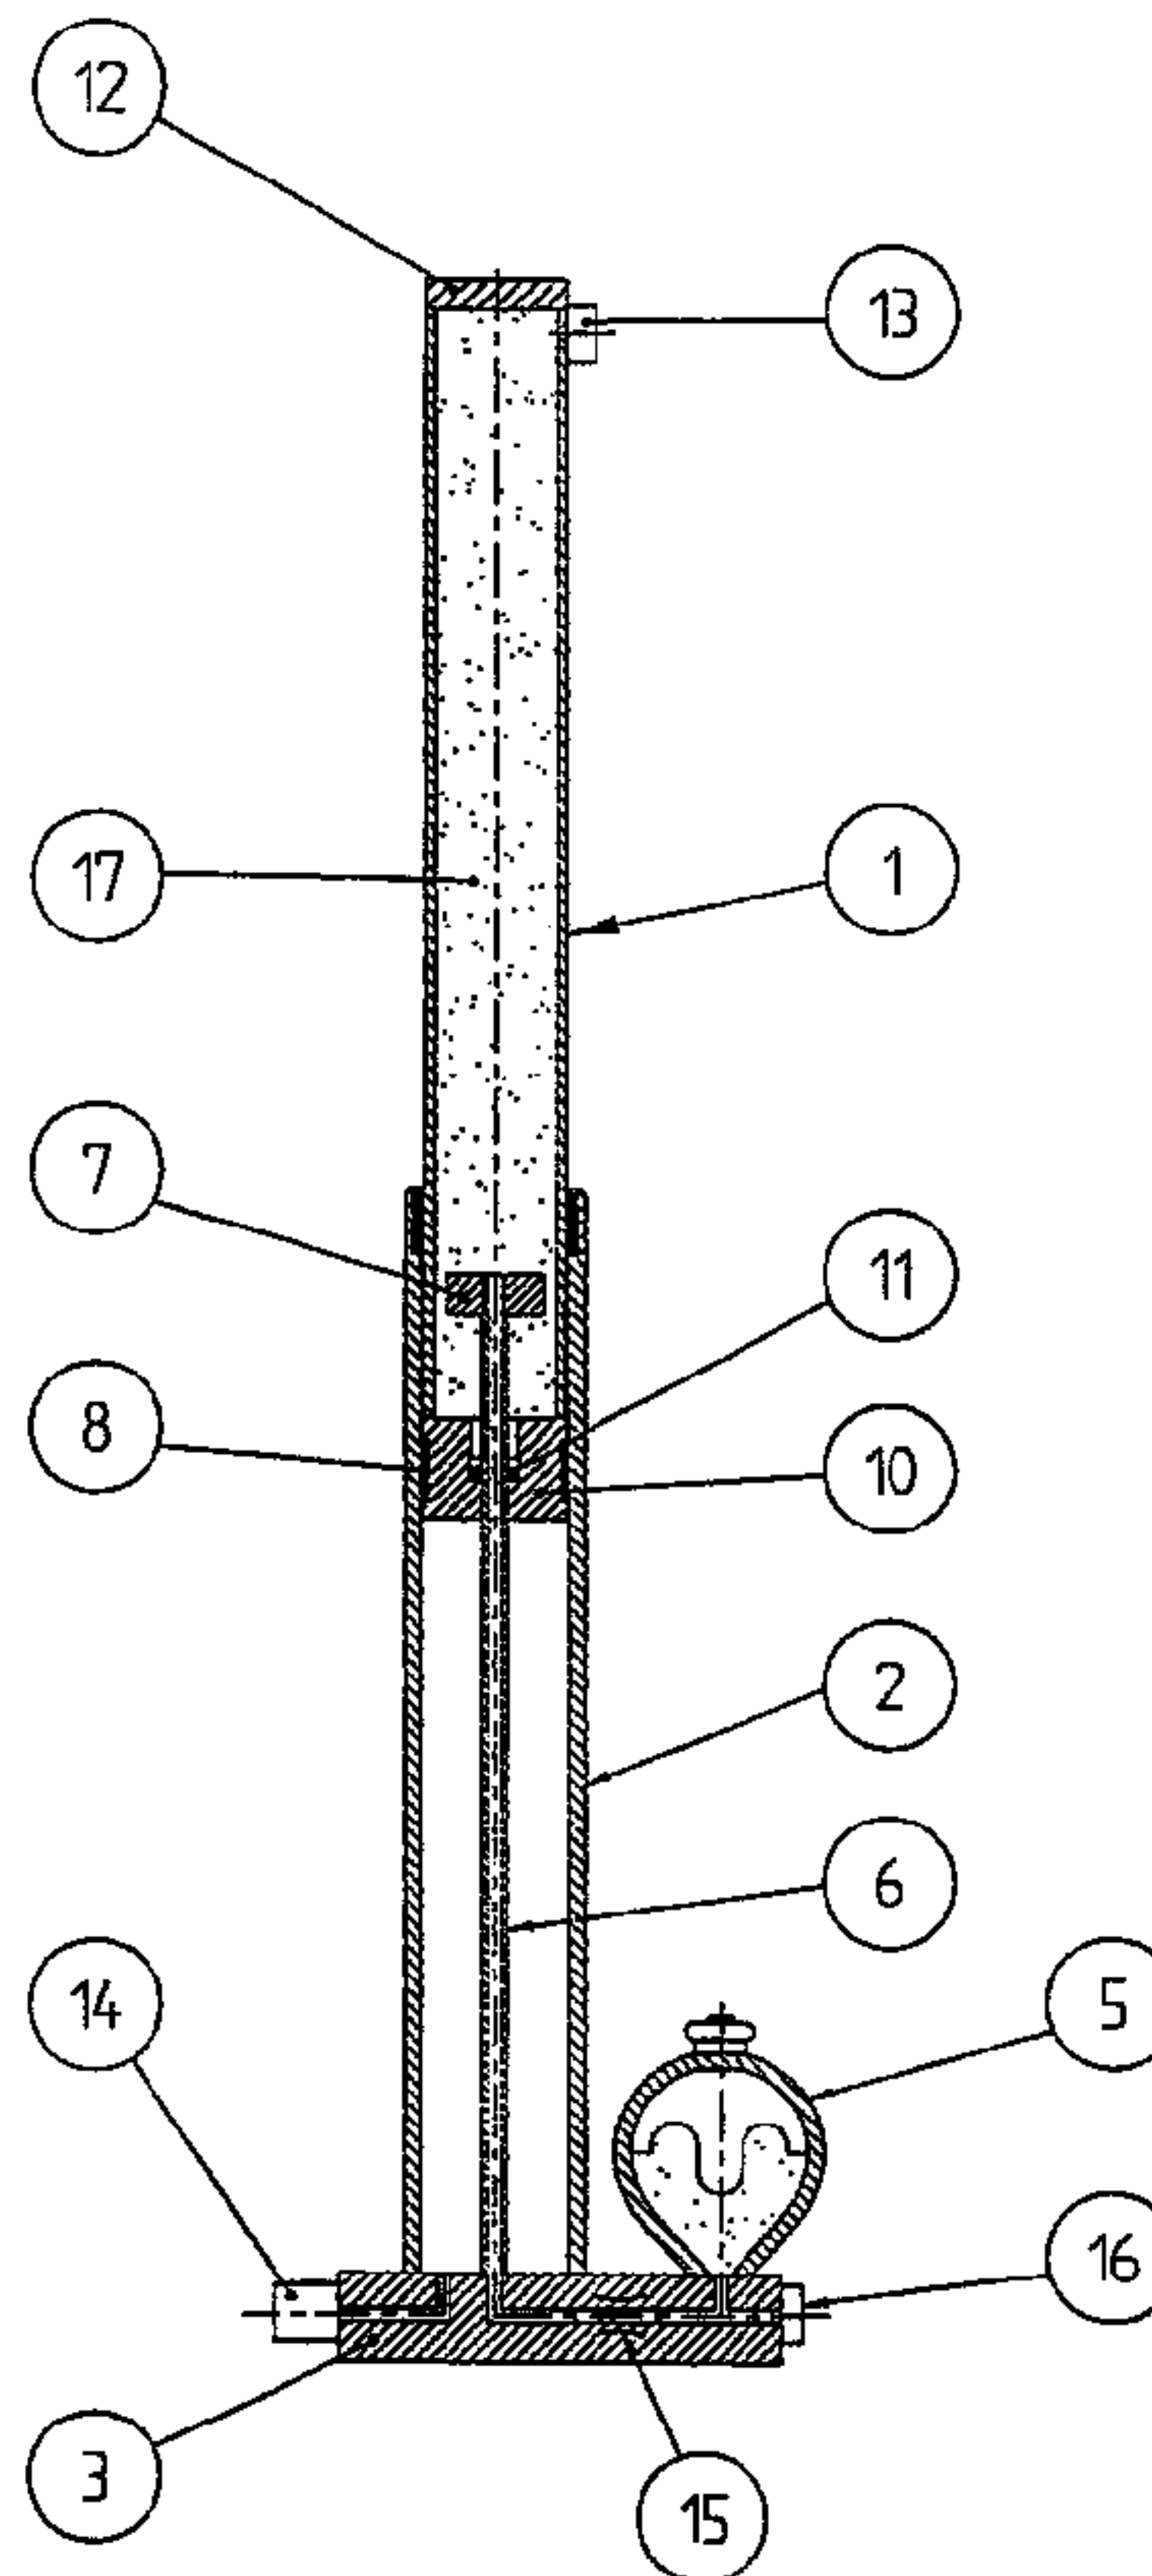

(57) Abrégé/Abstract:

In a hydraulic lifting-lowering-system for a working table, a couch or lying furniture or another heavy object, the height level or position it is frequently desired to adjust or change, said system comprising a predetermined amount of hydraulic fluid, a hydraulic

(57) Abrégé(suite)/Abstract(continued):

fluid accumulator (5), the fluid pressure of which on the hydraulic fluid side is adjustable, a single acting hydraulic cylinder (1, 6, 7, 10, 11, 12, 17) with two end caps (10, 12), a piston pressure chamber (17) and a piston rod (6) which via a piston rod sealing ring (11) extends sealingly out through the one end cap (10) of the cylinder, where the piston pressure chamber (17) is pressure fluid connected to the hydraulic fluid side of the accumulator (5), said system including the combination that the hydraulic cylinder (1, 6, 7, 10, 11, 12, 17) is of the plunger piston type, and that the cylindric tube (1) of the hydraulic cylinder is slideably and telescopically mounted in a cylindrical guiding tube (2), which surrounds the piston rod in its entire length and is rigidly secured to the one end of the piston rod via a cross plate (3A) or similar construction part. Thus, a simple and stable and reliable system is achieved without the need for crank handles, and by which new system the force applied from the plunger piston rod will be essentially constant in all positions of the piston rod at a given load, seeing that the operational manual force necessary for height adjustment of the heavy object becomes low.

HYDRAULIC LIFTING-LOWERING-SYSTEM FOR A WORKING TABLE, A
COUCH OR LYING FURNITURE OR ANOTHER HEAVY OBJECT.

The invention relates to a hydraulic lifting-
lowering-system for a working table, a couch or lying
5 furniture or another heavy object, the height level of which
it is frequently desired to adjust or change, and said system
comprising a predetermined amount of hydraulic fluid, a
hydraulic fluid accumulator, the fluid pressure of which on
the hydraulic fluid side is adjustable, a single acting
10 hydraulic cylinder with two end caps, a piston pressure
chamber and a piston rod which via a piston rod sealing ring
extends sealingly out through the one end cap of the cylinder.
der.

Within the fields of chiropractics and physiothera-
15 py it has lately been recommended to use such systems for
avoiding overloading damages in the neck, the back and the
shoulders, partly by avoiding heavy liftings and partly by
changing the working position frequently and having the
possibility to change freely between a sitting and standing
20 position.

From DE-A- 30 21 559 is known such system in
connection with a height adjustable hospital bed for reducing
heavy liftings for the nursing personnel. This known system
has a.o. the disadvantage that hand or foot activated pumping
25 work should be done by all lifting operations for the bed.

From US-A- 4 037 811 is known a support for an
instrument, whereby an instrument is balanced by a single
acting hydraulic cylinder being connected to a hydraulic
accumulator. One of the disadvantages by this arrangement is
30 that the cylinder should have an expensive telescopic column
11, 15 of triangular cross section for guiding its rectil-
inear movement, whereby one telescopic part 11 is provided
with a spring loaded pressure shoe 50 pressing the part 15
against the wall sides 52 of the part 11, cf. column 2, line
35 58 to column 3, line 4, said guiding system provides a
mechanical friction which can be overcome by the gear
transmission 25-28 by rotation of a crank handle.

**CONFIRMATION
COPY**

Said disadvantages can be avoided by a hydraulic system according to the present invention, which is special by the combination that the hydraulic cylinder is of the plunger piston type and that the cylinder wall of the hydraulic cylinder is slidably and telescopically mounted in a cylindric guiding tube surrounding the piston rod in its entire length and being rigidly secured to the one end of the piston rod via a cross plate or similar construction part. Thus, beyond that the force of pressure applied at the end of the hydraulic cylinder at a given accumulator size is only changing a little over a relatively long stroke length, a very simple and stable and reliable system without handle is achieved. It has turned out that e.g. a working table being supported by such system, the operating pressure of which is pre-adjusted in accordance with the weight and load of the working table of e.g. 25 kg, and the stroke length of which is predetermined according to the desired height regulation range of the working table of e.g. 400 mm, only required a force corresponding to the force of the weight of about 200 g (1,96 N) vertically towards the table plate to change the height level of the table arbitrarily within the mentioned 400 mm.

This corresponds to a very little pressure change in the piston pressure chamber, namely 0,8%, such that the accumulator can be so selected that its operative pressure is altered 0,8-10% at the most, or even better: 1,0-2,5% at the most, during the relative stroke of the plunger piston rod from one to its other operative position of its predetermined stroke length, which stroke is relative to the hydraulic cylinder.

Preferably, the end caps of the hydraulic cylinder are connected via an inner telescopic tube carried telescopically in the cylindric guiding tube serving as an outer telescopic tube, which together with the plunger piston rod has been secured coaxially in a mounting block, and the outer telescopic tube via a slide bushing externally upon the inner telescopic tube at that end cap, through which the piston rod

29-05-1998

3

extends, together with a slide bushing in the outer end of the outer telescopic tube is adapted to guide the inner telescopic tube when it is displaced in the outer telescopic tube. An advantage connected thereto is that even though the operating pressure is rather high, typically 40-150 bar, a rugged and stable guiding can be achieved at low friction of the telescopic construction.

The plunger piston rod advantageously may comprise a longitudinal bore forming a part of the pressure fluid connection between the piston pressure chamber and the hydraulic fluid side of the accumulator.

The hydraulic fluid accumulator may e.g. be of the kind with a pressure fluid tight membrane separating the hydraulic fluid from a gaseous fluid serving as pneumatic spring. This permits the system to obtain very low friction losses in the accumulator and thus permits low manoeuvring forces for a user who desires to change said height adjustment. A possible adjustability of the gas pressure permits a change of the force of the supporting ability of the hydraulic cylinder.

The accumulator may also be of the spring type whereby a compression spring exerts a force on a piston in an accumulator cylinder. Thus is achieved an economic embodiment of the accumulator, and if the spring pressure is adjustable, a simple adjustment of the hydraulic pressure in the activator circuit is obtained by just tightening or slackening the compression spring.

An embodiment, by which the hydraulic fluid accumulator is of the spring type, and a compression spring exerts a force against a piston in an accumulator cylinder, is characterized in that the wall of the accumulator cylinder is formed by that part of the plunger cylinder wall which is situated between a stop ring and one end cap, whereby the piston is arranged also in the hydraulic cylinder and is fluid proof sealed and displaceable on the plunger piston rod between said stop ring on said piston rod and said end cap into which the piston rod is displaceably arranged.

AMENDED SHEET

Here the spring is thus fully built-in in the hydraulic cylinder, whereby a small outer diameter for the lifting-lowering-unit can be achieved at the expense of the fact that the spring should be dimensioned with the free length and spring characteristic demanded for the relevant and thus economical lifting-lowering-unit.

The hydraulic system according to the invention will now be described in more detail in connection with some embodiments and with reference to the drawing in which:

Fig. 1 shows a hydraulic system where the pressure for the lifting force of the plunger piston is maintained by a gas pressure membrane accumulator, and where the plunger piston rod is hollow,

Fig. 2 the system shown in Fig. 1 with a compression spring accumulator instead of the membrane accumulator,

Fig. 3 an embodiment with a compression spring accumulator integrated in the plunger cylinder, and wherein the plunger piston rod is solid,

Fig. 4 an embodiment shown in one end position with a compression spring accumulator, the compression spring of which is arranged externally for its adjustment from outside with a handle, and where the plunger piston rod is hollow,

Fig. 5 the embodiment of Fig. 4 in another end position and likewise in a section along II-II in Fig. 6, and

Fig. 6 a section along I-I in Fig. 5.

Fig. 1 shows an inner telescopic tube 1, formed as a cylinder wall 1 in a hydraulic plunger cylinder 1, 6, 7, 10, 11, 12 and 17, said inner telescopic tube 1 being arranged in an outer telescopic tube 2 which in turn is secured in a mounting block 3. In said mounting block 3 is also arranged a pressure accumulator 5 of the membrane type, which in the embodiment shown is a gas pressure accumulator which against its membrane has a predetermined but possibly adjustable nitrogen pressure corresponding to the highest working pressure in the piston pressure chamber 17 of the cylinder. The plunger piston rod 6 in the plunger cylinder is in the embodiment shown provided with a stop ring 7 at its

one end and is at its other end fastened coaxially in the mounting block 3. On the outer end of the outer telescopic tube 2 and on the inner end of the inner telescopic tube 1 is arranged slide bushings 8 so that the outer tube 2 may guide the inner tube 1.

The one end piece or cap 10 of the cylinder 1 with piston rod washer or sealing 11 and other end piece or cap 12 with bleeder valve 13 is connected via the inner telescopic tube 1.

On the mounting block 3 is arranged an air filter 14 for permitting the air from the inner of the tube 2 to escape or to be sucked in during the stroke of the plunger piston. In the mounting block is furthermore arranged a filling means 16 for hydraulic fluid under a predetermined pressure and possibly a quantity regulation valve 15 for adjustment of the flow rate between the accumulator 5 and the piston pressure chamber 17.

The plunger cylinder is formed by the inner tube 1, the plunger piston rod 6, the stop ring 7, the end caps 10 and 12 and the piston pressure chamber 17. The piston pressure chamber 17 is enclosed by the inner tube 1 and of the end pieces 10 and 12 and is connected to the accumulator 5 with respect to the flow by a tube system, here formed by a longitudinal bore 18 in the piston rod 6 and a connection channel in the mounting block.

The stop ring 7 may also be used as guide ring by providing it externally with a slide bushing not shown, which is adapted to slide on the inner wall of the inner tube 1. In this case the stop ring 7 should be provided with axial flow openings or the channel 18 should have discharge openings to both sides of the stop ring 7 so that the pressure fluid is free to fill the chamber 17.

The working table is ready for use when a load, e.g. a working table with tools or other equipment, is supported by the unit shown in Fig. 1 resting on its mounting block 3 and being under a fluid pressure corresponding to the vertical load on the unit, where the pressure in the chamber

17 against the cross sectional area of the plunger piston rod, provides the unit with enough force to support the load.

The operator can begin his work, and if the working height or level of the table should be changed, the table may
5 with a relatively small manual pulling or pushing force be moved upwards or downwards to a new working height without the trouble hitherto being connected to such constructions, which implied pumping operations, start and stop of elec-
10 tromotors or manual rotation of crank handles in order to change the working height of the table.

In Fig. 2 the hydraulic gas pressure accumulator has been replaced by a compression spring influenced hydraulic piston accumulator 5A which easily by means of an
15 adjustment screw 20 may have amended the spring pressure of the compression spring 22A and thus the fluid pressure in the unit.

From Fig. 3 appears another unit with a hydraulic piston accumulator, the piston 10C forming an end cap for the
20 piston pressure chamber 17, said cap being spring loaded by the accumulator spring 22B. The piston 10C is mounted slidably and as well sealed by sealings against the plunger piston rod 6A which is solid, as well as against the inner
25 telescopic tube 1. This spring 22B of the piston accumulator is performed with a fixed free length and a certain spring characteristic which is adapted to the load and the height position range to which the unit of Fig. 3 should be exposed. The economy will be good by high piece numbers, but at the
expense of adjustability of the unit.

In Figs. 4-6 is used an accumulator arranged
30 coaxially to the plunger cylinder in stead of the accumulator shown in Fig. 2. The spring 22C of said accumulator is so arranged outside and around the outer tube 2 that the pressure range can be adjusted by screwing a threaded bushing 23 to tightening or slackening of the spring 22C by means of
35 a control lever 25. Furthermore, Fig. 4 shows a seeger circlip 27 for limitation of the setting range or setting movement, an upper supporting plate 26, a mechanical lock 28,

an air bleeding and hydraulic fluid filling means 9A, three
air bleeding holes 29, a stationary O-ring 30 and a dynamic
sealing 31 in the end cap 10, a sliding sleeve or band 32, a
dynamic sealing 33, a pressure regulating screw 34, an
5 accumulating chamber 35 and a spring travel chamber 36, the
air bleeding hole of which - along with the other air
bleeding holes 29 - may be provided with an air filter.

CLAIMS

1. A hydraulic lifting-lowering-system for a working or seating surface, the height of which surface it is frequently desired to adjust or change, said system comprising a predetermined amount of hydraulic fluid, a hydraulic fluid accumulator, the accumulator fluid pressure of which on the hydraulic fluid side is adjustable, a single acting hydraulic cylinder with two end caps, a piston pressure chamber and a piston rod, which via a piston rod sealing ring extends sealingly out through one end cap of the cylinder, where the piston pressure chamber is pressure fluid connected to the hydraulic fluid side of the accumulator, wherein the hydraulic cylinder is a plunger piston type, and the cylinder wall of the hydraulic cylinder is slidable and telescopically mounted in a cylindrical guiding tube surrounding the piston rod in its entire length and is rigidly secured to one end of the piston rod via a cross plate or similar construction part.

5

10
2. The system according to claim 1, wherein the end caps of the hydraulic cylinder are connected via an inner telescopic tube which is telescopically supported in the cylindrical guiding tube serving as an outer telescopic tube, and wherein one end of the outer telescopic tube, together with the piston rod, is secured coaxially in a mounting block, and the outer telescopic tube via a slide bushing externally on the inner telescopic tube at said end cap, through which the piston rod extends, together with a slide bushing in the other end of the outer telescopic tube is adapted to guide the inner telescopic tube when it is displaced in the outer telescopic tube.

15

20
3. The system according to either one of claims 1 or 2, wherein the piston rod has a longitudinal bore forming a part of the pressure fluid connection between the piston pressure chamber and the hydraulic fluid side of the accumulator.
4. The system according to either one of claims 1 or 2, wherein the hydraulic fluid accumulator is a spring type, and a compression spring exerts a force against a piston in an accumulator cylinder, and wherein a wall of the accumulator cylinder is formed by that part of a plunger cylinder wall which is situated between a stop ring and one end cap, whereby the piston is arranged also in the hydraulic cylinder and is fluid proof sealed and displaceable on the plunger piston rod between said stop ring on said piston rod and said end cap into which the piston rod is displaceably arranged.

25

30

1/4

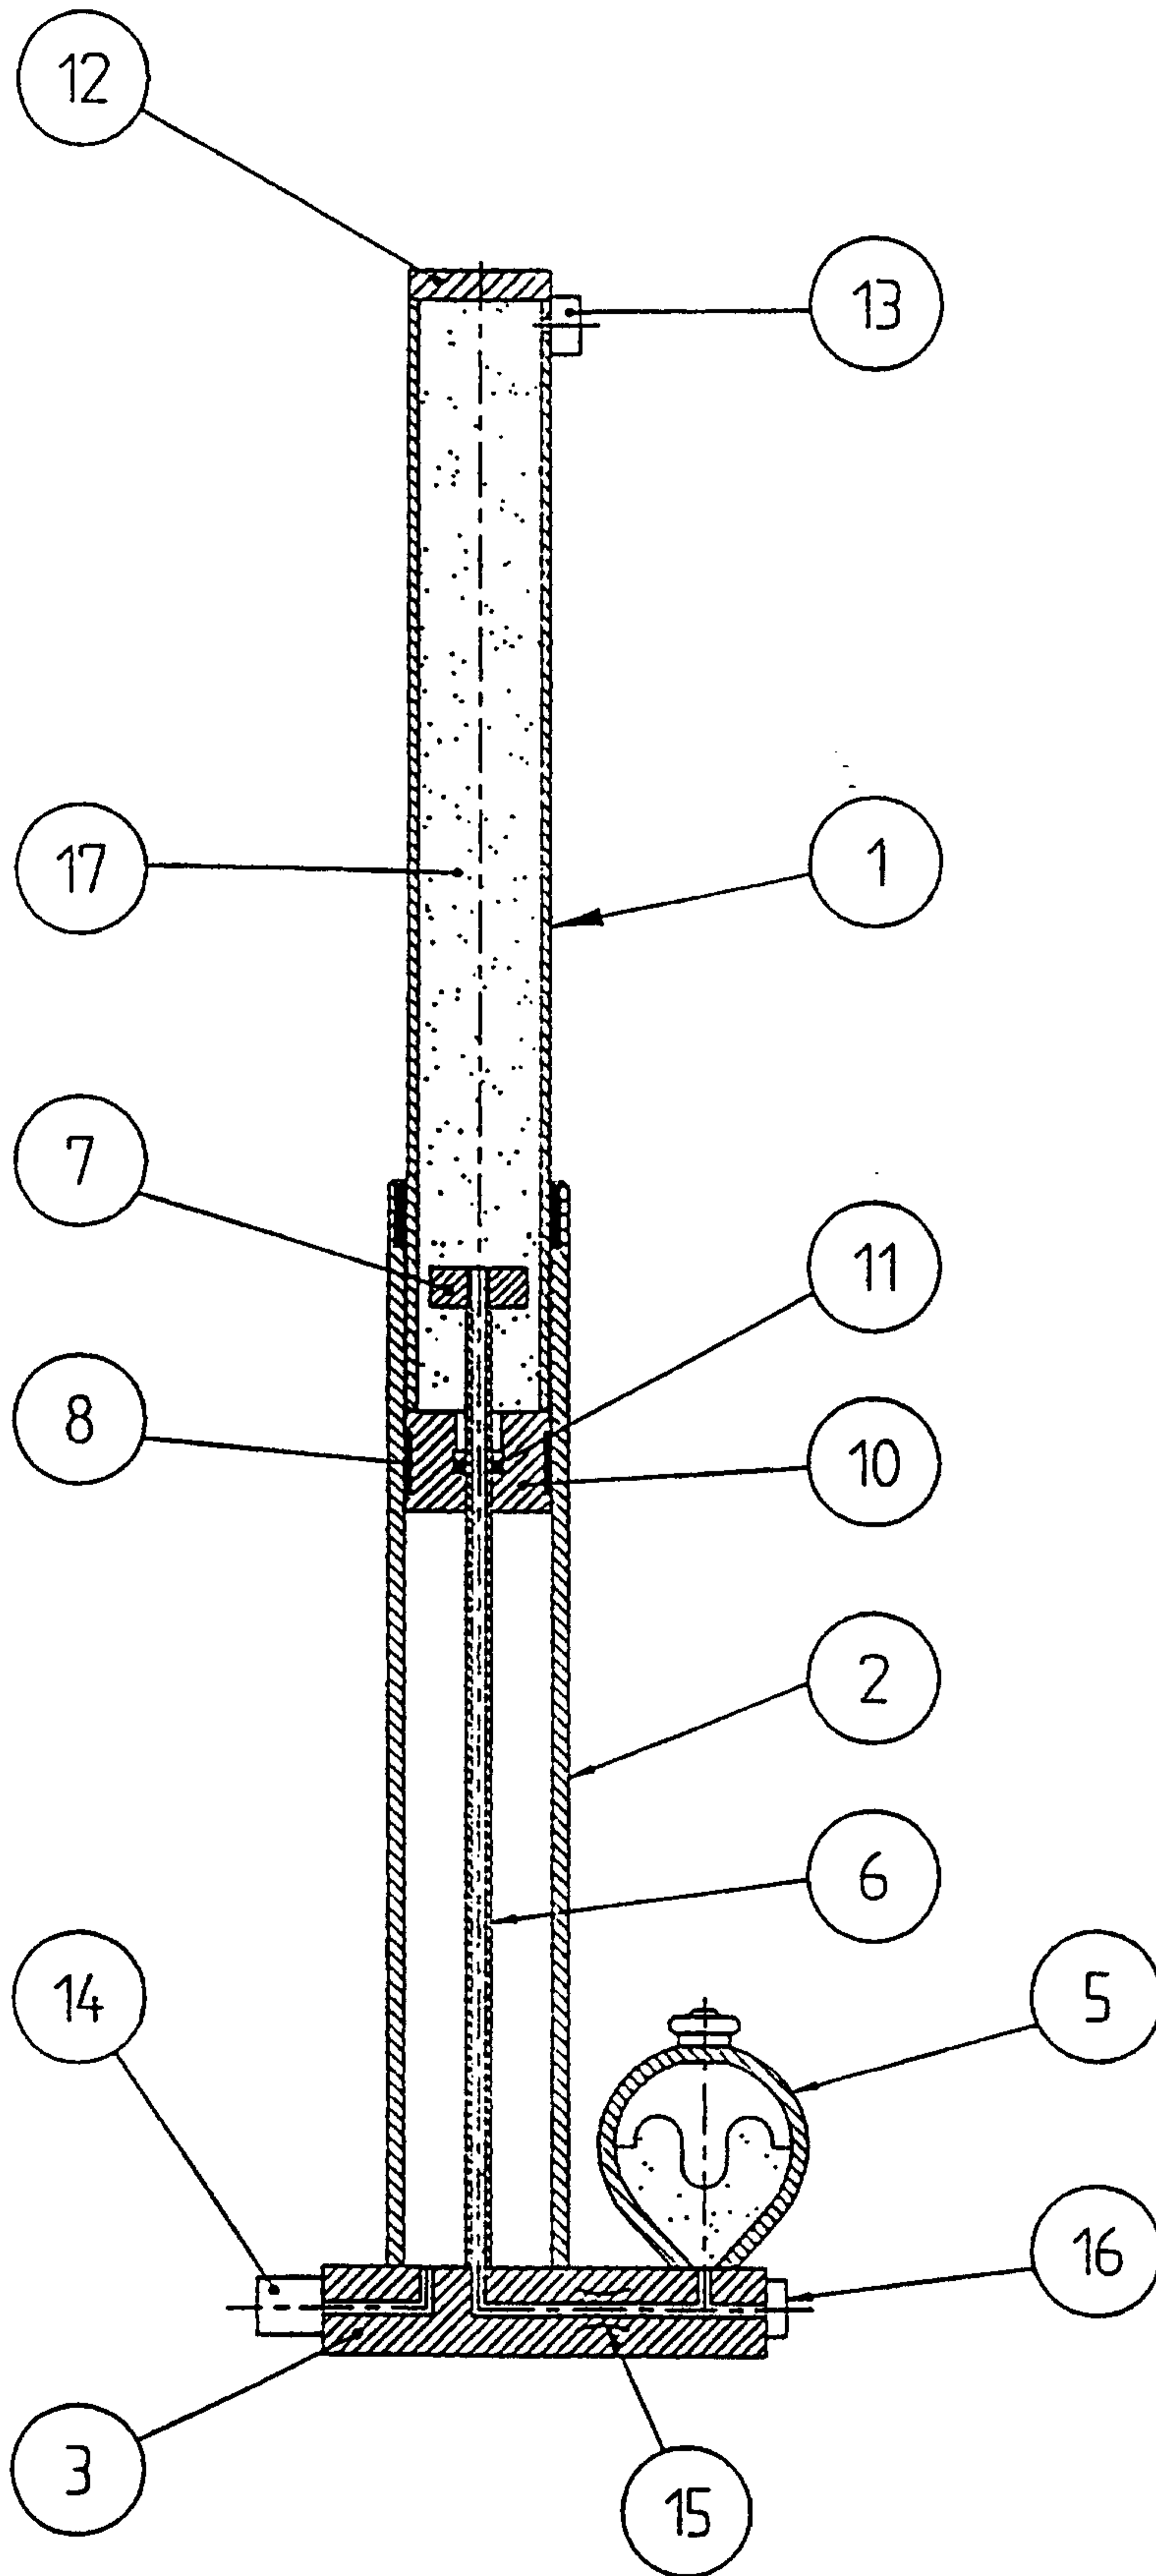


FIG. 1

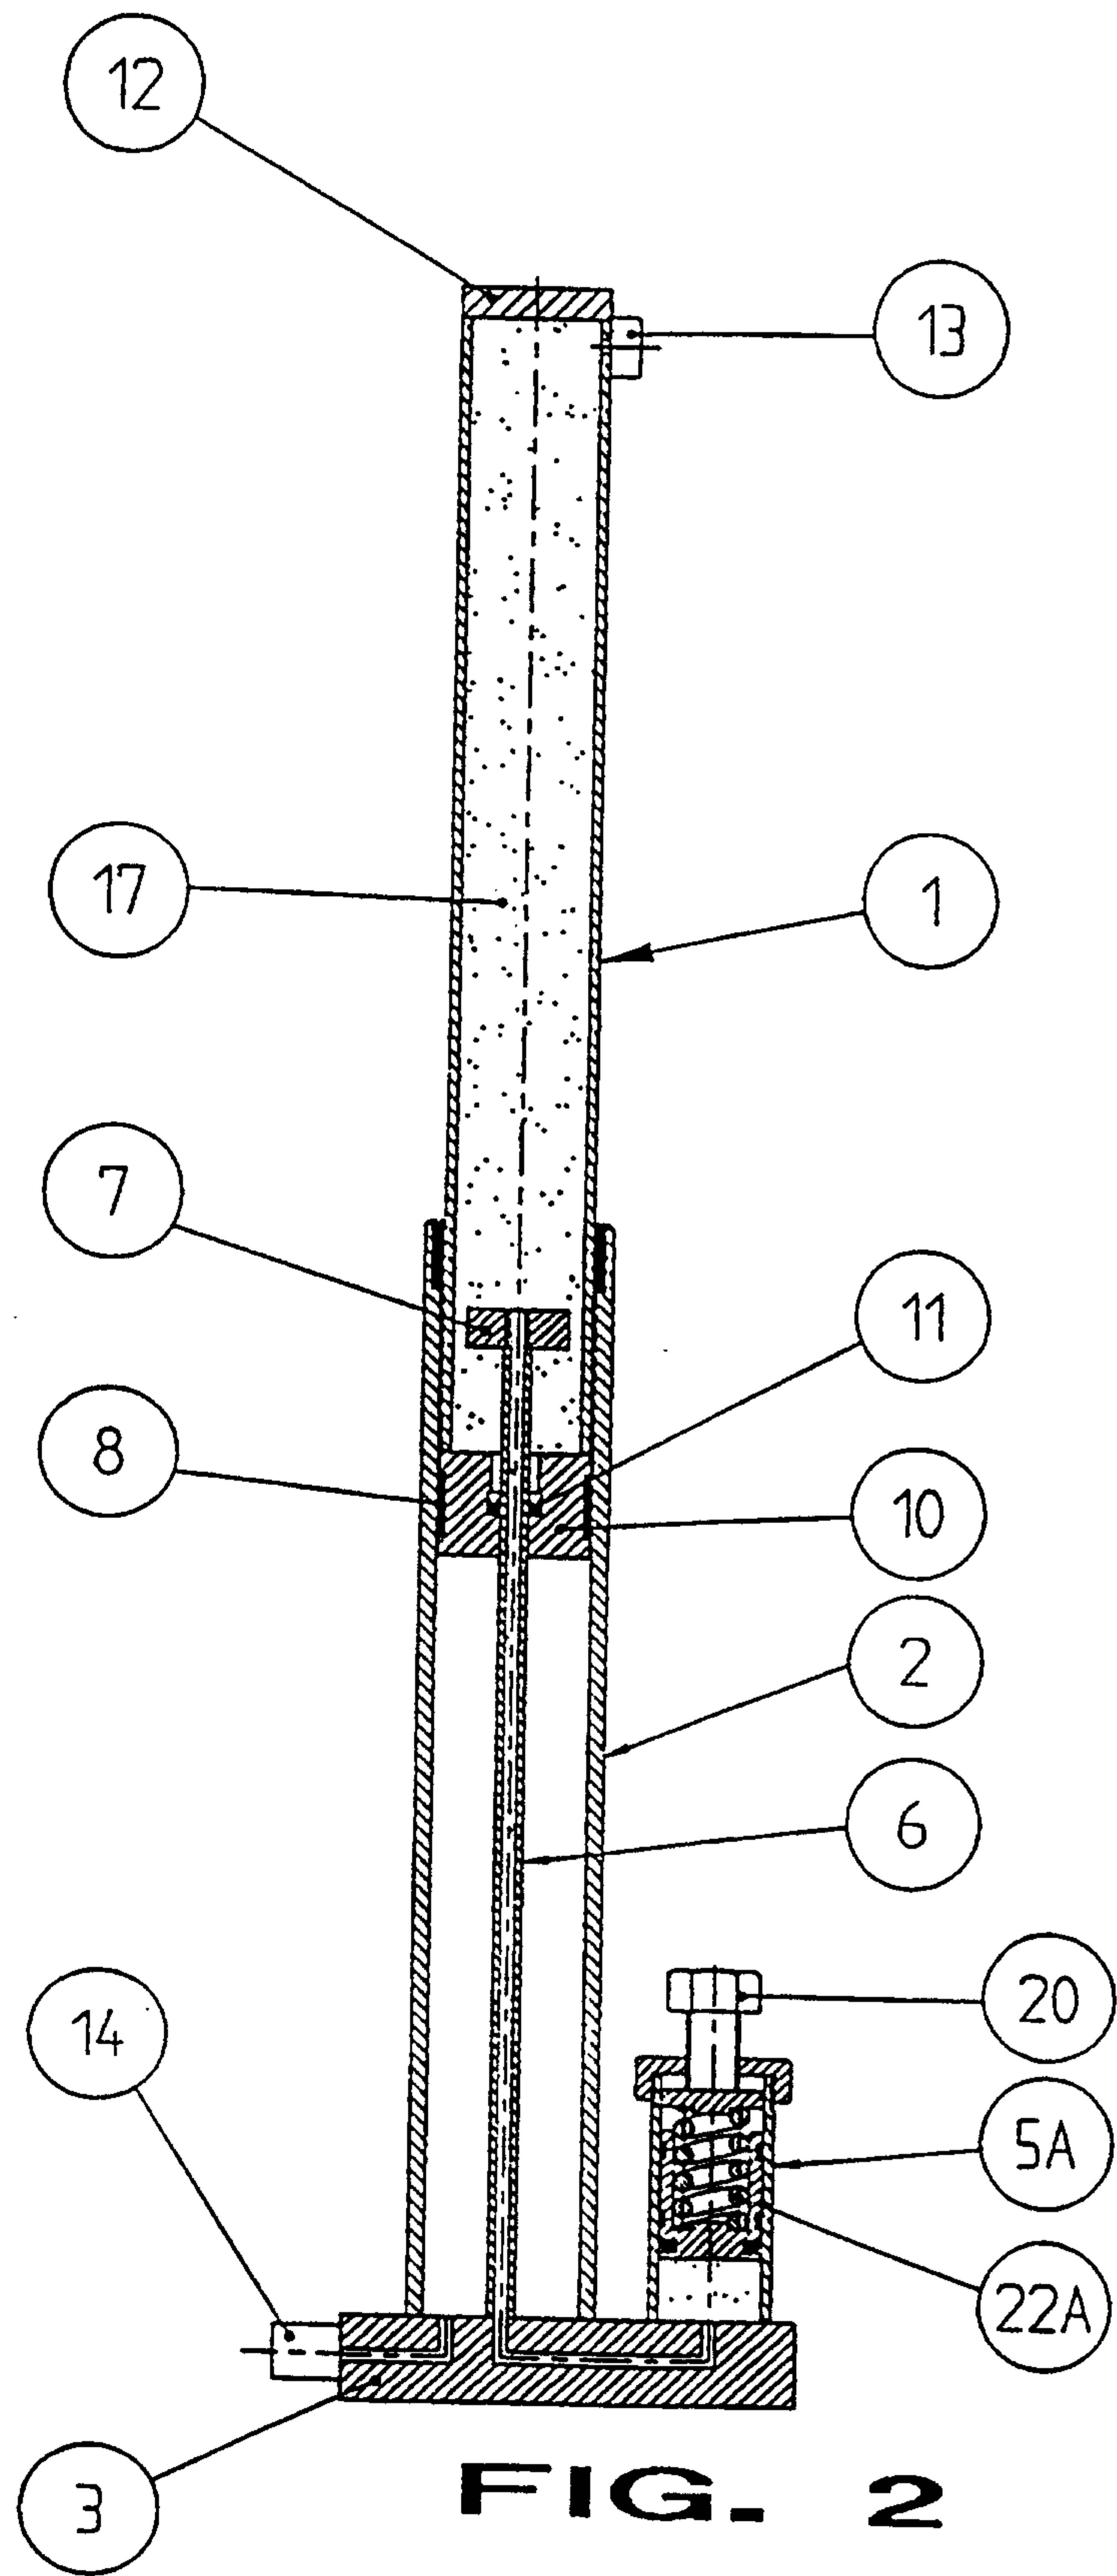


FIG. 2

30-04-1998

3/4

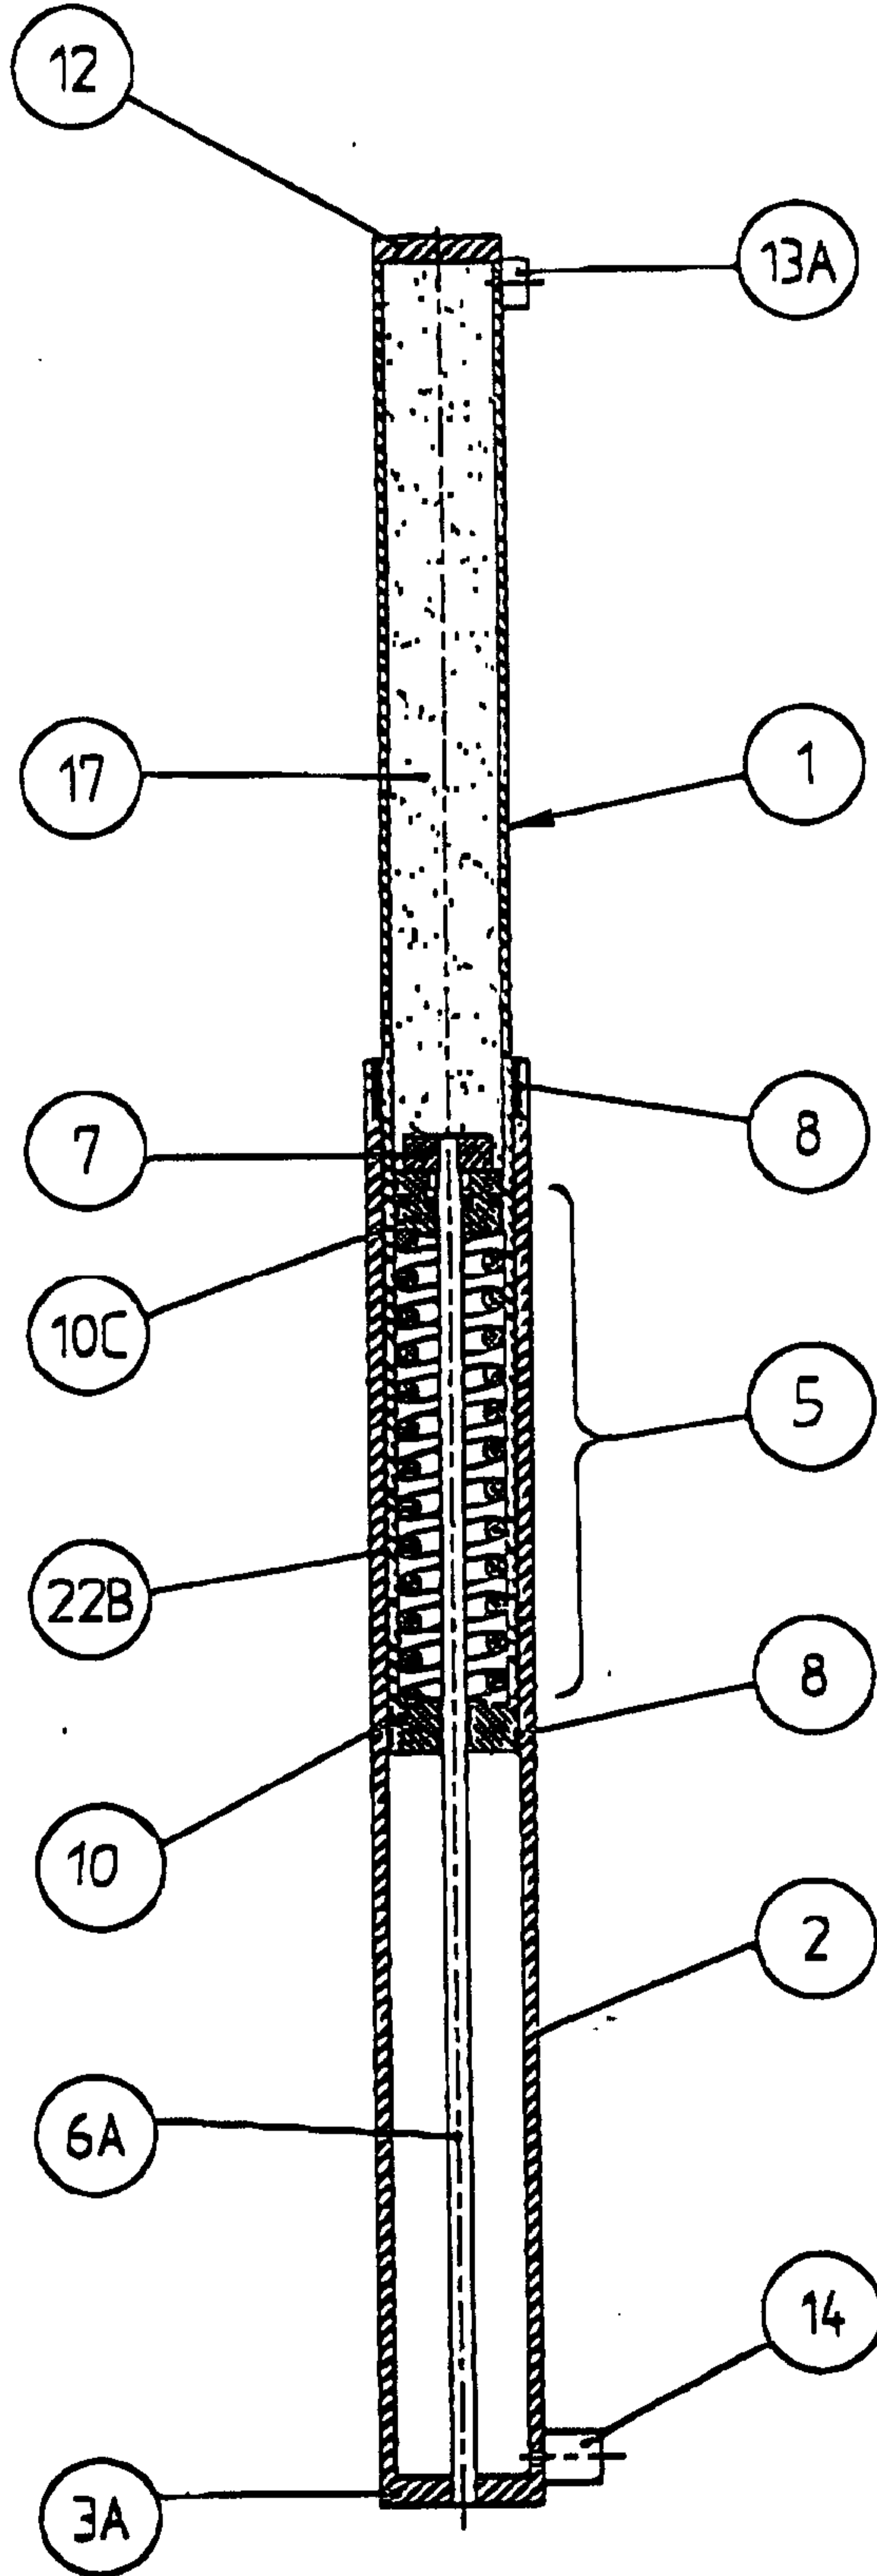


FIG. 3

Patent Office
1/1/1998

PCT/DK 97/00117

30-04-1998

4/4

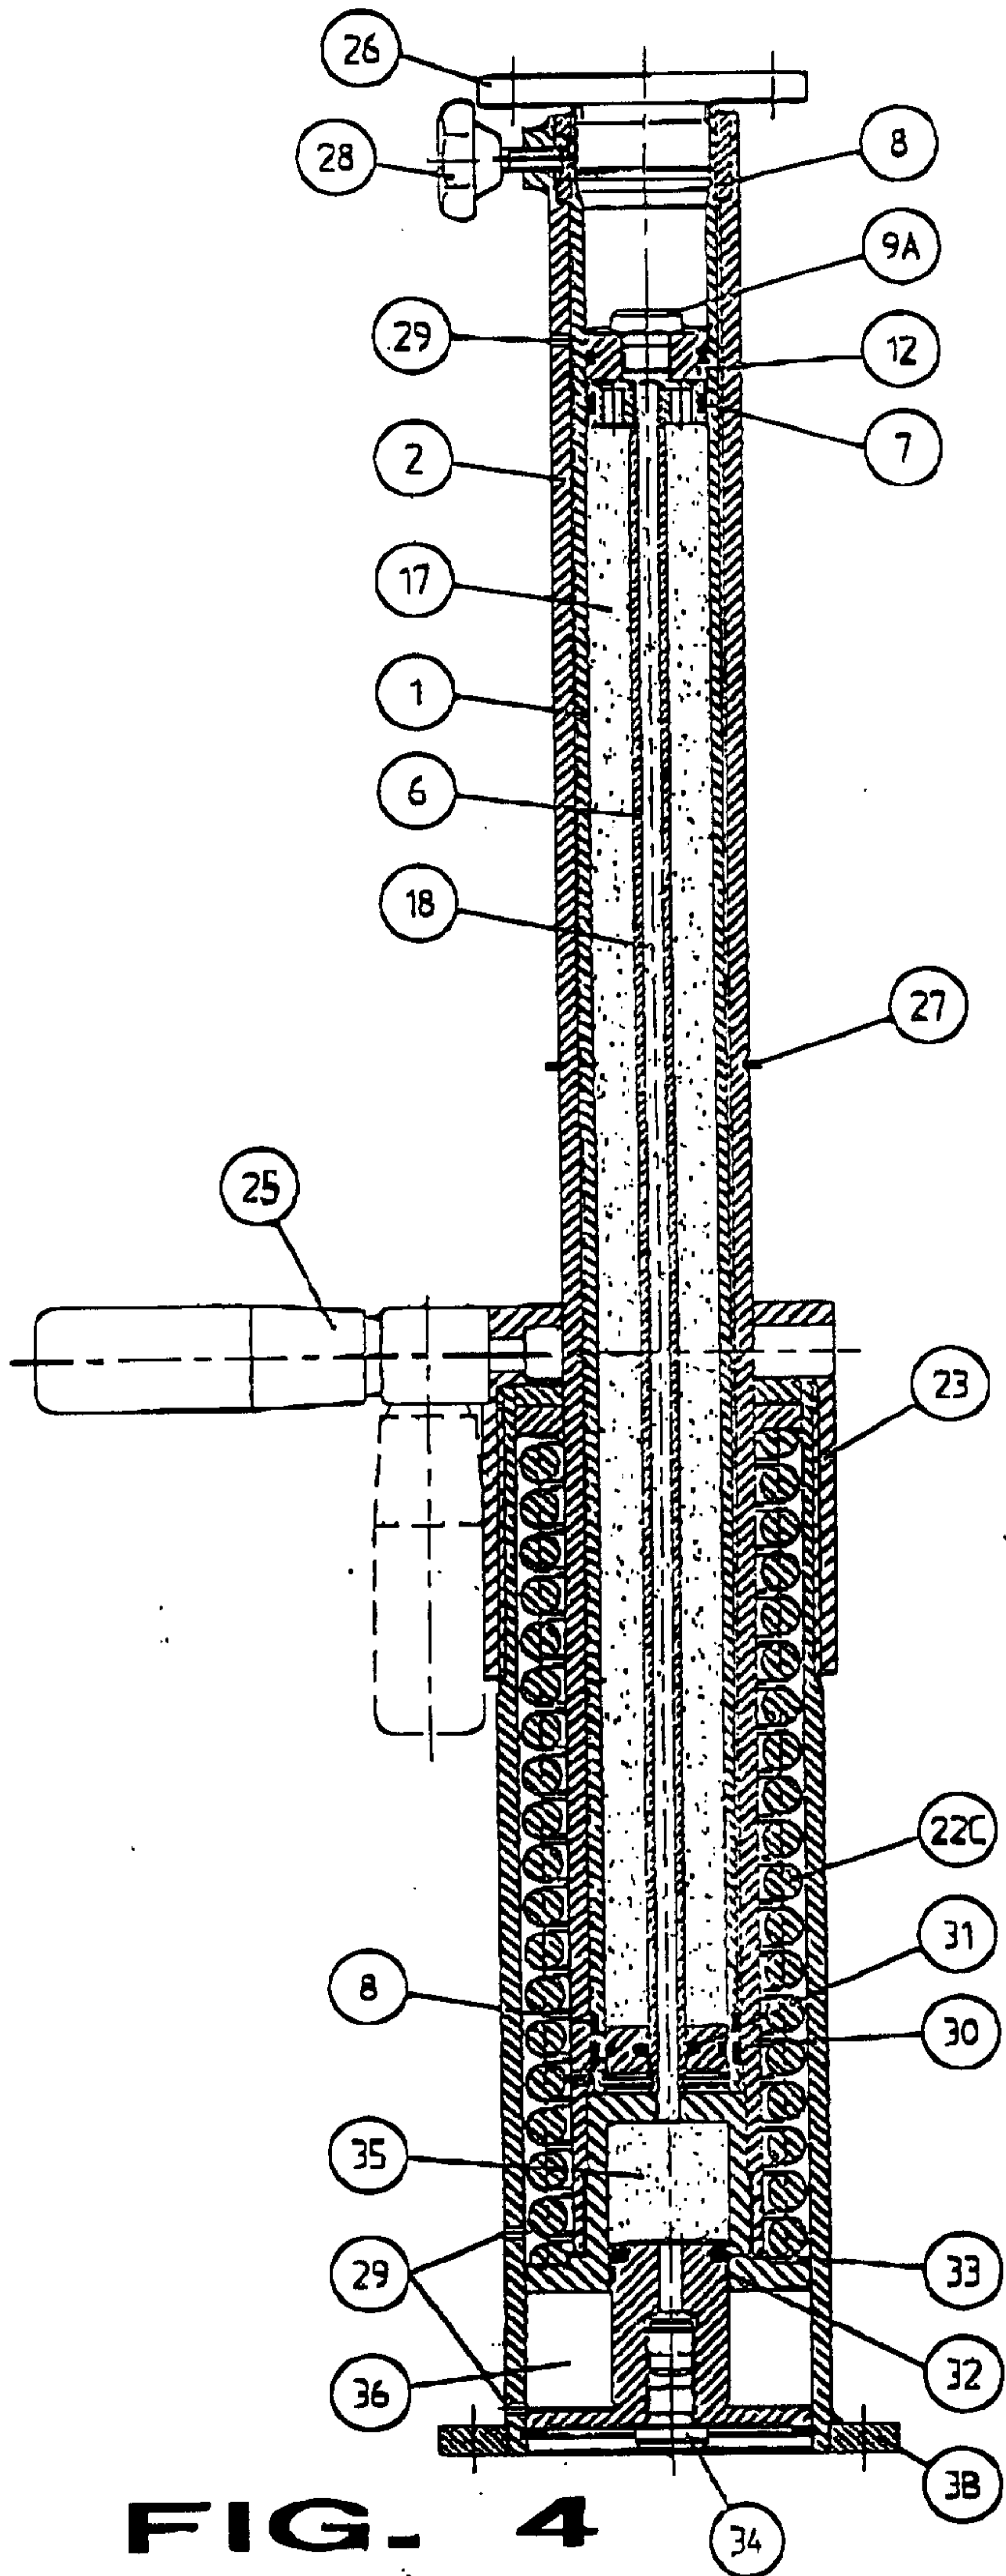


FIG. 4

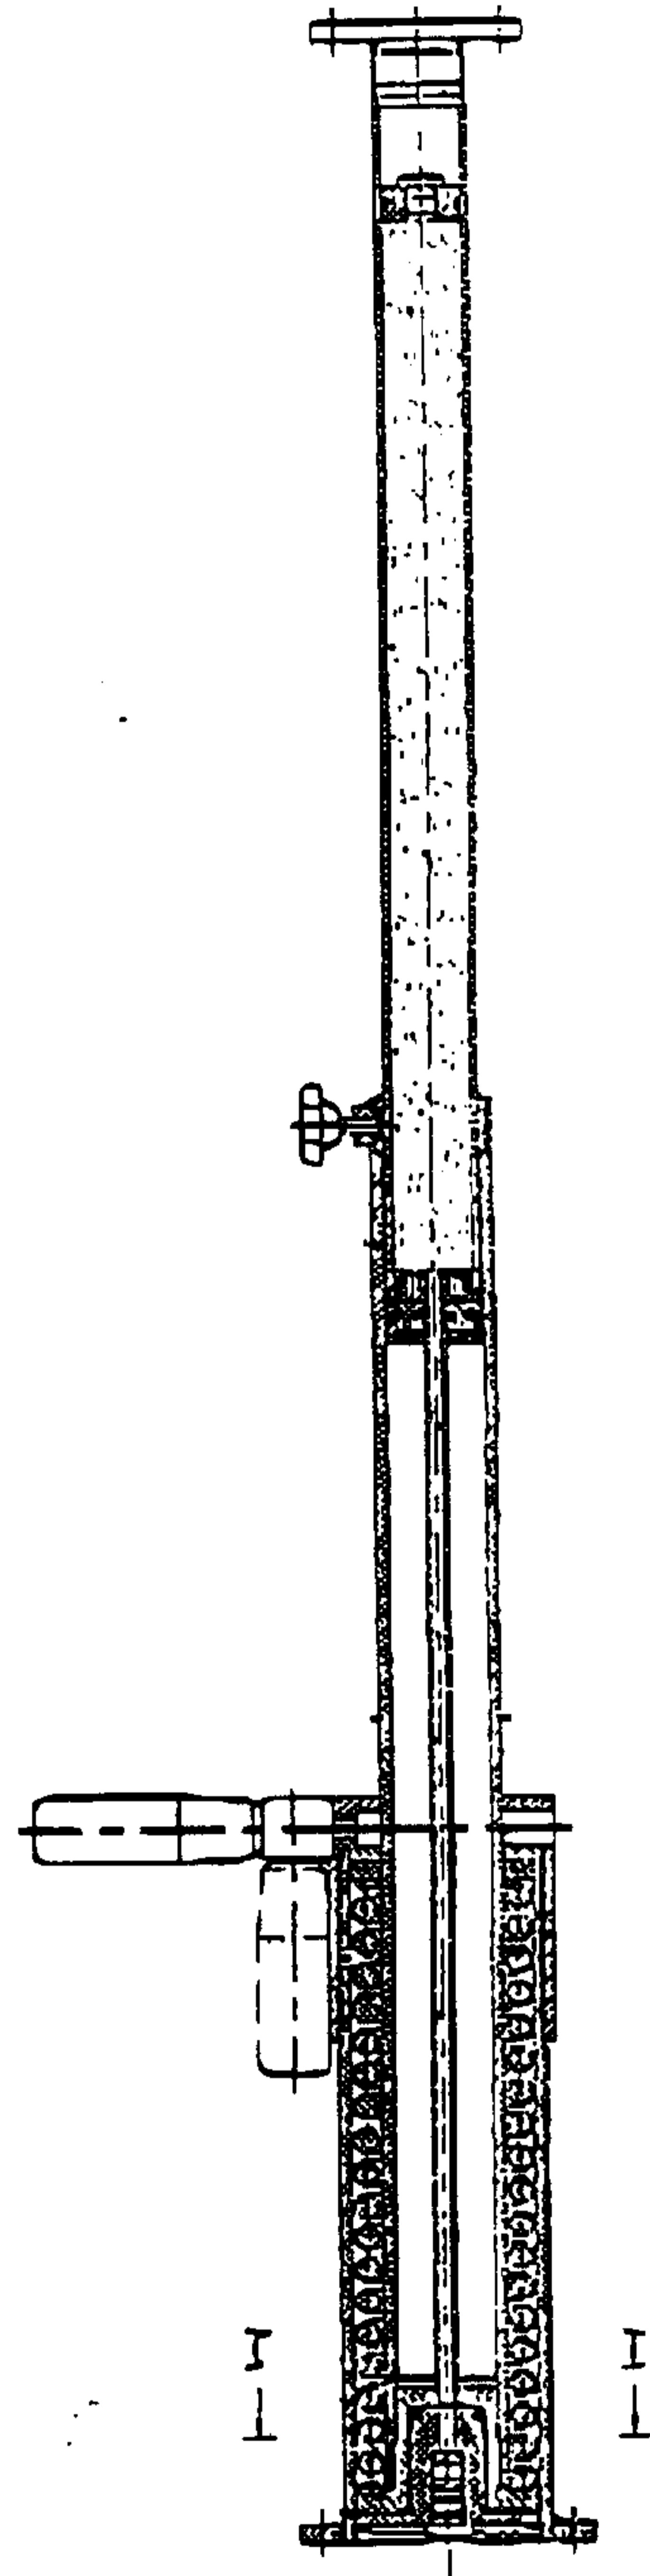


FIG. 5

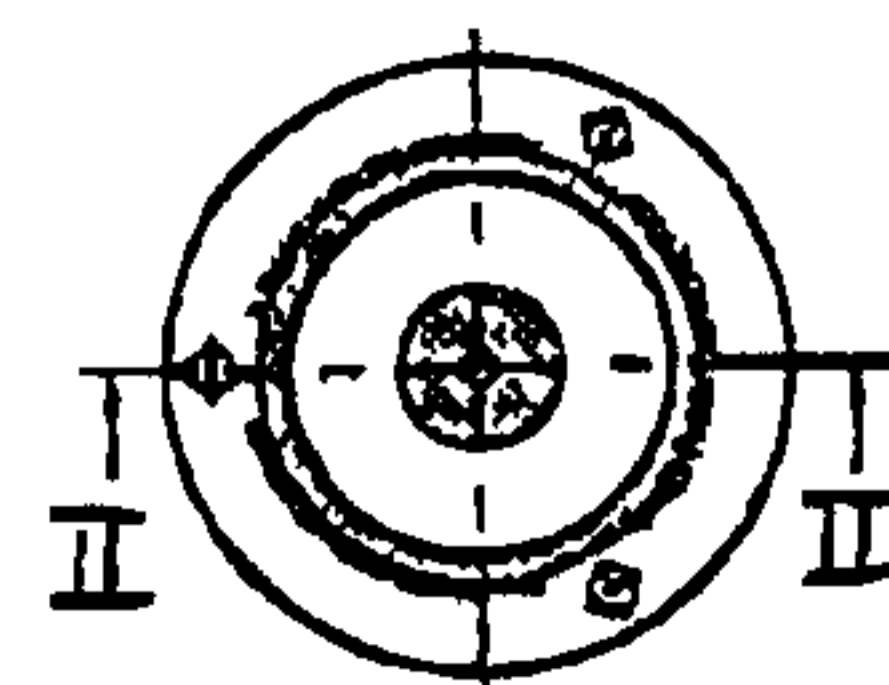


FIG. 6

AMENDED SHEET

