




(86) **Date de dépôt PCT/PCT Filing Date:** 2016/09/29
 (87) **Date publication PCT/PCT Publication Date:** 2017/04/06
 (45) **Date de délivrance/Issue Date:** 2023/08/22
 (85) **Entrée phase nationale/National Entry:** 2018/04/04
 (86) **N° demande PCT/PCT Application No.:** EP 2016/073236
 (87) **N° publication PCT/PCT Publication No.:** 2017/055433
 (30) **Priorité/Priority:** 2015/10/01 (IT102015000057426)

(51) **Cl.Int./Int.Cl. A47J 42/38** (2006.01)
 (72) **Inventeur/Inventor:**
OTTAVI, NANDO, IT
 (73) **Propriétaire/Owner:**
SIMONELLI GROUP S.P.A., IT
 (74) **Agent:** GOWLING WLG (CANADA) LLP

(54) **Titre : MOULIN A CAFE A VITESSE VARIABLE**
 (54) **Title: COFFEE GRINDER WITH VARYING SPEED**

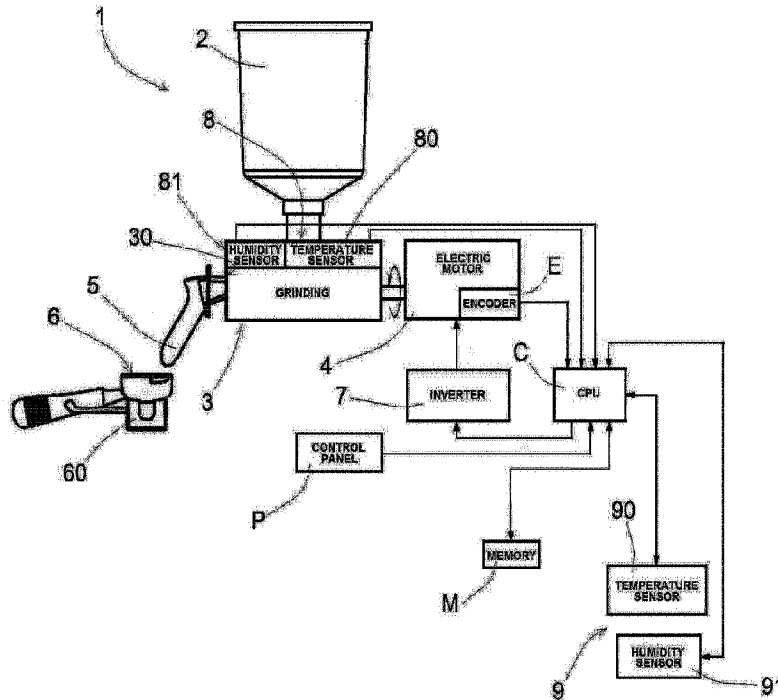

(57) **Abrégé/Abstract:**

Coffee grinder (1) comprising: a grinding assembly (3) to grind coffee beans, a container or hopper (2) to feed coffee beans to the grinding assembly (3), an electric motor (4) connected to the grinding assembly (3), a feeding conduit (5) connected to the grinding assembly (3) to feed coffee into a filter (6) supported by a filter-holder (60), an inverter (7) connected to the electric motor (4) to vary the speed of the electric motor, a control unit (C) connected to the inverter (7) to control the inverter, and a control panel (P) connected to the inverter (7) by means of the control unit (C) so that the user can vary the speed of the electric motor (4).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
6 April 2017 (06.04.2017)(10) International Publication Number
WO 2017/055433 A1(51) International Patent Classification:
A47J 42/38 (2006.01)(21) International Application Number:
PCT/EP2016/073236(22) International Filing Date:
29 September 2016 (29.09.2016)

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
102015000057426 1 October 2015 (01.10.2015) IT(71) Applicant: NUOVA SIMONELLI S.P.A. [IT/IT]; 6, Via
Madonna dell'Antegiano, Belforte Del Chienti (MC),
62031 (IT).(72) Inventor: OTTAVI, Nando; 67, Frazione Villa, 62020
Cessapalombo (MC) (IT).(74) Agent: CUTROPIA, Gianluigi; 13, Viale Cavallotti,
60035 Jesi (AN) (IT).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).**Declarations under Rule 4.17:**

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

(54) Title: COFFEE GRINDER WITH VARYING SPEED

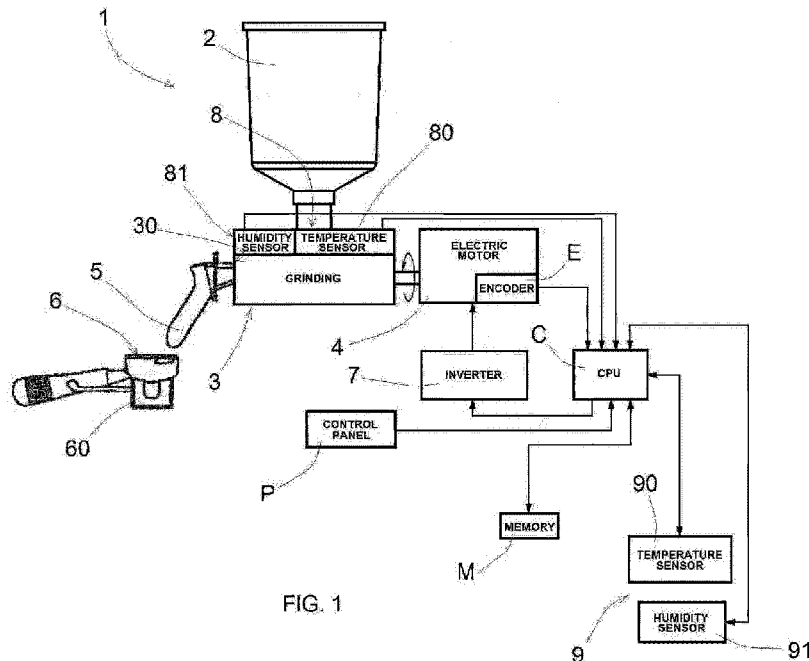

(57) Abstract: Coffee grinder (1) comprising: a grinding assembly (3) to grind coffee beans, a container or hopper (2) to feed coffee beans to the grinding assembly (3), an electric motor (4) connected to the grinding assembly (3), a feeding conduit (5) connected to the grinding assembly (3) to feed coffee into a filter (6) supported by a filter-holder (60), an inverter (7) connected to the electric motor (4) to vary the speed of the electric motor, a control unit (C) connected to the inverter (7) to control the inverter, and a control panel (P) connected to the inverter (7) by means of the control unit (C) so that the user can vary the speed of the electric motor (4).

Description

Coffee grinder with varying speed

The present patent application for industrial invention relates to a coffee grinder provided with a varying speed motor.

As it is known, a professional coffee machine uses a filter-holder with a filter that must be filled with one dose or two doses or multiple
5 doses of ground coffee. Two conditions are necessary to ensure that the coffee made with the coffee machine will preserve its organoleptic features:

- coffee must be ground from beans immediately before being made; and
- 10 - the quantity of ground coffee in the filter-holder must comply with a preset weight value according to the dose or the doses.

In fact, with the passing of time ground coffee will lose its aroma; moreover, doses with little ground coffee or with too much ground coffee will originate a poorly balanced drink.

15 In order to solve these drawbacks at least partially, coffee grinders are known, which comprise a grinding assembly actuated by an electric motor to grind coffee beans that are fed from a container or a hopper in order to feed ground coffee inside the filter.

This type of coffee grinders generally comprises a button that can
20 be manually pressed by an operator to actuate the electric motor and the grinding assembly in order to supply ground coffee.

However such coffee grinders are impaired by some drawbacks.

As a matter of fact, the quantity of ground coffee supplied in the filter is empirically regulated by the operator, who interrupts the supply of
25 ground coffee according to his or her experience as soon as he or she believes that an exact dose of ground coffee has been supplied. Evidently, such an empirical regulation is easily impaired by mistakes and is often too approximate to ensure the supply of an exact dose of coffee.

Automatic coffee grinders are known, wherein a preset actuation time of the motor of the grinding assembly, and consequently a supply time of ground coffee, is saved. Evidently, with such a type of coffee grinders, the operator is no longer responsible of the correct supply of ground coffee; however, these coffee grinders tend to be inefficient and inexact because of a plurality of factors able to affect the quantity of coffee supplied during the actuation time of the motor of the grinding assembly. These factors can be the wear of the blades, the friction between the blades and the coffee, the cleanness of the coffee grinder, the hardness and the dimensions of the coffee beans.

WO2014075828 discloses an automatic coffee machine having a coffee grinder with an electric motor provided with power-limiting means that limit the motor power according to the motor temperature. However, such a machine cannot avoid jamming the grinding assembly.

AU2014100881 discloses a coffee grinder having a stepper motor that regulates the distance of the blades and therefore the grain size of the ground coffee.

DE102004035459 discloses a coffee grinder having a varying speed motor with the purpose of ejecting the residues of ground coffee by means of the centrifugal force in order to clean the grinding chamber.

Such documents of the prior art disclose coffee grinders that grind coffee at a constant speed that is set by the factory and cannot be varied by the operator. None of the prior documents discloses the possibility of varying the speed of the electric motor of the coffee grinder in order to improve the quality of ground coffee.

WO96/23437 discloses a machine for American style coffee comprising a coffee grinder with a grinding blade to grind coffee beans, a container intended to receive the coffee beans to be ground, and an electric motor with varying speed connected to the grinding blade. However such a prior document does not describe the possibility for the user to vary the speed of the electric motor according to the specific requirements.

The purpose of the present invention is to overcome the drawbacks of the prior art by disclosing a coffee grinder able to guarantee a good quality of the ground coffee according to the work load.

Another purpose of the present invention is to disclose such a coffee grinder that is precise and reliable and ensures the supply of a correct dose of ground coffee.

10

After making several experimental tests the applicant found out that the quality of the coffee extracted by a coffee machine strongly depends on the grinding speed of the grinding assembly. The slower coffee is ground, the better its organoleptic features are preserved because coffee overheating is avoided at a low speed. Evidently, the operation of the coffee grinder at a low speed takes a long time and therefore the grinding speed must be subordinated to the work load, that is to say to the number of customers who want coffee.

Starting from these considerations the applicant devised the coffee grinder of the invention, which comprises:

- a grinding assembly intended to grind coffee beans,
- a container or hopper to feed the coffee beans to the grinding assembly,
- an electric motor connected to the grinding assembly in order to actuate or stop said grinding assembly; and
- a feeding conduit connected to the grinding assembly to feed coffee inside a filter supported by a filter-holder;
- an inverter connected to the electric motor to vary the speed of the electric motor, and
- a control unit connected to the inverter to control the inverter.

30

The peculiarity of the coffee grinder according to the present invention consists in the fact that it also comprises a control panel

connected to the inverter by means of the control unit in such manner that the user can vary the speed of the electric motor.

The hardness and the viscosity of coffee beans are different according to the coffee blend because they depend on the toasting process and on the quality and origin of coffee in the blend. Therefore every blend of ground coffee has its preferred grain size. Moreover, the applicant found out that also the grain size of the coffee varies upon varying the grinding speed. At the same fineness, the grain size curve of coffee grinding depends on the grinding speed because the permanence time in the grinding chamber varies with the grinding speed. Therefore, different grain size curves are obtained at varying speeds. In order to obtain a higher percentage of fine particles, coffee must be ground at a low speed (less than 800 rpm). On the contrary, in order to obtain a higher percentage of large particles, the speed must be increased. With the same coffee blend, the variation of the grain size curve depends on the variation of the grinding speed. Consequently, a different result is obtained when making liquid coffee for each grain size curve (which corresponds to a certain speed curve). The good taste and quality of coffee extraction depend on the grain size curve that corresponds to the rotational speed curve of the electric motor.

In view of the above the applicant implemented the possibility for the operator to create and save different speed curves of the electric motor, which correspond to the desired grain size and to the specific coffee blend used.

Therefore the coffee grinder also comprises a memory that is used to save the rotational speed curves of the electric motor that correspond to the desired grain size of the ground coffee, according to the type of grinding and to the coffee blend. Such a memory is connected to the inverter by means of the control unit so that the electric motor can follow a certain rotational speed curve, which is set by the user with the control panel, according to the desired grain size and/or to the coffee blend.

It must be considered that coffee absorbs more or less humidity according to the temperature and humidity in the air. This affects the chemical-physical parameters of the blend, such as hardness, viscosity and dielectric. Therefore, with the same grinding time, these parameters
5 affect the quantity of ground coffee that comes out (dose) and its organoleptic features.

Thanks to the provision of the inverter and of the electric motor that allow to vary the grinding speed, the effects of the different starting conditions will be compensated in order to obtain the same quantity of
10 ground coffee and the same organoleptic features in the coffee extracted in the cup.

It must be considered that the quality of coffee also depends on environmental conditions, such as temperature and humidity.

In fact, when high temperatures are reached by coffee in the
15 grinding chamber (according to the operation time of the machine and to the external temperature):

- the oils and substances that are contained in coffee tend not to maintain their chemical features stable, oxidizing the oils and converting the oils in other chemical substances, which make coffee grow rancid;
- 20 - the most volatile components that are contained in the coffee blend tend to abandon the blend and evaporate in the air.

Therefore, if the blend is heated beyond a certain value, in order to obtain a good grinding quality and consequently a cup of coffee with good organoleptic properties, the grinding speed (which reduces the
25 generation of heat) must be decreased.

To that purpose, the coffee grinder of the invention advantageously comprises ambient sensors disposed in the grinding chamber and/or in the external environment and connected to the control unit to control the rotational speed according to the values detected by
30 the environmental sensors.

Advantageously, the coffee grinder of the invention comprises an encoder disposed in the electric motor to count the number of revolutions

of the electric motor. In such a way, the dose of ground coffee can be controlled in a very exact way, according to the number of revolutions made by the electric motor, regardless of the grinding time and of the weight of ground coffee.

5 Additional features of the invention will appear evident from the detailed description below, which refers to a merely illustrative, not limiting embodiment, as illustrated in the attached figures, wherein:

Fig. 1 is a diagrammatic view showing the parts of a coffee grinder according to the invention.

10 With reference to Fig. 1, a coffee grinder according to the present invention is disclosed, which is globally indicated with reference numeral (1).

The coffee grinder (1) comprises a container or hopper (2) to feed coffee beans to a grinder assembly (3) intended to grind the coffee beans in a grinding chamber (30). An electric motor (4) is connected to the grinding assembly (3) in such manner to actuate or stop the grinding assembly (3). A feeding conduit (5) is connected to the grinding assembly (3) to feed ground coffee inside a filter (6) supported by a filter-holder (60).

20 When the electric motor (4) is actuated, the coffee beans are ground by the grinding assembly (3) and the ground coffee is supplied by the feeding conduit (5). When the electric motor (4) is stopped, the feeding of ground coffee from the feeding conduit (5) is interrupted.

The electric motor (4) is a three-phase asynchronous motor. The electric motor (4) is connected to an inverter (7) intended to vary the rotational speed of the electric motor (4), which is indicative of the grinding speed of the coffee. The inverter (7) is an inverter with single-phase power supply and three-phase output connected to the electric motor. The frequency and the effective voltage of the inverter are adjustable in order to adjust the rotational speed of the electric motor. The electric motor (4) has a rotational speed that can vary from 0 to the maximum attainable technical value.

A control unit (C) is connected to the inverter to control the inverter. A control panel (P) is connected to the control unit (C). In such a way, by means of the control panel (P) the user can control the rotational speed of the electric motor (4) manually according to the work load and the productivity to be obtained, either increasing or decreasing the time used to obtain a dose of ground coffee.

For example, in presence of many customers, in order to increase productivity, the operator will actuate the electric motor at a speed higher than 1200 rpm to grind one dose in less than 5 seconds. On the contrary, in presence of a few customers, in order to increase quality, the operator will actuate the electric motor at a speed lower than 800 rpm to grind one dose in more than 6 seconds, thus improving the quality of ground coffee.

The coffee grinder (1) also comprises a memory (M) connected to the control unit (C). A plurality of rotational speed curves that can be executed by the electric motor (4) is saved in the memory (M). Every speed curve corresponds to a certain grain size of the ground coffee, which is obtained by making the electric motor (4) operate with that specific speed curve. The speed curves are chosen by the user, by means of the control panel (P), according to the type of grain size to be obtained and/or according to the type of coffee blend.

The coffee grinder (1) also comprises:

- a first set of environmental sensors (8) disposed in the grinding chamber (30) to detect the environmental conditions in the grinding chamber (30), and
- a second set of environmental sensors (9) disposed outside the coffee grinder (1) to detect the environmental conditions outside the coffee grinder (1).

The first and the second set of environmental sensors (8, 9) comprise temperature sensors (80, 90) and/or humidity sensors (81, 91).

The first and the second set of environmental sensors (8, 9) are connected to the control unit (C).

The memory (M) is used to save threshold environmental values, such as temperature values and/or humidity values of the grinding chamber (30) and/or of the external environment, which are the maximum values above which coffee can be deteriorated. The control unit (C) is set
5 in such manner to compare the environmental values detected by the sets of sensors (8, 9) with the threshold environmental values saved in the memory (M). If the environmental values detected by the set of sensors (8, 9) exceed the threshold values, the control unit (C) controls the inverter (7) in order to decrease the rotational speed of the motor (4)
10 so that the environmental values detected by the sets of sensors (8, 9) are maintained under the threshold values saved in the memory.

The coffee grinder (1) also comprises an encoder (E) disposed in the electric motor (4) to count the number of revolutions that are made by the electric motor (4). The exact number of revolutions made by the
15 electric motor (4) to grind one dose is saved in the memory (M).

The encoder (E) is connected to the control unit (C) that is configured in such manner to compare the number of revolutions counted by the encoder (E) with the number of revolutions saved in the memory. When the number of revolutions counted by the encoder reaches the
20 number of revolutions saved in the memory, the control unit immediately stops the electric motor (4) because the exact quantity of one dose has been reached, regardless of the grinding time or of the weight of the dose.

It must be considered that the control unit (C) can be set in such
25 manner to control the inverter (7) in order to invert the rotational direction of the electric motor (4).

The control unit (C) is connected to the inverter (7) and is set in such manner to detect the power absorption rate of the electric motor (4). If such a power absorption rate is higher than a threshold value saved in
30 the memory (M), this indicates an anomalous stress of the motor or the blocking of the grinding assembly (3). In this case, when the power absorbed by the motor exceeds a threshold value, the control unit (C)

inverts the rotation of the electric motor (4) to avoid downtime, motor damage, high consumptions and the action of a specialized technician.

Moreover, the control unit (C) is set in such manner that, when grinding is started, the electric motor (4) makes an angle of rotation in
5 inverse direction compared to the direction of rotation used for grinding, thus avoiding stopping the grinding assembly (3) at the start, facilitating the acceleration of the motor (4), and reducing the starting torque.

Claims

1. Coffee grinder (1) comprising:

- 5 - a grinding assembly (3) disposed in a grinding chamber (30) to grind coffee beans,
- a container or hopper (2) to feed coffee beans to the grinding assembly (3),
- an electric motor (4) connected to the grinding assembly (3) in such manner to actuate or stop said grinding assembly to grind one coffee
10 dose; and
- a feeding conduit (5) connected to the grinding assembly (3) to feed coffee in a filter (6) supported by a filter-holder (60),
- an inverter (7) connected to the electric motor (4) to vary the speed of the electric motor,
- 15 - a control unit (C) connected to the inverter (7) to control the inverter,
- a control panel (P) connected to the inverter (7) by means of the control unit (C) in such manner that the user can vary the speed of the electric motor (4);
- 20 - a memory (M) connected to said control unit (C); and
- at least one set of environmental sensors (8, 9) disposed in at least one of said grinding chamber (30) and outside the coffee grinder (1) to detect environmental values in the grinding chamber and/or outside the coffee grinder, said set of environmental sensors (8, 9) being connected to
25 the control unit (C), said control unit (C) being configured in such manner to control the inverter (7) to vary the rotational speed of the electric motor (4) according to the environmental values detected by the set of environmental sensors (8, 9);
- wherein said memory (M) is used to save threshold environmental
30 values above which the quality of ground coffee is impaired, and said control unit (C) being configured in such manner to compare the environmental values detected by the set of environmental sensors (8, 9)

with the threshold environmental values to reduce the rotational speed of the electric motor (4) when the environmental values detected by the sensors (8, 9) exceed the threshold environmental values saved in the memory (M).

5 2. The coffee grinder (1) of claim 1, also comprising a plurality of rotational speed curves of the electric motor (4) saved in said memory (M), each rotational speed curve corresponding to a preset grain size of ground coffee, wherein said control unit (C) is configured in such manner that the user can select a rotational speed curve through the control panel (P).

10 3. The coffee grinder (1) of claim 1 or 2, wherein said environmental sensors (8, 9) comprise at least one of temperature sensors (80, 90) and humidity sensors (81, 91).

 4. The coffee grinder (1) of any one of claims 1 to 3, also comprising an encoder (E) disposed in the electric motor (4) to count the number of
15 revolutions made by the electric motor, said control unit (C) being configured in such manner to control the inverter (7) to stop the rotation of the electric motor (4) when the number of revolutions counted by the encoder (E) reaches a preset number of revolutions for one exact dose of ground coffee.

20 5. The coffee grinder (1) of any one of claims 1 to 4, wherein said control unit (C) is configured in such manner to control the inverter (7) to invert the rotational direction of the electric motor (4).

 6. The coffee grinder (1) of claim 5, wherein said control unit (C) is connected to the inverter (7) and is set in such manner to detect the power
25 absorption rate of the electric motor (4) and control the inverter (7) to invert the rotation of the electric motor (4) when a power absorption rate higher than a preset threshold value is detected.

 7. The coffee grinder (1) of claim 5, wherein said control unit (C) is set in such manner that, when grinding is started, the electric motor (4)
30 makes an angle of rotation in inverse direction compared to the grinding rotational direction.

8. The coffee grinder (1) of any one of claims 1 to 7, wherein said electric motor (4) is a three-phase asynchronous motor, said inverter (7) is an inverter with single-phase power supply and three-phase output connected to the electric motor, said inverter having adjustable frequency and effective voltage in such manner to adjust the rotational speed of the electric motor, said electric motor (4) having a rotational speed that can vary from 0 to the maximum attainable technical value.

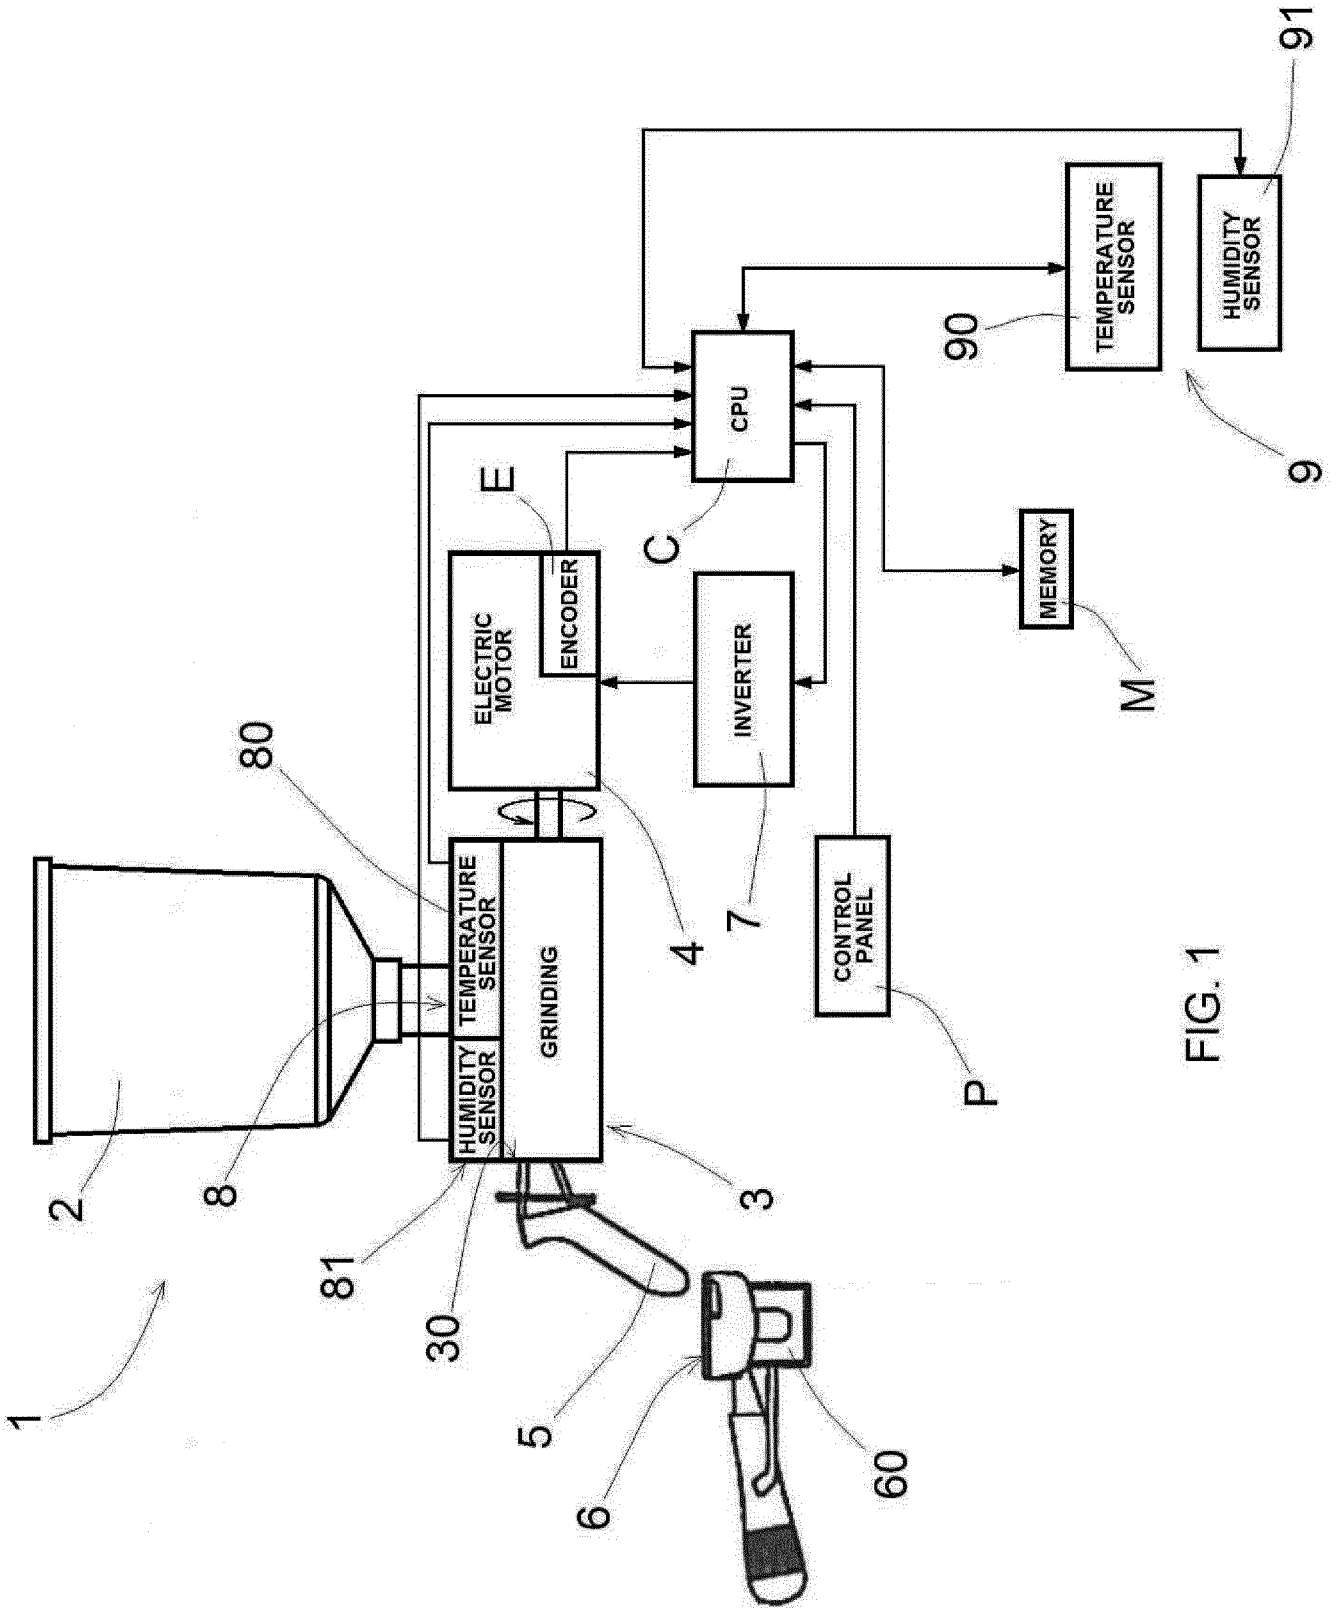


FIG. 1

