



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number: **0 496 460 B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification: 30.11.94 (51) Int. Cl.⁵: **B05B 11/04, A45D 34/02**

(21) Application number: **92200124.3**

(22) Date of filing: **16.01.92**

(54) **Dispenser adapted for combined continuous and instant operation.**

(30) Priority: **17.01.91 NL 9100089**

(43) Date of publication of application:
29.07.92 Bulletin 92/31

(45) Publication of the grant of the patent:
30.11.94 Bulletin 94/48

(84) Designated Contracting States:
**AT BE CH DE DK ES FR GB GR IT LI LU MC
NL PT SE**

(56) References cited:
**US-A- 2 520 368
US-A- 4 084 732
US-A- 4 306 679**

(73) Proprietor: **Sara Lee/DE N.V.
Keulsekade 143
NL-3532 AA Utrecht (NL)**

(72) Inventor: **Kuhn, Petrus Henricus Aloysius
Nicolaas
Hanenburglaan 294
NL-2565 HC Den Haag (NL)**

(74) Representative: **Smulders, Theodorus A.H.J.,
Ir. et al
Vereenigde Octroolbureaux
Nieuwe Parklaan 97
NL-2587 BN 's-Gravenhage (NL)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

This invention relates to a dispenser adapted for combined continuous and instant operation, i.e., a dispenser which continuously releases the active substance through absorption and evaporation, and, if so desired, can instantly release a large charge of the active substance.

Well known are dispensers that operate continuously through evaporation, which comprise a porous, absorbent medium and an evaporation surface, and are filled with a solution of an active substance, such as insecticide or a medicinal substance for medical applications, or with perfume or deodorant for cosmetic applications or use as an air-freshener.

Also known are spray dispensers adapted for instant operation, for instance a deformable squeeze-bottle having an immersion tube channel arranged therein, the liquid being sprayed by generating a pressure in the bottle and discharging liquid via the immersion tube. Prior to discharge, the liquid is mixed with air that is present in the bottle above the liquid. Aerosols are a variant of such dispensers.

The object of this invention is to provide a dispenser which combines the two above-described principles of operation and can be manufactured simply and economically.

This object is realized by providing a dispenser comprising a container which is to be partly filled with liquid active substance and has a wall that is at least locally resiliently deformable, with two immersion tube channels extending from a point adjacent the bottom of the container up to the top of the container, one channel terminating in a spray nozzle and the other channel containing a wick or similar absorbent material and terminating in an evaporation space that communicates with the atmosphere.

Active-substance containing liquid will be absorbed continuously via the wick and enabled to evaporate in the evaporation space communicating with the atmosphere. By squeezing the container, a large quantity of liquid can instantly be discharged via the spray nozzle.

Simple and economical manufacture can be realized by forming the spray nozzle, the evaporation space and at least one of the immersion tube channels as a single moulding which can be snapped onto the mouth of the container so as to seal it.

In further elaboration of the invention, the spray nozzle and the evaporation space can be closed by one common cover so as to prevent evaporation before the dispenser put into use.

Furthermore, in further elaboration of the invention, the spray nozzle may be formed substantially

concentrically within the evaporation space and the wick may comprise an elongate portion extending in the corresponding immersion tube channel and a portion extending transverse thereto, extending around the spray nozzle in the evaporation space.

Such a, for instance T-shaped, wick can have its leg arranged in the corresponding immersion tube channel while the transverse portion is arranged around the spray nozzle in the evaporation space.

To prevent liquid being forced into the immersion tube channel containing the wick and thence into the evaporation space during the momentary generation of pressure in the container, the dimensions of the wick and those of the immersion tube channel containing the wick can be mutually adjusted in such a manner that the liquid cannot pass the wick in the immersion tube.

Another way of preventing the liquid from flowing upward through the immersion tube channel during the momentary generation of pressure, is to arrange a non-return valve element in the lower part of the immersion tube, this valve element being formed, for instance, by a ball that is mounted with radial clearance in the lower part of the immersion tube channel and confined with axial clearance by two constrictions provided in the channel, the upper constriction forming a valve seat for the ball, so that the channel is shut off when the pressure in the container rises, while any excess liquid in the evaporation space can flow back into the container.

To clarify the invention, one embodiment will now be discussed, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 is a longitudinal section of the dispenser;

Fig. 2 is a cross-section of the dispenser; and

Fig. 3 is a side elevation of the wick.

The dispenser 1 of the embodiment shown, which may for instance serve as an air-freshener, comprises a container 2, an upper cap 3, a wick 4, a cover 5, which is partly shown on the left-hand side of Fig. 1 and serves to close the dispenser before it is put into use, and a plug 6. The plug 6 is a single moulding and is secured onto the mouth of container 2 by means of a snap connection 7 and comprises a spray nozzle 8 from which extends an immersion tube channel 9 to a point adjacent the container bottom. Further, the plug 6 comprises a second immersion tube channel 10 extending from an evaporation space 11, provided around the spray nozzle, down to a point adjacent the bottom of the container. Arranged in the lower end of the immersion tube channel 10 is a non-return valve element 12. The non-return valve 12 in the embodiment shown is designed as a ball 13, incorporated with radial clearance in the lower part of the immersion tube channel 10 and confined with axial clear-

ance by two constrictions provided in the channel 10, the upper constriction forming a valve seat 14 for the ball 13, so that the channel 10 is shut off when the pressure in the container 2 rises.

The wick 4 is made of porous, liquid-absorbent material and T-shaped. For the sake of clarity, the wick 4 is not shown in Figs 1-2. When the wick 4 is disposed in the dispenser 1, the leg 15 of the T-shaped wick 4 is disposed in the immersion tube 10 and the crosspiece 16 of the T-shaped wick 4 is disposed around the spray nozzle 8 against the inside of the wall bounding the evaporation space 11. The crosspiece 16 forms the evaporation surface of the wick 4.

Claims

1. A dispenser (1) comprising a container (2) which is to be partly filled with liquid active substance and has a wall that is at least locally resiliently deformable, said dispenser being characterized in that it comprises two immersion tube channels (9,10) extending from a point adjacent the bottom of the container up to the top of the container, one channel (9) terminating in a spray nozzle (8) and the other channel (10) containing a wick (4) or similar absorbent material and terminating in an evaporation space (11) that communicates with the atmosphere.
2. A dispenser according to claim 1, characterized in that the spray nozzle (8), the evaporation space (11) and at least one of the immersion tube channels (9,10) are formed as a single moulding which can be click-fitted onto the mouth of the container so as to seal it.
3. A dispenser according to claim 2, characterized in that the spray nozzle (8) and the evaporation space (11) can be closed by a common cover (5).
4. A dispenser according to claim 2 or 3, characterized in that the spray nozzle (8) is formed substantially concentrically within the evaporation space (11) and the wick (4) comprises an elongate portion (15) extending in the corresponding immersion tube channel (10) and a portion (10) extending transverse thereto, extending around the spray nozzle in the evaporation space (11).
5. A dispenser according to any one of the preceding claims, characterized in that a non-return valve element (12) is arranged at the lower end of the channel (10) containing the wick.

6. A dispenser according to claim 5, characterized in that the non-return valve element (12) is formed by a ball (13) which is arranged with radial clearance in the lower part of the channel (10) and confined by two constrictions provided in the channel (10), the upper constriction forming a valve seat (14) for the ball (13).

Patentansprüche

1. Spender (1) umfassend einen Behälter (2), der zum Teil mit einem flüssigen aktiven Stoff befüllt wird und der eine Wandung aufweist, die zumindest örtlich elastisch verformbar ist, wobei der Spender dadurch gekennzeichnet ist, daß er zwei Tauchröhrchen (9,10) umfaßt, die sich von einer Stelle in der Nähe des Behälterbodens bis zur Spitze des Behälters erstrecken, wobei ein Röhrchen (9) in einer Sprühdüse (8) endet und das andere Röhrchen (10) einen Docht (4) oder ein ähnliches absorbierendes Material aufweist und in einem Verdunsterraum (11) endet, der mit der Atmosphäre in Verbindung steht.
2. Spender nach Anspruch 1, dadurch gekennzeichnet, daß die Sprühdüse (8), der Verdunsterraum (11) und mindestens eines der Tauchröhrchen (9,10) als einteilige Form ausgebildet sind, die auf die Behälteröffnung aufgeschnappt werden kann, um diese zu verschließen.
3. Spender nach Anspruch 2, dadurch gekennzeichnet, daß die Sprühdüse (8) und der Verdunsterraum (11) mit einem herkömmlichen Verschuß (5) verschließbar ist.
4. Spender nach Anspruch 2 oder 3, dadurch gekennzeichnet, daß die Sprühdüse (8) im wesentlichen konzentrisch innerhalb des Verdunsterraums (11) ausgebildet ist und daß der Docht (4) einen länglichen Abschnitt (15), der sich in dem entsprechenden Tauchröhrchen (10) erstreckt, und einen Abschnitt (16) aufweist, der sich quer dazu, nämlich um die Sprühdüse (8) in dem Verdunsterraum (11) herum erstreckt.
5. Spender nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß ein Einwegventil (12) am unteren Ende des den Docht (4) enthaltenden Röhrchens (10) angeordnet ist.
6. Spender nach Anspruch 5, dadurch gekennzeichnet, daß das Einwegventil (12) eine Kugel (13) umfaßt, die mit radialem Abstand im un-

teren Ende des Röhrchens (10) angeordnet ist und durch zwei in dem Röhrchen (10) vorgeordnete Einschnürungen gehalten wird, wobei die obere Einschnürung einen Ventilsitz (14) für die Kugel (13) bildet.

5

canal (10), l'étranglement supérieur formant un siège (14) de clapet pour la bille.

Revendications

1. Distributeur (1) comprenant un réservoir (2) qui doit être partiellement rempli d'une substance active liquide et a une paroi qui est au moins localement déformable souplement, ledit distributeur étant caractérisé en ce qu'il comprend deux canaux tubulaires d'immersion (9, 10) s'étendant d'un point proche du fond du réservoir jusqu'au sommet du réservoir, un canal (9) se terminant dans une buse (8) de pulvérisation et l'autre canal (10) contenant une mèche (4) ou un matériau absorbant semblable et se terminant dans un espace (11) d'évaporation qui communique avec l'atmosphère. 10 15 20
2. Distributeur selon la revendication 1, caractérisé en ce que la buse (8) de pulvérisation, l'espace (11) d'évaporation et au moins un des canaux tubulaires d'immersion (9, 10) sont formés d'un seul moulage qui peut être fixé d'un coup sec sur l'embouchure du réservoir de façon à le fermer hermétiquement. 25 30
3. Distributeur selon la revendication 2, caractérisé en ce que la buse (8) de pulvérisation et l'espace (11) d'évaporation peuvent être fermés par un couvercle (5) commun. 35
4. Distributeur selon la revendication 2 ou 3, caractérisé en ce que la buse (8) de pulvérisation est formée sensiblement de manière concentrique à l'intérieur de l'espace (11) d'évaporation et la mèche (4) comprend une partie (15) allongée s'étendant dans le canal tubulaire d'immersion (10) correspondant et une partie (10) s'étendant transversalement à celui-ci et s'étendant autour de la buse de pulvérisation dans l'espace (11) d'évaporation. 40 45
5. Distributeur selon l'une quelconque des revendications précédentes, caractérisé en ce qu'un élément (12) formant clapet de non-retour est placé à l'extrémité inférieure du canal (10) contenant la mèche. 50
6. Distributeur selon la revendication 5, caractérisé en ce que l'élément (12) formant clapet de non-retour est constitué d'une bille (13) qui est placée avec un espace libre radial dans la partie inférieure du canal (10) et qui est coincée par deux étranglements se trouvant dans le 55

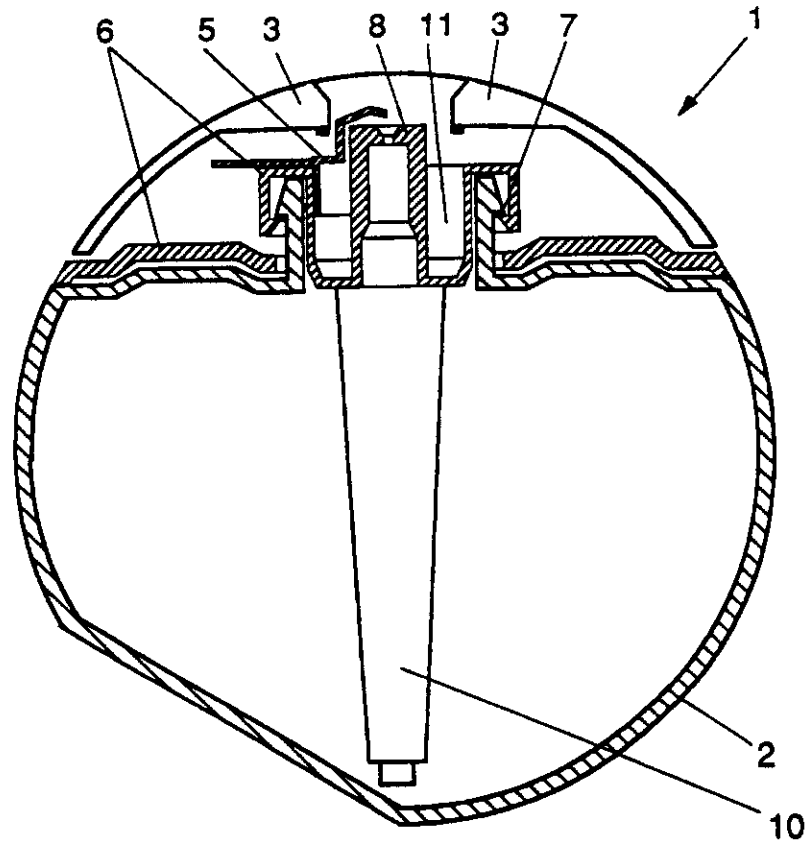


FIG. 1

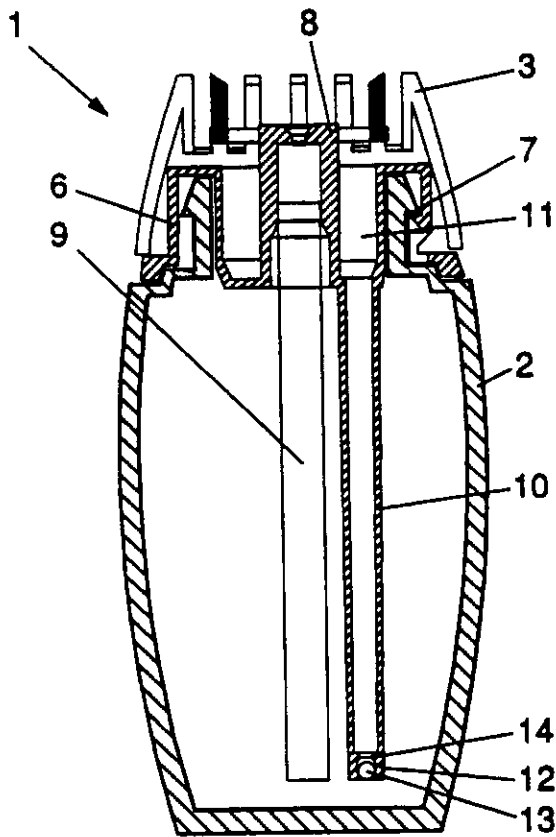


FIG. 2

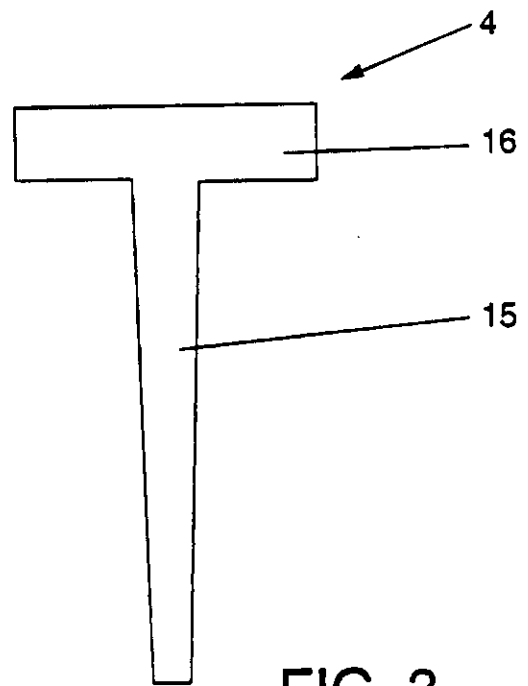


FIG. 3

REGISTER ENTRY FOR EP0496460

European Application No EP92200124.3 filing date 16.01.1992

Priority claimed:

17.01.1991 in Netherlands - doc: 9100089

Designated States BE CH DE DK ES FR GB GR IT LI LU MC NL PT SE AT

Title DISPENSER ADAPTED FOR COMBINED CONTINUOUS AND INSTANT OPERATION.

Applicant/Proprietor

SARA LEE/DE N.V., Keulsekade 143, NL-3532 AA Utrecht, Netherlands

[ADP No. 57474843001]

Inventor

PETRUS HENRICUS ALOYSIUS NICOLAAS KUHN, Hanenburglaan 294, NL-2565 HC Den

Haag, Netherlands

[ADP No. 59959502001]

Classified to

B05B A45D

Address for Service

W P THOMPSON & CO, Coopers Building, Church Street, LIVERPOOL, L1 3AB,

United Kingdom

[ADP No. 00000158001]

EPO Representative

IR. THEODORUS A.H.J. SMULDERS, Vereenigde Octrooibureaux Nieuwe Parklaan

97, NL-2587 BN 's-Gravenhage, Netherlands

[ADP No. 50031020001]

Publication No EP0496460 dated 29.07.1992

Publication in English

Examination requested 18.12.1992

Patent Granted with effect from 30.11.1994 (Section 25(1)) with title

DISPENSER ADAPTED FOR COMBINED CONTINUOUS AND INSTANT OPERATION.

28.07.1994 W P THOMPSON & CO, Coopers Building, Church Street, LIVERPOOL, L1
3AB, United Kingdom [ADP No. 00000158001]

registered as address for service

Entry Type 8.11 Staff ID. MB2 Auth ID. AA

**** END OF REGISTER ENTRY ****

OA80-01
PA

OPTICS - PATENTS

27/09/95 15:02:12
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER EP0496460

PROPRIETOR(S)

Sara Lee/DE N.V., Keulsekade 143, NL-3532 AA, Netherlands

DATE FILED 16.01.1992

DATE GRANTED 30.11.1994

DATE NEXT RENEWAL DUE 16.01.1996

DATE NOT IN FORCE

DATE OF LAST RENEWAL

YEAR OF LAST RENEWAL 00

STATUS PATENT IN FORCE

**** END OF REPORT ****