



(51) International Patent Classification:

C08G 18/42 (2006.01) *C08J 3/03* (2006.01)
C08G 18/22 (2006.01) *C09J 175/04* (2006.01)
C08L 75/04 (2006.01)

(21) International Application Number:

PCT/US2012/025980

(22) International Filing Date:

21 February 2012 (21.02.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/445,013	21 February 2011 (21.02.2011)	US
61/445,006	21 February 2011 (21.02.2011)	US
61/511,378	25 July 2011 (25.07.2011)	US
13/190,066	25 July 2011 (25.07.2011)	US

(72) Inventor; and

(71) Applicant : **FELICE, Kristopher, M.** [US/US]; 2139 South Commerce Road, Wolverine Lake, MI 48390 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **EMERSON, Adam, W.** [US/US]; 45171 Dunn Road, Belleville, MI 48111 (US). **WILLARD, George, F.** [US/US]; 112 First Avenue, Ravenswood, WV 26164 (US). **UFFMAN, Eric, W.**[US/US]; 11808 Smoke Valley Ct., Maryland Heights, MO 63043 (US). **LEE, Albert, C.** [US/US]; 907 Woodshire Lane, Creve Coeur, MO 63141 (US).(74) Agent: **SOROCCO, Douglas, J.**; Dunlap Coddling, P.C., PO Box 16370, Oklahoma City, OK 73113-2370 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POLYURETHANE DISPERSIONS AND METHODS OF MAKING AND USING SAME

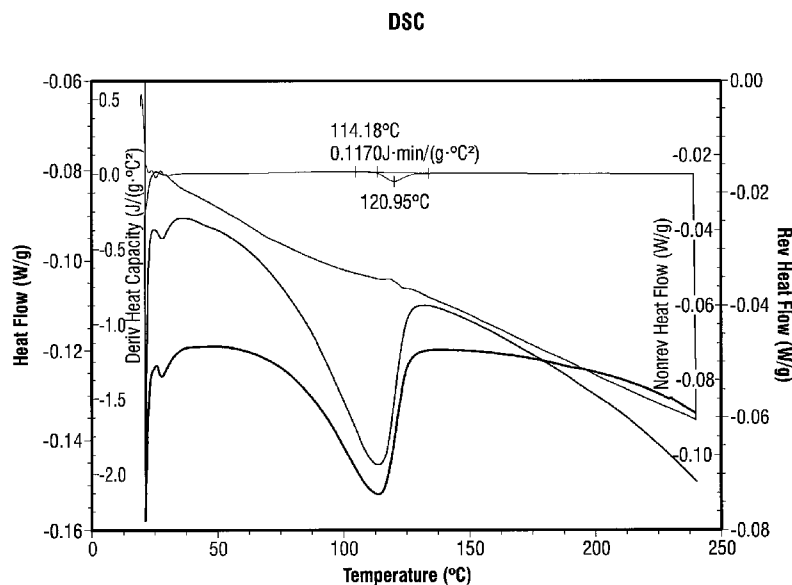


FIG. 1

(57) Abstract: The presently disclosed and claimed inventive concept(s) relates generally to polyethylene terephthalate ("PET") polymers, digested oligomeric derivatives of PET ("dPET"), functionalized oligomeric derivatives of dPET ("diPET"), and polyurethane dispersions ("PUD") made from or incorporating diPET therein.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

POLYURETHANE DISPERSIONS AND METHODS OF MAKING AND USING SAME

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit under 35 U.S.C. 119(e) of U.S. Provisional Patent Application Serial No. 61/445,006, filed February 21, 2011; U.S. Provisional Patent Application Serial No. 61/445,013, filed February 21, 2011 and Provisional Patent Application Serial No. 61/511,378, filed July 25, 2011, the entire contents of each of which are hereby expressly incorporated herein by reference.

[0002] In addition, the present application claims the benefit under 35 U.S.C. 120 of U.S. Patent Application Serial No. 13/190,066, filed July 25, 2011, and which claims the benefit under 35 U.S.C. 119(e) of U.S. Provisional Patent Application Serial No. 61/404,621, filed October 6, 2010.

BACKGROUND OF THE INVENTION

1. Field of the Presently Disclosed and Claimed Inventive Concepts

[0003] The presently disclosed and claimed inventive concept(s) relates generally to polyethylene terephthalate ("PET") polymers, digested oligomeric derivatives of PET ("dPET"), functionalized oligomeric derivatives of dPET ("dfPET"), and polyurethane dispersions ("PUD") made from or incorporating dfPET therein. More particularly, but not to be construed as limiting, the presently disclosed and claimed inventive concept(s) relate to lower molecular weight functionalized digested PET materials ("dfPET") made from digesting polyethylene terephthalate, especially recycled polyethylene terephthalate ("rPET"). In one particular aspect, the presently disclosed and claimed inventive concept(s) relate to the production of an oligomeric form of functionalized digested polyethylene terephthalic acid from waste products, such as beverage containers, made from polyethylene terephthalate. In one embodiment, the dfPET polymers have an average number molecular weights of from about 200 to about 2000 Daltons. These dfPET polymers have excellent solubility in various organic solvents and provide a functionalized backbone for the production of polymeric based products such as polyurethane dispersions (PUDs) and polyurethane resins (PURs), by way of example but not by way of limitation.

2. Background and Applicable Aspects of the Presently Disclosed and Claimed Inventive Concept(s)

[0004] Most polyester resins used in commercial applications are formed from raw materials, which are rising in price and have relatively large markets. Accordingly, recovery of these raw materials from scrap, waste and used products is an important economical consideration as well as an ecological consideration. One widely used polyester is polyethylene terephthalate (hereinafter "PET") made from terephthalic acid and ethylene glycol. Additionally, a Bisphenol A polyester resin could be used in a manner similar to PET. It should be understood that one of ordinary skill in the art, given the present disclosure and teachings, would be fully capable of using the presently disclosed and claimed inventive concept(s) to break down or degrade any polymer having a polyester backbone (e.g., polycarbonates) into oligomeric forms for use as a precursor molecule in the process of synthesizing polyurethane dispersions and resins.

[0005] Over the past 20 years, there has been an increased push throughout the world to increase recycling of polyester resins. Plastic bottles commonly used for drinks and carbonated beverages, for example, are made from polyethylene terephthalate and represent a large potential source of recoverable polyesters: either as bulk refined PET or the terephthalic acid and ethylene glycol monomers that constitute PET. It is estimated that from 375 to 500 million pounds of polyethylene terephthalate were used for beverage bottles in 1980, for example. More recently, more than 2.4 billion pounds of plastic bottles were recycled in 2008. Although the amount of plastic bottles recycled in the U.S. has grown every year since 1990, the actual recycling rate remains steady at around 27 percent. Recent legislation in several states requiring a deposit refundable upon return of all empty beverage containers has established an ongoing procedure for collecting and separating polyethylene terephthalate containers which must be recycled or otherwise disposed of in an economical manner. Additionally, many municipalities have implemented voluntary or mandatory recycling programs in conjunction with trash pickup and disposal.

[0006] PET beverage containers cannot be reused since the elevated temperatures required for sterilization deforms the container. PET containers can, however, be ground into small pieces for use as a filler material or remelted for formation of different articles. Such recycled material may be referred to interchangeably herein as "recycled PET", "scrap PET", "waste PET", and/or "rPET". The polyethylene

terephthalate recovered by such processes contains impurities, such as pigment, paper, other undesirable polymers and metal from caps. Consequently, applications for polyethylene terephthalate reclamation by mechanical means are limited to non-food uses and low purity molded products.

[0007] In the past, several different techniques have been proposed for recovering pure or isolated terephthalic acid and ethylene glycol monomers from waste polyethylene terephthalate. One known technique involves, for example, the depolymerization of polyethylene terephthalate by saponification. Saponification is the hydrolysis of an ester under basic conditions to form an alcohol and the salt of a carboxylic acid (carboxylates).

[0008] In one known approach for saponification, polyethylene terephthalate is reacted with an aliphatic alcohol and a dialkyl terephthalate is recovered. This approach is exemplified in U.S. Patent Nos. 3,321,510, 3,403,115 and 3,501,420, all of which are hereby incorporated by reference in their entirety. In a second known approach, polyethylene terephthalate is reacted with an aqueous solution of an alkali metal hydroxide or carbonate (usually sodium hydroxide) at an elevated temperature to yield a water soluble salt of terephthalic acid and ethylene glycol. The reaction product is acidified to liberate terephthalic acid which is water insoluble and the terephthalic acid precipitate is separated by filtration or the like. This approach is exemplified by U.S. Patent Nos. 3,377,519, 3,801,273 and 3,956,088, all of which are hereby incorporated by reference in their entirety. U.S. Patent No. 3,544,622, the entire contents of which is hereby incorporated by reference in its entirety, similarly discloses a variation to previously known approaches wherein the reaction is carried out under conditions to produce a water insoluble salt of terephthalic acid which is separated, washed and then acidified to produce terephthalic acid. Additional patents have also been issued on various improvements to these processes, such as U.S. Patent Nos. 5,414,107, 5,223,544, 5,328,982, 5,045,122, 5,710,315, 5,532,404, 6,649,792, 6,723,873, 6,255,547, 6,580,005, 6,075,163, 7,173,150, 6,770,680, 7,098,299, and 7,338,981, the entire contents of each of which are hereby incorporated by reference in their entirety.

[0009] Empty beverage containers obtained from consumers may have aluminum caps lined with polyvinyl chloride or the like, wrap around polypropylene coated paper labels bonded to the surface with a polyvinyl acetate adhesive, residual sugars and, in some cases, polyethylene base caps for strengthening purposes. Without

costly controls, reaction conditions in the saponification processes disclosed in the above-noted patents tend to cause some dissolution of these extraneous materials which then become impurities in the recovered terephthalic acid and require costly purification. Therefore, various approaches have been considered for removing these materials from the containers prior to grinding or separating them from the polyethylene terephthalate after grinding. Such separation procedures represent a significant increase in the overall cost of recovery as well as an energy inefficient means of recycling the waste PET. Thus, while such saponification methodologies for the recycling of PET into its monomer constituents are generally considered to be successful, it is an expensive and economically inefficient way in which to obtain such monomers for producing new PET polymers for use.

[0010] Polyurethane dispersions are used in a range of coatings as film formers or binders including adhesives, as well as other technical products. Polyurethane dispersions are considered an environmentally friendly alternative to solvent-based binders and they are increasing in importance in the manufacturing sector. The general advantages of polyurethane plastics are their flexibility at low temperatures, selectable mechanical properties, resistance to certain chemicals and, depending on the structure, resistance to weathering and environmental degradation. In order to achieve sufficient commercially desirable properties, high molecular polymer weights are required. A polyurethane dispersion is advantageous in that even at very high molecular weights the viscosity is determined mainly by the particle size of the dispersed resin in the dispersion. Polyurethane dispersions are, therefore, a solution for replacement of organic solvent based polyurethane coatings with regard to environmental considerations. For these reasons, polyurethane dispersions have become highly desirable for replacement products for organic solvent based polyurethane coating.

[0011] Polyurethane dispersions typically have a fairly broad distribution of different particle sizes in solution. Generally, polyurethane particles found in a stable dispersion are spherical in shape and are in a size range between about 30 nm and 1000 nm, and have a milky white (sometimes yellowish) appearance. Particles below about 50 nm in size result in a dispersion appearing increasingly transparent, while dispersions having particle sizes above about 1000 nm tend to settle out of solution and generally such dispersions are not storable for extended periods of time.

[0012] The percentage by weight (solids) of the polyurethane compounds in commercial polyurethane dispersions typically ranges from about 25 to about 50% weight percent and, in some cases, up to 60% by weight. Polyurethane dispersions having a high solids content are advantageous in terms of transport and storage, increased dry film thickness in a single application, and drying effective mass per share (as less energy is spent for evaporation of the water). While polyurethane dispersions having an increased solids content are preferable, in the past their production and use have been difficult and many compositions that appeared initially useful, oftentimes failed after commercial implementation.

[0013] Polyurethanes generally have a density, although specifically dependent upon their composition, of about 1.1 g / ml and are therefore heavier than water. The tendency for polyurethanes to settle out of solution and/or coagulate is typically prevented by mutual repulsion of the particles (e.g., internal ionic groups), and/or by the viscosity of the liquid dispersant. Polyurethane dispersions may, therefore, include thickeners and emulsifiers in the aqueous phase in order to retard settling and increase storability. Non-ionic stabilization occurs through, for example, the (i) incorporation of hydrophilic polyethylene oxide chains within the polymer chain or as terminal groups, (ii) an ionic stabilization through the incorporation of anionic groups such as carboxy or sulfonate groups, and/or (iii) incorporation of cationic group such as amines. Non-ionic, anionic and cationic polyurethane dispersions can, therefore, be made depending upon application and starting material.

[0014] In addition to water, polyurethane dispersions may also contain a water-dilutable, high-boiling organic solvent/cosolvent (e.g., N-methylpyrrolidone (NMP)), as well as glycol ethers. The use of organic co-solvents allows, in some instances, the formation of hard polyurethane films at room temperature by partially dissolving the surface of the dispersion by evaporation of water and subsequent merger into a film (i.e., coalescence). The co-solvent evaporates, without any further heat treatment, and the film becomes harder and reaches its final strength. The co-solvents contribute to the emission of organic components (VOCs) and are, therefore, less desirable than fully aqueous dispersions. As an alternative to NMP, N-ethyl-2-pyrrolidone (NEP) may be used. In order that a desired high molecular weight polyurethane dispersion is produced, it is known in the art that the polyurethane polymers are preferably linear in structure—i.e., the polyurethane has very little branching in the polymer structure.

Highly branched polyurethanes result in polymers that gel thereby hindering subsequent film formation.

[0015] The basic building blocks of a polyurethane dispersion consist, therefore, of bifunctional subunits that react to form substantially linear polymer chains. These polymer chains are generally similar to those of well-known polyurethane and are constructed of similarly known components—i.e., isocyanates, polyols, and polyamines. Depending on the isocyanates used, a distinction can be made between aliphatic and aromatic polyurethane dispersions. The latter are generally less expensive to produce, but have the disadvantage of yellowing when exposed to light (with the exception of tetramethyl xylylene diisocyanate (TMXDI)). The fraction of incorporated isocyanate in a polyurethane dispersion is generally less than about 20% by weight, and more generally from about 8 to about 12% by weight.

[0016] Polyols (including the dfPET of the presently disclosed and claimed inventive concept(s)) are typically the largest mass fraction of the polyurethane compound. Through selection of a polyol with a correspondingly low glass transition temperature, a polyurethane can be generated with a corresponding low-temperature flexibility and have two or more hydroxyl groups at the terminal ends. The structure of the polyurethane polymer generally proceeds in two steps: first, a branched prepolymer is prepared from a combination of diisocyanates and polyols (for example, the dfPET of the presently disclosed and claimed inventive concept(s)). By using an excess of diisocyanate, the prepolymers are formed having isocyanates terminal groups. In the second step, the prepolymers (e.g., short-chain diols and/or diamines) are linked to longer-chain molecules during dispersion. Such dispersions often occur in the presence of water and/or include an organic solvent as a cosolvent.

[0017] The chain extender composition (which can be water in certain instances) can incorporate ionic groups into the polymer and thereby stabilize the water-dispersed polyurethane particles. A typical chain extender composition is dimethylol propionic acid (DMPA) which adds carboxy-functionality, while diolsulfonate can be used to add sulfonic acid groups useful for anionic polyurethane dispersions. With regard to anionic polyurethane dispersion, isocyanates and polyols are reacted to form a prepolymer. Via chain extension, a hydrophilic group is added—e.g., a diamine with pendant sulfonate. The resulting polyurethane polymer is permanently hydrophilic and can be dispersed in an aqueous medium. For the preparation of cationic dispersions, quaternary amino functional groups may be incorporated into the

polyurethane polymer using N-methyldiethanolamine (NMDEA), for example. As would be appreciated by one of ordinary skill in the art, there is a nearly endless list of variations that can be made to the polyurethane to incorporate different functional groups with variable functionality. The introduction of terminal, blocked isocyanates improves heat-activatable crosslinking reactions, for example. Additionally, the addition of epoxy groups and silane functionality into the polyurethanes is desirable, in some products, while pendant hydroxyl groups incorporated into the polyurethane polymer is desirable for crosslinking other reactive agents, such as those used in coating formulations.

[0018] Generally, it has been believed in the art that the dispersion of polyurethanes in water required high shear forces in order to obtain a corresponding finely dispersed product. This has been due to the high viscosity of the isocyanate prepolymer. Further, after chain extension the polyurethane polymers are even less dispersible in water. Therefore, there have been developed two traditional approaches to creating the finely dispersed products: (a) the prepolymer is dispersed directly in water and chain extension occurs under high shear forces and the chain extension takes place in the presence of the aqueous phase. In order to further lower the viscosity of the prepolymer, it can be heated prior to or during dispersion into the aqueous medium. Additionally, a co-solvent can be used to lower the viscosity of the prepolymer (e.g., acetone). The co-solvent will, however, generally remain in the finished dispersion and the co-solvent must be carefully chosen in order that it not interfere with the drying and curing of any coating composition made from the resulting polyurethane dispersion. (b) The complete polyurethane molecule is built up in a water-immiscible low-boiling solvent. The solution is dispersed with water, and the solvent is distilled or otherwise removed. As the solvent of choice is generally acetone in this method, this second process is referred to as the "Acetone Process." The advantage of the Acetone Process is that it has a high variability of starting materials that can be used as well as the absence of organic solvents. The disadvantage is the lower boiler efficiency compared to other techniques and the increased cost of acetone recovery. Alternatively, some have replaced the acetone with 2-butanone (MEK).

[0019] Typical applications of polyurethane dispersions include planar applications that allow the water to evaporate and, optionally, any cosolvents are able to leave the resulting polyurethane film. The drying of the polyurethane dispersion made films can occur at room temperature or at elevated temperatures, if permitted by the substrate.

Once the dispersion and substrate are in contact, when enough water has evaporated the operation is not reversible (coagulation). In the gaps between the polyurethane particles dispersed on the substrate, high capillary forces ensures that the polyurethane particles lose their phase boundaries, fuse together (coalescence), and form a homogeneous film after drying. Cosolvents may be used to increase and/or inhibit the time to coalescence.

BRIEF SUMMARY OF THE DRAWINGS

[0020] FIG. 1 is a modulated differential scanning calorimetry (“mDSC”) analysis of the white precipitate from the first reaction. The derivative of the heat capacitance ($J/(g^{\circ}C^2)$) indicated the presence of a melt at 120.95°C, indicating the presence of a small amount of oligomer.

[0021] FIG. 2 is liquid chromatography-mass spectrometry analysis of fully digested rPET.

[0022] FIG. 3 details liquid chromatography-mass spectrometry analysis of digested rPET having a MW distribution of 277-656 daltons.

[0023] FIG. 4 is a Fourier Transform Infrared Spectroscopy (FTIR) / Hyperion Reflectance analysis of the white precipitate from the first reaction.

[0024] FIG. 5 is an mDSC analysis of the white precipitate from the second reaction. The derivative of the non-reversible capacitance shows copious amounts of reactivity.

[0025] FIG. 6 is a Fourier Transform Infrared Spectroscopy (FTIR) / Hyperion Reflectance library match of FIG. 4. The top spectrum is of the white precipitate shown in FIG. 4, the matching bottom spectrum is Amoco TA-12, Terephthalic Acid.

[0026] FIG. 7 is an mDSC analysis of the white precipitate from the second reaction. The linear derivative of the non-reversible heat capacitance and reversible heat flow indicates that the white precipitate has reacted completely.

[0027] FIG. 8 shows the GPC data that illustrates that the rPET has been digested from a MW of 41,253 to a MW of 338-369 daltons.

[0028] FIG. 9 is a graphical representation of the effect on reaction time by the addition of water.

[0029] FIG. 10 is a graphical representation of the effect on reaction time by varying the amount of catalyst (i.e., zinc acetate) used in the reaction.

[0030] FIG. 11 is a graphical representation of the effect on reaction time versus the amount of catalyst.

[0031] FIG. 12 is a graphical representation of the effect of predigested rPET (Sample Ref. No. 188-17) on the digestion of green rPET.

[0032] FIG. 13 is a graphical representation of the effect of predigested rPET on the digestion of green rPET.

[0033] FIG. 14 is a graphical representation of the effect of predigested rPET (Sample Ref. No. 733-12, MW=1004) in a rPET digestion reaction.

[0034] FIG. 15 is a graphical representation of the effect of predigested rPET (Sample Ref. No. 188-17, MW=3381) in a rPET digestion reaction.

[0035] FIG. 16 is a graphical representation of the effect of predigested rPET on a clear rPET digestion.

[0036] FIG. 17 is a graphical representation of ^1H NMR spectra of an isolated white solid obtained in accordance with the present disclosure.

[0037] FIG. 18 is a graphical representation of ^1H NMR spectra over a 8.0 – 8.2 ppm range of an isolated white solid obtained in accordance with the present disclosure.

[0038] FIG. 19 is a graphical representation of ^1H NMR spectra over a 4.2 – 5.1 ppm range of an isolated white solid obtained in accordance with the present disclosure.

[0039] FIG. 20 is a graphical representation of ^1H NMR spectra over a 3.2 – 3.8 ppm range of an isolated white solid obtained in accordance with the present disclosure.

[0040] FIG. 21 is a graphical representation of ^{13}C NMR spectra over a 0 – 220 ppm range of an isolated white solid obtained in accordance with the present disclosure.

[0041] FIG. 22 is a graphical representation of ^{13}C NMR spectra over a 128 – 160 ppm range of an isolated white solid obtained in accordance with the present disclosure.

[0042] FIG. 23 is a graphical representation of ^{13}C NMR spectra over a 58-68 ppm range of an isolated white solid obtained in accordance with the present disclosure.

[0043] FIG. 24 is a graphical representation of ^1H NMR spectrum of an isolated white solid plus 2 drops of ethylene glycol obtained in accordance with the present disclosure.

[0044] FIG. 25 is a graphical representation of ^1H NMR spectrum of an isolated white solid plus 2 drops of ethylene glycol obtained in accordance with the present disclosure.

[0045] FIG. 26 is a graphical representation of ^1H NMR spectrum of an isolated white solid plus 2 drops of ethylene glycol obtained in accordance with the present disclosure.

[0046] FIG. 27 is a graphical representation of ^1H NMR spectrum of ethylene glycol in DMSO- d_6 .

[0047] FIG. 28 is a graphical representation of ^1H NMR spectrum of ethylene glycol in DMSO- d_6 .

[0048] FIG. 29 is a graphical representation of ^1H NMR spectrum of DMSO- d_6 Blank.

[0049] FIG. 30 is a graphical representation of ^1H NMR spectrum of DMSO- d_6 Blank.

[0050] FIG. 31 is a graphical representation of ^1H NMR spectrum over a 0 – 12 ppm range of DMSO- d_6 Blank.

[0051] FIG. 32 is a graphical representation of ^1H NMR spectra over a 6 – 12 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0052] FIG. 33 is a graphical representation of ^1H NMR spectra over a 6.8 – 8.8 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0053] FIG. 34 is a graphical representation of ^1H NMR spectra over a 4.1 – 5.4 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0054] FIG. 35 is a graphical representation of ^1H NMR spectra over a 2.8 – 4.0 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0055] FIG. 36 is graphical representation of ^1H NMR spectra over a 1.8 – 2.7 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0056] FIG. 37 is a graphical representation of ^1H NMR spectra over a 1.25 – 1.95 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0057] FIG. 38 is a graphical representation of ^1H NMR spectra over a 0 – 1 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0058] FIG. 39 is a graphical representation of ^1H NMR spectra over a 0 – 1.7 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0059] FIG. 40 is a graphical representation of ^{13}C NMR spectra over a 0 – 220 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0060] FIG. 41 is a graphical representation of ^{13}C NMR spectra over a 140 – 220 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0061] FIG. 42 is a graphical representation of ^{13}C NMR spectra over a 80 – 140 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0062] FIG. 43 is a graphical representation of ^{13}C NMR spectra over a 112 – 140 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0063] FIG. 44 is a graphical representation of ^{13}C NMR spectra over a 10 – 75 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0064] FIG. 45 is a graphical representation of ^{13}C NMR spectra over a 56 – 75 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0065] FIG. 46 is a graphical representation of ^{13}C NMR spectra over a 13 – 34 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

[0066] FIG. 47 is a graphical representation of ^{13}C NMR spectra over a 28-30 ppm range of a green semi-solid isolated from green toluene filtrate in accordance with the present disclosure.

DETAILED DESCRIPTION

[0067] Before explaining at least one embodiment of the presently disclosed and claimed inventive concept(s) in detail, it is to be understood that the presently disclosed and claimed inventive concept(s) is not limited in its application to the details of construction, experiments, exemplary data, and/or the arrangement of the

components set forth in the following description or illustrated in the drawings. The presently disclosed and claimed inventive concept(s) is capable of other embodiments or of being practiced or carried out in various ways. Also, it is to be understood that the phraseology and terminology employed herein is for purpose of description and should not be regarded as limiting.

[0068] Disclosed herein are functionalized polyethylene terephthalate (“PET”) polymers, functionalized derivatives of PET (“fPET”), and methods for digesting recycled (“rPET”) into lower molecular weight functionalized digested PET materials (“dfPET”). Methods of manufacturing and making these dfPET polymers are disclosed and claimed in U.S. Provisional Patent Application 61/337,568, filed on February 9, 2010 and U.S. Provisional Application Serial No. 61/404,621, filed October 6, 2010, the entirety of both of which are hereby expressly incorporated herein by reference. Given the present disclosure, teachings, and the disclosure and teachings of the above-referenced patent documents, one of ordinary skill in the art would be fully capable of digesting PET into dfPET.

A. Production of dfPET Compounds

[0069] Table A discloses general chemical structures representing the presently disclosed and inventive dfPET compounds. As shown in Table A, “n” can be any positive integer greater than 1—for example, n may be a positive integer from 2 to 500,000 and particularly, without limitation, “n” may be a positive integer from 2 to 2,000. R^1 and R^2 are independently hydrocarbons having at least one functional group selected from the group consisting of a hydroxyl group, an amino group, a carbonyl group and combinations thereof. For example, but not by way of limitation, R^1 and R^2 may be independently selected from the group consisting of H, OH, NH_2 , C=O, hydroxyl terminated hydrocarbons, diol terminated hydrocarbons, amine terminated hydrocarbons, diamine terminated hydrocarbons, carbonyl terminated hydrocarbons, amino alcohols consisting of a hydrocarbon terminated with an amine group and an alcohol group, hydroxyl carboxylic acids consisting of a hydrocarbon terminated with a hydroxyl group and a carboxyl group, and amides consisting of a hydrocarbon terminated with a carbonyl group and an amine group.

[0070] In addition to the functional groups described above, R^1 and R^2 can be independently hydrocarbons containing other functional groups such as a halo group, a thiol group, a phosphate group, and an ether group. The hydrocarbons can be

alkanes, alkenes, cycloalkanes, cycloalkenes and aromatics, for example but not by way of limitation

[0071] The hydroxyl terminated hydrocarbons includes, for example but not by way of limitation, hydroxyl terminated alkanes and branched hydroxyl terminated alkanes. The diol terminated hydrocarbons includes, for example but not by way of limitation, diol terminated alkanes and branched diol terminated alkanes. The amine terminated hydrocarbons includes, for example but not by way of limitation, amine terminated alkanes branched amine terminated alkanes. The diamine terminated hydrocarbons includes, for example but not by way of limitation, diamine terminated alkanes branched diamine terminated alkanes. The amino alcohols include, for example but not by way of limitation, alkanes terminated with an amine group and an alcohol group and branched amino alcohols terminated with an amine group and an alcohol group. The hydroxyl carboxylic acids include, for example but not by way of limitation, alkanes terminated with a carboxyl group and an alcohol group and branched hydroxyl carboxylic acids terminated with a carboxyl group and an alcohol group. The amides include, for example but not by way of limitation, alkanes terminated with an amine group and a carbonyl group and branched amides terminated with an amine group and a carbonyl group.

[0072] In one embodiment, R^1 and R^2 can be independently a linear or branched C_2 - C_{18} alkane having at least one functional group selected from the group consisting of a hydroxyl group, an amino group, a carbonyl group and combinations thereof. In another embodiment, R^1 and R^2 can be independently a linear or branched C_2 - C_8 alkane having at least one functional group selected from the group consisting of a hydroxyl group, an amino group, a carbonyl group and combinations thereof.

TABLE A

$\text{R}^1 \left[\text{O} - \text{C}(=\text{O}) - \text{C}_6\text{H}_4 - \text{C}(=\text{O}) - \text{OCH}_2\text{CH}_2\text{O} \right]_n$
$\left[\text{O} - \text{C}(=\text{O}) - \text{C}_6\text{H}_4 - \text{C}(=\text{O}) - \text{OCH}_2\text{CH}_2\text{O} \right]_n \text{R}^2$
$\text{R}^1 \left[\text{O} - \text{C}(=\text{O}) - \text{C}_6\text{H}_4 - \text{C}(=\text{O}) - \text{OCH}_2\text{CH}_2\text{O} \right]_n \text{R}^2$

[0073] The oligomeric form of polyethylene terephthalate shown in Table A can be produced from a reaction of polyethylene terephthalate and a glycolysis agent. Optionally a catalyst may be used in order to change the kinetics and/or specificity of the reaction of PET and the glycolysis agent. It should be understood that while certain examples or exemplary methodologies describe the use of such a catalyst, such use is optional (e.g., Ref. No. 188-14 of Table 6, herein below) and is well within the discretion of one having ordinary skill in the art.

[0074] In one embodiment, the glycolysis agent can be a polyol. The polyols may be, for example but not by way of limitation, ethylene glycol, diethylene glycol, triethylene glycol, propylene glycol, 1,3-propanediol, 2-methyl-1,3-propanediol, 1,3-butanediol, 1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol, 2,2-diethyl-1,3-propanediol, 1,7-heptanediol, 1,8-octanediol, 1,9-nonanediol, 1,4-cyclohexanedimethanol, 2-butyl-2-ethyl-1,3-propanediol, 2-butyl-2-diethyl-1,3-propanediol, 3-methyl-1,5-pentanediol, 2,2,4-trimethylpentanediol, 1,4-dimethylcyclohexane, 1,10-decanediol, 1,11-undecanediol, 1,12-dodecanediol, 1,13-tridecanediol, 1,14-tetradecanediol, 1,15-pentadecanediol, 1,16-hexadecanediol, 1,17-heptadecanediol, 1,18-octadecanediol, neopentyl glycol, cyclohexanediol, hydrogenated bisphenol A, glycerol, trimethylolpropane, trimethylolethane, diglycerine, triglycerine, pentaerythritol, dipentaerythritol, sorbitol, 1,4-polyisoprenediol, 1,2-polybutanediol, polybutanediol, and combinations thereof.

[0075] The oligomeric form of polyethylene terephthalate can comprise a reaction product of polyethylene terephthalate, a glycolysis agent, an amine and, optionally (as described hereinabove), a catalyst. In one embodiment, the amine can be hexamethyltetraamine. In another embodiment, the amine can be a diamine. The diamine can be an aliphatic diamine, an aromatic diamine and an alicyclic diamine. The aliphatic diamines may be, for example but not by way of limitation, ethylene diamine, trimethylene diamine, 1,2-diaminopropane, 1,3-diaminopropane, tetramethylene diamine, pentamethylene diamine, hexamethylene diamine, 1,8-diaminooctane, dodecamethylene diamine, and 2,2,4-trimethyl hexamethylene diamine.

[0076] The aromatic diamines may be, for example but not by way of limitation, p-phenylene diamine, o-phenylene diamine, m-phenylene diamine, m-toluylene diamine, p-xylene diamine, m-xylene diamine, 4,4'-diamino biphenyl, 3,3'-dimethyl-4,4'-diamino biphenyl, 3,3'-dichloro-4,4'-diamino biphenyl, 4,4'-diamino diphenyl ether, 3,4'-diamino diphenyl ether, 4,4'-diamino diphenyl propane, 4,4'-diamino diphenyl sulfone, 4,4'-diamino diphenyl sulfide, 4,4'-diamino benzanilide, 3,3'-dimethyl-4,4'-diamino diphenyl methane, 3,3'-diethyl-4,4'-diamino diphenyl methane, 4,4'-diamino anthraquinone, 3,3'-dimethoxybenzidine, α,α' -bis(4-aminophenyl)-p - isopropylbenzene, 1,5-diamino naphthalene, and 2,6-diamino naphthalene.

[0077] The alicyclic diamines may be, for example but not by way of limitation, 1,3-diamino cyclohexane, 1,4-diamino cyclohexane, 1,3-bis(aminomethyl)cyclohexane, isophorone diamine, piperazine, 2,5-dimethyl piperazine, bis(4-aminocyclohexyl) methane, bis(4-aminocyclohexyl)propane, 4,4'-diamino-3,3'-dimethyl dicyclohexylmethane, α,α' -bis(4-aminocyclohexyl)-p-diisopropylbenzene, α,α' -bis(4-aminocyclohexyl)-m-diisopropylbenzene, and methane diamine. Any one of, or any combination of, the diamine compounds as described above may be used. The glycolysis agents can be the same as those described previously and/or within the patent documents incorporated herein by reference.

[0078] The functionalized oligomeric form of polyethylene terephthalate can also be obtained from a reaction of polyethylene terephthalate, a glycolysis agent, a diacid and, optionally (as described hereinabove), a catalyst. In one embodiment, the diacid is selected from the group consisting of oxalic acid, malic acid, malonic acid, tartaric acid, glutaric acid, succinic acid, fumaric acid, adipic acid, sebacic acid, maleic acid,

azelaic acid, isophthalic acid, terephthalic acid, phthalic acid, terephthalic acid dichloride, 1,4-cyclohexanedicarboxylic acid, 1,3-cyclohexanedicarboxylic acid, naphthalenedicarboxylic acid, 4,4'-biphenyldicarboxylic acid, diphenylmethane-4,4'-dicarboxylic acid, and combinations thereof.

[0079] In addition to diacids, a compound having both a hydroxyl group(s) and a carboxylic group(s) can also be used in the reaction or can be combined with diacids in the reaction. The hydroxycarboxylic acids may be, for example but not by way of limitation, glycolic acid, 3-hydroxylactic acid, 4-hydroxybutyric acid, 4-hydroxyvaleric acid, 6-hydroxycaproic acid, hydroxybenzoic acid, hydroxypivalic acid, 1,2-dihydroxystearic acid, 2,2-dimethylolpropinoic acid, 2,2-dimethylolbutanoic acid, 2,2-dimethylolpentanoic acid, 2,2-dimethylolhexanoic acid, and 2,2-dimethyloloctanoic acid. The glycolysis agents can be the same as those described previously and/or within the patent documents incorporated herein by reference.






[0080] Similarly, the functionalized oligomeric form of polyethylene terephthalate can be produced from a reaction of polyethylene terephthalate, a glycolysis agent, an anhydride and, optionally (as described hereinabove), a catalyst. In one embodiment, the anhydride is selected from the group consisting of propionic anhydride, maleic anhydride, succinic anhydride, methacrylic anhydride, glutaric anhydride, trimellitic anhydride, pyromellitic anhydride, phthalic anhydride, tetrabromophthalic anhydride, tetrachlorophthalic anhydride, hexahydrophthalic anhydride, tetrahydrophthalic anhydride, and combinations thereof. The glycolysis agents are the same as those described previously and/or within the patent documents incorporated herein by reference.

[0081] The polyethylene terephthalate polymer used in the reactions described herein is selected from the group consisting of recycled polyethylene terephthalate, virgin polyethylene terephthalate and combinations thereof. The optional catalyst is a transesterification catalyst, generally, and can be metal acetates, metal organocarboxylic acid complexes, oxides, halides, and/or thiocyanates, for example. In one non-limiting embodiment, the catalyst is zinc acetate and/or zinc propionate. Alternatively but not by way of limitation, the catalyst can be silica chloride.

[0082] Table B shows some examples of the resulting dfPET polymeric structures derived from the use of several different glycolysis agents along with propionic




anhydride, in which “n” can be any positive integer equal to or greater than 1—for example, “n” may be a positive integer from 1 to 500,000.

TABLE B

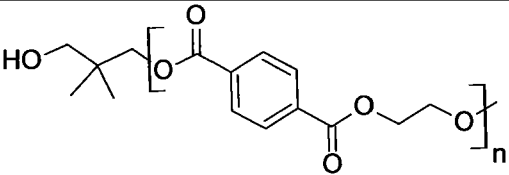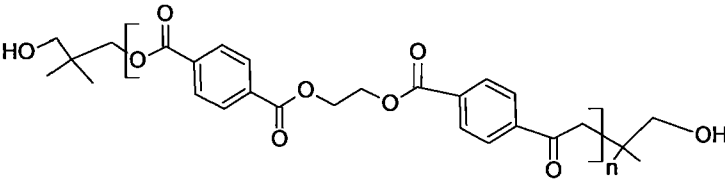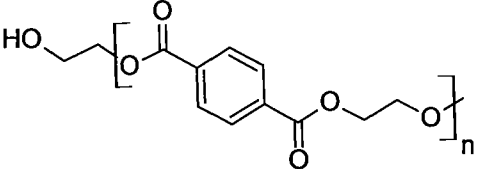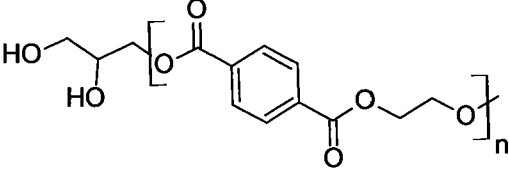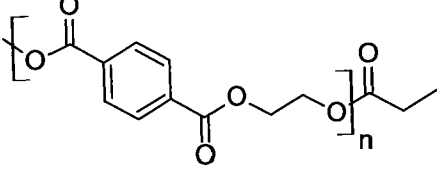Glycolysis Agent	Resulting dfPET Structure
Neopentyl glycol	 <p>AND/OR</p> 
Ethylene Glycol	
Glycerol	
Propionic Anhydride	


[0083] Table A1 shows additional examples of the general chemical structure of the presently disclosed inventive concept(s) including the dfPET compound. As shown in Table A1, R¹, R² and n are the same as those described previously with respect to Tables A and B. X₁, X₂, X₃ and X₄ are identical or different and each independently represents a hydrogen atom or a halogen atom, provided that X₁, X₂, X₃ and X₄ are not hydrogen atoms at the same time.

TABLE A1

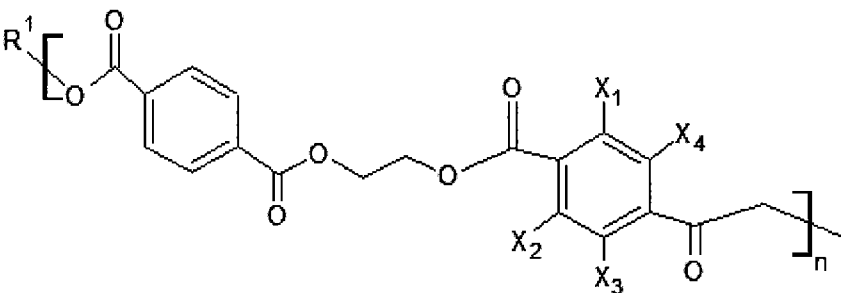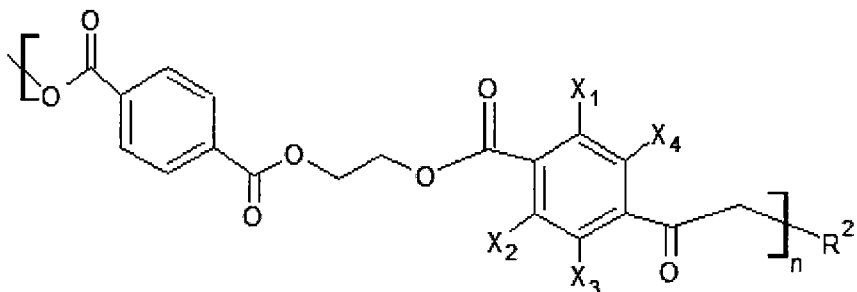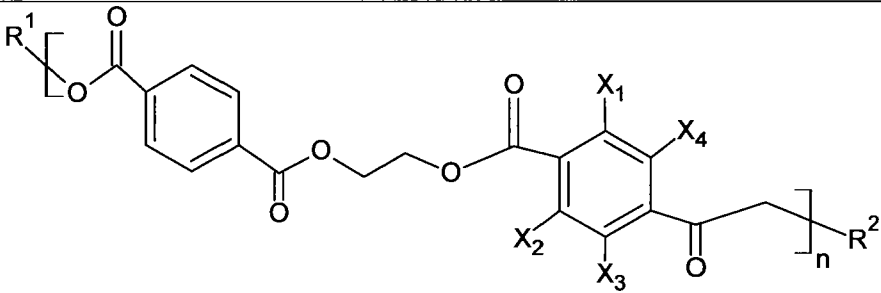[0084] The oligomeric form of polyethylene terephthalate shown in Table A1 can be produced from a reaction of polyethylene terephthalate, a glycolysis agent, a halogen-substituted terephthalic acid and, optionally (as described hereinabove), a catalyst. The polyethylene terephthalate, the glycolysis agent and the catalyst are the same as those described previously with respect to Tables A and B.

[0085] The halogen-substituted terephthalic acid can be presented by a general formula (I):



wherein X_1 , X_2 , X_3 and X_4 are identical or different and each independently represents a hydrogen atom or a halogen atom, provided that X_1 , X_2 , X_3 and X_4 are not hydrogen atoms at the same time.

[0086] Examples of the halogen-substituted terephthalic acid represented by the general formula (I) include, but are not limited to, 2-fluoroterephthalic acid, 2-chloroterephthalic acid, 2,5-difluoroterephthalic acid, 2,6-difluoroterephthalic acid, 2,3-difluoroterephthalic acid, 2,5-dichloroterephthalic acid, 2,6-dichloroterephthalic acid, 2,3-dichloroterephthalic acid, 2,3,5-trifluoroterephthalic acid, 2,3,5-trichloroterephthalic acid, 2,3,5,6-tetrafluoroterephthalic acid, 2,3,5,6-tetrachloroterephthalic acid, 2,3,5-trifluoro-6-chloroterephthalic acid, and combinations thereof.

[0087] The halogen-substituted terephthalic acid represented by the general formula (I) can be produced by any one of several known methods. For example but not by way of limitation, hydrolyzing the correspondent halogen-substituted terephthalinitrile substantially as described in U.S. Patent No. 5,792,887, the entire disclosure of which is hereby incorporated by reference.


[0088] The oligomeric form of polyethylene terephthalate in Table A1 can also be produced by a reaction of polyethylene terephthalate, a glycolysis agent, an amine, a halogen-substituted terephthalic acid and optionally a catalyst; and/or a reaction of polyethylene terephthalate, a glycolysis agent, a diacid and/or a compound having a

hydroxyl group(s) and a carboxylic group(s), a halogen-substituted terephthalic acid and, optionally (as described hereinabove), a catalyst; and/or a reaction of polyethylene terephthalate, a glycolysis agent, an anhydride, a halogen-substituted terephthalic acid and, optionally (as described hereinabove), a catalyst. The polyethylene terephthalate, the glycolysis agents, the halogen-substituted terephthalic acid, the catalyst, the amine, the diacid, the compound having a hydroxyl group(s) and a carboxylic group(s), and the anhydride are the same as those described previously with respect to Tables A and B.

[0089] In the functionalized oligomeric form of polyethylene terephthalate of Table A1, the halogen functional group(s) can be modified by or substituted with one or more hydroxyl group(s). The functionalized oligomeric form of polyethylene terephthalate containing halogen functional group(s) can also be hydrolyzed to form hydroxyl group(s) using any one of several known methods. For example but not by way of limitation, the functionalized oligomeric form of terephthalate containing halogen function group(s) can be hydrolyzed by an alkaline condition. The hydrolysis can be carried out with hydroxide of alkaline metal (sodium hydroxide, potassium hydroxide or lithium hydroxide etc.), hydroxide of alkaline earth metal (barium hydroxide or calcium hydroxide etc.), hydrogen carbonate (sodium hydrogen carbonate and calcium hydrogen carbonate) and carbonate (sodium carbonate or potassium carbonate etc.)

[0090] As a result, the functionalized oligomeric form of polyethylene terephthalate obtained is shown in Table A2. R^1 , R^2 and n are the same as those described previously with respect to Tables A, B and A1. Y_1 , Y_2 , Y_3 and Y_4 are identical or different and each independently represents a hydrogen atom or a hydroxyl group, provided that Y_1 , Y_2 , Y_3 and Y_4 are not hydrogen atoms at the same time.

TABLE A2

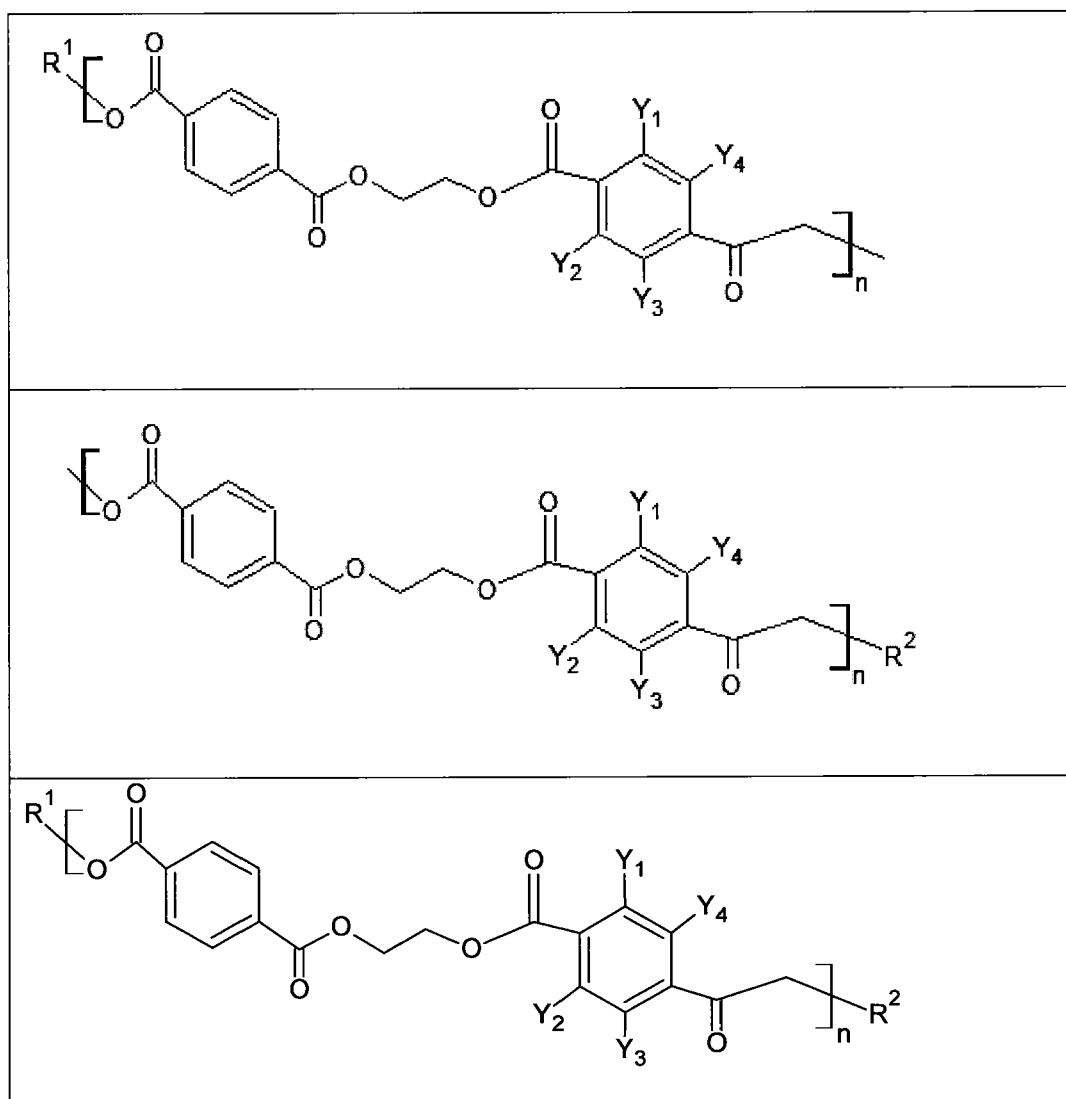

[0091] Such an oligomeric form of polyethylene terephthalate containing hydroxyl group(s) (as shown in Table A2) can be further converted into other widely useful chemical products. In one particular aspect but not by way of limitation, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can be converted to the corresponding alkene(s) by dehydration in the presence of a catalyst composition. The catalyst composition can be an acid catalyst, for example but not by way of limitation. In one non-limiting embodiment, the catalyst composition is concentrated sulfuric acid or concentrated phosphoric acid. The catalyst composition can also be a solid acid catalyst. One such methodology utilizing a solid acid catalyst composition for dehydrating an alcohol is described in U.S. Patent No. 4,049,736, the entire disclosure of which is hereby incorporated by reference. As such, the solid acid catalyst may be, for example but not by way of limitation, a bulk oxide. In one non-limiting embodiment, the bulk oxide may be alumina, zirconia, titania, silica, niobia, and combinations thereof.

[0092] The solid acid catalyst may be, for example, and without limitation, a zeolite. The meaning of the expression “zeolite” is well understood to those of ordinary skill in the art and a detailed recitation of all known zeolite compositions is not required therefore. Without limitation, the zeolite may include, for example a hydrated aluminosilicate of the alkaline and alkaline earth metals. Suitable zeolites would be understood and determinable by those of ordinary skill in the art. In an embodiment, the zeolite may be, for example and without limitation, of natural or synthetic origin. In an embodiment, the zeolite may be, for example and without limitation, crystalline. In an embodiment, the zeolite may be, for example, and without limitation, a pentasil-type zeolite. In an embodiment, the zeolite may be, for example and without limitation, HY, H-BETA, H-Mordenite or ZSM-5 zeolite. The expressions “HY”, “H-BETA”, “H-Mordenite” and “ZSM-5” would be understood to those of ordinary skill in the art. In an embodiment, the zeolite may be, for example and without limitation, ZSM-5 zeolite. The expression “ZSM-5” is used interchangeably with the expression “H-ZSM-5” throughout this entire specification. A modifying agent can be added into the above solid acid catalyst to enhance the surface acidity. Examples of the modifying agent include, but are not limited to, phosphate or sulfate compounds such as phosphoric acid or sulfuric acid, or a derivative thereof, or a transition metal oxide such as tungsten trioxide, ZrO_2 and MoO_3 , or a derivative thereof,

[0093] The resulted alkenes can be used as chemical intermediates or building blocks to produce other products applicable to and/or useful within a number of industries. Since the alkenes can be produced from waste products, such as beverage containers, made from polyethylene terephthalate, the production of valued chemicals from the alkenes has attracted considerable interest. In this regard, production of an alkene from oligomeric forms of polyethylene terephthalate (or other polyester polymers) containing hydroxyl group(s) is a one significant advantage and/or benefit of the presently disclosed and claimed inventive concept(s).

[0094] Metal alkoxides are widely used in industry as catalysts and stoichiometric reagents. These reagents are used in diverse reaction chemistries such as alkylation, isomerization, rearrangements, condensations, transesterifications and eliminations. The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can react with a metal reagent or a metal salt to form the corresponding metal alkoxide. In one particular aspect, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) reacts with at least a stoichiometric amount of a metal reagent. The metal reagent can be, but are not limited to a Group I metal, a Group II metal, zinc, a metal alloy of a Group I metal, a metal alloy of a Group II metal, a compound of zinc, or combinations thereof. In one embodiment, a metal reagent used includes K, Li, Na, Cs, Mg, Ca or Zn. In the case that a metal reagent is used, the reaction takes place above the melting point of the metal. The synthesis and isolation of metal alkoxides using a metal reagent is substantially described in U.S. Patent No. 6,444,862, the entire disclosure of which is hereby incorporated by reference.

[0095] The metal alkoxide for use within the presently claimed and disclosed inventive concept(s) can also be formed by reaction of the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) with a metal salt. In one embodiment, the metal salt is a metal halide. Typically, the metal halide reacts with the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) in the presence of ammonia. Ammonia is used to remove the halide. Optionally, inert solvents such as benzene, toluene, xylene, octane, or cyclohexane may be used as the solvent or as a cosolvent. The ammonia reactant is sparged into the reaction medium until substantially all of the ammonium halide is formed.

[0096] Ethers are commercially important compounds and widely used with respect to solvents, propellants, fillers, food additives, fuel additives, cleaners, health care formations and the manufacture of polymers, etc. Ethers can also be found in many

familiar commercial products from hair spray to cosmetics. In the presently disclosed and claimed inventive concept(s), the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can be converted to the corresponding symmetric ether by condensation in the presence of an acid catalyst. In one embodiment, a strong acid (such as sulfuric acid) is added to the solution of the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) and then the reaction mixture is heated.

[0097] The symmetric ether can also be produced from the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) using metal oxides as catalyst. First, a feedstock with the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) is heated to a temperature greater than about 150 degree Celsius. Thereafter, the feedstock is passed through a catalyst comprising a metal oxide. The metal oxides can be, but are not limited to, zirconia, hafnia, titania, alumina, and combinations thereof. In some embodiments, the metal oxide is selected from the group consisting of titania and alumina. Ether synthesis of a polymer containing hydroxyl group(s) using such a metal oxide as catalyst is described in U.S. Patent Pub. 2008/0319236, the entire disclosure of which is hereby incorporated by reference.

[0098] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also be converted to an unsymmetrical ether using the metal alkoxide of the oligomeric form of polyethylene terephthalate produced as taught by the presently disclosed and claimed inventive concept(s). For example but not by way of limitation, the Williamson ether synthesis process may be utilized. The Williamson ether synthesis process involves converting an alkoxide ion into an ether by reaction with a hydrocarbyl halide. Alternatively, the ether can be produced by reaction of the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) with a hydrocarbyl halide in the presence of a substantial, stoichiometric excess of water soluble, hygroscopic base. In one embodiment, the water soluble, hygroscopic base is sodium hydroxide. Initially, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) reacts with at least a 20 molar percent stoichiometric excess of a water-soluble hygroscopic base to form an alkoxide anion. The alkoxide anion is then reacted with a source of an alkyl moiety such as a hydrocarbyl halide or the like to form ether. An ether synthesis from alkoxide anions is described in U.S. Patent Pub. 2010/0280277, the entire disclosure of which is hereby incorporated by reference.

[0099] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also react with organic silyl halides in the presence of an acid acceptor to produce the corresponding silyl ether. Silyl ethers are usually used as protecting groups for alcohols in organic synthesis, especially for synthesis of pharmaceutical ingredients.

[00100] Esters encompass a large family of organic compounds with broad applications in medicine, biology, chemistry and industry. Esters are produced by reaction of acids with compounds containing hydroxyl group(s). In the presently disclosed and claimed inventive concept(s), the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can react with various inorganic and organic acids to form the corresponding esters. For example, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can react with inorganic acids such as nitric acid, phosphoric acid and sulfuric acid to form the corresponding nitrate, phosphate and sulfate, respectively. The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also react with organic acids and anhydrides to form corresponding organic esters in the presence of an inorganic acid catalyst. The acids include organic monoacids and diacids. The esters can be converted to a thionoester using Lawesson's reagent.

[00101] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also be converted to a sulfonate by reacting the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) with an appropriate sulfonic acid. The sulfonic acid can be an alkyl sulfonic acid, an aryl sulfonic acid, an alkyl aryl sulfonic acid or combinations thereof.

[00102] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can react with sulfonyl halides to form the corresponding sulfonates. The sulfonyl halides can be tosyl chloride, brosyl, mesyl and trifyl. As a result, a tosylate, a brosylate and a triflate can be produced. These are important chemical intermediates used widely in organic synthesis. For example, tosylate and triflate can be converted to the corresponding amines and esters.

[00103] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also be converted to the corresponding halides. In one embodiment, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can react with a hydrogen halide to form the corresponding halide in the presence of sulfuric acid. The reaction is carried out with stoichiometric excess of the hydrogen halide

relative to the oligomeric form of polyethylene terephthalate containing hydroxyl group(s).

[00104]In another embodiment, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can react with thionyl halide in the presence of a base catalyst to generate the corresponding halide. The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) is dissolved in aprotic polar solvent in the presence of base catalyst and then thionyl halide is slowly added at a low temperature in a range of from about -20°C to about 10°C. The halide may be selected from the group consisting of F, Cl, Br, I, and combinations thereof. In one non-limiting embodiment, Cl or Br is used. Among the thionyl halides, thionyl chloride and thionyl bromide are commercially available. Thionyl chloride is preferred in one non-limiting embodiment because it is readily available and generates less heat during the reaction. The aprotic polar solvents used include, but are not limited to, acetonitrile, methylene chloride, chloroform, carbon tetrachloride and diethyl ether. Among them, acetonitrile, methylene chloride or chloroform is more desirable.

[00105]Either organic or inorganic salts can be used as the base catalyst even in excess amount. Examples of the organic base include, but are not limited to, triethylamine, tripropylamine, N,N-diisopropylamine, and pyridine. Examples of the inorganic base include, but are not limited to, potassium hydroxide, sodium carbonate and potassium carbonate. In yet another embodiment, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can react with phosphorous halides to form the corresponding halides.

[00106]The halides are very important chemical intermediates that can be used to generate other useful chemicals. For example, the halides can be used to make the corresponding amine derivatives, which are widely used as intermediates for the synthesis of various organic compounds as well as pharmaceutical and agro-chemical compounds. In one embodiment, the halide is dissolved in aprotic polar solvent and reacts with amine in the presence of a base catalyst. The reaction can be carried out at temperatures ranging from about 0°C to about 200°C, while refluxing under pressure within a range of from about 1 to about 100 atm depending on the amine. The polar solvents include, but are not limited to, acetonitrile, toluene, dimethylformamide, dimethylacetamide, dioxane, tetrahydrofuran, and pyridine. Among them, acetonitrile and dimethylacetamide may be, in one non-limiting embodiment, desirable. The base catalysts include either organic base such as pyridine, triethylamine, diisopropylamine

or the inorganic base such as sodium carbonate, potassium carbonate, calcium carbonate, sodium hydroxide, potassium hydroxide, sodium hydride, potassium hydride, calcium hydride, sodium methoxide, and sodium ethoxide. Among them, sodium carbonate and potassium carbonate are recommended. Any amine compound can be used for the reaction. In one embodiment, alkyl amine and cycloalkyl amine are used. An exemplary process of converting halides to amines for use with the presently disclosed and claimed inventive concept(s) is described in U.S. Patent No. 6,566,525, the entire disclosure of which is hereby incorporated by reference.

[00107] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also be oxidized to form the corresponding aldehydes, ketones and acids using oxidizing agents. The oxidizing agents can be oxygen (air) or hydrogen peroxide. In one specific aspect, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can be oxidized by oxygen or air in the presence of catalysts. The oxidation can be carried out using ruthenium, cobalt, copper, palladium, and platinum metal catalysts with additives such as potassium carbonate, sodium bicarbonate, pyridine, molecular sieves and phenanthroline. Stoichiometric metal oxidants such as chromium (VI) compound and active manganese dioxide have also been widely used as oxidation catalysts. In one non-limiting embodiment, a ruthenium-carrying alumina can be used a catalyst. In another non-limiting embodiment, a ruthenium compound and a dioxybenzene or its oxidant is used as a catalyst. In yet another non-limiting embodiment, a manganese-containing octahedral molecular sieve can be used as the catalyst. The use of such catalysts and their respective oxidation processes are described in U.S. Patent Nos. 7,169,954; 6,486,357; and 6,166,264, the entire disclosures of which are hereby incorporated by reference in their entirety.

[00108] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can be oxidized by hydrogen peroxide in the presence of a catalyst. In one non-limiting embodiment, the catalysts can be, but are not limited to tungsten catalyst such as peroxotungstate, sodium tungstate, and tungstic acid. The oxidation of an alcohol using a hydrogen peroxide and tungsten catalyst is described in U.S. Patent Pub. 2008/0269509, the entire disclosure of which is hereby incorporated by reference. In another non-limiting embodiment, the catalyst is a rhenium based catalyst having a co-catalyst selected from the group consisting of HBF_4 and salts thereof. The rhenium based catalyst can be an unsupported and/or a supported

rhenum based catalyst. The supported rhenum based catalysts usually comprise an inert polymeric matrix (support) and a rhenum compound (active part of the catalyst). Examples of rhenum compounds include, but are not limited to, ReO_3 , Re_2O_7 , CH_3ReO_3 , a C_2 to C_{20} alkyl rhenum oxide, a C_3 to C_{10} cycloalkyl rhenum oxide. Oxidation of an alcohol using hydrogen peroxide and a rhenum based catalysts is described in U.S. Patent Pub. 2011/0124889, the entire disclosure of which is hereby incorporated by reference. The produced aldehydes or ketones can be further converted to the corresponding alkenes by reaction with a triphenyl phosphonium ylide (often called a Wittig reagent), for example but not by way of limitation.

[00109] The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also react with hydrogen sulfide in the presence of a catalyst to produce the corresponding thiol. In one embodiment, the catalyst comprises a support, a base and a metal compound. The support is a catalytically active carrier that contains base and/or acid active sites.

[00110] Examples of such supports include, but are not limited to, alumina, zirconia, silica, titania, alumin-silicate (zeolites) and magnesia-aluminates. The base is an alkali metal, alkaline earth metal bicarbonate, carbonate, oxide, or hydroxide. In one non-limiting embodiment, alkali metal bases and hydroxides are used. Examples of suitable bases include, but are not limited to, sodium hydroxide, potassium hydroxide, magnesium hydroxide, calcium hydroxide, sodium bicarbonate, sodium carbonate, magnesium oxide and calcium oxide. In one non-limiting embodiment, potassium hydroxide and rubidium hydroxide are used as base.

[00111] The metal compound may be an acid or an alkali metal or alkaline earth metal salt thereof. The metals are generally from Group III to XII of the Periodic Table and include tungsten, molybdenum, chromium, manganese, titanium, zirconium, cobalt and nickel. In one non-limiting embodiment, a tungsten compound is used. Examples of the metal compounds include, but are not limited to, WO_3 , K_2WO_4 , Na_2WO_4 , MoO_3 , K_2MoO_4 , Na_2MoO_4 , phosphotungstate, phosphomolybdate and silicotungstate. In one embodiment, WO_3 or K_2WO_4 are used. Synthesis of thiols from alcohols is described in U.S. Patent No. 5,874,630, the entire disclosure of which is hereby incorporated by reference.

[00112] The thiol can be further converted to thioester condensate by reaction with acids in the presence of a solvent using a tetravalent hafnium compound as a condensation catalyst. Generally, the acids can be carboxylic acids including

monocarboxylic acids, dicarboxylic acids, tricarboxylic acids, and tetracarboxylic acids. The tetravalent hafnium compound is a hafnium chloride (IV), a hafnium chloride (IV)(THF)₂, or hafnium (IV)t-butoxide. The solvent can be a polar solvent, a nonpolar solvent, or a combination of a polar and a nonpolar solvent. In one non-limiting embodiment, a nonpolar solvent is preferred and examples of the nonpolar solvent include, but are not limited to, toluene, xylene, mesitylene, pentamethylbenzene, m-terphenyl, benzene, ethylbenzene, 1,3,5-tri-isopropyl benzene, o-dichlorobenzene, 1,2,4-trichlorobenzene, naphthalene, and 1,2,3,4-tetrahydronaphthalene (tetralin). Production of condensation thioester is described in U.S. Patent No. 7,301,045, the entire disclosure of which is hereby incorporated by reference.

[00113] In addition, the oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can be oxidized by oxygen to produce the corresponding hydroperoxide. The oligomeric form of polyethylene terephthalate containing hydroxyl group(s) can also react with reducing agents to producing the corresponding alkanes and/or alkenes.

[00114] Broadly, the process of making at least one dfPET polymer according to the presently claimed and disclosed inventive concept(s) and, more particularly but without limitation, those dfPET polymers shown in Tables A, B, A1, and/or A2, includes the step of reacting polyethylene terephthalate scrap and/or waste, and/or virgin material and/or combinations thereof with ethylene glycol (i.e., a glycolysis agent) containing a catalyst at an elevated temperature and at atmospheric pressure (although one of ordinary skill in the art would appreciate that the reactions can also be run at elevated pressures in order to modify the kinetics of the reaction) for a sufficient time to decrease the molecular weight of the PET scrap to an oligomeric state. In one embodiment, the catalyst is a zinc acetate catalyst capable of decreasing the amount of activation energy for depolymerization of polyethylene terephthalate. In an additional step, precipitated PET oligomer is recovered from the reaction mixture and dried. In another embodiment, neopentyl glycol is used as the glycolysis agent. One of ordinary skill in the art would appreciate that other glycolysis agents such as, but not by way of limitation, glycerol and propionic anhydride, may also be used. As can be appreciated, the resulting dfPET polymeric material (and chemical structure) is determined by the glycolysis agent used and one of ordinary skill in the art, given the present disclosure, would appreciate and be capable of producing any

specific dfPET material having a desired chemical structure—for example but not by way of limitation, the dfPET polymers substantially as shown in Tables A, B, A1, and/or A2.

[00115] While the process of the presently disclosed and claimed inventive concept(s) can be used to treat a wide variety of polyethylene terephthalate scrap or waste, it is particularly adaptable for processing used polyethylene terephthalate beverage containers. As used hereinafter, the term "scrap" means scrap, waste and/or used products of polyethylene terephthalate. The term "scrap" also includes within its definition varying sizes and shapes of waste and/or used products of polyethylene terephthalate. Scrap PET, as used herein, may include whole products made of PET (e.g., a beverage bottle) or further processed products made of PET. In one embodiment, the further processing includes the chipping or shredding of PET products in order to produce a scrap PET material suitable for use in the disclosed methodologies. Alternatively, the further processing may include nitrogen jet milling of the PET products in order to produce a scrap PET material having an average size of about 10 microns. One of ordinary skill in the art would appreciate that the further processing step may include a multitude of processing steps including, but not limited to, pin milling, jet milling, media milling, rolling and crushing, all of which would be understood to fall within the broad disclosure presented herein.

[00116] In one embodiment, further processing of the PET raw material is accomplished via milling. For example, recycled bulk PET (rPET) having a particle size in the range of 100-200 microns was obtained from Clean Tech Incorporated (Dundee, MI). This bulk recycled PET is formed from PET plastic bottles that are sorted by color, ground, washed and repelletized and dried under vacuum conditions. The recycled bulk PET was in the form of grayish pellets. Further processing for this embodiment entailed liquid nitrogen jet milling of the recycled bulk PET pellets according to the conditions outlined in Table 1 and performed by LiquaJet/The Jet Pulverizer Co. (Moorestown, NJ). The processing steps performed by LiquaJet are proprietary methods kept as a trade secret by the company. Generally, the material was milled with liquid nitrogen in order to obtain a product having a desired state. The results of particle size shown in Table 1 were determined on a Wet Horiba Ri:1.5750 (HORIBA Ltd., Austin, TX).

TABLE 1

Test Condition	Avg. Particle Size of rPET in microns.	Grit
1A	64.4	NO
1B	59.1	NO
2A	33.1	NO
2B	83.0	NO
3A (2A 2X)	27.4	NO
4A	51.6	NO
4B	51.6	YES
5A	108.5	YES
5B	153.0	YES

[00117] After a second milling using the liquid nitrogen jet milling process, the rPET material was found to have an average size of 27.4 microns. Further processing (i.e., additional liquid jet milling steps) would achieve a specification of rPET material having an average size of less than about 33 microns and, more particularly, from about 7 to about 10 microns. Although such small sizes of rPET can be obtained, it was found that the process(es) according to the presently disclosed and claimed inventive concept(s) do not require such a small starting size of the rPET. Rather, it was found that rPET having a size of from about 25 microns to about 100 microns can be used and, more particularly, rPET scrap having a size of from about 50 microns to about 100 microns. Such sizes should not be considered as limiting, however, as the presently disclosed and claimed inventive concept(s) have been found to be suitably applied to rPET scrap having a size equal to or greater than 200 microns.

[00118] The depolymerization of the rPET into a reactive, lower melting point (mp) material was accomplished according to novel methodologies of the presently disclosed and claimed inventive concept(s). The molecular weight of the polymer is reduced until a molecular weight of 280-680 is achieved, for example but not by way of limitation. At this molecular weight the dfPET has a lower melting point (mp) and increased reactivity with compounds such as those described hereinafter. In one non-limiting embodiment, such a compound that reacts with the dfPET is an isocyanate for the production of a polyurethane polymer.

[00119] An initial reaction scheme for depolymerization of the rPET into a reactive lower melting point material according to the presently disclosed and claimed inventive concept(s) utilized the reactant weights given in Table 2.

TABLE 2

Reactants	Amount
Deionized Water	300 ml
rPET (TABLE A – 1A)	48.4393 g
Anhydrous Sodium Acetate	3.0263 g
50% by Weight Sodium Hydroxide	30 ml

[00120] The reactants were all weighed and added to the reaction kettle. The kettle was set up with a stir bar and a condenser with cold water running through it. A heating mantle was used to heat the mixture as it was stirring. The temperature of the reaction kettle was maintained at a constant temperature of from about 150-175°C. The reaction was allowed to proceed for 6 hours at which time the rPET had completely dissolved. The reaction solution was then cooled to a uniform highly basic solution. A small sample of the cooled mixture was placed into a beaker and concentrated hydrochloric acid was added until a white precipitate formed.

[00121] More particularly, the procedure for the reaction of Table 2 was as follows:

1. 250 ml of water was added to the reaction kettle.
2. 48.4393g of rPET (Table 1 – Sample 1A) was added to the reaction kettle.
3. 3.0262g of anhydrous sodium acetate catalyst was added to the reaction kettle.
4. 30 ml of 50% by weight sodium hydroxide was added.
5. The reaction was heated to a temperature of 150-175°C.
6. Water (350mL) was added in two increments.
7. When the rPET was completely dissolved (after approximately 6 hours), the reaction kettle was allowed to cool to room temperature.
8. An aliquot of the solution was removed from the kettle and acidified with concentrated hydrochloric acid which afforded a white precipitate.

[00122] The white precipitate was dried and characterization by Differential Scanning Calorimetry (DSC), FTIR, and LC-MS (Liquid Chromatography with Mass Spectrometric detection) revealed that the resultant products were primarily the monomers: ethylene glycol and terephthalic acid. Modulated DSC (mDSC) was used to determine the material's melting point. A small melt occurring at 109°C indicated, moreover, that a minor amount of bis(2-hydroxyethyl) terephthalate (i.e., a glycol – terephthalic acid – glycol trimer) residually remained in the white precipitate (FIG. 1, mDSC heat flow). This melting point of 109°C is consistent with a commercially available bis(2-hydroxyethyl) terephthalate material supplied by Sigma Aldrich Co. (CAS# 959-26-2). The reaction scheme outlined above and in Table 2 shows that an atmospheric pressure based system could be used to depolymerize rPET into oligomers of rPET, i.e., a resin replacement or extender composition (indicated by the 109°C melt on the mDSC). LC-MS analysis indicated, however, that the reaction according to Table 1 had proceeded to near completion. The chemical structure and molecular weight analysis indicated that the majority of the white precipitate was actually terephthalic acid or monomer, not a rPET oligomer(s) having a “n” equal to or greater than 2. As such, the reaction conditions were modified in order to obtain greater quantities of oligomeric rPET having varying molecular weights—i.e., having a “n” equal to or greater than 2.

[00123] The depolymerization process according to Table 2 is believed to proceed via basic hydrolysis of the ester linkages of the rPET in basic conditions using a sodium acetate catalyst. In order to obtain a low molecular weight oligomeric digested rPET species, a reaction was designed such that every additional mole of ethylene glycol (EG) added would be capable of reducing the molecular weight of the polymer through transesterification. Exemplary reactions were carried out in which 5 equivalents of ethylene glycol was added for every mole of terephthalic acid. These exemplary reactions are summarized in Table 3 and were carried out in accordance with the methods given for the initial reaction set forth in Table 2.

TABLE 3

	Reaction 2	Reaction 3
Ethylene glycol (g)	620	620
PET (FW = 192g/mol) (g)	384	384
Moles PET	2	2
ZnOAc (g)	10	20
Moles EG Added	10	10

[00124] The exemplary reactions given in Table 3 were considered to be complete once the pellets of rPET were completely dissolved and the reaction reached a homogeneous, liquid phase. In each case, this required approximately 6 hours. The precipitates formed from Reaction #2 and Reaction #3 were added directly to reagent grade ethyl alcohol (Ethyl Alcohol CAS 64-17-5 90%, Methyl Alcohol CAS 67-56-1 5%, Isopropyl Alcohol CAS 67-63-0 5%) and made into a slurry. The slurries were then dried in an oven at 32°C for 24 hrs. These resultant white products were then characterized analytically.

[00125] In each reaction, the recovered and dried precipitates comprised oligomeric units of rPET, i.e., the recovered and dried precipitates were primarily composed of incompletely digested oligomers of rPET (rPET wherein n is greater than or equal to 2). The mDSC analysis of the precipitates samples, according to the exemplary reactions of Table 2 (FIG. 1), showed that the material had reacted completely.

[00126] GPC characterization of the molecular weight distribution was also performed. The white product collected from these reactions was analyzed by LC/MS and Gel Permeation Chromatography to determine the molecular weight distribution of the product mixture. LC/MS analysis of the product (FIG. 2) shows three main peaks in the chromatogram. The first broad peak with a maximum at 9.81 minutes gives a mass to charge ratio consistent with the ionized forms of the trimer species. The second peak having an elution time of 21.54 minutes has a mass to charge ratio of 508. The third and smaller peak eluting at 27.24 minutes has a mass to charge ratio of 656. Although there are other peaks that have much lower UV absorbances, these are the three major, non-solvent peaks presented in the chromatograms. This analysis was repeated on three separate preparations of the material with little to no variability of the results and demonstrates that the molecular weight distribution of the material produced by these reactions is in the range of 277-656 daltons.

[00127] As is common for GPC analysis of PET, the samples were analyzed in comparison to polystyrene MW calibration standards. Duplicate preparations of the digested rPET were analyzed. The results are listed in Table 4:

TABLE 4

	Mn	MW	Mz	Mp	Polydispersity
Undigested Scrap PET	11,802	41,253	72,290	42,204	3.50
Digested PET	282	338	417	300	1.20
Duplicate preparation	304	369	461	334	1.21

[00128] As shown in Table 4, the molecular weight of the rPET has been reduced from an MW of 41,253 to an MW of 338-369 Daltons. The very low polydispersity values of 1.20 and 1.21 indicate that the material is highly uniform in its molecular weight distribution. Further, the high level of agreement in the two preparations of material indicates that the procedure is repeatable and consistent. The GPC results are also in strong agreement with the LC/MS data that shows the largest peak for oligomers in the range of 277 Daltons and smaller contributions for those in the 508 and 656 Dalton ranges.

[00129] Additional experiments were conducted to determine additional boundaries of the experimental design and the differentiation/production of rPET oligomers having differing molecular weights, the use of different sources and types of rPET as well as reaction kinetics and parameters. The variables studied were: (1) lowering the ratio of ethylene glycol to rPET, (2) the addition of water to the reaction, (3) differing amounts of catalyst used, (4) the use of additives, (5) the reaction time, (6) the reaction temperature, and (7) the use of mixed digestions (i.e., green and clear rPET).

[00130] While the foregoing has been described in conjunction with rPET (i.e., recycled polyethylene terephthalate), it is contemplated and has been experimentally determined (as shown hereafter) that virgin PET (vPET - i.e., polyethylene terephthalate that has not previously been molded into a product, a previously molded PET product that has not been commercially used, a previously molded PET product that has been used to hold a product or act as packaging but has not been put into commercial streams of commerce, combinations of the above, etc.) can be used in the described methods. As such, the term rPET should be understood as encompassing

polyethylene terephthalate material having a recycled content of from 0% to 100% and still be within the scope of the described and claimed invention(s) herein.

[00131] Digestion of Virgin PET (Experimental Designator: 749-114): A 1 L, 4-neck flask was equipped with a mechanical stirrer, thermocouple, condenser and stopper. Neopentyl glycol (129.3 g, Aldrich 538256 lot# 07304DHV) was added to the flask and melted. All of the solids dissolved when the flask was at 95°C (internal temperature). Zinc acetate dihydrate (3.85 g, Alfa Aesar 11559, lot # C11W013) was added in one portion. The temperature was increased to 135°C and virgin PET (i.e., vPET - 240 g, Poly Sciences 04301 lot # 46418) was added in portions over a 15 min period. The temperature was raised to 200°C and held for 4.5 h. The pellets dissolved to give a slightly hazy solution – i.e., dPET obtained from a reaction of vPET. The resulting dPET from vPET was observed to have a hydroxyl number of 354 (over an average of three determinations) which corresponds to 6.31 mmol/g, while the viscosity was measured to be 1416 centipoise (cP) at 80°C. GPC data indicated that the resulting dPET from vPET had an average MW of 1237 and the resulting chromatograph was similar to dPET from a rPET source that was digested in a similar manner. Overall, the data for virgin digested material was consistent with material prepared from recycled PET using the same stoichiometry.

Scaling of rPET Digestion Reactions

[00132] In order to examine the ability of the rPET digestion to be scaled to commercial production scale, a series of experiments were conducted to approximate such commercial conditions.

[00133] Experimental Designator 188-73: A 22 L 4-neck flask was fitted with a Teflon stir blade connected to a high-torque overhead stirrer, thermocouple and condenser. Neopentyl glycol (3651 g, 35 mol Aldrich 538256-3KG Lot 10134519) was added to the flask and melted at 145 °C. Zinc acetate dihydrate (109 g, 0.5 mol Alfa Aesar 11559 Lot A13U005) was added in portions over 2 min. Recycled PET (6743 g, 35 mol on the basis of the monomer, green pellets) were added in portions over 1 h 40 min as the set point of the temperature controller was increased to 200°C after the final addition of rPET. The temperature was held at 200°C until all of the pellets dissolved (approximately 4.7 h). After all of the pellets of rPET had dissolved,

the solution was allowed to cool and the resulting product was packaged at approximately 72°C. Approximately 10.5 kg of digested PET product was produced.

[00134] Experimental Designator 749-74: A 22 L 4-neck flask was fitted with a Teflon stir blade connected to a high-torque overhead stirrer, thermocouple, stopper and condenser. Neopentyl glycol (3651 g, 35 mol Aldrich 538256-3KG Lot 07304DHV) was added to the flask and melted at 155°C. Zinc acetate dihydrate (109 g, 0.5 mol Alfa Aesar 11559 Lot A13U005) was added in portions over 2 min. Recycled PET (6744 g, 35 mol on the basis of the monomer, green pellets) were added in portions over 1 h 15 min. The set point of the temperature controller was increased incrementally to 200°C. The temperature was held at 200°C until all of the pellets dissolved (approximately 3.75 h). After all of the pellets of rPET had dissolved, the solution was allowed to cool and packaged at approximately 80°C. Approximately 10.5 kg of digested PET product was produced and GPC indicated an average MW of 1389. As used herein, the term “molecular weight” or “MW” in reference to PET is defined as the peak average molecular weight (M_p) as determined by Gel Permeation Chromatography (GPC).

[00135] Experimental Designator Lymtal PP: A 175 gallon stainless steel reactor, fitted with a condenser, was charged with neopentyl glycol (399.4 lbs) and heated to 260 °F. After the alcohol was melted, zinc acetate dihydrate (11.93 lbs) was added. After it dissolved, green recycled PET (737.7 lbs) was added in equal portions over 30 mins. The temperature was increased to 378°F over approximately 4 h. The solids required 8 hours at 350 to 378°F to completely dissolve. Upon cooling to 176°F, approximately 1124 lbs of digested PET product was produced and GPC indicated an average MW of 1386.

Effect of lowering the ratio of Ethylene Glycol to rPET for digestion of the rPET

[00136] A series of digestion experiments were performed to study the effect of reducing the relative amount of ethylene glycol used in the rPET digestions. Reactions were set up in 1 L round bottom flasks with a mechanical stirrer, thermocouple, temperature controller, heating mantle and condenser. The flasks were charged with rPET obtained from Clean Tech of Dundee, Michigan, ethylene glycol (Aldrich “Reagent Plus” grade, the CoA indicated >99% by GC, no mention of water content in either the CoA or the Product Specification Sheet) and zinc acetate

dihydrate. The reaction was performed with both clear and green rPET. The results of these experiments are summarized in Table 5.

TABLE 5

Ref.	Molar ratio			reaction time	Notes
	ethylene glycol	rPET	Zn(OAc) ₂		
185-2	2.79	1.00	0.014	1 h	Clear PET, MP=733 PI=1.111
188-7-1	2.12	1.00	0.014	30 min	Clear PET, MP=715 PI=1.131
188-1-1	2.14	1.00	0.014	1 h	Clear PET, MP=742 PI=1.129
188-5-1	2.01	1.00	0.014	35 min	Clear PET, MP=752 PI=1.132
188-10	1.73	1.00	0.014	1 h	Clear PET, MP=731 PI=1.147
188-12	1.73	1.00	0.014	5 h	Clear PET
188-9	1.06	1.00	0.014	13 h	Clear PET
188-17	2.79	1.00	0.014	57 min	Green PET: MW 715, 1091, 1430
188-18-1	1.50	1.00	0.014	51 min	Green PET: MW 684, 1048, 1336
188-18-2	1.00	1.00	0.014	24 min	Green PET: MW 701, 1082, 1386

[00137] The digestion experiments with clear rPET showed a general trend of longer reaction times when decreasing amounts of ethylene glycol was used. The digestion experiments with green rPET showed a general trend of a faster reaction rate with decreasing amounts of ethylene glycol.

[00138] GPC analyses were performed on the green rPET digestions. The data showed that the molecular weight distributions were consistent, regardless of whether or not clear or green rPET was used. It was also observed that the differences in the amount of ethylene glycol used in this series of reactions appeared to have a minimal impact on MW distribution. The differences in the physical characteristics of the product were more pronounced, i.e., reducing the amount of ethylene glycol produced a less waxy solid digested rPET, for example.

[00139] Further efforts towards lowering the amount of ethylene glycol required to digest the rPET were also performed. For example, the use of additives to facilitate mixing was studied. Reactions were performed with 155 g clear rPET, 30 mL ethylene glycol and either (a) 30 g of predigested rPET material from sample Ref. No. 188-5, or (b) 30 g of bis(2-hydroxyethyl)terephthalate (BHTA) as additives. Zinc

acetate was added to two of the three reactions. The results are summarized in Table 6.

TABLE 6

Ref.	molar ratio					reaction time
	ethylene glycol	Neopental Glycol	rPET	Zn(OAc) ₂	other	
188-13	0.67	0	1.00	0.014	16% BHTA	30 min
188-11	0.67	0	1.00	0.014	16% 188-5	12 min
188-14	0.67	0	1.00	0	16% 188-5	33 min
1002-27 Clear rPET flake used	0	1	1	0	0	210 min
1002-28 Green rPET pellets used	0	1	1	0	0	195 min

[00140] Reactions were also performed with green rPET. In sample Ref. No. 188-19, the reaction pot was charged with 310 g green rPET, 60 mL ethylene glycol, 2.0 g zinc acetate dehydrate and 30 g of predigested rPET product from sample Ref. No. 188-17. The reaction time was 30 min as measured from the time the pot was $\geq 170^{\circ}\text{C}$ until the solids were dissolved. The results are summarized in Table 7.

TABLE 7

Ref.	molar ratio				reaction time
	ethylene glycol	rPET	Zn(OAc) ₂	Other	
188-19	0.67	1.00	0.006	9.7% 188-17	30 min
188-20	0.67	1.00	0.014	9.7% BHTA	4.5 h

[00141] Sample Ref. No. 188-20 was similar to sample Ref. No. 188-19 except that 30 g of bis(2-hydroxyethyl)terephthalate was the additive instead of predigested rPET of Sample Ref. No. 188-17. The time for the reaction to reach completion was for Sample Ref. No. 188-20 longer at 4.5 h. It is believed that the bis(2-hydroxyethyl)terephthalate chelated the Zn⁺² ions thereby increasing the time of the reaction.

[00142] These digestion experiments demonstrate that the amount of ethylene glycol used to digest the rPET material can be demonstrably lowered.

Effect of adding water to rPET digestion

[00143] The effect of adding water to the digestion of rPET was studied by running a set of reactions in 1 L round bottom flasks set up as described above for the digestion of rPET with lower amounts of ethylene glycol. The flasks were charged with rPET (obtained from Clean Tech), ethylene glycol (Aldrich "reagent plus" grade, the CoA indicated >99% by GC, no mention of water content in either the CoA or the Product Specification Sheet) and zinc acetate dihydrate. Water was added in the following amounts: 0 mL, 0.75 mL, 1.25 mL and 2.50 mL. Quantities and molar ratios of the constituents are shown in Table 8 and the results of the experiments are summarized in Table 9.

TABLE 8

	MW	quantity, g	mol	Eq
Ethylene glycol	62.07	192.0	3.09	1.93
PET (ester), MW=monomer	193	310.0	1.61	1.00
zinc acetate	219.51	5.00	0.023	0.014

TABLE 9

Ref.	%H ₂ O with respect to Zn(OAc) ₂	Reaction time (min)
188-1-1	0%	60
188-1-3	15%	75
188-1-2	25%	120
185-3	50%	180

[00144] The mixtures were stirred and heated with a set point of 200°C on the temperature controllers and full power going to the heating mantles. Reaction times were determined from the time when the pot reached a hold temperature of ca. 180-200°C until a solution formed (solids fully dissolved). The reaction times are shown in Table 9. The data showed that the addition of water inhibited the progress of the reaction and that the greater the amount of water added, the longer the reaction time. FIG. 10 shows the reaction time for digesting rPET as a function of increased percentage water in the reaction mixture.

Effect of Different Amounts of Zinc Acetate Catalyst on the Digestion of rPET

[00145] A series of reactions were performed with varying amounts of catalyst to determine the time necessary for reaction completion. The experiments were set up in 1 L flasks as described above with respect to the experiments determining the amount of ethylene glycol required, provided: 310 g clear rPET and 180 mL ethylene glycol. The flasks were heated to 180-195°C with full power setting on the temperature controller. Zinc acetate (Zn(OAc)₂) was prepared as a mixture in ethylene glycol. The quantities were 2.5 g, 1.25 g and 0.75 g in 10 mL ethylene glycol and the mixtures were sonicated for 15-20 min to aid in dissolving the solids. The 2.5 g Zn(OAc)₂ preparation had some insoluble material present. The catalysts were added to the hot reaction mixtures as a bolus. Reaction times for completion, based on consumption of PET (solids fully dissolved), are summarized in Table 10. FIG. 11 shows the reaction time for digesting rPET as a function of the increased amount of catalyst (Zn(OAc)₂) in the reaction mixture.

TABLE 10

Ref.	Zn(OAc) ₂ , g	time, min
188-3-1	2.50	16
188-3-2	1.25	120
188-3-3	0.75	165

[00146] As can be appreciated from FIG. 11, a linear relationship exists between the amount of catalyst (i.e., zinc acetate) used in the reaction and the reaction time. The reaction rate appeared to be unusually fast when 2.50 g Zn(OAc)₂ was added, i.e., it was shorter than the time observed when twice the amount of catalyst was used in previous experiments. Factors that may have influenced this are the differences between temperature controllers, characteristics of the mantle or predissolving the catalyst in ethylene glycol and adding it to a hot mixture of rPET and ethylene glycol.

[00147] In order to determine if predissolving zinc acetate had any effect, the reactions described above were repeated with:

1. 5.0 g zinc acetate slurried in 10 mL ethylene glycol;
2. 1.88 g zinc acetate dissolved in 10 mL ethylene glycol; and
3. 5.0 g zinc acetate added in neat.

[00148] The reaction mixtures were heated to 180°C and the catalyst was added. The results are summarized in Table 11.

TABLE 11

Ref.	Zn(OAc) ₂	Reaction time, min
188-5-1	5.00 g in 10 mL ethylene glycol	38
188-5-2	1.88 g in 10 mL ethylene glycol	130
188-5-3	5.00 g added neat	65

[00149] The reaction time with zinc acetate slurried in ethylene glycol was almost twice as fast as what was observed when the catalyst was used neat. The reaction time for the experiment using 5.0 g of zinc acetate was still longer than that observed when 2.5 g zinc acetate was used. This can probably be attributed to differences in equipment and/or atmospheric conditions, for example. As one skilled in the art will appreciate, the reaction time decreases as the amount of catalyst increases.

[00150] In an effort to ensure uniformity in the temperature of the pot at the start of the reaction (i.e., the addition of zinc acetate), the series was repeated by refluxing mixtures of rPET and ethylene glycol for approximately 1 h before adding the catalyst. The quantities used and the reaction times are given in Table 12. FIG. 12 graphically displays the results of reaction time versus the amount of $\text{Zn}(\text{OAc})_2$.

TABLE 12

Ref.	rPET	ethylene glycol	$\text{Zn}(\text{OAc})_2$	Reaction time, min
188-7-1	310 g	190 mL	5.00 g	29
188-7-2	310 g	190 mL	2.50 g	43
188-7-3	310 g	190 mL	1.25 g	78

[00151] In summary, it was found that decreasing the amount of catalyst resulted in longer reaction times.

Use of Additives: Predigested PET for digestion of rPET

[00152] rPET pellets were digested with rPET that had been previously digested in earlier experiments, i.e., the previously digested portions of rPET were investigated for use as a “digesting agent” for the reactions. Using previously digested rPET appears to allow lowering the amount of ethylene glycol necessary for digesting rPET by serving as the “glycolysis” agent, free ethylene glycol can be decreased or omitted from the reaction.

[00153] In order to determine the feasibility of such a digesting agent, green colored rPET was treated with an amount of the previously digested rPET material produced in sample Ref. No. 188-17. Two reactions were run with the green rPET pellets and previously digested rPET. A third reaction was run with the addition of zinc acetate to the mixture. The results of these experiments are summarized in Table 13.

TABLE 13

Ref.	rPET	Predigested PET	additional Zn(OAc) ₂	reaction temp, °C	reaction time	Mp	PI
188-22	310 g	50 g	0	185	24 min	3293	1.474
188-23	310 g	50 g	0	160	6 h	3381	1.521
188-24	310 g	50 g	5.0 g	165	70 min	3743	1.631

[00154] Sample Ref. No. 188-22 was initially difficult to stir but when predigested rPET melted, mixing became easier. The reaction mixture was heated to 185°C and went to completion in 24 min (based on rPET dissolving). Sample Ref. No. 188-23 was similar to sample Ref. No. 188-22 but run at 160-165°C for 6 h. Mixing this reaction was difficult as a crust formed on top of the reaction mixture before all of the pellets dissolved. Therefore, it was required to be periodically broken up with a spatula. Sample Ref. No. 188-24 was similar to Sample Ref. No. 188-23 with zinc acetate added. The reaction was heated for 70 min at the end of which the liquid portion was hazy but pellets were not evident. GPC analysis of the reactions showed that the resulting digested rPET material had a molecular weight range of 3293 to 3743. Polydispersity values for the resulting material ranged from 1.474 to 1.631.

[00155] In order to produce digested rPET with different molecular weight ranges, green rPET was heated with varying amounts of previously digested rPET from Sample Ref. No. 188-17 until a solution formed. The quantities used and GPC data are shown in Table 14. The relationship between the percentage of predigested rPET used (i.e., the “predigesting agent” rPET) and the molecular weight produced in the reaction showed a correlation of lower molecular weight digested rPET products being produced with increasing amounts of predigested rPET material being used as shown in FIG. 13.

TABLE 14

Ref.	Description	% predigested PET	Mp	PI
188-26	green, used predigested 188-17	26.1%	2139	1.393
188-27	green, used predigested 188-17	13.2%	3425	1.519
188-28	green, used predigested 188-17	6.5%	7921	1.770

[00156] In order to further explore the range of different molecular weight products that can be produced according to the above-discussed methodology, digestions

utilizing 3.3% to 65% predigested rPET were performed. Three different lots of predigested rPET were used in these experiments (all three were produced by heating a mixture of 310 g rPET with 250 mL ethylene glycol and 5.0 g zinc acetate). The experiments using varying amounts of predigested PET and GPC results are shown in Table 15 and in FIG. 13a. As shown, digested rPET having molecular weight ranges of 1058 to 14777 were produced.

TABLE 15

Ref.	Description	% predigested PET	Mp	PI
732-2	green, used predigested 188-17	3.3	14777	1.908
733-1	green, used predigested 188-17	4.3	7723	1.757
188-28	green, used predigested 188-17	6.5	7921	1.770
733-4	green, used predigested 188-17	9.0	4575	1.657
733-5	green, used predigested 188-17	11.0	4151	1.575
188-27	green, used predigested 188-17	13.2	3452	1.519
188-23	green, used predigested 188-17	16.1	3381	1.631
188-29	green, used predigested 188-17	20.0	2584	1.442
188-26	green, used predigested 188-17	26.1	2139	1.393
733-7	green, used predigested 734-1	35.0	1951	1.398
733-9	green, used predigested 734-1	45.0	1627	1.345
733-11	green, used predigested 733-10	55.0	1307	1.301
733-2	green, used predigested 734-1	65.0	1058	1.261
732-4	green, used predigested 188-17	65.2	1772	1.335

[00157] Further experiments were conducted in order to produce digested rPET having a higher molecular weight. In the first set of experiments, green rPET was heated with 5%, 10% and 15% predigested green rPET sample Ref. No. 733-12 (MW 1004). In a second set of experiments, rPET was heated with 5%, 15% and 25% predigested green rPET Sample Ref. No. 188-23 (MW 3381). Both sets of experiments showed that higher molecular weight material was produced when decreasing amounts of predigested rPET material were used, e.g., using 5% predigested rPET material having a MW of 3381 produced a digested rPET material having a MW of 26,535, while 5% predigested rPET having a MW of 1004 produced a digested rPET material

having a MW of 9,162. The results of these experiments are summarized in Table 16 and FIGS. 14 and 15.

TABLE 16

Ref.	Description	% predigested PET	Mp	PI
733-15	green, used predigested 733-12 (MW=1004)	5.0	9162	1.856
733-14	green, used predigested 733-12	10.0	6342	1.751
733-13	green, used predigested 733-12	15.0	5492	1.679
732-12	green, used predigested 188-23 (MW=3381)	5.0	26535	2.261
732-11	green, used predigested 188-23	15.0	16765	2.133
732-10	green, used predigested 188-23	25.0	15426	2.043

[00158] Additional experiments were also conducted with clear rPET. Clear rPET was heated with predigested rPET Sample Ref. No. 732-3 (732-3 was produced from 310 g rPET, 250 mL ethylene glycol and 5.0 g zinc acetate dehydrate, heated until a solution formed, GPC analysis of Mp=676, PI=1.103). Table 17 summarizes these results.

TABLE 17

Ref.	Description	% predigested PET	Line Voltage	Mp	PI
732-6	clear, used predigest 732-3	3.3	100%	19271	2.148
732-5	clear, used predigest 732-3	4.3	100%	15176	2.080
732-7	clear, used predigest 732-3	9.0	100%	8717	1.809
733-6	clear, used predigest 732-3	11.0	100%	5348	1.646
732-13	clear, used predigest 732-3	35.0	47%	4600	1.639
732-14	clear, used predigest 732-3	45.0	47%	1598	1.329
732-15	clear, used predigest 732-3	55.0	47%	1297	1.306

[00159] Digested rPET having a molecular weight range of 1,297 to 19,271 was produced and the polydispersity of these materials ranged from 1.306 to 2.148. FIG. 16 is a graphical representation of the percentage predigested rPET used against the

molecular weight of the digested rPET produced. The curve depicted in FIG. 16 is similar to what was observed with respect to samples incorporating green rPET.

[00160] Samples with Ref. Nos. 732-13, 732-14 and 732-15 were produced by reducing power to the heating source. Instead of providing 100% line voltage to the heating mantle, a variable control power transformer was used to regulate power to 47% of line voltage. (Table 17) Milder heating resulted in higher molecular weight products which is evident in the way that data points fall off the curve at union where the two different heating methods were used. Thus, treating clear rPET with decreasing amounts of predigested rPET material results in higher molecular weight digested rPET material produced.

[00161] The use of predigested rPET as a glycolysis agent has, therefore, been proved to be quite effective as a digesting agent and/or as an effective replacement for free ethylene glycol in the reaction mixture. A higher concentration of predigested rPET material gave lower molecular weight digested rPET product.

In Situ Preparation of 16% "Predigested" rPET

[00162] Experiments were performed with both clear and green rPET to determine the effect of an in situ preparation of "predigested" rPET for use as a digesting agent.

[00163] For Sample Ref. No. 732-16, 26.1 grams of clear rPET, 0.42 grams of zinc acetate and 23.4 grams of ethylene glycol were heated to reflux, achieving homogeneity at 200°C. 310.0 grams of clear rPET were added to the predigested material over 17 minutes, completing the addition at 209°C. Sample Ref. No. 732-16A was taken at an internal thermocouple reading of 262°C. Fifteen minutes elapsed between completing the rPET addition and obtaining homogeneity of the mixture. GPC showed that the resulting material was digested rPET having a MP=3321 and polydispersity of PI=1.510.

[00164] For Sample Ref. No. 732-17, 26.1 grams of green rPET, 0.42 grams of zinc acetate and 23.4 grams of ethylene glycol were heated to reflux, achieving homogeneity at 195°C. 310.0 grams of green rPET were added to the pre-digested rPET material over 16 minutes, completing the addition at 199°C. Homogeneity was reached at 0.77 hours after completing the addition of the green rPET. The mixture (Sample Ref. No. 732-17A) reached homogeneity at 214°C. GPC showed that the

resulting material was digested rPET having a MP=3614 and polydispersity of PI=1.541.

[00165] By way of comparison, Sample Ref. No. 188-22 used 16.1% predigested rPET and produced a digested rPET material having a MP=3293 and polydispersity of PI=1.474. Thus, in situ preparation of “predigested” material gave the same results as using predigested rPET material that was isolated prior to addition to the reaction mixture.

Effect of Reaction Time and Increased Temperature

[00166] Digestion experiments were performed to study the effect of extended reaction times and elevated temperatures of the digested rPET produced. Reactions with extended reaction times were carried out with predigested rPET mixed with rPET pellets as described above but the reaction was held at 190-200°C for up to 6 h beyond completion. The starting point ($t=0$) was determined when the rPET pellets went completely into solution. The reaction mixtures were sampled at regular intervals and the pulls were analyzed by GPC.

[00167] Tables 18 and 19 summarize the concentrations of predigested rPET which were used and the results of the GPC analysis. When 9% to 65% predigested rPET were used, a long reaction time did not make a difference in the molecular weight of the digested rPET produced (within the limits of the technique). At low concentrations, longer reaction times resulted in lower molecular weight digested rPET products. For instance, the experiment with 3.3% predigested rPET produced a digested rPET product having a MW=19,271 at $t=0$ and MW=15,407 at $t=6$ h; the experiment with 4.3% predigested rPET produced a digested rPET product having a MW=15,176 at $t=0$ and MW=12,854 at $t=5.5$ h.

TABLE 18

Ref.	Description	Mn	MP	MW	PI
733-2A	Green PET digested with 65% predigested PET (188-17) t=0 h	1162	1058	1466	1.261
733-2B	t=1 h	1162	1053	1464	1.260
733-2C	t=2 h	1160	1050	1464	1.262
733-2D	t=3 h	1170	1053	1476	1.261
733-2E	t=4 h	1146	1034	1447	1.264
733-2F	t=5 h	1137	1021	1438	1.264
733-2G	t=6 h	1133	1015	1431	1.263
733-4A	Green PET digested with 9% predigested PET (188-17) t = 5 h	3352	5185	5646	1.684
733-4B	t = 4 h	3286	5106	5490	1.671
733-4C	t = 3 h	3229	4917	5321	1.648
733-4D	t = 2 h	3188	4780	5239	1.643
733-4E	t = 1 h	3074	4612	5073	1.650
733-4F	t = 0 h	3014	4575	4994	1.657
733-4G	t = 6 h	3342	5287	5636	1.686

TABLE 19

Ref.	Description	Mn	MP	MW	PI
732-6A	Clear PET digested with 3.3% predigested PET (732-3) t = 0 h	9513	19271	20430	2.148
732-6B	t = 1 h	9580	19169	21590	2.254
732-6C	t = 2 h	9248	18779	21497	2.324
732-6D	t = 3 h	9357	18374	21510	2.299
732-6E	t = 4 h	8813	16739	21010	2.384
732-6F	t = 5 h	8506	15823	20391	2.397
732-6G	t = 6 h	8254	15407	20137	2.440
732-5A	Clear PET digested with 4.3% predigested PET (732-3) t = 0 h	7785	15176	16190	2.080
732-5B	t = 0.5 h	7839	14627	15643	1.996
732-5C	t = 1.5 h	8359	16932	19093	2.284
732-5D	t = 2 h	8403	16625	19605	2.333
732-5E	t = 2.5 h	8237	16561	19796	2.404
732-5F	t = 3.75 h	7669	15013	19189	2.502
732-5G	t = 4.75 h	7201	14236	18899	2.624
732-5H	t = 5.5 h	6945	12854	17562	2.529
733-5A	Clear PET digested with 11% predigested PET (732-3) t = 0	2848	4151	4484	1.575
733-5B	t = 1 h	2882	4178	4527	1.570
733-5C	t = 2 h	2864	4261	4568	1.595
733-5D	t = 3 h	2896	4332	4620	1.595
733-5E	t = 4 h	2923	4478	4736	1.620
733-5F	t = 5 h	2971	4482	4821	1.623
733-5G	t = 6 h	2989	4618	4915	1.644

[00168] The effect of elevated reaction temperatures was further analyzed by performing a digestion reaction with 100.0 grams of clear rPET with 3.3%

predigested clear rPET. Homogeneity was achieved 2.92 hours from the time that heat was applied to the clear rPET. The longer time required to reach homogeneity was a function of the attempt to control the temperature and heating rate. Three samples of the homogeneous mixture were taken and GPC results tabulated:

1. 216°C internal temperature (Ref. No. 732-18A, time 1235), MP=21171 PI=2.088
2. 249°C internal temperature (Ref. No. 732-18B, time 1419), MP=19616 PI=2.185
3. 272°C internal temperature (Ref. No. 732-18C, time 1530), MP=15459 PI=2.231

[00169] Thus, reaction time has little, if any, effect on the molecular weight of the product when concentrations of predigested rPET are $\geq 9\%$. Low concentrations of predigested rPET, however, indicate that the molecular weight of the digested rPET product decreased as time passed.

[00170] Increasing the reaction temperature resulted in lower molecular weight products. Although additional time was needed to raise the temperature of the reaction mixture, the additional time needed was 3 h. The additional time was most likely not sufficient alone to be a factor in the observed results.

Mixed Green and Clear rPET Digestions

[00171] Digestion experiments were performed with a mixture of green and clear rPET to determine the effect of blending these recycled materials, i.e., to determine whether the separation of green and clear rPET is necessary for the digestion reactions to occur. Sample Ref. No. 733-18 is summarized in Table 20; 1:1 mixture of green and clear PET was digested with ethylene glycol and zinc acetate using stoichiometry which produced material used for most of the predigestion experiments. The reaction behaved normally. GPC showed that the resulting material was a digested rPET having a MP=701 and polydispersity of PI=1.112.

TABLE 20

Ref.	ethylene glycol	green rPET	clear rPET	Zn(OAc) ₂	reaction time
733-18	250 mL	155 g	155 g	5.00 g	93 min

[00172] The product from above was then used as a predigested rPET starting material in the digestion of 1:1 mixtures of green and clear rPET, and the experiments are summarized in Table 21. GPC results showed that the resulting digested rPET material had a very low polydispersity despite the fact that the clear and green rPET have different average molecular weights.

TABLE 21

Ref.	Description	% predigested PET (Ref. No. 733-18)	MP	PI
733-19	155 g green PET+155 g clear PET+733-18	15.0%	3546	1.547
733-20	155 g green PET+155 g clear PET+733-18	25.0%	2380	1.421
733-22	155 g green PET+155 g clear PET+733-18	55.0%	1120	1.228

[00173] It has been shown, therefore, that recycled PET (rPET) can be converted to lower molecular weight polymers by glycolysis with ethylene glycol and zinc acetate. Material which was digested in this manner can thereby become a digestion agent to produce a wide range of molecular weight polymers from rPET starting material. Low concentrations of predigested rPET used as the “starter” gave high molecular weight products while, conversely, high concentrations of predigested rPET used as the “starter” gave low molecular weight products. Experiments with green colored rPET and clear colored rPET behaved similarly to experiments where green and clear colored rPET were mixed together.

[00174] The precipitates from each of the reactions, i.e., the digested rPET oligomers, were then each separately tested as to suitability as a resin replacement and/or resin extender.

Removal of Green Tint Remaining in Digested Green rPET

[00175] Initially, pre-digested green PET was reacted with 2,2-dimethyl-1,3-propane diol to make higher molecular weight polymers. In particular, 250 mL of toluene were brought to reflux in a 4-neck reactor fitted with a Dean-Stark trap. 125.0 grams of predigested green rPET from Sample No. 732-34 (Table 22 below) were added in portions to the refluxing toluene. It appeared that the refluxing toluene could accept more than the 125.0 grams of digested rPET material.

[00176] The homogeneous green reaction mixture was heated at reflux (111.0-113.1°C) for 6 hours after completing the digested rPET addition. 14.6 mL of water was collected from the Dean-Stark trap. As the reaction mixture cooled through 102.7°C, a 2-phase mixture formed on stopping the agitator, an upper, homogeneous green layer and a lower, opaque faint green layer. At approximately 75°C the mixture began to solidify. After cooling to ambient temperature, the heterogeneous mixture was transferred to a beaker and allowed to stand at ambient temperature overnight. Decanted homogeneous green solution was used to complete the transfer to the beaker.

[00177] Vacuum filtration of the mixture produced a white filter cake having a faint blue-green tint and a lime green homogeneous filtrate. The filter cake was washed with 50 mL of toluene. The filter cake yielded 105.26 grams of white solid material after drying the solid on a 40-50°C, Buchi pump rotary evaporator for 15 minutes followed by 15 minutes on a 40°C, 0.1 mm Hg vacuum Kugelrohr. 0.32 grams of green semi-solid were recovered from the concentration of 50 mL of the green filtrate on a rotary evaporator at 40-50°C and Buchi pump vacuum followed by 15 minutes on a 40°C, 0.4 mm Hg vacuum Kugelrohr.

[00178] The solubility of the isolated white solid was performed with the following analysis:

- Solubility of the isolated white solid

Mostly soluble: DMSO

Somewhat soluble: chloroform; methylene chloride

Insoluble: acetone; acetonitrile; methanol

- ^1H and ^{13}C NMR spectra of the white solid and isolated green filtrate solid; (^1H NMR only of white solid spiked with ethylene glycol, ethylene glycol

and DMSO-d6 blank) were obtained and are shown in FIGS. 17-47. White solid melting point: first signs of melting at 81°C; clear material at 135°C.

[00179] Thus, it has been shown that any remaining green tint in the digested rPET can be substantially removed without affecting the properties of the digested rPET.

Green rPET Treated With Amines and Polyols

[00180] Green rPET was treated with various amines and polyols. The reactions were run as previously described: mixtures of green rPET pellets and the amine and/or polyol were heated with zinc acetate. Some reactions included ethylene glycol while others did not.

[00181] Diamines and hexamethylenetetramines produced hard brittle solids. This was presumably caused by cross-linking between various oligomers/low molecular weight polymers. Although these experiments did not give promising looking material, if indeed cross-linking occurred, the use of limited amounts of diamines/polyamines might prove useful in future experiments as the synthesis of higher molecular weight components from digested PET are targeted.

[00182] The reactions run with glycerin and 2,2-dimethyl-1,3-propanediol were promising. A reaction with 1.0 eq 2,2-dimethyl-1,3-propanediol (with respect to monomer MW) and green rPET gave a green pliable material, increasing to 2.0 eq of the diol gave a viscous green syrup. Several other experiments with this diol gave material which ranged from a syrup to a green brittle solid. When glycerin was used, higher amounts of glycerin gave gelatinous material. The results are summarized in Table 22.

Table 22








<i>Notebook ref.</i>	<i>rPET</i>	<i>Ethylene glycol</i>	<i>Additive 2</i>	<i>Zn(OAc)₂</i>	<i>Notes</i>	<i>M_p</i>	<i>PI</i>
733-31	green, 310 g	0.50 eq	0.19 eq 1,8-diaminooctane	0.014 eq	Heated to 200-220°C for 2 h. Opaque mint green brittle solid.	1707	1.386
733-32	green, 310 g	0.50 eq	0.42 eq ethylenediamine	0.014 eq	Stirred easily during heat up, reaction solidified at 180°C. Added 1.0 eq EG and 0.42 eq ethylenediamine and temperature increased to 200°C. Solid remained after 2 h additional heating. Presumably, cross-linking occurred.	1060	1.233
733-35	green, 310 g	0.50 eq	0.27 eq hexamethylene tetraamine	0.014 eq	Heated at 200°C for 52 min to give tar like solution. Solidified to a dark, hard solid.	1015	2.602
733-33	green, 310 g	0.50 eq	0.33 eq glycerin	0.014 eq	Heated at 200-210°C for 79 min to form solution. Mint green wax-like solid.	1007	1.262
733-34	green, 310 g	0.50 eq	0.24 eq 1,6-hexanediol	0.014 eq	Heated to 200°C for 178 min for a solution to form. Mint green opaque taffy	1301	1.303
733-36	green, 310 g	2.79 eq	-	0.014 eq	Green rPET digestion with new rPET lot, standard stoichiometry. Performed to demonstrate technique is reproducible.	672	1.113
733-37	green, 310 g	-	1.0 eq glycerin	0.014 eq	Heated to 200-225°C got 3 h. Material resembled lime green jello.	1034	1.242
733-38	green, 310 g	-	0.75 eq glycerin	0.014 eq	Heated to 200°C for 67 min. Material resembled lime green jello.	1030	1.303
732-27	green, 310 g	0.50 eq	0.3 eq 2,2-dimethyl-1,3-propanediol	0.014 eq	Heated at 210°C for 2 h. Opaque green pliable material, resembled Gumby.	1132	1.242






732-28	green, 310 g	-	0.6 eq 2,2-dimethyl-1,3-propanediol	0.014 eq	Heated at 220°C for 5.5 h. Clear green sticky pliable material, will take and hold shape when handled.	1563	1.297
732-29	green, 310 g	-	1.0 eq 2,2-dimethyl-1,3-propanediol	0.014 eq	Heated at 220°C for 2.5 h. Steady reflux last 78 min (ethylene glycol?). Clear green sticky pliable material, will take and hold shape when handled (resembled 732-28).	1224	1.226
732-30	green, 155 g	-	2.0 eq 2,2-dimethyl-1,3-propanediol	0.014	Heated to 220°C for 3.25 h, milky reaction mixture, steady reflux. Opaque green liquid, slightly less viscous than honey. Glassware easily cleaned with acetone.	1142	1.140
732-31	green, 310 g	-	0.2 eq 2,2-dimethyl-1,3-propanediol	0.014	Heated to 220°C for 4.5 h, isolated a dark green brittle solid.	3601	1.612
732-34	green, 620 g	2.79 eq	-	0.014	Heated to 200°C for 1 h to give a waxy green solid.	691	1.104
733-46	green, 310 g	-	1.5 eq glycerin	0.014	Heated to 200-240°C for 112 min to give a sticky green gel.	700	1.185
733-48	green, 310 g	-	0.5 eq 1,6-hexanediol	0.014	Heated to 200°C for 6.1 h. Cooled to give a hard mint green solid.	2066	1.378
733-49	dPET from 733-36	-	0.5 eq 1,6-hexanediol	-	dPET (MW 672) was melted at 150°C and treated with diol. Heated for 3 h, samples were drawn at t=0, 1, 2, 3 h (column to right) and molecular weight increased. A flexible green solid was obtained after cooling.	724 1584 11439 6647	1.120 1.301 2.211 1.936




Reaction of dPET with Carboxylic Acids and Anhydrides


[00183] Predigested material produced in experiment 733-36 from the customary procedure of 2.79 eq ethylene glycol, 1.0 eq rPET and 0.014 eq zinc acetate dihydrate was treated with a variety of diacids and anhydrides in an effort to produce higher molecular weight material. The reactions were performed by heating a mixture of the predigested material along with either a diacid or anhydride. A stream of nitrogen was blown through the flask to remove water which was produced as a by-product. Oxalic acid was the smallest of the diacids used, and it gave a hard green solid. Higher molecular weight diacids and anhydrides gave materials which ranged from pliable to a sticky jelly-like material. GPC data is presented for different times in descending order are t=0, t=1h, t=2h and t=3h (or final time point as indicated). The results are summarized in Table 23.

TABLE 23

<i>Notebk ref</i>	<i>Predigested PET</i>	<i>Additive</i>	<i>Notes</i>		<i>MP</i>	<i>PI</i>
733-39	1.0 eq	0.5 eq oxalic acid	Exothermic reaction with considerable outgassing. Heated 3 h at 150°C. Isolated hard green solid.		676 686 706 729	1.121 1.131 1.128 1.130
733-40	1.0 eq	0.5 eq D-malic acid	Heated 3 h at 150°C to give a mint green gummy material, very sticky, viscous syrup which could not be separated from aluminum sheet.		697 691 1025 1022	1.120 1.149 1.193 1.232
733-42	1.0 eq	0.5 eq malonic acid	Heated 3 h at 150°C to give a mint green gummy solid. Material could be hand shaped and hold its form. Sticky, could not be separated from aluminum sheet.		687 693 1038 1076	1.110 1.146 1.182 1.205
733-43	1.0 eq	0.5 eq tartaric acid	Heated for 3 h at 150°C to give a hard green solid.		707 706 716 673	1.121 1.131 1.140 1.171
733-44	1.0 eq	0.5 eq L-malic acid	Heated for 3 h at 150°C to give a pliable green solid. Sticky, pliable enough to take and hold a thumb print impression.		659 645 997 1004	1.113 1.150 1.191 1.212
733-45	1.0 eq	0.5 eq maleic anhydride	Heated for 3 h at 150°C to give a clear green sticky jello-like solid.		670 1006 1372 1646	1.107 1.327 1.366 1.432
733-47	1.0 eq	0.5 eq succinic anhydride	Heated for 3 h at 150°C to give a dark brittle rubber like solid.		680 4336 16165 22674	1.122 1.606 2.403 3.575

733-51	1.0 eq	0.5 eq propionic anhydride	Heated for 2.5 h at 150°C, after 2 h the reaction mixture solidified. Increased temp to 250°C to give a thick syrup which cooled to a hard mint green solid.		791 765 1861 13499	1.104 1.122 1.293 2.222
733-52	1.0 eq	0.5 eq methacrylic anhydride	Heated for 2.5 h at 150°C. A hard brittle green solid was obtained.		766 1375 2098 5248	1.143 1.206 1.289 5.433
733-53	1.0 eq	0.5 eq glutaric anhydride	Heated for 3 h at 150°C. Upon cooling, a gummy mint green mass formed. The material could be deformed and hold a shape.		828 1230 1242 1593	1.096 1.167 1.204 1.260
733-54	1.0 eq	0.5 eq glutaric acid	Heated for 3 h at 150°C. Upon cooling, a mint green play-dough like mass formed. The material could be deformed and hold a shape, it was harder to manipulate than 733-53.		842 1246 1581 2366	1.106 1.255 1.286 1.334
733-55	1.0 eq	0.5 eq D-malic acid	dPET was stirred in refluxing toluene and treated with D-malic acid. Refluxed for 3 h with a Dean-Stark trap to collect water. Cooled and collected a gummy off-white solid. (This experiment		829	1.107

			was similar to 733-40 but with toluene, the previous experiment could not be separated from aluminum foil used in collecting it.)			
733-56	1.0 eq	0.5 eq maleic anhydride	dPET was stirred in refluxing toluene and treated with maleic anhydride. Refluxed for 3 h with a Dean-Stark trap to collect water. Cooled and collected a gummy off-white solid.		852	1.117
733-61	1.0 eq	0.25 eq trimellitic anhydride	dPET was melted at 150°C and treated with trimellitic anhydride. This was selected to provide cross-linking between oligomers. A sampled at t=0 when the anhydride was added and at 20 min when the reaction mixture solidified.		t=0: 677 t=20 min: 2339	1.122 2.544
733-62	1.0 eq	0.25 eq trimellitic anhydride	dPET (732-3, clear MW 672) was stirred in refluxing toluene and treated with trimellitic anhydride for 3 h. Reaction was similar to 733-61 but with solvent to facilitate mixing and removal from		701	1.117

			reaction flask. Upon cooling to r.t., a hard white solid separated from the toluene layer.			
733-64	1.0 eq	0.1 pyromellitic anhydride	dPET (732-3, clear MW 672) was stirred in refluxing toluene and treated with pyromellitic anhydride for 3 h. Upon cooling to r.t., a hard white solid separated from the toluene layer. It had the same texture as st.material.		714	1.139

Solubility Studies

[00184] Several of the resulting dfPETs were taken up in toluene, NMP, THF and water. dPET from 732-28, 732-29 and 732-30 showed excellent solubility in NMP.

[00185] Table 24 describes the results of several digestions of PET (both virgin and recycled) with both neopentyl glycol (NPG) and ethylene glycol (EG) as the glycolysis agents. With respect to the "OH #" column, this refers to the resulting hydroxyl number of the respective dfPET. One of ordinary skill in the art will appreciate that changes can be made to the ratios of reactants, reaction temperature, reaction time, etc. to produce dfPETs of varying structure, reactivity, and/or function. Outside of the broad process disclosed herein – one of ordinary skill in the art should not consider any particular combination of reactants and reaction conditions as limiting to the disclosed inventive processes and concept(s) herein.

TABLE 24

Sample Ref. No.	Recycled/Virgin PET	Color	Glycolysis Agent	Molar Ratio of Alcohol to PET (monomer basis)	OH #	Avg. MW
732-29	recycled	green	NPG	1.00	339	1224
732-34	recycled	green	EG	2.78	434	691
732-38	recycled	clear	EG	2.78		722
732-40	recycled	clear	NPG	1.00		1272
732-43	recycled	clear	NPG	1.00	373	-
732-58	recycled	green	NPG	1.00	368	1158
732-78	recycled	green	NPG	1.00	225	1268
732-102	recycled	green	NPG	1.00		1198
733-58	recycled	clear	NPG	1.00		1514
733-65	recycled	clear	NPG	1.00		1240
749-114	virgin	clear	NPG	1.00	354	1237
749-82	recycled	green	NPG	1.00		1410
751-19	recycled	green	NPG	1.00	379	-
753-11	recycled	green	NPG	1.00	365	1246
768-8	recycled	green	NPG	0.40	184	1920

NPG=Neopentyl
Glycol
EG=Ethylene
Glycol

B. Use of dfPET in Making Polyurethane Dispersions

[00186] The solubility of the dfPET materials in both NMP and acetone allows them to be incorporated into polyurethane dispersions ("PUDs") using a synthetic route commonly known by those of ordinary skill in the art as "The Acetone Process." Although the Acetone Process is one exemplary methodology for making PUDs, one of ordinary skill in the art will appreciate that other processes for making PUDs—e.g., other solvent processes (MEK, for example), prepolymer processes, etc.—can be used with dfPET and are contemplated for use with and/or as a part of the presently disclosed and claimed inventive concept(s). Several experiments testing the resulting PUDs made via the Acetone Process utilizing dfPET were, for example, cast on steel panels and analyzed for hardness, water resistance and solvent resistance. The properties of the resulting polyurethane films indicate their suitability for commercial applications and therefore, the dfPET may be used to make a polyurethane dispersion for commercial use.

[00187] For example, but not by way of limitation, the properties of an experimental polyurethane dispersion formulation having an internal reference No. 734-63 (made from a dfPET polyol and according to the Acetone Process), provided a good balance between ease of synthesis, emulsion formation, hardness, and water resistance. The robustness of the methodologies for making PUDs with dfPET as disclosed herein (e.g., the Acetone Process etc.), has been demonstrated by the present inventors at both bench scale (i.e., a 1 L resin kettle) as well as within a pilot plant reactor (i.e., a 350 gallon reactor operated by Anderson Development Company in Adrian, Michigan .]

Polyurethane Dispersion (PUD) Synthesis

[00188] A process to form a polyurethane dispersion based on an oligomeric form of polyethylene terephthalate with hydroxyl and/or amine group(s) is disclosed. In the presently disclosed and claimed inventive concept(s), the term "polyurethane" is used as shorthand for a chain-extended isocyanate-terminated prepolymer. The "polyurethane" may contain urethane linkages, urea linkages, silane, ester or other groups or, as is usual, combinations of two or more of these constituents. The prepolymer itself may contain urethane or urea groups, or combinations of these constituents prior to chain extension.

[00189] Although not critical to the presently disclosed and claimed inventive concept(s), the prepolymer is preferably water-dispersible. By "water-dispersible", it

is meant that the prepolymer is capable of being dispersed in water to form a dispersion without significant separation of the aqueous and prepolymer phases into distinct layers. A water-dispersible prepolymer provides at least two advantages: first, it facilitates making a stable dispersion of prepolymer droplets during the dispersing step and second, it promotes the formation of smaller droplets (which also tends to improve stability). However, it is possible to achieve these properties even with a prepolymer that is not water-dispersible, using an appropriate selection of external surfactant(s) and/or a costabilizer.

[00190] Water dispersibility may also be further promoted or enhanced by incorporating hydrophilic groups such as poly(ethylene oxide) chains, carboxylic acid, carboxylate, phosphate, sulfonate or ammonium groups into the prepolymer structure.

[00191] Given the above broad outline and the following details, examples and teachings, one of ordinary skill in the art, provided the present disclosure and teachings, will appreciate that the presently disclosed and claimed inventive concept(s) encompass any PUD based upon or incorporating the presently disclosed taught, and/or claimed dfPET material. As such, the claims should not be limited to any particular methodology or process chemistry for making the PUDs in the absence of any specific teaching or notation to the contrary.

[00192] In a non-limiting embodiment, the aqueous polyurethane dispersion is made in at least two stages: formation of the polyurethane prepolymer and formulation of the polyurethane dispersion. In the first stage, an isocyanate terminated polyurethane prepolymer is prepared by combining chemical reactants including dfPET and at least one isocyanate reactive compound. The isocyanate reactive compound is capable of imparting some hydrophobicity to the polyurethane prepolymer. Thereafter, the isocyanate reactive group is neutralized with a neutralizing agent having a suitable organic counter ion. The product of this first process is a polyurethane prepolymer composition incorporating at least the dfPET into the polymer backbone and having at least one iso-functionality associated therewith. In the step of forming the dispersion, the above-prepared polyurethane prepolymer is dispersed in water to provide an aqueous-based dispersion. In practice, the water in the dispersion acts as a chain extender thereby terminating the polyurethane prepolymer and forming a polyurethane polymer dispersed in an aqueous solvent. Of course, the polyurethane

prepolymer can be mixed with additional chain extending agents, as will be discussed in more detail below.

[00193] In certain preferred embodiments, the aforementioned steps within each stage are conducted sequentially. However, in alternative embodiments, one or more of the above steps of either or both stages may be performed in a variety of different orders or during at least a portion of one or more steps. In certain instances, for example, the neutralizing step may be conducted during at least a portion of the reacting step, the neutralizing step may be conducted during at least a portion of the dispersing step, or the reacting step may be conducted during at least a portion of the chain extending steps, and variations thereof.

[00194] In one embodiment, the process of making a PUD involves (i) reacting a polyisocyanate with an active hydrogen containing compound (e.g., dfPET) at a temperature ranging from about 20°C to about 180°C to provide a prepolymer; (ii) dispersing the prepolymer in an aqueous medium to provide a prepolymer dispersion; and (iii) extending the prepolymer by adding a chain extender to the prepolymer dispersion to provide a polyurethane dispersion.

[00195] In another embodiment, the process of making a PUD involves (i) reacting a polyisocyanate with an active hydrogen containing compound (e.g., dfPET) at a temperature ranging from about 20°C to about 180°C to provide a prepolymer; (ii) dispersing the prepolymer in an aqueous medium to provide a prepolymer dispersion; and (iii) heating the prepolymer dispersion to a temperature sufficient to extend the prepolymer to provide a polyurethane dispersion.

[00196] Active hydrogen containing compounds most commonly used in polyurethane production are those compounds having at least two hydroxyl groups and/or amine groups. Those compounds are referred to herein as polyols. Examples of active hydrogen containing compounds include, but are not limited to the oligomeric form of polyethylene terephthalate with hydroxyl and/or amine group(s) described previously. In one embodiment, the active hydrogen containing compound is the oligomeric form of polyethylene terephthalate with hydroxyl group(s) as described hereinabove—i.e., the dfPET compounds as set forth in Tables A, B, A1, A2, and combinations thereof.

[00197] The oligomeric form of polyethylene terephthalate with hydroxyl and/or amine group(s) can be reacted with a polyisocyanate to form a polyurethane prepolymer. The polyurethane prepolymer can be formed according to any method known in the art, such as by heating the oligomeric form of polyethylene terephthalate

with hydroxyl and/or amine group(s) with the polyisocyanate until a desired NCO equivalent weight is achieved. Preferably, the polyisocyanate and the oligomeric form of polyethylene terephthalate with hydroxyl and/or amine group(s) are brought together and heated under reaction conditions sufficient to prepare the polyurethane prepolymer. The stoichiometry of the prepolymer formulations, in one embodiment of the presently disclosed and claimed inventive concept(s), is such that the polyisocyanate is present in excess. In other embodiments of the presently disclosed and claimed inventive concept(s), the stoichiometry of the prepolymer formulations is such that there is an excess or equivalent amount of dfPET to polyisocyanate.

[00198] The prepolymer can be made in the presence of a solvent and the solvent removed before or after the production of the dispersion. Generally, producing a PUD without using a solvent is called a “prepolymer process.” The prepolymer process has the advantage of using very little to no solvent. This is also a disadvantage: if the reaction is exothermic, controlling the heat output may be difficult if little or no solvent is used; manipulation and handling of high viscosity polymers is also difficult and commercially disadvantageous. The prepolymer process also has issues with foam formation due to the higher isocyanate content and reaction with isocyanate to form carbon dioxide.

[00199] If a solvent is present, the solvent is removed to give an aqueous dispersion which is essentially free of solvent. That is, the dispersion generally will contain less than 5 percent, preferable less than 2.5 percent and more preferably less than 1 percent by weight of solvent. The prior ranges of solvent will be understood as being examples and should not be construed as limiting with regard to the presently disclosed and claimed inventive concept(s). Examples of solvents which are not reactive with the polyisocyanate and may be used herein include ketones, such as acetone, butanone and methyl ethyl ketone; ethers such as tetrahydrofuran, dioxane and dimethoxyethane; ether esters, such as methoxypropyl acetate and di(propylene) glycol methyl ether; (cyclic) amide and ureas, such as dimethylformamide, dimethylacetamide, N,N'-dimethyl-2,5-dizapentanone; N-methylpyrrolidone (NMP); N-ethylpyrrolidone (NEP); ethyl acetate and capped glycol ethers. These solvents may be added at any stage of the prepolymer preparation.

[00200] In one non-limiting embodiment, the solvent can be acetone. A process which utilizes acetone as a solvent is generally referred to as an “Acetone Process.” NMP is generally used as a co-solvent in low or very-low percentages. NMP has traditionally

been used as a co-solvent because of its coalescing properties. The presently disclosed and claimed inventive concept(s) encompass the use of the Acetone Process with and without co-solvents such as NMP, for example but not by way of limitation.

[00201] Any suitable polyisocyanate can be used to make the aqueous polyurethane dispersions of the presently disclosed and claimed inventive concept(s). In a non-limiting embodiment, the polyisocyanates include one or more polyisocyanates selected from the group consisting of isophorone diisocyanate (IPDI), methylene bisphenyl isocyanate (MDI), dicyclohexylmethane 4,4'-diisocyanate (H₁₂MDI), cyclohexyl diisocyanate (CHDI), m-tetramethylxylylene diisocyanate (m-TMXDI), tetramethylxylylene diisocyanate (TMXDI), ethylene diisocyanate, 1,2-diisocyanatopropane, 1,3-diisocyanatopropane, 1,6-diisocyanatohexane (hexamethylene diisocyanate or HDI), 1,4-butylene diisocyanate, lysine diisocyanate, 1,4-methylene bis-(cyclohexyl isocyanate), toluene diisocyanate (TDI), m-xylylenediisocyanate (MXDI) and p-xylylenediisocyanate, 4-chloro-1,3-phenylene diisocyanate, 1,5-tetrahydro-naphthalene diisocyanate, 4,4'-dibenzyl diisocyanate, and 1,2,4-benzene triisocyanate, xylylene diisocyanate (XDI), 1,4-diisocyanatobutane, 1,5-diisocyanatopentane, 1,6-diisocyanatohexane, 2-methyl-1,5-diisocyanatopentane, 1,5-diisocyanato-2,2-dimethylpentane, 2,2,4-trimethyl-1,6-diisocyanatohexane, 2,4,4-trimethyl-1,6-diisocyanatohexane, 1,1,0-diisocyanatodecane, 1,3-diisocyanatocyclohexane, 1,4-diisocyanatocyclohexane, 1,3-bis-(isocyanatomethyl)cyclohexane, 1,4-bis-(isocyanatomethyl)cyclohexane, isophorone diisocyanate, 4,4'-diisocyanatodicyclohexylmethane, triisocyanatononane, ω,ω'-diisocyanato-1,3-dimethylcyclohexane, 1-isocyanato-1-methyl-3-isocyanatomethylcyclohexane, 1-isocyanato-1-methyl-4-isocyanatomethylcyclohexane, bis-(isocyanatomethyl)norbornane, 1,5-naphthalene diisocyanate, 1,3-bis-(2-isocyanatoprop-2-yl)benzene, 1,4-bis-(2-isocyanatoprop-2-yl)benzene, 2,4-diisocyanatotoluene, 2,6-diisocyanatotoluene, 2,4'-diisocyanatodiphenylmethane, 4,4'-diisocyanatodiphenylmethane, 1,5-diisocyanatonaphthalene, 1,3-bis(isocyanatomethyl)benzene, and combinations thereof.

[00202] Mixtures of isocyanates may also be used with the PUDs of the presently disclosed and claimed inventive concept(s). For example but not by way of limitation, commercially available mixtures of 2,4- and 2,6-isomers of toluene

diisocyanates (TDI) may be used. A “crude” polyisocyanate may also be used in the practice of the presently disclosed and claimed inventive concept(s). For example but not by way of limitation, toluene diisocyanate obtained by the phosgenation of a mixture of toluene diamine isomers or diphenylmethane diisocyanate obtained by the phosgenation of crude methylene diphenylamine may be used as such “crude” polyisocyanates. TDI/MDI blends may also be used and one of ordinary skill in the art would appreciate the advantages of using same.

[00203] In another non-limiting embodiment of the presently disclosed and claimed inventive concept(s), the polyisocyanates may include one or more polyisocyanate adducts containing biuret, urethane, uretdione, allophanate, isocyanurate, and/or iminooxadiazinedione groups.

[00204] In one non-limiting embodiment, forming the prepolymer comprises reacting: (i) a polyisocyanate; (ii) an oligomeric form of polyethylene terephthalate with hydroxyl and/or amine group(s) (e.g., the dPET compounds described with respect to Tables A, B, A1, A2, and combinations thereof); and (iii) a water solubilizing monomer, at a temperature ranging from about 20°C to 180°C to provide a polyurethane prepolymer that comprises a water solubilizing group. A water solubilizing monomer is a compound bearing a hydrophilic group or an ionic group (or a group that can be made into a hydrophilic group or an ionic group) that facilitates solubility or dispersion in water and that can be incorporated into the polymer chain of the prepolymer. Representative groups that facilitate solubility in water include, but are not limited to, hydroxyl groups, carboxyl groups, sulphonate groups, amino groups, and quaternary ammonium groups.

[00205] One skilled in the art would readily appreciate and be aware of suitable water solubilizing monomers that are useful for preparing the prepolymers described above and thereafter the PUDs of the presently disclosed and claimed inventive concept(s). Representative water solubilizing monomers useful in the methods of the presently disclosed and claimed inventive concept(s) include, but are not limited to, hydroxy-carboxylic acids having the general formula $(\text{HO})_x\text{Q}(\text{COOH})_y$, wherein Q is a straight or branched hydrocarbon radical containing 1 to about 12 carbon atoms, x and y ranges from 1 to about 3. Such hydroxy-carboxylic acids are described in U.S. Pat. No. 6,576,702, the contents of which are incorporated herein by reference. Examples of such hydroxy-carboxylic acids include, but are not limited to, citric acid, dimethylolpropanoic acid (DMPA), dimethylol butanoic acid (DMBA), glycolic acid,

lactic acid, malic acid, dihydroxymalic acid, and dihydroxytartaric acid. In one non-limiting embodiment, dihydroxy-carboxylic acids are used. Other suitable water solubilizing monomers include thioglycolic acid, 2,6-dihydroxybenzoic acid, sulfoisophthalic acid, and polyethylene glycol.

[00206] Typically, the water solubilizing monomer is present in an amount ranging from about 0.1 to about 30 percent by weight of the prepolymer. In one non-limiting embodiment, the water solubilizing monomer is present in an amount ranging from about 2 to about 8 percent by weight of the prepolymer. In another embodiment, the water solubilizing monomer is present in an amount ranging from about 3 to about 6 percent by weight of the prepolymer. In another non-limiting embodiment, the hydrophilic monomer is dimethylolpropionic acid (DMPA). Typically, N-methyl-2-pyrrolidone (NMP) is also present in order to support the addition of DMPA into the prepolymer structure.

[00207] A monol can also be included in the prepolymer formulation. The monol is, in one non-limiting embodiment, a mono-functional hydrophilic polyether. The monols can be incorporated into the prepolymer in order to modify the properties of the latex and improving ease of emulsion formation. When present, the monol is present in amount of from 0.1 to about 15 weight percent of the prepolymer formulation, preferably from 2 to about 5 weight percent of the prepolymer formulation.

[00208] Formation of the prepolymer can take place with or without the use of a catalyst. Suitable catalysts useful for preparing the prepolymer include, but are not limited to, stannous octoate, dibutyl tin dilaurate, and tertiary amine compounds such as triethylamine and bis-(dimethylaminoethyl) ether, morpholine compounds such as $\beta\beta'$ -dimorpholinodiethyl ether, bismuth carboxylates, zinc bismuth carboxylates, iron (III) chloride, potassium octoate, potassium acetate, DABCO®(bicycloamine) (commercially available from Air Products), and FASCAT®2003 (commercially available from Arkema). The amount of catalyst used may be, but not by way of limitation, from about 5 to about 200 parts per million of the total weight of prepolymers. In one non-limiting embodiment, a zirconium chelate catalyst such as K-KAT® XC9213 (commercially available from King Industries, Inc.) is used. Additionally, water degradable catalyst can be used to form the prepolymer. The term “water degradable” means the catalyst deactivates in the presence of water—i.e., the catalyst used in the production of the polyurethane product (which may contain some

amount of residual catalyst) is dispersed into the aqueous solvent to thereby create PUD. In this manner, residual catalyst remaining in the PUD, which is thereafter used in a commercial application, does not interfere or react with the resulting PUD coating. Suitable water degradable catalysts include, but are not limited to, zirconium chelate such as the K-KAT® XC9213 catalyst from King Industries, Inc. The amount of water degradable catalyst used may be from about 5 to about 200 parts per million. One of ordinary skill in the art would appreciate that any water degradable catalyst for isocyanate reactions could be used.

[00209] Additional polyurethane dispersion additives may include, for example but not by way of limitation, PEG-200, PEG-600, PEG-1500 (indeed, PEG-N, wherein N=200 to 500,000), 1,4-butanediol, 1,6-hexanediol, Tetraethylene glycol, Cis-2-butene-1,4-diol, Glycerin, 1,4-cyclohexanedimethanol, Tris(hydroxymethyl)ethane, 1,1,1-tris(hydroxymethyl)ethane, Ethylene diamine, Piperazine, 1,3-diaminopropane, 1,8-diaminooctane, and combinations thereof

[00210] Based on the nature of the oligomeric form of polyethylene terephthalate containing hydroxyl and/or amine group(s) and polyisocyanates employed (i.e., the dfPET represented by the formulas found in Tables A, B, A1, A2, and combinations thereof), the polyurethane dispersion will have a measurable acid number. The acid number of the polyurethane can be at least about 27, in some cases at least about 30, in other cases at least about 50 and in some situations at least about 65 mg KOH/g. Also, the acid number of the polyurethane in the dispersion can be up to about 240, in some cases about 220, in other cases at least about 200, in some situations up to about 150 and in other situations up to about 100 mg KOH/g.

[00211] In a non-limiting embodiment, the acid groups of the polyurethane prepolymer can be neutralized using a suitable neutralizing agent. Suitable neutralizing agents include, but are not limited to, amines and/or alkali metal hydroxides. In a particular non-limiting embodiment of the presently disclosed and claimed inventive concept(s), the amine neutralizing agents can be tertiary amines selected from N-methyl morpholine, trimethyl amine, triethylamine, triethanol amine, pyridine, methylpyridine, benzyldimethylamine, N,N-endoethylenepiperazine, N-methylpiperidine, pentamethyldiethylenetriamine, N,N-dimethylaminocyclohexane, N,N'-dimethylpiperazine, N,N-dimethylbenzylamine, and combinations thereof.

[00212] In certain preferred but non-limiting embodiments of the presently disclosed and claimed inventive concept(s), one or more chain terminating agents may be used to control the molecular weight of polyurethane polymer contained within the aqueous polyurethane dispersion. The amount of chain terminating agent present may range from 0% to about 2.5%, preferably from about 0.3% to about 1.25%, and more preferably from about 0.5% to about 0.8% by weight of the reaction mixture excluding solvent (if present). In certain preferred embodiments such as those where the neutralizing agent is added prior to the chain terminating agent, the amount of chain terminating agent that is added is sufficient to react from about 2 to 50 molar % of the remaining isocyanate groups contained therein. Compounds, particularly monofunctional compounds, such as those containing hydroxyl, amino, and thio groups that have only one active hydrogen relative to isocyanate groups are suitable chain terminating agents. Examples of suitable monofunctional chain terminators include amino alcohols, ammonia, primary or secondary aliphatic, alicyclic, aromatic, araliphatic, or heterocyclic amines, especially primary aliphatic amines such as ethylamine. Compounds containing secondary amino groups are preferred. Particular non-limiting embodiments of compounds containing secondary amino groups include those compounds wherein at least one of the organic groups attached to the nitrogen atom contains greater than 2 carbon atoms. In certain preferred non-limiting embodiments, the chain terminating agent comprises di-n-butylamine.

[00213] The prepolymer can be dispersed in an aqueous medium using any method known to those skilled in the art. Typically, the prepolymer is simply added to the aqueous medium with stirring, preferably rapid stirring. Sometimes, high speed/high shear stirring is used to obtain a dispersion of good quality. Typically, the prepolymer and the aqueous medium are combined to provide a polyurethane dispersion.

[00214] The prepolymer can be dispersed in the aqueous medium at any temperature. Typically, however, the temperature is below the boiling point of the aqueous medium. By using a closed reactor capable of withstanding elevated pressure, however, it is possible to disperse the prepolymer in the aqueous medium at a temperature higher than the boiling point of the aqueous medium. Generally, in commercial processes for preparing polyurethane dispersions the prepolymer is dispersed in the aqueous medium at a temperature of less than about 50°C and often less than about 25°C. The relatively low temperature is required since the isocyanate groups of the prepolymer undergo a relatively rapid reaction with water that leads to

polymerization rendering the prepolymer non-dispersible in water. Furthermore, the rapid reaction of the isocyanate groups of the prepolymer with water, at higher temperatures, leads to the formation of carbon dioxide—thereby resulting in foaming, which renders the process difficult to perform. By lowering the temperature at which the dispersion is formed, such side reactions are reduced. Accordingly, in one non-limiting embodiment, the prepolymer is dispersed in the aqueous medium at a temperature less than about 50°C. In another non-limiting embodiment, the prepolymer is dispersed in the aqueous medium at a temperature ranging from about 20°C to about 50°C.

[00215] The polyurethane prepolymer, once it is dispersed in the aqueous medium, can thereafter be chain extended to further increase its molecular weight and provide the final PUD with additional advantages. For example but not by way of limitation, any chain extension agent having more than one reactive functional group that is capable of reacting with isocyanates may be added to the PUD so as to react with the isocyanate functional groups of the prepolymer and thereby increase its molecular weight. Examples of compounds which can react with the isocyanate functional groups and thereby chain extend the polymer (in addition to the water) include polyols, polyamines, polythiols, or other compounds having reactive functional groups, such as hydroxyl groups, thiol groups, amine groups, carboxylic acids, and acetylacetonate protons.

[00216] Suitable polyol chain extenders include, but are not limited to, 1,6-hexanediol; cyclohexanedimethanol; 2-ethyl-1,6-hexanediol; 1,4-butanediol; ethylene glycol and lower oligomers of ethylene glycol including diethylene glycol, triethylene glycol and tetraethylene glycol; propylene glycol and lower oligomers of propylene glycol including dipropylene glycol, tripropylene glycol and tetrapropylene glycol; 1,3-propanediol; 1,4-butanediol; neopentyl glycol; dihydroxyalkylated aromatic compounds such as the bis (2-hydroxyethyl) ethers of hydroquinone and resorcinol (HER); p-xylene-a, a'-diol; the bis (2-hydroxyethyl) ether of p-xylene-a, a'-diol; m-xylene-a, a'-diol and the bis (2-hydroxyethyl) ether, trimethylol propane, 1,2,6-hexanetriol, glycerol, and mixtures thereof.

[00217] Suitable polyamine extenders include, but are not limited to, p-phenylenediamine, m-phenylenediamine, benzidine, 4,4'-methylenedianiline, 4,4'-methylenibis(2-chloroaniline), ethylene diamine, m-xylylenediamine (MXDA) and combinations of these. Other suitable chain extenders are amino alcohols such as

ethanolamine, propanolamine, and butanolamine. Acidic chain extenders include 2,2-bis(hydroxymethyl)propionic acid (DMPA), 2,2-bis(hydroxymethyl)butyric acid, and diphenolic acid. Other suitable chain extenders and combinations of chain extenders are also within the scope of the present invention. Polyisocyanates can also be used, such as any of those listed previously, to further chain extend the molecule and/or impart desired properties.

[00218] Chain extension can also be accomplished by means standard in the art. For example, the chain extenders can be heated in a flask and the polyurethane and/or PUD added thereto. In certain nonlimiting embodiments, it may be desired to neutralize a chain extended polyurethane having acidic functionality to increase the stability of the polyurethane when it is dispersed in water. Any amine or other neutralizing agent can be used; certain chain extenders may also provide neutralization. Examples include, but are not limited to, MXDA, N-methyl diethanolamine (NMDEA), N-ethyldiethanolamine, N-propyldiethanolamine, N-isopropyl diethanolamine, N-butyldiethanolamine, N-isobutyldiethanolamine, N-oleyl diethanolamine, N-stearyldiethanolamine, ethoxylated coconut oil fatty amine, N-allyl diethanolamine, N-methyldiisopropanolamine, N-ethyl diisopropanolamine, N-propyl diisopropanolamine, N-butyl diisopropanolamine, C-cyclohexyl diisopropanolamine, N,N-diethoxylaniline, N,N-diethoxyl toluidine, N,N-diethoxyl-1-aminopyridine, N,N'-diethoxyl piperazine, dimethyl-bis-ethoxyl hydrazine, N,N'-bis-(2-hydroxyethyl)-N,N'-diethylhexahydrop-phenylenediamine, N-12-hydroxyethyl piperazine, polyalkoxylated amines, such as propoxylated methyl diethanolamine, also such compounds as N-methyl-N,N-bis-3-aminopropylamine, N-(3-aminopropyl)-N,N'-dimethyl ethylenediamine, N-(3-aminopropyl)-N-methylethanolamine, N,N'-bis-(3-aminopropyl)-N,N'-dimethyl ethylenediamine, N,N'-bis-(3-aminopropyl)-piperazine, N-(2-aminoethyl)-piperazine, N,N'-bisoxoethylpropylenediamine, 2,6-diaminopyridine, diethanolaminoacetamide, diethanolamidopropionamide, N,N-bisoxoethylphenyl thiosemicarbazide, N,N-bis-oxoethylmethyl semicarbazide, p,p'-bis-aminomethyldibenzylmethylamine, 2,6-diaminopyridine, 2-dimethylaminomethyl-2-methylpropanol, 3-diol, dimethylethanol amine (DMEA), and combinations thereof. The neutralizing agent can also contribute to the barrier properties of the coating. In certain nonlimiting embodiments, the polyurethane is in solvent, and neutralization of any acid in the polyurethane molecule is not desired and/or sought.

[00219] Other materials, particularly water, can function to extend chain length and so may (and should) be considered as being chain extenders for purposes of the presently disclosed and claimed inventive concept(s). In a particularly preferred but limiting example, the chain extender is water or a mixture of water and an amine such as, for example but not by way of limitation, aminated polypropylene glycols such as Jeffamine D-400 (as well as other such compounds available from Huntsman Chemical Company), amino ethyl piperazine, 2-methyl piperazine, 1,5-diamino-3-methyl-pentane, isophorone diamine, ethylene diamine, diamino butane, hexamethylene diamine, tetramethylene tetraamine, aminoethyl propyl trimethoxy silane, diethylene triamine, triethylene tetraamine, triethylene pentamine, ethanol amine, lysine in any of its stereoisomeric forms and salts thereof, hexane diamine, hydrazine, piperazine, and combinations thereof. In the practice of one non-limiting embodiment of the presently disclosed and claimed inventive concept(s), the chain extender may preferably be a solution of any difunctional and/or multifunctional water soluble amine compound in water—e.g., hexanediamine.

[00220] Surfactants can also be useful for preparing a stable PUD accordingly to the presently claimed and disclosed inventive concept(s). Surfactants useful for preparing a stable dispersion in the practice of the presently disclosed and claimed inventive concept(s) can be cationic surfactants, anionic surfactants, zwitterionic, non-ionic surfactants, and combinations thereof. Examples of anionic surfactants include sulfonates, carboxylates, and phosphates. Examples of cationic surfactants include quaternary amines. Examples of non-ionic surfactants include block copolymers containing ethylene oxide and silicone surfactants, such as ethoxylated alcohol, ethoxylated fatty acid, sorbitan derivative, lanolin derivative, ethoxylated nonyl phenol or an alkoxyated polysiloxane. Furthermore, the surfactants can be either external surfactants or internal surfactants. External surfactants are surfactants which do not become chemically reacted into the polymer during dispersion preparation. Examples of external surfactants useful herein include salts of dodecyl benzene sulfonic acid, and lauryl sulfonic acid salt. Internal surfactants are surfactants which do become chemically reacted into the polymer during dispersion preparation. An example of an internal surfactant useful herein includes anionic molecules such as 2,2-dimethylol propionic acid and dihydroxy and amino sulfate and sulfonate their salts, quaternized ammonium salts, and nonionic hydrophilic species, such polyethylene oxide monols, polyols, and combinations thereof. Such hydrophilic ionic

and nonionic moieties may be built into the polymer backbone and such non-limiting examples are preferred for use with the presently disclosed and claimed inventive concepts.

[00221] The PUDs may also contain further auxiliaries and additives, such as, for example, inorganic and organic pigments, dyes, leveling agents, viscosity regulators, natural and synthetic waxes, anti-foaming agents, matting agents and the like. One of ordinary skill in the art, given the present specification and teachings, would be capable of appreciating and implementing the use of such auxiliary and additive compounds with the PUDs of the presently disclosed and claimed inventive concept(s).

[00222] Processes for making dispersions are well known in the art. The dispersions can be done by a batch process or by a continuous process. In one embodiment of a batch process, the dispersion is performed by an inverse phase process wherein a small amount of water, including a small amount of anionic surfactant, is first added to a continuous prepolymer phase and mixed and then more water is added with mixing until the phase inverts. The resulting dispersion has a particle size sufficient to make the dispersion stable. Additionally, the PUD containing acetone may be directly dispersed in water. In one such embodiment, the prepolymer containing acetone is directly dispersed into water by use of either an internal or external surfactant.

[00223] Dispersion of the prepolymer in an aqueous solvent to produce the exemplary PUDs of the presently disclosed and claimed inventive concept(s) were generally carried out in resin kettles using a variety of stirring blades (e.g., crescent shaped Teflon stirring blades, Cowles stirring blades, etc.). Direct observations indicate that a commercially feasible and stable PUD formulation does not require the aggressive shearing force obtainable through use of the Cowles blade although it is contemplated for use in the methods of the presently disclosed and claimed inventive concept(s). Examples of bench scale and pilot plant scale reactions to produce PUDs of the presently disclosed and claimed inventive concept(s) follow herein below.

C. Examples of PUDs made from dfPET

[00224] As set forth in Tables X, Y and Z, PUDs made from dfPET (representing the compounds set forth in Tables A, B, A1, A2, and combinations thereof) and isocyanates have been synthesized and characterized. The PUDs of Tables X, Y, and Z, were produced according to ten (10) different processes which share similar characteristics, steps, and/or reactive compounds and/or conditions. Each of these ten

different processes are outlined hereinbelow in detailed and are denoted as “Procedure X” – wherein the “X” stands for the letters A through J. Each of these procedures are described with particularity hereinafter and each PUD in Tables X, Y, and Z are cross-referenced to these procedures. One of ordinary skill in the art would appreciate multiple and varied changes which can be made to these processes and all such changes or variations are considered to be encompassed within the scope of the presently disclosed and claimed inventive concept(s). Additionally, one of ordinary skill in the art given the present disclosure, would be capable of making the PUDs of Tables X, Y, and Z and would also appreciate that such PUDs are merely examples and should not be construed as being limiting with respect to the full breadth and scope of PUDs that can be made according to the presently disclosed and claimed inventive concept(s).

[00225] All percentages are indicative of weight percent unless otherwise noted. All chemical reactants were obtained from Sigma-Aldrich unless otherwise noted. As used below, the phrase “the NCO value is within a desirable range” means that based on the calculated value of NCO, the reaction has progressed substantially to completion—i.e., the amount of NCO remaining is substantially equivalent to the molar excess of NCO added to the reaction as compared to dfPET. Lesser amounts of NCO remaining in the solution is preferable as reducing the amount of NCO: (i) decreases the formation of carbon dioxide when the polyurethane is dispersed in the aqueous solvent, and (ii) increases the likelihood that a uniform prepolymer (i.e., the polyurethane) is prepared. The NCO value (acid value) was calculated according to equation AA. The hydroxyl value was calculated according to equation BB. And the weight percent of isocyanate was calculated according to equation CC.

$$\text{Equation AA} \quad AC = \frac{(mL \text{ Titrant})(56.1)(N_{base})}{(Sample \text{ wt.})(Non - vol)}$$

$$\text{Equation BB} \quad OH\# = \frac{(Blank - Sample)(56.1)(Normality)}{(Sample \text{ wt.})(Non - vol)} + Acid \text{ Number}$$

$$\text{Equation CC} \quad \frac{8.410 \cdot (blank - mL \text{ of titrant})}{sample \text{ weight}}$$

1. Procedure A

[00226] *Creation of Polyurethane Prepolymer.* Charge isocyanate to a glass or glass lined reaction kettle equipped with condenser, a form of agitation via either a magnetic stir or overhead mixer, a heat source either by jacketing the reactor or by using a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and co-solvent and add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. Intermittently ascertain NCO values. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add the triethylamine to the pot and proceed to the dispersion step.

[00227] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. This mixture is then vacuum stripped until all acetone is removed.

2. Procedure B

[00228] *Creation of Polyurethane Prepolymer.* Charge isocyanate to a glass or glass lined reaction kettle equipped with condenser, a form of agitation via either a magnetic stir or overhead mixer, a heat source either by jacketing the reactor or using a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent. Add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. The hydroxyl functional chain extender is then solubilized in acetone and added to the pot. An additional charge of catalyst is added. Heat the pot to reflux for an additional hour and then remove an aliquot for NCO titration. If the NCO value is within a desirable range, add the triethylamine to the pot and proceed to the dispersion step.

[00229] *Dispersion* - Heat deionized water to approximately 60°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The pot and content are removed from the heating mantel and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate

maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. This mixture is then vacuum stripped until all acetone is removed.

3. Procedure C

[00230] *Creation of Polyurethane Prepolymer.* Charge isocyanate to a glass or glass lined reaction kettle equipped with condenser, a form of agitation via either a magnetic stir or a overhead mixer, a heat source either by jacketing the reactor or using a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent. Add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. The hydroxyl functional chain extender is then solubilized in acetone and added to the pot. An additional charge of catalyst is added. Heat the pot to reflux for an additional hour and then remove an aliquot for NCO titration. If the NCO value is within a desirable range, add the triethylamine to the pot and proceed to the dispersion step.

[00231] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantle and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. The amine chain extender is then solubilized in water and added to the dispersion. This mixture is then vacuum stripped until all acetone is removed.

4. Procedure D

[00232] *Creation of Polyurethane Prepolymer.* Charge isocyanate to a glass or glass lined reaction kettle equipped with condenser, a form of agitation via either a magnetic stir or an overhead mixer, a heat source either by jacketing the reactor or using a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent and add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add the triethylamine to the pot and proceed to the dispersion step.

[00233] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. The amine chain extender is then solubilized in water and added to the dispersion. This mixture is then vacuum stripped until all acetone is removed.

5. Procedure E

[00234] *Creation of Polyurethane Prepolymer.* Charge isocyanate to a glass or glass lined reaction kettle equipped with condenser, a form of agitation via either a magnetic stir or overhead mixer, a heat source either by jacketing the reactor or using a hotplate, and a N₂ purge. Solubilize the dFPET in acetone and cosolvent. Add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. The hydroxyl functional chain extender is then solubilized in acetone and added to the pot. An additional charge of catalyst is added. Heat the pot to reflux for an additional hour and then remove an aliquot for NCO titration. If the NCO value is within a desirable range, add the second hydroxyl functional chain extender solubilized in acetone added to the pot and an additional charge of catalyst is added. Heat the pot to reflux for an additional hour and then remove an aliquot for NCO titration. When NCO values are within a desirable range, add the triethylamine to the pot and proceed to the dispersion step.

[00235] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. This mixture is then vacuum stripped until all acetone is removed.

6. Procedure F

[00236] *Creation of Polyurethane Prepolymer.* Charge isocyanate to a glass or glass lined reaction kettle equipped with condenser, a form of agitation via either a magnetic stir or overhead mixer, a heat source either by jacketing the reactor or using

a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent. Add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. The hydroxyl functional chain extender is then solubilized in acetone, added to the pot, and an additional charge of catalyst is added. Heat the pot to reflux for an additional hour and then remove an aliquot for NCO titration. If the NCO value is within a desirable range, the second hydroxyl functional chain extender (solubilized in acetone) is added to the pot and an additional charge of catalyst is added. Heat the pot to reflux for an additional hour and then remove an aliquot for NCO titration. When NCO values are within a desirable range, add the triethylamine to the pot and proceed to the dispersion step.

[00237] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. The amine chain extender is then solubilized in water and added to the dispersion. This mixture is then vacuum stripped until all acetone is removed.

7. Procedure G

[00238] *Creation of Polyurethane Prepolymer*. Charge isocyanate to a glass or a glass lined reaction kettle equipped with a condenser, a form of agitation via either a magnetic stir or an overhead mixer, a heat source either by jacketing the reactor or using a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent and add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. When NCO values are within a desirable range, add n-methyldiethanol amine and heat to reflux for an additional hour. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add the propionic acid to the pot and proceed to the dispersion step.

[00239] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and

heating is discontinued. Keep water/acid mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. This mixture is then vacuum stripped until all acetone is removed.

8. Procedure H

[00240] *Creation of Polyurethane Prepolymer.* Charge isocyanate to a glass or a glass lined reaction kettle equipped with a condenser, a form of agitation via either a magnetic stir or an overhead mixer, a heat source either by jacketing the reactor or using a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent and add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. The hydroxyl functional chain extender is then solubilized in acetone, added to the pot, and an additional charge of catalyst is added. Heat the pot to reflux for an additional hour and then remove an aliquot for NCO titration. When NCO values are within a desirable range, add n-methyldiethanol amine and heat to reflux for an additional hour. Remove an aliquot from the pot for NCO titration to determine how far the reaction has progressed. When NCO values are within a desirable range, add the propionic acid to the pot and proceed to the dispersion step.

[00241] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and heating is discontinued. Keep water/acid mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. This mixture is then vacuum stripped until all acetone is removed.

9. Procedure I

[00242] *Creation of Polyurethane Prepolymer.* Charge isocyanate to glass or a glass lined reaction kettle equipped with a condenser, a form of agitation via either a magnetic stir or an overhead mixer, a heat source either by jacketing the reactor or using hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent. After the dfPET is completely dissolved, add the additional polyol. Add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. Remove an aliquot from the pot for NCO titration to determine if reaction is complete. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. Remove an aliquot from the pot for NCO titration to determine if reaction is complete. When NCO values are within a desirable range, add the triethylamine to the pot and proceed to the dispersion step.

[00243] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. This mixture is then vacuum stripped until all acetone is removed.

10. Procedure J

[00244] *Creation of Polyurethane Prepolymer.* Charge TDI to a glass or glass lined reaction kettle equipped with a condenser, a form of agitation via either a magnetic stir or an overhead mixer, a heat source either by jacketing the reactor or using a hotplate, and a N₂ purge. Solubilize the dfPET in acetone and cosolvent. After the dfPET is completely dissolved add the additional polyol. Add this mixture to the TDI under stir. Add catalyst and heat for 1 hour at reflux. Pull a pot sample for NCO titration to determine if reaction is complete. When NCO values are within a desirable range, add dimethylol propionic acid, followed by the catalyst and heat to reflux for an additional hour. The chain extender is then added to the pot, after an additional load of catalyst is added. Finally add triethylamine to the pot and proceed to the dispersion step.

[00245] *Dispersion* – Heat deionized water to approximately 70°C and add triethylamine to the water. Heat the polyurethane in acetone up to reflux temperature (approximately 60°C). The Pot and content are removed from the heating mantel and heating is discontinued. Keep water/amine mixture to be agitated at a consistent rate maintaining a slight vortex without aeration. Then slowly add the hot polyurethane as a steady stream. This mixture is then vacuum stripped until all acetone is removed.

[00246] The following examples are provided to illustrate synthesis of polyurethane dispersions (i.e., PUDs) in the presently disclosed and claimed inventive concepts(s). The examples are not intended to limit the scope of the presently disclosed and claimed inventive concept(s) and should not be so interpreted.

Examples

[00247] *dfPET Example 1* - The functionalized and digested PETs (dfPETs) used in Example 734-63 and Example 10320PRE001 were produced by the following methods: treating a ratio of 1 mole rPET (with respect to the monomer weight of PET) with 1 mole neopentyl glycol and 0.014 mole zinc acetate dihydrate at about 180-200°C to give material with an average MW of ca. 1300; treating 1 mole rPET

(with respect to the monomer weight of PET) with 2.79 mole of ethylene glycol and 0.014 mole zinc dihydrate at about 180-200°C to give material with an average MW ca. 720. Digestions were performed on scales ranging from 20 lbs to 1150 lbs. Most PUD examples used dfPET prepared by the first method, four PUDs were prepared with material from the latter method (dfPET 732-34).

[00248] PUD Bench Scale Example 734-63 – Toluene diisocyanate (67.7g) and N-methylpyrrolidone (NMP, 20 mL) were heated to 60°C. A solution of 1% dibutyltin dilaurate in NMP (3 drops) was added. A 100°C mixture of dfPET (60.4 g) and 2,2-bis(hydroxymethyl)propionic acid (DMPA, 13.1 g) in NMP (20 mL) was slowly added to the TDI solution. A water bath was used to maintain the temperature about 50-70°C and an additional 10 mL NMP was used to complete the transfer. After stirring for 45 min at about 55°C, a solution of PEG-200 in acetone (50 mL) was added. An additional charge of 1% dibutyltin dilaurate in NMP (3 drops) was added. The solution was stirred for 30 min at about 55°C. Triethylamine (18 mL) was added. The reaction mixture was stirred with 400 mL deionized water and acetone was removed on a rotary evaporator under vacuum. The resulting polyurethane dispersion was a green solution with a slight amount of haze.

[00249] PUD Pilot Plant Scale Example 10320PRE001 – A 100 gallon reactor was purged with nitrogen and charged 113 lbs (11.2 gallons) of toluene diisocyanate. The following were then added: 160 lbs of reagent grade acetone, 22.1 lbs. of 1-methyl-2-pyrrolidinone (NMP) and 21.7 lbs of 2,2-bis(hydroxymethyl)propionic acid, 0.0763 lbs. (0.0089 gallons; 35.02 grams) of 1% dibutyltin dilaurate in NMP, 106.8 lbs. of hot dfPET, 20 lb (3 gallons) of reagent grade acetone, and 17.1 (2 gallons) of NMP. The reaction mixture was stirred at about 55°C for 30 minutes. A charge of 13.6 lb PEG 200 and .0763 lb (35.02 grams) of 1% dibutyltin dilaurate/NMP solution were added followed by a charge of 64.3 lbs (9.74 gallons) reagent grade acetone. The resulting reaction mixture was stirred at about 55°C for 60 minutes. The reaction was sampled after 60 min and 90 min, titration showed the first sample was 1.22%NCO and the second sample was 0.9%NCO. The reaction mixture was cooled to about 40-50°C. 16.3 lbs of triethylamine were added to the reactor while maintaining at about 40-50°C during TEA addition. The mixture was stirred for 30 minutes and then sampled for viscosity at about 40°C (1040cps @40°C). 650 lbs of deionized water were charged into a dispersion vessel fitted for high shear agitation. The water was heated to about 40°C and stirred at 121 rpm (full speed on variable speed drive).

Using nitrogen pressure, the polymer reaction mixture was transferred to the dispersion vessel. After transfer was complete, the dispersion was stirred at 121 rpm for about 5 minutes. The pH was adjusted with 5 lbs TEA to pH 9.01. Added 1.0 lbs of BYK 28 (water defoamer) and stirred for 15 minutes. Acetone was removed to 0.12% by vacuum distillation at about 25-30°C. An additional charge of 115 lbs deionized water was added to obtain desired viscosity. The PUD was filtered and packaged. Total amount isolated was 871 lbs.

[00250] *dfPET Example 753-65* - The functionalized and digested PETs (dfPETs) used in Examples 753-67, 753-69, 753-91 and 1067-93 were produced as follows: 310 grams (1.61 moles) rPET, 110.5 grams (1.45 moles) propylene glycol and 5.0 grams zinc acetate dihydrate were charged into a 1L 4-neck round bottom flask fitted with a mechanical stirrer, thermocouple, condenser, heating mantle under nitrogen at room temperature. The mixture was heated to about 180-200°C and stirred until it became homogeneous. The dfPET had an average hydroxyl number of 354.

[00251] *PUD Bench Scale Example 753-67* – dfPET (50.0g) from Example 753-65 and acetone (207.5 ml) were mixed in a water bath to form a dfPET/acetone solution. In a 1L 4-neck round bottom flask fitted with a mechanical stirrer, thermocouple and condenser under N₂, toluene diisocyanate (72.6g) and N-methylpyrrolidone (NMP, 75.8g) were added. Then 137.5 ml acetone was added. 2,2 bis(hydroxymethyl)propionic acid (DMPA, 23.13 g) was added as the temperature was raised from ambient to about 30°C. A solution of 4% zirconium (IV) acetylacetonate in NMP (15 drops) was added at about 35°C. At about 40°C, the dfPET/acetone solution was added in the flask. The temperature was raised to about 55°C. 4.67 grams sample were withdrawn and the NCO was measured as about 156.8 mmoles. After stirring for about three hours at 55°C, 11.93g glycerin and 15 drops of 4% zirconium (IV) acetylacetonate in NMP were added. The solution was stirred for about one hour at 55°C. Then, triethylamine (27.5g) was added. The reaction mixture was stirred with 250g deionized water and acetone was removed on a rotary evaporator under vacuum. The resulting polyurethane dispersion was a clear gold solution.

[00252] *PUD Bench Scale Example 753-69* – dfPET (39.0g) from Example 753-65 and acetone (150 ml) were mixed in a water bath to form a dfPET/acetone solution. In a 1L 4-neck round bottom flask fitted with a mechanical stirrer, thermocouple and condenser under N₂, toluene diisocyanate (87.06g), N-methylpyrrolidone (NMP,

90.99g) and acetone (100 ml) were added. 2,2 bis(hydroxymethyl)propionic acid (DMPA, 27.0 g) was added as the temperature was raised from ambient to about 50°C. At about 50°C, the dfPET/acetone solution was added in the flask. A solution of 4% zirconium (IV) acetylacetonate in NMP (8 drops) was added at about 35°C. The temperature was raised to about 55°C. After stirring for about two and a half hours at 55°C, a 2.48 gram sample was withdrawn and the NCO was measured at about 265.0 mmoles. Then, 15.3g ethylene glycol and 18 drops of 4% zirconium (IV) acetylacetonate in NMP were added. The solution was stirred for about one hour at 55°C. Then, triethylamine (33.0 g) was added. The reaction mixture was stirred with 300g deionized water and acetone was removed on a rotary evaporator under vacuum. The resulting polyurethane dispersion was a clear gold solution.

[00253] *PUD Bench Scale Example 753-91* – dfPET (83.0g) from Example 753-65 and acetone (138 ml) were mixed in a water bath to form a dfPET/acetone solution. In a 1L 4-neck round bottom flask fitted with a mechanical stirrer, thermocouple and condenser under N₂, toluene diisocyanate (80.0g), acetone (95 ml) and N-methylpyrrolidone (NMP, 29.5 ml) were added. A solution of 4% zirconium (IV) acetylacetonate in NMP (2 drops, about 0.03g) was added at room temperature. Then the dfPET/acetone solution was added in the flask and the temperature was increased to about 40°C. 4.59 grams sample were withdrawn and the NCO was measured as about 361.9 mmoles. Then N-methyldiethanolamine (46.0g) was added. The temperature was increased to about 50°C. Two drops of a solution of 4% zirconium (IV) acetylacetonate in NMP at 50°C. After about one hour, the sample was withdrawn (3.76 g) and the NCO was measured as about 363.0 mmoles. Then 28.59 g propionic acid. The reaction mixture was stirred with 500g deionized water. Acetone was removed on a rotary evaporator under vacuum. The resulting polyurethane dispersion was a clear gold solution.

[00254] *PUD Bench Scale Example 1067-93* – dfPET (83.03 g) from dfPET Example 753-65, acetone (102.06 g) and N-methylpyrrolidone (NMP, 31.29 g) were mixed at room temperature. In a 500ml 1-neck round bottom flask equipped with a magnetic stirrer, hot plate and condenser, toluene diisocyanate (80.04g) and the above dfPET/acetone/NMP mixture were added under nitrogen at room temperature. The temperature was raised to about 50°C; two drops of K-KAT®XC-9213 (zirconium chelate catalyst, King Industries Inc.) were added. The mixture was heated to about

50°C for about one hour at reflux. A pot sample was withdrawn for NCO titration to determine whether the reaction was complete. The NCO value was measured less than 395.8 mmoles and then 46.06 grams NMDEA was added. The mixture was heated to reflux for about one hour. A pot sample was withdrawn for NCO titration and the NCO value was less than 376.0 mmoles. 33.76 grams propionic acid was added. 249 grams DI water was added for dispersion. Acetone was removed on a rotary evaporator under vacuum. The average solid weight percentage in the resulting PUD was about 34.03 wt%.

[00255] *dfPET Example 1067-49* - The functionalized and digested PETs (dfPETs) used in Examples 1067-52 and 1067-68 were produced as follows: 193.02 grams rPET pellets, 62.37 grams propylene glycol and 2.06 grams zinc acetate dihydrate were charged into a 500 ml resin kettle with a central stirrer and condenser. The mixture was heated to about 160-180°C and stirred until it became homogeneous.

[00256] *PUD Bench Scale Example 1067-52* – dfPET (79.6 g) from Example 1067-49, acetone (103.53 g), N-methylpyrrolidone (NMP, 21.01 g) and toluene diisocyanate (87.50 g) were charged in a 1L 4-neck round bottom flask equipped with a central stirrer, heating mantle, thermocouple and condenser. The temperature was increased to about 50°C and three drops of K-KAT®XC-9213 (zirconium chelate catalyst, King Industries Inc.) were added. The mixture was heated to about 60°C for about one hour at reflux. A pot sample was withdrawn for NCO titration to determine whether the reaction was complete. The NCO value was less than 574.6 mmoles. 58.0 grams NMEDA was added. The mixture was heated to reflux for about two hours. 58.26 grams DBA were added. 500 grams DI water and 27.2 grams glacial acetic acid were added for dispersing the product. Acetone was removed on a rotary evaporator under vacuum. The average solid weight percentage in the resulting PUD was about 25.3 wt%.

[00257] *PUD Bench Scale Example 1067-68* – dfPET (20.72 g) from Example 1067-49, acetone (108.84 g), N-methylpyrrolidone (NMP, 30.35 g), toluene diisocyanate (29.14g) and one drop of K-KAT®XC-9213 (zirconium chelate catalyst, King Industries Inc.) were added under nitrogen at room temperature in a 500ml 1-neck round bottom flask equipped with a magnetic stirrer, hot plate and condenser. The mixture was heated to about 150°C for about one hour at reflux. A pot sample was withdrawn for NCO titration to determine whether the reaction was complete. The

NCO value was less than 260.3 mmoles, and 9.24 grams DMPA was added. Then 7.23 grams ethylene glycol was added. The mixture was heated to reflux for about one hour. A pot sample was withdrawn for NCO titration and the NCO value was less than 122.3 mmoles. 8.36 grams TEA was added. 125 grams DI water and 2.22grams TEA were added for dispersing the product. Acetone was removed on a rotary evaporator under vacuum. The average solid weight percentage in the resulting PUD was about 34.03 wt%.

[00258] *dfPET Example 753-70* - The functionalized and digested PETs (dfPETs) used in Example 1067-92 was produced as follows: 1000.0 grams (5.2 moles) rPET pellets, 542.0 grams neopentyl glycol and 16.1 grams zinc acetate dihydrate were charged under nitrogen into a 5 L 4-neck round bottom flask with a mechanical stirrer, thermocouple, heating mantle and condenser. The mixture was heated to about 160-180°C and stirred until it became homogeneous.

[00259] *PUD Bench Scale Example 1067-92* – dfPET (80.98 g) from Example 753-70, acetone (105.58 g) and N-methylpyrrolidone (NMP, 29.58 g) were mixed at room temperature. In a 500ml 1-neck round bottom flask equipped with a magnetic stirrer, hot plate and condenser, toluene diisocyanate (80.01g) and the above dfPET/acetone/NMP mixture was added at room temperature under nitrogen. The temperature was raised to about 55°C. Two drops of K-KAT®XC-9213 (zirconium chelate catalyst, King Industries Inc.) were added. The mixture was heated to about 50°C for about one hour at reflux. A pot sample was withdrawn for NCO titration to determine whether the reaction was complete. The NCO value was less than about 384.1 mmoles, and 46.06 grams NMDEA was added. The mixture was heated to reflux for about one hour. A pot sample was withdrawn for NCO titration and the NCO value was less than 366.7 mmoles. 29.76 grams propionic acid was added. 249 grams DI water was added for dispersion. Acetone was removed on a rotary evaporator under vacuum. The average solid weight percentage in the resulting PUD was about 34.03 wt%.

[00260] *dfPET Example 753-88* - The functionalized and digested PETs (dfPETs) used in Examples 753-93, 1072-76, 1084-12 and 1084-41 were produced as follows: 800 grams (4.16 moles) rPET, 285.1 grams (3.75 moles) propylene glycol and 12.9 grams zinc acetate dihydrate were charged into a 5L 4-neck round bottom flask fitted with a mechanical stirrer, thermocouple, condenser, heating mantle under nitrogen at

room temperature. The mixture was heated to about 180-200°C and stirred until it became homogenous. The resulting dfPET had an average hydroxyl number 352.6.

[00261] *PUD Bench Scale Example 753-93* – dfPET (83.5g) from Example 753-88 and acetone (95 ml) were mixed in a water bath at about 35-40°C to form a dfPET/acetone solution. In a 1L 4-neck round bottom flask fitted with a mechanical stirrer, thermocouple and condenser under N₂, toluene diisocyanate (80.0g), acetone (95 ml) and N-methylpyrrolidone (NMP, 29.5 ml) were added. A solution of 4% zirconium (IV) acetylacetonate in NMP (2 drops, about 0.03g) was added at room temperature. Then the dfPET/acetone solution was added in the flask and the temperature was increased to about 40°C. 4.45 g sample was withdrawn and the NCO was measured as about 342.3 mmoles. Then N-methyldiethanolamine (46.0g) was added. The temperature was increased to about 50°C. Two drops of a solution of 4% zirconium (IV) acetylacetonate in NMP at 50°C. After about one hour, 4.52 grams sample were withdrawn and the NCO was measured as about 416.5 mmoles. 28.59 g propionic acid was added. The reaction mixture was stirred with 500g deionized water. Acetone was removed on a rotary evaporator under vacuum. The resulting PUD was a clear gold solution.

[00262] *PUD Bench Scale Example 1072-76* – dfPET (90.04 g) from Example 753-88, acetone (151.26 g) and N-methylpyrrolidone (NMP, 31.6 g) were mixed at room temperature. In a 500ml 1-neck round bottom flask equipped with a magnetic stirrer, hot plate and condenser, toluene diisocyanate (80.06g) and the above dfPET/acetone/NMP mixture were added at room temperature. Two drops of K-KAT®XC-9213 (zirconium chelate catalyst, King Industries Inc.) were added. The mixture was heated to about 180°C for about one hour at reflux. After about one hour, a pot sample was withdrawn for NCO titration to determine whether the reaction was complete. The NCO value was less than 317.6 mmoles. Then 41.45 grams NMDEA was added. The mixture was heated to reflux for about one hour. 30.72 grams propionic acid was added. 249 grams DI water was added for dispersion. Acetone was removed on a rotary evaporator under vacuum. The average solid weight percentage in the resulting PUD was about 34.03 wt%.

[00263] *PUD Bench Scale Example 1084-12* – dfPET (61.33 g) from Example 753-88, acetone (123.03 g) and N-ethylpyrrolidone (NEP, 34.52 g) were mixed at room temperature. In a 500ml 1-neck round bottom flask equipped with a magnetic stirrer,

hot plate and condenser, toluene diisocyanate (59.78 g) and the above dfPET/acetone/NMP mixture were added at room temperature. At the temperature about 80°C, a sample was withdrawn and the NCO was measured as about 295.53 mmols. Then, five drops of K-KAT®XC-9213 (zirconium chelate catalyst, King Industries Inc.) was added. The mixture was heated to about 80°C for about one hour at reflux. Then 125.05 grams acetone and 34.0 grams NMDEA were added. 100 grams DI water was added for dispersion. Acetone was removed on a rotary evaporator under vacuum.

[00264] PUD Bench Scale Example 1084-41 – dfPET (61.33 g) from Example 753-88, acetone (123.03 g) and N-ethylpyrrolidone (NEP, 34.52 g) were mixed at room temperature. In a 1000ml resin kettle flask equipped with a magnetic stirrer, hot plate and condenser, toluene diisocyanate (59.78 g) and the above dfPET/acetone/NMP mixture were added at room temperature. Two drops (about 0.03 g) of K-KAT®XC-9213 (zirconium chelate catalyst, King Industries Inc.) were added. The mixture was heated to about 55°C for about one hour at reflux. A pot of sample was withdrawn and the NCO was measured to be less than 446.2 mmols. Pre-dissolved polythelene glycol (PEG-4000) in acetone was added. The mixture was held at reflux for about 30 minutes and a sample was withdrawn. The NCO was measured to be less than 360.7 mmole. Then 25.0 grams NMDEA were added and heat to reflux for another hour. 30.0 grams propionic acid was added and the reactor was cooled down to room temperature. 500 grams DI water was added for dispersion. Acetone was removed on a rotary evaporator under vacuum.

Test Methods Related to Results of PUD Synthesis as
Described Above and as Outlined in Tables X, Y, and Z

[00265] %Non-volatiles – Based on ASTM 1259-85. This method describes a procedure for determining the quantity of non-volatile components in the PUDs. Approximately 1 g of material was weighed into an aluminum dish. The dish was placed in a ventilated oven at 105°C for 2 h and reweighed after cooling to ambient temperature. The % non-volatiles were calculated as:

$$\frac{\text{Net mass of dried solids}}{\text{Initial net mass of PUD}} \times 100$$

[00266] For the remainder of the testing procedures, the PUDs were diluted to 35% non-volatiles (unless the PUDs were prepared at lower concentrations). The 35%

solutions were used for measuring pH, viscosity, pencil hardness, water resistance and MEK double rubs. Film properties were determined on steel plates on which 3 mil (wet thickness) films were cast.

[00267]pH measurements – The pH of the 35% solid solution was measured using a Chek-Mate pH meter calibrated at pH 7 and pH 10.

[00268]Viscosity – The viscosity of the 35% solutions was measured using a Brookfield DV-E viscometer. Spindle 62 was used for most samples, very low viscosity samples were measured with spindle 61. A spin rate of 100 rpm was used for all samples. PUDs were equilibrated in a 25°C water bath for 1 h before measurements were recorded.

[00269]Pencil Hardness – Per ASTM D3363. This method covers a procedure for the rapid determination of film hardness of an organic coating on a substrate in terms of drawing leads or pencil leads of known hardness (see hardness scale below).

6B - 5B - 4B - 3B - 2B – B – HB – F – H - 2H – 3H - 4H - 5H - 6H - 7H - 8H - 9H
Softer *Harder*

[00270] The test was performed by coating 2 steel panels with 3 mil wet films, drying the panels (one panel was dried at ambient temperature while the other was oven dried), placing the dried coated panels on a firm horizontal surface and pushing the tip of a pencil across the surface at a 45 deg angle. The process is started with a soft lead and continued up the scale of hardness until the pencil cuts into the film. The last pencil grade which did not cut the film is reported.

[00271]Water Resistance – Ten drops of water were placed on the film, the water was covered with a piece of filter paper which was folded into a 1 inch square and the combination was covered with a watch glass. Observations were recorded at ca. 1 h, 6-7 h and 24 h.

[00272]MEK Double Rub – Per ASTM D4752. This method describes a solvent rub technique for assessing the methyl ethyl ketone (MEK) resistance of the films. The test was performed by soaking a pad of cheese cloth with MEK, placing a protected index finger into the pad while holding the excess cloth with the thumb and remaining fingers of the same hand. The index finger was held at a 45 deg angle to the film surface, pushed away from and then pulled towards the analyst. One forward and backward motion constituted a double rub. The rubs were continued and solvent replenished as needed until the surface of the test panel was exposed.

[00273] In general, the PUDs of the presently disclosed and claimed inventive concept(s) are useful in coatings for hard surfaces, particularly as wood coatings. Such PUDs may be applied by conventional methods such as painting, spraying, flow-coating, transfer-coating, roller coating, brushing, dipping spreading, curtain coating etc. The PUDs can be puddled or pooled on a substrate and then spread over the substrate using a brush or other spreading means. Spraying includes atomizing the PUD and ejecting the atomized material onto the substrate. The PUDs are preferably applied at ambient temperatures. Drying of the products obtained by the various applications of the PUDs can be carried out at room temperature or at elevated temperature.

[00274] All references including patent applications and publications cited herein are incorporated herein by reference in their entirety and for all purposes to the same extent as if each individual publication or patent or patent application was specifically and individually indicated to be incorporated by reference in its entirety for all purposes. Many modifications and variations of the presently disclosed and claimed inventive concept(s) can be made without departing from its spirit and scope, as will be apparent to those skilled in the art. The specific embodiments described herein are offered by way of example only, and the presently disclosed and claimed inventive concept(s) is to be limited only by the terms of the appended claims, along with the full scope of equivalents to which such claims are entitled.

TABLE X

Internal Ref. No.	diNCO	Solvent	% solvent	% diPET	diPET Description	% diPET	Chain Extender	Ionic Surfactant	% ionic surfactant	Lab Procedure
753-95	TDI	NMP	8	753-88	clear diPET produced from 0.9 eq Propylene Glycol		none	n-methyldiethanolamine	14.6	G
753-93	TDI	NMP	4	753-88	clear diPET produced from 0.9 eq Propylene Glycol	38	none	n-methyldiethanolamine	22	G
753-91	TDI	NMP	4	753-65	clear diPET produced from 0.9 eq Propylene Glycol	38	none	n-methyldiethanolamine	22	G
753-89	TDI	NMP	15	753-65	clear diPET produced from 0.9 eq Propylene Glycol	25	ethylene glycol	dimethylolpropionic acid	16	B
753-87	TDI	NMP	15	753-65	clear diPET produced from 0.9 eq Propylene Glycol	32	glycerin	dimethylolpropionic acid	14.7	B
753-82	TDI	NMP	15	752-28		23	ethylene glycol	dimethylolpropionic acid	16	B
753-61	TDI	NMP	12	752-28		31	glycerin	dimethylolpropionic acid	14.7	B
753-55	TDI	none	0	lymal	diPET prepared with 1 mol eq NG, NG melted first	40	PEG-200	dimethylolpropionic acid	8.1	B
753-45	TDI	NMP	11	768-6		50	PEG-200	dimethylolpropionic acid	8.6	B
753-30	TDI	NMP	7	749-82	green diPET produced from 1.0 eq neopentyl glycol	43	n-methyldiethanolamine	dimethylolpropionic acid	12.1	D
753-29	TDI	NMP	6	749-82	green diPET produced from 1.0 eq neopentyl glycol	43	1,6-diaminohexane	dimethylolpropionic acid	12.1	D
753-28	TDI	NMP	8	749-82	green diPET produced from 1.0 eq neopentyl glycol	45	none	dimethylolpropionic acid	7.9	A
753-27	TDI	NMP	8	749-82	green diPET produced from 1.0 eq neopentyl glycol	45	none	dimethylolpropionic acid	12.7	A
753-26B	TDI	NMP	5	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.6	B
753-26A	TDI	NMP	5	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.6	B
753-24B	TDI	NMP	5	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.6	B
753-24A	TDI	NMP	5	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.6	B
753-21B	TDI	NMP	5	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.7	B
753-21A	TDI	NMP	5	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.7	B
753-19B	TDI	NMP	7	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	8.9	B
753-19A	TDI	NMP	7	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	8.9	B
753-17B	TDI	NMP	6	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.7	B
753-17A	TDI	NMP	6	749-82	green diPET produced from 1.0 eq neopentyl glycol	27	PEG-200	dimethylolpropionic acid	9.7	B
751-9	TDI	NMP	?	732-78	green diPET produced from 1.0 eq neopentyl glycol	42	55% 1,4-butanediol, 45% 1,1,1-tris(hydroxymethyl)ethane	dimethylolpropionic acid	9	E
751-8	H12MDI	NMP	5	732-78	green diPET produced from 1.0 eq neopentyl glycol	35	1,3-dianisopropane	dimethylolpropionic acid	7	D
751-7	TDI	NMP	3	732-78	green diPET produced from 1.0 eq neopentyl glycol	43	1,4-cyclohexanedicarbonyl	dimethylolpropionic acid	7.8	B
751-6	TDI	NMP	3	732-78	green diPET produced from 1.0 eq neopentyl glycol	42	60% 1,4-butanediol, 40% 1,1,1-tris(hydroxymethyl)ethane	dimethylolpropionic acid	7.9	E
751-45	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG, NG melted first	44	PEG-200	dimethylolpropionic acid	8	B
751-44	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG (aka the usual), NG melted first	44	PEG-200	dimethylolpropionic acid	8.3	B
751-43	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG (aka the usual), NG melted first	44	PEG-200	dimethylolpropionic acid	8.4	B
751-42	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG (aka the usual), NG melted first	44	PEG-200	dimethylolpropionic acid	7.2	B
751-40	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG (aka the usual), NG melted first	44	PEG-200	dimethylolpropionic acid	8.1	B
751-39	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG (aka the usual), NG melted first	44	PEG-200	dimethylolpropionic acid	6.8	B
751-32	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG (aka the usual), NG melted first	44	PEG-200	dimethylolpropionic acid	8.3	B
751-31	TDI	NMP	5	751-19	diPET prepared with 1 mol eq NG (aka the usual), NG melted first	44	PEG-200	dimethylolpropionic acid	8.2	B
751-25	TDI	NMP	5	732-78	green diPET produced from 1.0 eq neopentyl glycol	44	PEG-200	dimethylolpropionic acid	8.3	B
751-24	TDI	NMP	5	732-78	green diPET produced from 1.0 eq neopentyl glycol	44	PEG-200	dimethylolpropionic acid	8.1	B
751-23	TDI	NMP	5	732-78	green diPET produced from 1.0 eq neopentyl glycol	44	PEG-200	dimethylolpropionic acid	8.1	B
751-22	TDI	NMP	5	732-78	green diPET produced from 1.0 eq neopentyl glycol	44	PEG-200	dimethylolpropionic acid	8.2	B
751-2	H12MDI	NMP	3	732-78	green diPET produced from 1.0 eq neopentyl glycol	35	1,4-butanediol	dimethylolpropionic acid	8.2	B
751-18	TDI	NMP	6	732-78	green diPET produced from 1.0 eq neopentyl glycol	42	tris(hydroxymethyl)ethane; 86% 1,4-butanediol, 11% piperazine, 89% 1,4-butanediol	dimethylolpropionic acid	8.2	F
751-17	TDI	NMP	6	732-78	green diPET produced from 1.0 eq neopentyl glycol	42	butanediol	dimethylolpropionic acid	7.9	C

TABLE X

Internal Ref. No.	dINCO	Solvent	% solvent	dIPET	dIPET Description	% dIPET	Chain Extender	Ionic Surfactant	% Ionic surfactant	Lab Procedure
751-16	TDI	NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	42	40% piperazine, 60% 1,4-butanediol	dimethylolpropionic acid	8.1	C
751-15	TDI	NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	42	1,4-butanediol	dimethylolpropionic acid	8	B
751-12	TDI	NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	42	37% 1,4-butanediol, 63% PEG-200	dimethylolpropionic acid	8.4	E
751-11	TDI	NMP	5	732-78	green dIPET produced from 1.0 eq neopentyl glycol	42	89% 1,6-hexanediol, 11% hexanediamine	dimethylolpropionic acid	7.4	C
751-1	TDI	NMP	>10	732-78	green dIPET produced from 1.0 eq neopentyl glycol	42	1,4-butanediol	dimethylolpropionic acid	8.1	B
734-99	H12MDI	NMP	16	732-58	green dIPET produced from 1.0 eq neopentyl glycol	26	27% 1,3-diaminopropane, 73% PEG-1500	dimethylolpropionic acid	5.8	C
734-97	H12MDI	NMP	16	732-58	green dIPET produced from 1.0 eq neopentyl glycol	22	1,3-diaminopropane	dimethylolpropionic acid	7.4	D
734-95	TDI	NMP	5	732-58	green dIPET produced from 1.0 eq neopentyl glycol	44	PEG-200	dimethylolpropionic acid	8.1	B
734-94	TDI	NMP	5	732-58	green dIPET produced from 1.0 eq neopentyl glycol	44	PEG-200	dimethylolpropionic acid	8.1	B
734-92	TDI	NMP	4	732-58	green dIPET produced from 1.0 eq neopentyl glycol	44	25% 1,6-hexanediol, 75% PEG-200	dimethylolpropionic acid	8.1	E
734-90	MDI	NMP	8	732-58	green dIPET produced from 1.0 eq neopentyl glycol	36	61% 1,6-hexanediol 39% PEG-200 (wt%)	dimethylolpropionic acid	6.5	E
734-89	50% TDI 50% MDI	NMP	3	732-58	green dIPET produced from 1.0 eq neopentyl glycol	60	28% neopentyl glycol, 72% 732-58 (wt%)	dimethylolpropionic acid	5.5	E
734-88	TDI	NMP	3	732-58	green dIPET produced from 1.0 eq neopentyl glycol	41	8% 1,8-diaminooctane, 92% 1,6-hexanediol (wt%)	dimethylolpropionic acid	7.4	C
734-87	TDI	NMP	15	732-58	green dIPET produced from 1.0 eq neopentyl glycol	44	8.5% 1,8-diaminooctane, 33.9% 1,6-hexanediol, 57.6% PEG-200 (wt%)	dimethylolpropionic acid	8.1	F
734-86	TDI	NMP	15	732-58	green dIPET produced from 1.0 eq neopentyl glycol	44	3.8% glycerin 96.1% PEG-200 (wt)	dimethylolpropionic acid	8.4	E
734-85	TDI	NMP	6	732-58	green dIPET produced from 1.0 eq neopentyl glycol	43	90% PEG 200, 10% 1,3-diaminooctane (molar basis)	dimethylolpropionic acid	8.2	C
734-84	TMXDI	NMP	6	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	30	1,3-diaminopropane	dimethylolpropionic acid	7.1	D
734-83	TMXDI	NMP	11	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	14	1,3-diaminopropane	dimethylolpropionic acid	5.9	D
734-82	TMXDI	NMP	1	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	19	none	dimethylolpropionic acid	4.4	A
734-81	MDI	NMP	4	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	35	PEG-200	dimethylolpropionic acid	6.9	B
734-80	MDI	NMP	4	732-34	green dIPET produced from 2.79 eq ethylene glycol	38	1,8-octanediamine	dimethylolpropionic acid	6.7	D
734-79	HDI	NMP	4	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	38	none	dimethylolpropionic acid	9.2	A
734-78	TDI	NEP	5	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	40	PEG-1500, EG	dimethylolpropionic acid	6.5	E
734-75	MDI+TDI	NMP	7	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	46	neopentyl glycol	dimethylolpropionic acid	5.3	B
734-74	TDI	NMP	7	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	42	none	dimethylolpropionic acid	11	A
734-73	TDI	NMP	7	732-34	green dIPET produced from 2.79 eq ethylene glycol	39	1,6-hexanediol	dimethylolpropionic acid	8	B
734-72	TDI	NMP	7	732-34	green dIPET produced from 2.79 eq ethylene glycol	39	PEG-300	dimethylolpropionic acid	7.9	B
734-71	TDI	NMP	6	732-34	green dIPET produced from 2.79 eq ethylene glycol	40	PEG-200	dimethylolpropionic acid	9.2	B
734-70	TDI	NMP	10	732-38	green dIPET produced from 0.75 eq glycerine	43	PEG-200	dimethylolpropionic acid	9	B
734-66	TDI	NMP	7	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	44	tetraethylene glycol	dimethylolpropionic acid	5.9	B
734-64	HDI	NMP	19	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	45	none	dimethylolpropionic acid	9.8	A
734-63	TDI	NMP	5	732-29	clear dIPET produced from 1.0 eq neopentyl glycol	43	PEG-200	dimethylolpropionic acid	8.3	B
734-61	TDI	NMP	8	732-65	clear dIPET produced from 1.0 eq neopentyl glycol	43	neopentyl glycol	dimethylolpropionic acid	8.6	B
734-60	TDI	NMP	8	732-39	95 g of PET and 125 g of 732-34 (in toluene)	43	1,6-hexanediol	dimethylolpropionic acid	8.5	B
734-57	TDI	NMP	12	732-65	clear dIPET produced from 1.0 eq neopentyl glycol	51	1,6-hexanediol	dimethylolpropionic acid	8.6	B
734-56	TDI	NMP	6	732-65	clear dIPET produced from 1.0 eq neopentyl glycol	43	1,6-hexanediol	dimethylolpropionic acid	13.2	B
734-55	MDI	NMP	10	732-40	clear dIPET produced from 1.0 eq neopentyl glycol	42	none	dimethylolpropionic acid	10.6	A
734-54	TDI	NMP	9	732-40	clear dIPET produced from 1.0 eq neopentyl glycol	50	none	dimethylolpropionic acid	12.5	A
734-53	HDI	NMP	13	732-40	clear dIPET produced from 1.0 eq neopentyl glycol	28	none	dimethylolpropionic acid	11.3	A
734-51	MDI	NMP	10	732-58	clear dIPET produced from 1.0 eq neopentyl glycol	42	none	dimethylolpropionic acid	11	A
734-50	MDI	NMP	11	732-58	clear dIPET produced from 1.0 eq neopentyl glycol	44	none	dimethylolpropionic acid	11	A
734-116	TDI	NMP	3	732-78	green dIPET produced from 1.0 eq neopentyl glycol	46	1,4-butanediol	dimethylolpropionic acid	6.6	B

TABLE X

Internal Ref. No.	dinco	Solvent	% solvent	dIPET	dIPET Description	% dIPET	Chain Extender	Ionic Surfactant	% ionic surfactant	Lab Procedure
734-115	TDI	NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	43	1,4-butanediol	dimethylolpropionic acid	6.6	B
734-114	TDI	NMP	3	732-78	green dIPET produced from 1.0 eq neopentyl glycol	43	1,4-butanediol	dimethylolpropionic acid	6.8	B
734-108	TDI	di(propyl eneglyco l) methyl ether	2	732-58	green dIPET produced from 1.0 eq neopentyl glycol	42	32% PEG-1500, 65% 1,4-butanediol, 3% tris(hydroxymethyl)ethane (wt%)	dimethylolpropionic acid	2.8	F
734-107	TDI	di(propyl eneglyco l) methyl ether	2	732-58	green dIPET produced from 1.0 eq neopentyl glycol	43	25% PEG-1500, 75% 1,4-cyclohexanedimethanol (wt%)	dimethylolpropionic acid	7.4	F
734-106	TDI	di(propyl eneglyco l) methyl ether	2	732-58	green dIPET produced from 1.0 eq neopentyl glycol	43	35% PEG-1500, 65% piperazine (wt%)	dimethylolpropionic acid	7.5	C
734-105	TDI	NMP	9	732-58	green dIPET produced from 1.0 eq neopentyl glycol	42	35% PEG-1500, 65% piperazine (wt%)	dimethylolpropionic acid	8.1	C
734-104	TDI	NMP	3	732-58	green dIPET produced from 1.0 eq neopentyl glycol	43	48% PEG-1500, 52% 1,4-butanediol (wt%)	dimethylolpropionic acid	7.7	E
734-103	TDI	NMP	3	732-58	green dIPET produced from 1.0 eq neopentyl glycol	43	37% PEG-1500, 14% cis-2-butene-1,4-diol, 49% butane-1,4-diol (wt%)	dimethylolpropionic acid	7.8	F
734-102	H12MDI	NMP	9	732-58	green dIPET produced from 1.0 eq neopentyl glycol	54	PEG-1500	dimethylolpropionic acid	2.6	B
734-101	H12MDI	NMP	37	732-58	green dIPET produced from 1.0 eq neopentyl glycol	44	28% cis-2-butene-1,4-diol, 72% PEG-1500 (wt%)	dimethylolpropionic acid	6.1	F
734-100	IPDI	NMP	16	732-58	green dIPET produced from 1.0 eq neopentyl glycol	25	27% 1,3-diaminopropane, 73% PEG-1500	dimethylolpropionic acid	6.1	C
732-97	TDI	NMP	4	732-78	green dIPET produced from 1.0 eq neopentyl glycol	37	PEG-200	dimethylolpropionic acid	8.2	B
732-92	TDI	NMP	4	732-78	green dIPET produced from 1.0 eq neopentyl glycol	37	PEG-200	dimethylolpropionic acid	8.3	B
732-89	TDI	NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	46	82% PEG-600; 18% ethylene diamine	dimethylolpropionic acid	7.3	C
39% TDI 61% HMDI		NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	40	82% PEG-600; 18% ethylene diamine	dimethylolpropionic acid	6.5	C
732-85	HMDI	NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	38	41% PEG-200, 59% ethylene diamine	dimethylolpropionic acid	6.1	C
732-83	HMDI	NMP	6	732-78	green dIPET produced from 1.0 eq neopentyl glycol	40	59% PEG-200, 41% ethylene diamine	dimethylolpropionic acid	5.8	C
732-82	HMDI	NMP	6	732-58	green dIPET produced from 1.0 eq neopentyl glycol	40	81% PEG-600, 19% ethylene diamine (wt%)	dimethylolpropionic acid	5.7	C
732-77	HMDI	NMP	8	732-58	green dIPET produced from 1.0 eq neopentyl glycol	42	none	dimethylolpropionic acid	6.2	A
732-76	HMDI	NMP	6	732-58	green dIPET produced from 1.0 eq neopentyl glycol	42	31% ethylene glycol, 65% ethylene diamine (wt%)	dimethylolpropionic acid	6	C
732-74	HMDI	NMP	5	732-58	green dIPET produced from 1.0 eq neopentyl glycol	42	72% PEG-200, 28% 1,3-diaminopropane (wt%)	dimethylolpropionic acid	9.8	C
732-73	HMDI	NMP	5	732-58	green dIPET produced from 1.0 eq neopentyl glycol	34	PEG-200	dimethylolpropionic acid	6.8	B
732-72	TDI	NMP	5	732-58	green dIPET produced from 1.0 eq neopentyl glycol	43	PEG-200	dimethylolpropionic acid	8.3	B
10% TDI 90% HDI (mol)		NMP	18	732-58	green dIPET produced from 1.0 eq neopentyl glycol	44	none	dimethylolpropionic acid	10	A
732-69	TDI	NMP	1	732-58	green dIPET produced from 1.0 eq neopentyl glycol	51	12% hydrogenated castor oil, 88% neopentyl glycol	dimethylolpropionic acid	11.5	C
732-68	TDI	acetone	n/a	732-58	green dIPET produced from 1.0 eq neopentyl glycol	51	neopentyl glycol	dimethylolpropionic acid	11.8	B
732-67	TDI	acetone	n/a	732-58	green dIPET produced from 1.0 eq neopentyl glycol	48	neopentyl glycol	dimethylolpropionic acid	4.7	B

TABLE X

Internal Ref. No.	dINCO	Solvent	% solvent	dIPET	dIPET Description	% dIPET	Chain Extender	Ionic Surfactant	% Ionic surfactant	Lab Procedure
732-66	10% HDI 90% TDI	NMP	5	732-58	green dIPET produced from 1.0 eq neopentyl glycol	43	90% PEG 200, 10% 1,3-diaminopropane (molar basis)	dimethylolpropionic acid	7.8	C
732-60	10% HDI 90% TDI	acetone	n/a	732-58	green dIPET produced from 1.0 eq neopentyl glycol	35	PEG-200	dimethylolpropionic acid	8.3	B
732-56	TDI	acetone	n/a	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	34	none	dimethylolpropionic acid	17.9	A
732-55	TDI	acetone	n/a	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	37	1,6-hexanediol	dimethylolpropionic acid	9.6	B
732-53	TDI	acetone	n/a	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	39	PEG-200	dimethylolpropionic acid	8.2	B
732-52	TDI	EtOAc	n/a	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	37	PEG-200	dimethylolpropionic acid	8	B
732-51	TDI	NEP	5	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	43	PEG-200	dimethylolpropionic acid	7.9	B
732-50	TDI	NMP	6	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	41	PEG-200	dimethylolpropionic acid	3.8	B
732-49	TDI	NMP	8	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	44	PEG-200	dimethylolpropionic acid	4.6	B
732-48	MDI	NEP	8	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	39	none	dimethylolpropionic acid	21.3	A
732-47	MDI	NMP	8	732-43	clear dIPET produced from 1.0 eq neopentyl glycol	39	none	dimethylolpropionic acid	21.2	A
732-45	MDI	NMP	7	732-40	clear dIPET produced from 1.0 eq neopentyl glycol	43	none	dimethylolpropionic acid	10.7	A
732-42	HDI	NMP	5	733-65	clear dIPET produced from 1.0 eq neopentyl glycol	43	none	dimethylolpropionic acid	11	A
732-41	HDI	NMP	4	732-40	dIPET diluted with NMP at the end of the digestion	55	none	dimethylolpropionic acid	14.1	B
732-109	40% TDI 60% HMDI	NMP	6.1	732-102	green dIPET produced from 1.0 eq neopentyl glycol	41	PEG-200	dimethylolpropionic acid	6.4	B
732-108	TDI	NMP	3.3	751-19	dIPET prepared with 1 mol eq NG, NG melted first	41	PEG-200	dimethylolpropionic acid	8.5	A
732-107	40% TDI 60% HMDI	NMP	2.2	732-102	dIPET diluted with NMP at the end of the digestion	42	96.5% PEG-200 3.5% ethylene diamine	dimethylolpropionic acid	6.2	C
732-105	HMDI	NMP	6.6	732-102	dIPET diluted with NMP at the end of the digestion	43	diamine	dimethylolpropionic acid	9.4	C
732-100	TDI	NMP	4	732-78	green dIPET produced from 1.0 eq neopentyl glycol	37	PEG-200	dimethylolpropionic acid	5.7	B
108-45	TDI	NMP	4	JHE01	clear dIPET produced from 0.9 eq Propylene Glycol	38	none	n-methyldiethanolamine	17.4	G
1084-41	TDI	NMP	4	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	48	PEG-4000	n-methyldiethanolamine	13.6	H
1084-13	TDI	NEP	8	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	16.3	G
1084-12	TDI	NMP	8	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	16.2	G
1080-46	TDI	NMP	5	JHE01	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	16.8	G
1080-44	TDI	NMP	4	JHE01	clear dIPET produced from 0.9 eq Propylene Glycol	38	none	n-methyldiethanolamine	17.4	G
1080-41	TDI	NMP	8	JHE01	clear dIPET produced from 0.9 eq Propylene Glycol	38	none	n-methyldiethanolamine	17.3	G
1080-22	TDI	NMP	8	753-87	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	17.1	G
1080-21	TDI	NMP	8	JHE01	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	17.1	G
1078-56	TDI	NMP	7	JHE01	clear dIPET produced from 0.9 eq Propylene Glycol	48	none	n-methyldiethanolamine	16.8	G
1072-77	TDI	NMP	8	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	17.1	G
1072-76	TDI	NMP	8	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	43	none	n-methyldiethanolamine	14.8	G
1072-49	TDI	NMP	8	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	17.1	G
1072-48	TDI	NMP	8	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	37	none	n-methyldiethanolamine	19.2	G
1072-45	TDI	NMP	6	753-70	clear dIPET produced from 1.0 eq NPG	40	none	n-methyldiethanolamine	16.2	G
1072-44	TDI	NMP	6	753-70	clear dIPET produced from 1.0 eq NPG	40	none	n-methyldiethanolamine	16.2	G
1067-93	TDI	NMP	8	753-65	clear dIPET produced from 0.9 eq Propylene Glycol	40	none	n-methyldiethanolamine	17.1	G
1067-92	TDI	NMP	8	753-70	clear dIPET prepared with 1 mol eq NG, NG melted first	39	none	n-methyldiethanolamine	17.1	G
1067-89	TDI	NMP	8	Lymtal	dIPET prepared with 1 mol eq NG, NG melted first	39	none	n-methyldiethanolamine	17.3	G
1067-88	TDI	NMP	9	Lymtal	dIPET prepared with 1 mol eq NG, NG melted first	35	1,3 propane diol	dimethylolpropionic acid	11	B
1067-85	TDI	NMP	8	Lymtal	dIPET prepared with 1 mol eq NG, NG melted first	39	none	n-methyldiethanolamine	17.3	G
1067-84	TDI	NMP	9	Lymtal	dIPET prepared with 1 mol eq NG, NG melted first	35	1,3 propane diol	dimethylolpropionic acid	11	B
1067-76	TDI	NMP	15	1059-29	clear dIPET produced from 0.8 eq Propylene Glycol	39	ethylene glycol	dimethylolpropionic acid	9	B
1067-69	TDI	NMP	14	1067-49	clear dIPET produced from 0.8 eq Propylene Glycol	35	ethylene glycol	dimethylolpropionic acid	8.1	B
1067-68	TDI	NMP	15	1067-49	clear dIPET produced from 0.8 eq Propylene Glycol	35	ethylene glycol	dimethylolpropionic acid	8.7	B

TABLE X

Internal Ref. No.	dINCO	Solvent	% solvent	dfPET	dfPET Description	% dfPET	Chain Extender	Ionic Surfactant	% Ionic surfactant	Lab Procedure
1067-52	TDI	NMP	4	1067-49	clear dfPET produced from 0.8 eq Propylene Glycol	35	none	n-methyldiethanolamine	20.6	G
1067-46	TDI	NMP	4	1067-46	clear dPET produced from 1.0 eq Propylene Glycol	45	none	n-methyldiethanolamine	13.4	G
1067-38	TDI	NMP	4	Lymtal	dfPET prepared with 1 mol eq NG, NG melted first	47	none	n-methyldiethanolamine	12	G
1059-9	TDI	none	0	733-12	dfPET prepared with 2.77 mol eq EG	56	none	dimethyldipropionic acid	8.1	A
1059-8	TDI	NMP	5	733-12	dfPET prepared with 2.77 mol eq EG	39	none	dimethyldipropionic acid	5.7	A
1059-6	TDI	NMP	7	732-43	clear dfPET produced from 1.0 eq neopentyl glycol	58	732-43, 1,6-hexanediol	dimethyldipropionic acid	12.5	C
1059-25	TDI	NMP	4	Lymtal	dfPET prepared with 1 mol eq NG, NG melted first	41	none	n-methyldiethanolamine	10.5	G
1059-24	TDI	NMP	4	Lymtal	dfPET prepared with 1 mol eq NG, NG melted first	41	none	n-methyldiethanolamine	16	G

Table Y

Internal Ref. No.	PUD description	Hardness (105C)	Hardness (room temp)	% non-volatiles	pH	Viscosity (cP)	1 hour room temp	5.5-6.5 hours room temp	21.5-22.5 hours room temp	MEK double rub
753-30	clear green dispersion	not tested	not tested	0.354	not tested	981	not tested	not tested	not tested	n/a
753-29	opaque green dispersion	not tested	not tested	0.3542	not tested	1790	not tested	not tested	not tested	n/a
753-28	opaque green mixture	3H	F	0.3926	9.55	46.5	hazy surface	25% rusted	100% rusted	5 double rubs haziness; 8 double rubs complete dissolution
753-27	milky green mixture	3H	F	0.3946	9.38	759	hazy, sticky surface	film appears dissolved	film dissolved, slightly rusted	10 double rubs haziness; 15 double rubs complete dissolution
753-26A	milky green dispersion	3H	F	0.2582	9.59	13.6	rust spots	100% rusted	100% rusted	5 double rubs complete dissolution
753-24B	viscous mixture	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
753-24A	green liquid	3H	F	0.2546	9.44	74.1	hazy, sticky surface	40% rusted	100% rusted	10 double rubs complete dissolution
753-21B	milky green dispersion	4H	H	0.3077	8.84	12.54	hazy w/ rust spots	80% rusted	not tested	50
753-21A	milky green dispersion	4H	2H	0.2902	9.13	9.96	hazy, rough surface	100% rusted	100% rusted	145
753-19B	milky dispersion	4H	H	n/a	8.25	n/a	rust spots	50% rusted	100% rusted	77
753-19A	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
753-17B	milky white dispersion	4H	H	0.3375	8.75	35.7	hazy w/ rust spots	75% rusted	100% rusted	109
753-17A	milky white dispersion	not tested	not tested	n/a	9.3	n/a	not tested	not tested	not tested	n/a
752-26B	milky white dispersion	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
751-9	difficult emulsion formulation	3H	F	0.2475	8.24	9.36	hazy	hazy, blistering	hazy, blistered surface with rust	n/a
751-8	cracked film	6H	HB	0.334	8.85	1095	no change	no change	tacky surface	n/a
751-7	cloudy blue-green emulsion	9B	9B	0.3255	9.5	31.8	film dried hazy	rust spots	100% rusted	n/a
751-6	blue-green emulsion	9B	9B	0.2997	9.33	44.1	film dried hazy	75% rusted	100% rusted	n/a
751-45	hazy blue-green emulsion	3H	F	0.323	9.31	40.5	hazy, with rust	hazy, with rust	100% rusted	n/a
751-44	hazy blue-green emulsion	3H	F	0.3838	8.94	32.7	hazy w/ rust spots	50% rusted	100% rusted	n/a
751-43	hazy blue-green emulsion	3H	F	0.3792	8.9	32.7	hazy, rough surface	50% rusted	100% rusted	n/a
751-42	hazy blue-green emulsion	3H	F	0.3549	9.29	51.9	hazy, rough surface	75% rusted	100% rusted	n/a
751-40	hazy blue-green emulsion	3H	F	0.3577	9.14	84.6	hazy w/ rust spots	100% rusted	100% rusted	n/a
751-39	no description	3H	F	0.3927	9.31	33.8	hazy, sticky surface	rust spots	100% rusted	n/a
751-32	hazy blue-green emulsion	3H	F	0.3267	9.65	18.78	hazy, rough surface	50% rusted	75% rusted	n/a
751-31	hazy blue-green emulsion	3H	F	0.4094	9.81	31.5	hazy w/ rust spots	75% rusted	100% rusted	n/a
751-25	hazy blue-green emulsion	3H	F	0.4141	9.59	33.6	hazy	75% rusted	100% rusted	n/a
751-24	hazy blue-green emulsion	3H	F	0.3855	9.81	36.3	hazy	rust spots	50% rusted	n/a
751-23	hazy blue-green emulsion	4H	2H	0.3486	9.85	165.6	hazy, rough surface	25% rusted	100% rusted	n/a
751-22	hazy blue-green emulsion	3H	F	0.3595	9.89	160.5	rust spots	75% rusted	100% rusted	n/a
751-2	blue-green emulsion	9B	8B	0.3292	9.09	57.6	film dried hazy	rust spots	100% rusted	n/a
751-18	cloudy blue-green emulsion	3H	HB	0.3625	not tested	177.3	no change	no change	rust spots	n/a
751-17	cloudy blue-green emulsion	2H	HB	0.353	not tested	90.9	no change	no change	no change	n/a
751-16	solids formed when added to water	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
751-15	solids formed when added to water	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
751-12	solids settled out of dispersion	3H	F	0.3594	8.37	159	no change	no change	no change	n/a
751-11	difficult emulsion formulation	3H	F	0.344	8.84	36.6	no change	no change	no change	n/a
751-1	milky green emulsion	3H	2H	0.3626	9.35	47.4	no change	no change	no change	n/a
734-89	blue-green emulsion	not tested	not tested	0.3324	not tested	42.6	not tested	not tested	not tested	n/a
734-97	blue-green emulsion	3H	HB	0.2732	9.72	169.2	no change	hazy, blistering blistered surface, rust spots	blistered surface, rust spots	n/a
734-95	hazy blue-green emulsion	2H	HB	0.3186	8.77	not tested	hazy, blistered surface	50% rusted, blistered	50% rusted, blistered	n/a

Table Y

Internal Ref. No.	PUD description	Hardness (105C)	Hardness (room temp)	% non-volatiles	pH	Viscosity (cP)	1 hour room temp	5.5-6.5 hours room temp	21.5-22.5 hours room temp	MEK double rub
734-94	hazy blue-green emulsion	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-92	cloudy blue emulsion	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-90	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-89	milky green emulsion	not tested	not tested	n/a	not tested	n/a	not tested	not tested	hazy, blistered, rough surface	n/a
734-88	blue-green emulsion	HB	HB	0.3999	9.57	103.2	no change	hazy, rough surface	hazy, blistered surface with rust	n/a
734-87	hazy green emulsion	4H	HB	0.3476	9.6	105.3	sticky film beginning to blister	Blistered surface	hazy, blistered surface with rust	n/a
734-86	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-85	hazy green emulsion	F	F	0.3522	8.39	340	no change	hazy, rough surface	hazy, blistered, rough surface	n/a
734-84	hardened to solid	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-83	milky emulsion, hard film	3H	B	0.2235	9.74	10.98	no change	no change	no change	n/a
734-82	viscous mixture	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-81	milky blue emulsion	2B	6B	n/a	9.59	n/a	rough surface	rough surface, rust spots	50% rusted	n/a
734-80	solids	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-79	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-78	yellow, sl hazy	2B	2B	n/a	9.09	n/a	rough surface, slight rusting	100% rusted	100% rusted	n/a
734-77	milky emulsion	4H	9B	0.3409	7.72	9.66	no change	no change	film dissolved	n/a
734-76	milky emulsion	4H	9B	0.4076	7.92	8.46	no change	no change	no change	n/a
734-75	no description	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-74	milky	4H	HB	0.2578	7.34	47.7	hazy	yellowing	yellowing, with rust spots	n/a
734-73	milky	4H	3B	0.3301	7.19	34.5	hazy, sticky surface	gummy film with rust spots	100% rusted	n/a
734-72	milky green	3H	5B	0.3294	7.43	9.24	hazy	hazy, sticky surface with rusting	rust spots	n/a
734-71	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-70	milky, solids	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-66	milky	H	HB	0.4636	8.48	45.9	hazy, rough surface	rust spots	100% rusted	n/a
734-64	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-63	milky	4H	H	0.3874	8.41	34.5	slight discoloration, rough surface	rough surface, yellowing	rough surface, yellowing	n/a
734-61	milky	5H	2B	0.4442	7.85	34.8	not tested	not tested	not tested	n/a
734-60	milky green	4H	HB	0.4181	9.28	31.8	not tested	not tested	not tested	n/a
734-57	milky	4H	4B	0.3674	7.58	38.4	slight discoloration	rust spots	100% rusted	n/a
734-56	yellow, sl hazy	3H	2B	0.2615	8.05	14.82	no change	rust spots	100% rusted	n/a
734-55	milky	4H	2B	0.4067	7.71	33	no change	no change	no change	n/a
734-54	yellow, sl hazy	4H	F	0.4691	7.68	20.46	no change	rust spots	rust spots	n/a
734-53	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-51	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-50	milky	3H	F	0.44	7.98	22.02	not tested	not tested	not tested	n/a
734-116	milky green emulsion	3H	HB	0.3856	9.38	34.8	hazy, blistered surface	50% rusted	100% rusted	n/a
734-115	milky green emulsion	H	9B	0.3472	9.58	32.7	hazy, rough surface	75% rusted	100% rusted	n/a
734-114	cloudy blue-green dispersion	2H	B	0.3865	9.63	54.9	hazy, blistered surface	rust spots	100% rusted	n/a
734-108	cloudy blue-green emulsion	3H	B	0.3901	8.99	57.9	no change	hazy, rough surface	hazy, blistered surface with rust	n/a
734-107	cloudy blue-green emulsion	3H	flakey film	0.3709	9.67	78.6	hazy	hazy, blistering	hazy, blistered surface with rust	n/a
734-106	hazy blue emulsion	4H	flakey film	0.4854	9.11	18.9	hazy, rough surface	hazy, blistered surface with rust	blistered surface, rust spots	n/a
734-105	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a

Table Y

Internal Ref. No.	PUD description	Hardness (105C)	Hardness (room temp)	% non-volatiles	pH	Viscosity (cP)	1 hour room temp	5.5-6.5 hours room temp	21.5-22.5 hours room temp	MEK double rub
734-104	hazy blue-green emulsion	3H	2B	0.3687	9.28	177.9	hazy, rough surface	hazy, blistering with rust	80% rusted	n/a
734-103	blue-green emulsion	4H	3H	0.4011	9.23	39.9	hazy, rough surface	not tested	80% rusted	n/a
734-102	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-101	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
734-100	milky green emulsion	not tested	not tested	0.328	not tested	32.4	not tested	not tested	not tested	n/a
732-97	cloudy green dispersion	4H	F	0.2902	9.53	24.3	rust spots	50% rusted	100% rusted	n/a
732-92	cloudy green dispersion	4H	F	0.2756	9.72	19.98	rust spots	75% rusted	100% rusted	n/a
732-87	cloudy green clear film	4H	B	0.3005	8.91	42	no change	no change	no change	n/a
732-85	cloudy green clear film	4H	B	0.3031	9.42	98.6	no change	no change	no change	n/a
732-83	clear dispersion	4H	2B	0.2635	10.5	18.12	no change	no change	pitted surface	n/a
732-82	clear film	6H	3H	0.3491	9.79	77.4	no change	blistered, rough surface	100% rusted	n/a
732-77	milky green dispersion	not tested	not tested	not tested	not tested	not tested	not tested	not tested	not tested	n/a
732-76	milky green dispersion	3H	B	0.2985	9.05	30	hazy, rough surface yellow discoloration, blistered surface	hazy, rough surface blistered surface, sticky film	hazy, smooth surface, with rust	n/a
732-74	green dispersion, clear film	4H	B	0.332	9.23	30	blistered surface	film dissolved	film dissolved, rust spots	n/a
732-73	milky green dispersion	4H	F	0.2834	7.87	1278	no change	hazy, rough surface	blistered surface	n/a
732-72	hard film	F	HB	0.3261	9.16	5082	hazy, rough surface	Blistered surface	blistered surface	n/a
732-70	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
732-69	gummed out	3H	2B	0.3101	8.2	18	opaque, gummy surface	paper glued to surface	filter paper glued to plate	n/a
732-68	milky green mixture	2H	B	0.3386	8.64	34.8	hazy, sticky surface	paper glued to surface	filter paper glued to plate	n/a
732-67	solids settled out of dispersion	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
732-66	clear film	4H	3B	0.2738	9.27	22.86	no change	hazy, rough surface	100% rusted	n/a
732-60	hard dry film	2B	4B	n/a	8.22	n/a	hazy w/ rust spots	90% rusted	100% rusted	n/a
732-56	milky, emulsion	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
732-55	yellow, sl hazy	2B	9B	n/a	8.02	n/a	hazy w/ rust spots	100% rusted	100% rusted	n/a
732-53	yellow, sl hazy	3H	2B	0.2613	7.82	14.16	hazy, rough surface	hazy, blistered, rough surface	hazy, blistered, rough surface	n/a
732-52	milky	4H	5B	0.2631	7.39	44.7	hazy, rough surface	hazy, rough surface with rust	100% rusted	n/a
732-51	yellow, sl hazy	4H	2B	0.3595	7.82	91.2	hazy	hazy, blistered, rough surface	hazy, blistered, rough surface	n/a
732-50	milky	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
732-49	milky, solids	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
732-48	milky	B	5B	0.4079	7.37	31.5	opaque, rough surface	rough surface, yellowing	100% rusted	n/a
732-47	milky	3B	7B	0.3484	7.67	31.5	opaque, rough surface	rough surface, yellowing	opaque, with rust	n/a
732-45	milky	H	B	0.3561	7.97	26.4	rough surface	hazy, rough surface	hazy, rough surface	n/a
732-42	gelled	not tested	not tested	n/a	not tested	n/a	not tested	not tested	not tested	n/a
732-41	milky	sticky	sticky	0.3784	8.16	245.1	film glued to surface	paper glued to surface	filter paper glued to plate	n/a
732-109	viscous dispersion	3H	H	not tested	8.03	not tested	hazy, pitted surface	50% rusted	100% rusted	n/a
732-108	green dispersion, clear film	4H	2H	0.3133	9.31	129.6	hazy, sticky surface	hazy, sticky surface with rusting	100% rusted	n/a
732-107	opaque dispersion	6H	3H	0.3957	8.3	16.08	hazy, pitted surface	100% rusted	100% rusted	n/a
732-105	viscous polymer	3H	F	0.1935	10.01	15.72	rust spots	25% rusted	100% rusted	n/a
732-100	milky green dispersion	2H	F	0.3262	9.63	42	hazy	75% rusted	100% rusted	n/a
1059-6	milky	4H	B	n/a	9.35	n/a	no change	no change	tacky surface	n/a

Table Z

Internal Ref. No.	dINCO	Solvent	% solvent	dIPET	dIPET Description	%dIPET	Chain Extender	Additional Polyester	% Addt'l Polyester	Ionic Surfactant	% Ionic Surfactant	Lab Procedure
1080-26	TDI	NMP	9	753-87	clear dIPET produced from 0.9 eq Propylene Glycol	38	N/A	2000 MW 1,4, butanediol adipate polyester	19	DMPA	7.7	I
1080-27	TDI	NMP	9	753-87	clear dIPET produced from 0.9 eq Propylene Glycol	31	ethylene glycol	2000 MW 1,4, butanediol adipate polyester	31	DMPA	8	J
1080-49	TDI	NMP	13	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	38	N/A	2000 MW 1,4, butanediol adipate polyester	19	DMPA	7.7	I
1080-93	TDI	NMP	4	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	32	PEG-4000	2000 MW 1,4, butanediol adipate polyester	17	DMPA	8.7	J
1082-85	TDI (Perfstorp)	NMP	4	1082-33	clear dIPET produced from 0.9 eq Propylene Glycol	34	N/A	2000 MW 1,4, butanediol adipate polyester	19	DMPA	9	I
1082-87	TDI	NMP	4	1082-33	clear dIPET produced from 0.9 eq Propylene Glycol	34	N/A	2000 MW 1,4, butanediol adipate polyester	19	DMPA	9	I
1082-96	TDI	NMP	4	753-88	clear dIPET produced from 0.9 eq Propylene Glycol	32	N/A	2000 MW 1,4, butanediol adipate polyester	18	DMPA	8.2	I

Table Z

Internal Ref. No.	dINCO	Solvent	% solvent	dfPET	dfPET Description	%dfPET	Chain Extender	Additional Polyester	% Addt'l Polyester	Ionic Surfactant	% Ionic Surfactant	Lab Procedure
1088-14	TDI	NMP	4	1082-95	clear dfPET produced from 0.9 eq Propylene Glycol	32	PEG-4000	2000 MW 1,4, butanediol adipate polyester	18	DMPA	8.7	J
1088-43	TDI	NMP	4	1082-95	clear dfPET produced from 0.9 eq Propylene Glycol	32	PEG-4000	2000 MW 1,4, butanediol adipate polyester	18	DMPA	6.7	J
1088-45	TDI	NMP	4	1082-95	clear dfPET produced from 0.9 eq Propylene Glycol	32	PEG-4000	2000 MW 1,4, butanediol adipate polyester	18	DMPA	5.7	J
1088-73	TDI	NMP	4	1082-95	clear dfPET produced from 0.9 eq Propylene Glycol	32	PEG-4000	2000 MW 1,4, butanediol adipate polyester	17	DMPA	9.5	J
1088-75	TDI	NMP	4	1082-95	clear dfPET produced from 0.9 eq Propylene Glycol	32	PEG-200	2000 MW 1,4, butanediol adipate polyester	17	DMPA	8.1	J
1093-8	TDI	NMP	3	1088-88	clear dfPET produced from 0.9 eq Propylene Glycol	31	PEG-4000	2000 MW 1,4, butanediol adipate polyester	17	DMPA	10.8	J

CLAIMS

What is claimed is:

1. A dispersion of polymer particles in a continuous aqueous phase, wherein the dispersed particles comprise a polyurethane resin that is the reaction product of a polyisocyanate; at least one water solubilizing monomer; and at least one oligomeric form of polyethylene terephthalate containing hydroxyl group(s).
2. The dispersion of claim 1, wherein the at least one oligomeric form of polyethylene terephthalate containing hydroxyl groups comprises the reaction products of polyethylene terephthalate, a glycolysis agent, and optionally a catalyst.
3. The dispersion of claim 1, wherein the polyethylene terephthalate is selected from the group consisting of recycled polyethylene terephthalate, virgin polyethylene terephthalate and combinations thereof.
4. The dispersion of claim 1, wherein the glycolysis agent is selected from the group consisting of ethylene glycol, diethylene glycol, triethylene glycol, propylene glycol, 1,3-propanediol, 2-methyl-1,3-propanediol, 1,3-butanediol, 1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol, 2,2-diethyl-1,3-propanediol, 1,7-heptanediol, 1,8-octanediol, 1,9-nonanediol, 1,4-cyclohexanedimethanol, 2-butyl-2-ethyl-1,3-propanediol, 2-butyl-2-diethyl-1,3-propanediol, 3-methyl-1,5-pentanediol, 2,2,4-trimethylpentanediol, 1,4-dimethylcyclohexane, 1,10-decanediol, 1,11-undecanediol, 1,12-dodecanediol, 1,13-tridecanediol, 1,14-tetradecanediol, 1,15-pentadecanediol, 1,16-hexadecanediol, 1,17-hetadecanediol, 1,18-octadecanediol, neopentyl glycol, cyclohexanediol, hydrogenated bisphenol A, glycerol, trimethylolpropane, trimethylolethane, diglycerine, triglycerine, pentaerythritol, dipentaerythritol, sorbitol, 1,4-polyisoprenediol, 1,2-polybutadinediol, polybutanediol, and combinations thereof.
5. The dispersion of claim 1, wherein the catalyst is zinc acetate.
6. The dispersion of claim 1, wherein the polyisocyanate is selected from the group consisting of isophorone diisocyanate (IPDI), methylene bisphenyl isocyanate (MDI), dicyclohexylmethane 4,4'-diisocyanate (H₁₂MDI), cyclohexyl diisocyanate (CHDI), m-tetramethylxylylene diisocyanate (m-TMXDI), tetramethylxylylene

diisocyanate (TMXDI), ethylene diisocyanate, 1,2-diisocyanatopropane, 1,3-diisocyanatopropane, 1,6-diisocyanatohexane (hexamethylene diisocyanate or HDI), 1,4-butylene diisocyanate, lysine diisocyanate, 1,4-methylene bis-(cyclohexyl isocyanate), toluene diisocyanate (TDI), m-xylylenediisocyanate (MXDI) and p-xylylenediisocyanate, 4-chloro-1,3-phenylene diisocyanate, 1,5-tetrahydronaphthalene diisocyanate, 4,4'-dibenzyl diisocyanate, and 1,2,4-benzene triisocyanate, xylylene diisocyanate (XDI), 1,4-diisocyanatobutane, 1,5-diisocyanatopentane, 1,6-diisocyanatohexane, 2-methyl-1,5-diisocyanatopentane, 1,5-diisocyanato-2,2-dimethylpentane, 2,2,4-trimethyl-1,6-diisocyanatohexane, 2,4,4-trimethyl-1,6-diisocyanatohexane, 1,1,0-diisocyanatodecane, 1,3-diisocyanatocyclohexane, 1,4-diisocyanatocyclohexane, 1,3-bis-(isocyanatomethyl)cyclohexane, 1,4-bis-(isocyanatomethyl)cyclohexane, isophorone diisocyanate, 4,4'-diisocyanatodicyclohexylmethane, triisocyanatononane, ω,ω' -diisocyanato-1,3-dimethylcyclohexane, 1-isocyanato-1-methyl-3-isocyanatomethylcyclohexane, 1-isocyanato-1-methyl-4-isocyanatomethylcyclohexane, bis-(isocyanatomethyl)norbornane, 1,5-naphthalene diisocyanate, 1,3-bis-(2-isocyanatoprop-2-yl)benzene, 1,4-bis-(2-isocyanatoprop-2-yl)benzene, 2,4-diisocyanatotoluene, 2,6-diisocyanatotoluene, 2,4'-diisocyanatodiphenylmethane, 4,4'-diisocyanatodiphenylmethane, 1,5-diisocyanatonaphthalene, 1,3-bis(isocyanatomethyl)benzene, and combinations thereof.

7. The dispersion of claim 1, wherein the water solublizing monomer comprises a hydroxy-carboxylic acid having the general formula $(\text{HO})_x\text{Q}(\text{COOH})_y$, wherein Q is a straight or branched hydrocarbon radical containing 1 to 12 carbon atoms, x and y ranges from 1 to 3.

8. An adhesive, sealant or coating composition comprising the dispersion of claim 1.

9. A method for preparing a dispersion of polymer particles in a continuous aqueous phase, comprising dispersing a urethane group-containing prepolymer in an aqueous phase, wherein the prepolymer is the reaction product of a polyisocyanate; at least one water solubilizing monomer; and at least one oligomeric form of

polyethylene terephthalate containing hydroxyl group(s) comprising the reaction product of polyethylene terephthalate, a glycolysis agent, and optionally a catalyst.

10. The method of claim 9, wherein the polyethylene terephthalate is selected from the group consisting of recycled polyethylene terephthalate, virgin polyethylene terephthalate and combinations thereof.

11. The method of claim 9, wherein the glycolysis agent is selected from the group consisting of ethylene glycol, diethylene glycol, triethylene glycol, propylene glycol, 1,3-propanediol, 2-methyl-1,3-propanediol, 1,3-butanediol, 1,4-butanediol, 1,5-pentanediol, 1,6-hexanediol, 2,2-diethyl-1,3-propanediol, 1,7-heptanediol, 1,8-octanediol, 1,9-nonanediol, 1,4-cyclohexanedimethanol, 2-butyl-2-ethyl-1,3-propanediol, 2-butyl-2-diethyl-1,3-propanediol, 3-methyl-1,5-pentanediol, 2,2,4-trimethylpentanediol, 1,4-dimethylcyclohexane, 1,10-decanediol, 1,11-undecanediol, 1,12-dodecanediol, 1,13-tridecanediol, 1,14-tetradecanediol, 1,15-pentadecanediol, 1,16-hexadecanediol, 1,17-heptadecanediol, 1,18-octadecanediol, neopentyl glycol, cyclohexanediol, hydrogenated bisphenol A, glycerol, trimethylolpropane, trimethylolethane, diglycerine, triglycerine, pentaerythritol, dipentaerythritol, sorbitol, 1,4-polyisoprenediol, 1,2-polybutadinediol, polybutanediol, and combinations thereof.

12. The method of claim 9, wherein the catalyst is zinc acetate.

13. The method of claim 9, wherein the polyisocyanate is selected from the group consisting of isophorone diisocyanate (IPDI), methylene bisphenyl isocyanate (MDI), dicyclohexylmethane 4,4'-diisocyanate (H₁₂MDI), cyclohexyl diisocyanate (CHDI), m-tetramethylxylylene diisocyanate (m-TMXDI), tetramethylxylylene diisocyanate (TMXDI), ethylene diisocyanate, 1,2-diisocyanatopropane, 1,3-diisocyanatopropane, 1,6-diisocyanatohexane (hexamethylene diisocyanate or HDI), 1,4-butylene diisocyanate, lysine diisocyanate, 1,4-methylene bis-(cyclohexyl isocyanate), toluene diisocyanate (TDI), m-xylylenediisocyanate (MXDI) and p-xylylenediisocyanate, 4-chloro-1,3-phenylene diisocyanate, 1,5-tetrahydronaphthalene diisocyanate, 4,4'-dibenzyl diisocyanate, and 1,2,4-benzene triisocyanate, xylylene diisocyanate (XDI), 1,4-diisocyanatobutane, 1,5-diisocyanatopentane, 1,6-diisocyanatohexane, 2-methyl-1,5-diisocyanatopentane, 1,5-diisocyanato-2,2-

dimethylpentane, 2,2,4-trimethyl-1,6-diisocyanatohexane, 2,4,4-trimethyl-1,6-diisocyanatohexane, 1,1,0-diisocyanatodecane, 1,3-diisocyanatocyclohexane, 1,4-diisocyanatocyclohexane, 1,3-bis-(isocyanatomethyl)cyclohexane, 1,4-bis-(isocyanatomethyl)cyclohexane, isophorone diisocyanate, 4,4'-diisocyanatodicyclohexylmethane, triisocyanatononane, ω,ω' -diisocyanato-1,3-dimethylcyclohexane, 1-isocyanato-1-methyl-3-isocyanatomethylcyclohexane, 1-isocyanato-1-methyl-4-isocyanatomethylcyclohexane, bis-(isocyanatomethyl)norbornane, 1,5-naphthalene diisocyanate, 1,3-bis-(2-isocyanatoprop-2-yl)benzene, 1,4-bis-(2-isocyanatoprop-2-yl)benzene, 2,4-diisocyanatotoluene, 2,6-diisocyanatotoluene, 2,4'-diisocyanatodiphenylmethane, 4,4'-diisocyanatodiphenylmethane, 1,5-diisocyanatonaphthalene, 1,3-bis(isocyanatomethyl)benzene, and combinations thereof.

14. The method of claim 9, wherein the water solublizing monomer comprises a hydroxy-carboxylic acid having the general formula $(\text{HO})_x\text{Q}(\text{COOH})_y$, wherein Q is a straight or branched hydrocarbon radical containing 1 to 12 carbon atoms, x and y ranges from 1 to 3.

DSC


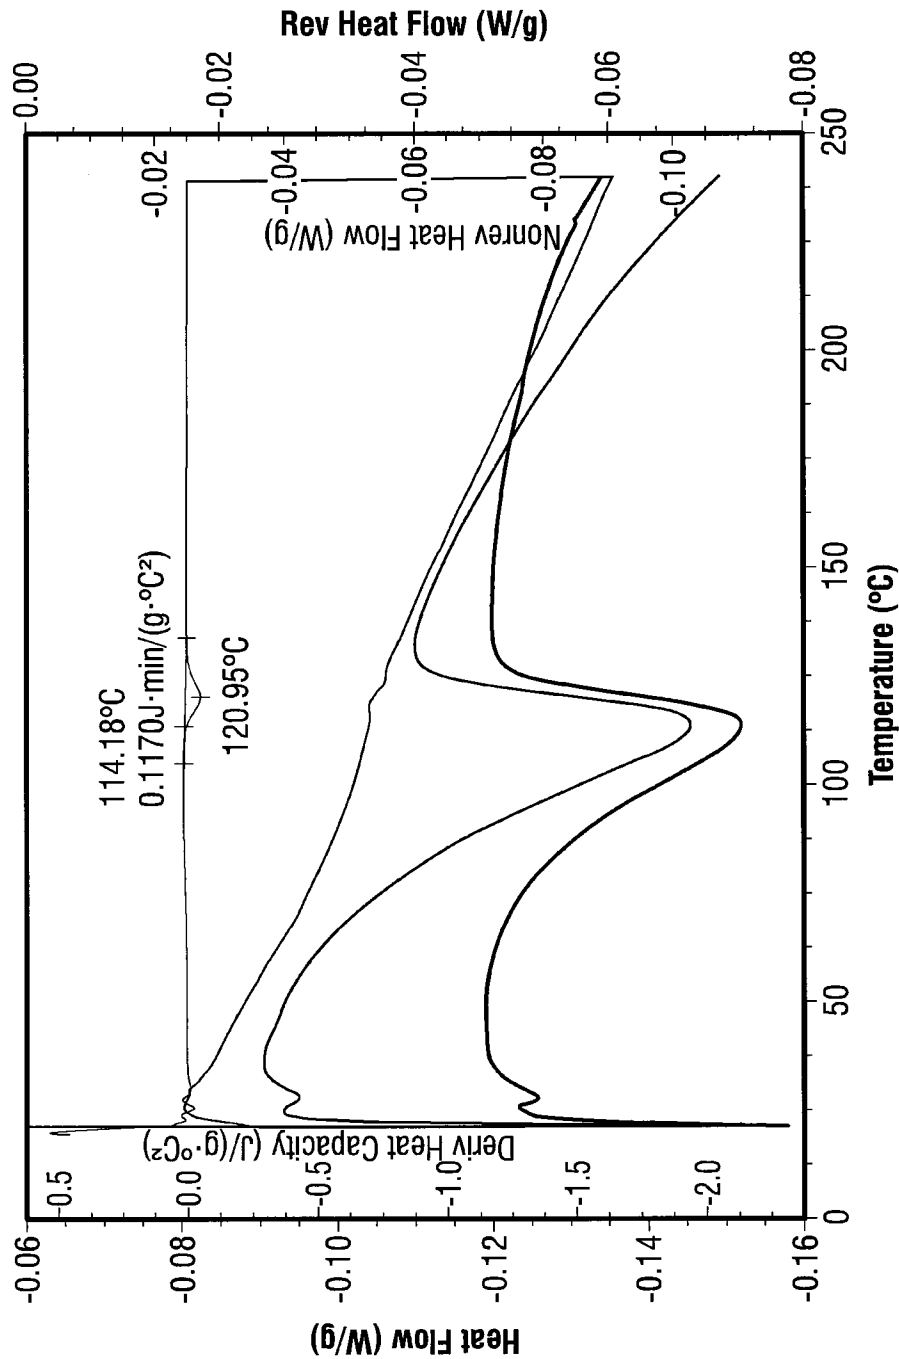


FIG. 1

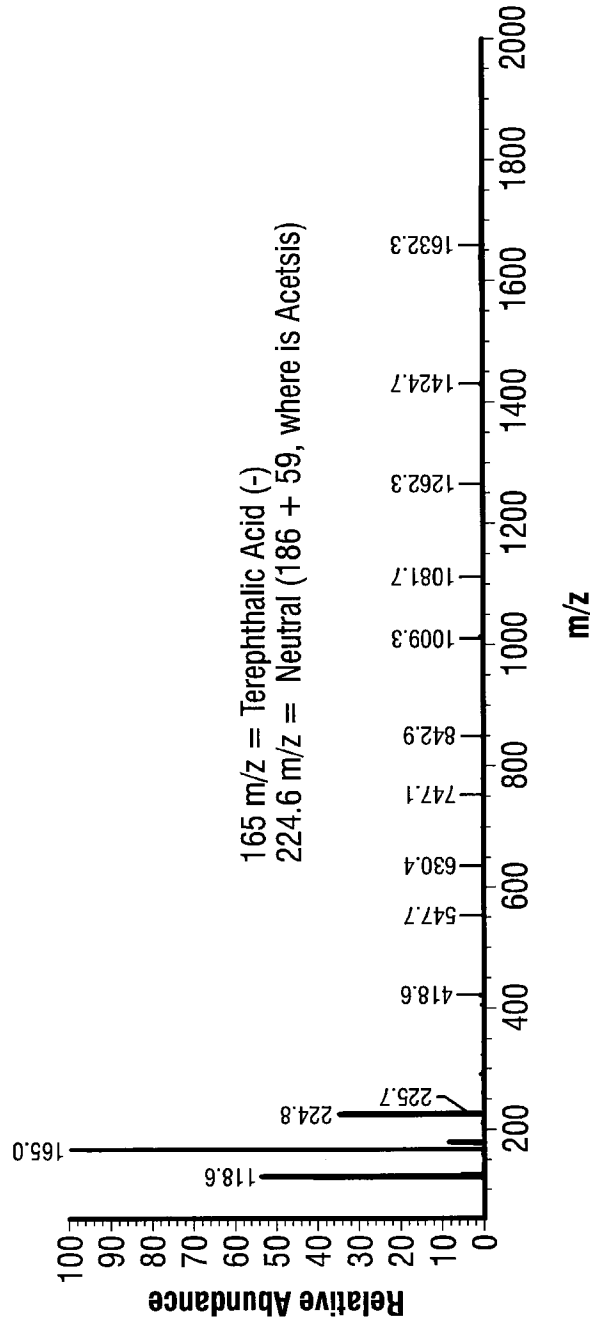

165 m/z = Terephthalic Acid (-)
224.6 m/z = Neutral (186 + 59, where is Acetasis)

FIG. 2

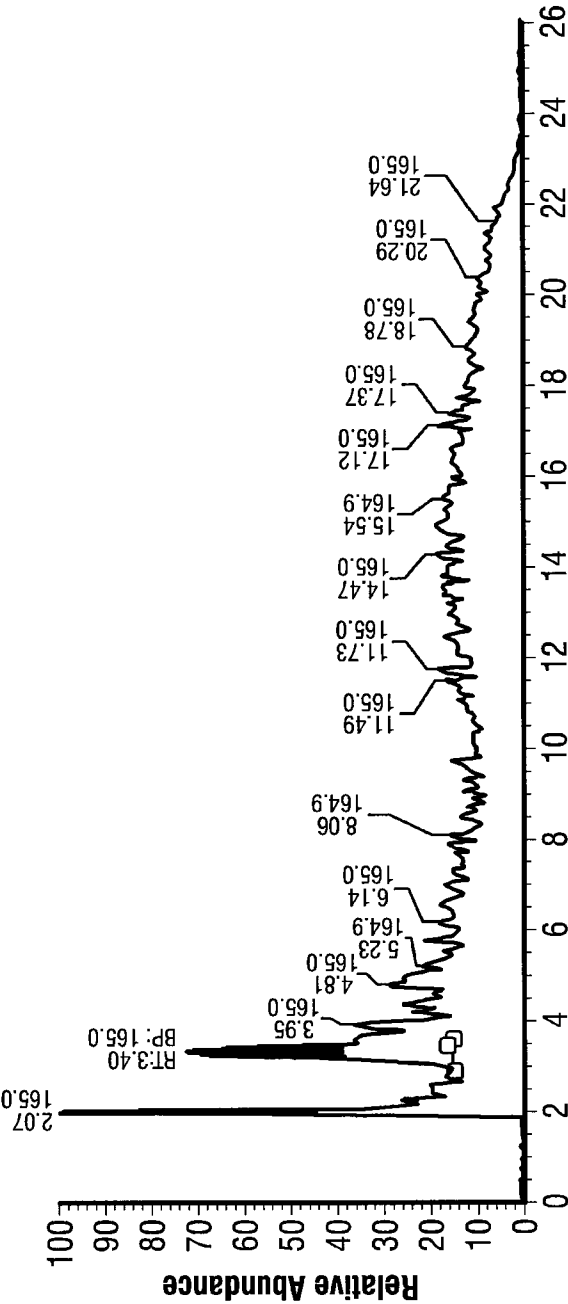


FIG. 2
(Continued)

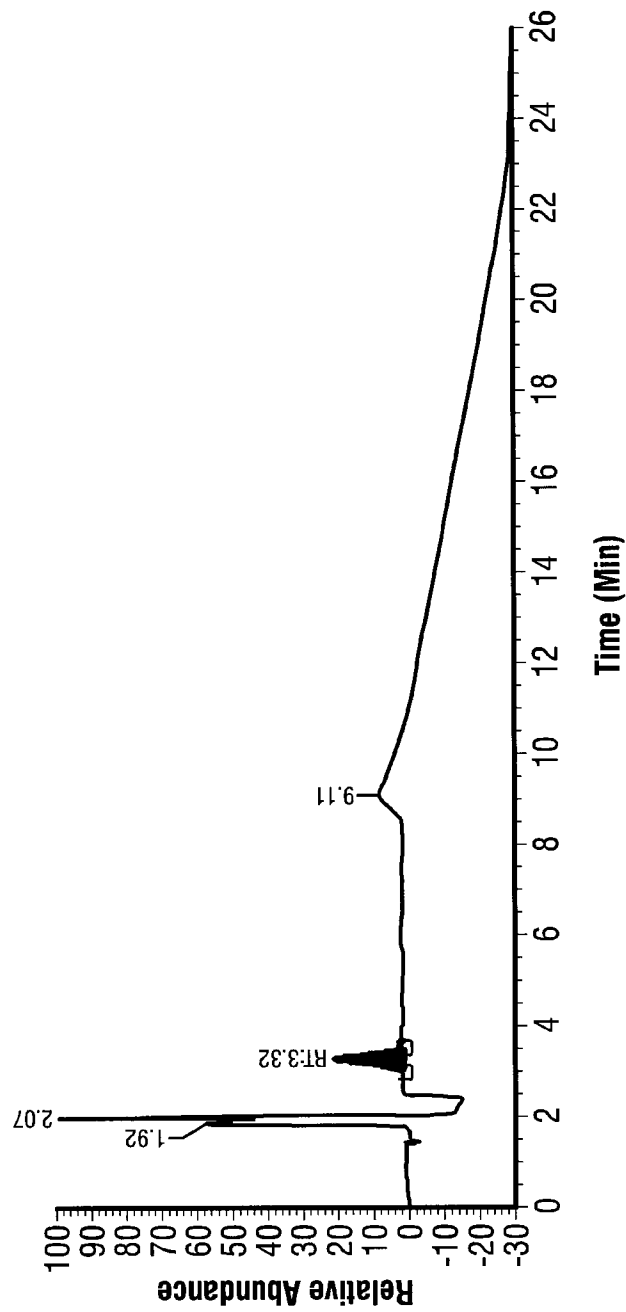


FIG. 2
(Continued)

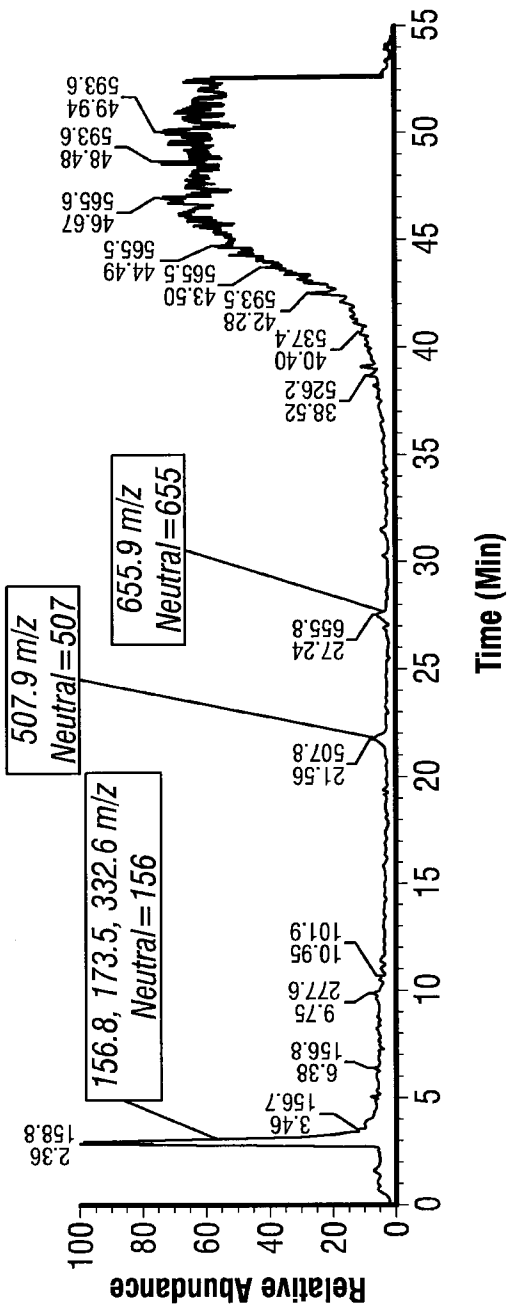


FIG. 3

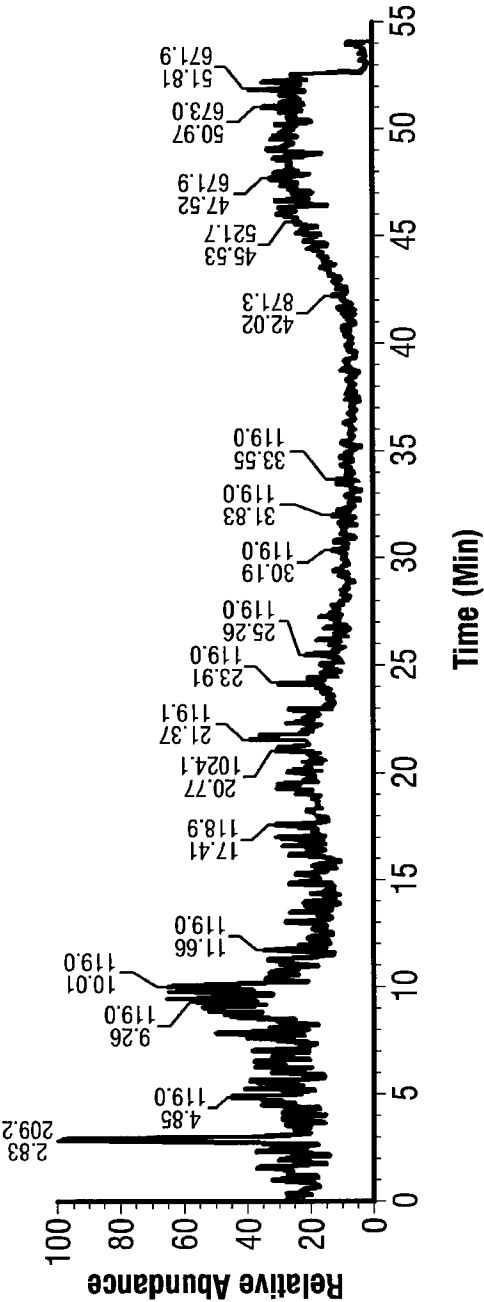


FIG. 3
(Continued)

7/53

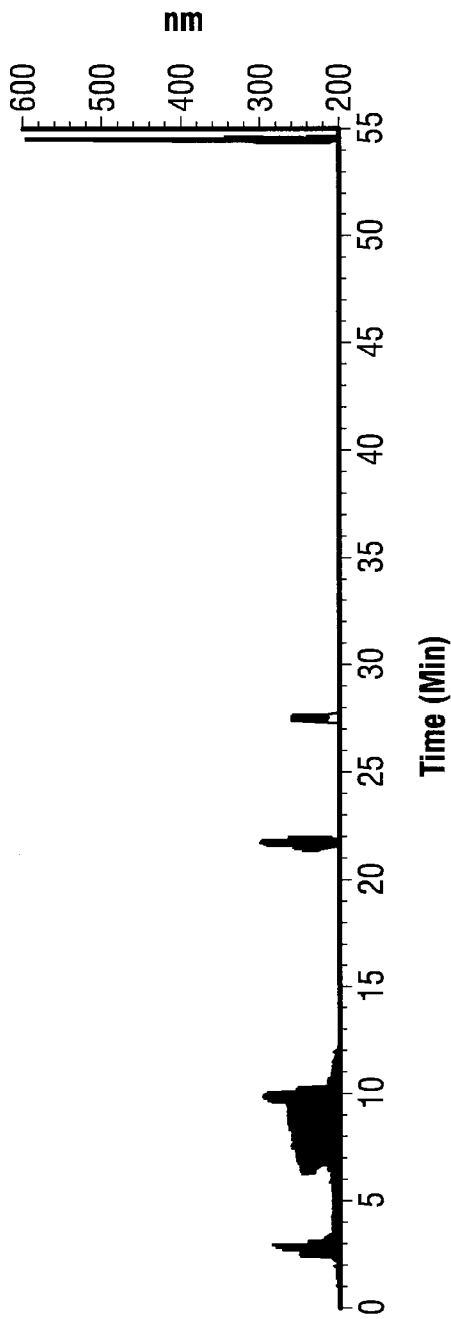


FIG. 3
(Continued)

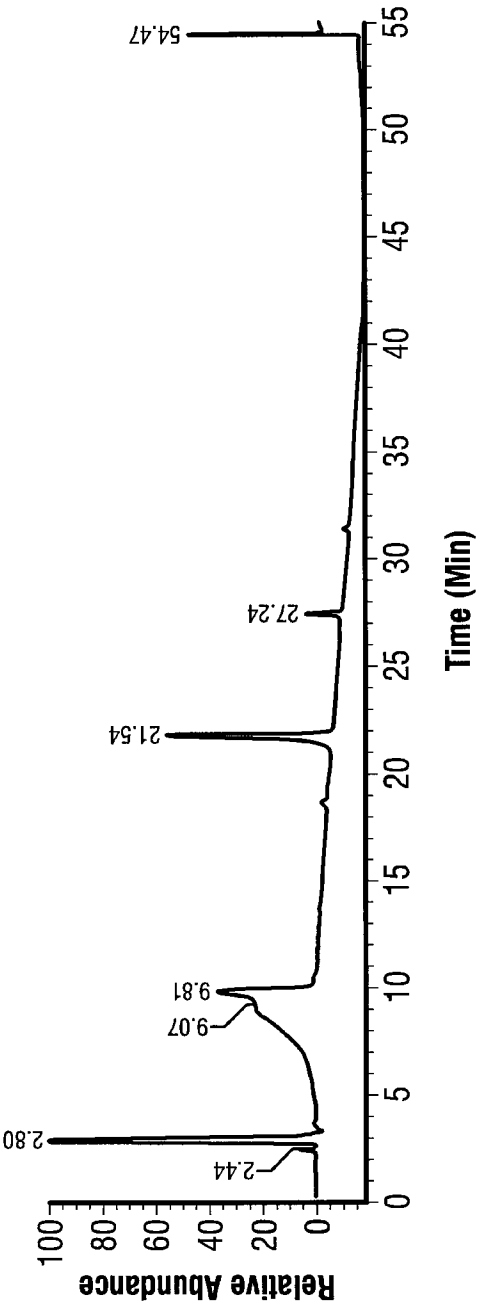


FIG. 3
(Continued)

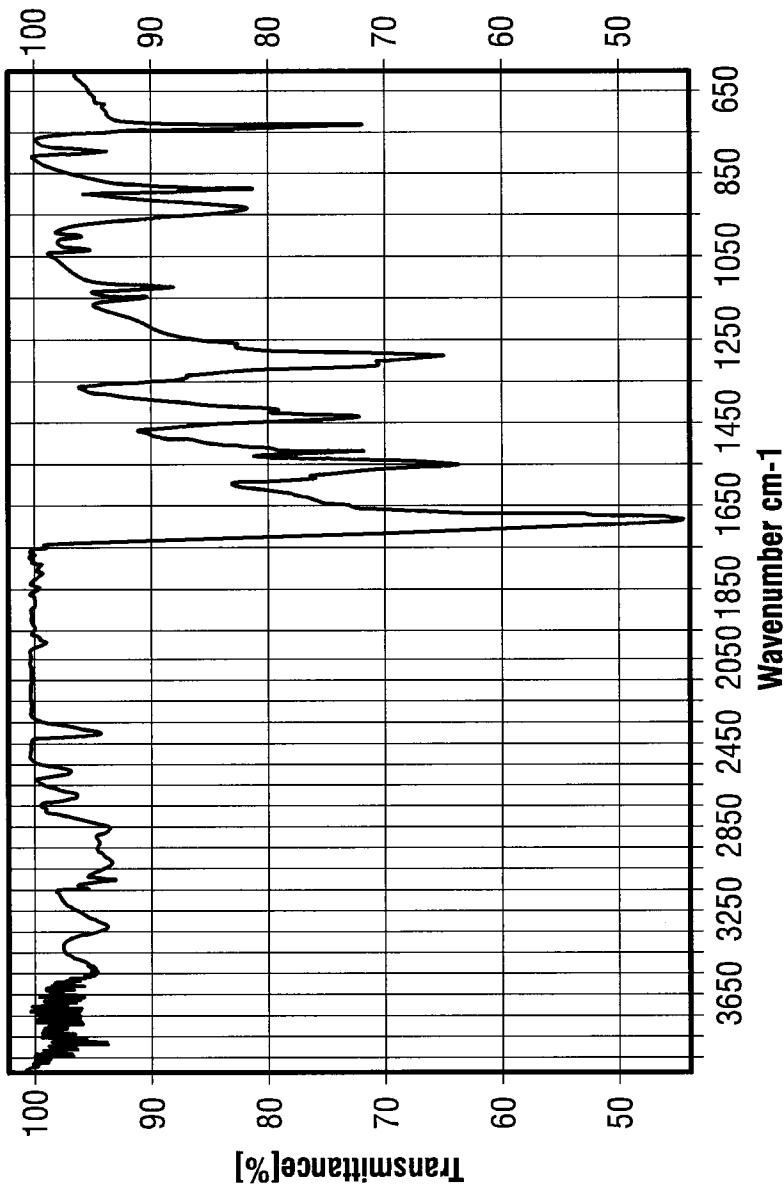


FIG. 4

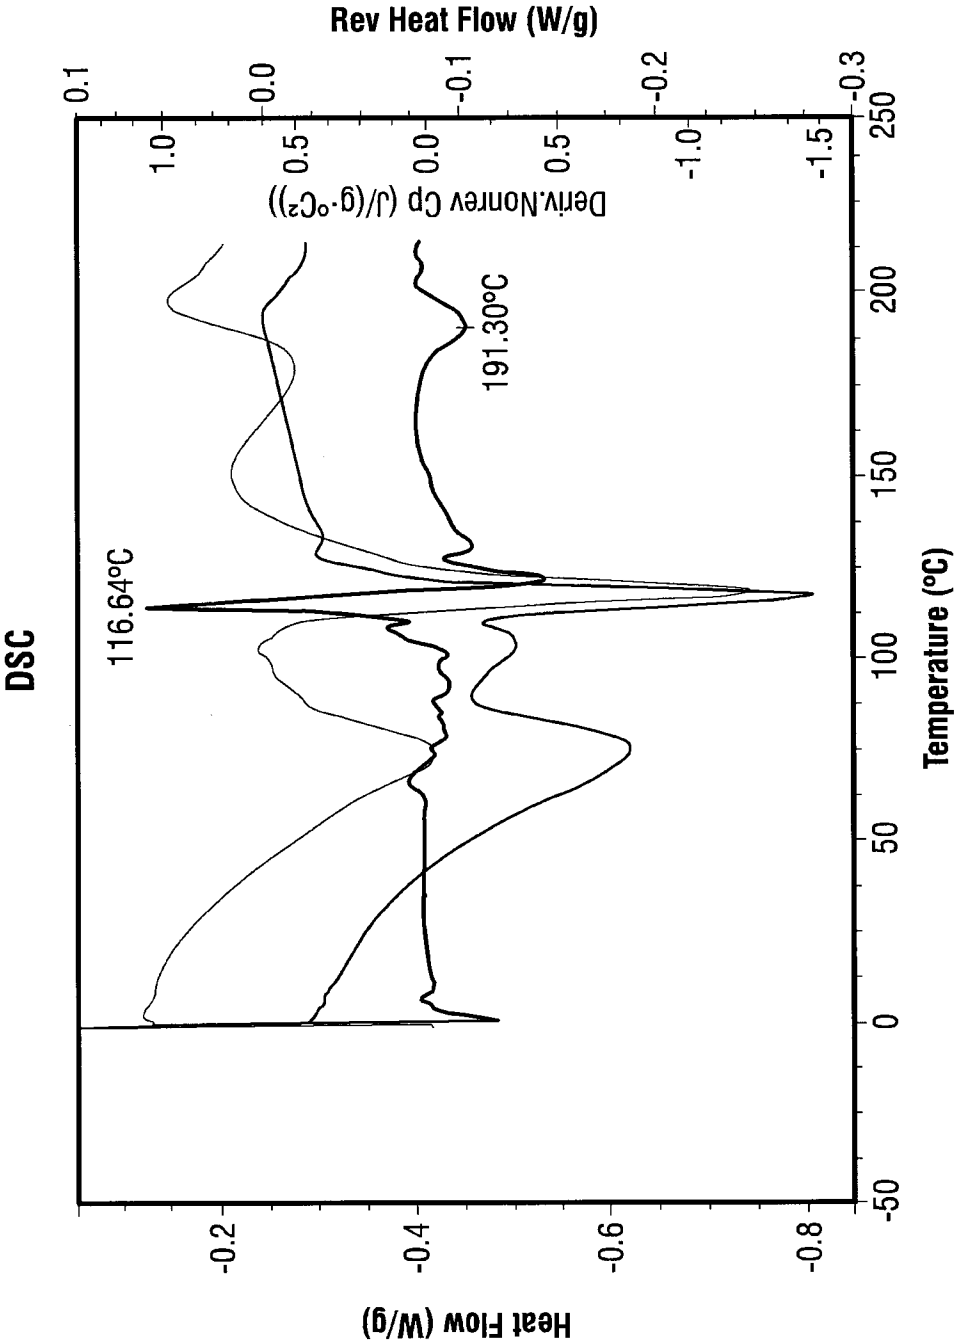


FIG. 5

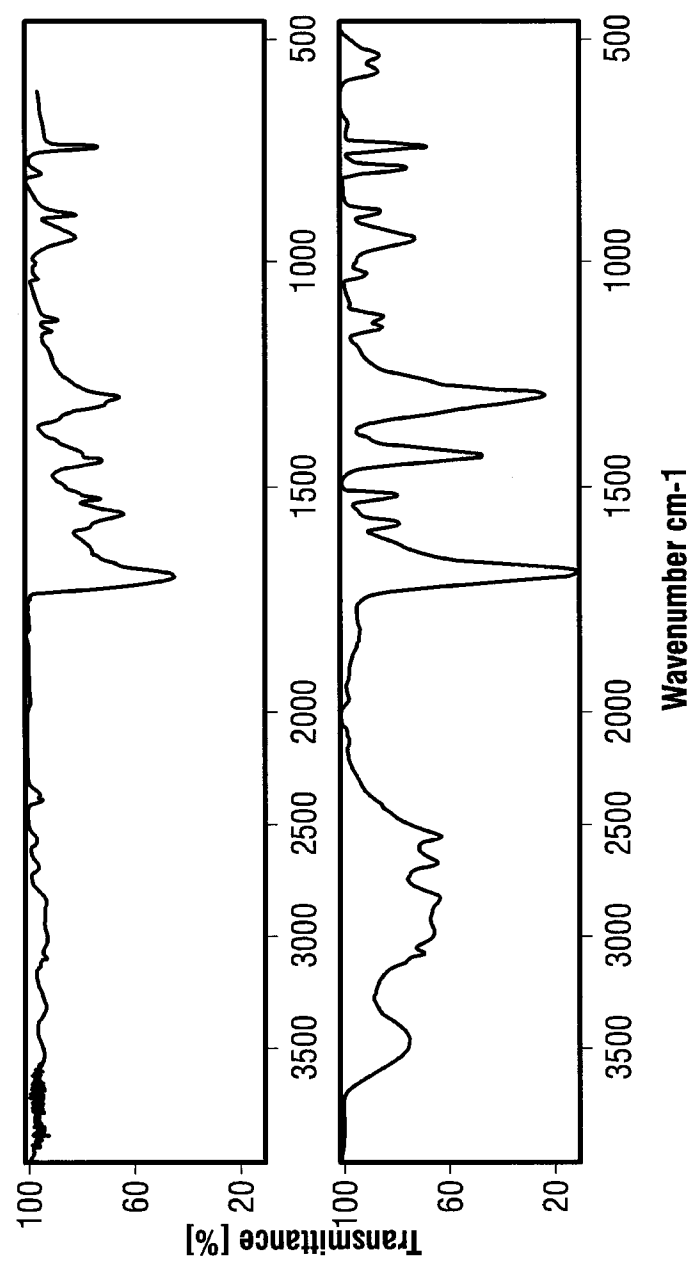


FIG. 6

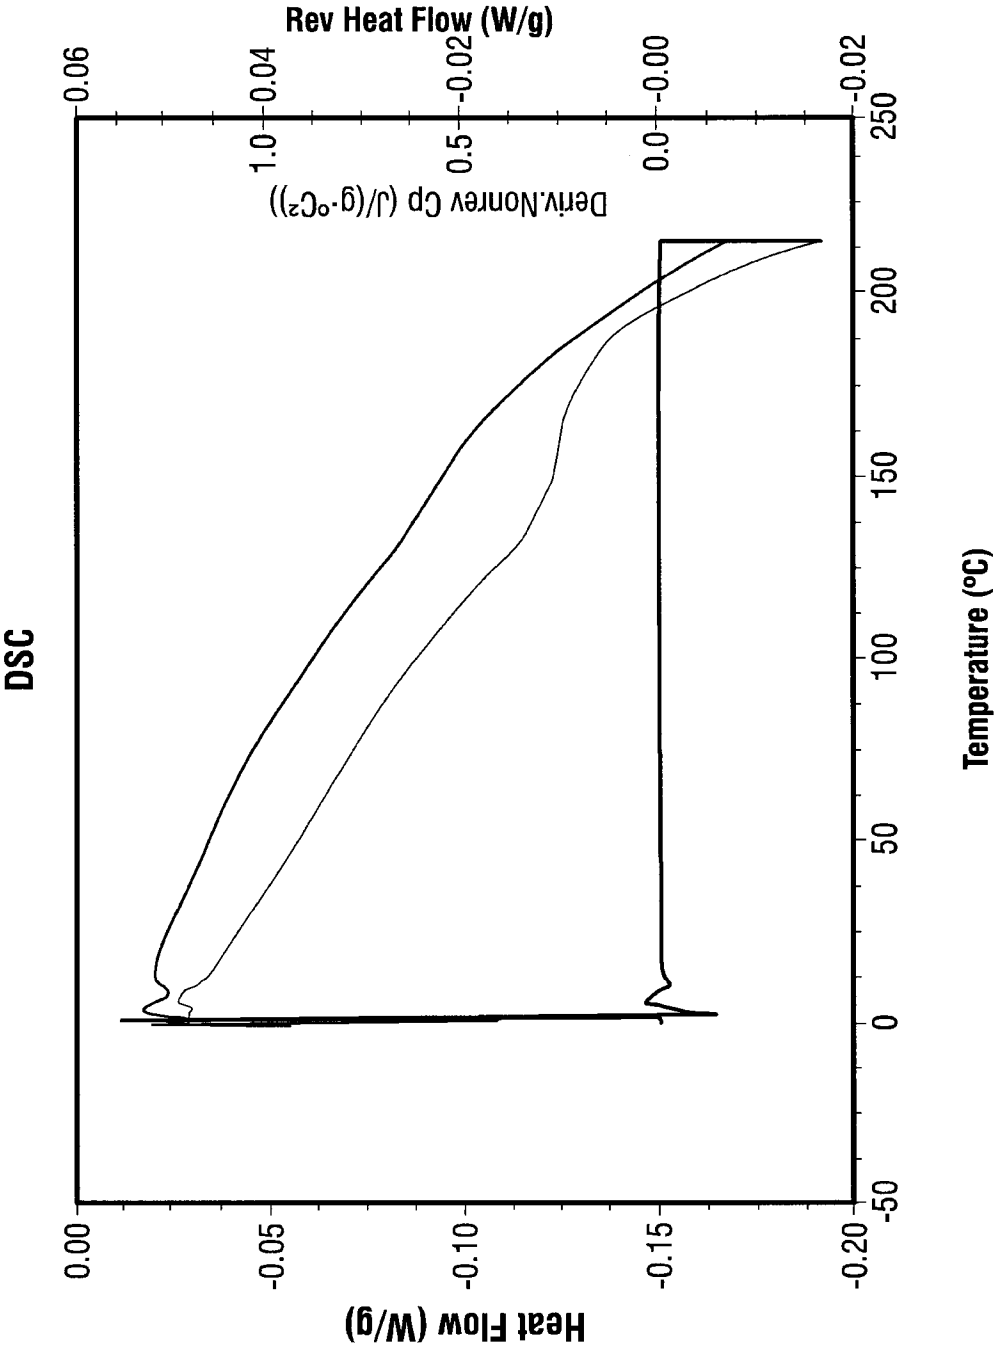


FIG. 7

13/53

Client: Chamlr
Rajesh Tiwari
rtiwari@chemlr.com

P.O.# : 15799

Report #: L030CA
Date Received : 1/29/10
Date : 1/31/10
Phone : 800 659 7659
Pump: Waters 590
Injector: Waters 717 WISP
Detector 1 : Waters 484UV @ 265nm
Detector 2 : Varian 380LC Evap57 Neb37 Gas1.2 PMTI Smth50 LED 20
Columns : Jordi Mixed Linear 500x10mm Cat # 15025 #11060805
Jordi Mixed Linear 500x10mm Cat # 15025 #11060806

Temperature : 35°C
Data : Millenium 2.10
Eluent : Chloroform/10% Dichloroacetic acid 2.5mm tetrabutyl ammonium acetate

Standards : 12 Polystyrene Standards (580 Mp - 2400000 Mp)
Curve Fit : Linear
Sample : PET and PET digests
Sample Conc < = : 0.30%
Sample Prep : 1.2mg/.05 ml. DCAA and 0.5ml. CHCl3 RT 1Hour
diluted with 3ml CHCl3

Results & Plot : Triplicate Injections

UV Values

UV Values	Mn	Mw	Mz	Mp	Disp.
600151	282	338	417	300	1.20
600152	304	369	461	334	1.21
600153	11802	41253	72290	42204	3.50

Fax : 314 291 6630
Flow Rate : 0.85 ml/min
Injection Vol : 25ul

Sampling Rate : 1.0 point per second
[67-66-3] 472476 Lot#11198KJ
[79-43-6] DS 470-2 Lot#08103MH
[10534-59-533599-1] Lot#JF16014MZ
Correl = -0.9964

FIG. 8

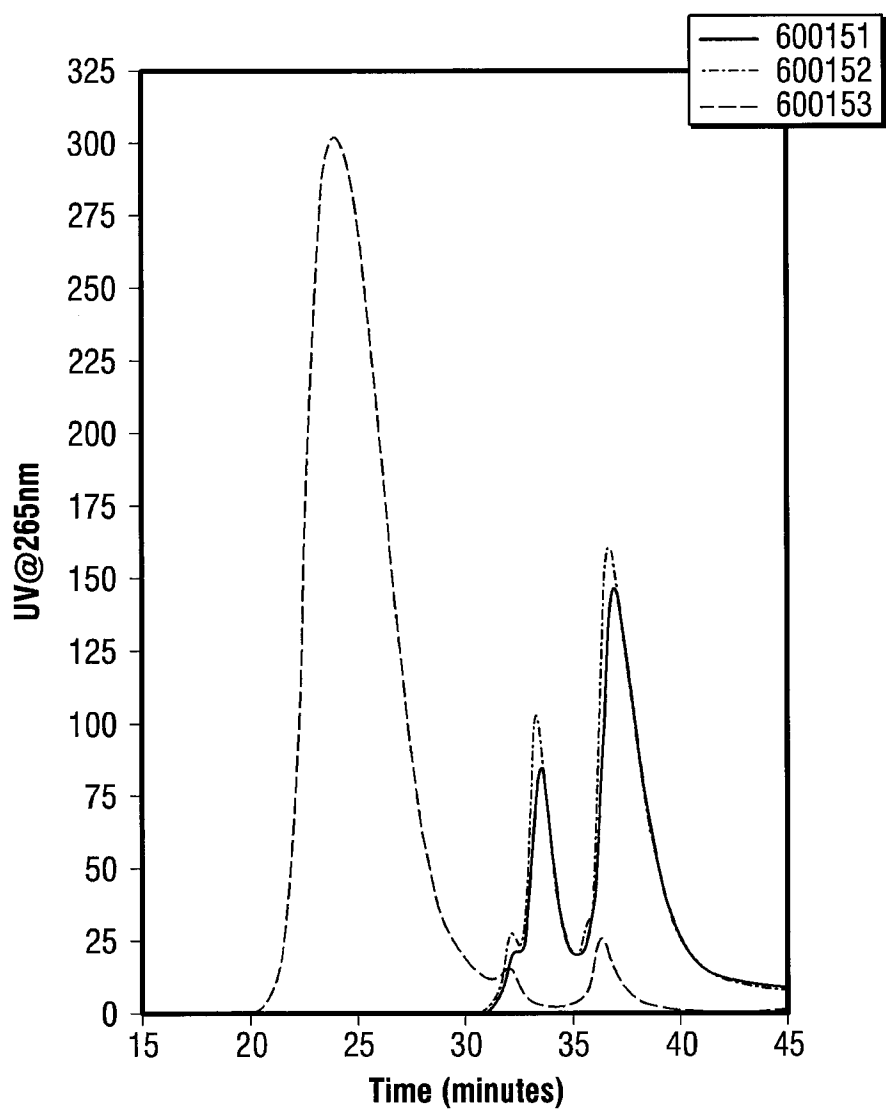
14/53

FIG. 8
(Continued)

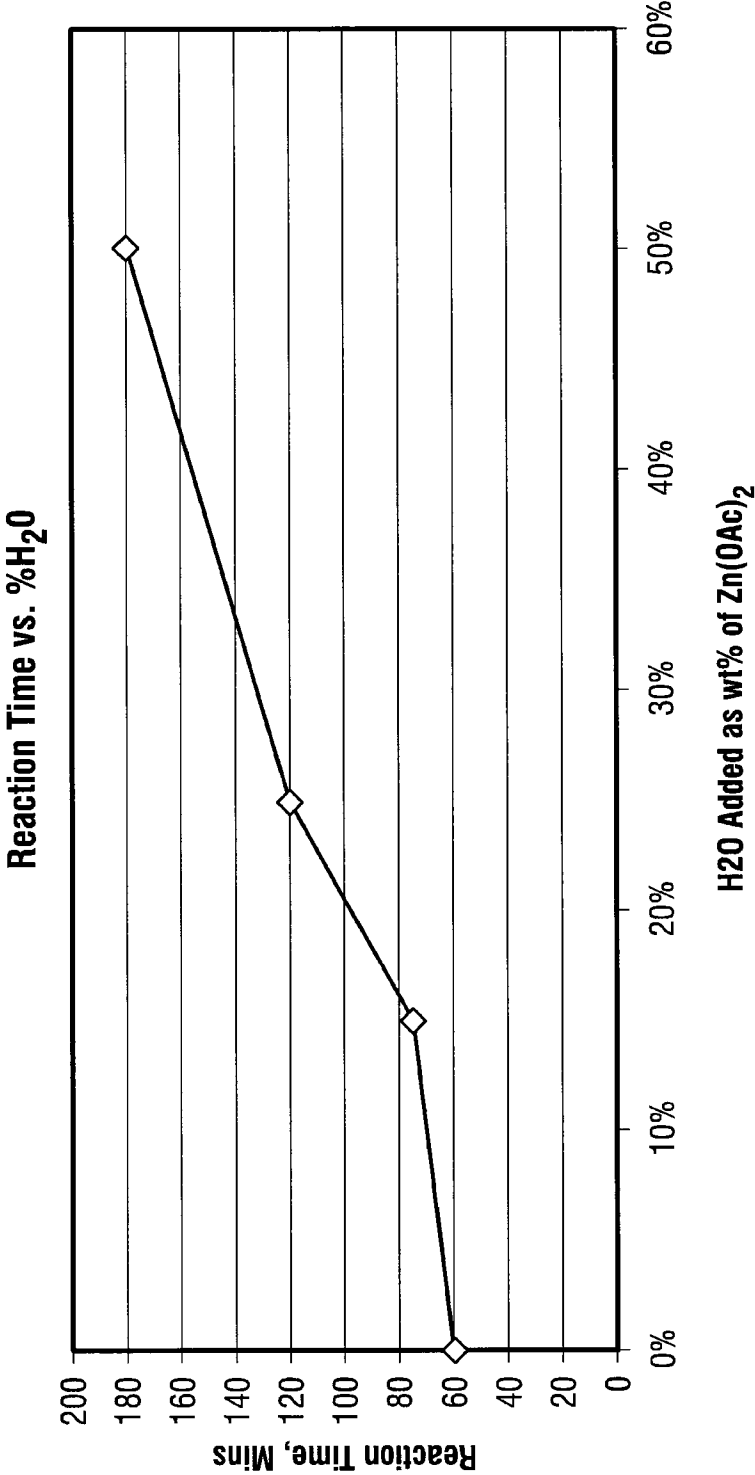


FIG. 9

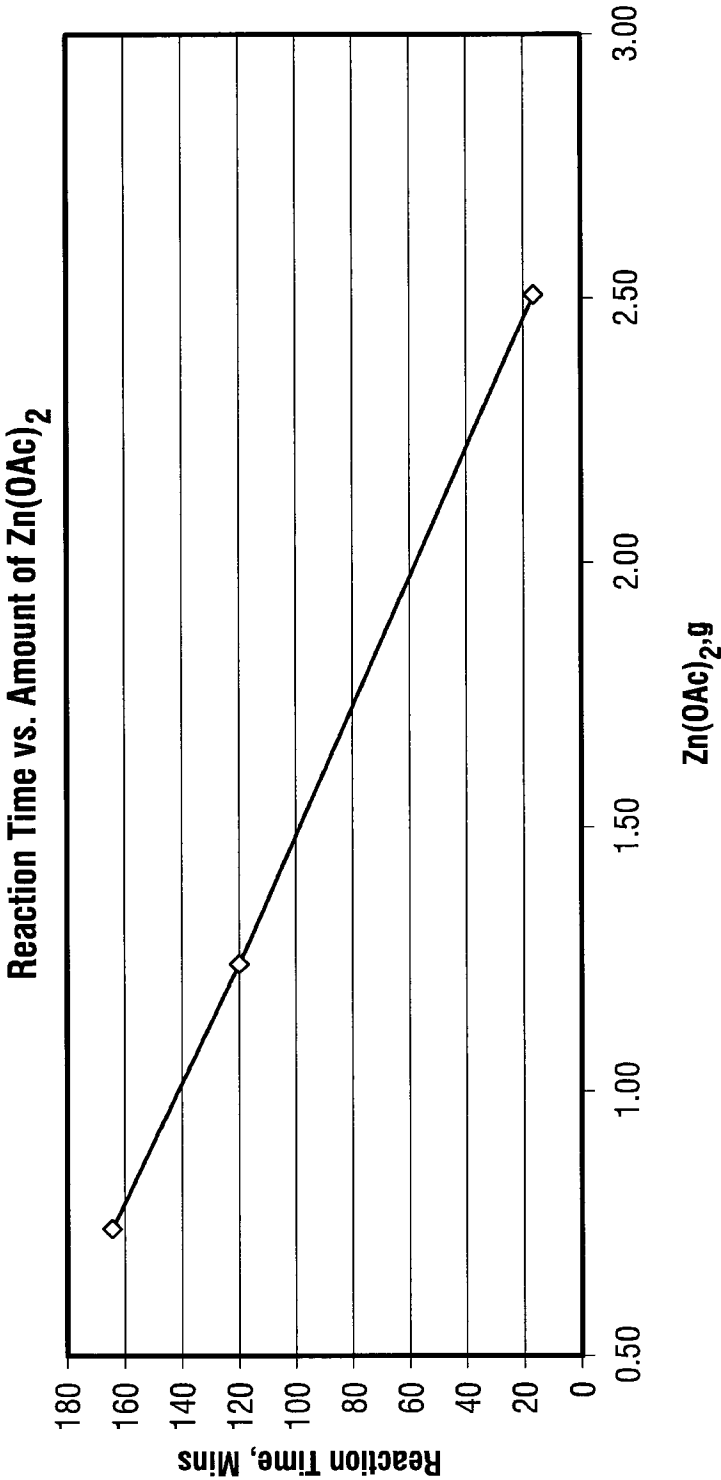
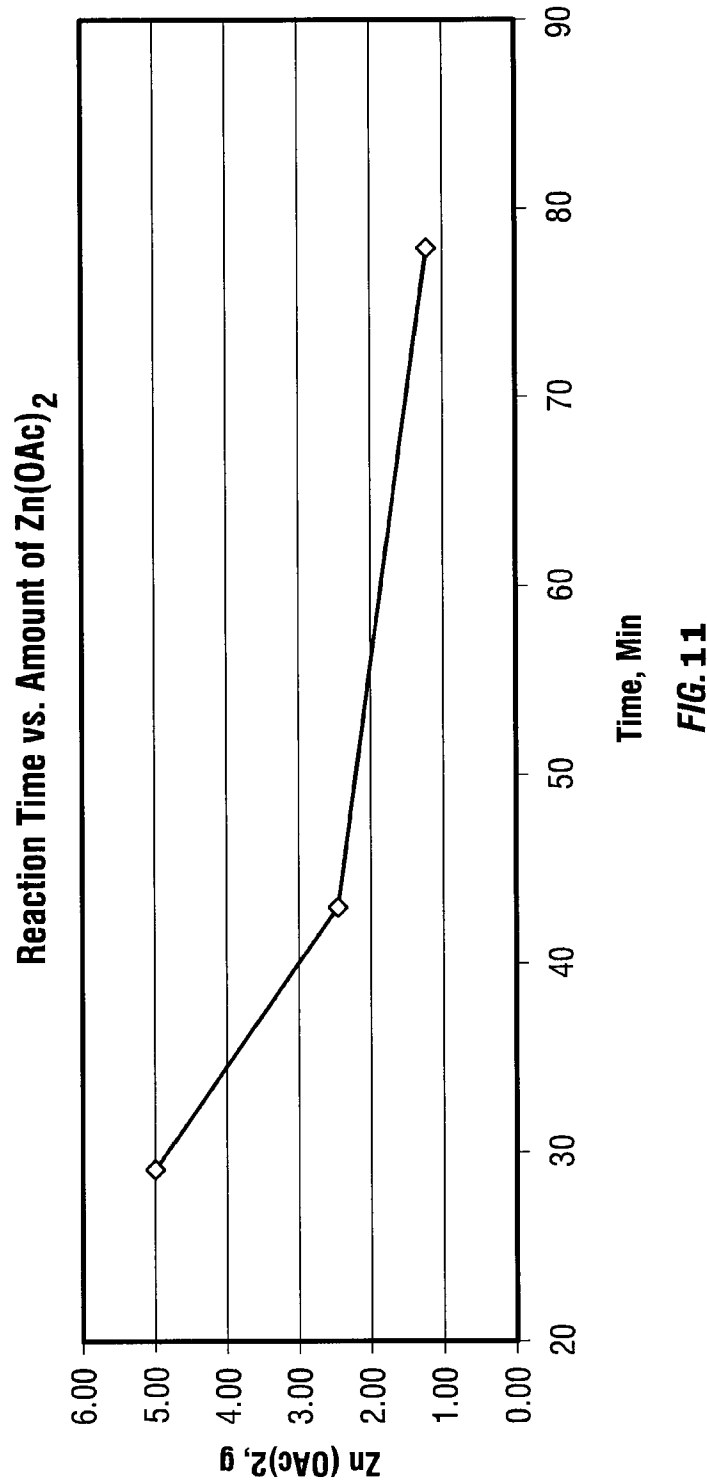


FIG. 10



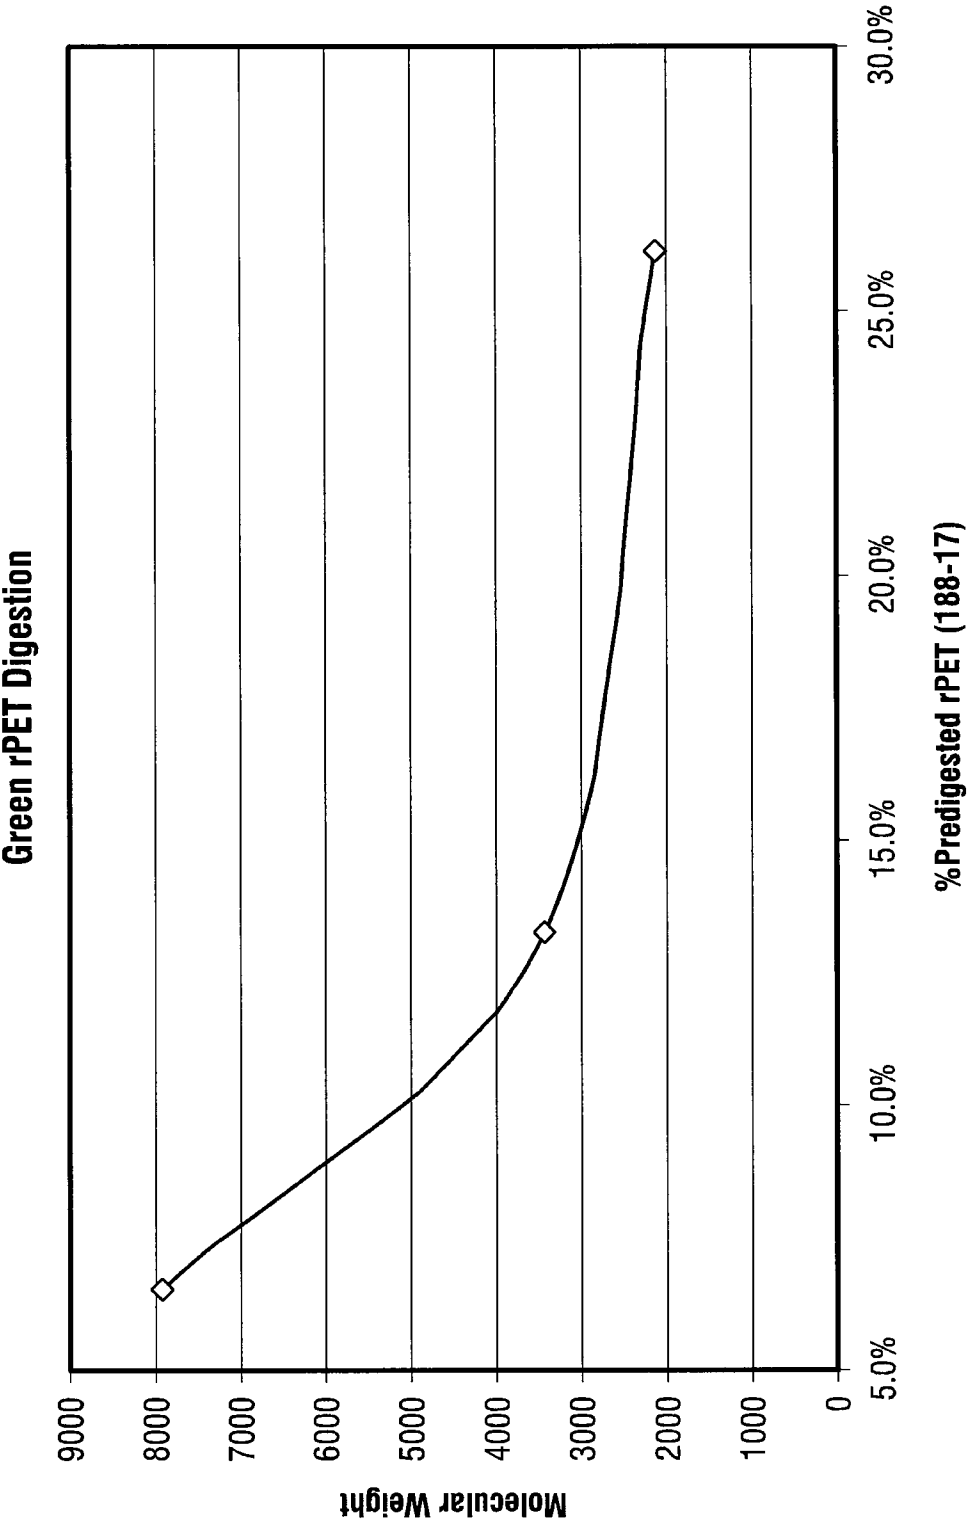


FIG. 12

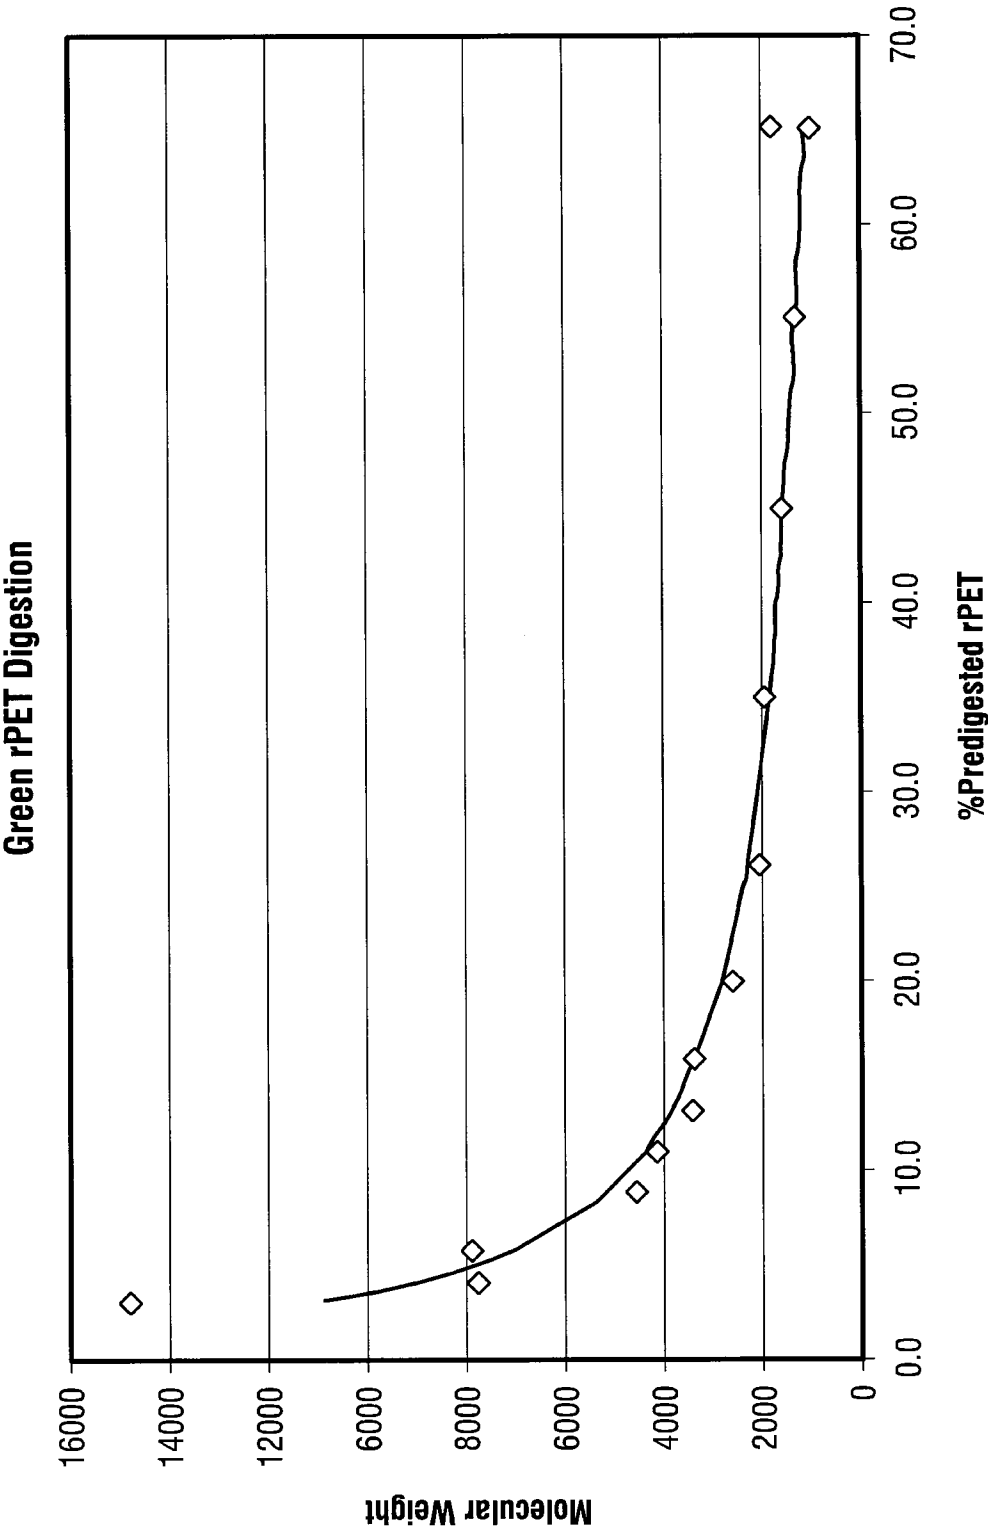


FIG. 13

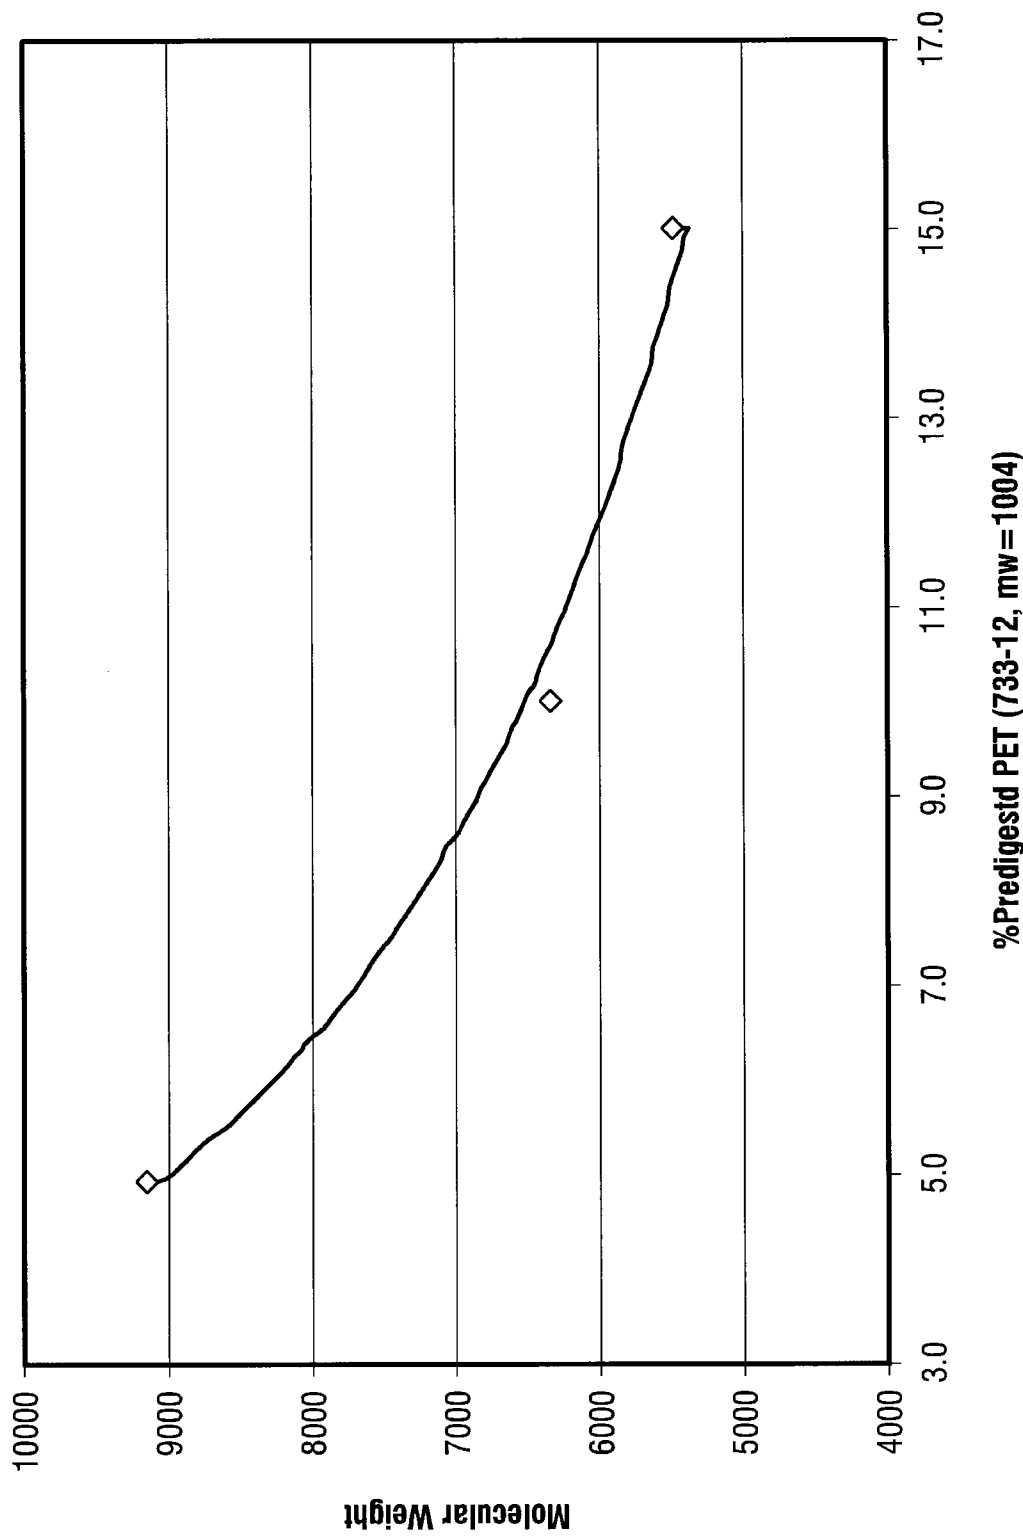


FIG. 14

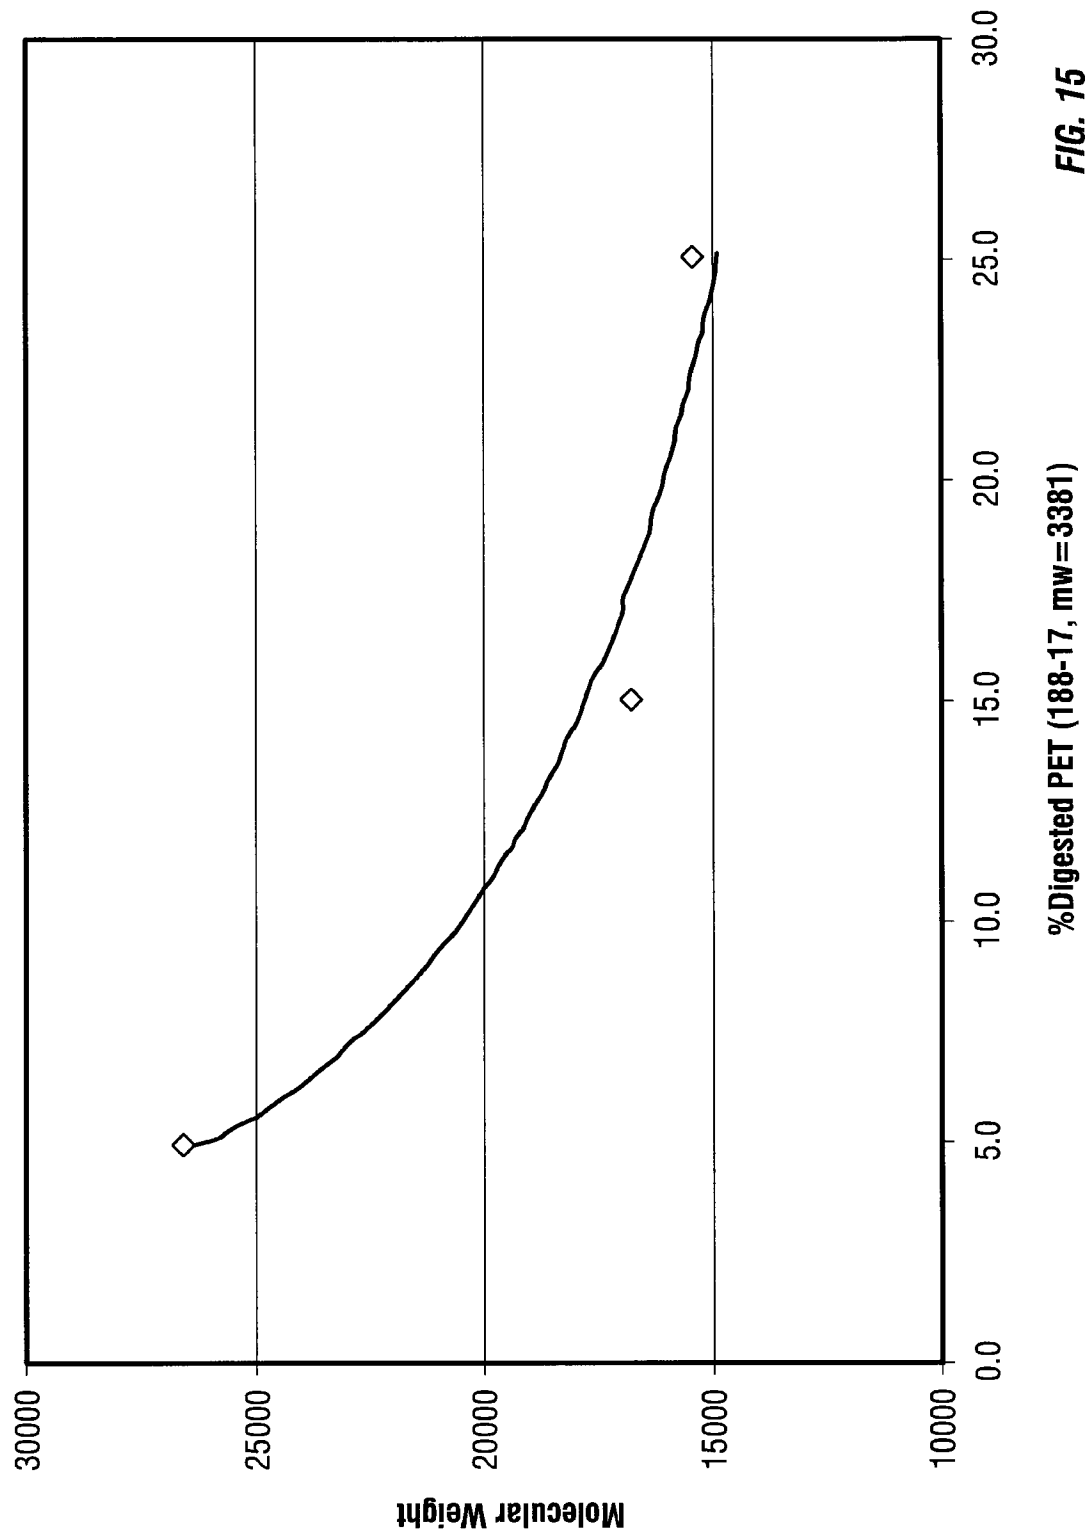


FIG. 15

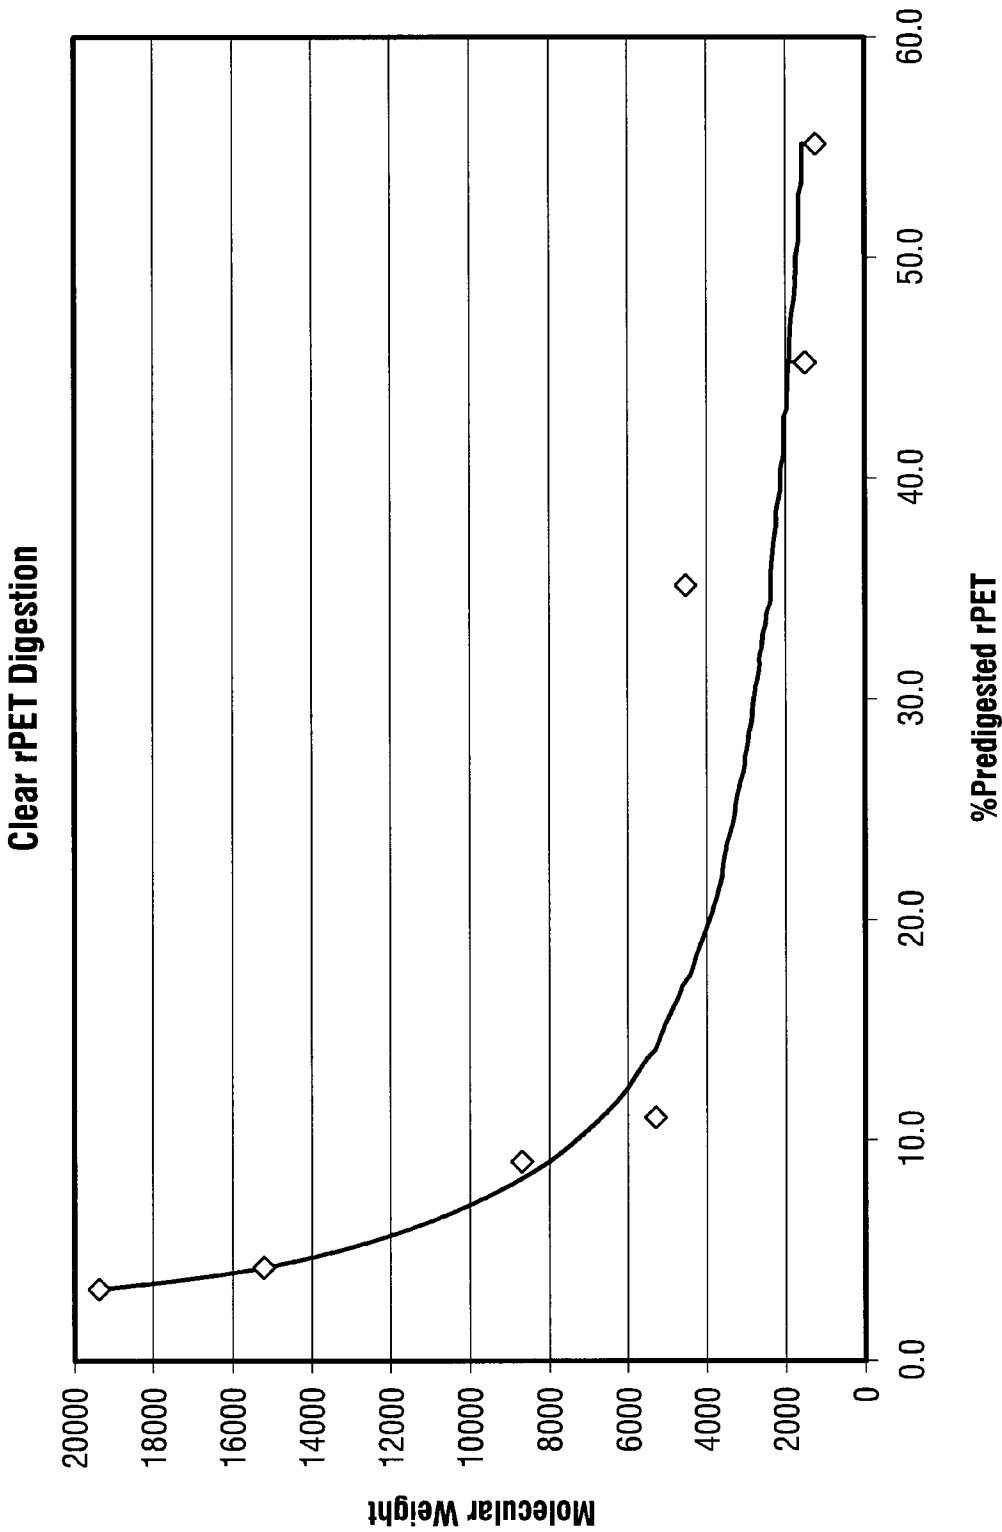


FIG. 16

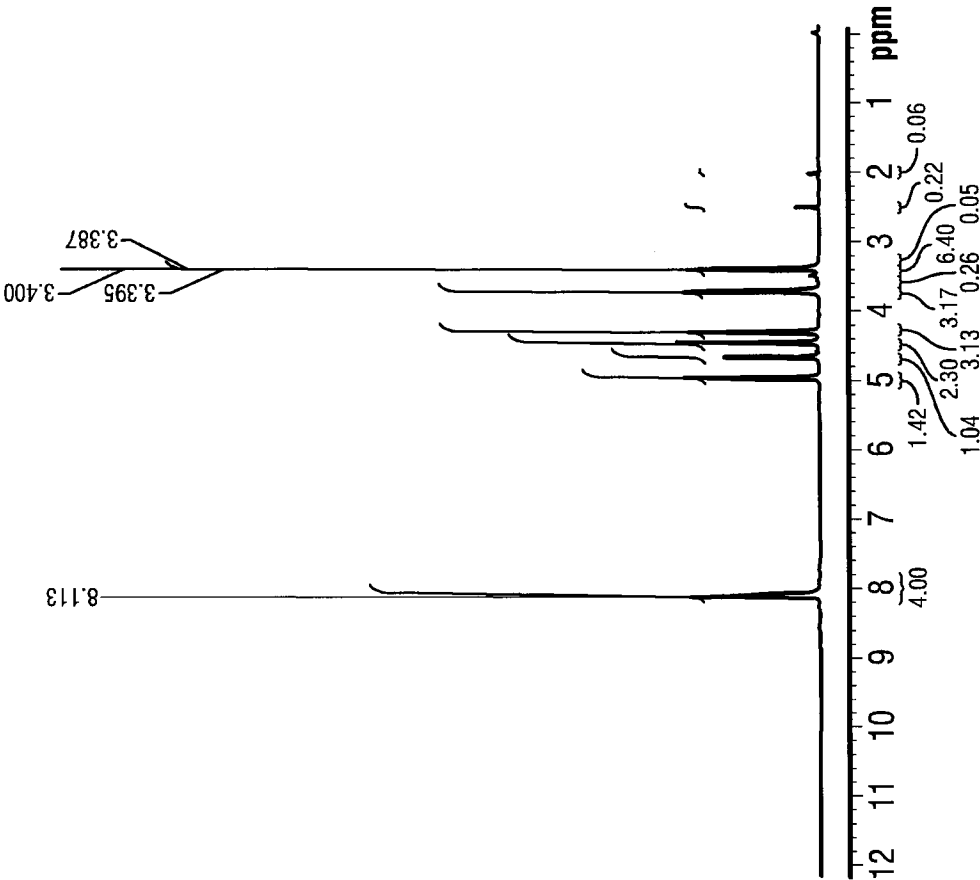


FIG. 17

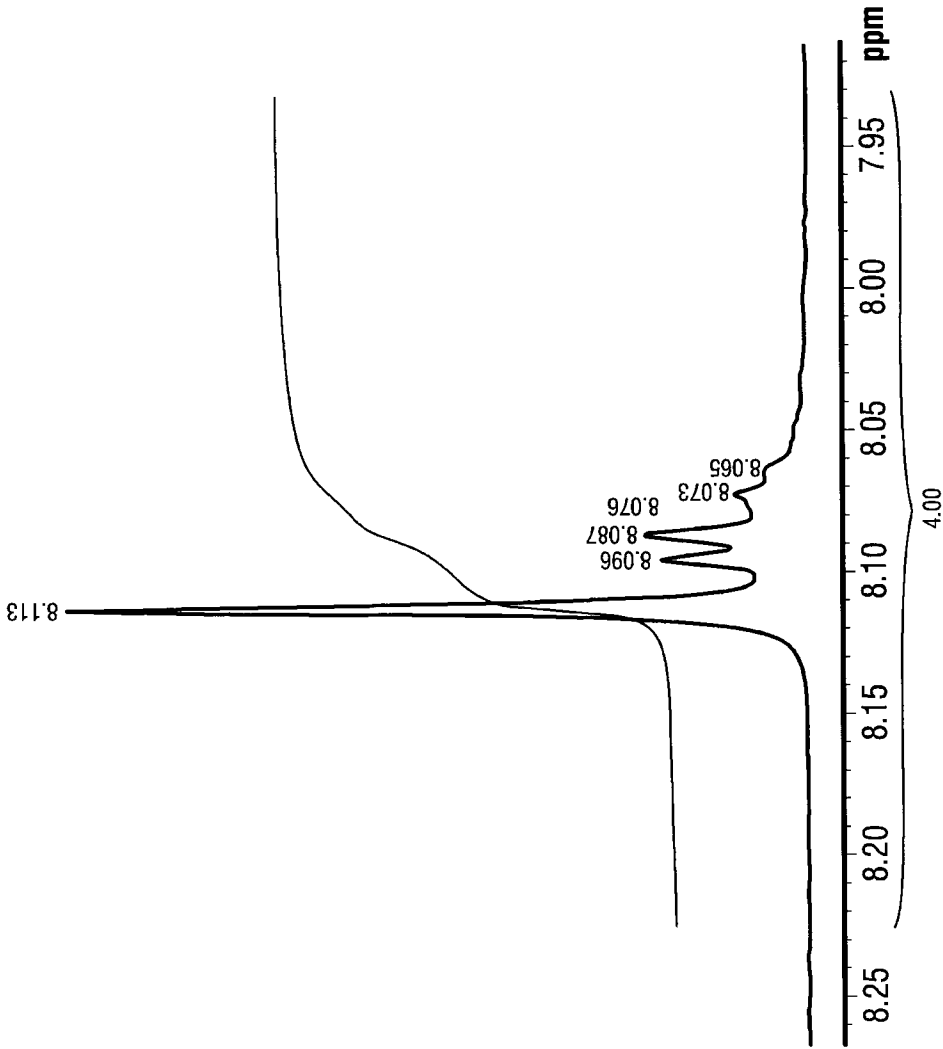


FIG. 18


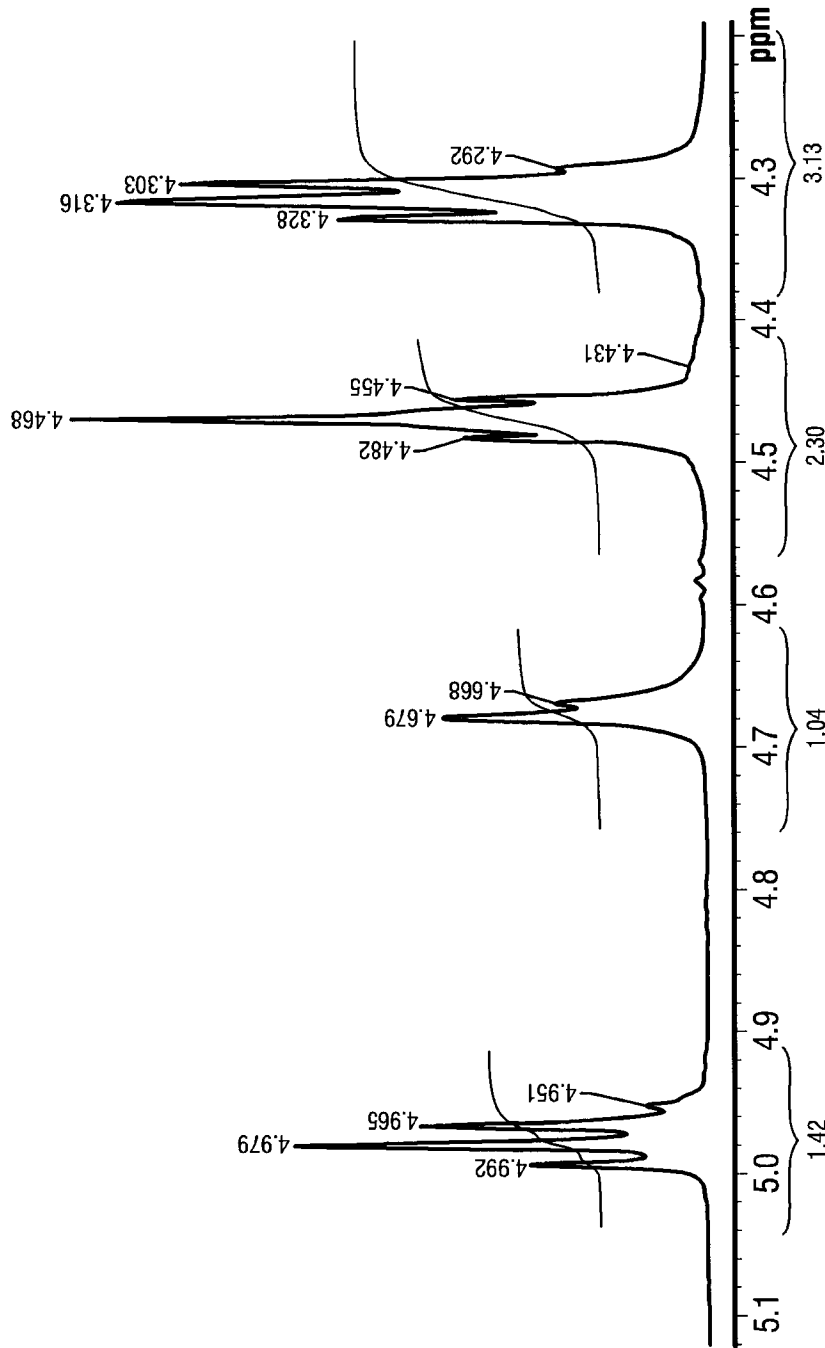


FIG. 19

FIG. 20

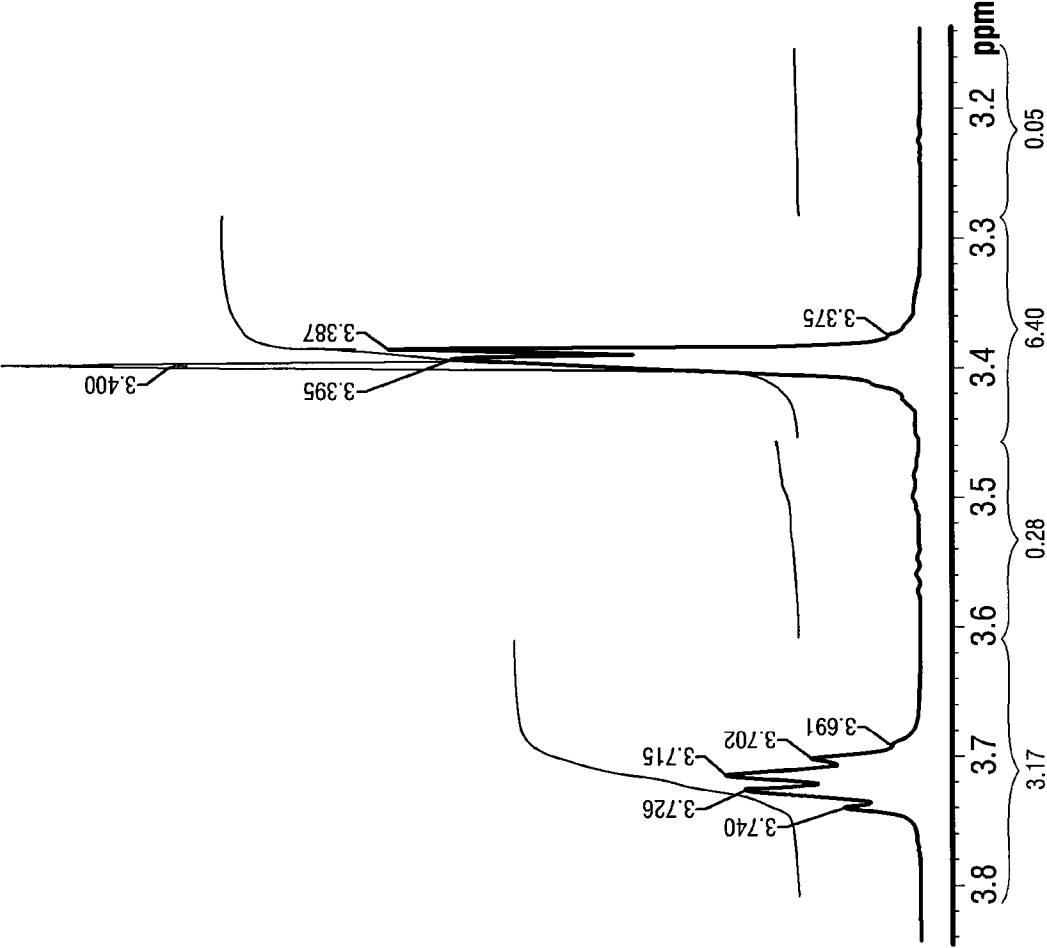

27/53


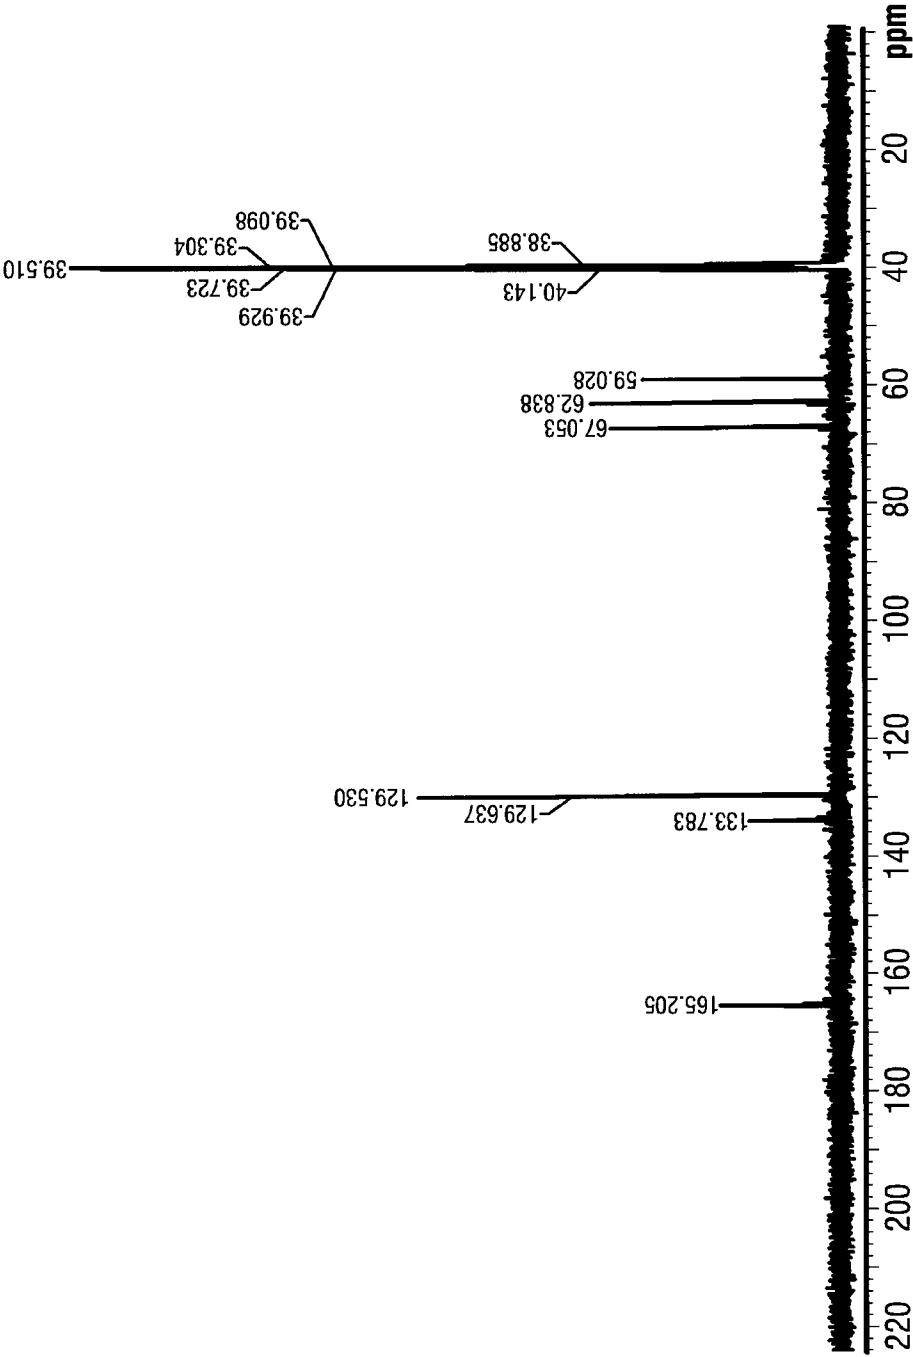


FIG. 21

28/53

FIG. 22

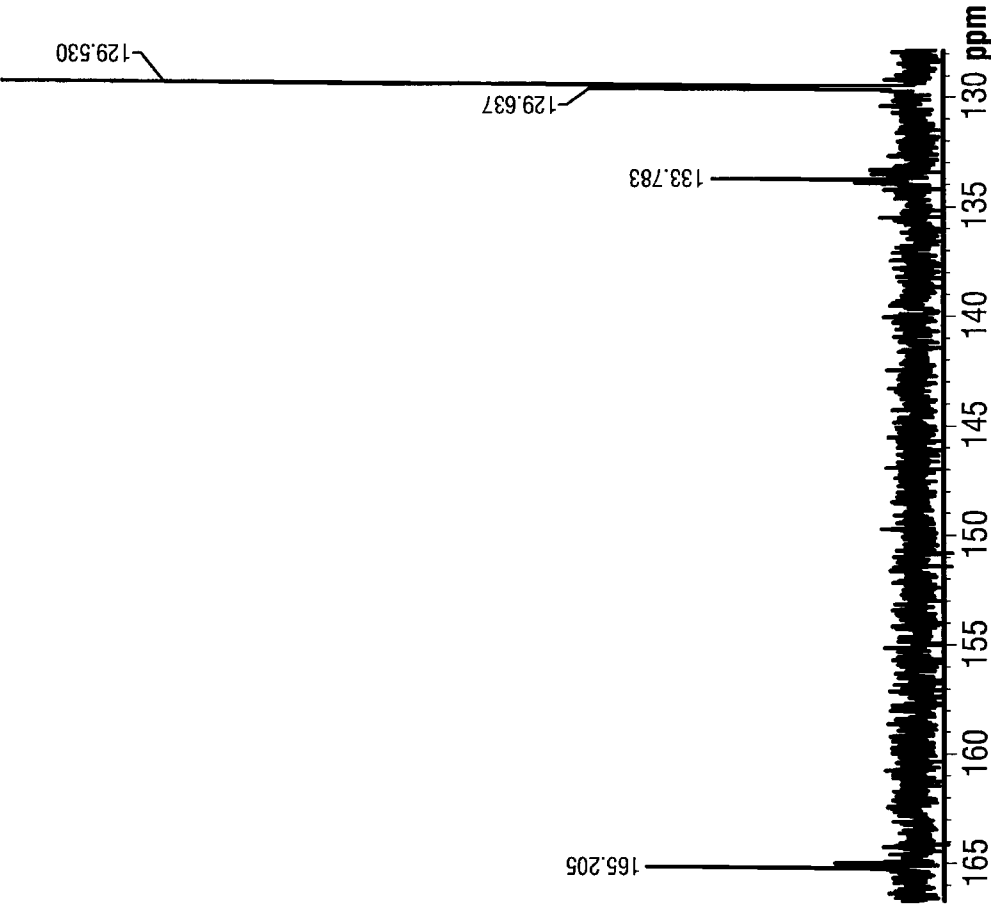

29/53

FIG. 23

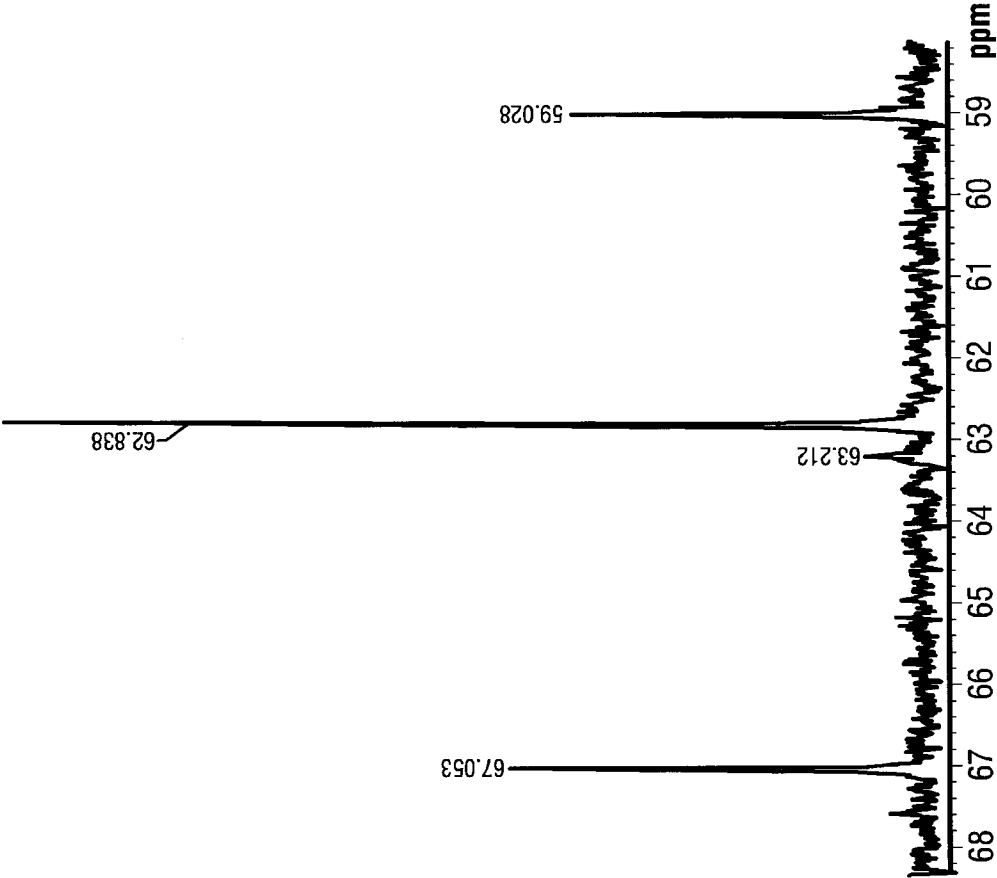
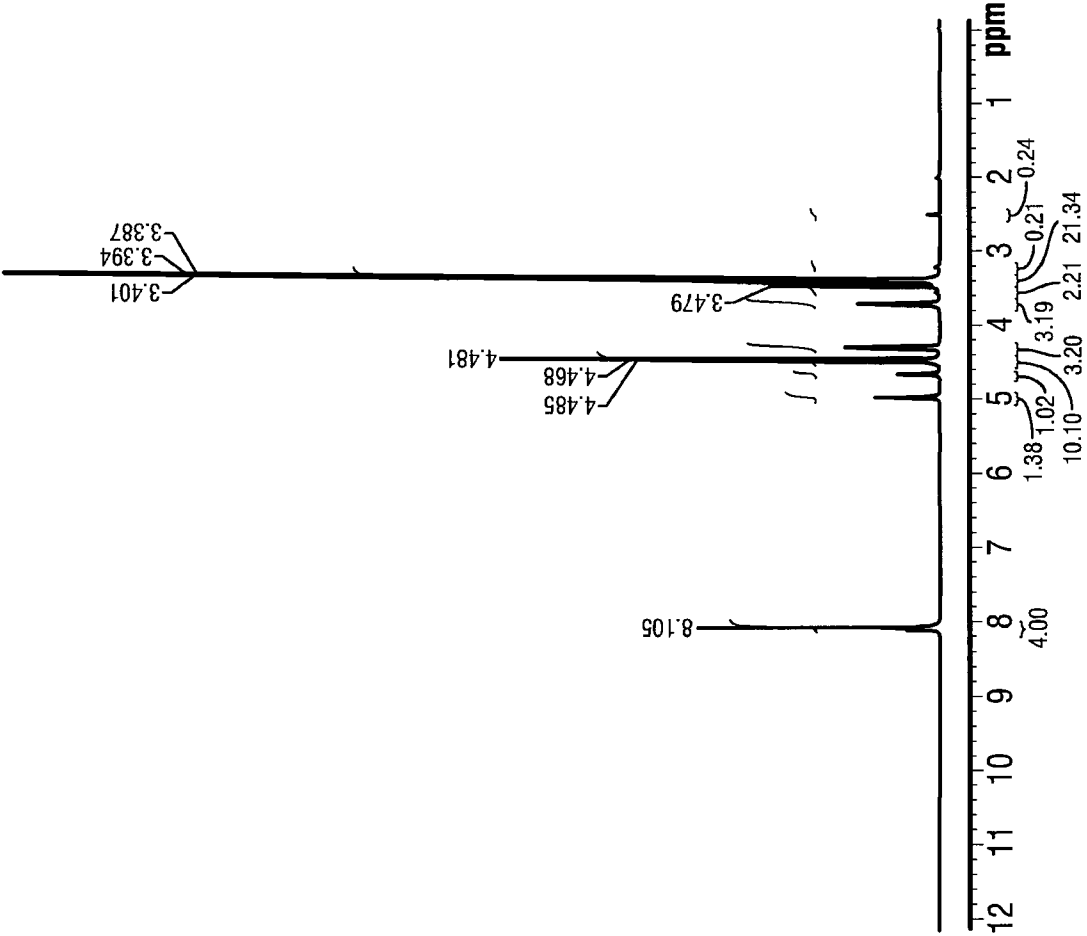


FIG. 24



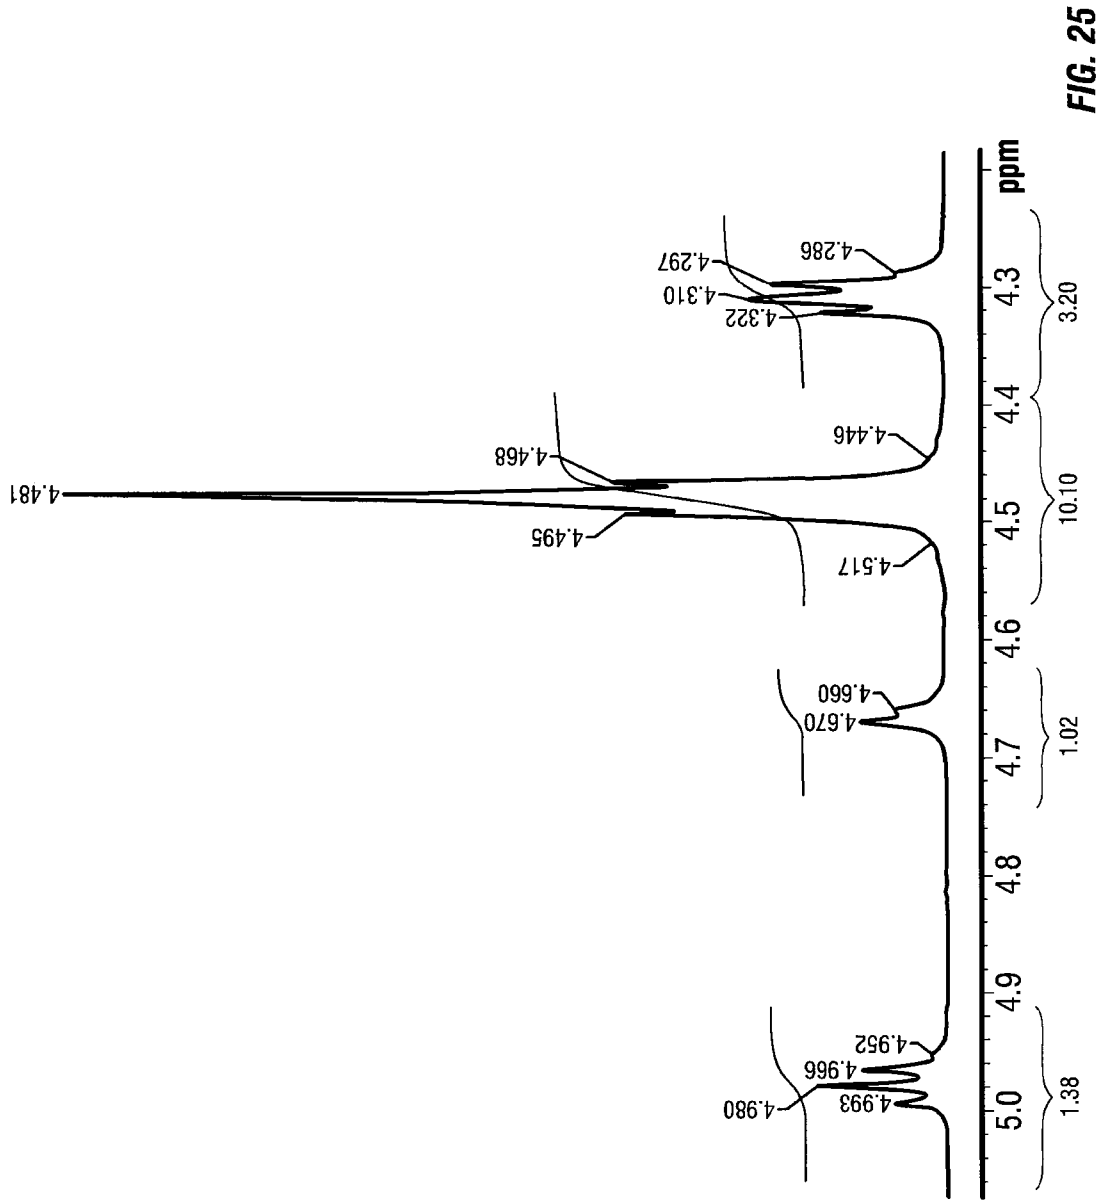


FIG. 26

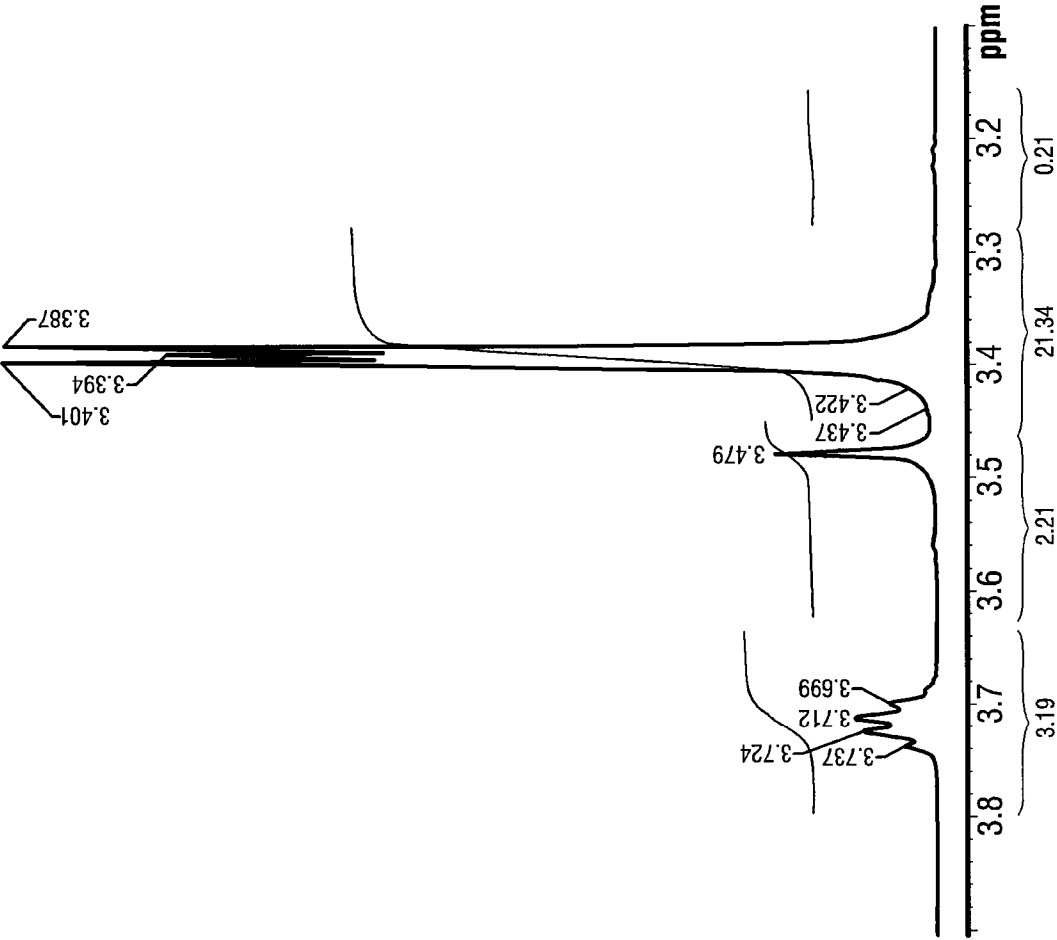
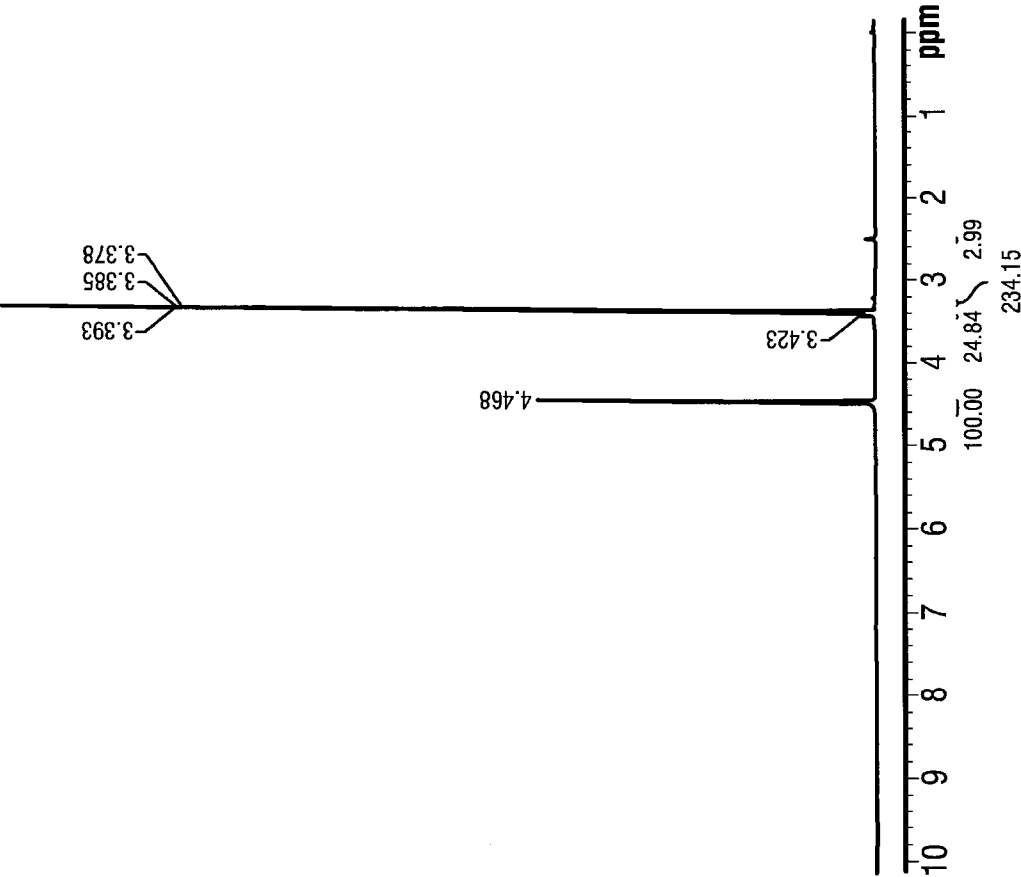


FIG. 27



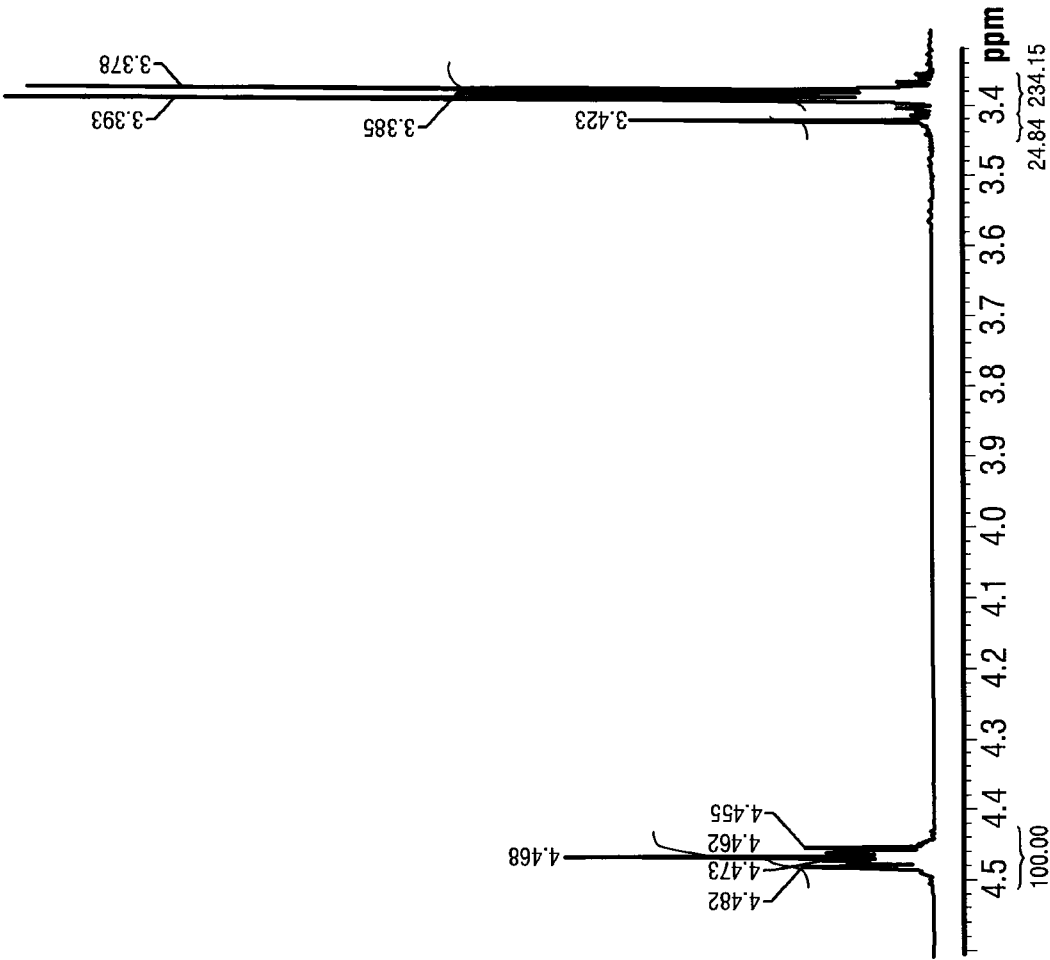


FIG. 28

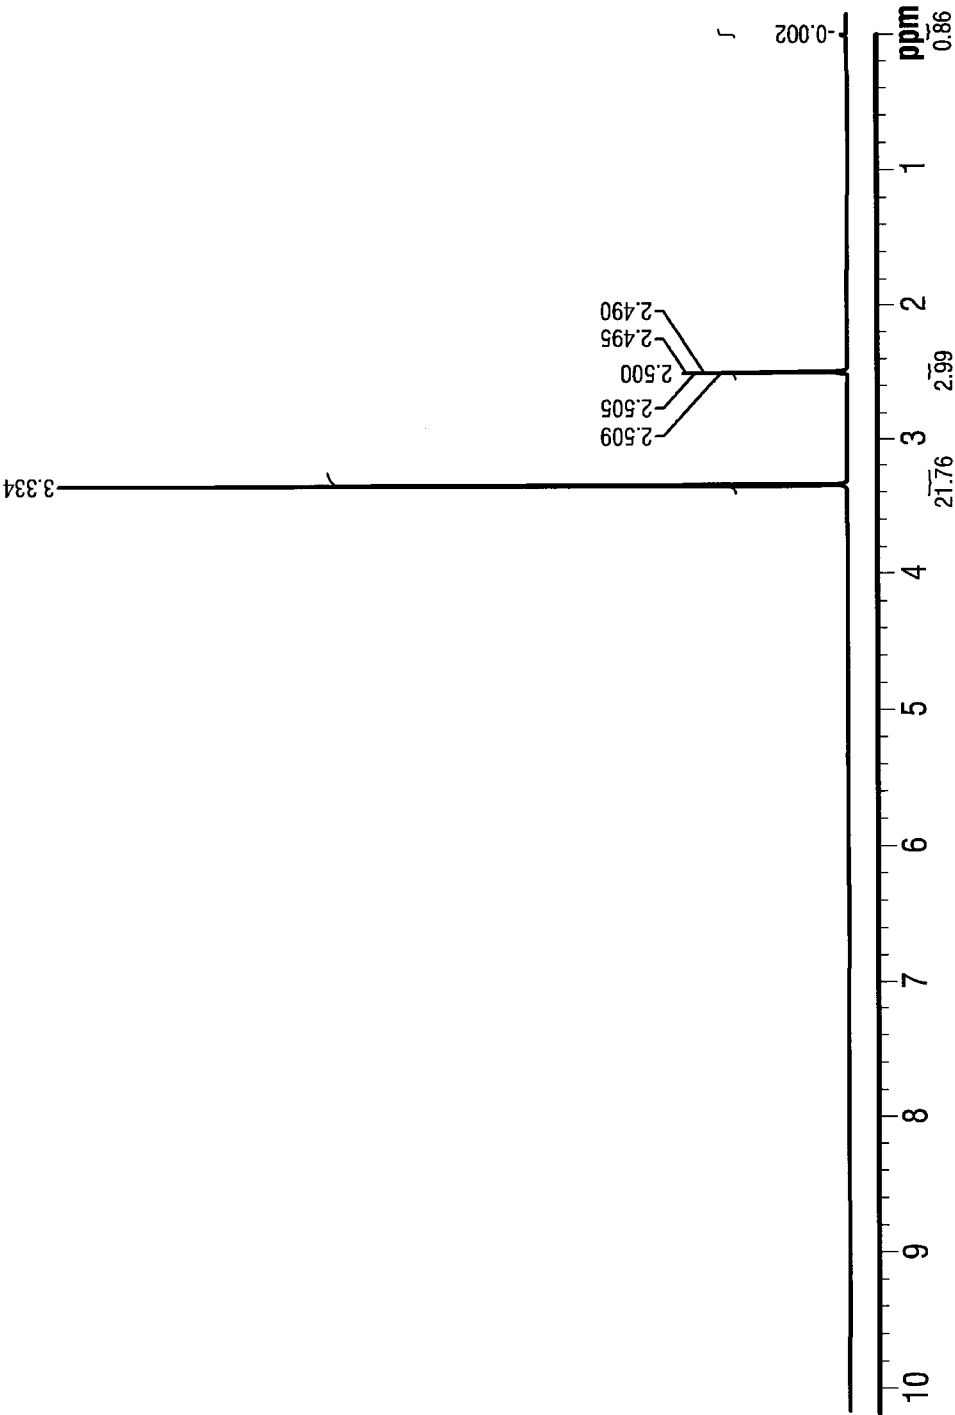


FIG. 29

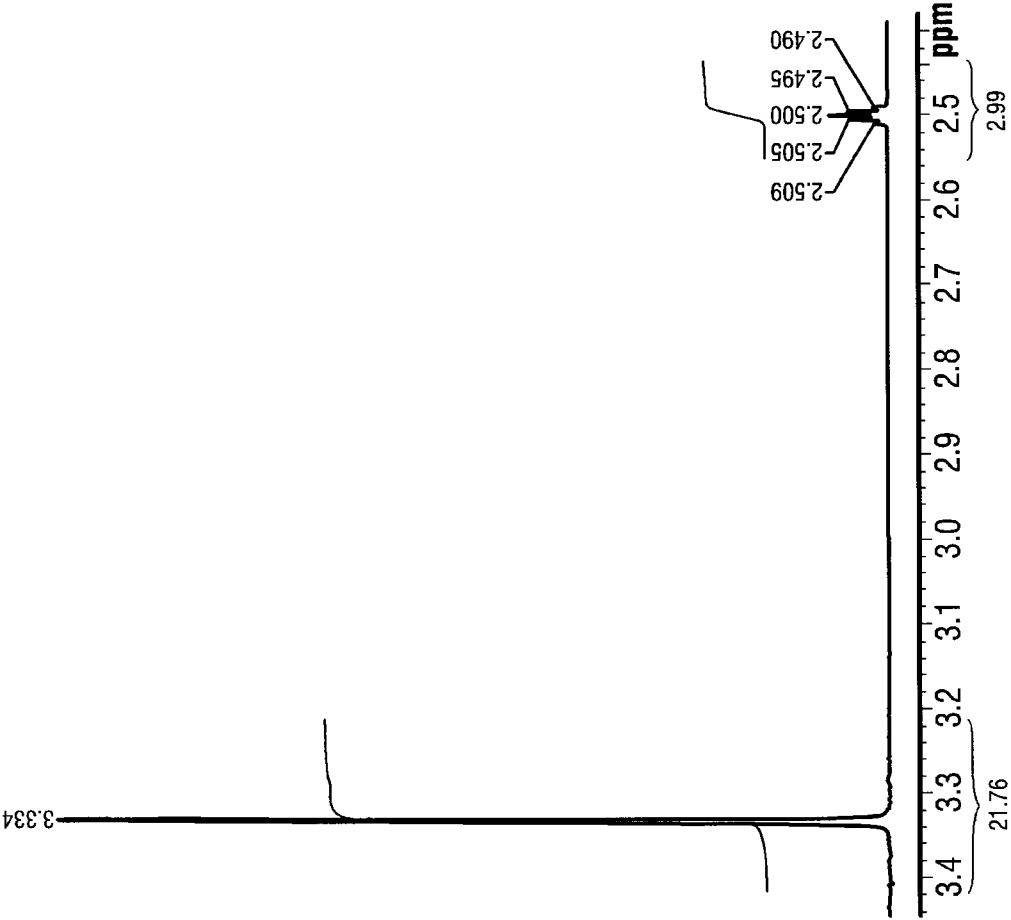


FIG. 30

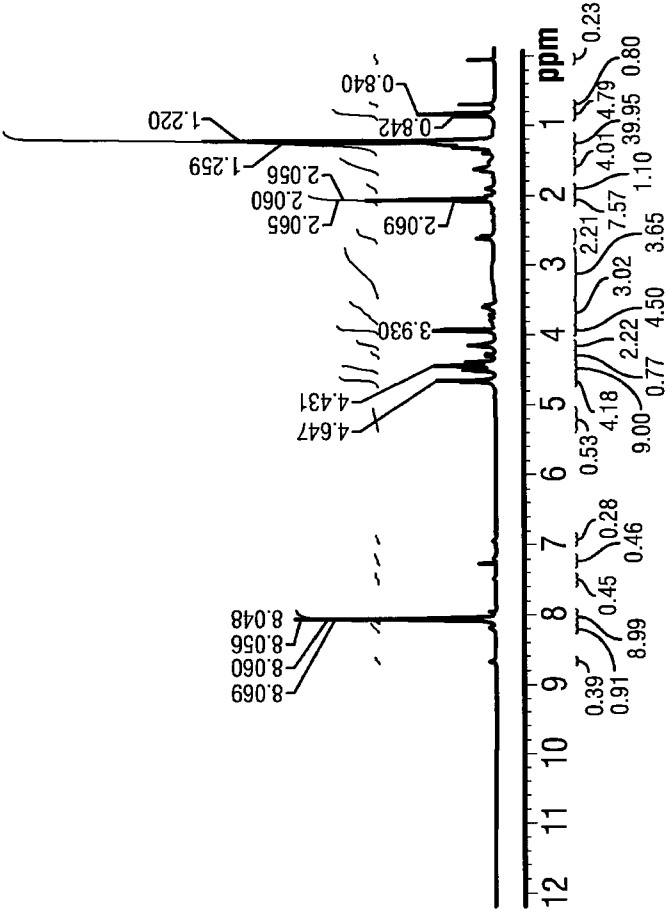


FIG. 31

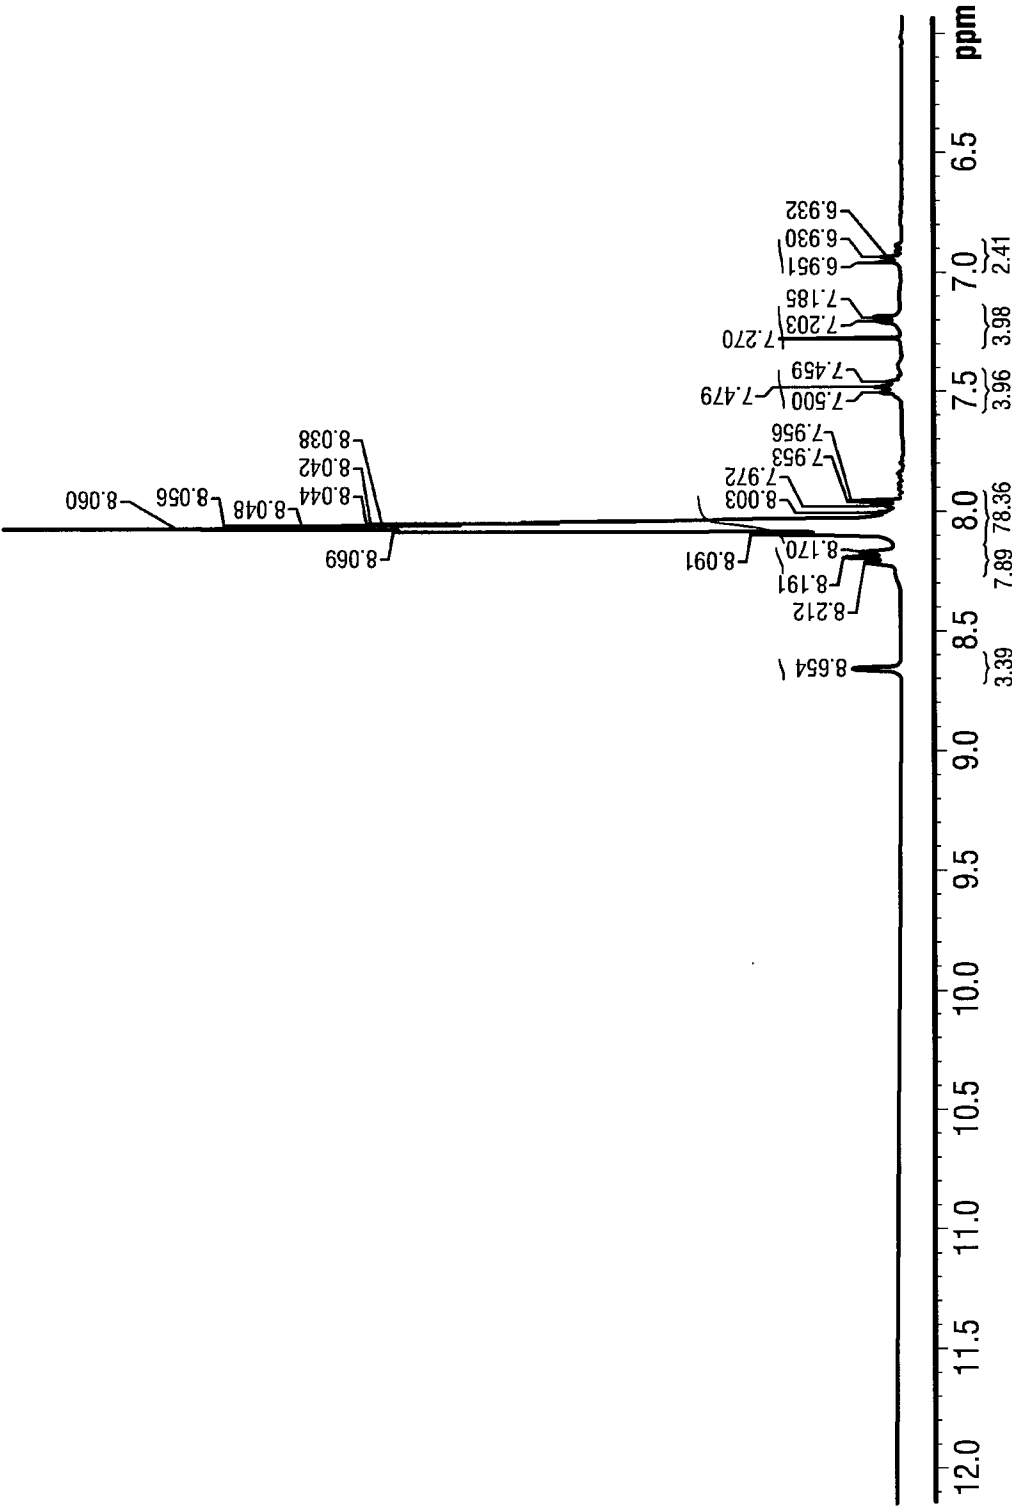


FIG. 32

39/53

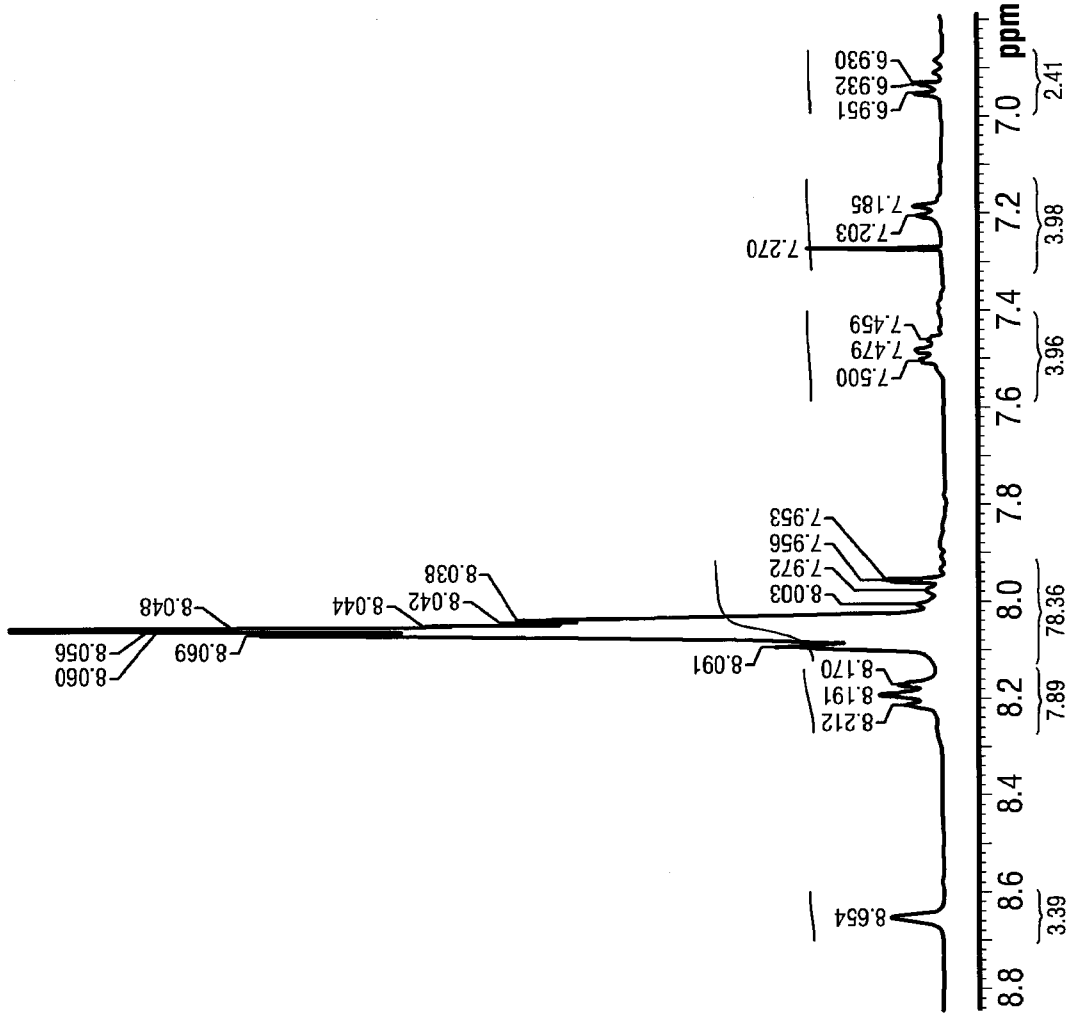


FIG. 33

40/53



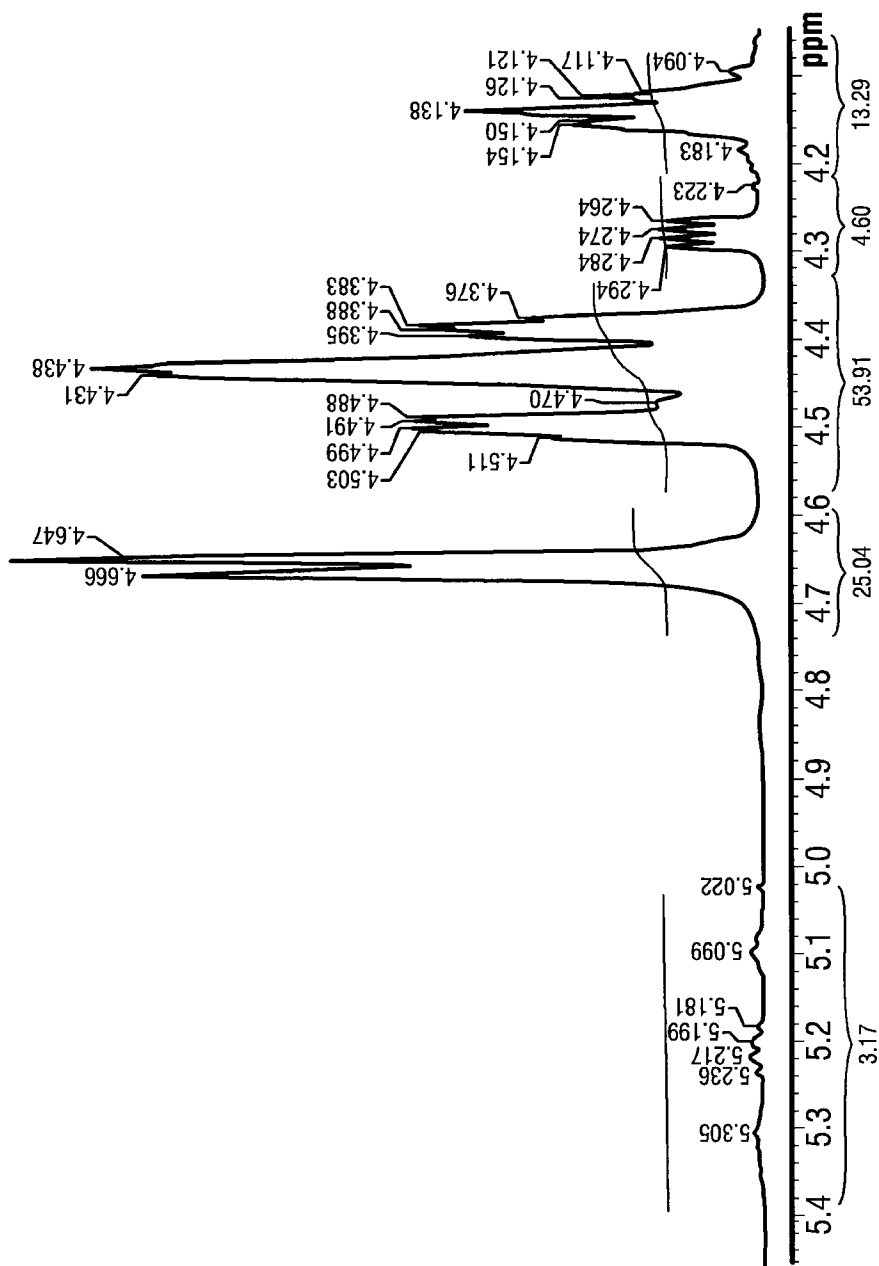



FIG. 35

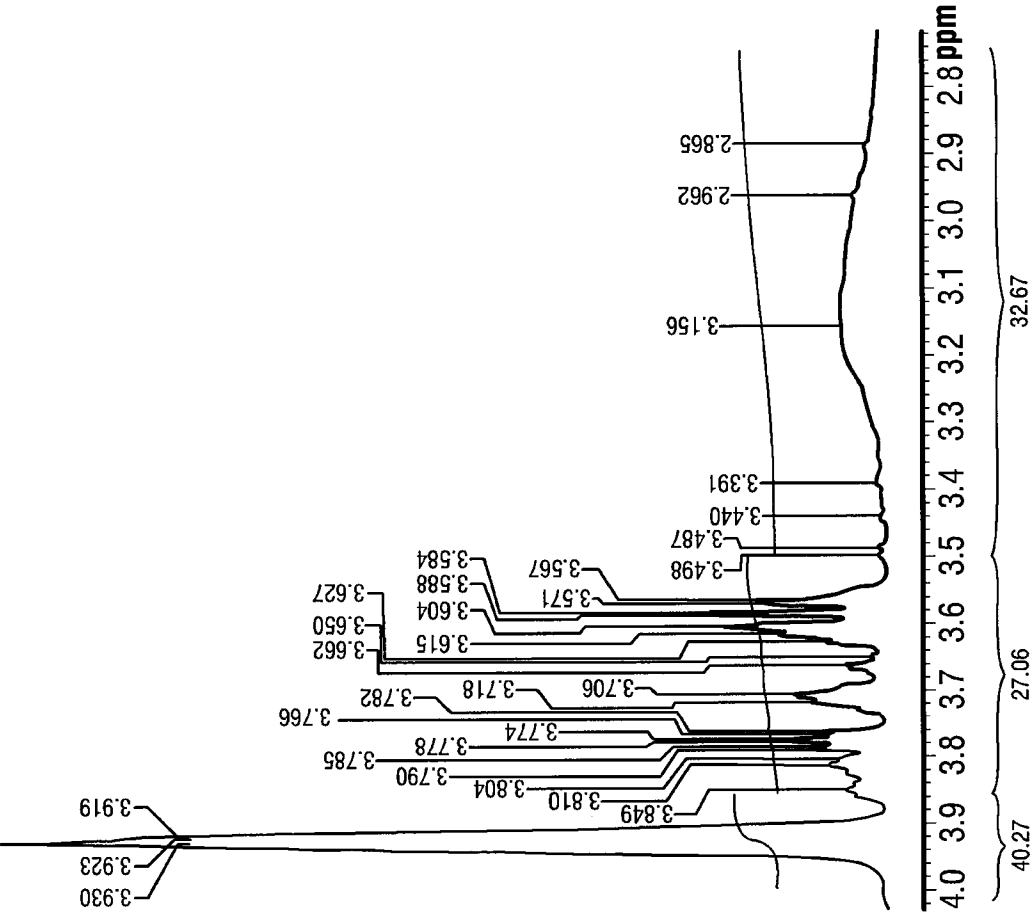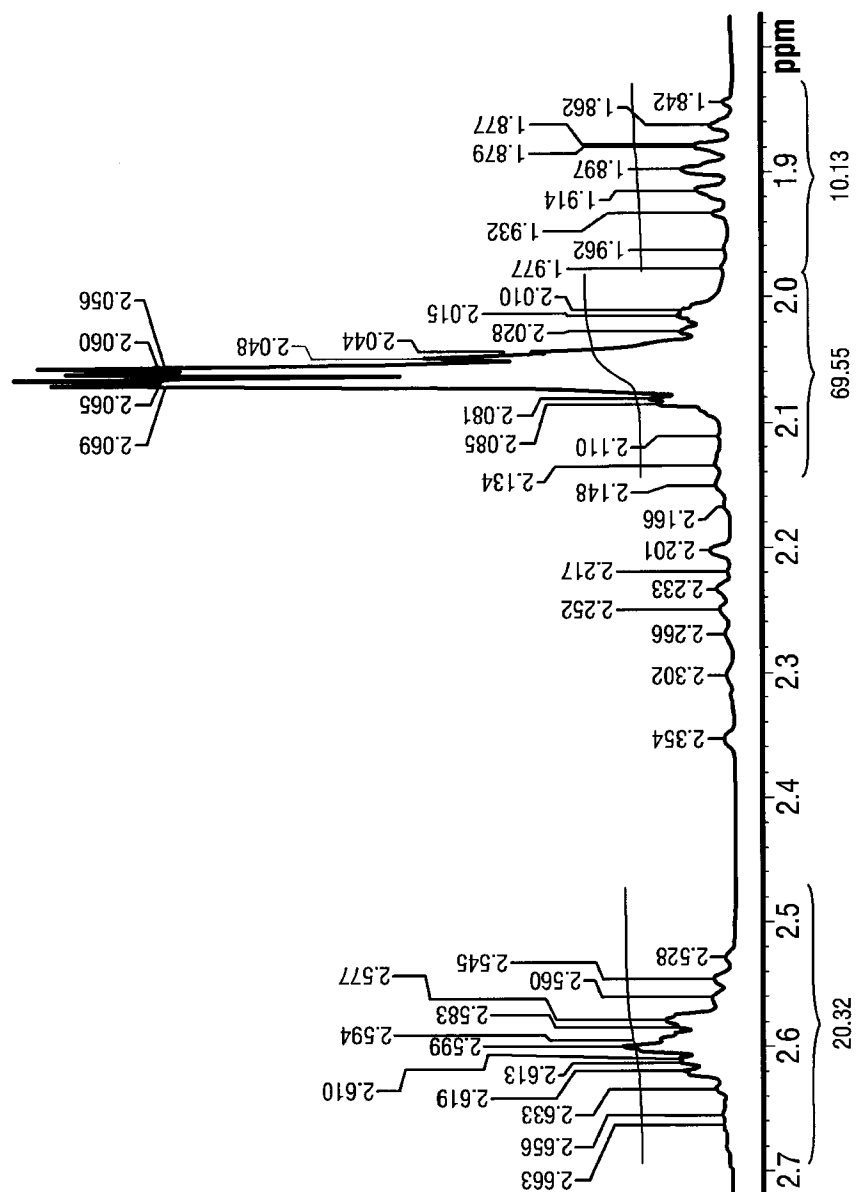

42/53

FIG. 36



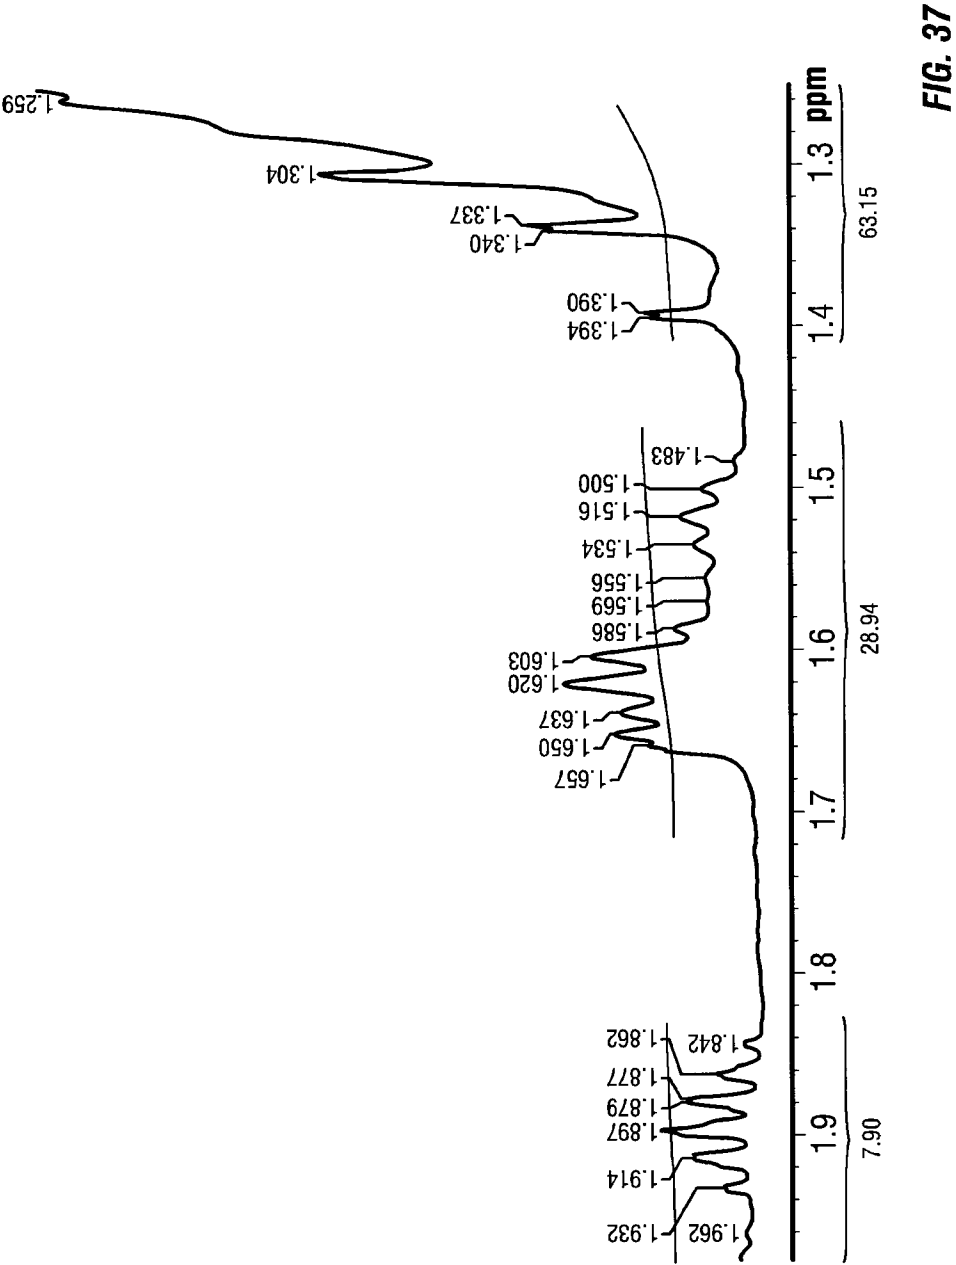



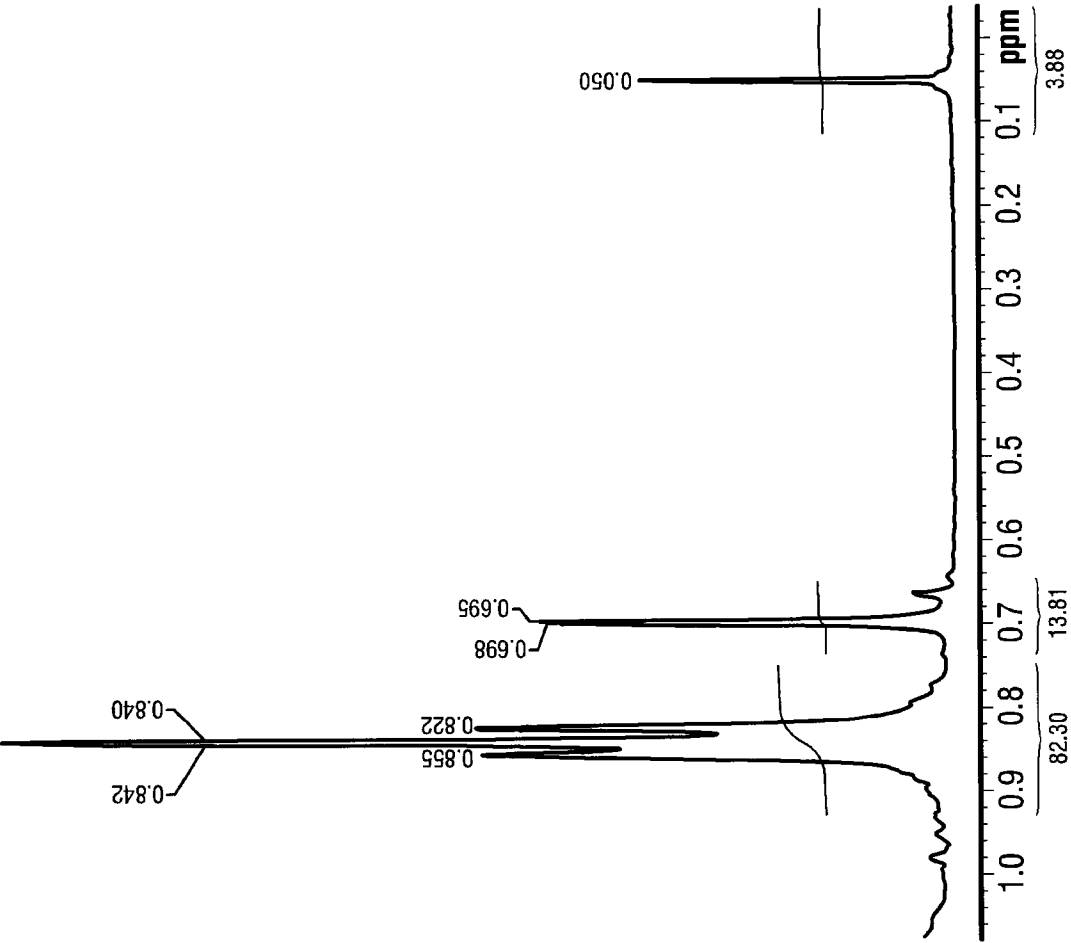


FIG. 39

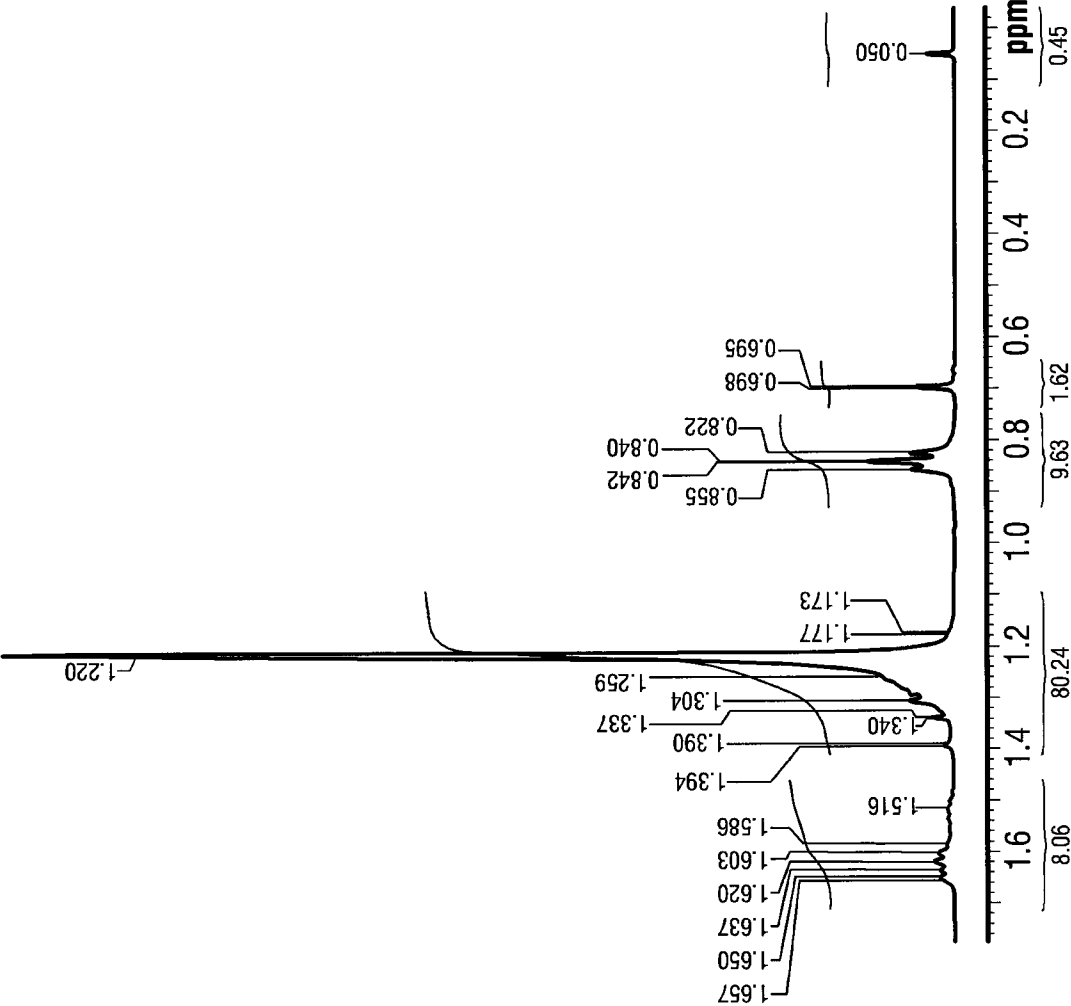


46/53

FIG. 40

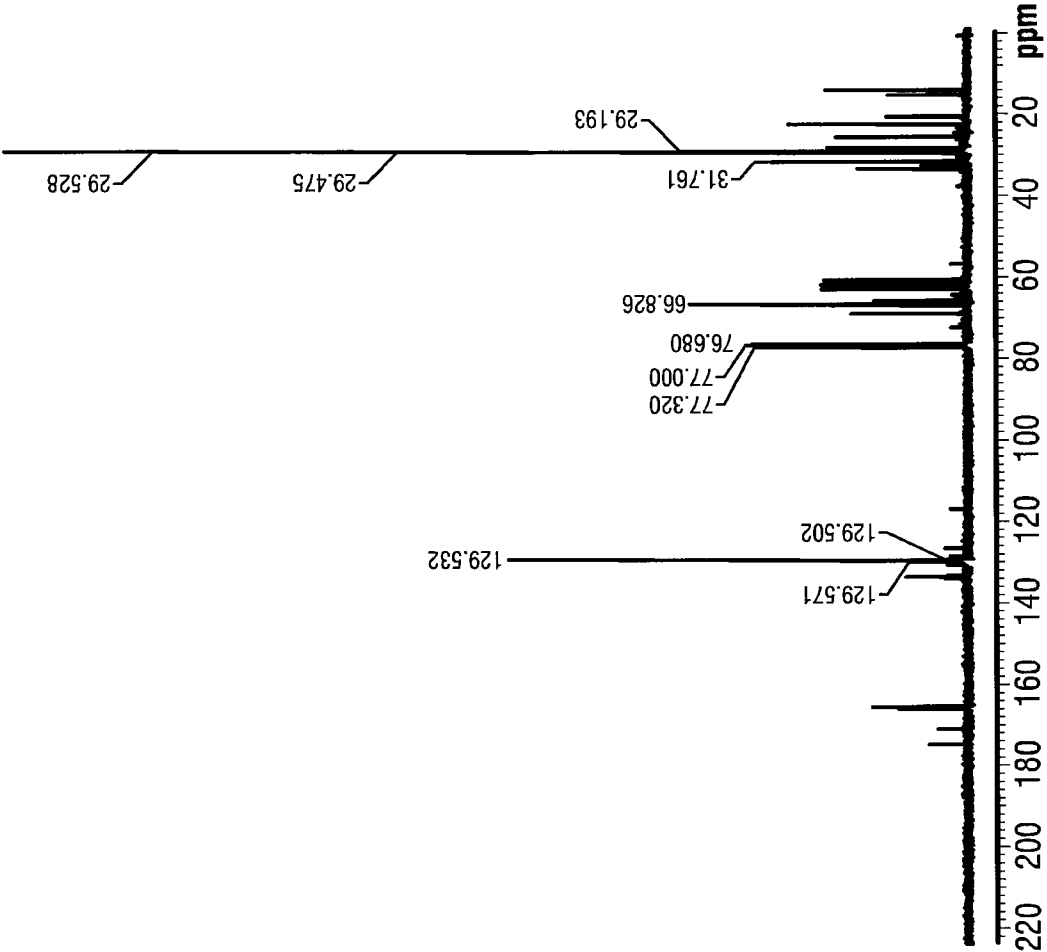

47/53

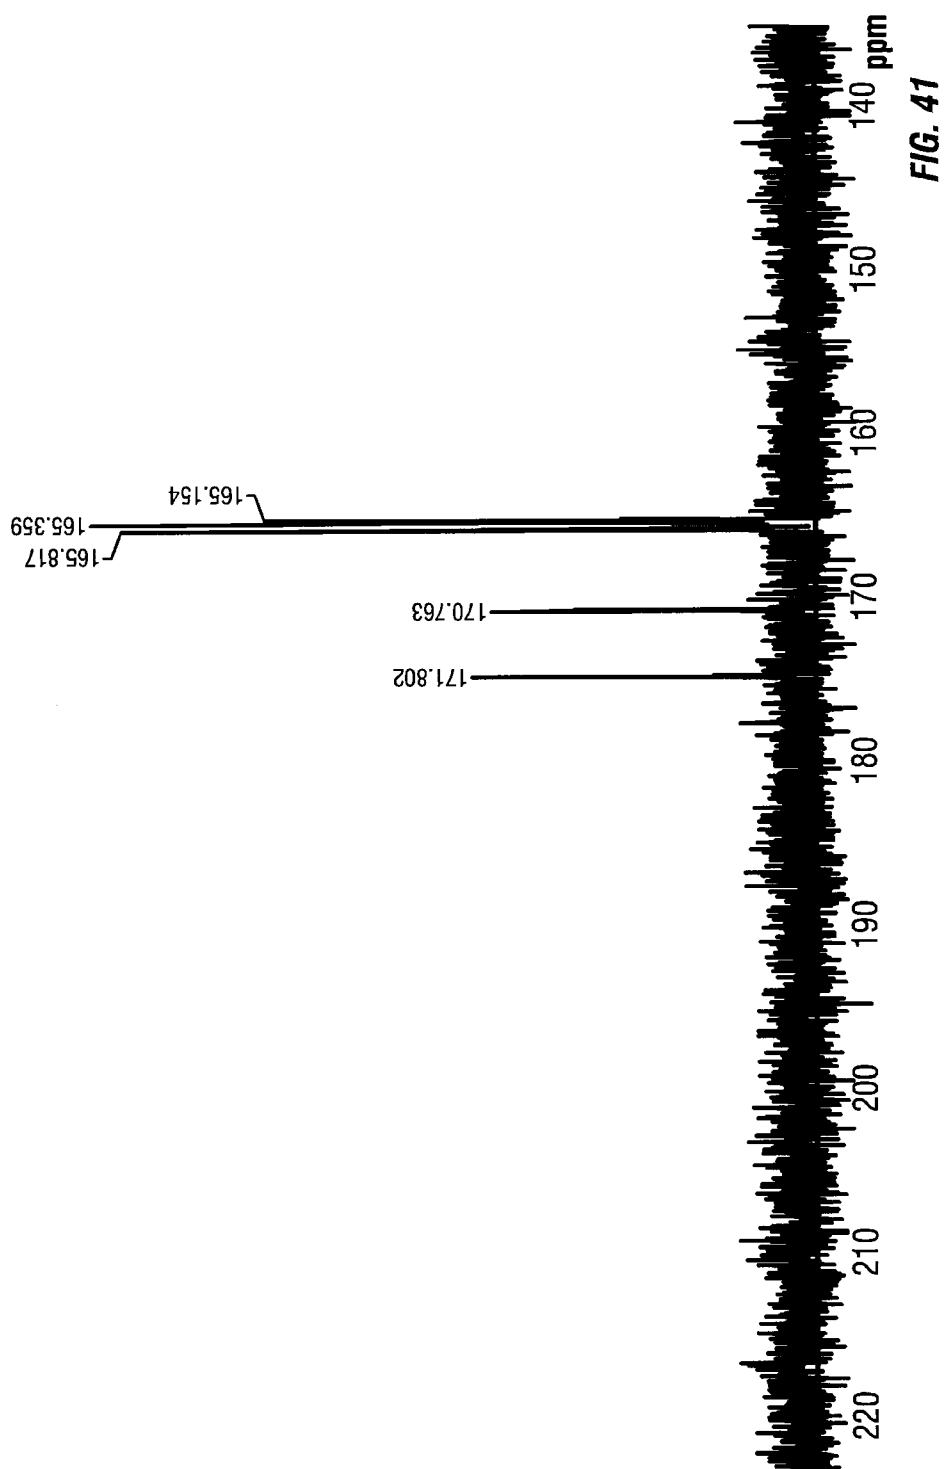

48/53


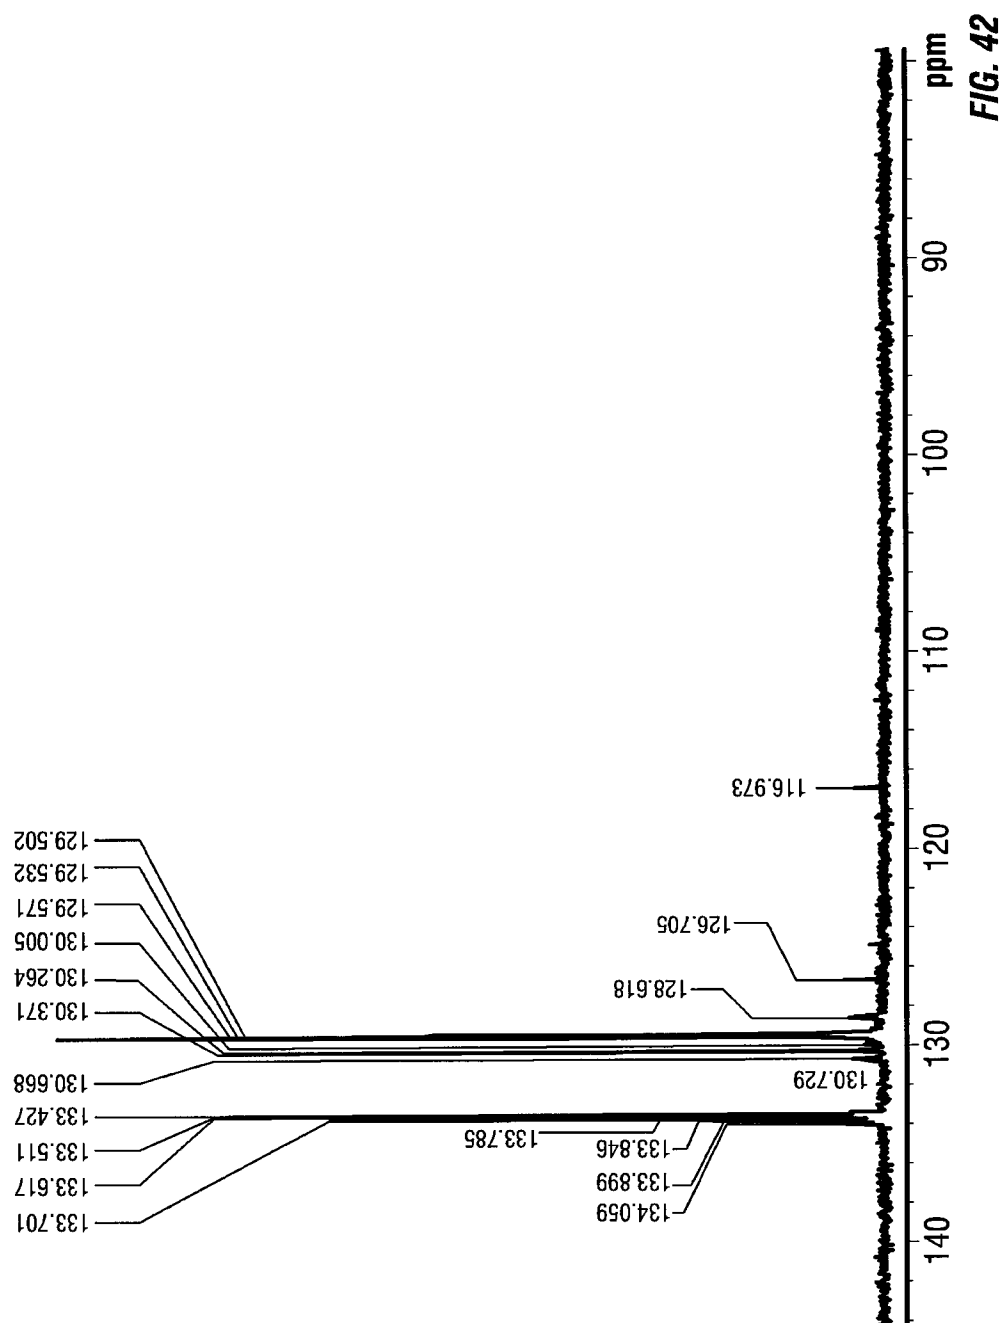


FIG. 43

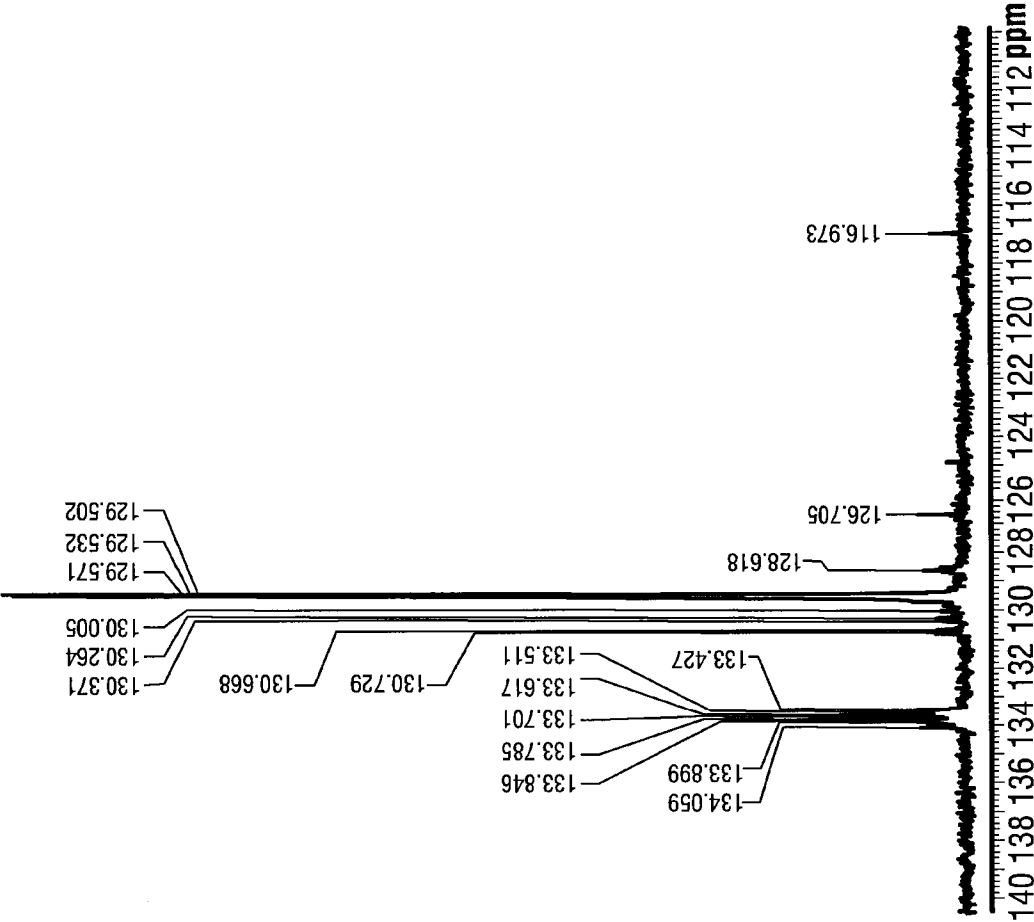

50/53


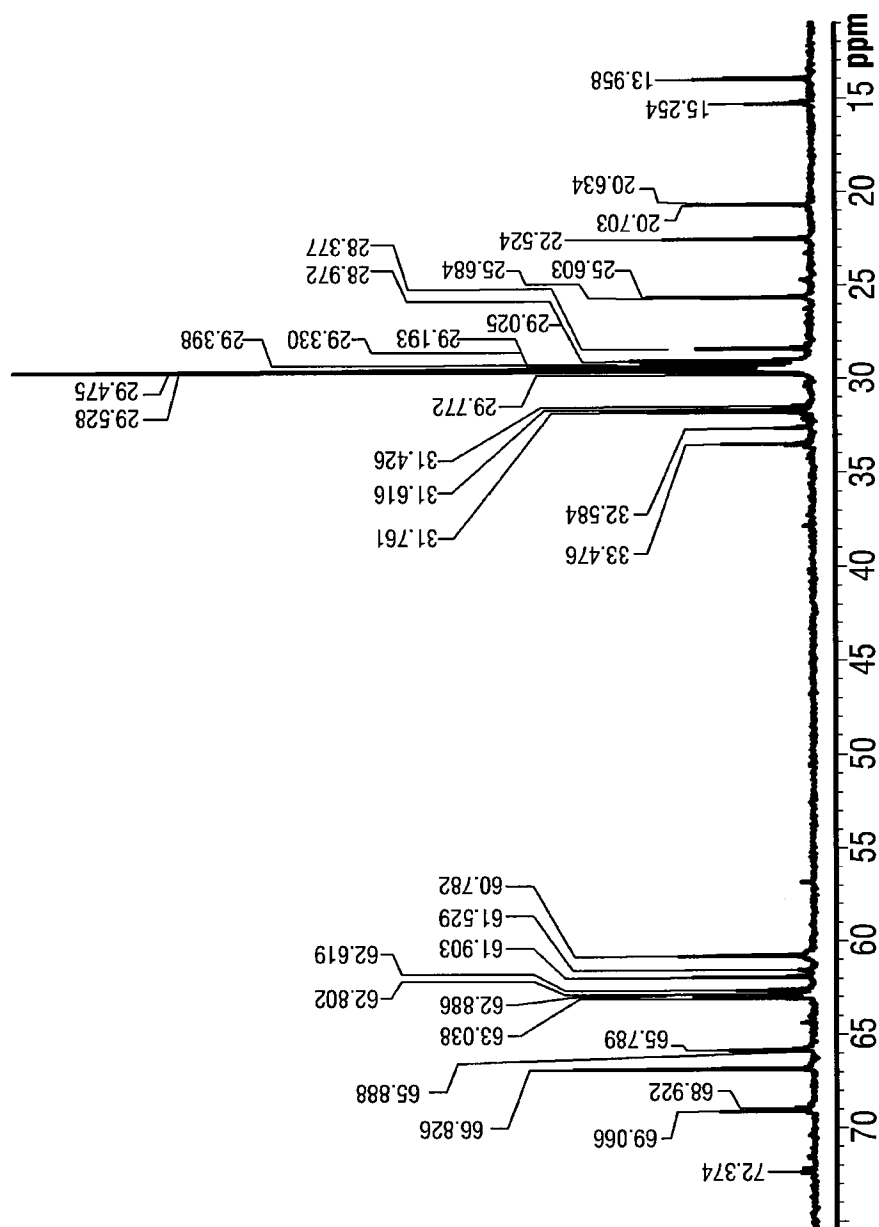


FIG. 44

51/53

FIG. 45

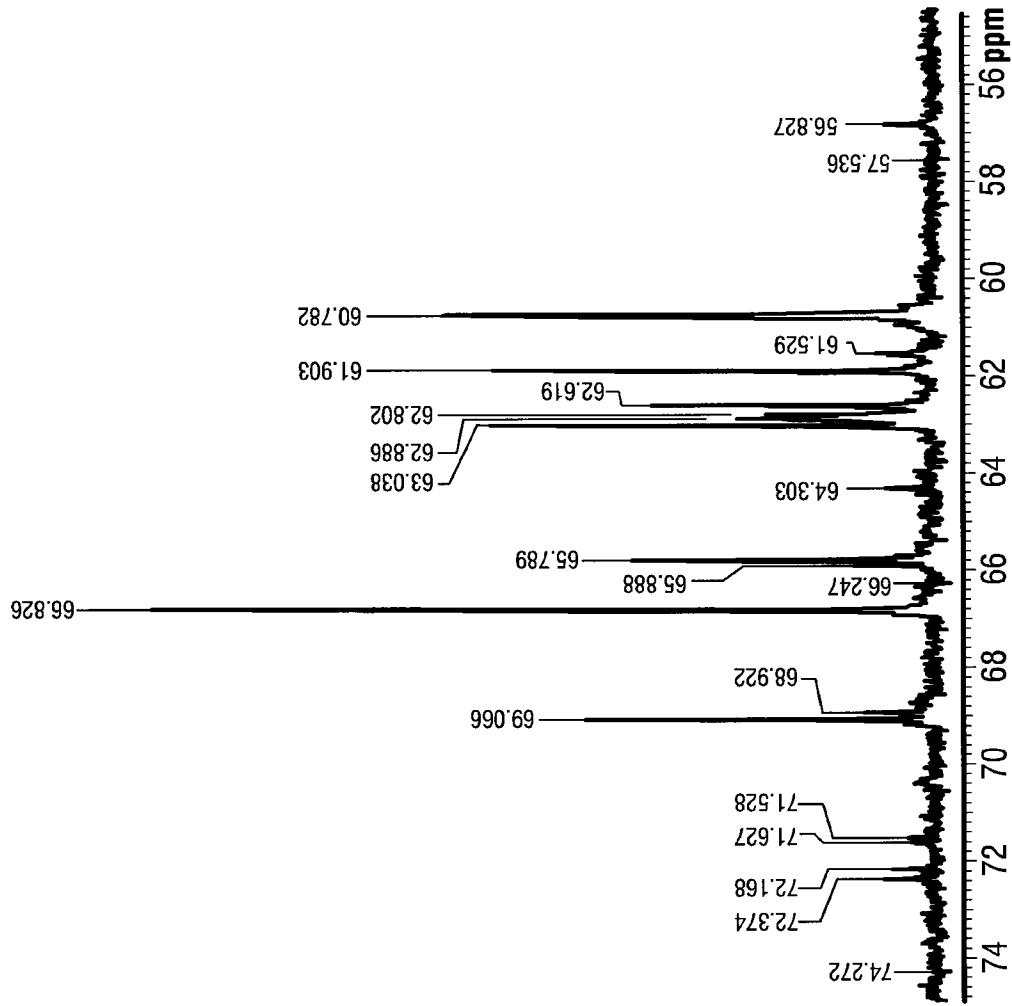

52/53

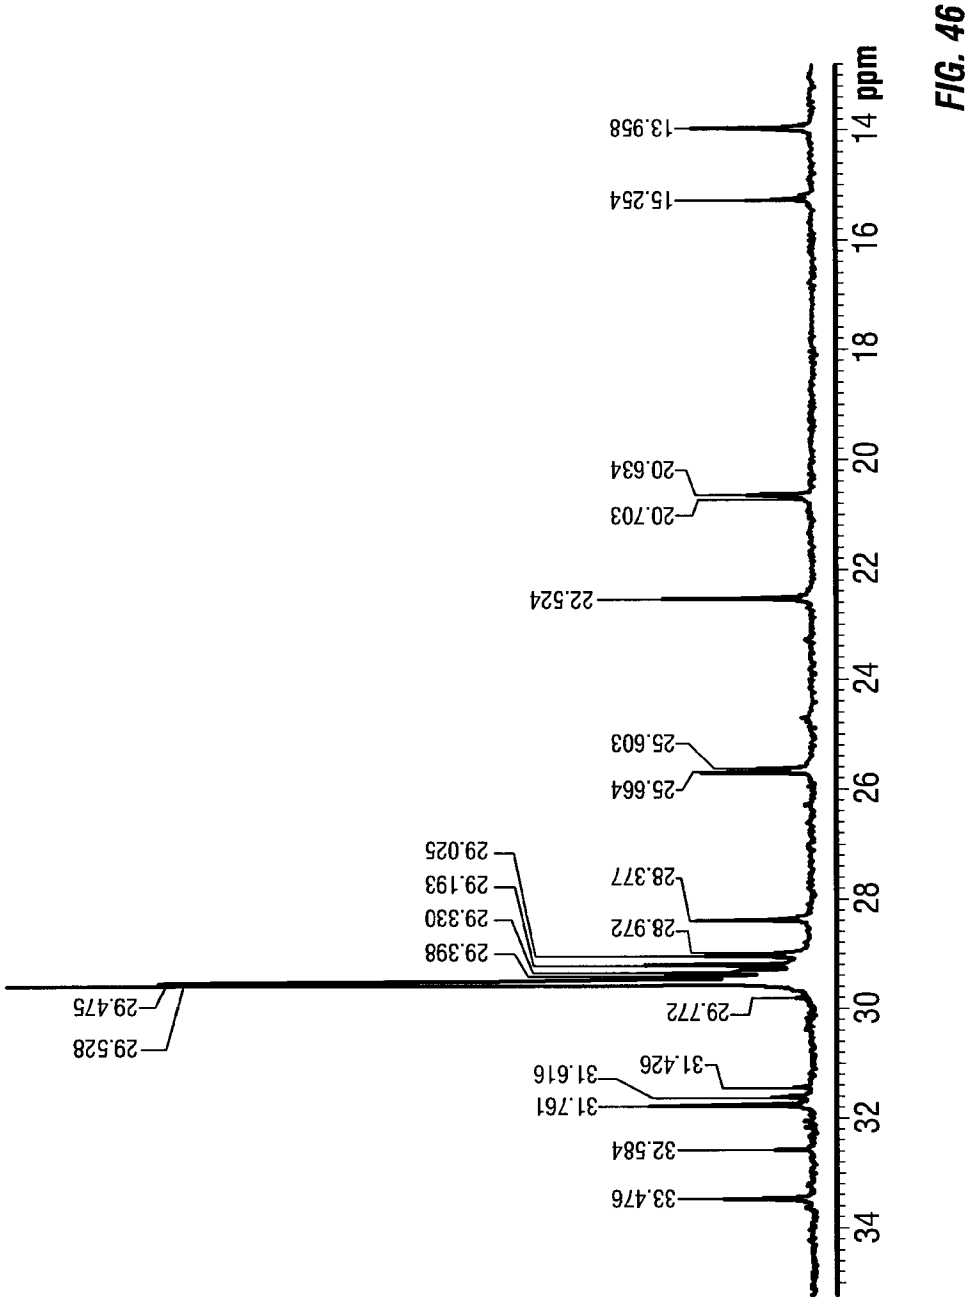


FIG. 47

