

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
14 February 2002 (14.02.2002)

PCT

(10) International Publication Number
WO 02/12592 A1

(51) International Patent Classification⁷: C23G 1/02, C22C 38/18, 38/22, 38/40

(21) International Application Number: PCT/US01/24367

(22) International Filing Date: 2 August 2001 (02.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
09/633,508 7 August 2000 (07.08.2000) US

(71) Applicant: ATI PROPERTIES, INC. [US/US]; Suite 425, 1025 West 190th Street, Gardena, CA 90248 (US).

(72) Inventors: GRUBB, John, F.; 3114 Wentworth Drive, Lower Burrell, PA 15068 (US). FRITZ, James, D.; 606 Bear Creek Road, Cabot, PA 16023 (US). POLINSKI, Ronald, E.; 3315 Shady Drive, Murrysville, PA 15668 (US).

(74) Agents: VICCARO, Patrick, J.; Allegheny Technology Incorporated, 1000 Six PPG Place, Pittsburgh, PA 15222 et al. (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: SURFACE TREATMENTS TO IMPROVE CORROSION RESISTANCE OF AUSTENITIC STAINLESS STEELS

Test Temperature = 32.2°C (90°F)			
Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0000	~0.001"	Attack under 9 of 40 plateaus
2	0.0001	~0.007"*	Attack under 11 of 40 plateaus
3	0.0000	Etch	Attack under 2 of 40 plateaus
4	0.0000	Etch	Attack under 2 of 40 plateaus
5	0.0000	--	No apparent attack
6	0.0000	--	No apparent attack
7	0.0000	~0.004"**	Attack under 4 of 40 plateaus
8	0.0000	Lt Etch	Etch under 1 of 40 plateaus
9	0.0000	~0.003"**	Attack under 11 of 40 plateaus
10	0.0000	~0.007"**	Attack under 3 of 40 plateaus
11	0.0000	--	No apparent attack
12	0.0000	--	No apparent attack
13	0.0000	Etch	Etch under 1 of 40 plateaus
14	0.0000	~0.001"	Attack under 8 of 40 plateaus
15	0.0000	Etch	Etch under 1 of 40 plateaus
16	0.0000	~0.001"	Attack under 4 of 40 plateaus
17	0.0000	--	No apparent attack
18	0.0000	Etch	Etch under 3 of 40 plateaus

* Designates a failure

(57) Abstract: A method of enhancing the corrosion resistance of an austenitic steel includes removing material from at least a portion of a surface of the steel such that corrosion initiation sites are eliminated or are reduced in number relative to the number resulting from processing in a conventional manner. Material may be removed from the portion by any suitable method, including, for example, grit blasting, grinding and/or acid pickling under conditions more aggressive than those used in conventional processing of the same steel.

WO 02/12592 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TITLE

5

Surface Treatments To Improve Corrosion
Resistance of Austenitic Stainless Steels

INVENTORS

John F. Grubb, a United States citizen, residing at 3114
10 Wentworth Drive, Lower Burrell, Pennsylvania 15068; James D. Fritz, a
United States citizen, residing at 606 Bear Creek Road, Cabot, Pennsylvania,
16023; and Ronald E. Polinski, a United States citizen, residing at 3315
Shady Drive, Murrysville, Pennsylvania, 15668.

15 CROSS-REFERENCE TO RELATED APPLICATIONS

Not Applicable.

STATEMENT REGARDING FEDERALLY SPONSORED
RESEARCH OR DEVELOPMENT

20 Not Applicable.

BACKGROUND OF THE INVENTION

Field of the Invention

25 The present invention relates to a method of treating austenitic
stainless steels and articles fabricated from such steels. The present
invention more particularly relates to a method of treating at least a portion of
a surface of austenitic stainless steels and articles fabricated from such steels

a surface of austenitic stainless steels and articles fabricated from such steels to enhance their corrosion resistance. The present invention also is directed to austenitic stainless steels and articles fabricated from such steels that are produced using the method of the invention. The invention finds application 5 in, for example, the production of corrosion resistant strip, bars, sheets, castings, plates, tubings, and other articles from austenitic stainless steels.

Description of the Invention Background

The need for metals with high corrosion resistance has been 10 addressed by the development of steels of various compositions. Articles fabricated from steels that are resistant to chloride pitting and crevice corrosion are especially important for service environments such as seawater and certain chemical processing industries. Cr-Mo stainless steels including approximately 6% molybdenum by weight, commonly referred to as 15 superaustenitic alloys, were developed for use in these and other aggressive environments.

Generally, the corrosion resistance of stainless steels is controlled by the chemical composition of the surface presented to the environment. Open-air annealing, a heat-treating operation commonly used 20 in the production of stainless steels, is known to produce a chromium-depleted layer near the metal surface, under a chromium-rich oxide scale. Failure to remove both of these surfaces is known to impair the corrosion performance of stainless steels. Mechanical processes, such as grit blasting or grinding, have been employed to remove the chromium-rich scale.

The chromium-depleted layer is generally removed by chemical means, namely, by acid pickling. Generally, pickling involves immersing the steel in an acidic solution, commonly an aqueous solution of nitric acid (HNO_3) and hydrofluoric acid (HF), for a period of time, preferably much less than 60 minutes. To speed the pickling process the acidic solution may be at an elevated temperature, preferably a temperature at which the acidic solution is not highly volatile. It is generally known that pickling of highly corrosion-resistant stainless steels requires particular care and attention because these materials are known to pickle slowly, thereby making removal of the chromium-depleted layer difficult.

Heretofore, it has been thought desirable to pickle stainless steels using relatively dilute acid solutions. That has been the case because steel production facilities typically produce a variety of alloys, and many stainless alloys cannot withstand pickling with more aggressive pickling solutions or do not require more aggressive pickling solutions to remove the chromium depleted layer. Moreover, handling and disposing of stronger acidic solutions would require more strenuous industrial safety and environmental controls. Thus, pickling using a relatively dilute, non-aggressive, pickling solution has been used to enhance corrosion resistance of stainless steels. It has been thought that providing a stainless steel with corrosion properties that are further enhanced relative to a particular pickled stainless steel requires modifying the alloy composition. Thus, for example, increasing chromium and/or molybdenum content of a particular stainless steel has been used to improve the steel's corrosion resistance. However,

increasing the content of chromium, molybdenum, and other corrosion-enhancing alloying additions in a stainless steel increases alloying costs and may require changes to the manufacturing process. Thus, it would be desirable to provide a method of enhancing the corrosion resistance of

5 stainless steels without modifying the chemical composition of the steels.

SUMMARY OF THE INVENTION

The present invention provides a method of enhancing the corrosion resistance of austenitic stainless steels and articles produced from

10 the steels. The method includes removing sufficient material from at least a portion of a surface of the steel such that corrosion initiation sites present on the surface are eliminated or are reduced in number to an extent greater than has heretofore been achieved in conventional austenitic stainless steel processing. Removal of material from the steel surface may be accomplished

15 by any known method suitable for removing material from a surface of a steel. Such methods include, for example, grit blasting, grinding, and/or acid pickling. Acid pickling, for example, occurs under conditions that are aggressive (stronger pickling solution and/or longer pickling time, for example) relative to conventional pickling conditions for the same steel. Applying the

20 method of the invention in the production of a particular austenitic stainless steel provides corrosion resistance superior to that of a steel of the same chemical composition that has been processed in a conventional manner.

The method of the invention may provide austenitic stainless steels having a critical crevice corrosion temperature ("CCCT"), as defined

herein, of at least around 13.5°C greater than steels of the same composition that have been pickled and otherwise processed in a conventional manner. For a 6% molybdenum austenitic stainless steel such as UNS N08367 (commercially available as AL-6XN® and AL-6XN PLUS™ from Allegheny 5 Ludlum Corporation, Pittsburgh, Pennsylvania), a 13.5°C increase in CCCT is equivalent to at least about a 4 weight percent increase in chromium content or a 1.2 weight percent increase in molybdenum content. The method of the present invention obviates the significant increase in cost, and also the concerns over phase stability, that would be associated with such increases in 10 alloying additive content.

The present invention, therefore, provides an economical way of significantly improving the corrosion resistance properties of austenitic stainless steels, without changing the chemical composition of the steels.

15 BRIEF DESCRIPTION OF THE FIGURES

The advantages of the present invention can be better understood by reference to the accompanying Figures in which:

FIGURES 1(a) – (d) illustrate the results of a bolted multiple crevice test, the TC Cor 2 crevice test defined herein, performed at various 20 temperatures on a UNS N08367 alloy manufactured and acid cleaned in a conventional manner;

FIGURE 2 is a scanning electron micrograph of a surface of a UNS N08367 alloy manufactured and acid cleaned in a conventional manner;

FIGURES 3(a) through 3(d) illustrate the results of a bolted multiple crevice test, the TC Cor 2 crevice test defined herein, performed at various temperatures on a UNS N08367 alloy after undergoing a treatment that enhances corrosion resistance and which is an embodiment of the 5 method of the present invention;

FIGURE 4 is a scanning electron micrograph (SEM) of a surface of a UNS N08367 alloy after undergoing a treatment that enhances corrosion resistance and which is an embodiment of the method of the present invention;

10 FIGURE 5 is an SEM of a surface of a UNS N08367 alloy manufactured and acid cleaned in a conventional manner after undergoing the ASTM G 150 test;

FIGURE 6 is an SEM of a surface of a UNS N08367 alloy after undergoing a treatment that enhances corrosion resistance and which is an 15 embodiment of the method of the present invention, and after being subjected to the ASTM G 150 test;

FIGURE 7 is an SEM of a surface of a UNS N08367 alloy after undergoing a treatment that enhances corrosion resistance and which is an embodiment of the method of the present invention, and after being subjected 20 to the ASTM G 150 test; and

FIGURE 8 is a plot of the pickling time, in minutes, required to achieve a CCCT of at least 43°C (110°F) relative to the weight % ratio of HF to HNO₃ in the pickling solution.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a method of enhancing the corrosion resistance of austenitic stainless steels and articles produced from the steels. The method includes removing sufficient material from at least a portion of a surface of the steel such that corrosion initiation sites present on the surface are eliminated or are reduced in number to an extent greater than has heretofore been achieved in conventional austenitic stainless steel processing. Removal of material from the steel surface may be accomplished by any of a variety of methods, including grit blasting, grinding, and/or acid pickling. The method of the invention provides improvement in the corrosion resistance of a steel without the need to modify the steel's chemical composition. The method may be applied on austenitic stainless steel in any form, including strip, bar, plate, sheet, casting, tube, and other forms.

The following test results applying the invention to UNS N08367 stainless steel, an austenitic stainless steel containing approximately 6 weight percent molybdenum, amply illustrates the advantages provided by the present invention. The invention, however, is not so limited. Without intending to be bound by any particular theory of operation, the present inventors believe that the method of the present invention enhances corrosion resistance by eliminating or reducing in number sites on the surface of a steel at which corrosion may be initiated. It is believed enhancement in corrosion resistance of any austenitic stainless steel would be achieved by applying the present method in the production or post-production treatment of that steel. Thus, the fact that only certain embodiments of the present invention are

described herein should not be considered to in any way limit the invention, and the true scope of the invention is as provided in the appended claims.

The present invention is especially beneficial for enhancing the corrosion resistance of austenitic stainless steels that will be used in 5 particularly corrosive environments. Austenitic stainless steels used in such applications typically are comprised of, by weight, 20 to 40 % nickel, 14 to 24 % chromium, and 4 to 12 % molybdenum. The composition of one such steel, UNS N08367, which is considered in the following tests, is set forth in Table 1.

10

TABLE 1: UNS N08367 Chemical Composition

Chemical Element	Typical (Wt%)	ASTM/ASME (Wt%)
C	0.02	0.03 max
Mn	0.40	2.00 max
P	0.02	0.04 max
S	<0.001	0.03 max
Si	0.40	1.00 max
Cr	20.5	20.00 - 22.00
Ni	24.0	23.50 – 25.50
Mo	6.20	6.00 – 7.00
N	0.22	0.18 – 0.25
Cu	0.20	0.75 max
Fe	Balance	Balance

15

The relative pitting resistance of a stainless steel can be correlated to alloy composition using the Pitting Resistance Equivalent number (PRE_N). The PRE_N provides a prediction, based on composition, of the resistance of a stainless alloy to chloride-induced localized corrosion attack. Although several equations for calculating PRE_N have been described, a widely accepted equation is Equation 1 below:

$$\text{Equation 1: } (\text{PRE}_N) = (\text{wt.\% Cr}) + 3.3 (\text{wt.\% Mo}) + 30 (\text{wt.\% N})$$

Thus, the typical UNS N08367 composition shown in Table 1 has a PRE_N of 47.5, while the maximum PRE_N of a UNS N03867 alloy is 52.6.

To compare the difference in the corrosion resistance capabilities of a UNS N03867 alloy processed in a conventional manner with

5 the same alloy that has undergone a treatment that is within the method of the present invention, alloy samples were tested to measure CCCT utilizing a TC Cor 2 crevice test. This test is often specified when steel products are being qualified for severely corrosive applications. The TC Cor 2 test is a bolted multiple crevice test which will be generally familiar to one of ordinary skill.

10 The TC Cor 2 test, in particular, entails exposing a steel sample to a 10% FeCl₃·6H₂O solution for an exposure time of 72 hours. Delrin washers, in accordance with the ASTM G78 specification, are bolted to the test sample to create artificial crevices on the sample surface. All TC Cor 2 testing used herein was performed after applying a torque of 58 inch-lbs to fasten the

15 washers to the samples surfaces. To determine the threshold temperature for crevice attack, samples were tested over a range of temperatures. With plate samples, crevice attack is considered present if the weight loss of the sample is greater than 0.0002 grams/cm² or if the depth of corrosive attack is greater than 0.0015 inches.

20 Historically, the expected results of the TC Cor 2 for austenitic stainless steels could be predicted based on alloy composition. Equation 2, set forth below, is one equation for predicting the CCCT results of TC Cor 2 tests based on alloy composition.

Equation 2: $CCCT(^{\circ}C) = 3.2 (\text{wt.\% Cr}) + 7.6 (\text{wt.\% Mo}) + 10.5 (\text{wt.\% N}) - 88.5$

This equation is similar to the equation described in the ASTM G48 specification, but is modified to account for the fact that TC Cor 2 test is 5 slightly more aggressive than the crevice test described in the ASTM Method D specification. Thus, according to Equation 2, a UNS N08367 alloy having a PRE_N of 47.5 would be expected to have a CCCT of 27°C (80.6°F).

TC Cor 2 crevice testing was performed on samples of UNS N08367 steel processed in a conventional manner, including a mill anneal and 10 an acid cleaning under typical processing conditions. The results of the TC Cor 2 testing, at temperatures ranging from 32.2°C (90°F) to 46°C (115°F) are set forth in Figure 1(a) through 1(d). As expected, failures were experienced at all temperature measurements, including those conducted at temperatures as low as 32.2°C (90°F). Those results are consistent with what would be 15 expected by the results of Equation 2, above.

Figure 2 illustrates the surface of a UNS N08367 steel processed in a conventional manner. The corrosive attack on the surface of a conventionally produced sample, after undergoing ASTM G 150 test, is seen in the SEM of Figure 5. The typical as-received mill surface seen in Figure 5 20 appears to have a very active surface condition present on the surface of the steel. The morphology of this attack suggests that this more active surface condition may serve as the weak link in the corrosion resistance of the alloy.

Figure 3(a) through 3(d) illustrates the improved corrosion resistance achieved according to an embodiment of the method of the present

invention. According to the embodiment, the typical as-received mill steel surface was sandblasted and then lightly pickled with a relatively weak acid and short exposure time. The pickling solution was 10.02% HNO₃ / 1.16% HF (as used herein, % acid = [grams of acid / 100 ml solution]), the pickling 5 solution temperature was 140°F, and the steel was exposed to the solution for 3 minutes. As is apparent, this surface treatment produced substantial improvement in corrosion performance over specimens that were only acid cleaned. The sandblasted and pickled specimens passed the TC Cor 2 crevice test at 48.8°C (120°F), which is the highest temperature that was 10 evaluated and which is well above 27°C (80.6°F), the CCCT result predicted by Equation 2 for a steel having the composition of UNS N08367 steel.

As is apparent in Figure 4, the surface of the sandblasted and pickled surface is completely abraded with no evidence of the former mill-pickled surface. The inventors do not wish to be bound by any particular 15 theory of how the present invention enhances corrosion resistance. However, the results shown in Figure 4 suggest that the improved corrosion resistance produced by grit blasting may be related to the removal of corrosion initiation sites present on the original mill surface.

Additional testing of the improved corrosion resistance achieved 20 by the present invention was conducted using the ASTM G 150 test procedure for determining the electrochemical critical pitting temperature ("ECPT"). The ECPT is a sensitive method of ranking an alloy's resistance to chloride pitting. The test includes holding steel samples at a constant potential of 700 mV (vs. SCE) while the temperature of the specimen and test

solution are increased at a rate of 1°C per minute. The measurements reported herein were performed in a Gamry Flex Cell using the Gamry CMS 110 Critical Pitting Test System. The electrolyte used in the testing consisted of 1M NaCl and the cell was purged with 99.99% nitrogen gas during testing.

5 The ECPT is defined as the temperature at which the current increases above 100 μ A/cm² and stays above this threshold current density for 60 seconds.

Samples of the UNS N08367 alloy were tested for ECPT after receiving either (1) typical acid cleaning, (2) sandblasting and pickling (with a 10.02% HNO₃ / 1.16% HF solution at 140°F for 3 minutes), or (3) grinding

10 (240 grit) and acid cleaning. The results are illustrated in Table 2.

TABLE 2: ECPT Test Results

Surface Treatment	ECPT
Acid Cleaned	173°F (78.5°C)
Sandblasted and Pickled	184°F (84.5°C)
Ground and Acid Cleaned	191°F (88.2°C)

These results parallel the TC Cor 2 crevice corrosion results. The acid cleaned mill surface shows the least resistance (lowest ECPT). On

15 the other hand, if the mill surface is grit blasted and pickled or ground and acid cleaned, the corrosion resistance is improved. The samples used to obtain the ECPT results were examined by a scanning electron microscope to see if the initiation sites for corrosive attack could be identified. The attack on the surface of the acid cleaned sample is shown in Figure 5. Here, the

20 initiation sites consist of regions that are preferentially attacked, thereby resulting in a very unusual etch pattern. The morphology of the attack

suggests the presence of a more active surface condition that serves as the weak link in the corrosion resistance of the steel.

The sites for corrosion attack on the surface of a steel treated according to one embodiment of the present invention, wherein the surface 5 was sandblasted and pickled, are shown in Figure 6. As is apparent, these sites consist of isolated angular pit-like cavities. The SEM of the surface of a steel treated according to another embodiment of the invention is shown in Figure 7. As Figure 7 illustrates, the surface of the ground and acid-cleaned specimen has spherical pitting widely distributed across the surface of the 10 specimen. The reason for the wide spread pitting on this specimen is because this sample was exposed to higher temperatures which nucleated many more sites of attack.

These results show that the morphology of attack depends on the steel's surface treatment. The typically produced steel surface appears to 15 have a very active surface condition present that may be a weak link in the corrosion resistance of the steel. When this surface condition is attacked it produces very unusual etch patterns which resemble a series of concentric rings. Sandblasting and grinding are two ways of removing this surface condition. The inventors have shown that removing or decreasing the 20 occurrence of that surface condition by the method of the present invention provides the treated surface with corrosion resistance that is enhanced relative to that achieved by processing the steel in a conventional manner.

Although, as illustrated above, sandblasting and/or grinding can be used to enhance the corrosion properties of steels, as illustrated above,

these operations may have a substantial impact on production cost and delivery time. Therefore, the use of a relatively aggressive pickling operation was considered to determine whether improved corrosion resistance would be achieved. Several experiments were carried out using various pickling

5 solutions and exposure times. Although all such testing was carried out using an acidic aqueous solution including HNO_3 and HF, it is expected that other acids, such as, for example, H_2SO_4 and HCl, could be used in the pickling solution in accordance with the present invention. As can be seen from the results of the TC Cor 2 testing set forth in Table 3 below, a short-term pickle in

10 a mild solution (10.02% HNO_3 / 1.16% HF solution at 140°F for 3 minutes) will not significantly improve the corrosion resistance.

TABLE 3: TC Cor 2 Test – Short Term / Mild Pickling

Test Temperature = 46°C (115°F)			
Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0149*	~0.048**	Attack under 37 of 40 plateaus
2	0.0215*	~0.074**	Attack under 39 of 40 plateaus
3	0.0085*	~0.030**	Attack under 36 of 40 plateaus
4	0.0132*	~0.038**	Attack under 31 of 40 plateaus
5	0.0078*	~0.035**	Attack under 33 of 40 plateaus
6	0.0124*	~0.050**	Attack under 38 of 40 plateaus
7	0.0097*	~0.039**	Attack under 40 of 40 plateaus
8	0.0200*	~0.063**	Attack under 39 of 40 plateaus

* Designates a failure

15 Each sample listed in Table 3 failed the TC Cor 2 test at a temperature of 46°C (115°F). This is expected from Equation 2, which, for the UNS N08367 alloy, predicts a CCCT of only 27°C (80.6°F).

The TC Cor 2 test was then conducted under pickling conditions more aggressive than those conditions used when processing the material in a conventional manner. The experimental results are summarized in Table 4.

5

TABLE 4: TC Cor 2 Test Results: Varying Pickling Conditions

Sample	Pickling Solution*	Pickling Temperature	Pickling Time	CCCT Result
1	7.2% HNO ₃ /3.4% HF	140°F	20 min	CCCT < 43°C
2	7.2% HNO ₃ /3.4% HF	140°F	40 min	CCCT < 43°C
3	7.2% HNO ₃ /3.4% HF	140°F	120 min	CCCT = 43°C
4	7.2% HNO ₃ /3.4% HF	140°F	420 min	CCCT = 46°C
5	4% HNO ₃ /5.5% HF	143°F	30 min	CCCT = 40.5°C
6	4% HNO ₃ /7.1% HF	147°F	30 min	CCCT = 38°C
7	4% HNO ₃ /7.1% HF	150°F	30 min	CCCT = 43°C
8	14% HNO ₃ /2.3% HF	140°F	60 min	CCCT = 40.5°C
9	14% HNO ₃ /2.3% HF	140°F	360 min	CCCT = 46°C
10	10% HNO ₃ / 6% HF	140°F	15 min	CCCT < 46°C
11	10% HNO ₃ / 6% HF	140°F	30 min	CCCT < 46°C
12	10% HNO ₃ / 8% HF	140°F	15 min	CCCT < 46°C
13	10% HNO ₃ / 8% HF	140°F	30 min	CCCT < 46°C
14	10% HNO ₃ /10% HF	140°F	15 min	CCCT < 46°C
15	10% HNO ₃ /10% HF	140°F	30 min	CCCT < 46°C

* % acid = [(grams of acid) / (100 ml solution)] x 100

The enhancement of corrosion resistance resulting from the aggressive pickling is apparent. The various combinations of pickling time, temperature, and bath chemistry included in Table 4 provided the pickled samples with CCCT values well above the 27°C result predicted by Equation 2 for a UNS N08367 alloy having a typical PRE_N of 47.5 (equation 2 predicts a CCCT of 37.7°C for the N08367 alloy at the maximum composition range for Cr, Mo, and N). Some samples achieved CCCT values as high as 38°C, 40.5°C, 43°C (110°F) and 46°C (115°F), a substantial increase in pitting resistance relative to the expected value. Based on the above equations, a

predicted 13.5–20 °C increase in CCCT could be achieved by modifying the composition of the UNS N03876 alloy to include an additional 4 weight % chromium or, alternatively, an additional 1.2 weight % molybdenum. Beyond the cost implications of such alloying additions, enhancing corrosion 5 resistance of the UNS N03867 alloy by the foregoing alloying additions would not be practical due to the phase instability that would result.

To further investigate the present method, the pickling time required to achieve at least a CCCT of 43°C (110°F) was plotted as a function of the weight % ratio of HF to HNO₃ in the pickling solution. The resulting plot 10 is shown in Figure 8. This plot shows that the pickle time required to enhance the corrosion resistance is indirectly proportional to the ratio of the weight % HF to weight % HNO₃ in the pickling bath. In particular, the minimum pickling time, in minutes, required to achieve a CCCT of at least 43°C (110°F) is approximately equal to $55(x)^{-1.0443}$, where (x) is the weight ratio of HF to HNO₃ 15 in the pickling solution. It is expected that similar plots can be developed for use with different bath chemistries.

The present invention may be used with any austenitic stainless steel to enhance the corrosion resistance of the steel relative to the corrosion resistance achieved by processing the steel in a conventional manner. For 20 example, the above data shows that the actual corrosion resistance of samples of an austenitic stainless steel treated by the method of the present invention is significantly greater than that of the same steel processed using a conventional acid treatment. Thus, the present method may be used to provide austenitic stainless steels, and articles fabricated from those steels,

which have corrosion resistance properties not previously achieved in steel with the same chemical composition. The method of the invention may be used with articles of any type fabricated from austenitic stainless steels. Such articles include, for example, strip, bars, plates, sheets, castings, and tubing.

5 It is to be understood that the present description illustrates aspects of the invention relevant to a clear understanding of the invention. Certain aspects of the invention that would be apparent to those of ordinary skill in the art and that, therefore, would not facilitate a better understanding of the invention may not have been presented in order to simplify the present

10 description. Although the present invention has been described in connection with certain embodiments, those of ordinary skill in the art will, upon considering the foregoing description, recognize that many modifications and variations of the invention may be employed. The foregoing description and the following claims are intended to cover all such variations and

15 modifications of the invention.

What is claimed is:

1. A method for enhancing the corrosion resistance of an austenitic stainless steel, the method comprising removing sufficient material from at least a portion of a surface of the steel to provide the treated surface with a critical crevice corrosion temperature that is greater than x, where $x(^{\circ}\text{C}) = 3.2(\text{ weight \% Cr}) + 7.6(\text{weight \% Mo}) + 10.5(\text{weight \% N}) - 88.5$.
2. The method of claim 1 wherein the austenitic stainless steel comprises, by weight, 20 up to 40% nickel, 14 up to 24% chromium, and 4 up to 12% molybdenum.
3. The method of claim 1 wherein the critical crevice corrosion temperature of the steel is increased to at 13.5°C greater than x.
4. The method of claim 1 wherein said steel is in the form of an article selected from the group consisting of strip, bar, plate, sheet, casting, and tubing.
5. The method of claim 1 wherein removing material from at least a portion of a surface of the steel reduces the number of corrosion initiation sites.
6. The method of claim 1 wherein removing material from at least a portion of a surface of the steel comprises at least one of grit blasting, grinding, and acid pickling.

7. The method of claim 6 wherein removing material from at least a portion of a surface of the steel comprises acid pickling the steel, wherein the acid pickling is carried out in a solution comprising at least one acid selected from the group consisting of nitric acid, hydrofluoric acid, sulfuric acid, hydrochloric acid.

8. The method of claim 7 wherein the acid pickling is carried out in an aqueous solution comprising nitric acid and hydrofluoric acid.

9. The method of claim 8 wherein the duration of contact between the aqueous solution and the austenitic stainless steel is equal to or greater than $55(x)^{1.0443}$, wherein x is the weight ratio of hydrofluoric acid to nitric acid in the acidic solution.

10. The method of claim 6 wherein the duration of the acid pickling step is no more than 60 minutes.

11. The method of claim 6 wherein the temperature of the acidic solution is at least 140°F.

12. The method of claim 1 wherein the austenitic stainless steel comprises a composition having a PRE_N of no greater than 52.6 and the resulting critical crevice corrosion temperature is at least 40.5°C.

13. A method for improving the corrosion resistance of an austenitic stainless steel article, the method comprising:

producing an article comprising an austenitic stainless steel; and
removing sufficient material from at least a portion of a surface of the steel
article to provide the treated surface with a critical crevice corrosion temperature
that is greater than x, where $x(^{\circ}\text{C}) = 3.2(\text{weight \% Cr}) + 7.6(\text{weight \% Mo}) +$
 $10.5(\text{weight \% N}) - 88.5$.

14. The method of claim 13 wherein the step of removing material from at
least a portion of a surface of the steel article comprises at least one of grit blasting,
grinding, and acid pickling.

15. The method of claim 13 wherein the austenitic stainless steel article is
comprised of a composition having a PRE_N of no greater than 52.6 and the resulting
critical crevice corrosion temperature is at least 40.5°C .

16. An austenitic stainless steel having a PRE_N of no more than 52.6 and a
critical crevice corrosion temperature of at least 38°C .

17. An article of manufacture including an austenitic stainless steel produced
by a method comprising removing sufficient material from at least a portion of a surface
of the steel to result in a critical crevice corrosion temperature that is greater than x,
where $x(^{\circ}\text{C}) = 3.2(\text{weight \% Cr}) + 7.6(\text{weight \% Mo}) + 10.5(\text{weight \% N}) - 88.5$.

18. An article of manufacture including an austenitic stainless steel produced by a method comprising acid pickling at least a portion of a surface of the steel for a period of time necessary to result in a critical crevice corrosion temperature of the steel that is greater than x, where $x(^{\circ}\text{C}) = 3.2(\text{weight \% Cr}) + 7.6(\text{weight \% Mo}) + 10.5(\text{weight \% N}) - 88.5$.

Test Temperature = 32.2°C (90°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0000	~0.001"	Attack under 9 of 40 plateaus
2	0.0001	~0.007"*	Attack under 11 of 40 plateaus
3	0.0000	Etch	Attack under 2 of 40 plateaus
4	0.0000	Etch	Attack under 2 of 40 plateaus
5	0.0000	--	No apparent attack
6	0.0000	--	No apparent attack
7	0.0000	~0.004"*	Attack under 4 of 40 plateaus
8	0.0000	Lt Etch	Etch under 1 of 40 plateaus
9	0.0000	~0.003"*	Attack under 11 of 40 plateaus
10	0.0000	~0.007"*	Attack under 3 of 40 plateaus
11	0.0000	--	No apparent attack
12	0.0000	--	No apparent attack
13	0.0000	Etch	Etch under 1 of 40 plateaus
14	0.0000	~0.001"	Attack under 8 of 40 plateaus
15	0.0000	Etch	Etch under 1 of 40 plateaus
16	0.0000	~0.001"	Attack under 4 of 40 plateaus
17	0.0000	--	No apparent attack
18	0.0000	Etch	Etch under 3 of 40 plateaus

* Designates a failure

Figure 1(a)

Test Temperature = 35°C (95°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0000	~0.003**	Attack under 7 of 40 plateaus
2	0.0001	~0.006**	Attack under 10 of 40 plateaus
3	0.0000	~0.003**	Attack under 8 of 40 plateaus
4	0.0000	~0.005**	Attack under 6 of 40 plateaus
5	0.0000	~0.002**	Attack under 10 of 40 plateaus
6	0.0000	Etch	Etch under 2 of 40 plateaus
7	0.0000	~0.001"	Attack under 9 of 40 plateaus
8	0.0000	~0.002**	Attack under 9 of 40 plateaus
9	0.0028*	~0.022**	Attack under 38 of 40 plateaus
10	0.0001	~0.011**	Attack under 14 of 40 plateaus
11	0.0000	--	No apparent attack
12	0.0000	~0.001"	Attack under 3 of 40 plateaus
13	0.0000	~0.002**	Attack under 8 of 40 plateaus
14	0.0000	Etch	Etch under 1 of 40 plateaus
15	0.0000	~0.002**	Attack under 8 of 40 plateaus
16	0.0000	Etch	Etch under 3 of 40 plateaus
17	0.0000	Etch	Etch under 10 of 40 plateaus
18	0.0000	Etch	Etch under 4 of 40 plateaus

* Designates a failure

Figure 1(b)

Test Temperature = 38°C (100°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0007*	~0.026"**	Attack under 7 of 40 plateaus
2	0.0008*	~0.023"**	Attack under 11 of 40 plateaus
3	0.0001	~0.009"**	Attack under 15 of 40 plateaus
4	0.0000	~0.005"**	Attack under 4 of 40 plateaus
5	0.0000	Etch	Etch under 2 of 40 plateaus
6	0.0000	~0.003"**	Attack under 3 of 40 plateaus
7	0.0000	~0.004"	Attack under 3 of 40 plateaus
8	0.0000	~0.005"**	Attack under 6 of 40 plateaus
9	0.0037*	~0.029"**	Attack under 22 of 40 plateaus
10	0.0007*	~0.023"**	Attack under 10 of 40 plateaus
11	0.0000	<0.001"	Attack under 1 of 40 plateaus
12	0.0000	~0.002"	Attack under 2 of 40 plateaus
13	0.0000	--	No apparent attack
14	0.0000	--	No apparent attack
15	0.0000	~0.005"**	Attack under 6 of 40 plateaus
16	0.0000	--	No apparent attack
17	0.0000	~0.003"	Attack under 2 of 40 plateaus
18	0.0000	~0.002"	Attack under 6 of 40 plateaus

* Designates a failure

Figure 1(c)

Test Temperature = 46°C (115°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0240*	~0.055**	Attack under 39 of 40 plateaus
2	0.0152*	~0.061**	Attack under 40 of 40 plateaus
3	0.0097*	~0.033**	Attack under 20 of 40 plateaus
4	0.0103*	~0.052**	Attack under 40 of 40 plateaus
5	0.0086*	~0.043**	Attack under 31 of 40 plateaus
6	0.0120*	~0.042**	Attack under 34 of 40 plateaus
7	0.0117*	~0.053**	Attack under 40 of 40 plateaus
8	0.0240*	~0.048**	Attack under 40 of 40 plateaus
9	0.0207*	~0.045**	Attack under 40 of 40 plateaus
10	0.0152*	~0.048**	Attack under 40 of 40 plateaus
11	0.0089*	~0.041**	Attack under 23 of 40 plateaus
12	0.0115*	~0.034**	Attack under 38 of 40 plateaus
13	0.0045*	~0.045**	Attack under 11 of 40 plateaus
14	0.0058*	~0.058**	Attack under 18 of 40 plateaus
15	0.0077*	~0.032**	Attack under 23 of 40 plateaus
16	0.0087*	~0.045**	Attack under 23 of 40 plateaus
17	0.0274*	~0.047**	Attack under 36 of 40 plateaus
18	0.0172*	~0.043**	Attack under 40 of 40 plateaus

* Designates a failure

Figure 1(d)

Test Temperature = 38°C (100°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0000	--	No apparent attack
2	0.0000	Lt Etch	Etch under 1 of 40 plateaus
3	0.0000	--	No apparent attack
4	0.0000	--	No apparent attack
5	0.0000	--	No apparent attack
6	0.0000	--	No apparent attack
7	0.0000	--	No apparent attack
8	0.0000	--	No apparent attack
9	0.0000	Lt Etch	Etch under 1 of 40 plateaus
10	0.0000	--	No apparent attack
11	0.0000	--	No apparent attack
12	0.0000	--	No apparent attack
13	0.0000	--	No apparent attack
14	0.0000	--	No apparent attack
15	0.0000	--	No apparent attack
16	0.0000	--	No apparent attack
17	0.0000	--	No apparent attack
18	0.0000	--	No apparent attack

* Designates a failure

Figure 3(a)

Test Temperature = 43°C (110°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0000	--	No apparent attack
2	0.0000	--	No apparent attack
3	0.0000	--	No apparent attack
4	0.0000	--	No apparent attack
5	0.0000	--	No apparent attack
6	0.0000	--	No apparent attack
7	0.0000	--	No apparent attack
8	0.0000	--	No apparent attack
9	0.0000	--	No apparent attack
10	0.0000	--	No apparent attack
11	0.0000	--	No apparent attack
12	0.0000	--	No apparent attack
13	0.0000	--	No apparent attack
14	0.0000	--	No apparent attack
15	0.0000	--	No apparent attack
16	0.0000	--	No apparent attack
17	0.0000	--	No apparent attack
18	0.0000	--	No apparent attack

* Designates a failure

Figure 3(b)

Test Temperature = 46°C (115°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0000	--	No apparent attack
2	0.0000	--	No apparent attack
3	0.0000	--	No apparent attack
4	0.0000	--	No apparent attack
5	0.0000	--	No apparent attack
6	0.0000	--	No apparent attack
7	0.0000	--	No apparent attack
8	0.0000	--	No apparent attack
9	0.0000	--	No apparent attack
10	0.0000	--	No apparent attack
11	0.0000	--	No apparent attack
12	0.0000	--	No apparent attack
13	0.0000	--	No apparent attack
14	0.0000	--	No apparent attack
15	0.0000	--	No apparent attack
16	0.0000	--	No apparent attack
17	0.0000	--	No apparent attack
18	0.0000	--	No apparent attack

* Designates a failure

Figure 3(c)

Test Temperature = 48.8°C (120°F)

Sample	Weight Loss (grams/cm ²)	Deepest Crevice	Remarks
1	0.0000	--	No apparent attack
2	0.0000	--	No apparent attack
3	0.0000	--	No apparent attack
4	0.0000	--	No apparent attack
5	0.0000	--	No apparent attack
6	0.0000	--	No apparent attack
7	0.0000	--	No apparent attack
8	0.0000	--	No apparent attack
9	0.0000	--	No apparent attack
10	0.0000	--	No apparent attack
11	0.0000	--	No apparent attack
12	0.0000	--	No apparent attack
13	0.0000	--	No apparent attack
14	0.0000	--	No apparent attack
15	0.0000	--	No apparent attack
16	0.0000	--	No apparent attack
17	0.0000	--	No apparent attack
18	0.0000	--	No apparent attack

* Designates a failure

Figure 3(d)

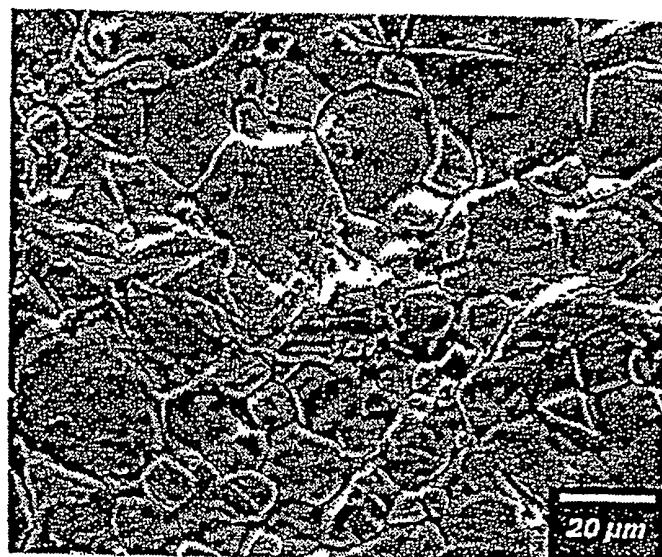


FIGURE 2

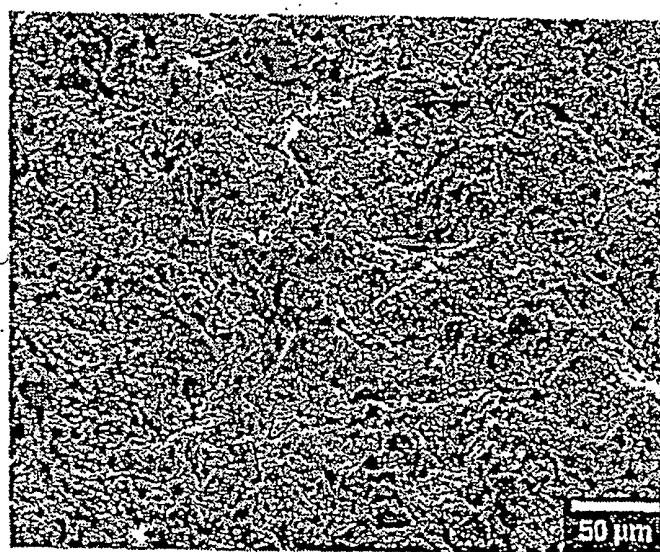


FIGURE 4

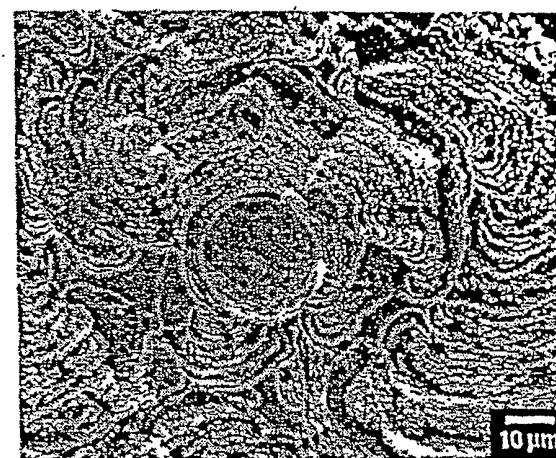
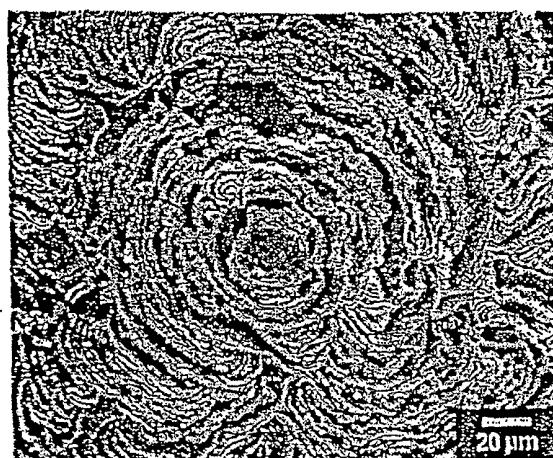
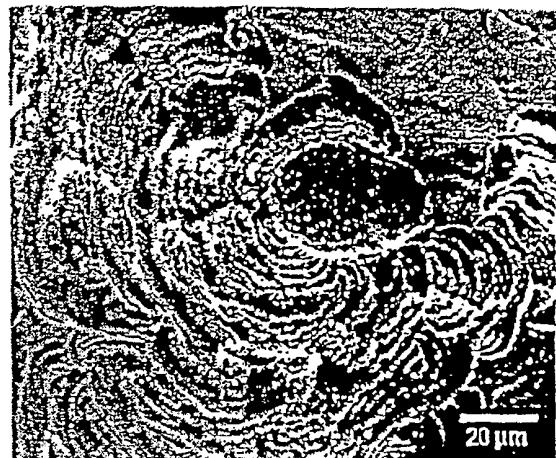
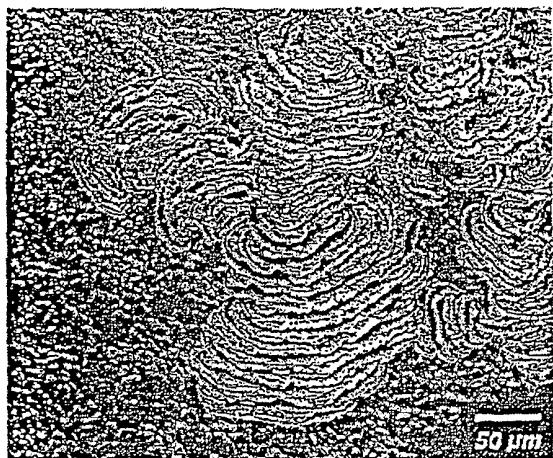


FIGURE 5

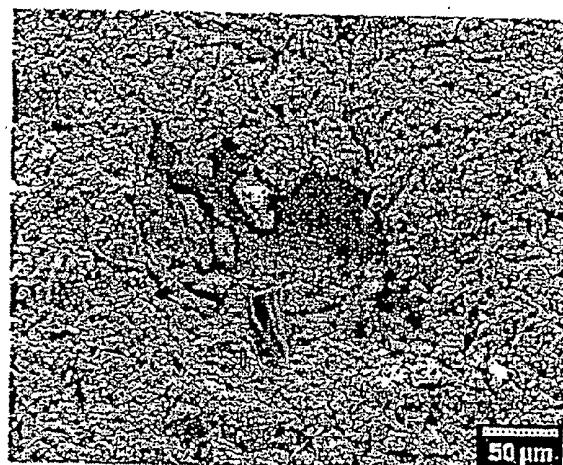
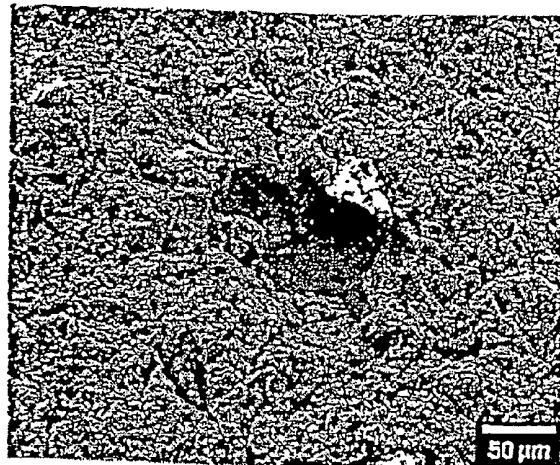


FIGURE 6

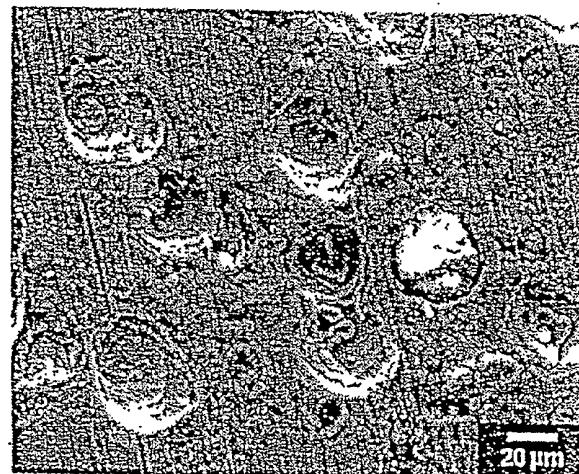
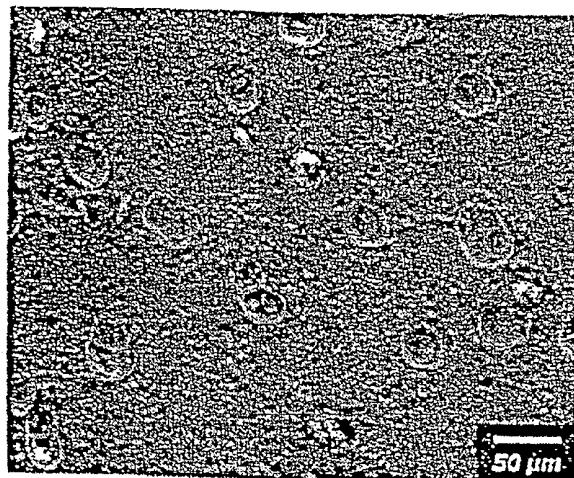


FIGURE 7

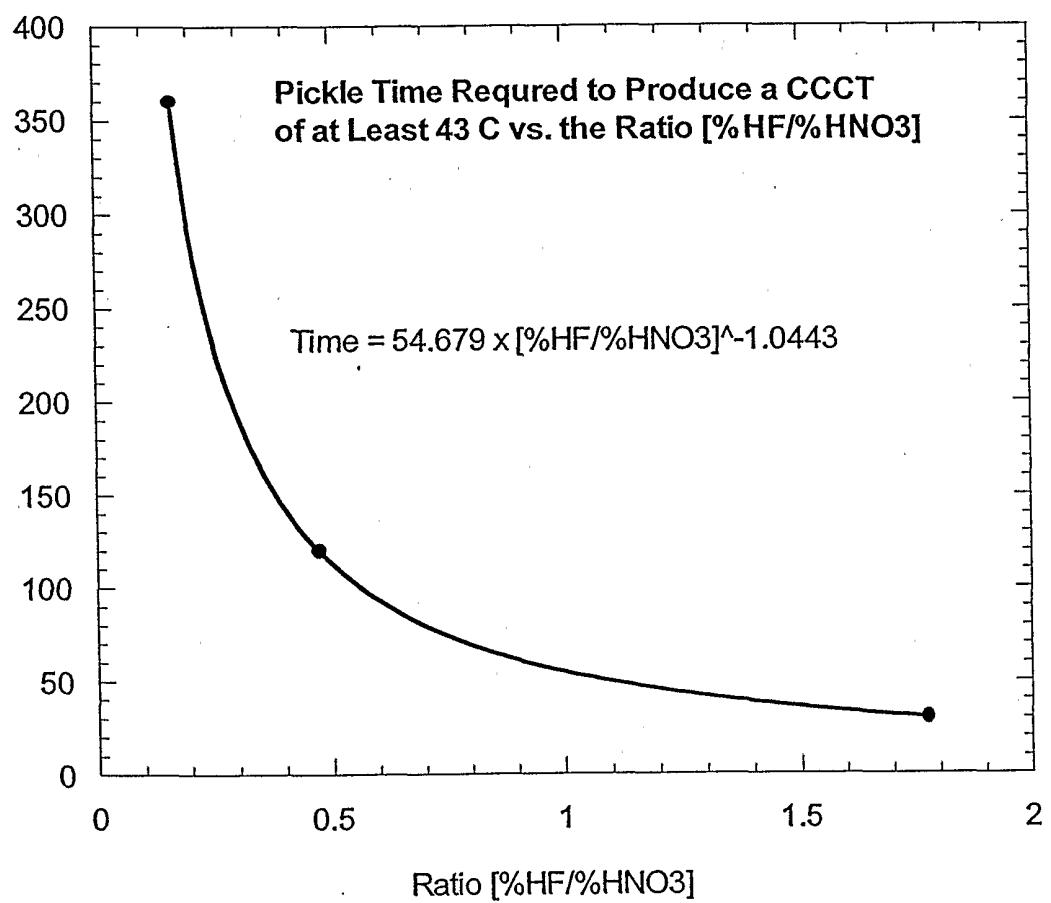


FIGURE 8

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US01/24367

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : C23G 1/02; C22C 38/18, 38/22, 38/40
US CL : 134/3, 6, 41; 148/325, 500, 503, 506

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 134/3, 6, 41; 148/325, 500, 503, 506

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EAST; critical adj crevice adj corrosion adj temperature

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4,545,826 A (MCCUNN et al) 08 October 1985, see abstract and claims	1-18
A	US 4,876,065 A (ROCKEL et al) 24 October 1989, abstract and claims	1-18
A	US 4,911,886 A (PITLER et al) 27 March 1990, abstract and claims	1-18
A	US 4,915752 A (CULLING) 10 April 1990, abstract	1-18
A	US 5,120,614 A (HIBNER et al) 09 June 1992, abstract and claims	1-18
A	US 5,743,968 A (LEEKER et al) 28 April 1998, abstract and claims.	1-18

Further documents are listed in the continuation of Box C. See patent family annex.

Special categories of cited documents:	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&"	document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means		
"P" document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

31 OCTOBER 2001

Date of mailing of the international search report

30 NOV 2001

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-8290

Authorized officer

SAEED T. CHAUDHRY

Telephone No. (703) 308-0651

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/24367

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,275,696 A (GASKIN et al) 04 January 1994, abstract and claims.	1-18