

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 June 2006 (29.06.2006)

PCT

(10) International Publication Number
WO 2006/068678 A1

(51) International Patent Classification:
D21F 11/14 (2006.01)

(21) International Application Number:
PCT/US2005/033793

(22) International Filing Date:
21 September 2005 (21.09.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/019,116 21 December 2004 (21.12.2004) US

(71) Applicant (for all designated States except US): **KIM-BERLY-CLARK WORLDWIDE, INC.** [US/US]; 401 N. Lake Street, Neenah, WI 54956 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BEUTHER, Paul, D.** [US/US]; 1470 Jacobsen Road, Neenah, WI 54956 (US). **HOLZ, Jeffrey, D.** [US/US]; N498 Nottingham Court, Sherwood, WI 54169 (US). **OLIVER, Stephanie, Lee** [US/US]; N1686 Prairieview Drive, Greenville, WI 54942 (US).

(74) Agent: **CASSIDY, Timothy, A.**; Dority & Manning, P.A., P.O. Box 1449, Greenville, SC 29602-1449 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM FOR PRODUCING WET-PRESSED, MOLDED TISSUE PRODUCTS

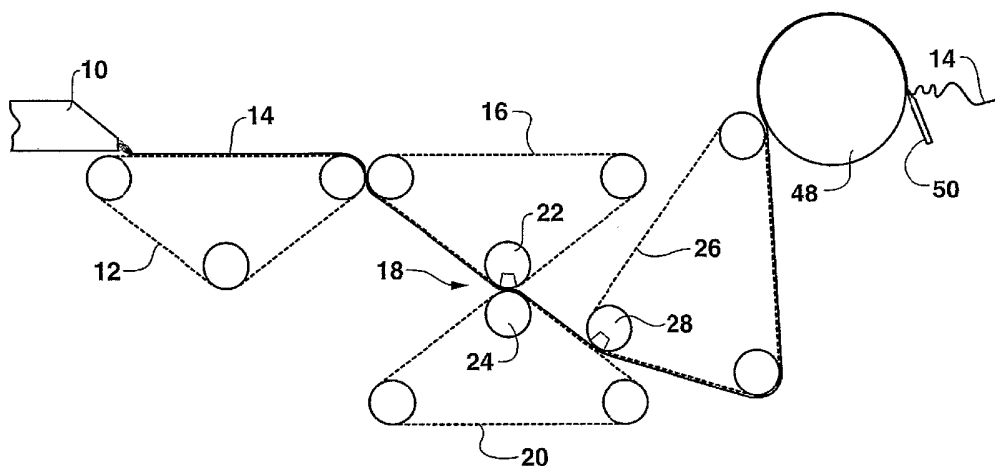

(57) Abstract: A process for producing tissue webs is disclosed. The process may include the step of partially dewatering a tissue web, subjecting the web to at least one deflection against a fabric, such as a coarse fabric, and then creping the web. During the process, after being dewatered, the tissue web is transferred from a transfer conveyor to the fabric using a pneumatic force, such as a suction force. In order to prevent liquids from rewetting the tissue web as the tissue web is being transferred to the fabric, the transfer conveyor is made from a material that inhibits or prevents liquids from flowing into the tissue web. For instance, in one embodiment, the transfer conveyor may comprise a felt comprised of small capillary materials. The felt may have an intake rate, for instance, of less than about 150 $\mu\text{L/s}$ when wet, may have a mean free pore size of less than about 20 microns, and may have a minimum pore size of less than about 5 microns.

BACKGROUND OF THE INVENTION

5 Many tissue products, such as facial tissue, bath tissue, paper towels, industrial wipers, and the like, are produced according to a wet laid process. Wet laid webs are made by depositing an aqueous suspension of pulp fibers onto a forming fabric and then removing water from the newly-formed web. Water is typically removed from the web by mechanically pressing water out of the web
10 which is referred to as "wet-pressing". Although wet-pressing is an effective dewatering process, during the process the tissue web is compressed causing a marked reduction in the caliper of the web and in the bulk of the web.

For most applications, however, it is desirable to provide the final product with as much bulk as possible without compromising other product attributes.
15 Thus, those skilled in the art have devised various processes and techniques in order to increase the bulk of wet laid webs. For example, creping is often used to disrupt paper bonds and increase the bulk of tissue webs. During a creping process, a tissue web is adhered to a heated cylinder and then creped from the cylinder using a creping blade.

20 As an alternative to wet-pressing processes, through-drying processes have developed in which web compression is avoided as much as possible in order to preserve and enhance the bulk of the web. These processes provide for supporting the web on a coarse mesh fabric while heated air is passed through the web to remove moisture and dry the web.

25 Although through-dried tissue products exhibit good bulk and softness properties, through-drying tissue machines are expensive to build and operate. Accordingly, a need exists for producing higher quality tissue products by modifying existing, conventional, wet-pressing tissue machines.

In this regard, U.S. Patent No. 5,411,636 to Hermans, et al., which is
30 incorporated herein by reference, discloses a process for improving the internal bulk of a tissue web by first dewatering a web and then subjecting the tissue web to differential pressure while supported on a coarse fabric at a consistency of about 30% or greater. The processes disclosed in the '636 patent provide various advantages in the art of tissue making.

Additional improvements in the art, however, are still needed. For instance, after the web is dewatered, the web is typically transferred from a felt onto the fabric using air pressure, such as a suction force. One problem that has been experienced in the past is that during the transfer from the felt to the fabric, the tissue web becomes rewetted. In particular, the suction force applied to the tissue web may cause water contained within the felt to be transferred into the tissue web as the web is transferred onto the fabric. In some instances, for example, the consistency of the tissue web may decrease in amounts greater than about 4% during the transfer. This water that is transferred back into the tissue web must then be removed during the final drying step of the web which not only increases the energy requirements of the process but also may cause the retention time of the web on the dryer to be increased. Ultimately, rewetting of the tissue web during the transfer to the fabric can result in significant added expense to the process.

In view of the above, a need currently exists for an improved process for producing tissue webs that couples wet-pressing with molding to create a low-density tissue product. In particular, a need exists for inhibiting a tissue web from being rewetted after the web has been dewatered and transferred to a fabric.

SUMMARY OF THE INVENTION

The present disclosure is generally directed to further improvements in the art of tissue making. In particular, a tissue making process is disclosed in which wet pressing is coupled with molding to create tissue products having good bulk and low density characteristics. During the process, a wet web containing papermaking fibers is first dewatered and then transferred to a fabric which may be a coarse fabric for molding the web against the fabric. According to the process of the present invention, the web is dewatered and transferred to the fabric under a suction force without a substantial amount of rewetting of the tissue web occurring. The problems associated with rewetting upon transfer to the fabric are minimized by incorporating into the process a transfer conveyor, such as a felt, that has particular characteristics or is made from a particular construction.

For example, in one embodiment, the present invention is directed to a method of producing tissue products comprising the steps of first depositing an aqueous suspension of papermaking fibers onto a forming fabric to form a wet

web. The wet web is dewatered to a consistency of at least about 30%, such as from about 30% to about 70%. The web can be dewatered using various techniques. In one particular embodiment, for instance, the web is fed through a press nip and dewatered.

5 After being dewatered, the web is conveyed on a transfer conveyor which, in one embodiment, may comprise a transfer felt. In accordance with the present invention, the transfer felt has a liquid intake rate of less than about 150 $\mu\text{L/s}$, such as less than about 100 $\mu\text{L/s}$. For example, in one embodiment, the transfer felt may have a liquid intake rate of less than about 75 $\mu\text{L/s}$ or even less than 65 $\mu\text{L/s}$.
10 By having a low intake rate as defined below, the transfer felt is less likely to release water as the dewatered web is released off the transfer felt.

 From the transfer felt, the web is transferred to a fabric and may be deflected against the fabric for molding the web and increasing the bulk of the web. From the fabric, the web is then conveyed onto a drying drum and creped from the
15 drum. In one embodiment, for instance, an adhesive may be applied to the tissue web in order to adhere the web to the drying drum. In addition to facilitating creping of the web, the drying drum dries the web to a final dryness.

 During the process, the web is transferred from the transfer felt to the fabric using a pneumatic force. For example, in one embodiment, a suction force
20 positioned against the fabric may be used to not only transfer the web to the fabric but also to deflect the web against the fabric. According to the present invention, the above transfer can take place without the tissue web decreasing substantially in consistency. For example, during the transfer from the transfer felt to the fabric, the consistency of the web decreases no more than by about 2%, such as by no
25 more than about 1%.

 The transfer conveyor or felt used in the process may be constructed in various ways in order to achieve the characteristics necessary to minimize rewetting of the tissue web. For example, in one embodiment, the transfer felt is comprised of a fiber construction such that the felt has a mean free pore size of
30 less than about 20 microns, such as less than about 18 microns, and, in one embodiment, can be less than about 15 microns. The transfer felt may have a minimum pore size of less than about 5 microns, such as less than about 4.5

microns, and, in one embodiment, may have a minimum pore size of less than about 4 microns.

The transfer felt may generally have a smooth surface, such as a surface smoother than the surface of the dewatering conveyor positioned upstream. In one embodiment, the transfer felt may be coated with a hydrophobic material. For example, any suitable hydrophobic polymer may be coated over the felt.

Transfer felts having the above-described characteristics have been found to resist the release of water during transfer of the dewatered web from the transfer felt to the fabric.

During the process, the wet web can be dewatered using various techniques. For example, in one embodiment, a through-air dryer or a drying cylinder may be used in order to dewater the web prior to being molded against a fabric. In an alternative embodiment, the wet web may be dewatered by being passed through a press nip. For instance, in one embodiment, a wet web may be placed on a dewatering felt and passed through a press nip formed between the dewatering felt and the transfer felt. After the web is passed through the press nip, the dewatered web is transferred from the dewatering felt to the transfer felt.

The press nip may have various constructions. For example, in one embodiment, the press nip may comprise a vacuum roll positioned opposite a press roll. In an alternative embodiment, the press nip may comprise a stationary shoe positioned opposite a press roll.

In general, any suitable tissue product may be made according to the above process. For instance, in one embodiment, the process may be used to form facial tissue or bath tissue. In this embodiment, the tissue web may have a basis weight of from about 10 gsm to about 25 gsm upon final drying.

In an alternative embodiment, the process of the present invention is used to produce a paper towel or industrial wiper. In this embodiment, the tissue web may have a basis weight of greater than about 30 gsm, such as from about 30 gsm to about 100 gsm.

Other features and aspects of the present invention are discussed in greater detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

The following is a detailed description of the present invention including reference to the following figures in which:

Figure 1 is a side view of one embodiment of a process made in
5 accordance with the present invention;

Figure 2 is a partial exploded side view of the transfer of a tissue web from a transfer conveyor to a fabric as shown in Figure 1; and

Figure 3 is a graphical representation of the results obtained in the examples described below.

10 Repeat use of reference characters in the present specification and drawings is intended to represent the same or analogous features or elements of the invention.

DETAILED DESCRIPTION

It is to be understood by one of ordinary skill in the art that the present
15 discussion is a description of exemplary embodiments only, and is not intended as limiting the broader aspects of the present invention, which broader aspects are embodied in the exemplary constructions.

In general, the present invention is directed to the formation of tissue webs having good bulk and softness properties while maintaining adequate strength
20 properties. In general, the tissue webs are made by a wet-pressing process in combination with a molding process and a creping process in order to create a high bulk, low-density web. During the process, a wet web is first dewatered, placed on a transfer conveyor, and is then transferred to a fabric using a
pneumatic force. Once on the fabric, the web is deflected against the fabric and, in
25 one embodiment, molded against the fabric. After being deflected, the web is then placed on a drying drum and creped from the drum.

As described above, in the past, problems were experienced when transferring the dewatered web from the transfer conveyor to the fabric. Specifically, the transfer between the transfer conveyor and the fabric typically
30 occurred using a suction force causing water contained in the transfer conveyor to rewet the tissue web. In fact, in some processes, the web was found to decrease in consistency by about 4% or greater after being transferred to the fabric.

In accordance with the present invention, the transfer conveyor is particularly constructed in order to substantially prevent the tissue web from being rewetted upon transfer to the fabric. For example, in one embodiment, the transfer conveyor comprises a felt that may have a smooth surface, a relatively small pore size, and/or an enhanced hydrophobic surface. In one particular embodiment of the present invention, for example, the transfer felt has a liquid intake rate (as defined in the examples below) of less than about 150 $\mu\text{L/s}$. Transfer felts designed in accordance with the present invention have been found not to easily release water after the felt has been wetted. In fact, the felt is resistant to releasing water when subjected to a pneumatic force sufficient to transfer a tissue web from the felt to a fabric. In this manner, rewetting of the tissue web during transfer to the fabric is minimized.

The process and the system of the present invention provide various advantages and benefits. For example, by preventing the tissue web from being rewetted, less energy is needed to dry the web on the drying drum. Thus, a smaller drying drum may be used, the drum may operate at a lower temperature, or the retention time of the web on the drying drum may be reduced. Ultimately, an energy savings is realized making the process more economical.

Referring to **Figure 1**, one embodiment of a tissue making process in accordance with the present invention is shown. As illustrated, the system includes a head box **10** which deposits an aqueous suspension of papermaking fibers onto a forming fabric **12**. The papermaking fibers can include, but are not limited to, all known cellulosic fibers or fiber mixes comprising cellulosic fibers. The fibers can include, for example, hardwood fibers such as eucalyptus fibers or softwood fibers, such as northern softwood kraft fibers. Other fibers may include high-yield fibers, recycled fibers, broke, synthetic cellulosic fibers, and the like.

Once the aqueous suspension of fibers is deposited onto the forming fabric **12**, some of the water contained in the aqueous suspension is drained through the fabric and a tissue web **14** is formed. The wet web **14** retained on the surface of the forming fabric has a consistency of about 10%.

As shown in **Figure 1**, the wet tissue web **14** is transferred to a dewatering conveyor **16** which may be, for instance, a papermaking felt. The tissue web **14** is then fed into a press nip **18** and further dewatered. The press nip **18** is formed

between the dewatering conveyor **16** and a transfer conveyor **20** utilizing a first press roll **22** and a second press roll **24**. If desired, one of the press rolls may comprise a vacuum roll to assist in draining fluids from the tissue web **14**. For example, as shown in **Figure 1**, the first press roll **22** may comprise a vacuum roll for applying a suction force to the web. The press nip dewateres the tissue web **14** to a consistency of about 30% or greater, such as from about 30% to about 70%. In one particular embodiment, for example, the tissue web is dewatered in the nip **18** to a consistency of about 35% to about 50%.

In **Figure 1**, a press nip is shown formed between a pair of opposing press rolls. In other embodiments, multiple press nips may be used in order to dewater the web. Further, extended press nips may also be incorporated into the process. The extended press nip, for instance, may contain a stationary shoe positioned opposite a press roll. In this embodiment, the stationary shoe may apply a suction force to the tissue web. In further embodiments, a through-air dryer may be used in order to dewater the web.

From the nip **18**, the tissue web **14** is conveyed on the transfer conveyor **20** and then transferred to a fabric **26**, such as a coarse or molding fabric. In order to transfer the tissue web **14** from the transfer conveyor **20** to the fabric **26**, a pneumatic force may be used. For example, as shown in **Figures 1 and 2**, a vacuum roll **28** may be positioned adjacent the fabric **26** for assisting in transferring the web onto the fabric using a suction force. The suction force not only assists in transfer of the tissue web but, in some embodiments, may also deflect the web **14** against the fabric **26**. As used herein, the term "deflection" refers to a process in which a tissue web is biased against an opposing surface with a force sufficient to cause at least some of the fibers in the web to reorient. In some embodiments, the force may be sufficient to cause the web to mold and conform to the topography of the surface. In accordance with the process, deflection of the web against the fabric may occur against the vacuum roll **28** and/or may occur at other positions along the fabric **26**. Further, it should be understood that in addition to a vacuum roll **28**, other vacuum devices may be used, such as a stationary vacuum shoe.

In order to create a significant amount of fiber disruption, in one embodiment, the fabric **26** may comprise a coarse fabric. The nature of the coarse

fabric is such that the wet web must be supported in some areas and unsupported in others in order to enable the web to flex in response to the differential air pressure or other deflection force applied to the web. Such fabrics suitable for purposes of this invention include, without limitation, those papermaking fabrics which exhibit significant open area or three dimensional surface contour or depressions sufficient to impart substantial z-directional deflection of the web. Such fabrics include single-layer, multi-layer, or composite permeable structures. Preferred fabrics have at least some of the following characteristics: (1) On the side of the fabric that is in contact with the wet web (the top side), the number of machine direction (MD) strands per inch (mesh) is from 10 to 200 and the number of cross-machine direction (CD) strands per inch (count) is also from 10 to 200. The strand diameter is typically smaller than 0.050 inch; (2) On the top side, the distance between the highest point of the MD knuckle and the highest point of the CD knuckle is from about 0.001 to about 0.02 or 0.03 inch. In between these two levels, there can be knuckles formed either by MD or CD strands that give the topography a 3-dimensional hill/valley appearance which is imparted to the sheet during the wet molding step; (3) On the top side, the length of the MD knuckles is equal to or longer than the length of the CD knuckles; (4) If the fabric is made in a multi-layer construction, it is preferred that the bottom layer is of a finer mesh than the top layer so as to control the depth of web penetration and to maximize fiber retention; and (5) The fabric may be made to show certain geometric patterns that are pleasing to the eye, which typically repeat between every 2 to 50 warp yarns. Suitable commercially available coarse fabrics include a number of fabrics made by AstenJohnson, including without limitation Asten 934, 920, 52B, and Velostar V800.

The amount of pneumatic pressure that is generated by the vacuum roll as shown in **Figures 1 and 2** may vary depending upon the particular application and the desired result. In general, gas pressures can be at least 1 inch Hg, at least 2 inches Hg, such as at least 4 inches Hg. The pressures may vary, for instance, from about 1 inch Hg to about 60 inches Hg, such as from about 4 inches Hg to about 20 inches Hg.

As shown in **Figure 1**, after being conveyed on the fabric **26**, the tissue web **14** is then transferred to a drying cylinder **48** in order to dry the web to a final dryness. The drying cylinder **48** may be, for instance, a Yankee dryer.

In one embodiment, an adhesive may be applied to the tissue web or to the
5 dryer for adhering the web to the dryer. The adhesive may be, for instance, any suitable or conventionally used adhesive. For instance, in one embodiment, an adhesive containing polyvinyl alcohol may be used. The adhesive may be, for instance, sprayed onto the web. As shown in **Figure 1**, once adhered to the drying cylinder **48**, the tissue web **14** is creped from the cylinder using a creping blade **50**.
10 Creping the web serves to further cause fiber disruption and increase the bulk of the web. Once creped, the tissue web is wound onto a reel for converting and later packaging.

Although the process in **Figure 1** shows the use of a drying cylinder and creping blade, it should be understood that any suitable drying device may be used
15 in the present invention. For example, in other embodiments, the process may include a through-air dryer.

Referring back to **Figure 2**, as described above, after the tissue web **14** is dewatered in the press nip **18**, the tissue web is then transferred from the transfer conveyor **20** to the fabric **26** using a pneumatic force, such as a suction force.
20 Unfortunately, although the suction force facilitates transfer of the web **14** to the fabric **26** and may also deflect the web against the fabric, the suction force has a tendency to draw water from the transfer conveyor **20** back into the tissue web **14** causing the web to be rewetted. In accordance with the present invention, however, a transfer conveyor **20** is chosen that substantially inhibits water from
25 rewetting the tissue web **14** upon transfer to the fabric **26**.

For example, in one embodiment, the transfer conveyor **20** comprises a felt that minimizes the reverse flow of water into the tissue web **14** during the transfer. For instance, in accordance with the present invention, the transfer felt **20** can be constructed so as to retain water once wet and to prevent water from being
30 released even when subjected to a suction force as may be applied by the vacuum roll **28**. The transfer felt in one embodiment may be considered to operate like a "one-way door" that absorbs water in one direction but has a construction that inhibits the flow of water in an opposite direction.

The transfer felt **20** can be constructed in various ways from various materials in order to provide the characteristics that are desired. In one embodiment, for instance, the transfer felt **20** is made from a small capillary material. For instance, the felt may contain a woven fabric embedded with small diameter fibers. The small diameter fibers may account for greater than about 40%, such as greater than about 50%, and in one embodiment, may account for greater than about 60% of the mass of the overall felt. The fibers, for example, may have a diameter of about 1 denier or less. Any suitable fiber may be used to construct the felt, such as carded nylon fibers. If desired, the felt and/or the fibers may be treated with a wetting agent.

Such felt materials as described above desirably have various characteristics that the present inventors have found to be well suited for use in the process of the present invention. For example, the transfer felt **20** may have a liquid intake rate (as described in the examples below) of less than about 150 $\mu\text{L/s}$, such as less than about 100 $\mu\text{L/s}$. For instance, the transfer felt in particular embodiments may have a liquid intake rate of less than about 75 $\mu\text{L/s}$ and even less than about 65 $\mu\text{L/s}$ when wet. The liquid intake rate of the transfer felt is generally dependent upon the porosity of the felt structure, the capillary tension and/or the wettability of the material. Materials with lower intake rates have less tendency to release liquids, such as water, once wetted.

In addition to intake rate, the pore size of the transfer felt may also indicate the ability of the material to inhibit the flow of liquids out of the material. Transfer felts made according to the present invention, for example, may have a mean free pore size (as described in the examples below) of less than about 20 microns, such as less than about 18 microns, and, in one embodiment, may be less than about 15 microns. The transfer felt may also have a minimum pore size of less than about 5 microns, such as less than about 4.5 microns. In one particular embodiment, for example, the transfer felt may have a minimum pore size of less than about 4 microns.

Instead of or in addition to constructing the transfer felt from small capillary materials, the felt may also be formed so as to have an enhanced hydrophobic surface. For instance, in one embodiment, a felt material may be coated with a hydrophobic material in order to arrive at the above-described characteristics.

Hydrophobic coatings can be made, for instance, from various polymeric materials, including various thermoplastic materials. Hydrophobic sizing agents may also be applied to the felt.

In order to assist transfer of the tissue web **14** from the dewatering conveyor **16** to the transfer conveyor **20**, in one embodiment, the transfer conveyor **20** may also have a smoother surface than the dewatering conveyor **16**. Of particular advantage, felt materials made with small capillary materials have a tendency to produce smooth surfaces.

The dewatering conveyor **16** may be constructed from various conventional materials in accordance with the present invention. For instance, the dewatering conveyor **16** may comprise any suitable felt material. In one particular embodiment, however, there may be advantages to having the dewatering conveyor **16** made from a felt material containing small capillary materials as described above with respect to the transfer felt **20**. In some applications, there may be benefits to constructing the dewatering conveyor **16** out of a material that does not readily release liquids, such as water. For example, in certain applications, rewetting of the tissue web may also occur on the dewatering conveyor **16**.

It should be understood that the embodiment illustrated in **Figure 1** merely represents one configuration of a tissue making process in accordance with the present invention. It should be understood that the process may include many more conveyors that comprise fabrics or felts as the tissue web is being formed. In fact, the dewatering of the web may occur upstream from the transfer conveyor **20**.

The process of the present invention is particularly well suited to producing all different types of tissue products. The tissue products can have, for instance, a basis weight of from about 6 gsm to about 120 gsm. Tissue products that may be produced according to the present invention include paper towels, industrial wipers, and various products.

In one particular embodiment of the present invention, the process is used to produce facial tissue or bath tissue. The facial tissue webs or bath tissue webs can have a basis weight, for instance, of from about 6 gsm to about 45 gsm, such as from about 10 gsm to about 20 gsm. The final product can contain a single ply or can contain multiple plies (2 to 3 plies).

The present invention may be better understood with reference to the following example.

Example 1

The following felt products were tested and compared for minimum pore size, maximum pore size, mean free pore size (MFP), and porosity: Albany Advantech™, Weavex Millennium™, Weavex Hyperpunch™, and AstenJohnson Helix™. Of the above listed felts, the Albany Advantech™ felt possesses the characteristics and properties needed for use in accordance with the present invention. In the past, it is believed that this felt product was used in processes for making highly compressed paper, such as stationery. The purpose of this example is to compare the properties of the Albany Advantech™ felt with the properties of other conventional felts that have been used in tissue making processes in the past.

The following is a description of the test methods.

The test sample is thoroughly wetted with a low-surface tension liquid. The sample is then placed into a porometer, where air pressure is applied to one side of the sample. The air pressure is slowly ramped up. At first, no flow should be detected on the other side of the sample due to the fact that all pores are filled with fluid. Eventually, as pressure is increased, the capillary forces within the largest pores are overcome. This will allow air to pass through and result in a change in flow rate on the detection side. This point is known as the bubble point of the sample. Gradually, the air pressure is increased, causing smaller pores to be dewetted and more air to flow through. The result of this is a flow rate versus applied pressure relationship. At the end of the run, the sample is completely dewetted, and is tested again over the same pressure range, producing a dry curve.

The diameter of a pore that opens at a given pressure can be determined from the equilibrium between the capillary tension of the pore and gravitational forces in the steady state.

$$2\pi r \gamma \cos \theta = r^2 \pi \rho g h$$

where r is the radius of the capillary, γ is the surface tension of the wetting fluid, θ is the contact angle between the fluid and the capillary wall, ρ is the density of the

fluid, g is the gravitation acceleration, and h is the height of the column of fluid in the capillary.

This will reduce to the Washburn equation, since the hydrostatic head can be translated into the pressure required to empty the pore (P), and two times the capillary radius equals the diameter (D).

$$4\gamma \cos \theta = PD$$

Coulter Porofil (a fluorinated hydrocarbon) is used as a wetting agent. The fluid is extremely wetting and saturates the entire pore structure of most materials, resulting in a zero contact angle. Thus, the above equation can be reduced and solved for diameter:

$$D = \frac{4\gamma}{P}$$

Note that this equation assumes that the capillaries (i.e. pores) are cylindrical in nature.

Equipment:

- 15 • Coulter Porometer with 1-inch diameter filter holder assembly installed
- Balance, capable of reading to the nearest 0.0001 gram
- Sample holder
- Thickness tester with platen
- Small stainless steel weighing pan, capable of holding fluid above the top
- 20 surface of the felt samples
- Coulter® Porofil wetting fluid
- Tweezers, or equivalent, to handle samples.

Equipment Settings:

- Wetting Fluid: Porofil
- 25 Size Factor: 0.64
- Full Range Pore Size (Diameter)
 - Minimum: Depends on sample, typically between 2 and 4 μm^*
 - Maximum: 200 μm
- Cal Size (Other Fluid): 1.00
- 30 Data Smoothing: Off

*Note: A trial run must be completed with each sample using the steps below to verify that the minimum diameter selected is correct.

Sample Preparation:

Using a 1" diameter circular die, cut three samples from each felt to be tested. Make sure that die cuts all the way through and does not remove fibers from the sample.

5

Test Procedure

1. Place the sample holder (4 prongs connected to a support structure) onto the balance and tare the reading out.
2. Record the mass of the sample in grams.
3. Record the thickness of the sample in millimeters.
- 10 4. Pour a sufficient amount of Coulter® Porofil (approximately 5 millimeters deep) into a weighing pan to saturate the samples. Make sure that this pan stays sufficiently full for each sample to be tested.
5. Place the sample into the Porofil fluid and allow to soak until no bubbles are seen (approximately 30 seconds to 1 minute).
- 15 6. Remove the sample from the Porofil fluid. Allow excess fluid to drain. Keep sample parallel to the bench top. DO NOT tip to drain, as this may cause premature dewetting of the side structure.
7. Place sample onto the sample holder and record the mass.
8. Place the sample back into the Porofil to ensure that all pores are filled.
- 20 Allow to drain as in step 6.
9. Place the sample into the filter assembly. Minimize the amount of force used to place the sample into the assembly to reduce the possibility of premature dewetting.
10. Place the filter assembly o-ring briefly into the wetting fluid.
- 25 11. Center the o-ring over the top of the sample such that the edges of the o-ring contact the inner diameter of the filter assembly.
12. Screw the filter assembly cap onto the lower section of the assembly. Make sure that the o-ring seals properly to the bottom portion of the cap.
13. Verify that the proper settings for the samples have been set, and that the
30 "Full" window has been selected. If there is existing data, make sure to hit the "Reset" button.

14. Start the test. The porometer will test the sample in the wetted state in the pressure (diameter) range selected, and then repeat the test with the dried sample.
15. When the test is completed, the porometer will transfer the data to a microprocessor. To view the tabulated results from the porometer, press the "Distribution" button. This will provide the minimum, maximum, and mean flow pore sizes.
16. Remove the sample from the filter assembly.
17. Repeat steps 3 through 17 for each remaining sample.

10 Collection of Results

The porometer collects 256 data points (pressure and flow) across the entire pressure range selected for both the wet and dry curves. The first detectable flow during pressure ramp up is termed the bubble point, and indicates the largest pore size found in the sample. Note that the largest diameter is found at the smallest pressures, and vice versa.

The minimum pore size is determined by the pressure at which the wet flow reaches 98% of its maximum value.

Finally, the mean flow pore size, or MFP, corresponds to the pressure value where the curve given by (50% x dry flow) crosses the wet flow curve.

20 Results

The results obtained are shown in the table below. For each sample, three repeats were completed. The minimum pore size, maximum pore size, mean free pore size (MFP), and the porosity are shown.

	Min Pore (μm)	MFP (μm)	Max Pore (μm)	Porosity
Weavex Hyperpunch™	5.53	22.88	77.46	0.62
Albany Adfvantech™	3.80	13.34	64.24	0.56
Weavex Millennium™	5.53	25.94	83.32	0.76
AstenJonson Helix™	6.81	25.18	77.16	0.67

- 25 According to the results collected, the Albany felt had the tightest pore structure.

Example 2

The same felt products tested above were then tested and compared for their fluid intake rate. In this example, the characteristics of the Albany felt were again compared to the characteristics of the remaining felts.

5 The following is a description of the fluid intake rate test. As used herein, the fluid intake rate test is measured after the samples have been wetted.

10 The Kruss Drop Shape Analyzer (DSA) employs a high speed digital video camera and an automated fluid delivery system to dispense and measure the properties of a fluid drop on a given substrate surface. From the video capture system, the intake rate and contact angle of the drop can be measured.

15 Intake rate can be used in determining the relative ease of fluid absorption into a given structure. The intake rate is dependent upon the porosity, pore size distribution, and surface energy of the wetted material. For this test, the samples were pre-wetted to remove the effects of surface energy. Thus, contact angle does not need to be measured. In this configuration, the intake rate will provide a relative indication of the pore structure on the upper surface of the felt.

Equipment

Kruss Drop Shape Analyzer Model DSA10 (instrument + computer)

Kruss NE 43 syringe tip with removable PTFE-tube

20 Equipment Settings

Target Volume: 14.1 μL

Delivery Rate: 10 $\mu\text{L}/\text{min}$

Collect Every Nth Frame: 2 (120 fps)

Collect for: 10 seconds (1200 total frames)

25 Test Fluid: Deionized Water

XYZ Table should be adjusted such that it is centered under the fluid delivery needle. Height of the table should be adjusted such that the top of a sample is visible in the video window, but the table is not visible. The distance between the top of the XYZ table and the fluid delivery needle should be 7 mm.

30 Sample Preparation

1. Cut a 1.5 cm x 1.5 cm (approximate) square from the felt to be tested. Cut approximately 10 samples from various sections of the felt. Use heavy duty scissors to avoid accidental removal of fibers from the cut sample.

2. Place each sample (in order) into a deionized water bath. Allow the samples to soak for at least 15 minutes, but no more than 30 minutes.
3. Prior to testing, place each sample onto a dry piece of blotter paper for 30 seconds to remove excess water.

5 Test Procedure

1. Remove a sample from the soaking tray. Remove excess fluid by blotting the sample for 30 seconds.
2. Center the sample under the fluid delivery needle. Verify that the sample is positioned correctly in the frame grabber (FG) window.
- 10 3. Press the *Record* button on the DSA program window. Video will be paused.
4. Insult the sample. When fluid delivery is started, the video window will start recording.
5. Save the video when completed.
- 15 6. Open the video
7. Determine the time (in ms) at which the drop first contacted the surface of the felt as t_0 .
8. Determine the last frame in which the drop is visible. Record the time (in ms) as t_1 .
- 20 9. Remove the sample and repeat as necessary.

Results

The intake time for each repeat is calculated using the following formula:

$$t_{\text{intake}} = t_1 - t_0$$

Report the average intake time for each code. The following Results were
25 obtained:

Fluid Intake Rate (uL / s)

Repeat	Albany Advantech	Weavex Millennium	Weavex Hyperpunch	AstenJohnson Helix
1	76.6	199	282	239
2	62.7	126	239	282
3	41.2	199	261	336
4	60.3	170	227	243
5	52.0	141	243	214
6	38.5	141	282	224
7	65.0	210	282	199

8	66.5	153	243	227
9	45.2	199	336	227
10	43.5	214	256	282
Average	55.2	175	265	247

The results are also graphically illustrated in **Figure 3**. As shown in **Figure 3**, the Albany felt had a much lower fluid intake rate than the conventional felts.

These and other modifications and variations to the present invention may
5 be practiced by those of ordinary skill in the art, without departing from the spirit
and scope of the present invention, which is more particularly set forth in the
appended claims. In addition, it should be understood that aspects of the various
embodiments may be interchanged both in whole or in part. Furthermore, those of
ordinary skill in the art will appreciate that the foregoing description is by way of
10 example only, and is not intended to limit the invention so further described in such
appended claims.

What Is Claimed:

1. A method of producing a tissue product comprising:
depositing an aqueous suspension of papermaking fibers onto a
forming fabric to form a wet web;
dewatering the wet web to a consistency of at least about 30%;
5 conveying the dewatered web onto a transfer felt, the transfer felt
having an intake rate of less than about 150 $\mu\text{L/s}$;
transferring the web from the transfer felt to a fabric and deflecting
the web against the fabric; and
conveying the web onto a drying drum and creping the web from the
10 drum.
2. A method as defined in claim 1, wherein the transfer felt has an
intake rate of less than 100 $\mu\text{L/s}$, such as less than 75 $\mu\text{L/s}$, such as less than
65 $\mu\text{L/s}$.
3. A method as defined in claim 1 or 2, wherein the transfer felt has a
mean free pore size of less than about 20 microns.
4. A method as defined in claim 1 or 2, wherein the transfer felt has a
mean free pore size of less than about 18 microns, such as less than 15 microns
and has a minimum pore size of less than about 4.5 microns, such as less than 4
microns.
5. A method as defined in claim 1 or 2, wherein the transfer felt has a
minimum pore size of less than about 5 microns.
6. A method as defined in any of the preceding claims, wherein the wet
web is dewatered by being passed through a press nip.
7. A method as defined in claim 6, further comprising the step of
transferring the wet web from the forming fabric to a dewatering felt, the press nip
being located between the dewatering felt and the transfer felt.
8. A method as defined in any of the preceding claims, wherein the
transfer felt comprises a felt material coated with a hydrophobic material.
9. A method as defined in any of the preceding claims, wherein the web
has a consistency of from about 30% to about 70% after being dewatered.

10. A method as defined in any of the preceding claims, wherein the consistency of the web decreases by no more than 2%, such as no more than 1% when the web is transferred from the transfer felt to the fabric.
11. A method as defined in any of the preceding claims, wherein the final dried web has a basis weight of from about 10 to about 25 gsm.
12. A method as defined in any of claims 1 through 10, wherein the final dried web has a basis weight of from about 30 to about 80 gsm.
13. A method as defined in any of the preceding claims, wherein a suction force against the fabric is used to transfer the web from the transfer felt and to deflect the web against the fabric.
14. A system for producing a tissue product comprising:
a dewatering felt for receiving a wet web comprising papermaking fibers;
a transfer felt for receiving the web from the dewatering felt, the
5 transfer felt having an intake rate of less than about 150 $\mu\text{L/s}$;
a press nip located in between the dewatering felt and the transfer felt, the press nip dewatering the wet web prior to being transferred to the transfer felt;
a fabric for receiving the dewatered web from the transfer felt, the
10 fabric being in communication with a suction force for transferring the web from the transfer felt to the fabric and for deflecting the web against the fabric; and
a drying drum positioned downstream from the fabric for receiving the web, the drying drum including a creping blade for creping the web from the drum.
15. A system as defined in claim 14, wherein the transfer felt has an intake rate of less than about 100 $\mu\text{L/s}$, such as less than 75 $\mu\text{L/s}$, such as less than 65 $\mu\text{L/s}$, has a mean free pore size of less than about 20 microns, such as less than 18 microns, such as less than 15 microns, and has a minimum pore size of less than about 5 microns, such as less than 4.5 microns, such as less than 4 microns.
16. A system as defined in claim 14 or 15, wherein the transfer felt comprises a felt material coated with a hydrophobic material.

17. A system as defined in claim 14, 15, or 16, further comprising a headbox and a forming fabric positioned upstream from the dewatering felt, the headbox being configured to deposit an aqueous suspension of papermaking fibers onto the forming fabric in order to form the wet web.

18. A system as defined in claim 14, 15, 16, or 17, wherein the press nip comprises a suction roll positioned opposite a press roll.

19. A system as defined in claim 14, 15, 16, 17, or 18, wherein the press nip comprises a stationary shoe being positioned opposite a press roll.

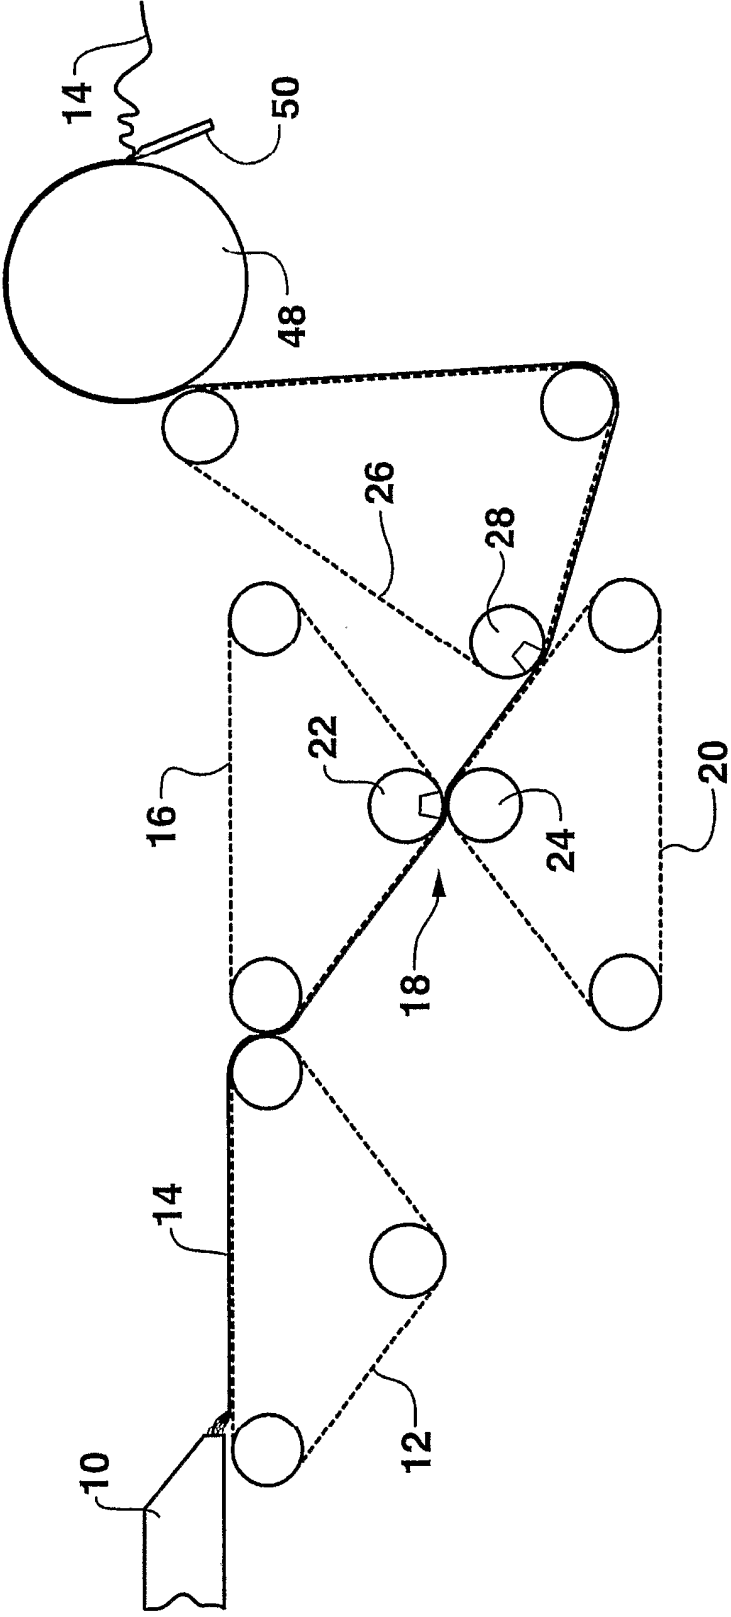


FIG. 1

2 / 3

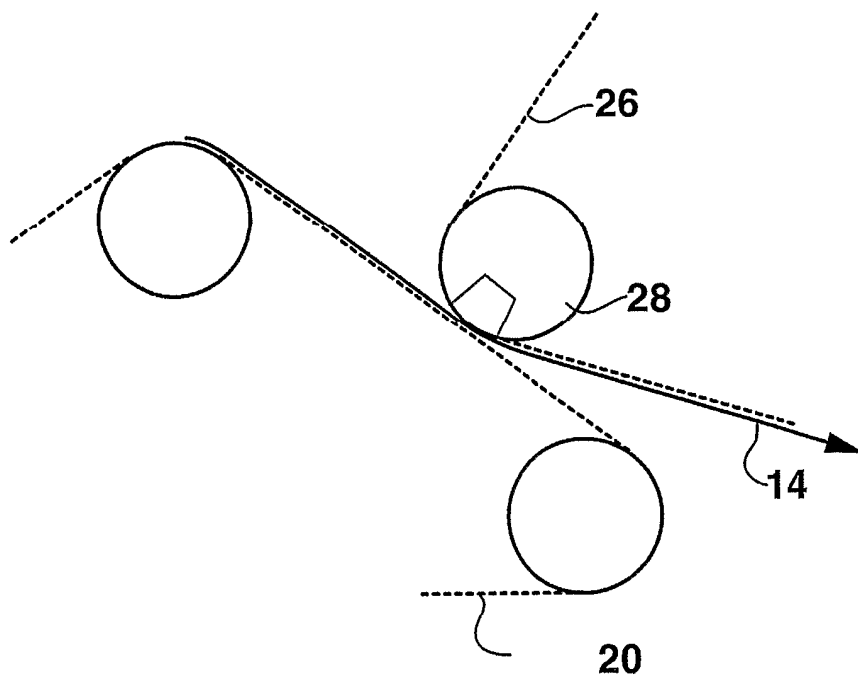


FIG. 2

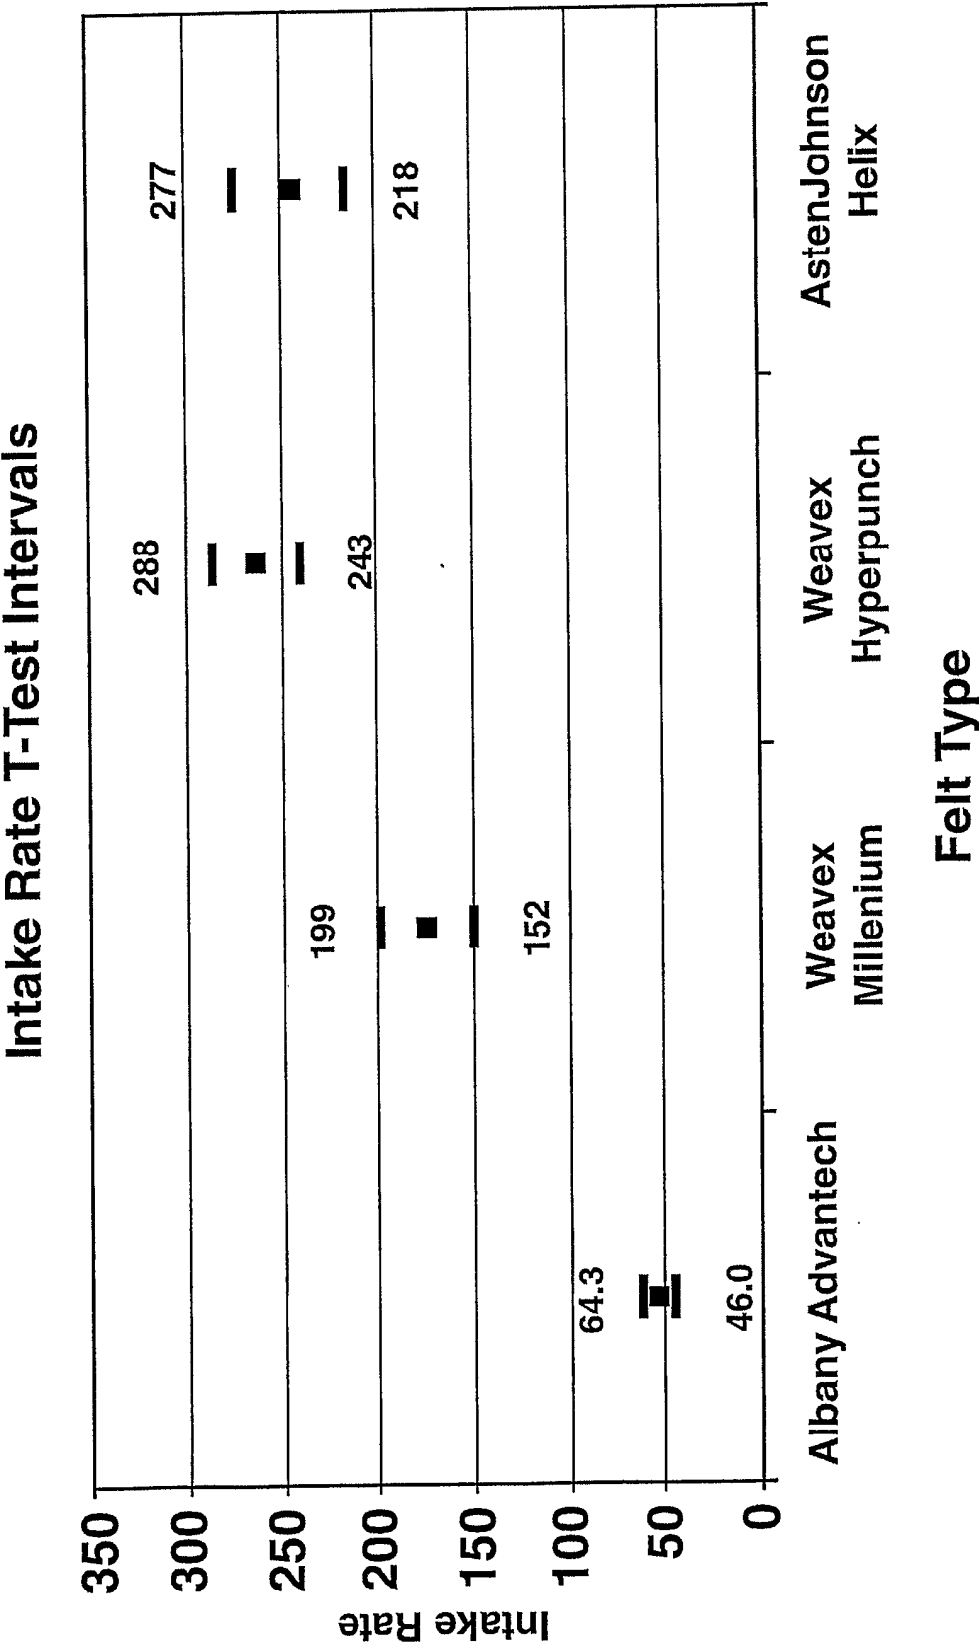


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2005/033793

A. CLASSIFICATION OF SUBJECT MATTER

D21F11/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 625 610 A (KIMBERLY-CLARK CORPORATION; KIMBERLY-CLARK WORLDWIDE, INC) 23 November 1994 (1994-11-23) cited in the application the whole document -----	1-19
A	US 6 423 186 B1 (TROKHAN PAUL DENNIS ET AL) 23 July 2002 (2002-07-23) the whole document -----	1-19
A	EP 0 400 843 A (VALMET-AHLSTROM INC) 5 December 1990 (1990-12-05) the whole document -----	1-19
A	US 6 193 839 B1 (AMPULSKI ROBERT STANLEY ET AL) 27 February 2001 (2001-02-27) the whole document ----- -/-	1-19

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

31 January 2006

Date of mailing of the international search report

06/02/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Karlsson, L

INTERNATIONAL SEARCH REPORT

International application No

PC 17US2005/033793

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 309 246 A (HULIT ET AL) 5 January 1982 (1982-01-05) the whole document -----	1-19
A	US 4 561 939 A (JUSTUS ET AL) 31 December 1985 (1985-12-31) the whole document -----	1-19
A	US 4 482 429 A (KLOWAK ET AL) 13 November 1984 (1984-11-13) the whole document -----	1-19
A	US 5 178 732 A (STEINER ET AL) 12 January 1993 (1993-01-12) the whole document -----	1-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2005/033793

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0625610	A	23-11-1994	AU 692127 B2 28-05-1998
			AU 3749097 A 11-12-1997
			AU 685339 B2 15-01-1998
			AU 4202996 A 18-04-1996
			AU 685340 B2 15-01-1998
			AU 4203096 A 18-04-1996
			AU 686037 B2 29-01-1998
			AU 4203196 A 18-04-1996
			AU 686038 B2 29-01-1998
			AU 4203296 A 18-04-1996
			AU 669972 B2 27-06-1996
			AU 5942894 A 24-11-1994
			CA 2105024 A1 22-11-1994
			DE 69421564 D1 16-12-1999
			DE 69421564 T2 29-06-2000
			ES 2138008 T3 01-01-2000
			US 5411636 A 02-05-1995
			US 5505818 A 09-04-1996
			US 5510001 A 23-04-1996
			US 5492598 A 20-02-1996
			US 5510002 A 23-04-1996
US 6423186	B1	23-07-2002	NONE
EP 0400843	A	05-12-1990	CA 2017864 A1 02-12-1990
			CN 1047715 A 12-12-1990
			FI 892705 A 03-12-1990
			JP 3008882 A 16-01-1991
US 6193839	B1	27-02-2001	NONE
US 4309246	A	05-01-1982	NONE
US 4561939	A	31-12-1985	BR 8501268 A 19-11-1985
			CA 1238218 A1 21-06-1988
			DE 3566817 D1 19-01-1989
			DE 159280 T1 30-04-1986
			EP 0159280 A1 23-10-1985
			ES 8607449 A1 01-11-1986
			FI 850627 A 27-09-1985
			IN 161969 A1 05-03-1988
			JP 1010636 B 22-02-1989
			JP 60215893 A 29-10-1985
			KR 8701626 B1 17-09-1987
			PH 21616 A 11-12-1987
US 4482429	A	13-11-1984	NONE
US 5178732	A	12-01-1993	CA 2049436 A1 18-02-1992
			DE 4042480 C2 10-02-2000
			FI 913886 A 18-02-1992
			JP 3208491 B2 10-09-2001
			JP 6010291 A 18-01-1994