


19  Europäisches Patentamt  
European Patent Office  
Office européen des brevets



11 Publication number : 0 425 014 B1

12 **EUROPEAN PATENT SPECIFICATION**

45 Date of publication of patent specification :  
19.01.94 Bulletin 94/03

61 Int. Cl.<sup>5</sup> : H01S 3/06, G02B 6/28,  
H04B 10/12

21 Application number : 90202736.6

22 Date of filing : 15.10.90

54 Amplifier for optical fiber telecommunication lines and optical fiber telecommunication lines incorporating said amplifier.

30 Priority : 24.10.89 IT 2212089

73 Proprietor : PIRELLI CAVI S.p.A.  
Piazzale Cadorna, 5  
I-20123 Milano (IT)

43 Date of publication of application :  
02.05.91 Bulletin 91/18

72 Inventor : Grasso, Giorgio  
Via Canesi, 8  
I-20052 Monza (Milano) (IT)  
Inventor : Righetti, Aldo  
Via Tolstol, 49  
I-20146 Milano (IT)  
Inventor : Fontana, Flavio  
Via Clerici, 14  
I-20032 Cormano (Milano) (IT)

45 Publication of the grant of the patent :  
19.01.94 Bulletin 94/03

84 Designated Contracting States :  
AT BE CH DE DK ES FR GB IT LI LU NL SE

58 References cited :  
EP-A- 0 143 561  
EP-A- 0 293 289  
14TH ECOC, 11th - 15th September 1988,  
pages 25-27; R.I. LAMING et al.: "Optimal  
pumping of erbium-doped-fibre optical amplifiers"  
IEEE PHOTONICS TECHNOLOGY LETTERS,  
vol. 1, no. 9, September 1989, pages 267-269;  
P.C. BECKER et al.: "High-gain and high-  
efficiency diode laser pumped fiber amplifier  
at 1.56  $\mu\text{m}$ "

74 Representative : Marchi, Massimo et al  
c/o Marchi & Mittler s.r.l. Viale Lombardia 20  
I-20131 Milano (IT)

EP 0 425 014 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

The present invention relates to an amplifier of the so-called active-core type for optical fiber telecommunication lines and to the optical fiber telecommunication lines incorporating said amplifiers.

The so-called active-core amplifiers consist of a length of active-core optical fiber which will be defined in the following and a source of optical pumping radiation which will be defined in the following as well.

An active-core optical fiber is an optical fiber the core of which, made of silica glass, contains active dopants as hereinafter defined, in addition to the dopants necessary to make said core have a refractive index higher than that of the cladding, that is the radially outermost layer made of silica glass as well.

The above mentioned active dopants are formed with substances such as rare-earths, erbium and the like for example, which, when excited by an optical radiation named optical pumping radiation, the wavelength of which depends on the particular dopants selected, have the property of emitting an optical radiation named emission radiation which has a different wavelength still depending however on the particular dopant selected.

Another feature of the active dopants referred to hereinbefore is the fact that, once excited by the optical pumping radiation, they are capable of emitting said optical emission radiation in a massive way when an optical radiation of the same wavelength as the latter impinges on them.

The source of optical pumping radiation is generally a laser and in particular a laser diode capable of emitting an optical radiation of the same wavelength as the one required and necessary for exciting the active dopants present in the optical fiber core having an active core as previously defined.

Active-core amplifiers for optical fiber telecommunication lines are already known in the art.

An optical fiber amplifier having an active core for optical fiber telecommunication lines comprises a source of optical pumping radiation optically connected to a dichroic coupler to which one portion of optical fiber of the transmission or telecommunication line is optically coupled.

In turn the dichroic coupler is directly connected to the optical fiber length having an active core and this first length is in turn connected again to a second optical fiber portion of the transmission or telecommunication line.

In the above known amplifier the source of optical pumping radiation, through the dichroic coupler, sends its own radiation to the length of active-core optical fiber where it causes the excitation of the active dopants present therein.

Also sent to the length of active-core optical fiber through the dichroic coupler, are the signals to be amplified coming from the first optical fiber portion of the

telecommunication line which necessarily must have a wavelength identical to the emission wavelength of the active dopants present in the length of active-core optical fiber.

At the moment at which an optical signal enters the length of active-core optical fiber it encounters the dopants in an excited condition due to the optical pumping radiation and, for the reason set forth before, a massive emission of optical radiation occurs which has the same wavelength as the signal one, which brings about, as a result, the amplification of said signal.

In the amplifiers in question and previously described, there is the problem of increasing their yield, intended as the ratio between the obtainable amplification gain and the applied pumping radiation power, while at the same time conceiving the accomplishment of amplifiers on a large scale, capable of offering a sufficient reliability so as to enable them to be used in practical applications, such as for example their easy and safe insertion in optical fiber telecommunication lines.

In the publication "Fourteenth European Conference on Optical Communication" of September 11-15, 1988, on pages 25 to 28, there are the gain values of known amplifiers, which are included between 0.14 and 0.31 dB/mW. For the purpose of improving the gain of optical amplifiers, set forth in the same publication are the experimental results of the gain obtained with an optical amplifier made in laboratory in which the length of active-core optical fiber, single-mode both to signal and pumping optical radiations, contains erbium as active dopant, the source of optical pumping radiation used has a wavelength of 980 nm and the optical signal radiation used has a wavelength of 1536 nm.

Even if it has not been specified in the publication in question, the dichroic coupler adopted in the optical amplifier hereinbefore described is inevitably a dichroic coupler of the so-called microoptics type, that is a dichroic coupler in which lenses are used in order to be able to introduce the optical pumping and signal radiations into the length of active-core optical fiber; this is due to the fact that the dichroic coupler of the other existing types are unable to operate in a satisfactory manner with the particular length of active-core optical fiber in question.

By adopting this known solution a yield of 2.2 dB/mW, intended as the ratio between the gain and the pumping power used, can be reached, which value is interesting, but this amplifier has the drawback that it is not reliable for use on a large scale due to the particular dichroic coupler adopted therein.

In fact a dichroic coupler of the microoptics type is very delicate in itself and it can be hardly inserted in an optical fiber telecommunication line, which brings about the unreliability of the telecommunication lines which should incorporate such amplifiers.

The present invention aims at providing optical amplifiers with a yield as above defined higher than known ones and in particular with a yield up to 4.5 dB/mW, which amplifiers are not only reliable for a large scale industrial use, but are also capable of simplifying to the maximum degree the operations necessary for their introduction into the optical fiber telecommunication lines, making the latter more reliable too.

It is therefore an object of the present invention an amplifier for signal-transmitting optical fiber telecommunication lines which can be interposed between one portion of the optical fiber of the line and a second portion of the optical fiber of the line, comprising a source of optical pumping radiation, a dichroic coupler adapted to be connected to the first portion of the line and connected to the source of optical pumping radiation and a length of active-core optical fiber, single-mode to both signal and pumping optical radiations, having one end connected to the dichroic coupler and the other end susceptible of being connected to said second optical fiber portion of the line, said amplifier being characterized in that the dichroic coupler is of the type comprising two lengths of non-active-core optical fiber disposed in side by side relation over a portion of their length where they are optically coupled to each other by fusion of the respective claddings and substantial setting in common of the respective cores by stretching the lengths themselves, both said optical fiber lengths forming the dichroic coupler being single-mode both for the optical signal radiation and optical pumping radiation.

It is another object of the present invention an optical fiber telecommunication line comprising at least one signal-transmitting optical fiber portion and at least a second signal-transmitting optical fiber portion optically connected to each other through an optical amplifier interposed therebetween, said optical amplifier comprising a source of optical pumping radiation, a dichroic coupler optically associated with the source of optical pumping radiation and with the first signal-transmitting optical fiber portion of the line, a length of active-core optical fiber, single-mode both to signal and pumping optical radiations downstream of the dichroic coupler and optically connected thereto, said length of active-core optical fiber being also optically connected to the second signal-transmitting optical fiber portion of the line, said line being characterized in that the dichroic coupler is of the type comprising two lengths of nonactive-core optical fiber disposed in side by side relation over one portion of their length where they are optically coupled to each other by fusion of the respective claddings and substantial setting in common of the respective cores by stretching the lengths themselves, both optical fiber lengths of the dichroic coupler being single-mode both for signal and pumping optical radiations.

The present invention will be best understood

from the following detailed description carried out by way of non-limiting example with reference to the figures of the accompanying drawing sheet, in which:

- Fig. 1 diagrammatically shows a line in accordance with the invention;
- Fig. 2 diagrammatically shows an amplifier according to the invention;
- Fig. 3 diagrammatically shows a component of the inventive amplifier.

Shown in Fig. 1 is an optical fiber telecommunication line comprising an optical amplifier in accordance with the invention, and therefore an optical fiber telecommunication line in accordance with the invention.

As viewed in Fig. 1, said line comprises a transmitter 1 of any known type, capable of sending optical signals to a signal-transmitting optical fiber, which therefore will not be described herein.

Transmitter 1 has the particular feature of incorporating a source of signal-emitting optical radiation the wavelength of which is adapted for the operation of an optical amplifier such as for example a DFB laser diode capable of emitting an optical radiation having a wavelength of 1536 nm.

However, the above mentioned example of source of optical signal radiation which is the one usually adopted in the optical fiber telecommunication field, must not be intended in a limiting sense as regards the scope of the present invention.

Downstream of the transmitter 1 the line comprises one portion 2 of signal transmitting optical fiber which is optically connected at one end thereof to said transmitter.

The first optical fiber portion 2 has the other end optically connected to an optical amplifier 3 according to the invention the characteristics of which will be described in the following.

Downstream of the amplifier 3 and optically coupled thereto there is a second optical fiber portion 4 the characteristics of which are the same as those of the first optical fiber portion 2.

The optical fiber portion 4, one end of which is optically connected to the optical amplifier 3, has the other end optically connected to an optical receiver 5 of any known type, which therefore will not be described.

The optical amplifier 3 in accordance with the invention, present in the previously described optical fiber telecommunication line in accordance with the invention is diagrammatically shown in Fig. 2.

As viewed in Fig. 2, the optical amplifier comprises a particular dichroic coupler 6, which will be described in detail in the following, to which a source 7 of optical pumping radiation is optically coupled as well as a length of active-core optical fiber 8 located downstream of the dichroic coupler 6.

In an optical amplifier in accordance with the invention the length of active-core optical fiber is of the

single-mode type both for optical signal radiation and optical pumping radiation.

For example in an optical amplifier according to the invention the length of active-core optical fiber, still containing trivalent erbium uniformly dispersed in said core as active dopant, has a core diameter of 5.4  $\mu\text{m}$  in general the core diameter in the length of active-core optical fiber is in the range of 5.2 to 5.6.

On the contrary the cladding outer diameter of the length of active-core optical fiber is for example of 125  $\mu\text{m}$ , as it is usual in optical fibers.

In the active-core optical fiber the ratio relating to the difference between the refractive index of the core and of the cladding with respect to the refractive index of the cladding, which is generally included between 0.0051 and 0.0058, is 0.0056 for example.

In the exemplificative case and when the length of the active-core optical fiber has a cladding made of silica glass and devoid of any dopant and therefore a refractive index of 1.450, the core of said active-core optical fiber has a refractive index of 1.458.

The dichroic coupler 6 of an amplifier in accordance with the invention, as shown in Fig. 3 on an enlarged scale, consists of two optical fiber lengths 9 and 10, which are both made of silica glass and devoid of active dopants, parallel to each other and coupled by fusion of the respective claddings and stretched immediately afterwards, so that after said operation in the area in which the claddings are joined together by fusion, the cores become substantially coincident over a portion 11 (Fig. 3) thereby practically giving rise to a sole core.

In particular one of the characteristics of a dichroic coupler in an amplifier of the invention is that at the coupling area of the two optical fiber lengths constituting it, where they have the respective cores set in common giving substantially rise to a sole core, the diameter of the sole core may be smaller than the diameter of the core of each optical fiber length at the ends thereof and in particular the ratio between the diameter of the substantially common core of the two optical fiber lengths and the diameter of the core of the latter at their ends may be included between 0.3 and 0.5.

The diameter of the substantially common core of the two optical fiber lengths constituting the dichroic coupler is generally selected of such a value as to cause therein an optical power loss not higher than 1 dB.

Value ranges generally valid for any dichroic coupler of an optical amplifier in accordance with the invention cannot be reported, since for determining the diameter value of the substantially common core adapted for the purposes of the present invention, there is the intervening of the particular wavelengths of the optical signal and pumping radiations adopted, which can remarkably vary from one another; however a technician skilled in the art and only in posses-

sion of the above statement of a power loss not higher than 1 dB, is capable of coming at least experimentally to the determination of said diameter value of the substantially common core of the two optical fiber lengths in the dichroic coupler.

For example in the case of a 980-nm wavelength of the optical pumping radiation and a 1536-nm wavelength of the optical signal radiation, the diameter of the substantially common core of the two optical fiber lengths is in the range of 1.56 to 2.8  $\mu\text{m}$ .

In a dichroic coupler which can be used for the accomplishment of an amplifier in accordance with the invention also the length of the portion over which the cores of the two optical fiber lengths are substantially in common depends on the particular wavelengths of the adopted pumping and signal radiations.

Should for example said pumping and signal wavelengths be 980 and 1536 nm respectively, the length of said portion will be comprised between 0.9 and 1.2 cm. A general standard for determining the length of the above portion is that said length must cause both pumping and signal radiations to be entirely and exclusively conveyed towards only one of the two terminals of the dichroic coupler facing the length of active-core optical fiber; by this sole indication a technician skilled in the art is capable of accomplishing a dichroic coupler having such a characteristic during the construction of the dichroic coupler itself.

In fact, by coupling one of the ends of the two optical fiber lengths to the sources of optical pumping radiation and optical signal radiation respectively, before melting the claddings in the portion in which they are disposed in side by side relation it is possible to stop the stretching applied to said lengths during the fusion of their claddings at the moment at which no optical radiation is issuing from one alone of the two other ends, whereas both signal and pumping optical radiations are issuing from the other end.

Another characteristic of a dichroic coupler 6 for an amplifier in accordance with the invention is that the two optical fiber lengths 9 and 10 forming it must be both single-mode both to the signal and pumping optical radiations used in the line.

Still another characteristic of a dichroic coupler for an amplifier in accordance with an embodiment of the invention is that the distribution of the nonactive dopants in the core and cladding of the optical fiber component portions must be substantially identical to the distribution of the nonactive dopants present in the length of active-core optical fiber.

As previously said, the inventive optical amplifier consists of the assembly of one length of active-core optical fiber having the above stated characteristics and a dichroic coupler in series with the length of active-core optical fiber and as previously described as regards the characteristics thereof.

Preferably in an optical amplifier in accordance

with the invention, for the purpose both of achieving an easy and safe coupling to the optical fiber portions of the signal transmitting line and enabling an easy and safe coupling between the two components of the amplifier, there is also the characteristic hereinafter set forth.

The mode diameter to the wavelength of the transmission signals, defined and detectable according to CCITT Rule G 652 of 1976, relating to the optical fiber lengths forming the amplifier and therefore to the length of active-core optical fiber and to the two lengths of optical fibers forming the dichroic coupler is substantially identical to the mode diameter to said signal wavelength of the optical fiber portions of the telecommunication line to which the amplifier is designed to be coupled.

With the above stated features of the components of an amplifier in accordance with the invention, the junction of said components to one another and of them all together to the optical fiber portions of the line is carried out by mere butt melting, that is the ends of the different types of optical fibers involved are joined without practically incurring losses during the couplings.

In particular, as shown in Fig. 2, the coupling between the end of the signal transmitting optical fiber portion 2 of the line is joined by butt welding to one end of the optical fiber length 9 of the dichroic coupler 3.

In turn the other end of the optical fiber length 9 of the dichroic coupler 3 is joined by butt welding to one end of the length of active-core optical fiber 8 the other end of which is joined by butt welding to the portion of the transmission optical fiber 4 of the telecommunication line.

Finally, the source 7 of optical pumping radiation (consisting for example of a In-Ga-As laser diode known per se and capable of emitting a 980-nm optical radiation which is the one used in the case in which the active-core optical fiber is doped with trivalent erbium and the signal is a 1536-nm wavelength optical radiation) is optically coupled to one end of the optical fiber length 10 of the dichroic coupler.

Operation of an amplifier in accordance with the invention and of a line in accordance with the invention incorporating said amplifiers, will be now described with reference to the figures of the accompanying drawing sheet concerning particular embodiments of the invention.

The transmitter 1 of a type known per se and commonly used in optical fiber telecommunication lines emits signals using an optical radiation having a wavelength of substantially 1536 nm which, as is known, is the wavelength for transmission signals enabling the minimum attenuation to be achieved within the transmission optical fibers of the line, identified by reference numerals 2 and 4 in Fig. 1.

Signals sent from transmitter 1 to the portion of

optical fiber 2 are at all events subjected to an attenuation while being transmitted therein and they enter the optical fiber length 9 of the dichroic coupler 6 in the amplifier 3 with said attenuation.

Still sent in a continuous way to the dichroic coupler 6 and more precisely to the optical fiber length 10 of the same is the pumping optical radiation emitted from the laser diode 7.

Said optical pumping radiation which, as previously said, is selected by way of example for an amplifier in accordance with the invention and for a 980-nm wavelength line in accordance with an embodiment of the invention, is overlapped in the dichroic coupler to the attenuated optical signal radiation of 1536-nm wavelength, coming from the transmission optical fiber portion 2 of the line.

In particular, the overlapping of the two signal and pumping optical radiations within the dichroic coupler takes place in the region 11 where the two cores of the optical fiber component lengths have been made substantially coincident, as clearly shown in Fig. 3.

Since the two optical fiber lengths 9 and 10 forming the dichroic coupler 3 are both single-mode to both signal and pumping optical radiations, both optical radiations issuing from the dichroic coupler are overlapped and single-mode.

In addition, with the use of a dichroic coupler in which the distribution of nonactive dopants is identical to that of the nonactive dopants existing in the length of active-core optical fiber, losses of optical energy in the optical radiations summed to each other in the amplifier do not occur.

In particular, both signal and pumping radiations sent to the input of the dichroic coupler (due to its above stated characteristics) only along the optical fiber length 9 facing the length of active-core optical fiber 8 and, since the distribution of nonactive dopants is the same in the components of the dichroic coupler and in the length of active-core optical fiber, no loss can occur when said components are coupled, as no alteration in the single-mode distribution of power of the two optical radiations can take place in the junction area of said components.

From the foregoing it results that entering the length end of the active-core optical fiber 8 facing the dichroic coupler 3 are simultaneously and without losses both the whole optical pumping radiation with its utmost power and the optical signal radiation attenuated by effect of its passage through the optical fiber portion 2 but with the utmost power when the latter comes out of said optical fiber 2.

Since, as above said, the distribution of the nonactive dopants in the optical fiber lengths forming the coupler is substantially identical to that of the nonactive dopants present in the length of active-core optical fiber, also no alteration occurs in the optical radiations during the passage of the same from the di-

chroic coupler to the length of active-core optical fiber.

In addition, due to the fact that also the length of the active-core optical fiber is single-mode both to pumping and signal optical radiations, the input and spreading of both radiations therein takes place so that the power distribution of said radiations is kept symmetric relative to the axis of the length of active-core optical fiber.

The optical pumping radiation passing through the core of the active-core optical fiber length 8 causes the excitation of the active dopant present therein. Said active dopant excited by the optical pumping radiation, at the instant at which it is hit by the optical signal radiation, emits a radiation having the same wavelength, which results in the amplification of the optical signal.

The optical signal so amplified is sent to the portion of transmission optical fiber 4 of the line and reaches the receiver 5.

Experimental tests have been carried out with an amplifier in accordance with the invention and the test modalities as well as the results achieved will be set forth in the following.

The particular inventive amplifier submitted to experimental tests has the following structure.

The length of active-core optical fiber adopted is of the step index type and is devoid of nonactive dopants in the cladding which is made of silica glass and therefore has a 1.45 refractive index, whereas it contains germanium in the core as a nonactive dopant, to an amount sufficient to give it a 1.458 refractive index; in addition said length of active-core optical fiber has a 5.4  $\mu\text{m}$  core diameter and a 125  $\mu\text{m}$  outer diameter of the cladding.

The core of the active-core optical fiber length in question besides containing the above stated nonactive dopants, also contains trivalent erbium ions as the active dopant, which are uniformly dispersed in said core with a concentration of 0.3% by weight, expressed as erbium oxide.

Finally the length of active-core optical fiber used in the experimental test is 8 m long.

The dichroic coupler used has the two optical fiber component lengths equal to each other, of the index step type, made of silica glass and both single-mode both to the optical signal radiation and to the optical pumping radiation in which the nonactive dopant content and distribution is identical to that of the nonactive dopants of the active-core optical fiber length.

In particular in said optical fiber lengths forming the particular dichroic coupler used, the diameters and refractive indices for the core and the cladding are the same as those for the length of active-core optical fiber; in addition, the portion of mutual coupling between the two optical fiber lengths where said optical fibers have substantially in common the

respective cores is 0.9 cm long and the diameter of the core where said core is substantially in common for both optical fiber lengths is 2.1  $\mu\text{m}$ .

Finally the ratio between the diameter of the core substantially common to the two optical fiber lengths forming the dichroic coupler and the diameter of the core of the same lengths at their ends is 0.4.

The optical pumping radiation source used is a In-Ga-As laser diode emitting a continuous optical radiation of 980-nm wavelength and 6-mW power.

In the experimental test two optical fiber portions of the type normally used in optical fiber telecommunication lines with a mode diameter to the signal radiation equal to that of the optical fiber lengths forming the amplifier have been also adopted.

For the experimental test, used as the source of optical signal radiation has been a DFB laser diode emitting an optical radiation of 1536-nm wavelength with a 100-mW power and for which the portions of signal transmitting optical fibers are single-mode only for the signal optical radiation and multimode for the pumping optical radiation.

The above listed different components have been assembled as follows.

The source of optical signal radiation has been optically coupled to the end of a signal transmitting optical fiber portion so that practically the whole radiation issued from the signal source is introduced into said optical fiber portion.

The other end of the above cited optical fiber portion has been joined by butt welding to the end of one of the optical fiber lengths of the dichroic coupler.

In addition the source of optical pumping radiation as above specified has been coupled to the end of the optical fiber length of the dichroic coupler disposed in side by side relation to the length to which the portion of signal transmitting optical fiber has been joined so that the whole power issued therefrom, which is 6 mW, penetrates into the optical fiber portion of the dichroic coupler in question.

Connected by butt welding to the end of the optical fiber length of the dichroic coupler from which both signals are capable of coming out, is one end of the active-core optical fiber length the characteristics of which have been previously stated.

Butt welded to the other end of the length of active-core optical fiber is one end of the other portion of signal transmitting optical fiber.

The apparatus for carrying out the experimental tests has been completed by coupling the end of the signal transmitting optical fiber portion opposite that directly coupled to the length of active-core optical fiber to an intensity detector designed to detect the intensity of the radiation coming out of said optical fiber portion, in particular to a PIN photodiode.

From the experimental tests carried out it has been possible to notice that by using a pump source emitting a 980-nm wavelength pumping radiation with

a 6-mW power, the obtained gain for the adopted optical signal radiation, which is 1536 nm, is 25 dB.

It results therefore from the experimental tests that the obtained yield, expressed as a ratio between the gain and the power of the optical pumping radiation used, is 4.1 dB/mW.

Since the minimum yield which can be reached with the known amplifiers of the type in question appears to be 2.2 dB/mW, as can be drawn from the relevant literature, the results achieved with the experimental tests prove that the present invention has reached the previously stated purpose of improving the yield of said amplifiers by 100%.

Furthermore, from the above description of the particular embodiments it also appears that the accomplishment of an amplifier in accordance with the invention, as well as its insertion in an optical fiber telecommunication line, are easy and very reliable since they can be achieved by merely butt welding the involved optical fibers.

#### Claims

1. An amplifier (3) for signal-transmitting optical fiber telecommunication lines, which can be interposed between one portion (2) of the optical fiber of the line and a second portion (4) of the optical fiber of the line comprising an optical pumping radiation source (7), a dichroic coupler (6) adapted to be connected to said first optical fiber portion (2) of the line and connected to the optical pumping radiation source (7), and a length (8) of active-core optical fiber, single-mode to both optical signal radiation and optical pumping radiation, having one end connected to the dichroic coupler (6) and the other end susceptible of being connected to said second optical fiber portion (4) of the line, said amplifier (3) being characterized in that the dichroic coupler (6) is of the type comprising two lengths (9, 10) of nonactive-core optical fiber disposed in side by side relation over a portion (11) of their length where they are optically coupled to each other by fusion of the respective claddings and substantial setting in common of the respective cores by stretching the lengths themselves, both said optical fiber lengths (9, 10) forming the dichroic coupler (6) being single-mode both for the optical signal radiation and optical pumping radiation.
2. An amplifier (3) according to claim 1, characterized in that the optical fiber lengths (9, 10) forming the dichroic coupler (6), in their respective claddings and cores have a distribution of nonactive dopants substantially identical to the distribution of nonactive dopants in the cladding and core of the length (8) of active-core optical fiber of the amplifier itself.
3. An amplifier (3) according to claim 1, characterized in that in the dichroic coupler (6) the ratio between the diameter of the substantially common core of the two optical fiber component lengths (9, 10) and the diameter of the core of said lengths at their ends is in the range of 0.3 to 0.5.
4. An amplifier (3) according to claim 1, characterized in that the mode diameter to the signal wavelength in the optical fiber lengths (9, 10) forming the amplifier (3) is substantially equal to the mode diameter to said signal wavelength in the optical fiber portions (2, 4) forming the line for which the amplifier (3) is designed.
5. An amplifier (3) according to claim 1, characterized in that in the dichroic coupler (6) the diameter of the substantially common core of the two optical fiber component lengths (9, 10) is in the range of 1.56 to 2.8 for 1536-nm and 980-nm signal and pumping wavelengths respectively.
6. An optical fiber telecommunication line comprising at least one portion (2) of signal transmitting optical fiber and at least a second portion (4) of signal transmitting optical fiber optically connected to each other through an optical amplifier (3) interposed therebetween, said optical amplifier (3) comprising an optical pumping radiation source (7), a dichroic coupler (6) optically associated with said optical pumping radiation source (7) and to the first optical fiber transmission portion (2) of the line, one length (8) of active-core optical fiber, single-mode to both optical signal and pumping radiations downstream of the dichroic coupler (6) and optically connected thereto, said length (8) of active-core optical fiber being also optically connected to the second portion (4) of the signal transmitting optical fiber of the line, said line being characterized in that the dichroic coupler (6) is of the type comprising two lengths (9, 10) of nonactive-core optical fiber disposed in side by side relation over a portion (11) of their length where they are optically coupled to each other by fusion of the respective claddings and substantial setting in common of the respective cores by stretching the lengths themselves, both optical fiber lengths (9, 10) of the dichroic coupler (6) being single-mode to both optical signal and pumping radiations.
7. An optical fiber telecommunication line according to claim 6, characterized in that the optical fiber lengths (9, 10) forming the dichroic coupler (6) have in their respective claddings and cores a nonactive-dopant distribution substantially identical

cal to the distribution of the nonactive dopants present in the cladding and core of the length (8) of active-core optical fiber of the amplifier (3) itself.

8. An optical fiber telecommunication line according to claim 6, characterized in that in the dichroic coupler (6) the ratio between the substantially common core of the two optical fiber component lengths (9, 10) and the diameter of the core of said lengths at the ends thereof is in the range of 0.3 and 0.5.
9. An optical fiber telecommunication line according to claim 6, characterized in that the mode diameter to the signal wavelength of the optical fiber lengths (9, 10) forming the amplifier (3) is substantially equal to the mode diameter to said signal wavelength of the optical fiber transmission portions (2, 4) of the line.
10. An optical fiber telecommunication line according to claim 6, characterized in that in the dichroic coupler (6) of the amplifier (3) the diameter of the substantially common core of the two optical fiber component lengths (9, 10) is in the range of 1.56 to 2.8, the optical signal and measurement radiations being 1536 and 980 nm respectively.

#### Patentansprüche

1. Verstärker (3) für signalübertragende faseroptische Fernmelde- oder Fernübertragungsleitungen, der zwischen einem Teil (2) der optischen Faser der Leitung und einem zweiten Teil (4) der optischen Faser der Leitung angeordnet werden kann und eine Pumpstrahlungsquelle (7), einen dichroitischen Koppler (6), der mit dem ersten Teil (2) der optischen Faser der Leitung verbunden werden kann und mit der optischen Pumpstrahlungsquelle (7) verbunden ist, und eine Länge (8) einer optischen Faser mit aktivem Kern mit Monomodeverhalten gegenüber der optischen Signalstrahlung und der optischen Pumpstrahlung aufweist, die ein Ende, welches mit dem dichroitischen Koppler (6) verbunden ist, und ein anderes Ende hat, welches mit dem zweiten Teil (4) der optischen Faser der Leitung verbunden werden kann, wobei der Verstärker (3) dadurch gekennzeichnet ist, daß der dichroitische Koppler (6) von der Art ist, welche zwei Längen (9,10) von optischen Fasern mit nichtaktivem Kern aufweist, die Seite an Seite über einen Teil (11) ihrer Länge angeordnet sind, wo sie optisch miteinander gekoppelt sind durch Schmelzen der betreffenden Überzüge und wesentliches gemeinsames Anordnen der betreffenden Kerne durch Strecken

oder Dehnen der Längen, wobei beide Längen (9,10) von optischen Fasern, welche den dichroitischen Koppler (6) bilden, Monomodeverhalten gegenüber der optischen Signalstrahlung und der optischen Pumpstrahlung haben.

2. Verstärker (3) nach Anspruch 1, dadurch gekennzeichnet, daß die Längen (9,10) der optischen Fasern, welche den dichroitischen Koppler (6) bilden, in ihrem betreffenden Überzug und dem Kern eine Verteilung von nichtaktiven Dotierungsmitteln haben, die im wesentlichen identisch sind zu der Verteilung von nichtaktiven Dotierungsmitteln in dem Überzug und dem Kern der Länge (8) der optischen Faser mit aktivem Kern des Verstärkers.
3. Verstärker (3) nach Anspruch 1, dadurch gekennzeichnet, daß in dem dichroitischen Koppler (6) das Verhältnis zwischen dem Durchmesser des im wesentlichen gemeinsamen Kerns der beiden Längen (9,10) der optischen Fasern und dem Durchmesser des Kerns der Längen an ihren Enden im Bereich von 0,3 bis 0,5 liegt.
4. Verstärker (3) nach Anspruch 1, dadurch gekennzeichnet, daß der Modedurchmesser zu der Signalwellenlänge in den Längen (9,10) der optischen Fasern, welche den Verstärker (3) bilden, im wesentlichen gleich ist dem Modedurchmesser zu der Signalwellenlänge in den Teilen (2,4) der optischen Faser, welche die Leitung bilden, für die der Verstärker (3) gestaltet ist.
5. Verstärker (3) nach Anspruch 1, dadurch gekennzeichnet, daß in dem dichroitischen Koppler (6) der Durchmesser des im wesentlichen gemeinsamen Kerns der beiden Komponentenlängen (9,10) der optischen Fasern im Bereich von 1,56 bis 2,8 für eine Signalwellenlänge von 1536 nm und für eine Pumpwellenlänge von 980 nm liegt.
6. Faseroptische Fernübertragungsleitung, umfassend wenigstens einen Teil (2) einer signalübertragenden optischen Faser und wenigstens einen zweiten Teil (4) einer signalübertragenden optischen Faser, die über einen optischen Verstärker (3) miteinander verbunden sind, der zwischen ihnen angeordnet ist, wobei der optische Verstärker eine optische Pumpstrahlungsquelle (7), einen dichroitischen Koppler (6), welcher der optischen Pumpstrahlungsquelle (7) und dem ersten Teil (2) der signalübertragenden optischen Faser optisch zugeordnet ist, und eine Länge (8) einer optischen Faser mit aktivem Kern mit Monomodeverhalten gegenüber der optischen Signalstrahlung und der Pumpstrahlung stromabwärts des dichroitischen Kopplers und optisch damit

- verbunden aufweist, wobei diese Länge (8) der optischen Faser mit aktivem Kern weiterhin mit dem zweiten Teil (4) der signalübertragenden optischen Faser der Leitung optisch verbunden ist, und wobei die Leitung dadurch gekennzeichnet ist, daß der dichroitische Koppler (6) von der Art ist, die zwei Längen (9,10) von optischen Fasern mit nichtaktivem Kern aufweist, die über einen Teil (11) ihrer Länge Seite an Seite angeordnet sind, wo sie optisch miteinander gekoppelt sind durch Schmelzen der betreffenden Überzüge und wesentliches gemeinsames Anordnen der betreffenden Kerne durch Strecken oder Dehnen der Längen, wobei beide Längen (9,10) von optischen Fasern des dichroitischen Kopplers (6) Monomodeverhalten gegenüber der optischen Signalstrahlung und der Pumpstrahlung haben.
7. Faseroptische Fernübertragungsleitung nach Anspruch 6, dadurch gekennzeichnet, daß die optischen Faserlängen (9,10), welche den dichroitischen Koppler (6) bilden, in ihrem Überzug und dem Kern eine Verteilung eines nichtaktiven Dotierungsmittels haben, die im wesentlichen identisch ist zu der Verteilung der nichtaktiven Dotierungsmittel, welche in dem Überzug und dem Kern der Länge (8) aus der optischen Faser mit aktivem Kern des Verstärkers (3) vorhanden ist.
8. Faseroptische Fernübertragungsleitung nach Anspruch 6, dadurch gekennzeichnet, daß in dem dichroitischen Koppler (6) das Verhältnis zwischen dem Durchmesser des im wesentlichen gemeinsamen Kerns der beiden Komponentenzlängen (9,10) der optischen Fasern und dem Durchmesser des Kerns dieser Längen an ihren Enden im Bereich von 0,3 bis 0,5 liegt.
9. Faseroptische Fernübertragungsleitung nach Anspruch 6, dadurch gekennzeichnet, daß der Modedurchmesser zu der Signalwellenlänge in den optischen Faserlängen (9,10), welche den Verstärker (3) bilden, im wesentlichen gleich ist dem Modedurchmesser zu der Signalwellenlänge in den Teilen (2,4) der optischen Faser, welche die Leitung bilden, für die der Verstärker (3) gestaltet ist.
10. Faseroptische Fernübertragungsleitung nach Anspruch 6, dadurch gekennzeichnet, daß in dem dichroitischen Koppler (6) der Durchmesser des im wesentlichen gemeinsamen Kerns der beiden Komponentenzlängen (9,10) der optischen Fasern im Bereich von 1,56 bis 2,8 für eine Signalwellenlänge von 1536 nm und für eine Pumpwellenlänge von 980 nm ist.

## Revendications

1. Un amplificateur (3) pour lignes de télécommunications à fibres optiques transmettant des signaux, qui peut être interposé entre une partie (2) de la fibre optique de la ligne et une deuxième partie (4) de la fibre optique de la ligne, comprenant une source (7) de rayonnement de pompage optique, un coupleur dichroïque (6) apte à être relié à ladite première partie de fibre optique (2) de la ligne et relié à la source (7) de rayonnement de pompage optique, et une longueur (8) de fibre optique à noyau actif, monomode tant vis-à-vis du rayonnement de signal optique que du rayonnement de pompage optique, dont une première extrémité est reliée au coupleur dichroïque (6) et l'autre extrémité est susceptible d'être reliée à ladite deuxième partie (4) de fibre optique de la ligne, ledit amplificateur (3) étant caractérisé en ce que le coupleur dichroïque (6) est du type comprenant deux longueurs (9, 10) de fibre optique à noyau inactif disposées dans une relation côte à côte sur une partie (11) de leur longueur où elles sont couplées optiquement l'une à l'autre, par une fusion des gainages respectifs et une mise en commun sensible des noyaux respectifs en étirant les longueurs elles-mêmes, les deux longueurs (9, 10) de fibre optique formant le coupleur dichroïque étant monomodes vis-à-vis tant du rayonnement de signal optique que du rayonnement de pompage optique.
2. Un amplificateur (3) selon la revendication 1 caractérisé en ce que les longueurs (9, 10) de fibre optique formant le coupleur dichroïque (6) présentent, dans leurs gainages et leurs noyaux respectifs, une répartition de dopants inactifs sensiblement identique à la répartition de dopants inactifs dans le gainage et le noyau de la longueur (8) de fibre optique à noyau actif de l'amplificateur lui-même.
3. Un amplificateur (3) selon la revendication 1, caractérisé en ce que le rapport entre le diamètre du noyau sensiblement commun des deux longueurs composantes (9, 10) de fibre optique et le diamètre du noyau desdites longueurs à leurs extrémités, est dans la plage de 0,3 à 0,5 dans le coupleur dichroïque.
4. Un amplificateur (3) selon la revendication 1, caractérisé en ce que le diamètre de mode à la longueur d'onde du signal dans les longueurs (9, 10) de fibre optique formant l'amplificateur (3) est sensiblement égal au diamètre de mode à ladite longueur d'onde du signal dans les parties (2, 4) de fibre optique formant la ligne pour laquelle l'amplificateur (3) est prévu.

5. Un amplificateur (3) selon la revendication 1, caractérisé en ce que le diamètre du noyau sensiblement commun des deux longueurs composantes (9, 10) de fibre optique est, dans le coupleur dichroïque, dans la plage de 1,56 à 2,8 pour les longueurs d'onde de 1536 nm et de 980 nm de signal et de pompage respectivement.
6. Une ligne de télécommunications à fibre optique comprenant au moins une première partie (2) de fibre optique de transmission de signaux et au moins une deuxième partie (4) de fibre optique de transmission de signaux reliées optiquement l'une à l'autre à travers un amplificateur optique (3) interposé entre elles, ledit amplificateur optique (3) comprenant une source (7) de rayonnement de pompage optique, un coupleur dichroïque (6) optiquement associé à ladite source (7) de rayonnement de pompage optique, et à la première partie (2) de transmission à fibre optique de la ligne, une longueur (8) de fibre optique à noyau actif, monomode vis-à-vis des rayonnements tant de signal que de pompage optique, située en aval du coupleur dichroïque (6) et optiquement reliée à celui-ci, ladite longueur (8) de fibre optique à noyau actif étant aussi reliée optiquement à la deuxième partie (4) de la fibre optique de transmission de signaux de la ligne, ladite ligne étant caractérisée en ce que en ce que le coupleur dichroïque (6) est du type comprenant deux longueurs (9, 10) de fibre optique à noyau inactif disposées dans une relation côte à côte sur une partie (11) de leur longueur où elles sont couplées optiquement l'une à l'autre, par une fusion des gainages respectifs et une mise en commun sensible des noyaux respectifs en étirant les longueurs elles-mêmes, les deux longueurs (9, 10) de fibre optique formant le coupleur dichroïque étant monomodes vis-à-vis des deux rayonnements de signal et de pompage optique.
7. Une ligne de télécommunications à fibre optique selon la revendication 6 caractérisée en ce que les longueurs (9, 10) de fibre optique formant le coupleur dichroïque (6) présentent, dans leurs gainages et leurs noyaux respectifs, une répartition de dopants inactifs sensiblement identique à la répartition de dopants inactifs dans le gainage et le noyau de la longueur (8) de fibre optique à noyau actif de l'amplificateur (3) lui-même.
8. Une ligne de télécommunications à fibre optique selon la revendication 6, caractérisée en ce que le rapport entre le diamètre du noyau sensiblement commun des deux longueurs composantes (9, 10) de fibre optique et le diamètre du noyau desdites longueurs à leurs extrémités, est dans la plage de 0,3 à 0,5 dans le coupleur dichroïque.
9. Une ligne de télécommunications à fibre optique selon la revendication 6, caractérisée en ce que le diamètre de mode à la longueur d'onde du signal dans les longueurs (9, 10) de fibre optique formant l'amplificateur (3) est sensiblement égal au diamètre de mode à ladite longueur d'onde du signal dans lesdites parties (2, 4) de fibre optique de la ligne.
10. Une ligne de télécommunications à fibre optique selon la revendication 6, caractérisée en ce que le diamètre du noyau sensiblement commun des deux longueurs composantes (9, 10) de fibre optique est, dans le coupleur dichroïque, dans la plage de 1,56 à 2,8, les rayonnements optiques de signal et de mesure étant de 1536 nm et de 980 nm respectivement.

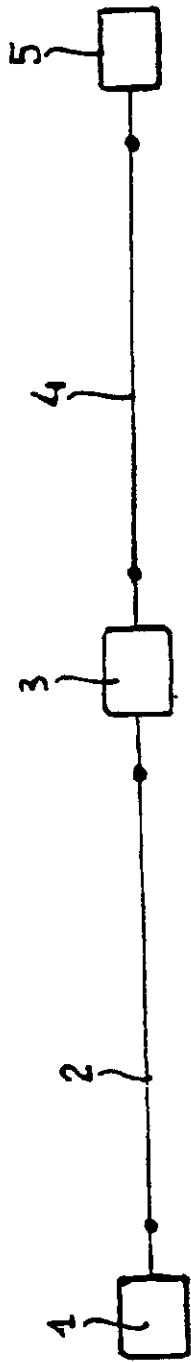


fig. 1

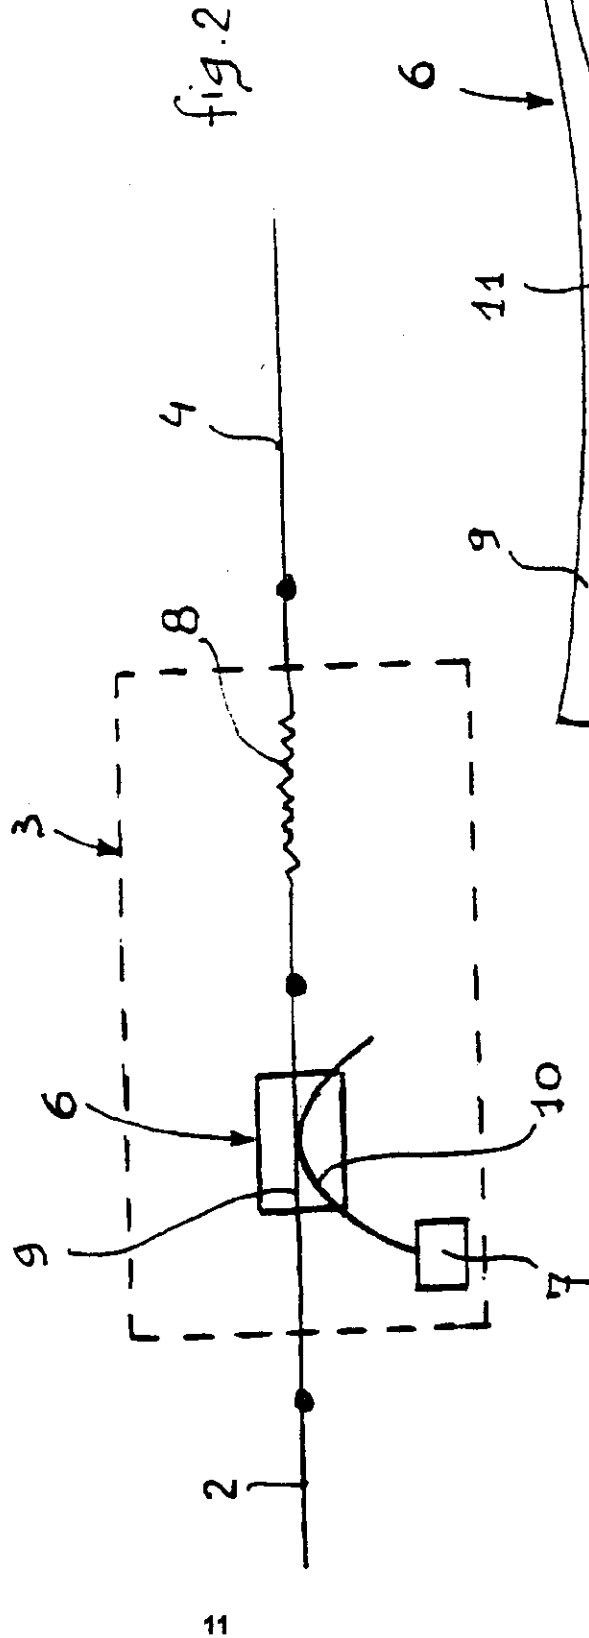


fig. 2

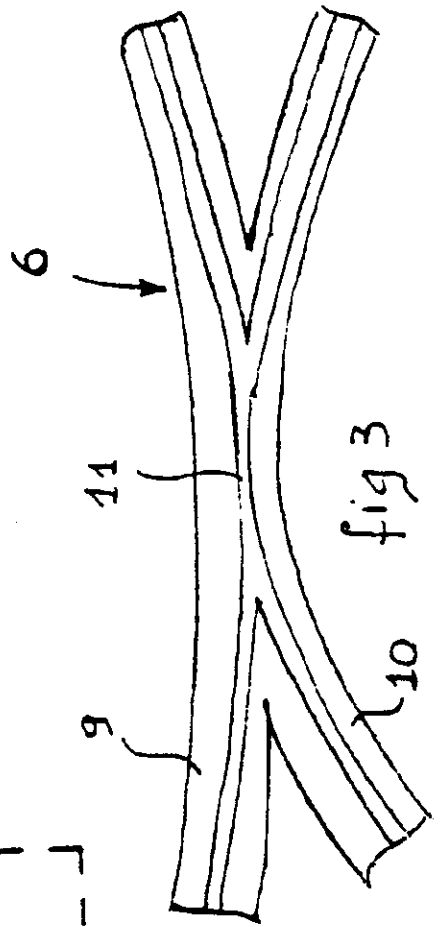


fig. 3

REGISTER ENTRY FOR EP0425014

European Application No EP90202736.6 filing date 15.10.1990

Priority claimed:

24.10.1989 in Italy - doc: 2212089

Designated States BE CH DE DK ES FR GB IT LI LU NL SE AT

Title AMPLIFIER FOR OPTICAL FIBER TELECOMMUNICATION LINES AND OPTICAL FIBER  
TELECOMMUNICATION LINES INCORPORATING SAID AMPLIFIER.

Applicant/Proprietor

SOCIETA CAVI PIRELLI S.P.A., Piazzale Cadorna, 5, I-20123 Milan, Italy  
[ADP No. 50277078001]

Inventors

GIORGIO GRASSO, Via Canesi, 8, I-20052 Monza (Milano), Italy  
[ADP No. 58519695001]

ALDO RIGHETTI, Via Tolstói, 49, I-20146 Milano, Italy  
[ADP No. 58519703001]

FLAVIO FONTANA, Via Clerici, 14, I-20032 Cormano (Milan), Italy  
[ADP No. 58519711001]

Classified to

G2J

H01S G02B H04B

Address for Service

R G C JENKINS & CO, 26 Caxton Street, LONDON, SW1H ORJ, United Kingdom  
[ADP No. 00000950001]

EPO Representative

MASSIMO MARCHI, c/o Marchi & Mittler s.r.l. Viale Lombardia 20, I-20131  
Milano, Italy [ADP No. 50825579001]

Publication No EP0425014 dated 02.05.1991

Publication in English

Examination requested 16.10.1991

Patent Granted with effect from 19.01.1994 (Section 25(1)) with title  
AMPLIFIER FOR OPTICAL FIBER TELECOMMUNICATION LINES AND OPTICAL FIBER  
TELECOMMUNICATION LINES INCORPORATING SAID AMPLIFIER.

---

22.10.1993 Notification from EPO of change of Applicant/Proprietor details  
from

SOCIETA CAVI PIRELLI S.P.A., Piazzale Cadorna, 5, I-20123 Milan,  
Italy [ADP No. 50277078001]

to

PIRELLI CAVI S.P.A., Piazzale Cadorna, 5, I-20123 Milano, Italy  
[ADP No. 58631045001]

Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

17.12.1993 Notification from EPO of change of Inventor details from  
GIORGIO GRASSO, Via Canesi, 8, I-20052 Monza (Milano), Italy  
[ADP No. 58519695001]

ALDO RIGHETTI, Via Tolstoi, 49, I-20146 Milano, Italy  
[ADP No. 58519703001]

FLAVIO FONTANA, Via Clerici, 14, I-20032 Cormano (Milan), Italy  
[ADP No. 58519711001]

to  
GIORGIO GRASSO, Via Canesi, 8, I-20052 Monza (Milano), Italy  
[ADP No. 58519695001]

ALDO RIGHETTI, Via Tolstoi, 49, I-20146 Milano, Italy  
[ADP No. 58519703001]

FLAVIO FONTANA, Via Clerici, 14, I-20032 Cormano (Milano), Italy  
[ADP No. 58543208001]

Entry Type 25.14 Staff ID. RD06 Auth ID. EPT

\*\*\*\* END OF REGISTER ENTRY \*\*\*\*

OA80-01  
EP

OPTICS - PATENTS

18/05/94 09:11:30  
PAGE: 1

RENEWAL DETAILS

PUBLICATION NUMBER

EP0425014

PROPRIETOR(S)

PIRELLI CAVI S.p.A., Piazzale Cadorna, 5, I-20123 Milano, Italy

DATE FILED

15.10.1990

DATE GRANTED

19.01.1994

DATE NEXT RENEWAL DUE

15.10.1994

DATE NOT IN FORCE

DATE OF LAST RENEWAL

YEAR OF LAST RENEWAL

00

STATUS

PATENT IN FORCE