



Office de la Propriété
Intellectuelle
du Canada

Un organisme
d'Industrie Canada

Canadian
Intellectual Property
Office

An agency of
Industry Canada

CA 2703786 A1 2009/06/04

(21) **2 703 786**

(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2008/11/25
(87) Date publication PCT/PCT Publication Date: 2009/06/04
(85) Entrée phase nationale/National Entry: 2010/04/26
(86) N° demande PCT/PCT Application No.: US 2008/084684
(87) N° publication PCT/PCT Publication No.: 2009/070582
(30) Priorité/Priority: 2007/11/30 (US60/991,474)

(51) Cl.Int./Int.Cl. *C08G 64/02* (2006.01),
C08G 64/30 (2006.01)
(71) Demandeur/Applicant:
E.I. DU PONT DE NEMOURS AND COMPANY, US
(72) Inventeurs/Inventors:
DICOSIMO, ROBERT, US;
DRYSDALE, NEVILLE EVERTON, US;
SUNKARA, HARI BABU, US
(74) Agent: TORYS LLP

(54) Titre : PROCEDE DE PRODUCTION D'UN CARBONATE DE POLYTRIMETHYLENE GLYCOL
(54) Title: PROCESS TO MAKE A POLY(TRIMETHYLENE CARBONATE) GLYCOL

(57) **Abrégé/Abstract:**

This invention relates to the production of an unsubstituted or R-substituted poly(trimethylene carbonate) glycol via the polymerization of an unsubstituted or R-substituted trimethylene carbonate employing one or more acidic ion exchange resin catalysts in the presence of a solvent. The products formed are substantially free of these catalysts.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 June 2009 (04.06.2009)

PCT

(10) International Publication Number
WO 2009/070582 A1

(51) International Patent Classification:
C08G 64/02 (2006.01) **C08G 64/30** (2006.01)

(74) Agent: **TANZER, Gail, D.**; E. I. du Pont de Nemours and Company, Legal Patent Records Center, 4417 Lancaster Pike, Wilmington, Delaware 19805 (US).

(21) International Application Number:
PCT/US2008/084684

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
25 November 2008 (25.11.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/991,474 30 November 2007 (30.11.2007) US

(71) Applicant (*for all designated States except US*): **E. I. DU PONT DE NEMOURS AND COMPANY** [US/US]; 1007 Market Street, Wilmington, Delaware 19898 (US).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **DICOSIMO, Robert** [US/US]; 1607 Masters Way, Chadds Ford, Pennsylvania 19317-9720 (US). **DRYSDALE, Neville, Everton** [JM/US]; 227 Welsh Tract Road, Newark, Delaware 19702 (US). **SUNKARA, Hari, Babu** [US/US]; 3 Fritze Court, Hockessin, Delaware 19707 (US).

Published:

— with international search report

(54) Title: PROCESS TO MAKE A POLY(TRIMETHYLENE CARBONATE) GLYCOL

(57) Abstract: This invention relates to the production of an unsubstituted or R-substituted poly(trimethylene carbonate) glycol via the polymerization of an unsubstituted or R-substituted trimethylene carbonate employing one or more acidic ion exchange resin catalysts in the presence of a solvent. The products formed are substantially free of these catalysts.

WO 2009/070582 A1

TITLE

Process to Make a Poly(trimethylene carbonate) Glycol

FIELD OF THE INVENTION

5 This invention is directed to processes for making a poly(trimethylene carbonate) glycol by the polymerization of a trimethylene carbonate employing one or more acidic ion exchange resin catalysts in the presence of a solvent. The products formed are substantially free of the catalysts.

BACKGROUND

10 Poly(trimethylene carbonate) diols find use in a variety of materials. These diols have been prepared by the polymerization of trimethylene carbonate (TMC, 1,3-dioxan-2-one), generally using catalysts containing organometallic compounds such as zinc, tin and
15 alkali metal compounds, as described in Hyun, H.; et. al. J. Polym. Sci. Part A: Polym. Chem.: Vol.44 (2006). Also, it has been reported that TMC can be polymerized via various alcohol and HCl initiator systems, as described in Shibasaki, Y.; et al., Macromol. Rapid Commun. 20, 532 (1999) and Macromolecules 2000, 33, 4316. These methods
20 necessitate the removal of the catalyst used, especially when the resulting diols are to be used in biomedical applications.

 As described in Ariga et al., Macromolecules 1997, 30, 737-744 and in Kricheldorf et al., J. Macromol. Sci. – Chem A26(4), 631-644 (1989), in the cationic polymerization of TMC, the initiating agent
25 becomes incorporated into the polymer ends.

 There exists a need to produce catalyst-free poly(trimethylene carbonate) glycols via polymerization of trimethylene carbonate (TMC, 1,3-dioxan-2-one).

SUMMARY OF THE INVENTION


One aspect of the present invention is a process for producing poly(trimethylene carbonate) glycols, comprising contacting an unsubstituted or substituted trimethylene carbonate with an acidic ion exchange resin as a catalyst, in the presence of one or more solvents at a temperature within the range from the freezing point of the solvent to about 30 degrees Celsius, to form a reaction mixture comprising a poly(trimethylene carbonate) diol.

10

DETAILED DESCRIPTION

The present invention relates to a process to make an unsubstituted or R-substituted poly(trimethylene carbonate) glycol (PTMC) from an unsubstituted or R-substituted trimethylene carbonate (TMC, 1,3-dioxan-2-one) via polymerization in the presence of a solvent utilizing an acidic ion exchange resin catalyst and at temperatures between the freezing point of the solvent used to room temperature (generally about 20 to 30 degrees Celsius, typically around 25 degrees Celsius). The reaction can be represented by the Equation below:

20

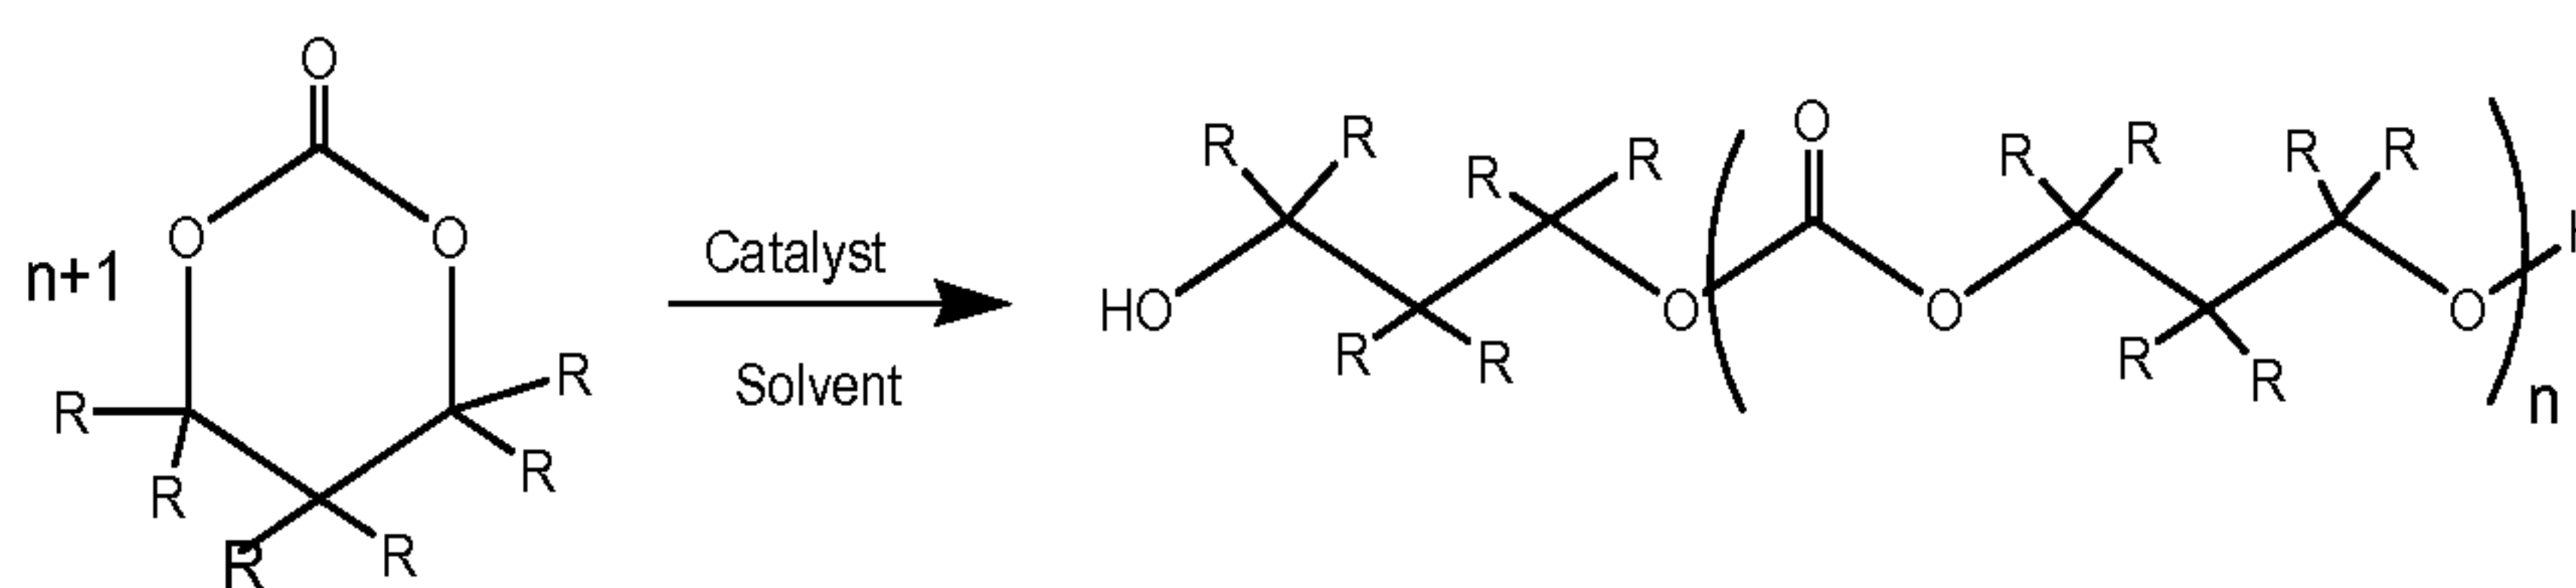

In the structure above, each R substituent is independently H, C₁-C₂₀ alkyl, particularly C₁-C₆ alkyl; C₃-C₂₀ cyclic alkyl, particularly C₃-C₆ cyclic alkyl; C₆-C₂₅ aryl, particularly C₆-C₁₁ aryl; C₆-C₂₀ alkaryl, particularly C₆-C₁₁ alkaryl; C₆-C₂₀ arylalkyl, particularly C₆-C₁₁ arylalkyl; and wherein each R substituent may form a cyclic structural group with adjacent R substituents; and each n is independently 2 to 100, and particularly 2 to 50. Where each R substituent may form a cyclic structure with adjacent R substituents, the resulting cyclic structural

30

group can be selected from C₃-C₈; for example, cyclopropane, cyclobutane, cyclopentane, cyclohexane, cycloheptane and cyclooctane.

The trimethylene carbonate can be derived from 1,3-propanediol. TMC can be prepared by any of the various chemical or biochemical methods known to those skilled in the art. Chemical methods for the preparation of TMC include, but are not limited to, a) reacting 1,3-propanediol with diethylcarbonate in the presence of zinc powder, zinc oxide, tin powder, tin halide or an organotin compound at elevated temperature, b) reacting 1,3-propanediol and phosgene or bis-chloroformates to produce a polycarbonate intermediate that is subsequently depolymerized using heat and, optionally, a catalyst, c) depolymerizing poly(trimethylene carbonate) in a wiped film evaporator under vacuum, d) reacting 1,3-propanediol and urea in the presence of metal oxides, e) dropwise addition of triethylamine to a solution of 1,3-propanediol and ethylchloroformate in THF, and f) reacting 1,3-propanediol and phosgene or diethylcarbonate. Biochemical methods for the preparation of TMC include, but are not limited to, a) lipase catalyzed condensation of diethylcarbonate or dimethylcarbonate with 1,3-propanediol in an organic solvent, and b) lipase-catalyzed depolymerization of poly(trimethylene carbonate) to produce TMC. The 1,3-propanediol and/or TMC can be obtained biochemically from a renewable source ("biologically-derived" 1,3-propanediol).

Preferably the 1,3-propanediol used as the reactant or as a component of the reactant has a purity of greater than about 99%, and more preferably greater than about 99.9%, by weight as determined by gas chromatographic analysis. The 1,3-propanediol preferably has the following characteristics:

(1) an ultraviolet absorption at 220 nm of less than about 0.200, and at 250 nm of less than about 0.075, and at 275 nm of less than about 0.075; and/or

(2) CIELAB "b*" color value of less than about 0.15 (ASTM D6290), and an absorbance at 270 nm of less than about 0.075; and/or

(3) a peroxide composition of less than about 10 ppm;
and/or

(4) a concentration of total organic impurities (organic compounds other than 1,3-propanediol) of less than about 400 ppm, more preferably less than about 300 ppm, and still more preferably less than about 150 ppm, as measured by gas chromatography.

The PTMCG can be isolated using known methods.

The processes disclosed herein employ an acidic ion exchange resin as a catalyst. Ion exchange resins suitable for use in the processes are available from a number of sources. The catalysts are generally added to the reactants to form a reaction mixture. As shown in the examples below, conveniently small amounts of these catalysts afford high conversion within about 25 hours.

Examples of acidic ion exchange resin catalysts suitable for use in the processes herein include sulfonated tetrafluoroethylene copolymers, for example, Nafion® SAC-13 or NAFION® NR50 (tetrafluoroethylene/perfluoro(4-methyl-3,6-dioxo-7-octene-1-sulfonic acid) copolymer, an ionomer available from E.I. DuPont de Nemours Company, Wilmington, DE, and poly(styrenesulfonic acid) crosslinked with divinylbenzene, for example, the hydrogen form of DOWEX® 50WX8-200, DOWEX® Marathon C, DOWEX® HCR-W2, DIAION® SK1B, DIAION® PK228, Purolite® C-100, IONAC® C-250, Amberlyst™ 70, and Monoplus S100H.

Preferred are sulfonated tetrafluoroethylene copolymers, for example NAFION® NR50 (tetrafluoroethylene/perfluoro(4-methyl-3,6-dioxo-7-octene-1-sulfonic acid) copolymer, an ionomer available from E.I. DuPont de Nemours and Company, Wilmington, DE, and DOWEX® 50WX8-200 ion-exchange resin available from Acros Organics N.V., Fair Lawn, NJ.

The process uses one or more solvents. Generally, any solvent can be used, as long as it is substantially non-reactive (i.e., does not react with the ingredients to form moieties that interfere with the reaction) with the reactants and/or catalyst. Examples of solvents useful in the process

disclosed herein include but are not limited to methylene chloride, toluene and dioxane. As shown in the examples below, lower amounts of solvent generally provide for higher conversion rates.

The processes disclosed herein are carried out at ambient
5 temperature, generally between about 20 and 30 degrees Celsius, but can be carried out as low as the freezing points of the solvents used. Once the reactants are added together, they may be mixed by any convenient method. The process can be done in batch, semi-batch or continuous mode, and generally are carried out in an inert atmosphere
10 (i.e., under nitrogen).

Once the reactants have been contacted with the catalyst in the presence of one or more solvents, the reaction is allowed to continue for the desired time. Generally, at least 6 percent of the TMC polymerizes to give the desired poly(trimethylene carbonate) glycol
15 after about 6 hours, with greater than about 75 percent conversion achieved within about 25 hours. As shown in the examples below, 100 percent conversion can be achieved by the selection of solvent and catalyst, and amounts thereof. Selection of solvent and catalyst and amounts thereof is within the purview of one skilled in the art.

20 Additionally, the desired degree of polymerization, n , can be achieved by selection of solvent and catalyst, and amounts thereof. As shown in the examples below, the use of methylene chloride and NAFION® NR50 copolymer affords a diol oligomer with an n of approximately 12, whereas the use of DOWEX® 50WX8-200 ion-
25 exchange resin affords a resulting diol oligomer with an n of approximately 2.5. Generally, n is 2 to 100, and more specifically 2 to 50 in the present invention.

The resulting poly(trimethylene carbonate) glycol can be separated from the unreacted starting materials and catalyst by any
30 convenient means, such as filtration, including filtration after concentration.


As shown in the examples below, the catalyst used can also be recycled a number of times (i.e., at least 12 cycles for NAFION® NR50

copolymer) and still provide for approximately 100 percent conversion of the reactants to the desired product.

The process disclosed herein allows for the degree of polymerization to be selected based on the solvent and/or catalyst
5 chosen, and the amount of those materials used. This is advantageous as the materials resulting from the process can vary in properties including viscosity. The diols can find wide use in products including biomaterials, engineered polymers, personal care materials, coatings, lubricants and polycarbonate/polyurethanes (TPUs).

EXAMPLES

The processes being carried out in the following examples can be represented by the equation:

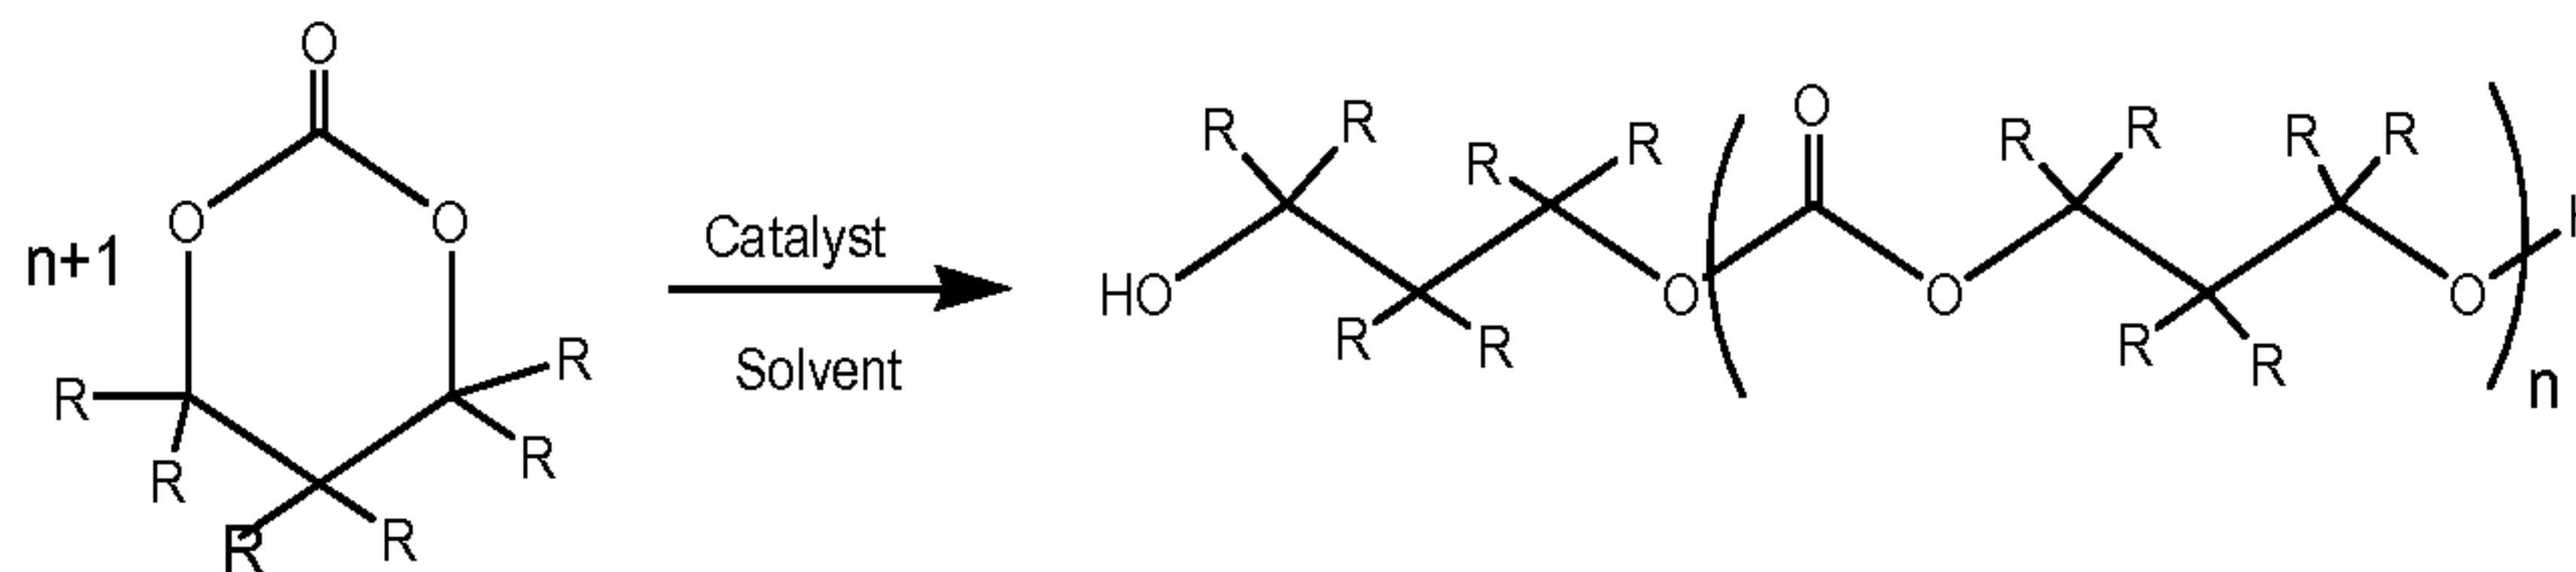

5

Example 1

This example demonstrates the production of poly(trimethylene carbonate) glycol using Nafion® NR50 copolymer as catalyst.

10

TMC (10.00 g, 0.098 mol), methylene chloride (25 g) and Nafion® NR50 (2.5 g) were placed in a round bottomed flask equipped with a stirrer and under nitrogen. The reaction mixture was stirred at room temperature. After 6 hrs an aliquot was withdrawn and concentrated at reduced pressure. Proton NMR analysis showed a ~31% conversion to poly(trimethylene carbonate)glycol. After 24 hours the reaction was diluted additional methylene chloride and the Nafion® filtered off. The filtrate was concentrated at reduced pressure. Proton NMR analysis of this material showed ~100% conversion, with $n = \sim 12$.

15

Examples 2-4

These examples demonstrate the effect of solvent amount on the production of poly(trimethylene carbonate) glycol using Nafion® NR50 copolymer as catalyst.

20

TMC (10.00 g, 0.098 mol) and Nafion® NR50 copolymer (2.5 g) were placed in three round bottomed flasks equipped with stirrer and under nitrogen. To the first flask 25 mL of methylene chloride was added, to the second flask 50 mL of methylene chloride was added and to the third flask 100 mL of methylene chloride. The reaction mixture was stirred at room temperature. Aliquots were withdrawn after 17

25

30

hours and 25 hours, concentrated at reduced pressure and analyzed via Proton NMR. The following table tabulates the results:

Example	Methylene Chloride (mL)	Conversion (17 Hr) (%)	Conversion (25 Hr) (%)	n (25 Hr)
2	25	91.00	98.2	12.0
3	50	64.84	84.07	9.85
4	100	23.57	41.62	5.83

5

Example 5

This example demonstrates the production of poly(trimethylene carbonate) glycol using Dowex® 50x8-200 (Dowex ®50W-Hydrogen) ion-exchange resin as catalyst.

10 TMC (10.00 g, 0.098 mol), toluene (25 g) and Dowex® 50x8-200 ion-exchange resin (Dowex ®50W-Hydrogen) (2.5 g) were placed in a round bottomed flask equipped with a stirrer and under nitrogen. The reaction mixture was stirred at room temperature. After 6 hrs an aliquot was withdrawn and concentrated at reduced pressure. Proton
 15 NMR analysis showed a ~83% conversion to poly(trimethylene carbonate)glycol. After 24 hours the reaction was diluted additional methylene chloride and the Dowex® 50x8-200 ion-exchange resin (Dowex® 50W-Hydrogen) filtered off. The filtrate was concentrated at reduced pressure. Proton NMR analysis of this material showed
 20 ~100% conversion, with n = ~3.8.

Examples 6-8

These examples demonstrate the effect of solvent amount on the production of poly(trimethylene carbonate) glycol using Dowex® 50x8-200 ion-exchange resin (Dowex ®50W-Hydrogen) catalyst.

5

TMC (10.00 g, 0.098 mol) and Dowex® 50x8-200 ion-exchange resin (Dowex® 50W-Hydrogen) (2.5 g) were placed in three round bottomed flasks equipped with stirrer and under nitrogen. To the first flask 25 mL of methylene chloride was added, to the second flask 50 mL of methylene chloride was added and to the third flask 100 mL of methylene chloride. The reaction mixture was stirred at room temperature. Aliquots were withdrawn after 17 hours, concentrated at reduced pressure and analyzed via Proton NMR. The following table tabulates the results:

15

Example	Methylene Chloride (mL)	N (17 Hr)
6	25	2.64
7	50	2.47
8	100	2.10

Examples 9-11

These examples demonstrate the effect of catalyst amount on the production of poly(trimethylene carbonate) glycol using Nafion® NR50 copolymer as catalyst.

20

TMC (10.00 g, 0.098 mol) and methylene chloride (25 mL) were placed in three round bottomed flasks equipped with stirrer and under nitrogen. To the first flask 0.5 g of Nafion® was added, to the second flask 1.0 g of Nafion® was added and to the third flask 2.00 g of Nafion® was added. The reaction mixture was stirred at room temperature. Aliquots were withdrawn after ~6 hours and ~22 hours, concentrated at reduced pressure and analyzed via Proton NMR. The following table tabulates the results:

Example	Nafion® NR50 (g)	Conversion (6 Hr) (%)	Conversion (22 Hr) (%)	N (25 Hr)
9	0.50	5.88	59.38	12.02
10	1.00	11.81	73.41	14.48
11	2.00	25.07	100	12.80

10

Examples 12-14

These examples demonstrate the effect of catalyst amount on the production of poly(trimethylene carbonate) glycol using Dowex® 50x8-200 ion-exchange resin (Dowex® 50W-Hydrogen) as catalyst.

15

TMC (10.00 g, 0.098 mol) and methylene chloride (25 mL) were placed in three round bottomed flasks equipped with stirrer and under nitrogen. To the first flask 0.5 g of Dowex® 50x8-200 ion-exchange resin (Dowex® 50W-Hydrogen) was added, to the second flask 1.0 g of Dowex® 50x8-200 ion-exchange resin (Dowex® 50W-Hydrogen) was added and to the third flask 2.00 g of Dowex 50x8-200 ion-exchange resin (Dowex 50W-Hydrogen) was added. The reaction mixture was stirred at room temperature. Aliquots were withdrawn after ~5 hours

20

and ~22 hours, concentrated at reduced pressure and analyzed via Proton NMR. The following table tabulates the results:

Example	Dowex® 50x8- 200 ion- exchange resin (Dowex® 50W- Hydrogen) (g)	Conversion (5 Hr) (%)	Conversion (22 Hr) (%)	N (25 Hr)
12	0.50	13.2	47.93	5.24
13	1.00	20.06	92.19	4.84
14	2.00	47.92	98.20	2.97

5

Examples 15-17

These examples demonstrate the effect of catalyst amount on the production of poly(trimethylene carbonate) glycol using Nafion® NR50 copolymer as catalyst. Toluene was used as the solvent.

10

TMC (10.00 g, 0.098 mol) and toluene (25 mL) were placed in three round bottomed flasks equipped with stirrer and under nitrogen. To the first flask 0.5 g of Nafion® copolymer was added, to the second flask 1.0 g of Nafion® copolymer was added and to the third flask 2.00 g of Nafion® copolymer was added. The reaction mixture was stirred at room temperature. Aliquots were withdrawn after ~4 hours and ~20 hours, concentrated at reduced pressure and analyzed via Proton NMR. The following table tabulates the results:

15

Example	Nafion® NR50 (g)	Conversion (4 Hr) (%)	Conversion (20 Hr) (%)	N (20 Hr)
15	0.50	~0	24.3	9.88
16	1.00	7.86	39.42	12.66
17	2.00	17.03	75.51	12.82

Examples 18-20

5 These examples demonstrate the effect of catalyst amount on the production of poly(trimethylene carbonate) glycol using Nafion® NR50 copolymer as catalyst. Dioxane was used as the solvent.

 TMC (10.00 g, 0.098 mol) and dioxane (25 mL) were placed in three round bottomed flasks equipped with stirrer and under nitrogen.

10 To the first flask 0.5 g of Nafion® was added, to the second flask 1.0 g of Nafion® was added and to the third flask 2.00 g of Nafion® was added. The reaction mixture was stirred at room temperature. Aliquots were withdrawn after ~4 hours and ~20 hours, concentrated at reduced pressure and analyzed via Proton NMR. The following table tabulates

15 the results:

Experiment	Nafion® NR50 (g)	Conversion (6 Hr) (%)	Conversion (22 Hr) (%)	N (22 Hr)
18	0.50	~0	21.89	-
19	1.00	~0	47.32	-
20	2.00	17.35	88.24	9.57

Examples 20 and 21 (A-J)

The following examples demonstrate the recycling of Nafion®
 5 NR50 copolymer used as catalyst in producing poly(trimethylene carbonate) glycol.

Example 20

A stock solution containing trimethylene chloride (136.0g) and
 10 diluted to 400 mL with methylene chloride was prepared, this representing a 3.33M solution.

Example 21A

Nafion® Copolymer Catalyst Cycle: Number 1

15 The above stock solution (Example 20, 30 mL) was added, via syringe, to an oven dried 100 mL round bottomed flask equipped with a stirrer and under nitrogen, containing Nafion® NR50 (2.0 g). The reaction mixture was stirred at room temperature. An aliquots were withdrawn after 3.5 and 22 hrs, concentrated at reduced pressure and
 20 analyzed via NMR. After 22 hours the reaction mixture was filtered and the recovered Nafion® catalyst was washed with methylene chloride (2 x ~50 mL). The filtrate was concentrated at reduced pressure and dried under nitrogen.

Example 21BNafion® Copolymer Catalyst Cycle: Number 2

The recovered catalyst was placed in an oven dried 100 mL RB flask equipped with a stirrer and under nitrogen. To this material was
5 added the above stock solution (30 mL), via syringe. The reaction mixture was stirred at room temperature. An aliquots were withdrawn after 6 and 22 hrs., concentrated at reduced pressure and analyzed via NMR. After 22 hours the reaction mixture was filtered and the recovered Nafion® catalyst was washed with methylene chloride (2 x
10 ~50 mL). This recovered catalyst was used in the next cycle. The filtrate was concentrated at reduced pressure and dried under nitrogen.

Example 21C-JNafion® Copolymer Catalyst Cycles 3-10

15 The above procedure of Number 2 was followed for the continuing number of cycles and the materials analyzed via Proton NMRs, the results of which are tabulated in the following table:

Example	Cycle Number	Time (Hr)	Conversion (%)	Time (Hr)	Conversion (%)	n (Final)
21A	1	3.3	14.31	22	98.21	13.42
21B	2	6.0	47.20	22	97.75	22.54
21C	3	6.0	67.09	22	99.06	21.77
21D	4	6.0	67.09	71	~100	22.85
21E	5	6.0	79.20	24	~100	15.80
21F	6	-	-	23	~100	19.53
21G	7	6.0	79.37	23	~100	17.41
21H	8	6.0	72.04	23	~100	19.96
21I	9	6.0	75.47	73	~100	18.88
21J	10	6.0	77.53	22	~100	13.65

Examples 22 A-E

5 The following examples demonstrate the recycling of Dowex® 50x8-200 ion-exchange resin catalyst in producing poly(trimethylene carbonate) glycol.

Example 22A

Dowex® 50x8-200 ion-exchange resin Catalyst Cycle: Number 1

TMC (10.00 g, 0.098 mol), methylene chloride (25 g) and Dowex® 50x8-200 ion-exchange resin (2.5 g) were placed in a round bottomed flask equipped with a stirrer and under nitrogen. The reaction mixture was stirred at room temperature. After 17 hrs an aliquot was withdrawn and concentrated at reduced pressure. Proton NMR analysis showed a ~97.54%, with $n = \sim 2.64$. The reaction mixture was filtered, the filtrate washed with additional methylene chloride.

10

Example 22BDowex® 50x8-200 ion-exchange resin Catalyst Cycle: Number 2

The recovered catalyst from Example 22A above was placed in an oven dried 100 mL round bottomed flask equipped with a stirrer and under nitrogen. To this material was added trimethylene carbonate (10.00 g, 0.098 mol), and methylene chloride (25 g). The reaction was allowed to stir at room temperature over the week-end. An aliquot was withdrawn after ~70 hours, concentrated at reduced pressure. Proton NMR analysis showed a ~98.43%, with $n = \sim 7.6$.

15
20Examples 22C-EDowex® 50x8-200 ion-exchange resin Catalyst Cycle: Numbers 3-5

The above procedure of Number 2 (Example 22B) was followed for the continuing number of cycles and the materials analyzed via Proton NMRs, the results of which are tabulated in the following table:

25

Example	Cycle	Time (Hr)	Conversion (%)	Time (Hr)	Conversion (%)	n (Final)
22A	1			17	87.54	2.64
22B	2			~70	98.43	7.60
22C	3	6.0	30.72	22	74.62	2.88
22D	4	6.0	11.27	22	46.54	1.22
22E	5	6.0	8.72	22	38.25	2.12

CLAIMS

What is claimed is:

1. A process for producing an unsubstituted or R-substituted
5 poly(trimethylene carbonate) glycol, comprising contacting an
unsubstituted or R-substituted trimethylene carbonate with an acidic
ion exchange resin as a catalyst, in the presence of one or more
solvents at a temperature within the range of from the freezing point of
the solvent(s) to about 30 degrees Celsius, to form a reaction mixture
10 comprising an unsubstituted or R-substituted poly(trimethylene
carbonate) diol.
2. The process of Claim 1 wherein the trimethylene
carbonate is unsubstituted trimethylene carbonate.
- 15 3. The process of Claim 1, wherein the ion exchange resin
is selected from the group consisting of ion-exchange resins
comprising poly(styrenesulfonic acid) crosslinked with divinylbenzene.
- 20 4. The process of Claim 1, wherein the ion exchange resin
is a (tetrafluoroethylene/perfluoro(4-methyl-3,6-dioxo-7-octene-1-
sulfonic acid) copolymer.
5. The process of Claim 1, wherein the solvent is
25 substantially non-reactive with the unsubstituted or R-substituted
trimethylene carbonate and the ion exchange resin.
6. The process of Claim 5, wherein the substantially non-
reactive solvent is selected from the group consisting of methylene
30 chloride, toluene and dioxane.
7. The process of Claim 1, further comprising isolating the
unsubstituted or R-substituted poly(trimethylene carbonate) glycol.

8. An unsubstituted or R-substituted poly(trimethylene carbonate) glycol made by the process of Claim 1.