

(43) International Publication Date
14 January 2016 (14.01.2016)(51) International Patent Classification:
G03H 1/08 (2006.01)(21) International Application Number:
PCT/US2015/039479(22) International Filing Date:
8 July 2015 (08.07.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/022,782 10 July 2014 (10.07.2014) US(71) Applicant: UNIVERSITY OF SOUTH FLORIDA
[US/US]; 3802 Spectrum Blvd., Suite 100, Tampa, FL
33612 (US).(72) Inventor: KIM, Myung, K.; 6605 Newport Palms Court,
Tampa, FL 33612 (US).(74) Agents: RISLEY, David, R. et al.; Thomas / Horstemeyer,
LLP., 400 Interstate North Parkway, Suite 1500, Atlanta,
GA 30339 (US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

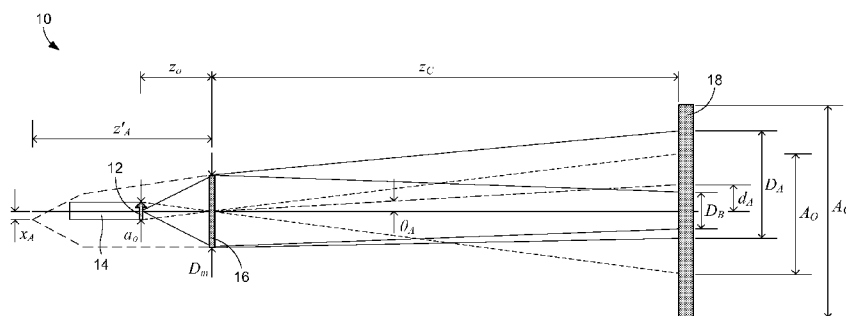
(54) Title: SYSTEMS AND METHODS FOR PERFORMING SELF-INTERFERENCE INCOHERENT DIGITAL HOLO-
GRAPHY

FIG. 1

(57) Abstract: In one embodiment, a self-interference incoherent digital holography system including a light sensor and a diffractive filter configured to receive light from an object to be holographically imaged and generate holographic interference patterns on the light sensor. A self-interference incoherent digital holography system comprising: a light sensor; and a diffractive filter configured to receive light from an object to be holographically imaged and generate holographic interference patterns on the sensor.

**SYSTEMS AND METHODS FOR PERFORMING
SELF-INTERFERENCE INCOHERENT DIGITAL HOLOGRAPHY**

Notice of Government-Sponsored Research

5 This invention was made with Government support under grant/contract number AN3440958, awarded by the National Institutes of Health (NIH). The Government has certain rights in the invention.

Cross-Reference to Related Application(s)

10 This application claims priority to co-pending U.S. Provisional Application serial number 62/022,782, filed July 10, 2014, which is hereby incorporated by reference herein in its entirety.

Background

15 Holographic imaging is well known for retrieving both the amplitude and phase information of the object. Ironically, although the use of coherent illumination led to the realization of viable holographic imaging, it also restricted the wide usage of the holographic imaging. The possibility of incoherent holography has been studied but it

was not able to achieve the acceptable quality of hologram until recently. Through the development of digital electronic devices and computer science in the recent decade, many interesting techniques have been proposed to acquire holographic information under the incoherent illumination. One approach that uses the self-interference shows promise for practical applications. This approach separates the light from an object into two paths and causes beams from the same object point to interfere with each other. Unfortunately, the spatial incoherence of the light from the object washes out the fringe of the recorded intensity image. Because of this, the complex hologram must be computationally retrieved from multiple phase-shifted images.

Recently, the inventor reported successful achievement of holographic recording and reconstruction of a natural outdoor scene with a holographic camera based on the self-interference incoherent digital holography. The camera incorporates an interferometer having a linearly displaceable mirror that can be used for phase-shifting. Although the camera works well, the need for phase-shifting remains an issue that restricts the application. In particular, phase-shifting requires the object to be nearly stationary for multiple exposures, hence, the temporal resolution can be sacrificed and the camera may be inappropriate for high-speed imaging. Moreover, because the amount of phase-shifting varies according to the wavelength of the illumination source, a large number of exposures is required for full-color imaging.

Still more recently, the inventor replaced the linearly displaceable mirror with an off-axis mirror that enables the interferometer to introduce high-frequency fringes that encode the phase information in the interferogram. With this change, the holographic camera is capable of capturing a holographic image with a single

exposure of a scene illuminated with incoherent light without the need for any moving parts. While this camera is an improvement of the phase-shifting camera, limitations still exist. For example, because the camera requires an interferometer, which includes a beam splitter and two mirrors, the camera requires a relatively large
5 volume of space and therefore may be unsuitable for use in applications in which such space is limited. Furthermore, the camera requires a relatively large number of parts, which increases the cost and complexity of the camera. Moreover, it is difficult to construct an interferometer that operates well in certain regions of the electromagnetic spectrum, such as the x-ray spectrum.

10 From the above discussion, it can be appreciated that it would be desirable to have an alternative system and method for performing incoherent digital holography.

Brief Description of the Drawings

The present disclosure may be better understood with reference to the
15 following figures. Matching reference numerals designate corresponding parts throughout the figures, which are not necessarily drawn to scale.

Fig. 1 is a schematic diagram of an embodiment of a self-interference incoherent digital holography system.

Fig. 2 illustrates an example diffractive filter and its use. Fig. 2A shows
20 Fresnel mask patterns of the diffractive filter. Fig. 2B shows an example of an interference pattern generated by the patterns of Fig. 2A. Fig. 2C shows an example of a Fourier spectrum of the interference pattern of Fig. 2B. Fig. 2D shows a reconstruction of the observed object.

Fig. 3 shows an example diffractive filter having two binarized Fresnel mask
25 patterns that were added together.

Fig. 4 shows an example diffractive filter having two complex spherical wave fronts that were added together before binarizing.

Detailed Description

5 As described above, it would be desirable to have an alternative system and method for performing incoherent digital holography. More particularly, it would be desirable to have a system and method that can create digital holographic images from incoherent light but that does not require multiple exposures or an interferometer. Described herein are examples of such systems and methods. In one
10 embodiment, incoherent digital holography is performed by capturing a single exposure of an object using a system comprising a diffractive filter. The filter comprises two superposed Fresnel lenses having different focal lengths and a slight relative tilt (angular offset) that together generate holographic interference patterns on the image plane of a light sensor of the system. The holographic interference
15 patterns can be numerically processed to reconstruct a holographic image of the object.

In the following disclosure, various specific embodiments are described. It is to be understood that those embodiments are example implementations of the disclosed inventions and that alternative embodiments are possible. All such
20 embodiments are intended to fall within the scope of this disclosure.

Fig. 1 illustrates an embodiment of a self-interference incoherent digital holography system 10. As shown in the figure, the system 10 can be used to generate a holographic image of an object 12. The object 12 is illuminated with incoherent light, which can be natural or artificial light. In embodiments in which the
25 system 10 is integrated into a microscope, the light can be an incoherent beam 14 of

light that is emitted from a light source (not shown) of the system and that is transmitted through the object 12. In embodiments in which the system 10 is integrated into a digital holographic telescope or camera, the light can be ambient light from the environment that is reflected by the object 12 or light emitted by the object. The light from the object 12 is delivered to a diffractive filter 16. The light then passes through the diffractive filter 16 and is received by a light sensor 18, such as a charge-coupled device (CCD).

The diffractive filter 16 is configured to generate holographic interference patterns on the image plane of the light sensor 18. In some embodiments, the diffractive filter 16 comprises two superposed Fresnel mask patterns that create the holographic interference. The mask patterns have different focal lengths and a slight relative tilt (i.e., angular offset). The mask patterns are designed to produce the holographic interference for optimal resolution and contrast of reconstructed holographic images. In some embodiments, the diffractive filter 16 is essentially a binarized superposition of two Fresnel lenses having different focal lengths and a relative tilt. A spherical wave scattered from each object point and transmitted through the filter 16 creates two copies of the spherical wave with slightly different curvatures. The two copies arriving at the image plane of the light sensor 18 are coherent because they are clones from the same object point, and therefore are capable of creating a Fresnel zone-type interference ring pattern whose center and frequency encode the lateral and axial positions of the object point. In some embodiments, the filter design incorporates the system (e.g., microscope, camera) parameters and therefore minimizes optical adjustment or alignment and optimizes performance.

Fig. 2 illustrates an example diffractive filter and its use. Fig. 2A shows the two superposed Fresnel mask patterns of the filter. Fig. 2B shows an example of an interference pattern generated by the mask patterns of Fig. 2A on the image plane of a light sensor, given a single point object. Fig. 2C shows an example of a Fourier spectrum of the interference pattern of Fig. 2B. Fig. 2D shows a reconstruction of a the observed object (the “Big Dipper”).

The Fresnel mask patterns can be combined in various ways to create the diffractive filter. As a first method, the two binarized Fresnel lens patterns can be added together according to the following relation:

$$\Psi(x, y) = \left\{ \cos \left[-\frac{\pi}{\lambda f_A} (x^2 + y^2) + \frac{2\pi x}{\lambda} \sin \theta_A \right] > 0 \right\} \wedge \left\{ \cos \left[-\frac{\pi}{\lambda f_B} (x^2 + y^2) + \frac{2\pi x}{\lambda} \sin \theta_B \right] > 0 \right\}$$

Fig. 3 shows an example diffractive filter having two binarized Fresnel lens patterns that were added together.

In a second example, two complex spherical wave fronts can be added together before binarizing according to the following relation:

$$\Psi(x, y) = \text{Re} \left\{ \exp i \left[-\frac{\pi}{\lambda f_A} (x^2 + y^2) + \frac{2\pi x}{\lambda} \sin \theta_A \right] + \exp i \left[-\frac{\pi}{\lambda f_B} (x^2 + y^2) + \frac{2\pi x}{\lambda} \sin \theta_B \right] \right\} > 0$$

This second method may be preferable in some situations as it may provide greater diffraction efficiency. Fig. 4 shows an examples of a diffractive filter having two complex spherical wave fronts that were added together before binarizing.

The various parameters of the incoherent digital holography system 10 can be designed to suit the particular application in which it is used. These parameters include:

5	a_o :	object's lateral size
	D_m :	diameter of the diffractive filter
	θ_A :	angular offset of the diffracted beam component A (component B 's offset is assumed to be zero)
	A_c :	lateral size of the sensor plane
10	D_A, D_B :	diameters of beam spots A and B on sensor plane
	d_A :	lateral shift of the beam spot A on sensor plane (beam spot B is assumed to be centered)
	x_A :	offset of a virtual image of the object center for component A ; (x_B is assumed to be zero)
15	A_o :	geometric magnified size of the object on the sensor plane
	z'_A :	distance of the virtual image of the object
	z_o :	distance of the object from the diffractive filter
	z_c :	distance of the sensor plane from the diffractive filter
	λ :	wavelength
20	l_c :	coherence length of the light source (e.g., microscopy application)
	N_c :	number of pixels of the sensor

The focal length f_A of the first Fresnel mask pattern (f_B calculated using the similar equations) and the angular offset θ_A between the Fresnel mask patterns can

be calculated using the following design equations:

$$D_A \rightarrow f_A$$

$$\frac{1}{z'_A} = \frac{1}{z_o} - \frac{1}{f_A}; \quad D_A = D_m \frac{z'_A + z_c}{z'_A} \rightarrow f_A = \frac{z_c}{1 + \frac{z_c}{z_o} - \frac{D_A}{D_m}}$$

$$d_A \rightarrow \theta_A$$

$$d_A = f_A \sin \theta_A \frac{z_o + z_c}{z_o} \rightarrow \theta_A = \frac{d_A}{f_A \left[1 + \frac{z_c}{z_o} \right]}$$

5

As an example system design project, consider an x-ray microscopy application in which the following parameters are fixed by the physical constraints of the microscope:

10

$$\begin{cases} \lambda = 0.0015 \mu\text{m} & a_o = 10 \mu\text{m} & D_m = 50 \mu\text{m} & A_c = 25000 \mu\text{m} \\ l_c = 1 \mu\text{m} & z_o = 1000 \mu\text{m} & z_c = 2e6 \mu\text{m} & N_c = 2000 \end{cases}$$

In such a case, the focal lengths and angular offset could be calculated as follows:

15

$$D_A = 20000 \rightarrow f_A = \frac{2e6}{1 + \frac{2e6}{1e3} - \frac{20000}{50}} = 1250$$

$$D_B = 10000 \rightarrow f_B = 1110$$

$$d_A = 5000 \rightarrow \theta_A = \frac{5000}{1250 \left[1 + \frac{2e6}{1000} \right]} = 0.002$$

$$d_B = 0 \rightarrow \theta_B = 0$$

$$z'_A = \frac{f_A z_o}{f_A - z_o} \frac{1250 \cdot 1000}{1250 - 1000} = 5000$$

$$z'_B = \frac{1110 \cdot 1000}{1110 - 1000} = 10091$$

$$5 \quad z_h = z_{AB} = -\frac{z_A z_B}{z_A - z_B} = -\frac{(z'_A + z_c)(z'_B + z_c)}{(z'_A + z_c) - (z'_B + z_c)} = -\frac{(5000 + 2e6)(10091 + 2e6)}{(5000) - (10091)} = 7.916e8$$

$$A_o = a_o \frac{z_c}{z_o} = 10 \frac{2e6}{1e3} = 20000$$

It is noted that when self-interference incoherent digital holography (SIDH) is extended to x-ray holography, the incoming x-ray beam illuminates the entire area of the diffractive filter, which improves the numerical aperture and system resolution as well as ensures low loss and high efficiency of photon flux. Furthermore, the x-ray beam has no requirement of spatial coherence across the object or the filter. This greatly simplifies the optical configurations to acquire holograms and diversifies the types of light sources that can be used.

SIDH-based x-ray holography may open a viable pathway to a host of new holographic techniques and applications. The optical configuration is very simple, efficient, and adaptable. Though incoherent, one can still obtain phase structure of an object, for x-ray phase contrast. Particularly, internal three-dimensional structures that are a hallmark of mesoscale science can be imaged using simple optics and

straightforward numerical processing in important classes of materials, ranging from biological systems, to batteries, catalysis, and electronic and magnetic devices.

CLAIMS

Claimed are:

1. A self-interference incoherent digital holography system comprising:
a light sensor; and
a diffractive filter configured to receive light from an object to be holographically imaged and generate holographic interference patterns on the sensor.
2. The system of claim 1, wherein the light sensor is a charge-coupled device.
3. The system of claim 1, wherein the diffractive filter comprises two superposed Fresnel mask patterns.
4. The system of claim 3, wherein the Fresnel mask patterns have different focal lengths.
5. The system of claim 4, wherein the Fresnel mask patterns are angularly offset relative to each other.
6. The system of claim 1, wherein the system is implemented in a microscope.
7. The system of claim 1, wherein the system is implemented in a telescope.

8. The system of claim 1, wherein the system is implemented in a holographic camera.

9. A method for creating a holographic image of an object, the method comprising:

receiving incoherent light from the object with a diffractive filter comprising superposed Fresnel mask patterns; and

generating holographic interference pattern on a light sensor using the diffractive filter.

10. The method of claim 9, wherein receiving incoherent light comprises receiving x-ray light.

11. The method of claim 9, wherein receiving incoherent light comprises receiving ambient light.

12. The method of claim 9, wherein the superposed Fresnel mask patterns have different focal lengths.

13. The method of claim 9, wherein the Fresnel mask patterns are angularly offset relative to each other.

14. The method of claim 9, further comprising reconstructing a holographic image of the object from the holographic interference pattern.

15. The method of claim 14, wherein reconstructing a holographic image comprises numerically processing the holographic interference pattern.

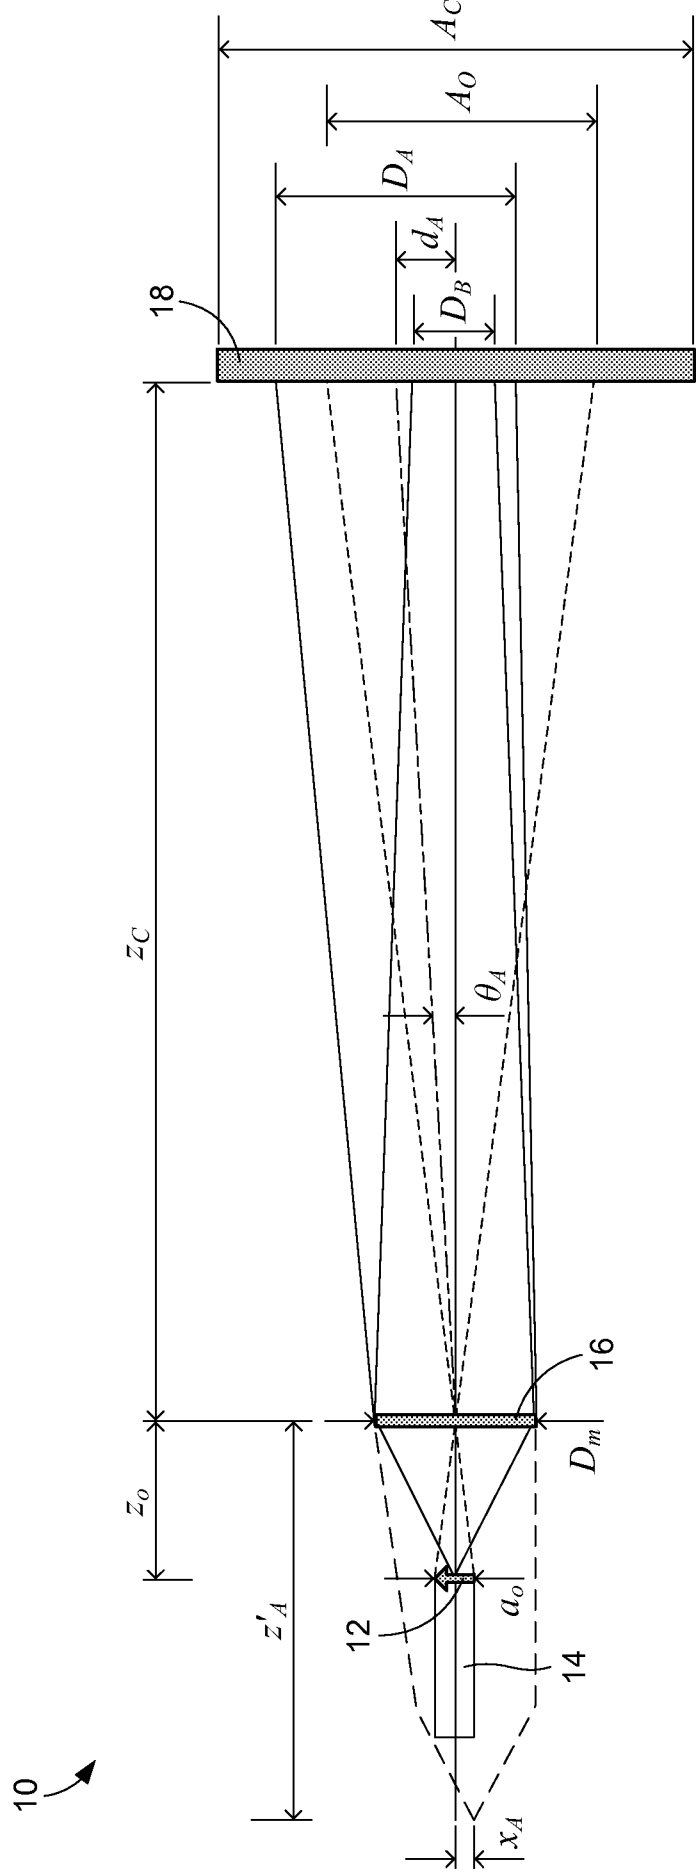


FIG. 1

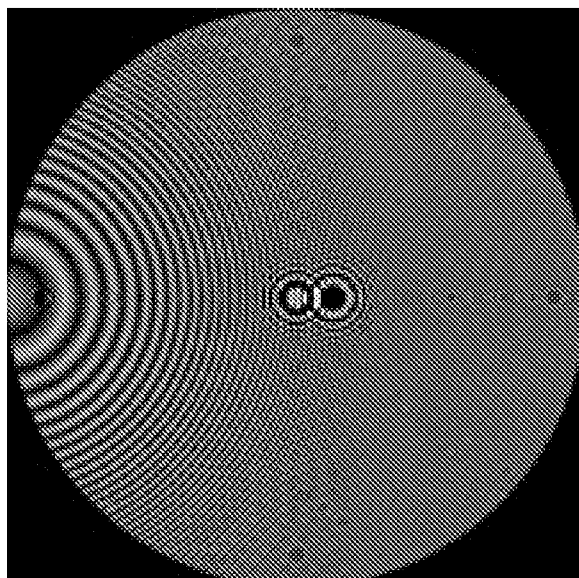


FIG. 2A

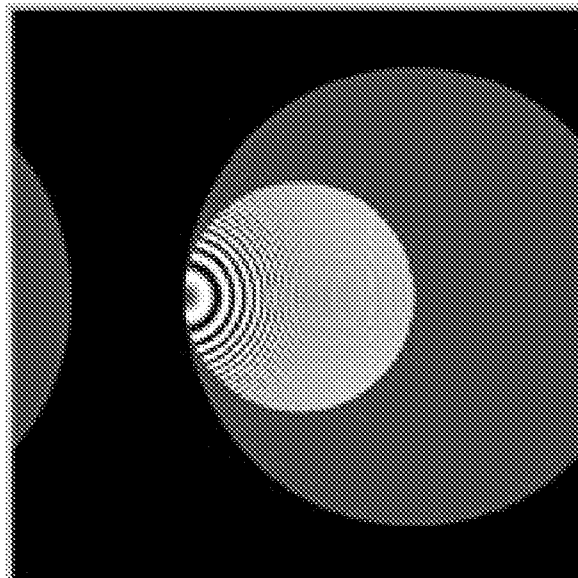


FIG. 2B

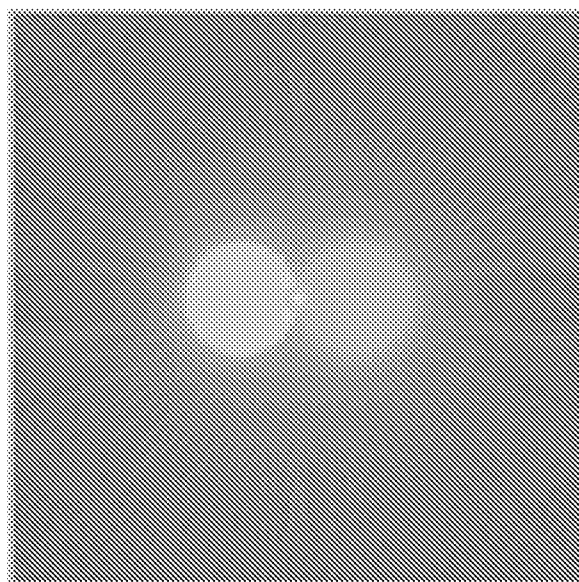


FIG. 2C

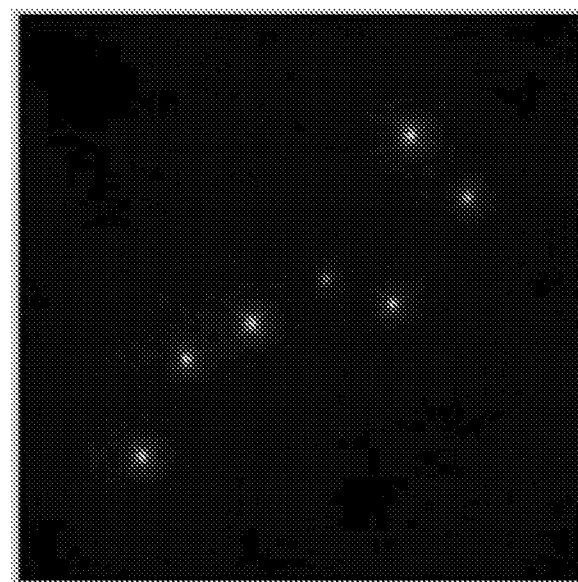


FIG. 2D

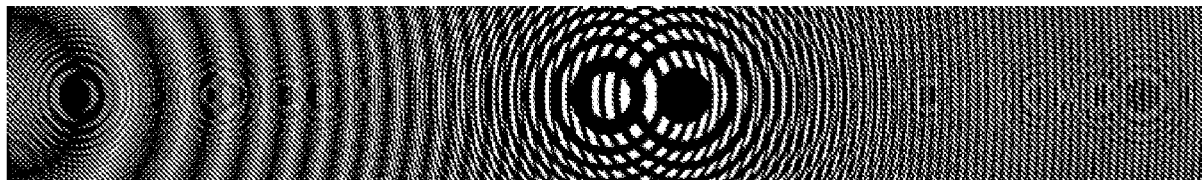


FIG. 3

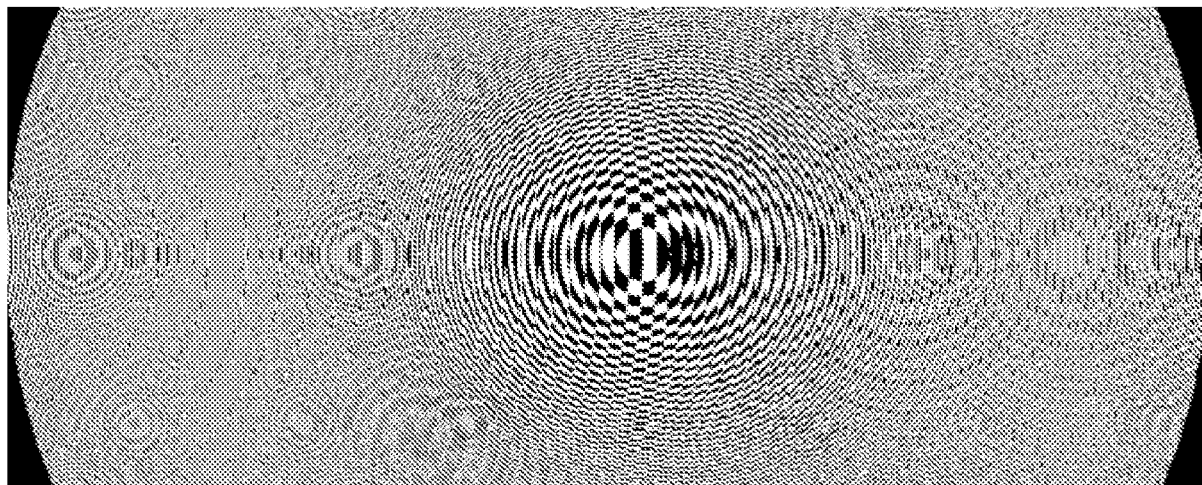


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2015/039479

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G03H 1/08 (2015.01)

CPC - G03H 1/0866 (2015.04)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - G03H 1/00, 04, 08 (2015.01)

USPC - 359/9, 10, 11, 30

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CPC - G03H 1/00, 04, 2001/0436, 2001/0441, 0443, 08, 0866, 0891 (2015.04) (keyword delimited)

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatBase, Google Patents, Google

Search terms used: self-interference, incoherent holography, fresnel mask

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2013/0188232 A1 (ROSEN) 25 July 2013 (25.07.2013) entire document	1-15
A	US 3,831,031 A (BARRETT et al.) 20 August 1974 (20.08.1974) entire document	1-15
A	US 4,146,295 A (FONROJET et al.) 27 March 1979 (27.03.1979) entire document	1-15
A	US 5,081,540 A (DUFRESNE et al.) 14 January 1992 (14.01.1992) entire document	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

10 September 2015

Date of mailing of the international search report

02 OCT 2015

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Blaine Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774