

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 July 2006 (27.07.2006)

PCT

(10) International Publication Number
WO 2006/078871 A2

(51) International Patent Classification:
A61B 5/103 (2006.01)

[US/US]; 1770 Clos Duval Court, Benicia, CA 94510 (US).

(21) International Application Number:
PCT/US2006/001981

(74) Agents: **YIM, Peter, J.** et al.; MORRISON & FOERSTER LLP, 425 Market Street, San Francisco, CA 94105-2482 (US).

(22) International Filing Date: 18 January 2006 (18.01.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/645,417 18 January 2005 (18.01.2005) US

(71) Applicant (for all designated States except US): **THE REGENTS OF THE UNIVERSITY OF CALIFORNIA** [US/US]; 1111 Franklin Street, 12th Floor, Oakland, CA 94607-5200 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **KAZEROONI, Homayoon** [US/US]; 2806 Ashby Avenue, Berkeley, CA 94705 (US). **HARDING, Nathan, H.** [US/US]; 320 Forest Street, Oakland, CA 94618 (US). **ANGOLD, Russdon**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: LOWER EXTREMITY EXOSKELETON

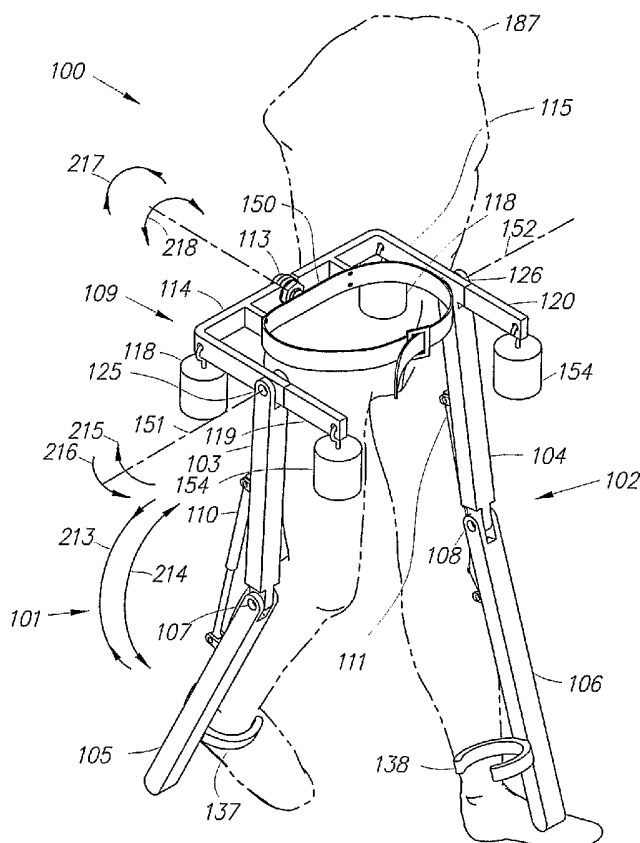

(57) Abstract: A lower extremity exoskeleton, configurable to be coupled to a person, comprises two leg supports configurable to be coupled to the person's lower limbs and configured to rest on the ground during their stance phases. Each leg support comprises a thigh link, a shank link, and two knee joints. Each knee joint is configured to allow flexion and extension between the respective shank link and the respective thigh link. The lower extremity exoskeleton also comprises an exoskeleton trunk configurable to be coupled to the person's upper body. The exoskeleton trunk is rotatably connectable to the thigh links of the leg supports allowing for the flexion and extension between the leg supports and the exoskeleton trunk. In this exemplary embodiment, the energy required for flexion and extension movement between the shank link and the respective thigh link of a leg support over a cyclic knee motion is provided by the person.



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,
RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

Declaration under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

LOWER EXTREMITY EXOSKELETON

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of U.S. Provisional Application No. 60/645,417, titled LOWER EXTREMITY EXOSKELETON, filed January 18, 2005, the entire content of which is incorporated herein by reference.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

[0002] This invention was made with government support under Contract No. DAAD19-01-1-0509 awarded by Defense Advanced Research Projects Agency (DARPA). The government has certain rights in the invention.

BACKGROUND

1. Field

[0003] The present application relates generally to the field of lower extremity exoskeletons and more specifically to the field of low power lower extremity exoskeletons.

2. Related Art

[0004] In a wide variety of situations, people are often frustrated in attempting to carry excessively heavy or bulky objects while walking. Some people cannot even carry their own weights without becoming tired quickly or injured. Opportunities exist, therefore, to provide a compact, easy-to-operate, fast, and general purpose device to carry loads and weights while the device is coupled to a person.

SUMMARY

[0005] In one exemplary embodiment, a lower extremity exoskeleton is configurable to be coupled to a person. The lower extremity exoskeleton comprises two leg supports configurable to be coupled to the person's lower limbs and configured to rest on the ground during their stance phases. Each leg support comprises a thigh link, a shank link, and two knee joints. Each knee joint is configured to allow flexion and extension between the respective shank link and the respective thigh link. The lower extremity exoskeleton also comprises an exoskeleton trunk

configurable to be coupled to the person's upper body. The exoskeleton trunk is rotatably connectable to the thigh links of the leg supports allowing for the flexion and extension between the leg supports and the exoskeleton trunk. In this exemplary embodiment, the energy required for flexion and extension movement between the shank link and the respective thigh link of a leg support over a cyclic knee motion is provided by the person.

DESCRIPTION OF DRAWING FIGURES

[0006] The present application can be best understood by reference to the following description taken in conjunction with the accompanying drawing figures, in which like parts may be referred to by like numerals:

[0007] Figure 1 is a front view perspective drawing in accordance with an embodiment of the present invention.

[0008] Figure 2 is a rear view perspective drawing of the embodiment of Figure 1.

[0009] Figure 3 is a perspective drawing in accordance with an embodiment of the present invention.

[0010] Figure 4 is a perspective drawing in accordance with an embodiment of the present invention.

[0011] Figure 5 is a perspective drawing in accordance with an embodiment of the present invention.

[0012] Figure 6 is a perspective drawing in accordance with an embodiment of the present invention.

[0013] Figure 7 is a perspective drawing in accordance with an embodiment of the present invention.

[0014] Figure 8 is a perspective drawing in accordance with an embodiment of the present invention.

[0015] Figure 9 is a perspective drawing in accordance with an embodiment of the present invention.

[0016] Figure 10 is a partial view of the invention of the embodiment of Figure 9.

[0017] Figure 11 is a partial view of the invention of the embodiment of Figure 9.

[0018] Figure 12 is a perspective drawing in accordance with an embodiment of the present invention.

[0019] Figure 13 is a perspective drawing in accordance with an embodiment of the present invention.

[0020] Figure 14 is a perspective drawing in accordance with an embodiment of the present invention.

[0021] Figure 15 is a perspective drawing in accordance with an embodiment of the present invention.

[0022] Figure 16 is a perspective drawing in accordance with an embodiment of the exoskeleton foot.

[0023] Figure 17 is a perspective drawing in accordance with an embodiment of the exoskeleton foot.

[0024] Figure 18 is a perspective drawing in accordance with an embodiment of the exoskeleton foot.

[0025] Figure 19 is a perspective drawing in accordance with an embodiment of the exoskeleton foot.

[0026] Figure 20 is a perspective drawing in accordance with an embodiment of the invention.

[0027] Figure 21 is a perspective drawing in accordance with an embodiment of the invention.

[0028] Figure 22 is a drawing in accordance with an embodiment of the exoskeleton foot.

[0029] Figure 23 is a drawing in accordance with an embodiment of the exoskeleton foot.

[0030] Figure 24 is a drawing in accordance with an embodiment of the exoskeleton foot.

[0031] Figure 25 is a drawing in accordance with an embodiment of the exoskeleton foot.

[0032] Figure 26 is a drawing in accordance with an embodiment of the exoskeleton foot.

[0033] Figure 27 is a drawing representing an embodiment of the exoskeleton hydraulic circuitry.

[0034] Figure 28 is a drawing representing an embodiment of the exoskeleton hydraulic circuitry.

[0035] Figure 29 is a drawing representing an embodiment of the exoskeleton hydraulic circuitry.

[0036] Figure 30 is a drawing representing an embodiment of the exoskeleton hydraulic circuitry.

[0037] Figure 31 is a drawing representing an embodiment of the exoskeleton hydraulic circuitry.

[0038] Figure 32 is a drawing representing an embodiment of the exoskeleton hydraulic circuitry.

[0039] Figure 33 is a drawing representing an embodiment of the exoskeleton hydraulic circuitry.

[0040] Figure 34 is a perspective drawing in accordance with an embodiment of the invention.

[0041] Figure 35 is a drawing representing an embodiment of the exoskeleton.

[0042] Figure 36 is a drawing representing an embodiment of the exoskeleton.

DETAILED DESCRIPTION

[0043] The following description sets forth numerous specific configurations, parameters, and the like. It should be recognized, however, that such description is not intended as a limitation on the scope of the present invention, but is instead provided as a description of exemplary embodiments.

[0044] In accordance with an embodiment of the present invention, **Figures 1 and 2** are front view and rear view perspective drawings illustrating a lower extremity exoskeleton **100**. Lower extremity exoskeleton **100** is configurable to be coupled to a person **187**. Lower extremity exoskeleton **100** comprises two leg supports **101** and **102** which are configurable to be coupled to the person's lower limbs and configured to rest on the ground during the stance phase of each leg support. The leg supports comprise thigh links **103** and **104** and shank links **105** and **106**. Two knee joints **107** and **108** are configured to allow flexion and extension (shown by arrows **213** and **214** respectively) between the shank link and the thigh link of leg supports **101** and **102**. Lower extremity exoskeleton **100** further comprises an exoskeleton trunk **109**. Exoskeleton trunk **109**, among other components, comprises a human interface device **150**. Exoskeleton trunk **109** is configurable to be coupled to the person's upper body through human interface device **150**. The person's upper body means any location above the thighs. Exoskeleton trunk **109** is rotatably connectable to thigh links **103** and **104** of leg supports **101** and **102** at hip flexion-extension joints **125** and **126**, allowing for the hip flexion and extension rotations (shown by arrows **215** and **216** respectively) of leg supports **101** and **102** about hip flexion-extension axes **151** and **152** respectively.

[0045] In operation the energy required for flexion and extension movement between a shank link (**105** or **106**) and the corresponding thigh link (**103** and **104**) of a leg support over a cyclic knee motion is provided by person **187**. A cyclic knee motion here is defined as a motion where the initial and the final configurations of a shank link (**105** or **106**) and its corresponding thigh link (**103** or **104**) with respect to each other are nearly identical. In particular when a leg support is in a swing phase, a cyclic knee motion is a motion where the leg support is not in

contact with the ground and the initial and the final configurations of the corresponding shank link and thigh link with respect to each other are nearly identical. Likewise, when a leg support is in a stance phase, a cyclic knee motion is a motion where the leg support is in contact with the ground and the initial and the final configurations of the corresponding shank link and thigh link with respect to each other are nearly identical.

[0046] In the above embodiment, the torque required for flexion or extension between shank link (105 or 106) and the corresponding thigh link (103 and 104) is provided by person 187. Two knee joints 107 and 108, each configured to allow flexion and extension between respective shank link (105 or 106) and the corresponding thigh link (103 and 104) without the use of energy from a power source other than the energy provided by the person. A power source may be used in lower extremity exoskeleton 100 to provide power for sensors, computers and other components, but does not provide energy for flexion and extension motion between the shank links the thigh links. By power source we mean any system that produces power such as batteries, compressed gas, air compressors, hydraulic compressors, combustion engines, solar cells, and the like.

[0047] In some embodiments of the invention, each said leg support is configured to allow flexion of the respective knee joint during the swing phase, and to resist flexion of the respective knee joint during the stance phase to allow the transfer of a force to the ground.

[0048] In operation, person 187 couples to (or wears) lower extremity exoskeleton 100 by coupling to human interface device 150 (a simple belt in this case of Figure 1) and by coupling to two leg supports 101 and 102. In some embodiments as shown in Figure 1, leg supports 101 and 102 comprise shank holding devices 137 and 138 that couple person 187 to leg supports 101 and 102.

[0049] In some embodiments of the invention, the energy required for flexion and extension of thigh links 103 and 104 about hip flexion-extension axes 151 and 152 over a cyclic hip motion is also provided by person 187. A cyclic hip motion here is defined as a motion where the initial and the final configurations of a thigh link (103 or 104) with respect to exoskeleton trunk 109 are nearly identical.

[0050] In some embodiments as shown in Figure 1, exoskeleton trunk 109 includes two hip links 114 and 115 rotatably connectable to thigh links 103 and 104 at hip flexion-extension joints 125 and 126, allowing for the flexion and extension of leg supports 101 and 102 about hip flexion-extension axes 151 and 152 respectively. In some embodiments, hip links 114 and 115 are rotatably connected to each other at abduction-adduction joint 113 allowing for abduction

and/or adduction of leg supports **101** and **102**. Abduction and adduction of leg supports **101** and **102** are shown by arrows **217** and **218** respectively.

[0051] In some embodiments, exoskeleton trunk **109** is configured to hold a rear load **118** behind person **187**. In some embodiments, as shown in **Figure 1**, rear load **118** is held by hip links **114** and **115**. In some embodiments, exoskeleton trunk **109** further comprises extension frames **119** and **120** configured to hold a front load **154** in front of person **187**. In some embodiments (as shown in **Figure 1**) extension frames **119** and **120** are connectable to hip links **114** and **115**. Examples of rear load **118** and front load **154** include without limitation, backpack, baby carrier, food containers, sacks, water jugs, tool boxes, barrels, ammunition, weaponry, bedding, first aid supplies, golf bags, mail bags, camera, leaf blower, compressor, electromechanical machineries and combinations thereof. In some embodiments, rear load **118** and/or front load **154** are another person being carried by person **187**. In some embodiments, exoskeleton trunk **109** supports a portion of the weight of person **187** through human interface device **150**.

[0052] In some embodiments of the invention, as shown in **Figure 3**, exoskeleton trunk **109** further comprises a hip resilient element **116** configured to apply a torque between hip links **114** and **115**. Examples of a hip resilient element include, without limitation, extension spring, compression spring, leaf spring, gas spring, air spring, rubber, elastomer, surgical tube, bungee cord and combinations thereof. The stiffness of hip resilient element **116** may be chosen such that its force generally holds up the weight of the leg supports **101** or **102** during swing phase.

[0053] Some embodiments, as shown in **Figure 3**, may also include a hip abduction stop **211** which limits the abduction of hip links **114** and **115** with respect to each other. In the particular embodiment shown in **Figure 3**, abduction stop **211** is created using a wire rope. Wire rope **211** limits the abduction of leg supports **101** and **102** but allows adduction of leg supports **101** and **102**.

[0054] In accordance with another embodiment of the invention, **Figure 4** is a perspective drawing where exoskeleton trunk **109** includes two hip links **114** and **115** rotatably connectable to thigh links **103** and **104** allowing for flexion and extension of support legs **101** and **102** relative to exoskeleton trunk **109**, wherein hip links **114** and **115** are compliantly connected to each other allowing for abduction and/or adduction of leg supports **101** and **102**. In the example shown in **Figure 4**, this is accomplished by leaf spring **153**.

[0055] In accordance with another embodiment of the invention, **Figure 5** is a perspective drawing wherein exoskeleton trunk **109** further comprises a connecting bracket **117** configured to transfer the weight of rear load **118** to exoskeleton trunk **109**. Exoskeleton trunk **109** further

comprises two hip links **114** and **115** rotatably connectable to thigh links **103** and **104** allowing for flexion and extension of leg supports **101** and **102** relative to exoskeleton trunk **109**. Hip links **114** and **115** are rotatably connected to connecting bracket **117** via two hip abduction-adduction joints **176** and **177** and rotate about two hip abduction-adduction axes **178** and **179**. In some embodiments, hip abduction-adduction axes **178** and **179** are generally parallel to each other. In some embodiments, hip abduction-adduction joints **176** and **177** coincide with each other. Furthermore, in some embodiments, as shown in **Figure 6**, hip abduction-adduction joints **176** and **177** coincide with each other forming hip abduction-adduction joint **113** and hip abduction-adduction axes **178** and **179** become one hip abduction-adduction axis **112**.

[0056] In some embodiments, as shown in **Figure 6**, exoskeleton trunk **109** further comprises hip abduction-adduction resilient elements **121** and **122** configured to apply torques between hip links **114** and **115** and connecting bracket **117**. Examples of hip abduction-adduction resilient elements include, without limitation, extension spring, compression spring, gas spring, air spring, rubber, surgical tube, leaf springs, bungee cord and combinations thereof. The stiffness of hip abduction-adduction resilient elements **121** and **122** may be chosen such that its force generally holds up the weight of the leg supports **101** or **102** during swing phase and aid the person in keeping the load oriented vertically while walking. In some embodiments as shown in **Figure 7**, connecting bracket **117** further comprises extension frames **119** and **120** configured to hold front load **154** in front of person **187**.

[0057] In some embodiments of the invention, as shown in **Figures 1, 5, 6 and 7**, exoskeleton trunk **109** comprises human interface device **150** capable of coupling person **187** to lower extremity exoskeleton **100**. Examples of human interface device **150** comprise an element or combination of elements including, without limitation, vests, belts, straps, shoulder straps, chest straps, body cast, harness, and waist belts. In some embodiment human interface device **150** transfers a portion of the weight of person **187** to exoskeleton trunk **109**. **Figure 13** shows an embodiment of the invention where human interface device **150** comprises a specially-designed harness **229** to fit the body of person **187**. Harness **229** transfers a portion of the weight of person **187** to exoskeleton trunk **109**.

[0058] In some embodiments, as shown in **Figure 8**, hip links **114** and **115** are compliantly connected to connecting bracket **117**. In the embodiment shown in **Figure 8**, this is accomplished by a hip compliant member **153** which in this case is a leaf spring.

[0059] In some embodiments, as shown in **Figure 8**, exoskeleton trunk **109** comprises a backpack frame **180** that allows a backpack to be coupled to lower extremity exoskeleton **100**. In some embodiments, backpack frame **180** is connected to connecting bracket **117**. The human

interface devices **150** (such as a belt and shoulder straps) have been omitted in this figure for clarity.

[0060] In accordance with another embodiment of the invention, **Figure 9** is a perspective drawing wherein leg supports **101** and **102** further include thigh abduction-adduction joints **123** and **124** configured to allow abduction and/or adduction of leg supports **101** and **102** about axes **202** and **203** respectively. In some embodiments, thigh abduction-adduction joints **123** and **124** are located below hip flexion-extension joints **125** and **126**. These joints are shown in greater detail in **Figure 10** which is a partial view of the same embodiment of **Figure 9**.

[0061] In some embodiments of the invention, as shown in **Figure 10**, leg supports **101** and **102** comprise a thigh adduction stop **185** which limits or prevents thigh links **103** and **104** from adducting at joint **123**. Abduction and adduction of leg support **101** are shown by arrows **219** and **220** respectively. In the particular embodiment shown in **Figure 10**, thigh abduction-adduction joint **123** includes a thigh adduction stop **185** which bears on a thigh stop surface **186**. Thigh adduction stop **185** limits the adduction of thigh abduction-adduction joint **123**. The unrestricted adduction of thigh abduction-adduction joint **123** would cause hip link **114** to move downwardly along arrow **204** during stance thereby dropping (lowering) the load. Such abduction-only joints for joints **123** and **124** are useful in allowing the person to squat naturally.

[0062] In some embodiments, as shown in **Figures 9** and **10**, leg supports **101** and **102** further comprise leg rotation joints **127** and **128** configured to allow rotation of leg supports **101** and **102**. In some embodiments, leg rotation joints **127** and **128** are located above knee joints **107** and **108**. Lines **164** and **165** in **Figure 10** represent the rotation axes of leg rotation joints **127** and **128**. In **Figures 10** and **11**, this is accomplished by providing for a sliding contact between the hip rotation shaft **166** and the hip rotation journal **168**. Arrows **227** and **228** represent the leg rotational motion around axes **164** and **165**. The parts included in the joint which prevent it from pulling apart have been omitted for simplicity, but one skilled in the art will note that there are many ways of retaining such shafts in such journals.

[0063] In some embodiments, as shown in **Figure 11**, leg rotation joint **127** includes a leg rotation resilient element **129**. This leg rotation resilient element provides a restoring torque which generally restores the leg back to a neutral position. Leg rotation resilient element **129** can be constructed in many ways, with the particular cross section shown in **Figure 11** being advantageous when using an elastomeric material to construct the element. Leg rotation resilient element **129** is shown partially deflected for illustration purposes.

[0064] Also, in some embodiments, as shown in **Figure 10** and **Figure 11**, leg supports **101** and **102** further comprise compression-elongation mechanisms **131** and **132** configured to change

the distance between exoskeleton trunk **109** and the respective knee flexion-extension joints **107** and **108**. In some embodiments, compression-elongation mechanisms **131** and **132** allow for changes in the distance between the hip flexion-extension joints **125** and **126** and the respective knee flexion-extension joints **107** and **108**. The compression-elongation mechanisms contracts by hip rotation shaft **166** sliding further into the hip rotation journal **168** (shown for leg **101** only). The leg rotation resilient element **129** is allowed to slide into a clearance cavity **170**. In some embodiments, compression-elongation mechanism **131** and **132** further comprise a leg compression-elongation resilient element **133**. This leg compression-elongation resilient element acts as a spring and provides a restoring force which generally restores the leg support back to a neutral configuration. In the embodiment of **Figure 11**, this is illustrated by a helical spring.

[0065] In some embodiments, as shown in **Figure 12**, lower extremity exoskeleton **100** further comprises two swing resilient elements configured to apply torque between thigh links **103** and **104** and exoskeleton trunk **109**. In operation swing resilient element **221** pushes leg link **101** forward along arrows **222** during swing phase. This allows the person to swing the thigh links forward with less effort. Gas spring **221** includes a gas spring piston **223** and a gas spring cylinder **224**. In operation the force of compressed gas **225** in gas spring cylinder **224** forces gas spring piston **223** against cam **226** thereby pushing leg link **101** along arrow **222**. Examples of a swing resilient element, **221**, include, without limitation, extension spring, compression spring, leaf spring, gas spring, air spring, rubber, elastomer, surgical tube, bungee cord and combinations thereof. The stiffness of swing resilient element **221** may be chosen to give appropriate level of comfort.

[0066] In some embodiments, as shown in **Figure 9**, exoskeleton trunk cover **171** may cover some components of exoskeleton trunk **109** including parts of hip links **114** and **115**. The operation of the exoskeleton trunk is the same as in **Figures 3** or **6** depending on the preferred choice of hip resilient element **116** or hip abduction-adduction resilient elements **121** and **122**.

[0067] In some embodiments as shown in **Figure 9**, thigh links **103** and **104** comprise thigh holding devices **135** and **136** configured to allow person **187** to couple to leg supports **101** and **102**. Each thigh holding device **135** or **136** comprises an element or combination of elements including, without limitation, straps, bars, c-shape brackets, body cast, and elastomers. In some embodiments, as shown in **Figure 1**, shank links **105** and **106** include comprise holding devices **137** and **138** configured to allow person **187** to couple to leg supports **101** and **102**. Each shank holding device **137** and **138** comprises an element or combination of elements including, without limitation, straps, bars, c-shape brackets, body cast, and elastomers.

[0068] In some embodiments exoskeleton **100** comprises two torque generators **110** and **111** which are configured to allow flexion of knee joints **107** and **108** during swing phase, and resist flexion of knee joints **107** and **108** during stance phase, thereby allowing the lower extremity exoskeleton **100** to bear a load and transfer the load forces (e.g., load weight) to the ground.

[0069] In some embodiments, torque generators **110** and **111** are hydraulic torque generators. In accordance with embodiments shown in **Figure 1**, through **Figure 9** torque generators **110** and **111** are hydraulic piston cylinders where the motion of the piston relative to the cylinder creates hydraulic fluid flow into or out of the cylinder. In operation, the hydraulic fluid flow into or out of the cylinder may be controlled by a hydraulic valve. The smaller the hydraulic valve orifice size is set, the more force is needed to move the piston relative to the cylinder with a given speed. In other words, the more damped the motion of the piston relative to the cylinder needs to be, the smaller the hydraulic valve orifice size should be. If the hydraulic valve orifice size is set to be large, then a small force is required to move the piston relative to the cylinder. Here impedance of hydraulic torque generator **110** or **111** is defined as the ratio of the required force over the velocity in frequency domain. With this definition, the smaller the hydraulic valve orifice size is chosen to be, the larger the impedance of the hydraulic torque generator will be.

[0070] In some embodiments, as shown in **Figure 13**, torque generators **110** and **111** are hydraulic rotary dampers where produced torque may be controlled by a hydraulic valve. The smaller the hydraulic valve orifice size is set, the more torque is needed to rotate the hydraulic rotary damper with a given speed. In other words, the more damped the rotation of the hydraulic rotary damper needs to be, the smaller the hydraulic valve orifice size should be. Here impedance of hydraulic rotary dampers **110** or **111** is defined as the ratio of the required torque over the angular velocity in frequency domain. With this definition, the smaller the hydraulic valve orifice size is chosen to be, the larger the impedance of the hydraulic rotary damper will be.

[0071] In some embodiments torque generators **110** and **111** are friction brakes where one can control the resistive torque on knee joints **107** and **108** by controlling the friction torques. In other embodiments torque generators **110** and **111** are viscosity based friction brakes where one can control the resistive torque on knee joints **107** and **108** by controlling the viscosity of the fluid. In other embodiments, torque generators **110** and **111** are Magnetorheological Fluid Devices where one can control the resistive torque on knee joints **107** and **108** by controlling the viscosity of the Magnetorheological Fluid. One skilled in the art realizes that any of the above devices can be mounted in the invention to function in the same way as the hydraulic rotary dampers shown in **Figure 13**.

[0072] In some embodiments, as shown in **Figure 9**, leg supports **101** and **102** further comprise exoskeleton feet **139** and **140** coupled to shank links **105** and **106** respectively, allowing the transfer of forces from shank links **105** and **106** to the ground. In operation, exoskeleton feet **139** and **140** are configurable to be coupled to the feet of person **187**. In some embodiments, as shown in **Figure 9**, the coupling to person's feet is accomplished by using clam-shell type bindings **205** and **206** sometimes found on modern snow shoes. However, there are a great number of methods to make such a connection as can be seen on different types of snow skis, snowboards, snowshoes and other such devices. In some embodiments, as shown in **Figure 14**, exoskeleton feet **139** and **140** comprise exoskeleton shoes **188** and **189** wearable by person **187** thereby allowing exoskeleton feet **139** and **140** to couple to the feet of person **187**. In some embodiments, as shown in **Figure 15**, exoskeleton feet **139** and **140** comprise exoskeleton insoles **157** and **158** insertable inside the person's shoes, allowing exoskeleton feet **139** and **140** to couple to the feet of person **187**. Insoles **157** and **158** are flexible and therefore can bend to match the curvature of the human foot during maneuvers such as squatting. Also, the insole side supports **212** are either compliant or configured to include degrees of freedom to mimic the movement of the human ankle.

[0073] In some embodiments, as shown in **Figure 9**, exoskeleton feet **139** and **140** are compliantly coupled to shank links **105** and **106**. This is accomplished using ankle compliant elements **181** and **182**. **Figure 16** shows a close-up view of exoskeleton feet **139**. In this example, ankle compliant elements **181** (and **182**) each are constructed of a metal ball-and-socket joint **231** surrounded by an elastomer donut shape element **230** which creates compliance in all directions of rotations.

[0074] In some embodiments, exoskeleton feet **139** and **140** rotate about two plantar-dorsi flexion axes relative to shank links **105** and **106**. **Figure 17** shows an embodiment of this type of exoskeleton where ankle plantar-dorsi flexion axis **172** is generally parallel to the plantar-dorsi flexion axis in the human ankle. In some embodiments, each leg support further comprises at least one ankle plantar-dorsi flexion resilient element **141** resisting the rotation of respective exoskeleton foot about ankle plantar-dorsi flexion axis **172**.

[0075] In some embodiments, as shown in **Figure 18**, exoskeleton feet **139** and **140** rotate about two abduction-adduction axes **174** and **175** relative to shank links **105**. **Figure 18** shows an embodiment of this type of exoskeleton where ankle abduction-adduction axis **174** is generally parallel to the abduction-adduction axis in the human ankle. In some embodiments each leg support further comprises at least one ankle abduction-adduction resilient element **142** resisting the rotation of exoskeleton foot **139** about ankle abduction-adduction axis **174**.

[0076] In some embodiments, as shown in **Figure 19**, exoskeleton feet **139** and **140** rotate about two rotation axes **147** and **148** relative to shank links **105** and **106**. In some cases, this is accomplished using a shank rotation joint **207** which functions similar to leg rotation joint **127**. **Figure 19** shows an embodiment of this type of exoskeleton where ankle rotation axis **147** is generally parallel to the rotation axis in the human ankle. In some embodiments, resilient elements can be included in the ankle to resist the rotation of the exoskeleton foot **139** about ankle rotation axis **147**.

[0077] In some embodiments, as shown in **Figure 20**, lower extremity exoskeleton **100** further comprises controller **159** configured to control torque generators **110** and **111**. Controller **159**, in some embodiments, is mounted to exoskeleton trunk **109**. In some embodiments controller **159** is mounted to torque generators **110** and **111**. Controller **159** may be a simple mechanical device consisting of hydraulic or pneumatic circuitry or it may include electronic elements as well.

[0078] In some embodiments, as shown in **Figure 21**, exoskeleton **100** comprises at least one foot sensor **160** per leg support which produces a stance signal **190** representing the force on the bottom of each foot of person **187**. The information from foot sensor **160** identifies whether the foot of person **187** is in a stance phase or in a swing phase. Controller **159** controls the torque generators **110** and **111** as a function of the signals from the respective foot sensors.

[0079] In some embodiments, as shown in **Figure 22**, foot sensors **160** are integrated into exoskeleton feet **139** and **140**. In some embodiments, as shown in **Figure 22**, foot sensor **160** is a pressure sensor measuring the pressure in a media **191** trapped in a foot sensor cavity **192** inside exoskeleton foot **139**. **Figure 16** shows an embodiment where a tube is used as a foot sensor cavity **192**. Pressure sensor **160** measures the pressure in a media **191** trapped in a foot sensor cavity **192**. In some cases, the stance signal **190** may take the form of the media **191** itself ported in a small tube from the cavity **192** to the controller **159** where the pressure in the media is used to move a mechanical valving in response to person's force on exoskeleton feet **139** and **140**. In that case, no electronics would be required to construct controller **159**.

[0080] **Figure 23** shows another embodiment wherein foot sensor **160** is a force sensor connectable to exoskeleton foot **139**. In some embodiments, as shown in **Figure 24**, foot sensor **160** is located inside the human shoe like an insole and its output signal represents the force on the bottom of the human foot. This type would be particularly useful in embodiments of the invention such as those shown in **Figure 14** or **15**. In some embodiments, as shown in **Figure 25**, foot sensor **160** is connected to the bottom of the human shoe and senses the force on the bottom

of the human foot. In some embodiments, as shown in **Figure 26**, foot sensor **160** is located inside the human shoe sole and senses the force on the bottom of the human foot.

[0081] Foot sensor **160** comprises any sensor or combination of sensors capable of performing the indicated functions. Examples of foot sensor **160** include, without limitation, force sensors, strain-gage based force sensors, piezoelectric force sensors, force sensing resistors, pressure sensors, switches, tape switches and combinations thereof. In some embodiments foot sensor **160** is a switch that represents the existence of a force greater than some threshold force on the bottom of the foot of person **187**.

[0082] Controller **159** controls the resistance to flexion in knee joints **107** and **108** as a function of the signals from the respective foot sensors. For example, when foot sensor **160** detects the stance phase in the right leg support, controller **159** will increase the impedance of torque generator **110** so knee joint **107** resists flexion. Conversely, when foot sensor **160** detects the swing phase, controller **159** will decrease the impedance of torque generator **110** so no resistance to flexion occurs in knee joint **107**. Large impedances of torque generators **110** and **111** lead to large resistance of knee joints **107** and **108** to flexion needed during stance phase. Conversely, small impedances of torque generators **110** and **111** lead to small resistance of knee joints **107** and **108** to flexion needed during swing phase.

[0083] It is important to note that a foot sensor is not a requirement of the invention since there are other methods to determine when stance phase and swing phase are occurring. One such method is to sense when the knee hyperextends (as typically occurs when the leg support swings directly under the person's body during stance) and to assume that swing phase begins at that moment. The end of swing phase would then be estimated by detecting when the knee stops extending. To implement this strategy, controller **159** might be a simple mechanical/hydraulic device built into a hydraulic cylinder which uses the motion of the cylinder to actuate the valving within it.

[0084] **Figure 27** shows an embodiment of the invention for leg support **101** where torque generator **110** comprises hydraulic piston-cylinder **193** and controller **159** includes a hydraulic circuitry **194** to control the fluid flow to hydraulic piston-cylinder **193**. In general, during stance phase, hydraulic circuitry **194** restricts the fluid flow from hydraulic piston-cylinder **193**. The restriction in the fluid flow leads to large impedance for the hydraulic piston-cylinder **193** and allows leg support **101** to resist flexion. Conversely, a small restriction in the fluid flow leads to small impedance for piston-cylinder **193** and allows leg support **101** to flex easily.

[0085] In some embodiments, controller **159** controls the fluid flow from hydraulic piston-cylinder **193** as a function of stance signal **190**. Foot sensor **160** detects the force on the bottom

of the person's foot when the person's foot is on the ground (stance phase). Controller 159 restricts the fluid flow from hydraulic piston-cylinder 193 based on received stance signal 190. The restriction in the fluid flow leads to a large impedance for the piston-cylinder 193 and allows leg support 101 to resist flexion. When foot sensor 160 detects that the person's foot is not on the ground (i.e., there is no force on the bottom of the person's foot), controller 159 decreases the restriction on the fluid flow to hydraulic piston-cylinder 193. A small restriction on the fluid flow leads to a small impedance for piston-cylinder 193 and allows leg support 101 to flex easily.

[0086] **Figure 28** shows an embodiment of the invention where hydraulic circuitry 194 comprises an actuated flow-restricting valve 200 connecting piston-cylinder 193 to a hydraulic reservoir 195. Controller 159 controls actuated flow-restricting valve 200. Actuated flow-restricting valve 200 increases the restriction on the fluid flow during stance phase and decreases the restriction on the fluid flow during swing phase.

[0087] **Figure 29** shows an embodiment of the invention where hydraulic circuitry 194 comprises a hydraulic three-way valve 198 connecting piston-cylinder 193 to a hydraulic reservoir 195 either through a needle valve 196 or a bypass line 197. Hydraulic three-way valve 198 connects piston-cylinder 193 to hydraulic reservoir 195 through needle valve 196 during stance phase thereby restricting the hydraulic flow and increasing the impedance of piston-cylinder 193. During swing phase, hydraulic three-way valve 198 connects piston-cylinder 193 to hydraulic reservoir 195 through bypass line 197, thereby increasing the hydraulic fluid flow and decreasing the impedance of piston-cylinder 193.

[0088] **Figure 30** represents another embodiment of the hydraulic circuitry 194. This embodiment is similar to the embodiment of **Figure 29** but an additional check valve 199 has been added to allow the knee to extend easily (no or minimum resistance) at all times.

[0089] **Figure 31** represents another embodiment of the hydraulic circuitry 194 where an actuated flow-restricting valve 200 capable of controlling its orifice size and a check valve 199 connect piston-cylinder 193 to hydraulic reservoir 195. During stance phase controller 159 restricts the fluid flow by controlling the orifice of actuated flow-restricting valve 200. During swing phase controller 159 opens actuated flow-restricting valve 200 and allows for fluid flow to piston-cylinder 193 thereby decreasing the impedance of piston-cylinder 193. Actuated flow-restricting valve 200 comprises any valve or combination of valves capable of performing the indicated functions. Examples of actuated flow restricting valve 200 include, without limitation, flow control valves, pressure control valves and on-off valves. Check valve 199 allows knee joint 107 to extend easily at all times.

[0090] **Figure 32** represents another embodiment of the hydraulic circuitry **194** where a two-way valve **201** capable of selecting between a set orifice size or fully open orifice, and check valve **199** connect piston-cylinder **193** to hydraulic reservoir **195**. During stance phase controller **159** directs the fluid flow to piston-cylinder **193** through the set orifice size of two-way valve **201**. During swing phase controller **159** directs the fluid flow to piston-cylinder **193** through fully open orifice of two-way valve **201**. Check valve **199** allows knee joint **107** to extend easily at all times.

[0091] **Figure 33** represents another embodiment of the hydraulic circuitry **194** where a two-way valve **201**, a check valve **199**, and a needle valve **196** connect piston-cylinder **193** to hydraulic reservoir **195**. During stance phase, controller **159** blocks the fluid flow in two-way valve **201** and therefore flow reaches piston-cylinder **193** through needle valve **196**. During swing phase controller **159** opens two-way valve **201** and allows for minimum resistance. Check valve **199** allows knee joint **107** to extend easily at all times. Needle valve **196** may be manually or automatically adjusted.

[0092] In some embodiments leg support **101** and **102** is configured to allow flexion of the respective knee joint during the swing phase, and to resist flexion of the respective knee joint during the stance phase by locking the knees. One such locking knee is shown in **Figure 34**. In the figure, the shank link **105** includes a shank stop **209** which bears on thigh stop **210** when the knee is hyperextended. The angle of the knee at hyper-extension is illustrated as A in the **Figure 34**. Since this angle is less than 180 degrees, the knee joint **107** or **108** will go “over-center” when approaching hyper-extension, meaning that the knee will tend to lock against the stops if the leg supports **101** and **102** is subject to a compressive load, as would be the case for leg support **102** in the situation illustrated in the figure. One skilled in the art will note that there are many such over-center mechanisms which generally tend to force the load vector on the leg support to pass in front of the knee joint.

[0093] In some embodiments, exoskeleton **100** further comprises knee resilient elements **232** which are configured to encourage flexion of knee joints **107** and **108**. This decreases the person's effort needed to flex knee joints **107** and **108** during the swing phase. In some embodiments, as shown in **Figure 35**, resilient elements **232** are in parallel with torque generators **110** and **111** if any torque generators are included in the exoskeleton. In some embodiments resilient elements **232**, as shown in **Figure 36**, are in series with torque generators **110** and **111** if any torque generators are included in the exoskeleton. In some embodiment, exoskeleton **100** comprises knee resilient elements **232** which are configured to encourage extension of knee joints **107** and **108**. One skilled in the art will note that there are many methods and locations for

installation of resilient element **232** to encourage flexion and/or extension of knee joint **107**. It is further understood that knee resilient elements **232** can also be used with the embodiment of the exoskeleton shown in **Figure 34**.

[0094] While only certain features of the invention have been illustrated and described herein, many modifications and changes will occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

CLAIMS

We claim:

1. A lower extremity exoskeleton, configurable to be coupled to a person, said lower extremity exoskeleton comprising:
 - two leg supports configurable to be coupled to said person's lower limbs and configured to rest on the ground during their stance phases where each said leg support comprises a thigh link and a shank link;
 - two knee joints, each configured to allow flexion and extension between respective shank link and respective thigh link; and
 - an exoskeleton trunk configurable to be coupled to said person's upper body, rotatably connectable to said thigh links of said leg supports allowing for the flexion and extension between said leg supports and said exoskeleton trunk;wherein the energy required for said flexion and extension between the shank link and the respective thigh link of a leg support over a cyclic knee motion is provided by said person.
2. The device of claim 1 wherein each said leg support is configured to allow flexion of said respective knee joint during a swing phase, and to resist flexion of said respective knee joint during the stance phase to allow the transfer of a force to the ground.
3. The device of claim 1 wherein the energy required for flexion and extension movement between a thigh link and said exoskeleton trunk over a cyclic hip motion is provided by said person.
4. The device of claim 1 wherein said exoskeleton trunk further allows for rotation of each said leg support about an abduction-adduction axis generally parallel to ground.
5. The device of claim 1 wherein said exoskeleton trunk further comprises two hip links rotatably connectable to said respective thigh links to allow for said flexion and extension of said support legs relative to said exoskeleton trunk; wherein said hip links are rotatably connected to each other to allow for abduction of leg supports.
6. The device of claim 1 wherein said exoskeleton trunk further comprises two hip links rotatably connectable to said respective thigh links to allow for said flexion and extension of said support legs relative to said exoskeleton trunk; wherein said hip links are rotatably connected to each other to allow for adduction of leg supports.

7. The device of claim 1 wherein said exoskeleton trunk is configured to hold a rear load behind said person when said exoskeleton trunk is coupled to said person's upper body.
8. The device of claim 1 wherein said exoskeleton trunk further comprises an extension frame configured to hold a front load in front of said person when said exoskeleton trunk is coupled to said person's upper body.
9. The device of claim 5 wherein said exoskeleton trunk further comprises a hip resilient element configured to apply a torque between said hip links.
10. The device of claim 6 wherein said exoskeleton trunk further comprises a hip resilient element configured to apply a torque between said hip links.
11. The devices of claim 9 wherein said hip resilient element comprises an elastic element or combination of elastic elements selected from a group consisting of extension spring, compression spring, leaf spring, air spring, gas spring, rubber, elastomer, surgical tube, and bungee cord.
12. The devices of claim 10 wherein said hip resilient element comprises an elastic element or combination of elastic elements selected from a group consisting of extension spring, compression spring, leaf spring, air spring, gas spring, rubber, elastomer, surgical tube, and bungee cord.
13. The device of claim 5 wherein said exoskeleton trunk further comprises a hip abduction stop to limit the abduction of said hip links with respect to each other.
14. The device of claim 1 wherein said exoskeleton trunk further comprises a connecting bracket configured to transfer weight of a load to said exoskeleton trunk.
15. The device of claim 14 wherein said exoskeleton trunk further comprises two hip links rotatably connectable to said respective thigh links to allow for said flexion and extension of said support legs relative to said exoskeleton trunk; wherein said hip links are rotatably connected to said connecting bracket via two hip abduction-adduction joints to allow for rotational motion of said leg supports about two abduction-adduction axes.
16. The device of claim 15 wherein said abduction-adduction axes are generally parallel to each other.
17. The device of claim 15 wherein said abduction-adduction joints coincide on each other.
18. The device of claim 14 wherein said load is an object selected from a group consisting of backpack, baby carrier, food containers, sacks, water jugs, tool boxes, barrels, ammunition, and the like.

weaponry, bedding, first aid supplies, golf bags, mail bags, camera, leaf blower, compressor, electromechanical machineries and combinations thereof.

19. The device of claim 14 wherein said load is another person.
20. The device of claim 15 wherein said exoskeleton trunk further comprises hip abduction-adduction resilient elements configured to apply torques between said hip links and said connecting bracket.
21. The device of claim 20 wherein said hip abduction-adduction resilient elements, each comprises an elastic element or combination of elastic elements selected from a group consisting of extension spring, compression spring, leaf spring, air spring, gas spring, rubber, elastomer, surgical tube, and bungee cord.
22. The device of claim 14 wherein said connecting bracket further comprises an extension frame configured to hold said load in front of said person when said exoskeleton trunk is coupled to said person's upper body.
23. The device of claim 14 wherein said exoskeleton trunk comprises a human interface device capable of coupling said person's upper body to lower extremity exoskeleton.
24. The device of claim 23 wherein said human interface device is capable of transferring a portion of the weight of said person to said exoskeleton trunk.
25. The device of claim 23 wherein said human interface device comprises an element or combination of elements selected from a group consisting of vests, belts, straps, shoulder straps, chest straps, body cast, harness, and waist belts.
26. The device of claim 1 wherein said thigh link of each said leg support further includes a thigh abduction-adduction joint configured to allow abduction of said perspective leg support.
27. The device of claim 26 wherein said abduction-adduction joints are generally located below said hip flexion-extension joints.
28. The device of claim 1 wherein said thigh of each said leg support further includes a thigh abduction-adduction joint configured to allow adduction of said leg support.
29. The device of claim 28 wherein said abduction-adduction joints are generally located below said hip flexion-extension joints.
30. The device of claim 1 wherein each said leg support further includes a leg rotation joint configured to allow rotation of said leg support.

31. The device of claim 30 wherein said leg rotation joints are generally located above said knee flexion-extension joints.
32. The device of claim 30 wherein said leg rotation joints further comprise a leg rotation resilient element that provides a restoring torque which generally restores said leg support back to a neutral position.
33. The device of claim 1 wherein said thigh link of each said leg support further includes a compression-elongation mechanism configured to allow a change in the distance between said hip flexion-extension joint and said knee flexion-extension joint.
34. The device of claim 33 wherein said compression-elongation mechanism comprises a leg compression-elongation resilient element that provides a restoring force which generally restores said leg support back to a neutral configuration.
35. The device of claim 1 further comprising two swing resilient elements configured to apply torque between said thigh links and said exoskeleton trunk.
36. The device of claim 1, wherein each said leg support further comprises a torque generator each configured to allow flexion of said respective knee joint during swing phase, and to resist flexion of said respective knee joint during stance phase to allow the transfer of a force to ground.
37. The device of claim 36 wherein said torque generators are hydraulic piston cylinders, wherein the hydraulic piston cylinder's resistive force can be controlled by controlling the fluid flow in a hydraulic valve.
38. The device of claim 36 wherein said torque generators are viscous rotary dampers, wherein the viscous rotary damper's resistive torque can be controlled by controlling the fluid flow in a hydraulic valve.
39. The device of claim 36 wherein said torque generators are hydraulic piston cylinders, wherein the hydraulic piston cylinder's impedance can be controlled by controlling a hydraulic valve.
40. The device of claim 36 wherein said torque generators are selected from a group consisting of friction brakes, viscosity based friction brakes, and Magnetorheological Fluid Devices.
41. The device of claim 1 wherein said thigh links include thigh holding devices configured to allow said person to couple to said leg supports.

42. The device claim 41 wherein each said thigh holding device comprises an element or combination of elements selected from a group consisting of strap, bar, c-shape brackets, body cast and elastomers.
43. The device of claim 1 wherein said shank links include shank holding devices configured to allow said person to couple to said leg supports.
44. The device claim 43 wherein each said shank holding device comprises an element or combination of elements selected from a group consisting of strap, bar, c-shape brackets, body cast and elastomers.
45. The device of claim 1 wherein each said leg support further comprises an exoskeleton foot configured to be coupled to respective said person's foot and coupled to respective said shank link to allow the transfer of forces from said shank link to the ground.
46. The device of claim 1 wherein each said leg support further comprises an exoskeleton foot coupled to respective said shank link and configured to be coupled to the bottom of the said respective person's shoe to allow the transfer of forces from said shank link to the ground.
47. The device of claim 45 wherein each said exoskeleton foot further comprises a shoe wearable by said person to allow said exoskeleton foot to couple said person's foot.
48. The device of claim 45 wherein each said exoskeleton foot further comprises an exoskeleton insole insertable inside said person's shoe to allow said exoskeleton foot to couple said person's foot.
49. The device of claim 1 wherein each said leg support further comprises an exoskeleton foot configured to be coupled to respective said person's foot and compliantly coupled to respective said shank link to allow the transfer of forces from said shank link to the ground.
50. The device of claim 1 wherein each said leg support further comprises an exoskeleton foot configured to be coupled to respective said person's foot and rotatably coupled to respective said shank link to allow the transfer of forces from said shank link to the ground; said exoskeleton foot rotates about an ankle plantar-dorsi flexion axis generally parallel to plantar-dorsi flexion axis in the human ankle.
51. The device of claim 50 wherein each said leg support further comprises at least one ankle plantar-dorsi flexion resilient element resisting the rotation of respective said exoskeleton foot about said ankle plantar-dorsi flexion axis.

52. The device of claim 1 wherein each said leg support further comprises an exoskeleton foot configured to be coupled to respective said person's foot and rotatably coupled to respective said shank link to allow the transfer of forces from said shank link to the ground; said exoskeleton foot rotates about an ankle abduction-adduction axis generally parallel to abduction-adduction axis in the human ankle.

53. The device of claim 52 wherein said each leg support further comprises at least one ankle abduction-adduction resilient element to resist the rotation of respective said exoskeleton foot about said ankle abduction-adduction axis.

54. The device of claim 1 wherein each said leg support further comprises an exoskeleton foot configured to be coupled to respective said person's foot and rotatably coupled to respective said shank link to allow the transfer of forces from said shank link to the ground; said exoskeleton foot rotates about an ankle rotation axis generally parallel to rotation axis in the human ankle.

55. The device of claim 54 wherein each said leg support further comprises at least one resilient element to resist the rotation of respective said exoskeleton foot about said ankle rotation axis.

56. The device of claim 36 further comprising a controller configured to control said torque generators.

57. A lower extremity exoskeleton, configurable to be coupled to a person, said lower extremity exoskeleton comprising:

two leg supports configurable to be coupled to said person's lower limbs and configured to rest on the ground during their stance phases where each said leg support comprises a thigh link and a shank link;

two knee joints, each configured to allow flexion and extension between respective shank link and respective thigh link; and

an exoskeleton trunk configurable to be coupled to said person's upper body, rotatably connectable to said thigh links of said leg supports to allow for the flexion and extension between said leg supports and said exoskeleton trunk;

two torque generators capable of producing torque resisting flexion of said respective knee joint; and

a controller configured to control said torque generators;

wherein the energy required for said flexion and extension between the shank link and the respective thigh link of a leg support over a cyclic knee motion is provided by said person.

58. The lower extremity exoskeleton of claim 57 wherein said controller increases the impedance of said torque generators to increase the resistance of said knee joints to flexion during stance phase.

59. The lower extremity exoskeleton of claim 57 wherein said controller decreases the impedance of said torque generators to decrease the resistance of said knee joints to flexion during swing phase.

60. The lower extremity exoskeleton of claim 57 further comprising at least one foot sensor per said leg support configured to produce a stance signal representing force on the bottom of each human foot; said controller configured to control the resistance to flexion in said exoskeleton knee joints as a function of said signals from said foot sensors.

61. The lower extremity exoskeleton of claim 57 further comprising at least one foot sensor per said leg support configured to produce a stance signal representing force on the bottom of each human foot; said controller configured to modulate the impedance of respective torque generator as a function of said signals from said foot sensors.

62. The lower extremity exoskeleton of claim 61 wherein each said leg support includes an exoskeleton foot connectable to respective said person's foot and connectable to respective said shank link to allow the transfer of forces from said shank link to the ground; wherein each said exoskeleton foot includes at least one foot sensor configured to produce a stance signal representing force on the bottom of respective human foot.

63. The device of claim 62 wherein said foot sensor is a pressure sensor configured to measure the pressure in a media trapped in a cavity in said exoskeleton foot.

64. The device of claim 61 wherein said foot sensor is located inside a human shoe.

65. The device of claim 61 wherein said foot sensor is located inside a human shoe sole.

66. The device of claim 61 wherein said foot sensor is connectable to the bottom of a human shoe.

67. The device of claim 57 wherein each said torque generators comprises a hydraulic piston-cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinders; said hydraulic circuitry configured to modulate the fluid flow to said hydraulic piston-cylinders.

68. The device of claim 57 wherein each said torque generator comprises a hydraulic piston and cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinder; said hydraulic circuitry is configured to decrease the fluid flow to said hydraulic piston-cylinder during the stance phase.

69. The device of claim 57 wherein each said torque generator comprises a hydraulic piston-cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinder; said hydraulic circuitry is configured to increase the fluid flow to said hydraulic piston-cylinder during the swing phase.

70. The device of claim 57 wherein each said torque generator comprises a hydraulic piston-cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinder; said hydraulic circuitry is configured to increase said knee joints' resistance to flexion during its stance phase.

71. The device of claim 57 wherein each said torque generator comprises a hydraulic piston-cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinder; said hydraulic circuitry is configured to decrease said knee joints' resistance to flexion during its swing phase.

72. The device of claim 61 wherein each said torque generator comprises a hydraulic piston-cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston and cylinder; said controller is configured to control said hydraulic circuitry as a function of said stance signal.

73. The device of claim 61 wherein each said torque generator comprises a hydraulic piston-cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinder; said controller is configured to decrease the fluid flow to said hydraulic piston cylinder when said stance signal detects a force on the bottom of the human foot.

74. The device of claim 61 wherein each said torque generator comprises a hydraulic piston-cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinder; said controller is configured to increase the impedance of said hydraulic piston-cylinder when said stance signal detects a force on the bottom of the human foot.

75. The device of claim 61 wherein each said torque generator comprises a hydraulic piston and cylinder and said controller includes a hydraulic circuitry connectable to said hydraulic piston-cylinder; said controller is configured to increase the resistance of said knee joint to flexion when said stance signal represents a force on the bottom of the human foot.

76. The device of claim 67 wherein said hydraulic circuitry comprises an actuated flow restricting valve connecting said piston-cylinder to a hydraulic reservoir; said actuated flow restricting valve is configured to restrict the fluid flow during stance phase and allow for minimum resistance fluid flow during swing phase.

77. The device of claim 67 wherein said hydraulic circuitry includes a hydraulic three-way valve connecting said piston-cylinder to a hydraulic reservoir either through a needle valve or a bypass line; said three-way valve is configured to connect said piston-cylinder to said hydraulic reservoir through said needle valve during stance phase and connect said piston-cylinder to said hydraulic reservoir through said bypass line during swing phase.

78. The device of claim 67 wherein said hydraulic circuitry includes a hydraulic three-way valve connecting said piston-cylinder to a hydraulic reservoir either through a needle valve, a bypass line or a check valve; said three-way valve is configured to connect said piston-cylinder to said hydraulic reservoir through said needle valve during stance phase and connect said piston-cylinder to said hydraulic reservoir through said bypass line during swing phase.

79. The device of claim 67 wherein said hydraulic circuitry comprises an actuated flow restricting valve and a check valve connecting said piston-cylinder to a hydraulic reservoir; said actuated flow restricting valve configured to restrict the fluid flow during stance phase and to allow for minimum resistance fluid flow during swing phase.

80. The device of claim 67 wherein said hydraulic circuitry comprises a two-way valve capable of selecting between a set orifice size or fully open, and a check valve connecting said piston-cylinder to a hydraulic reservoir; said two-way valve configured to restrict the fluid flow during stance phase and allow for minimum resistance fluid flow during swing phase.

81. The device of claim 67 wherein said hydraulic circuitry comprises a two-way valve, a check valve, and a needle valve connecting said piston-cylinder to a hydraulic reservoir; said two-way valve configured to allow for minimum resistance fluid flow during swing phase and direct the fluid flow through needle valve during stance phase.

82. A lower extremity exoskeleton, configurable to be coupled to a person, said lower extremity exoskeleton comprising:

two leg supports configurable to be coupled to said person's lower limbs and configured to rest on the ground during their stance phases where each said leg support comprises a thigh link and a shank link;

two knee joints, each configured to allow flexion and extension between respective shank link and respective thigh link; and

an exoskeleton trunk configurable to be coupled to said person's upper body, rotatably connectable to said thigh links of said leg supports to allow for the flexion and extension between said leg supports and said exoskeleton trunk;

wherein the torque required for extension between a shank link and respective thigh link is provided by said person.

83. The device of claim 82 wherein each said leg support is configured to allow flexion of said respective knee joint during swing phase, and to resist flexion of said respective knee joint during stance phase to allow the transfer of a force to ground.

84. A lower extremity exoskeleton, configurable to be coupled to a person, said lower extremity exoskeleton comprising

two leg supports configurable to be coupled to said person's lower limbs and configured to rest on the ground during their stance phases where each said leg support comprises a thigh link and a shank link;

two knee joints, each configured to allow flexion and extension between respective shank link and respective thigh link without the use of energy from a power source other than the energy provided by said person; and

an exoskeleton trunk configurable to be coupled to said person's upper body, rotatably connectable to said thigh links of said leg supports to allow for the flexion and extension between said leg supports and said exoskeleton trunk.

85. The device of claim 84 where each said leg support is configured to allow flexion of said respective knee joint during swing phase, and to resist flexion of said respective knee joint during stance phase to allow the transfer of a force to ground.

86. A lower extremity exoskeleton, configurable to be coupled to a person, said lower extremity exoskeleton comprising:

two leg supports configurable to be coupled to said person's lower limbs and configured to rest on the ground during their stance phases wherein each said leg support comprises a thigh link and a shank link;

two knee joints each configured to allow flexion between respective shank link and thigh link during swing phase and to resist flexion between respective shank link and thigh link during

stance phase without the use of energy from a power source other than the energy provided by said person; and

an exoskeleton trunk configurable to be coupled to said person's upper body, rotatably connectable to said thigh links of said leg supports to allow for the flexion and extension between said leg supports and said exoskeleton trunk.

87. A method of operating a lower extremity exoskeleton to walk, said lower extremity exoskeleton having:

two leg supports configured to rest on the ground during their stance phases where each said leg support comprises a thigh link and a shank link;

two knee joints, each configured to allow flexion and extension between respective shank link and respective thigh link; and

an exoskeleton trunk rotatably connectable to said thigh links of said leg supports allowing for the flexion and extension between said leg supports and said exoskeleton trunk;

said method comprising:

coupling a person's leg to one of said two leg supports;

coupling said person's upper body to said exoskeleton trunk; and

allowing the flexion of said respective knee joints during swing phase, and resisting flexion of said respective knee joints during stance phase to allow the transfer of a force to ground;

wherein the energy required for said flexion and extension between the shank link and the respective thigh link of a leg support over a cyclic knee motion is provided by said person.

88. A method of carrying an object using a lower extremity exoskeleton, said lower extremity exoskeleton coupled to said object and having:

two leg supports configured to rest on the ground during their stance phases where each said leg support comprises a thigh link and a shank link;

two knee joints, each configured to allow flexion and extension between respective shank link and respective thigh link; and

an exoskeleton trunk, rotatably connectable to said thigh links of said leg supports allowing for the flexion and extension between said leg supports and said exoskeleton trunk;

two torque generators; and

a controller configured to control said torque generators
said method comprising:
coupling a person's leg to one of said two leg supports;
coupling a person's upper body to said exoskeleton trunk; and
controlling said torque generators to allow the flexion of said respective knee joints during swing phase, and to resist flexion of said respective knee joints during stance phase to allow the transfer of a force to ground;

wherein the energy required for said flexion and extension between the shank link and the respective thigh link of a leg support over a cyclic knee motion is provided by said person.

89. The method of claim 88 wherein said exoskeleton further includes at least one foot sensor per said leg support which transmits a stance signal representing the force on the bottom of the feet of said person to said controller.

90. A lower extremity exoskeleton, configurable to be coupled to a person, said lower extremity exoskeleton comprising:

two leg supports configurable to be coupled to said person's lower limbs and configured to rest on the ground during their stance phases where each said leg support comprises a thigh link, a shank link, and an exoskeleton foot;

two knee joints, each configured to allow flexion and extension between respective shank link and respective thigh link;

an exoskeleton trunk configurable to be coupled to said person's upper body, rotatably connectable to said thigh links of said leg supports to allow for the flexion and extension between said leg supports and said hip mechanism;

at least one foot sensor per said leg support which produces a stance signal representing force on the bottom of the feet of said human;

two torque generators each configured to allow flexion of said respective knee joint during swing phase, and to resist flexion of said respective knee joint during stance phase to allow the transfer of a force to ground; and

a controller configured to control said torque generators wherein the energy required for said flexion and extension between the shank link and the respective thigh link of a leg support over a cyclic knee motion is provided by said person.

91. The device of claim 90, wherein each said leg support further comprises at least one knee resilient element configured to encourage flexion of said respective knee joint.

92. The device of claim 90, wherein each said leg support further comprises at least one knee resilient element configured to encourage extension of said respective knee joint.

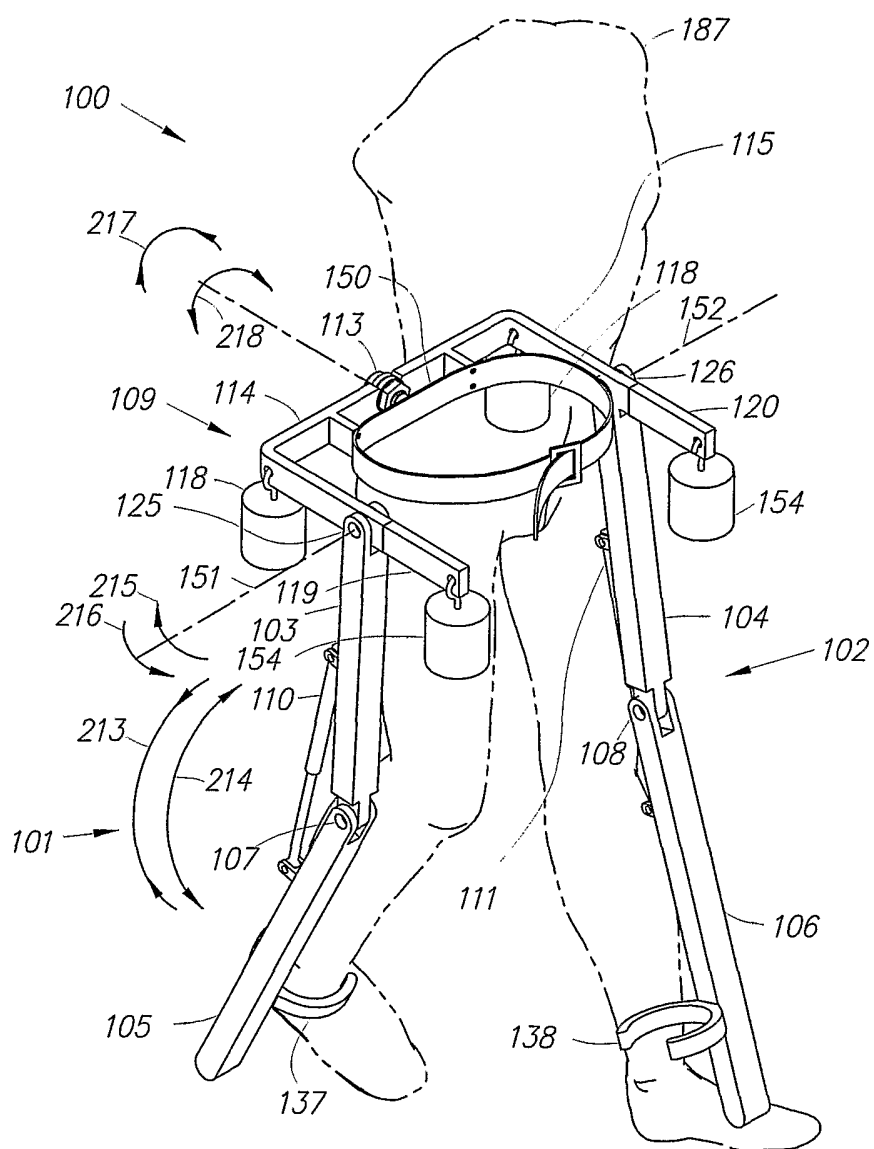
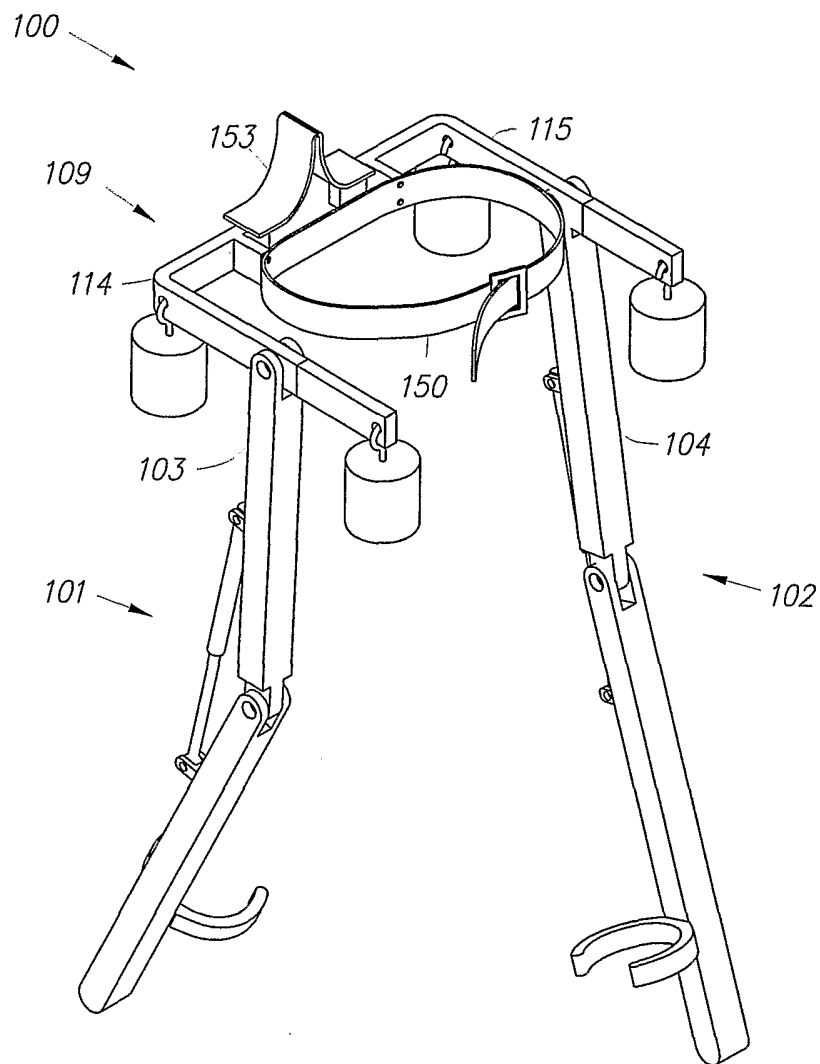


Fig. 1

*Fig. 4*

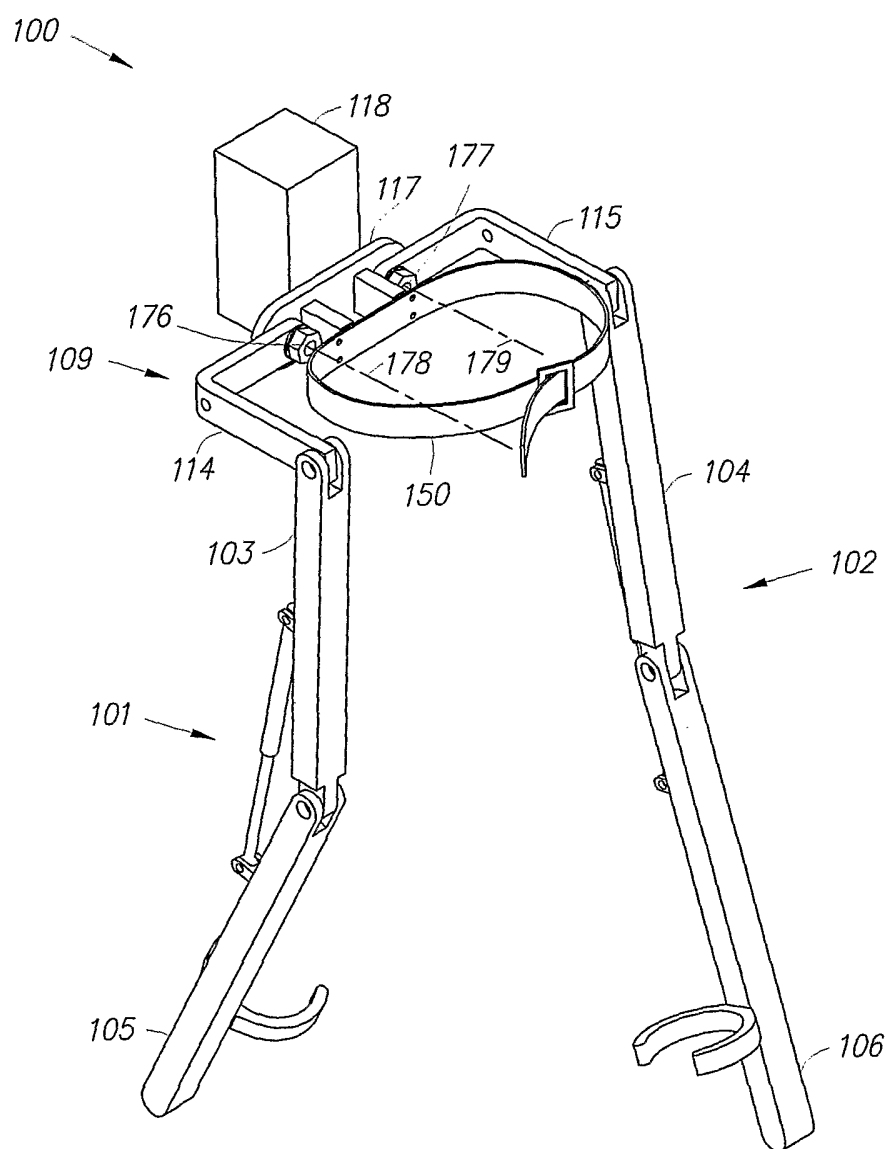


Fig. 5

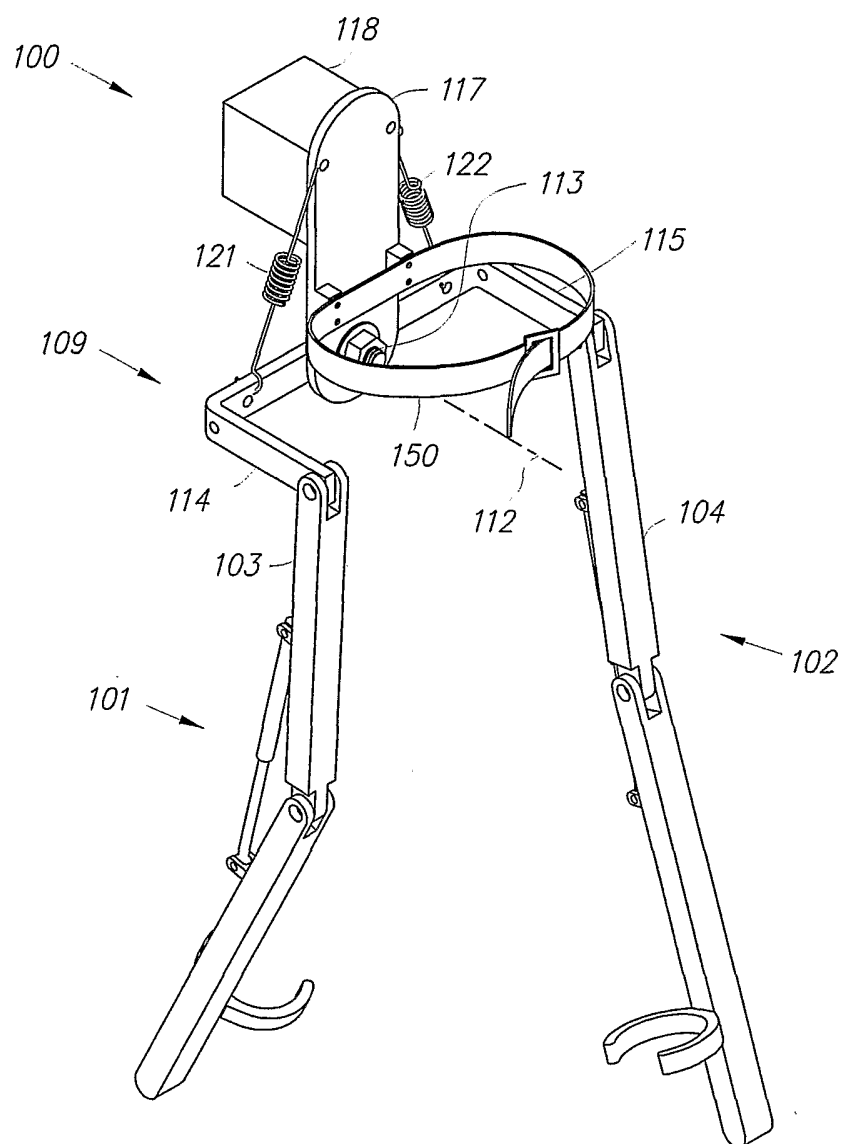


Fig. 6

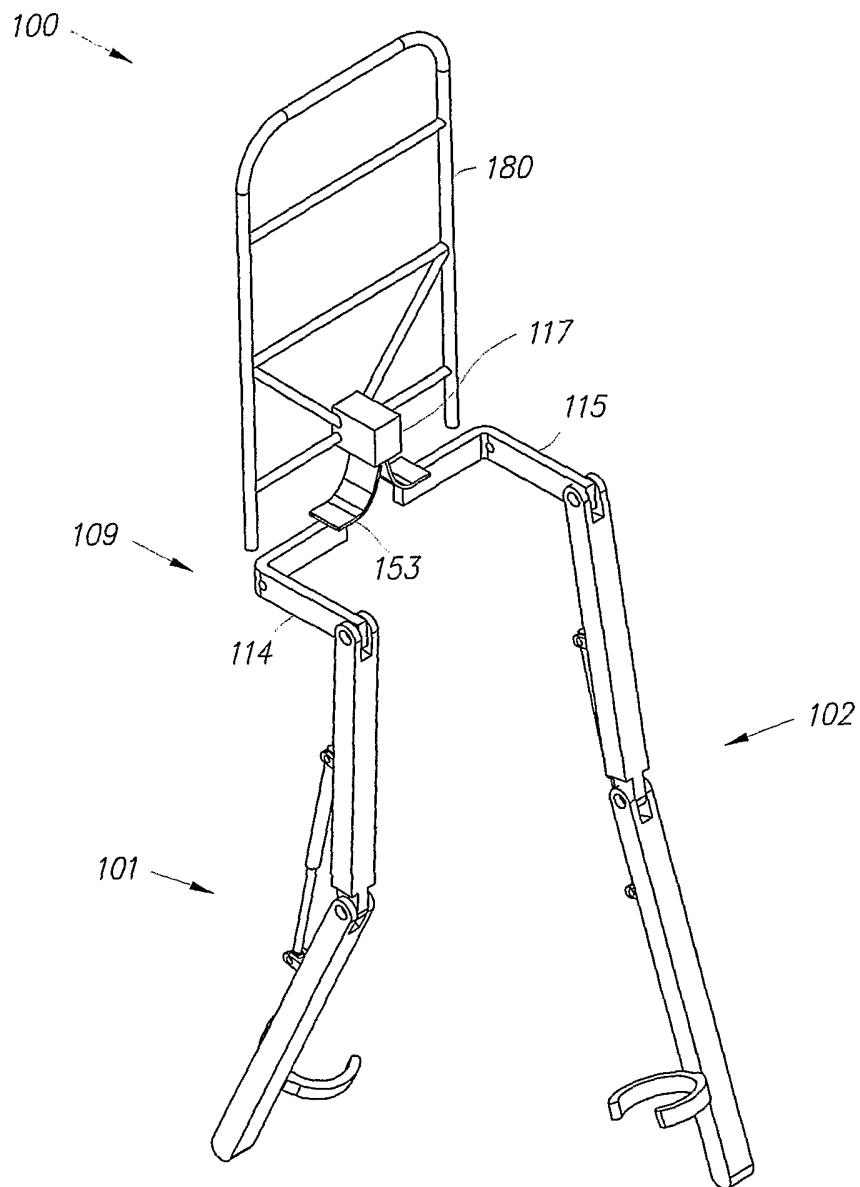


Fig. 8

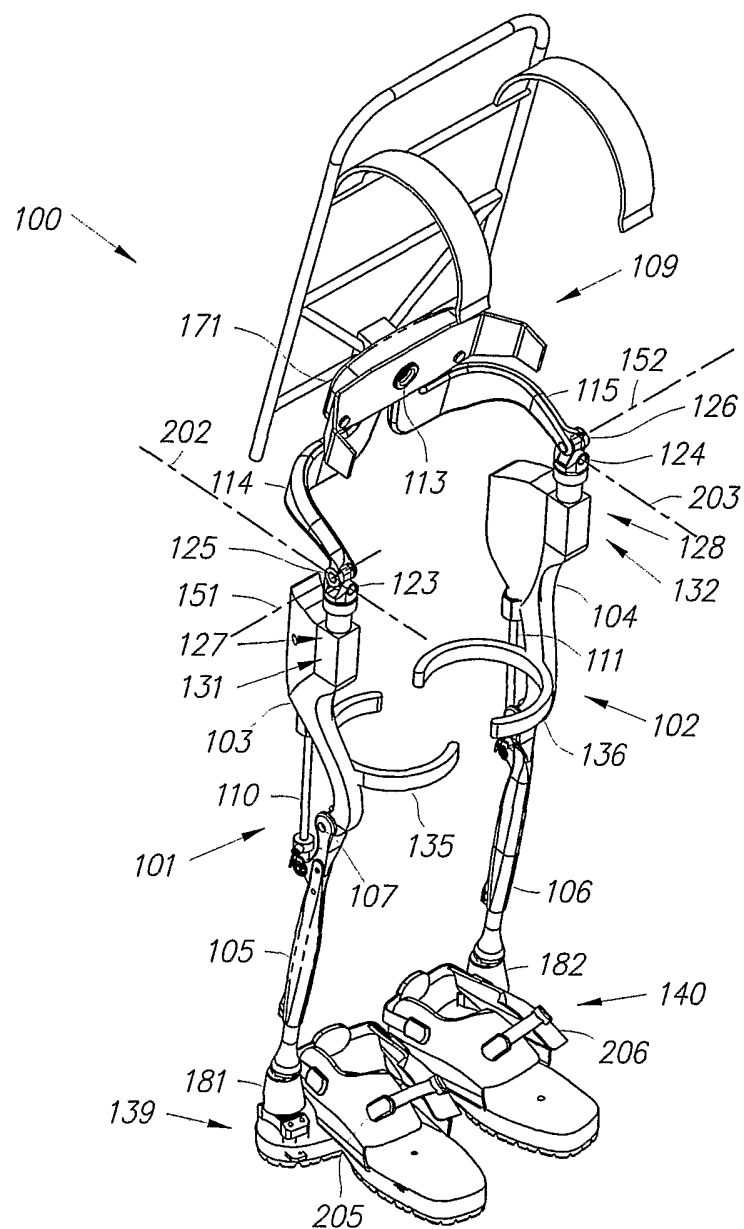


Fig. 9

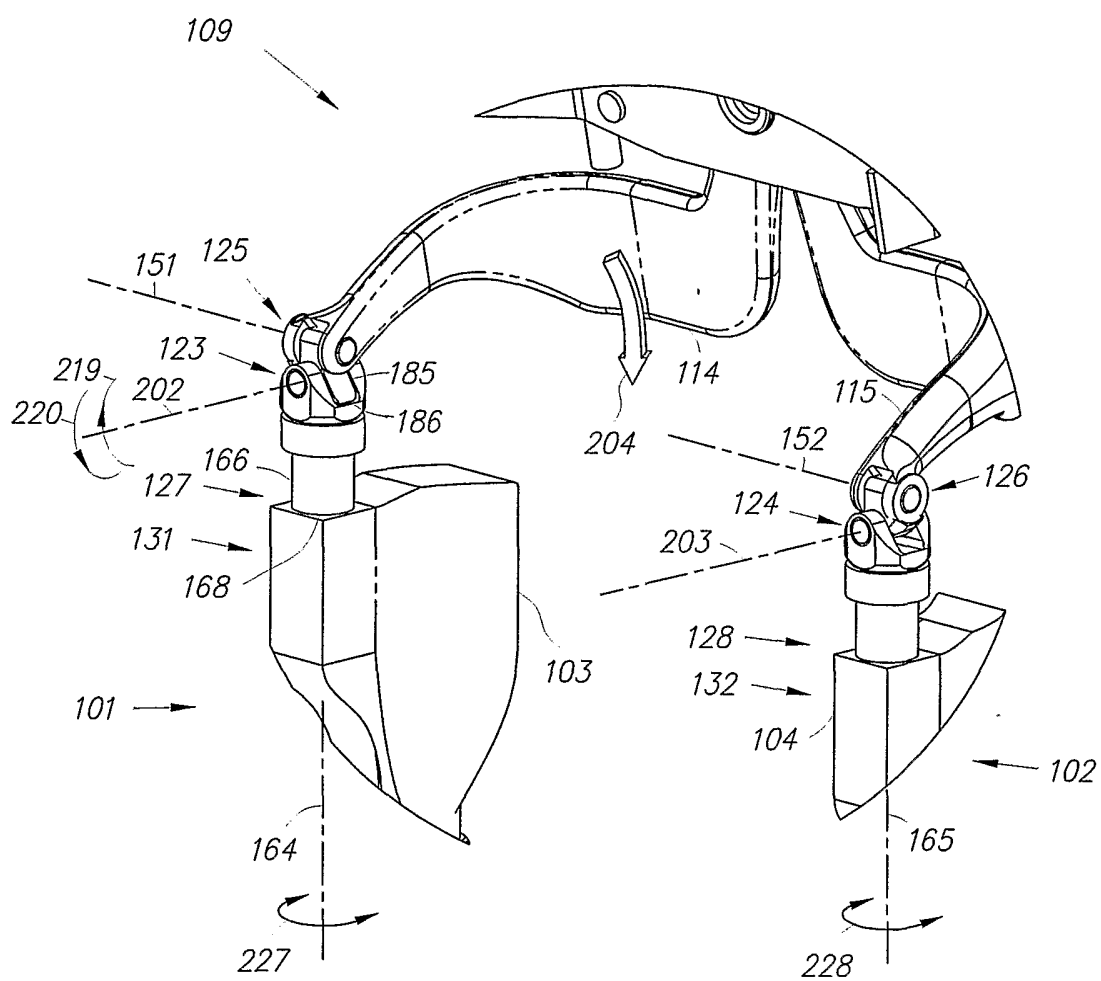


Fig. 10

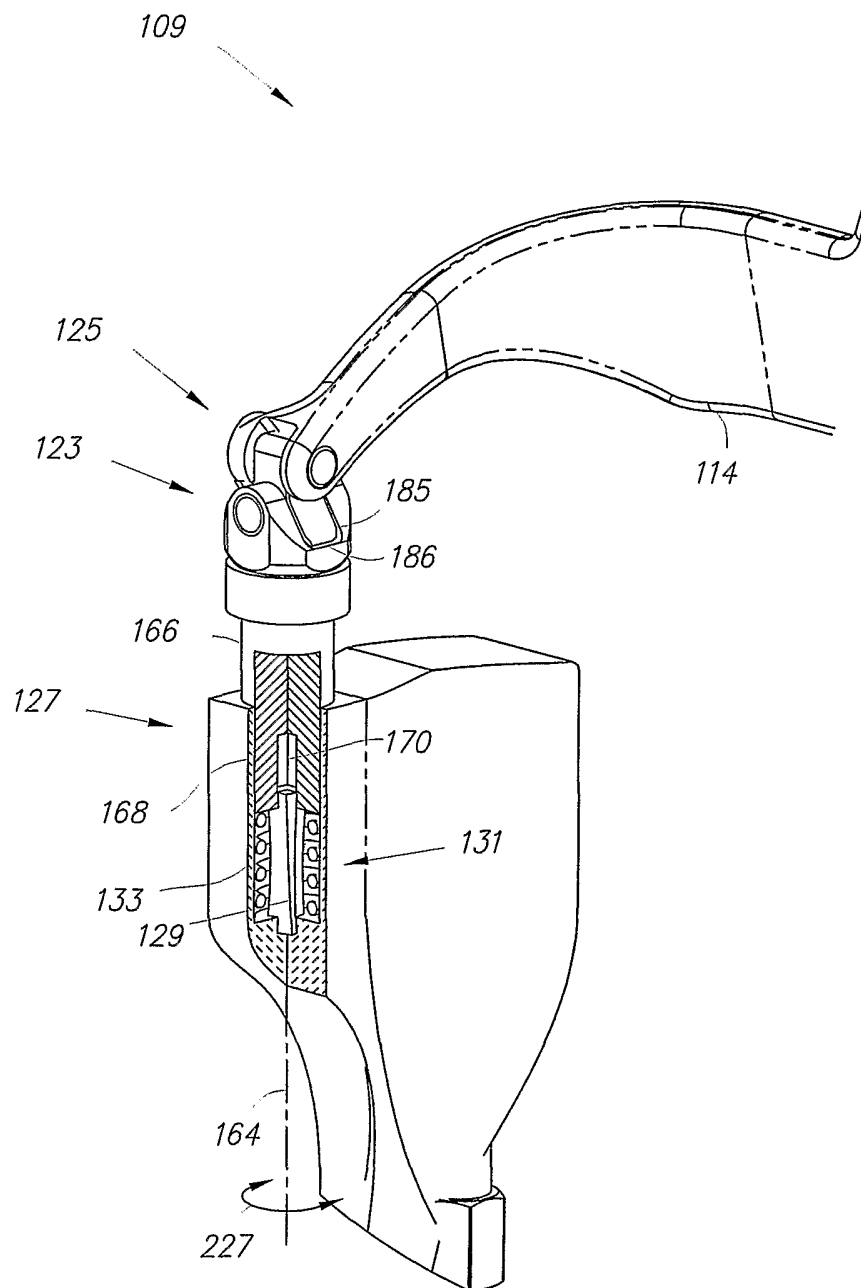
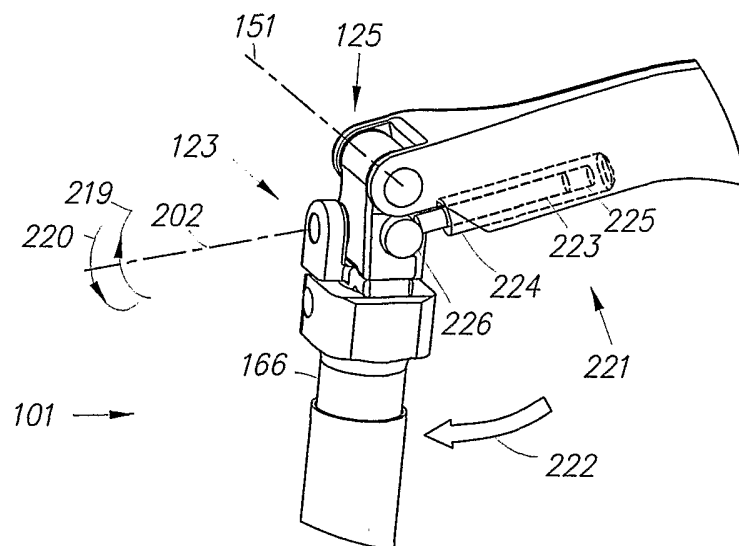


Fig. 11

*Fig. 12*

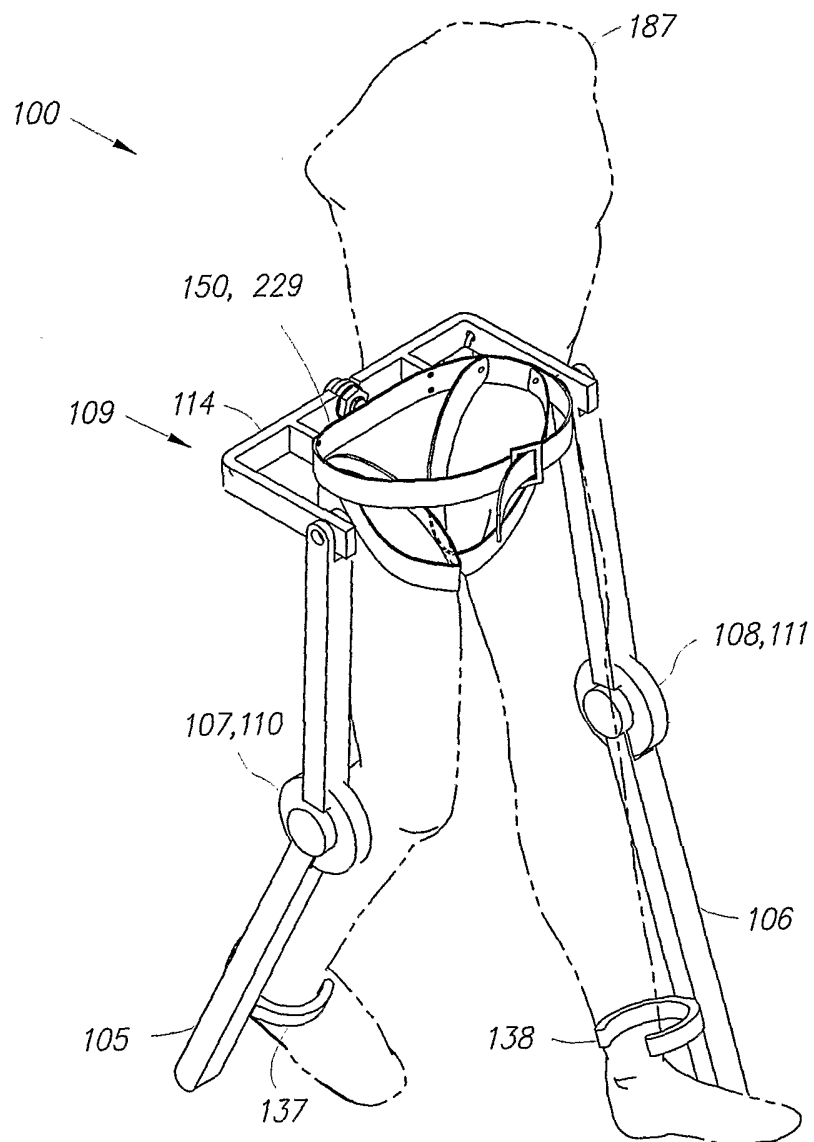


Fig. 13

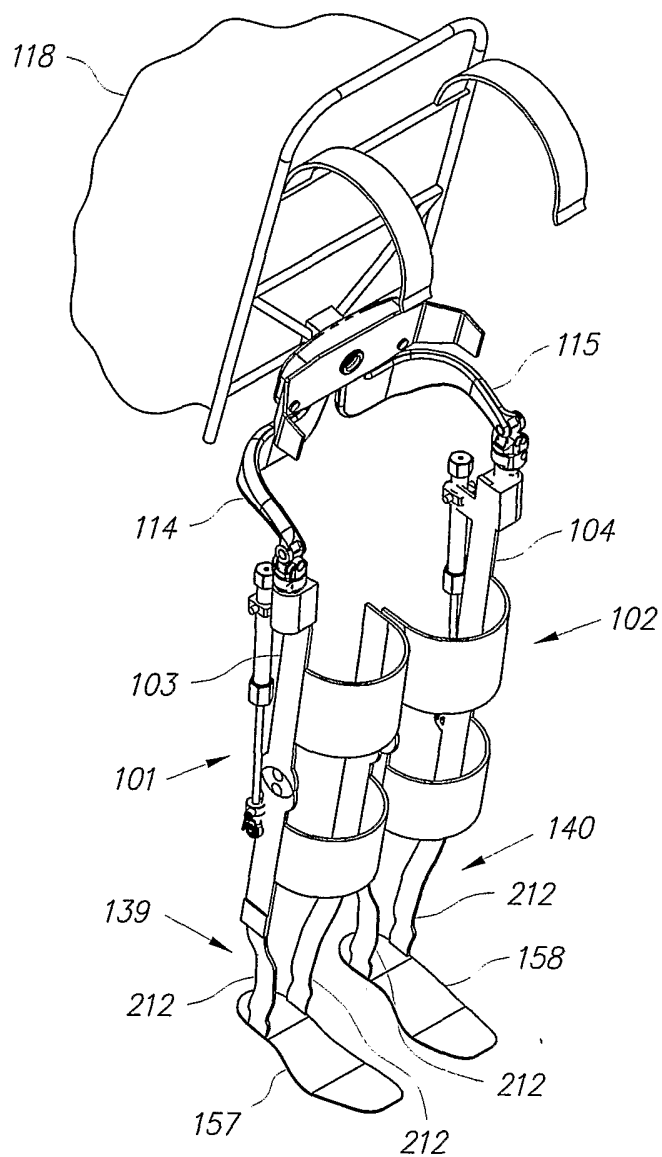
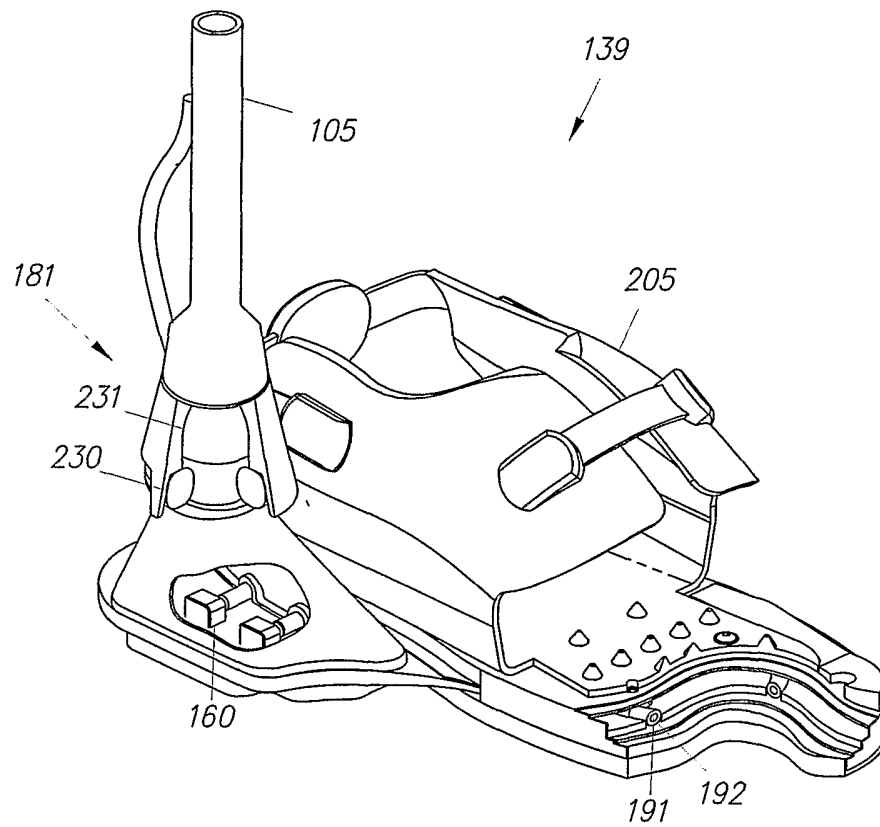


Fig. 15

*Fig. 16*

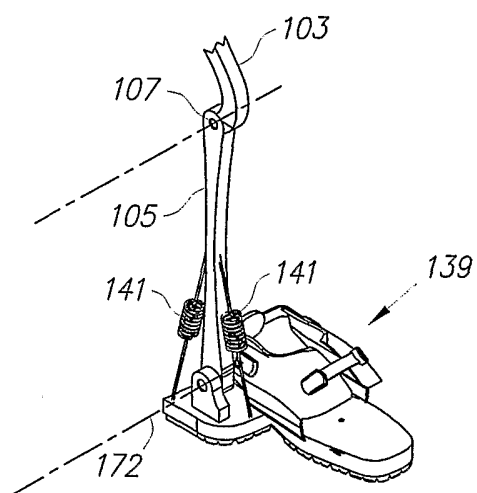


Fig. 17

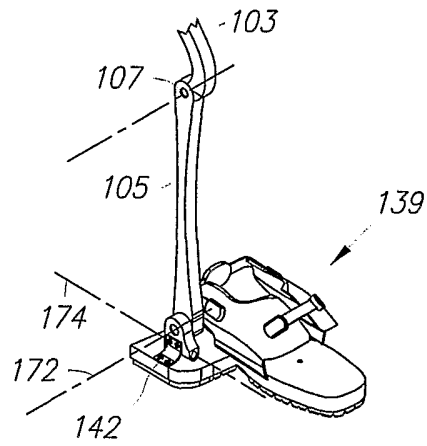


Fig. 18

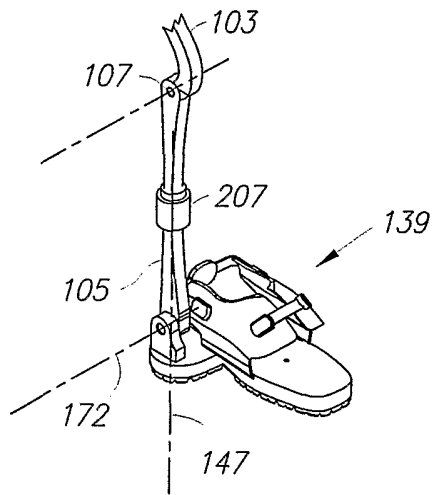
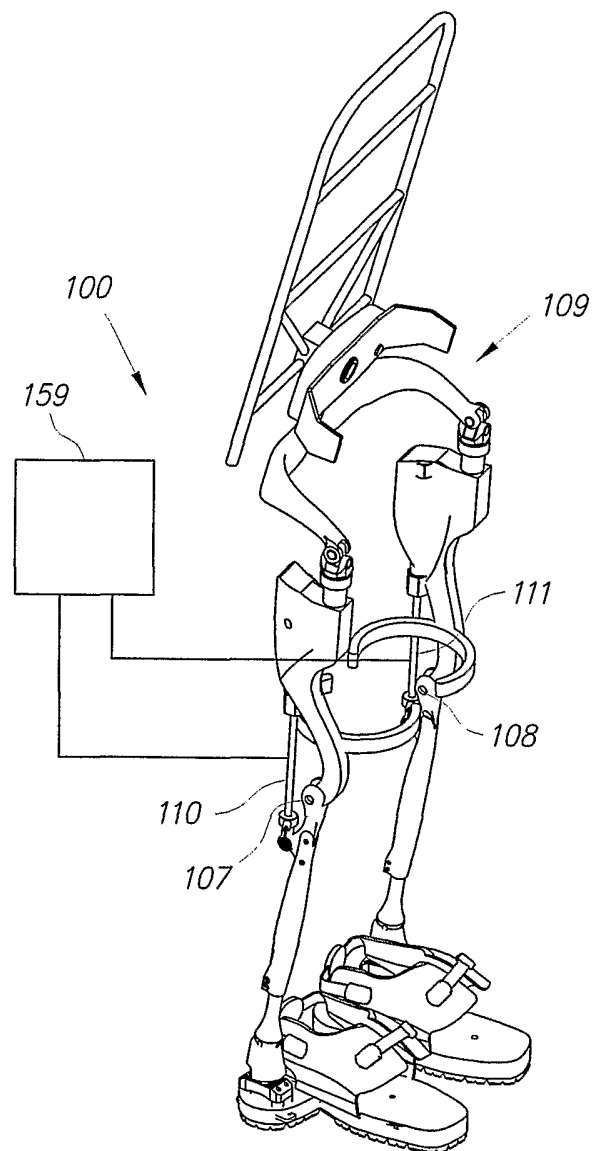
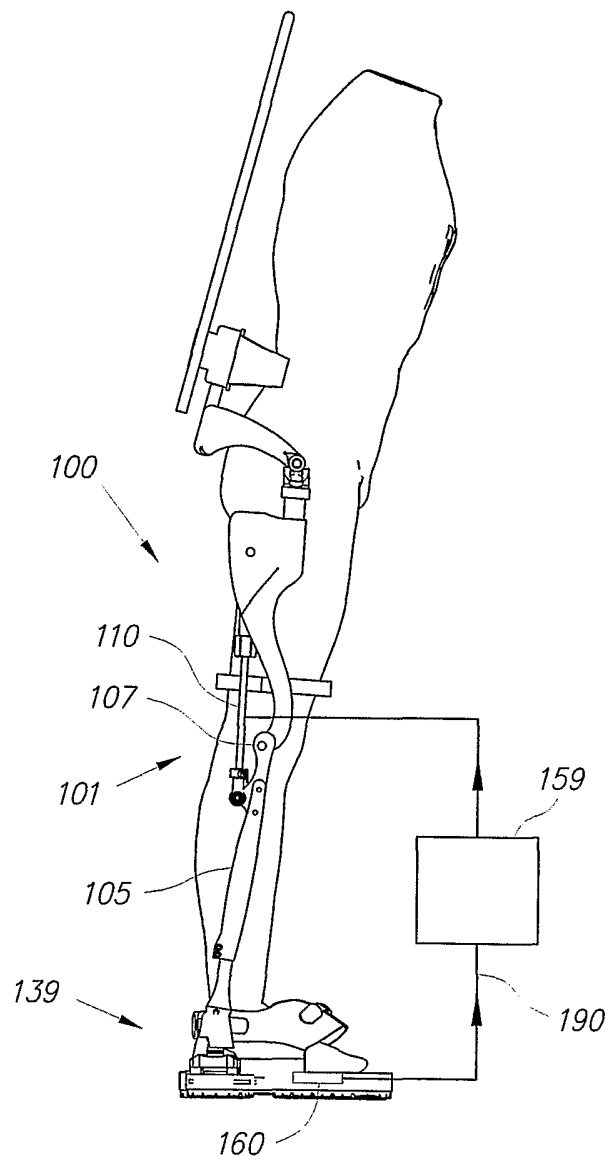


Fig. 19

*Fig. 20*

*Fig. 21*

21 / 28

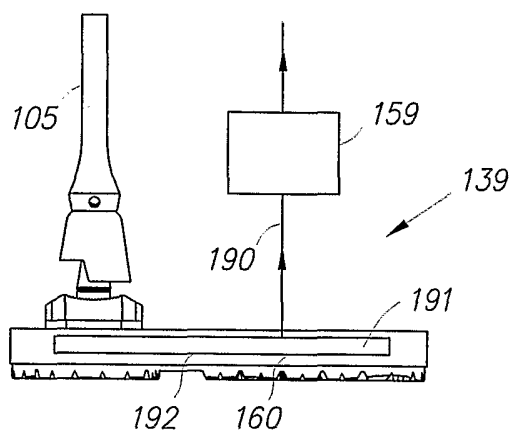


Fig. 22

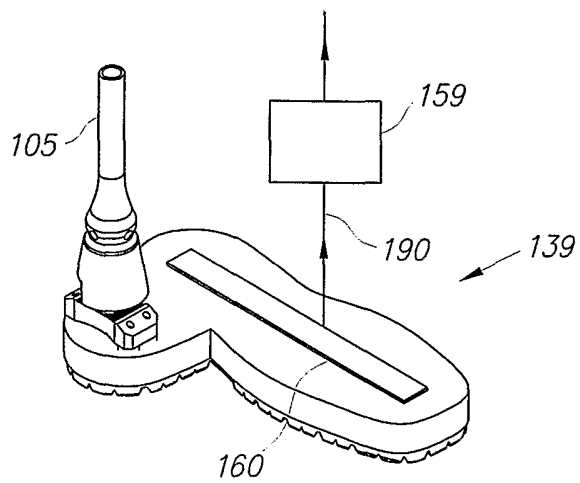


Fig. 23

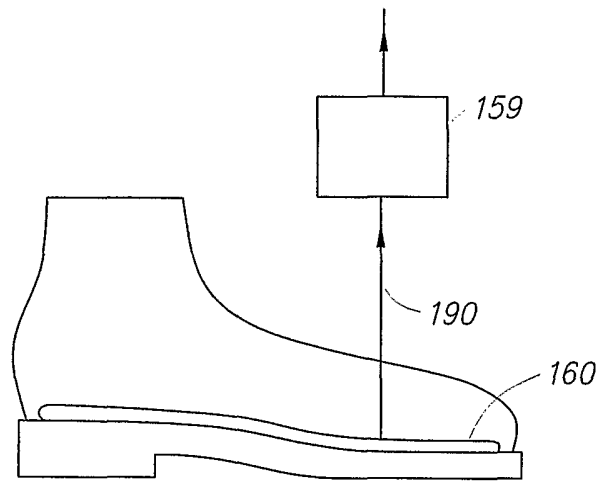


Fig. 24

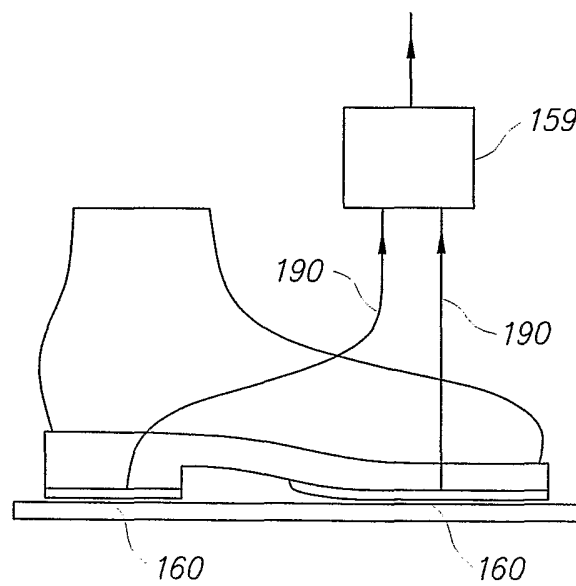


Fig. 25

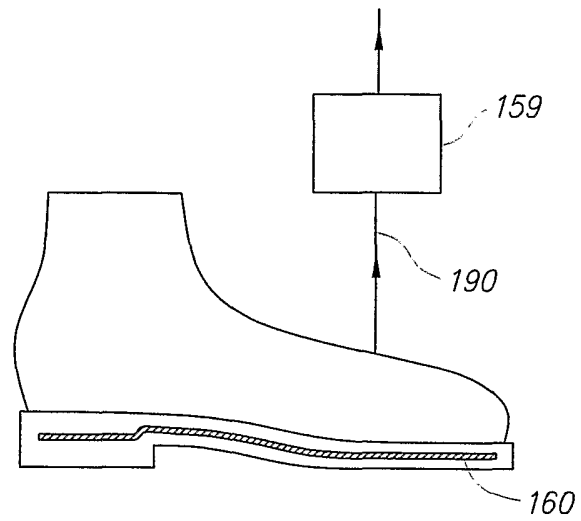


Fig. 26

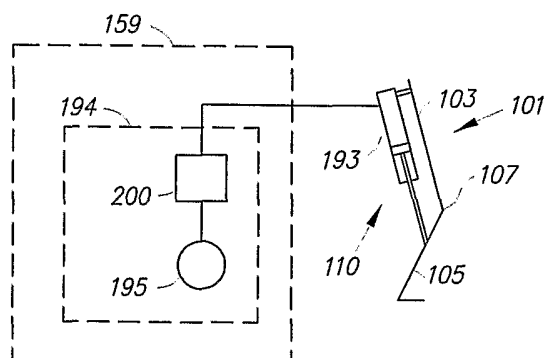


Fig. 27

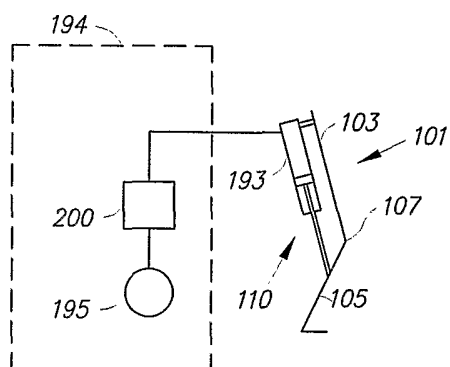


Fig. 28

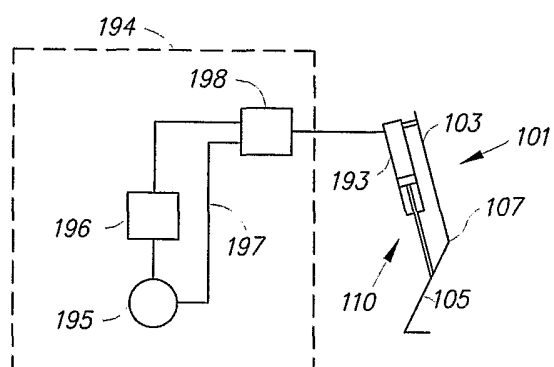


Fig. 29

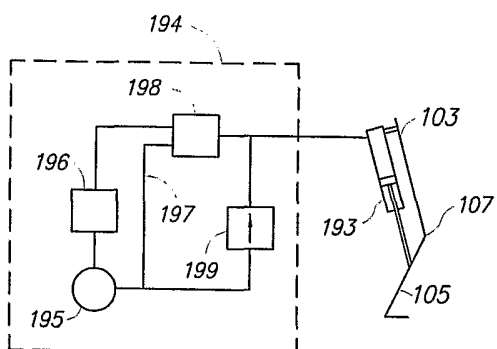


Fig. 30

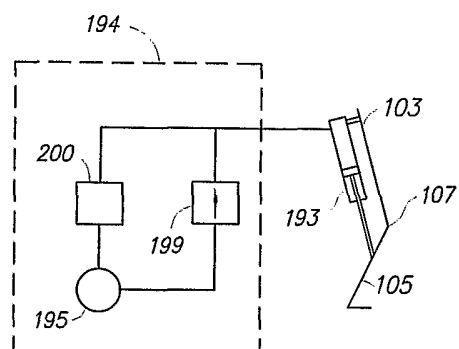


Fig. 31

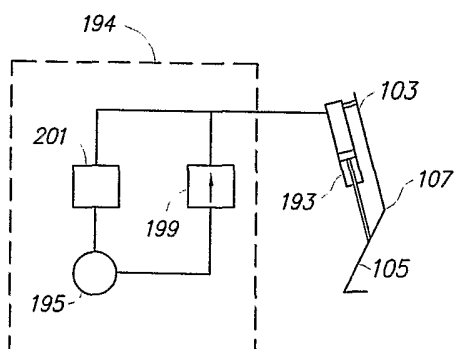


Fig. 32

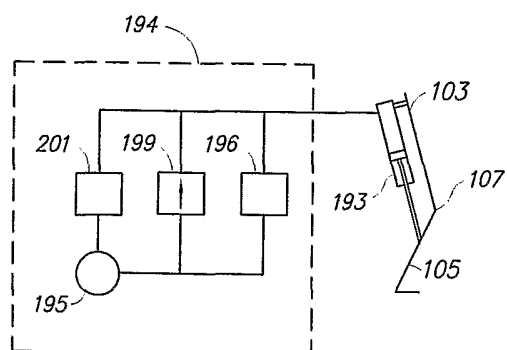
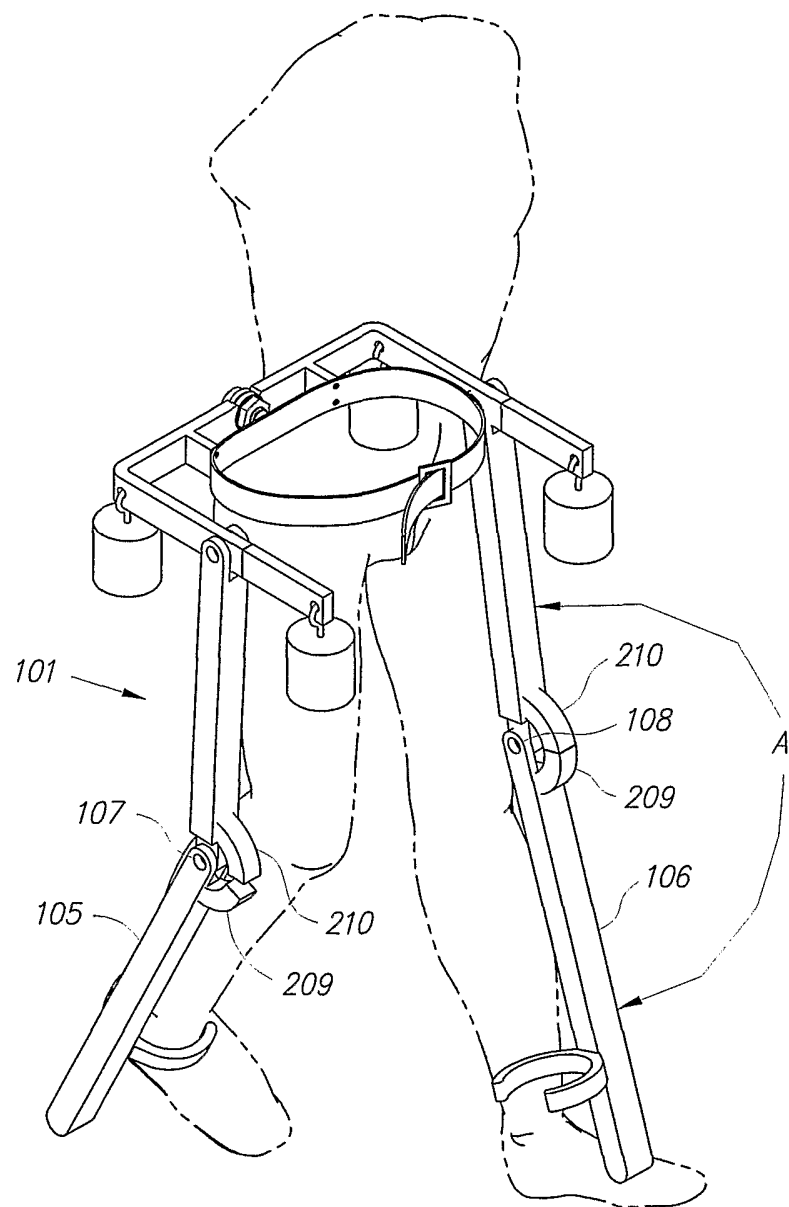
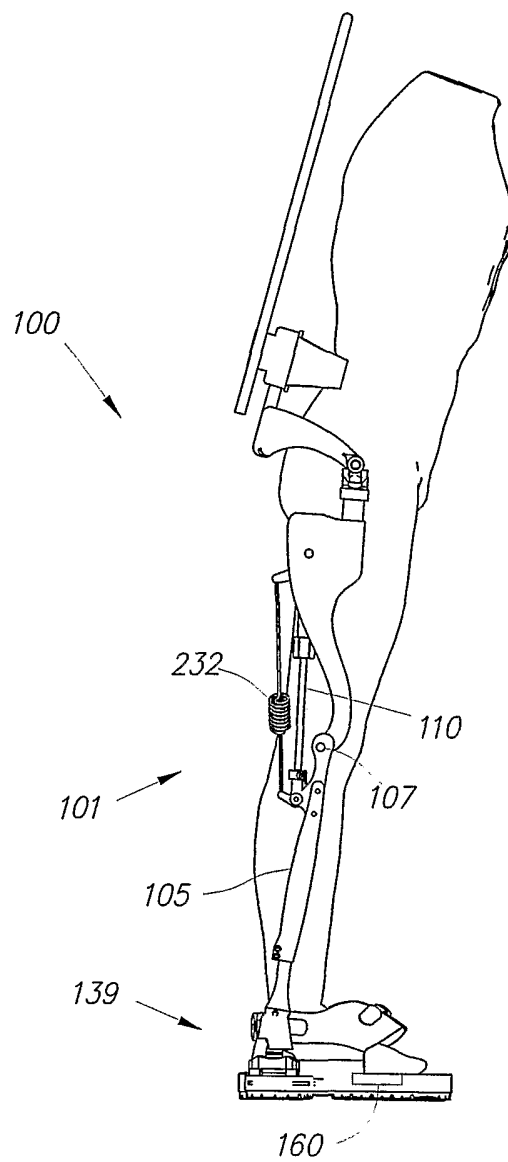


Fig. 33

*Fig. 34*

*Fig. 35*

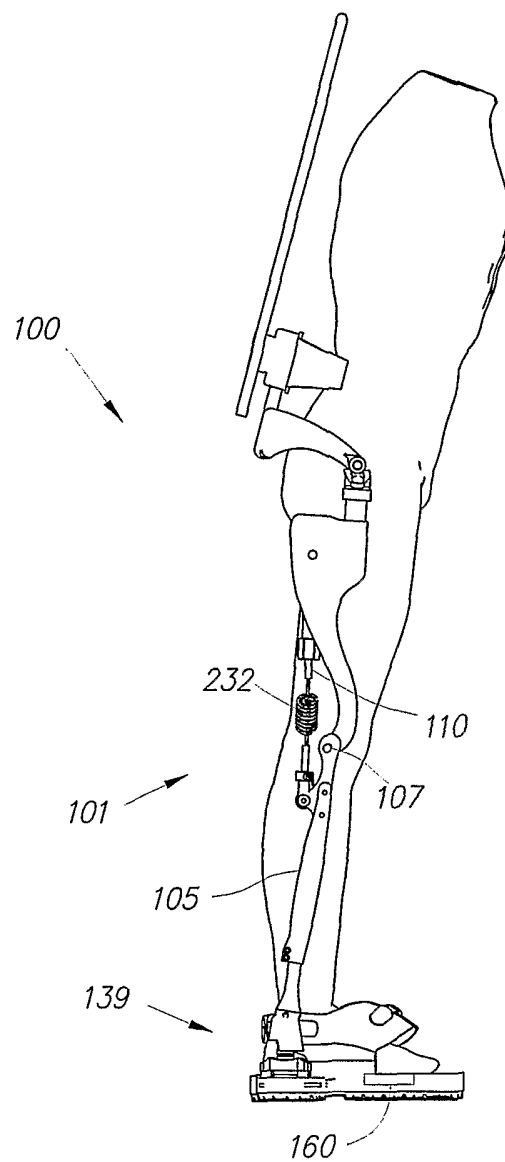


Fig. 36