



(86) Date de dépôt PCT/PCT Filing Date: 2002/04/10
(87) Date publication PCT/PCT Publication Date: 2002/10/24
(45) Date de délivrance/Issue Date: 2007/02/06
(85) Entrée phase nationale/National Entry: 2003/10/09
(86) N° demande PCT/PCT Application No.: US 2002/011606
(87) N° publication PCT/PCT Publication No.: 2002/084146
(30) Priorité/Priority: 2001/04/10 (US60/283,133)


(51) Cl.Int./Int.Cl. *F16G 5/06* (2006.01),
B29D 29/08 (2006.01), *F16G 1/28* (2006.01),
F16G 5/20 (2006.01)

(72) Inventeurs/Inventors:
PATTERSON, PHIL, US;
SEDLACEK, DOUG, US;
SOUTH, BOBBIE E., US

(73) Propriétaire/Owner:
THE GATES CORPORATION, US

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : COURROIE DE TRANSMISSION D'ENERGIE
(54) Title: POWER TRANSMISSION BELT

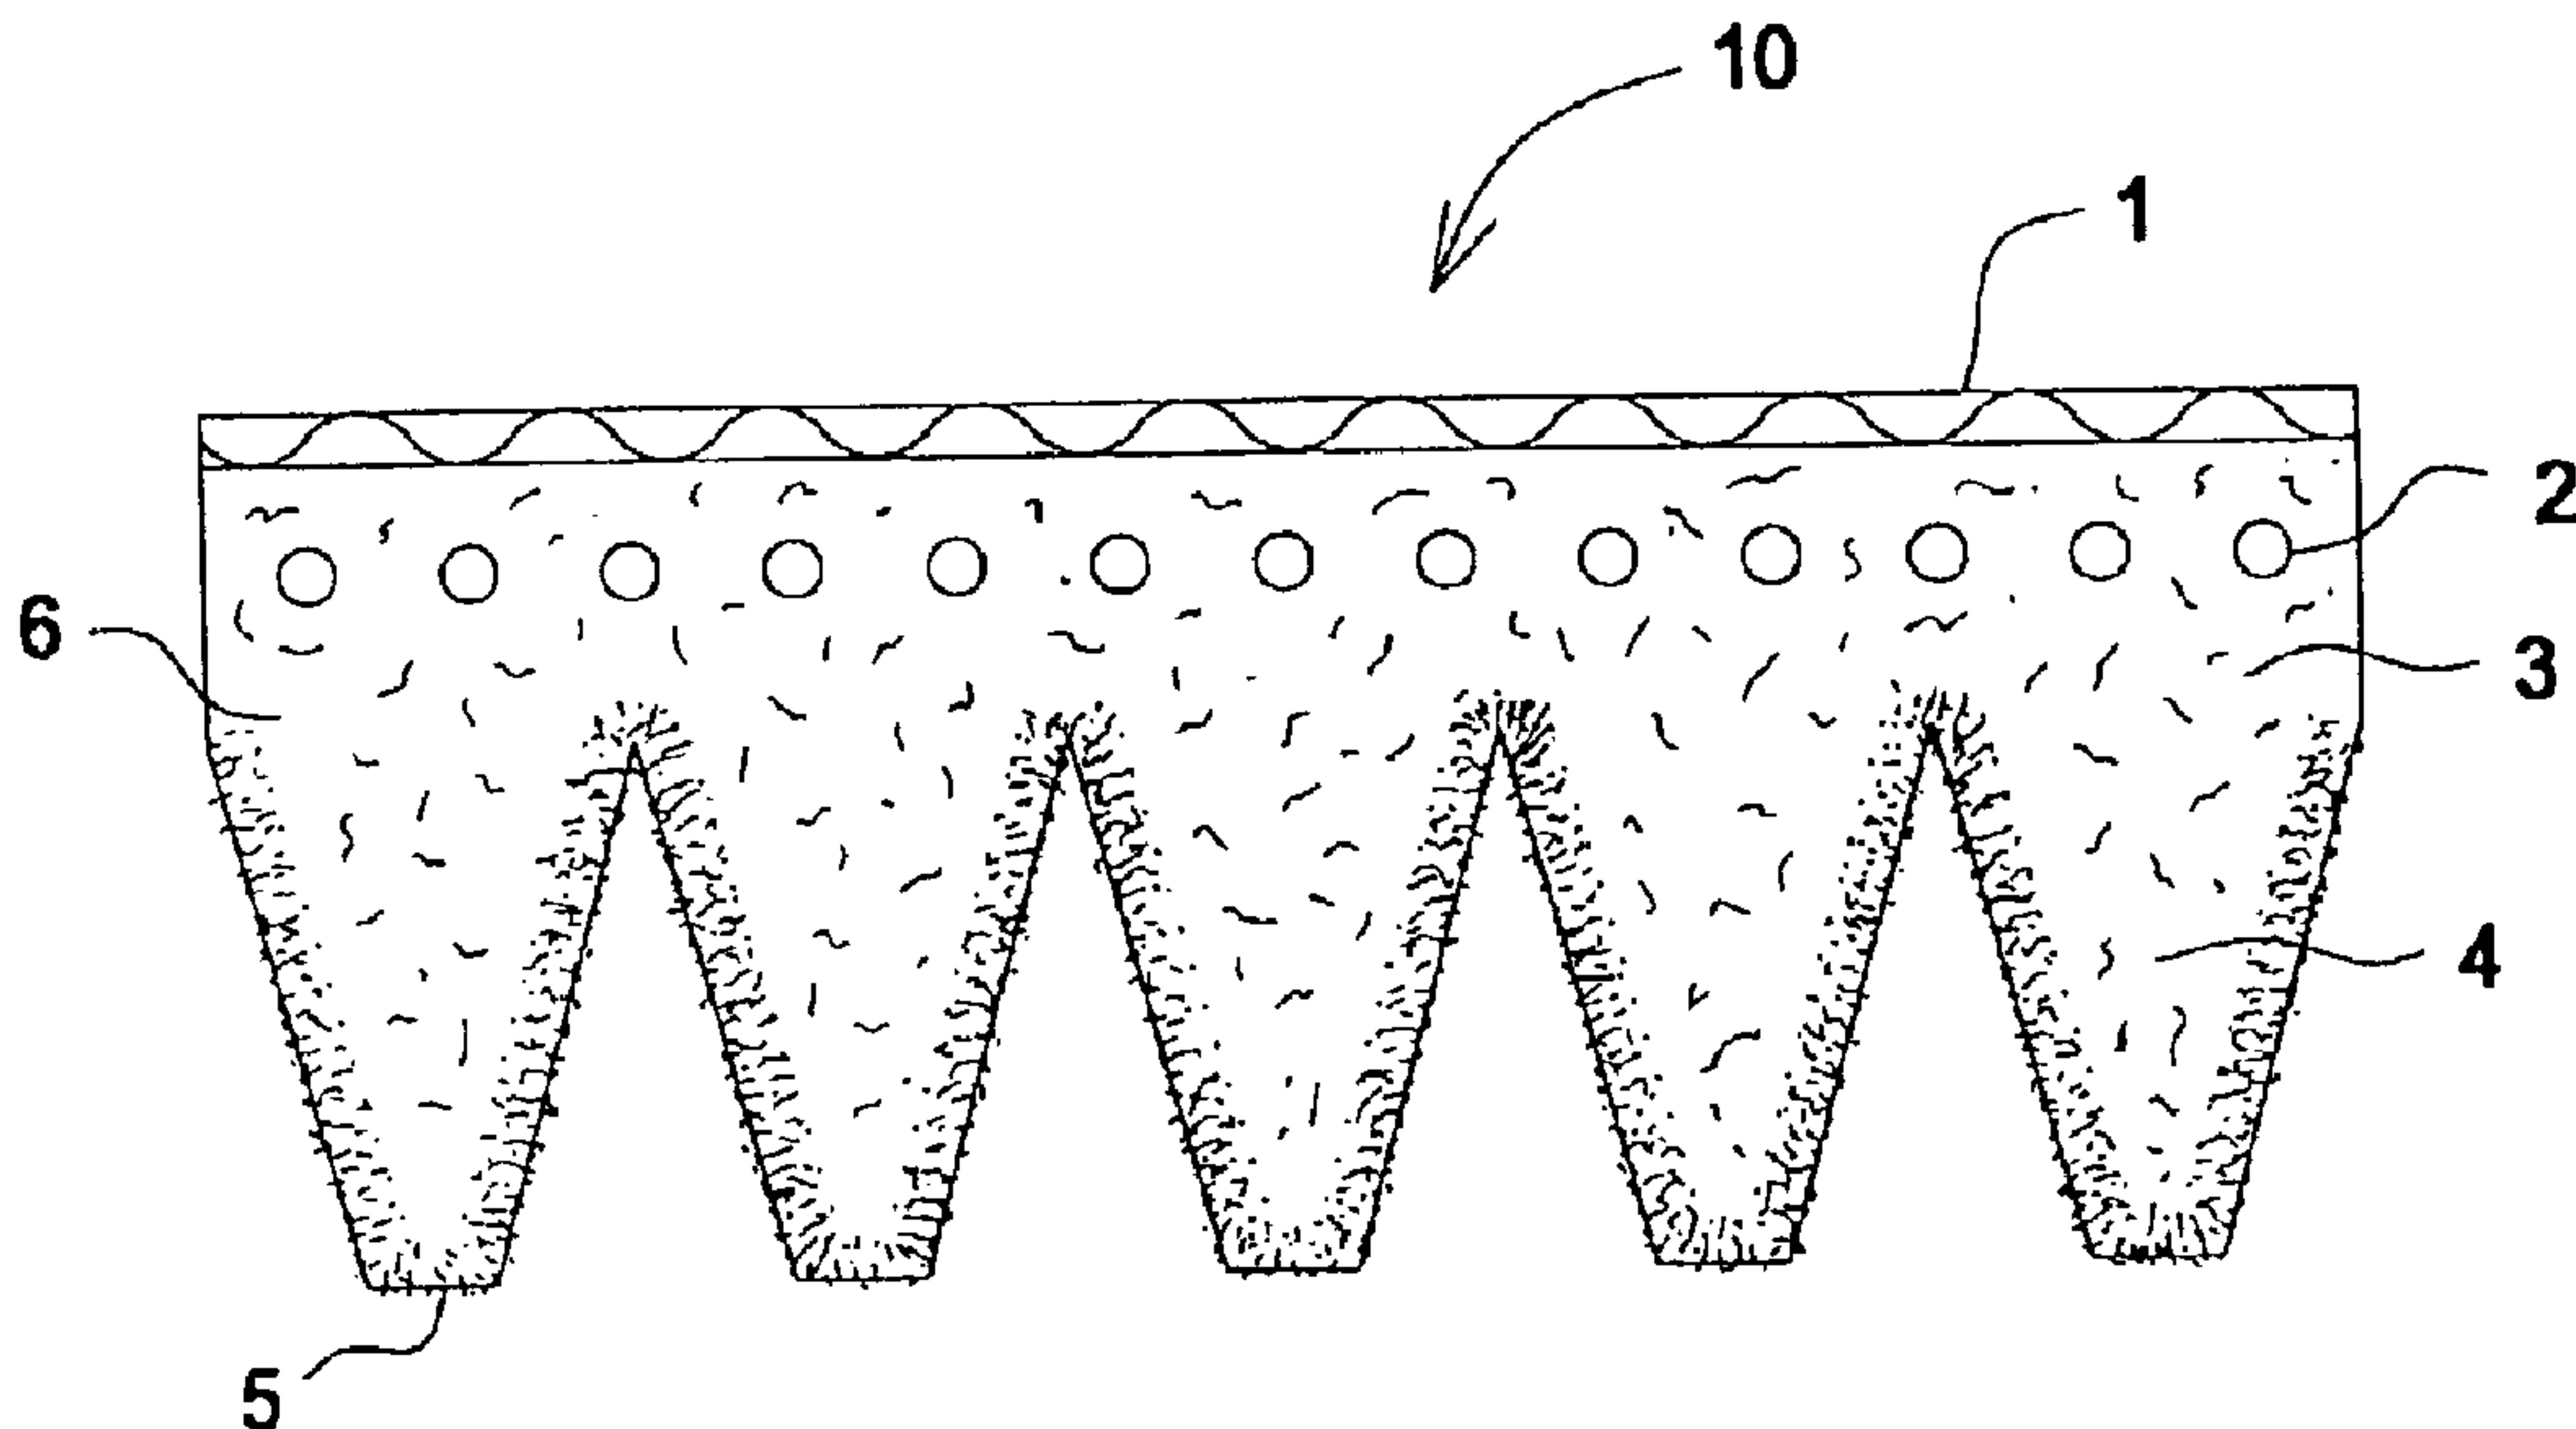

(57) Abrégé/Abstract:

A belt having a non-woven region on a pulley engaging surface. The non-woven region has a random coverage to reduce natural frequency harmonics, control frictional characteristics, permeation and thermal resistance. The non-woven may comprise a combination of softwood and hardwood pulp, or synthetic materials applied in a random matrix to a body having a fiber loading.



(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 October 2002 (24.10.2002)

PCT

(10) International Publication Number
WO 02/084146 A1

(51) International Patent Classification⁷: **F16G 5/06**, 1/28

(74) Agent: **THURNAU, Jeffrey**; The Gates Corporation, Mail Stop: 31-4-1-A3, 900 S. Broadway, Denver, CO 80209 (US).

(21) International Application Number: PCT/US02/11606

(22) International Filing Date: 10 April 2002 (10.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/283,133 10 April 2001 (10.04.2001) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

(71) Applicant: **THE GATES CORPORATION** [US/US];
900 South Broadway, Denver, CO 80209 (US).


Published:

— with international search report

(72) Inventors: **PATTERSON, Phil**; 7920 South Estes Street, Littleton, CO 80128 (US). **SEDLACEK, Doug**; 7383 S. Quince Court, Englewood, CO 80112 (US). **SOUTH, Bobbie, E.**; 2794 East Weaver Place, Centennial, CO 80121 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: POWER TRANSMISSION BELT

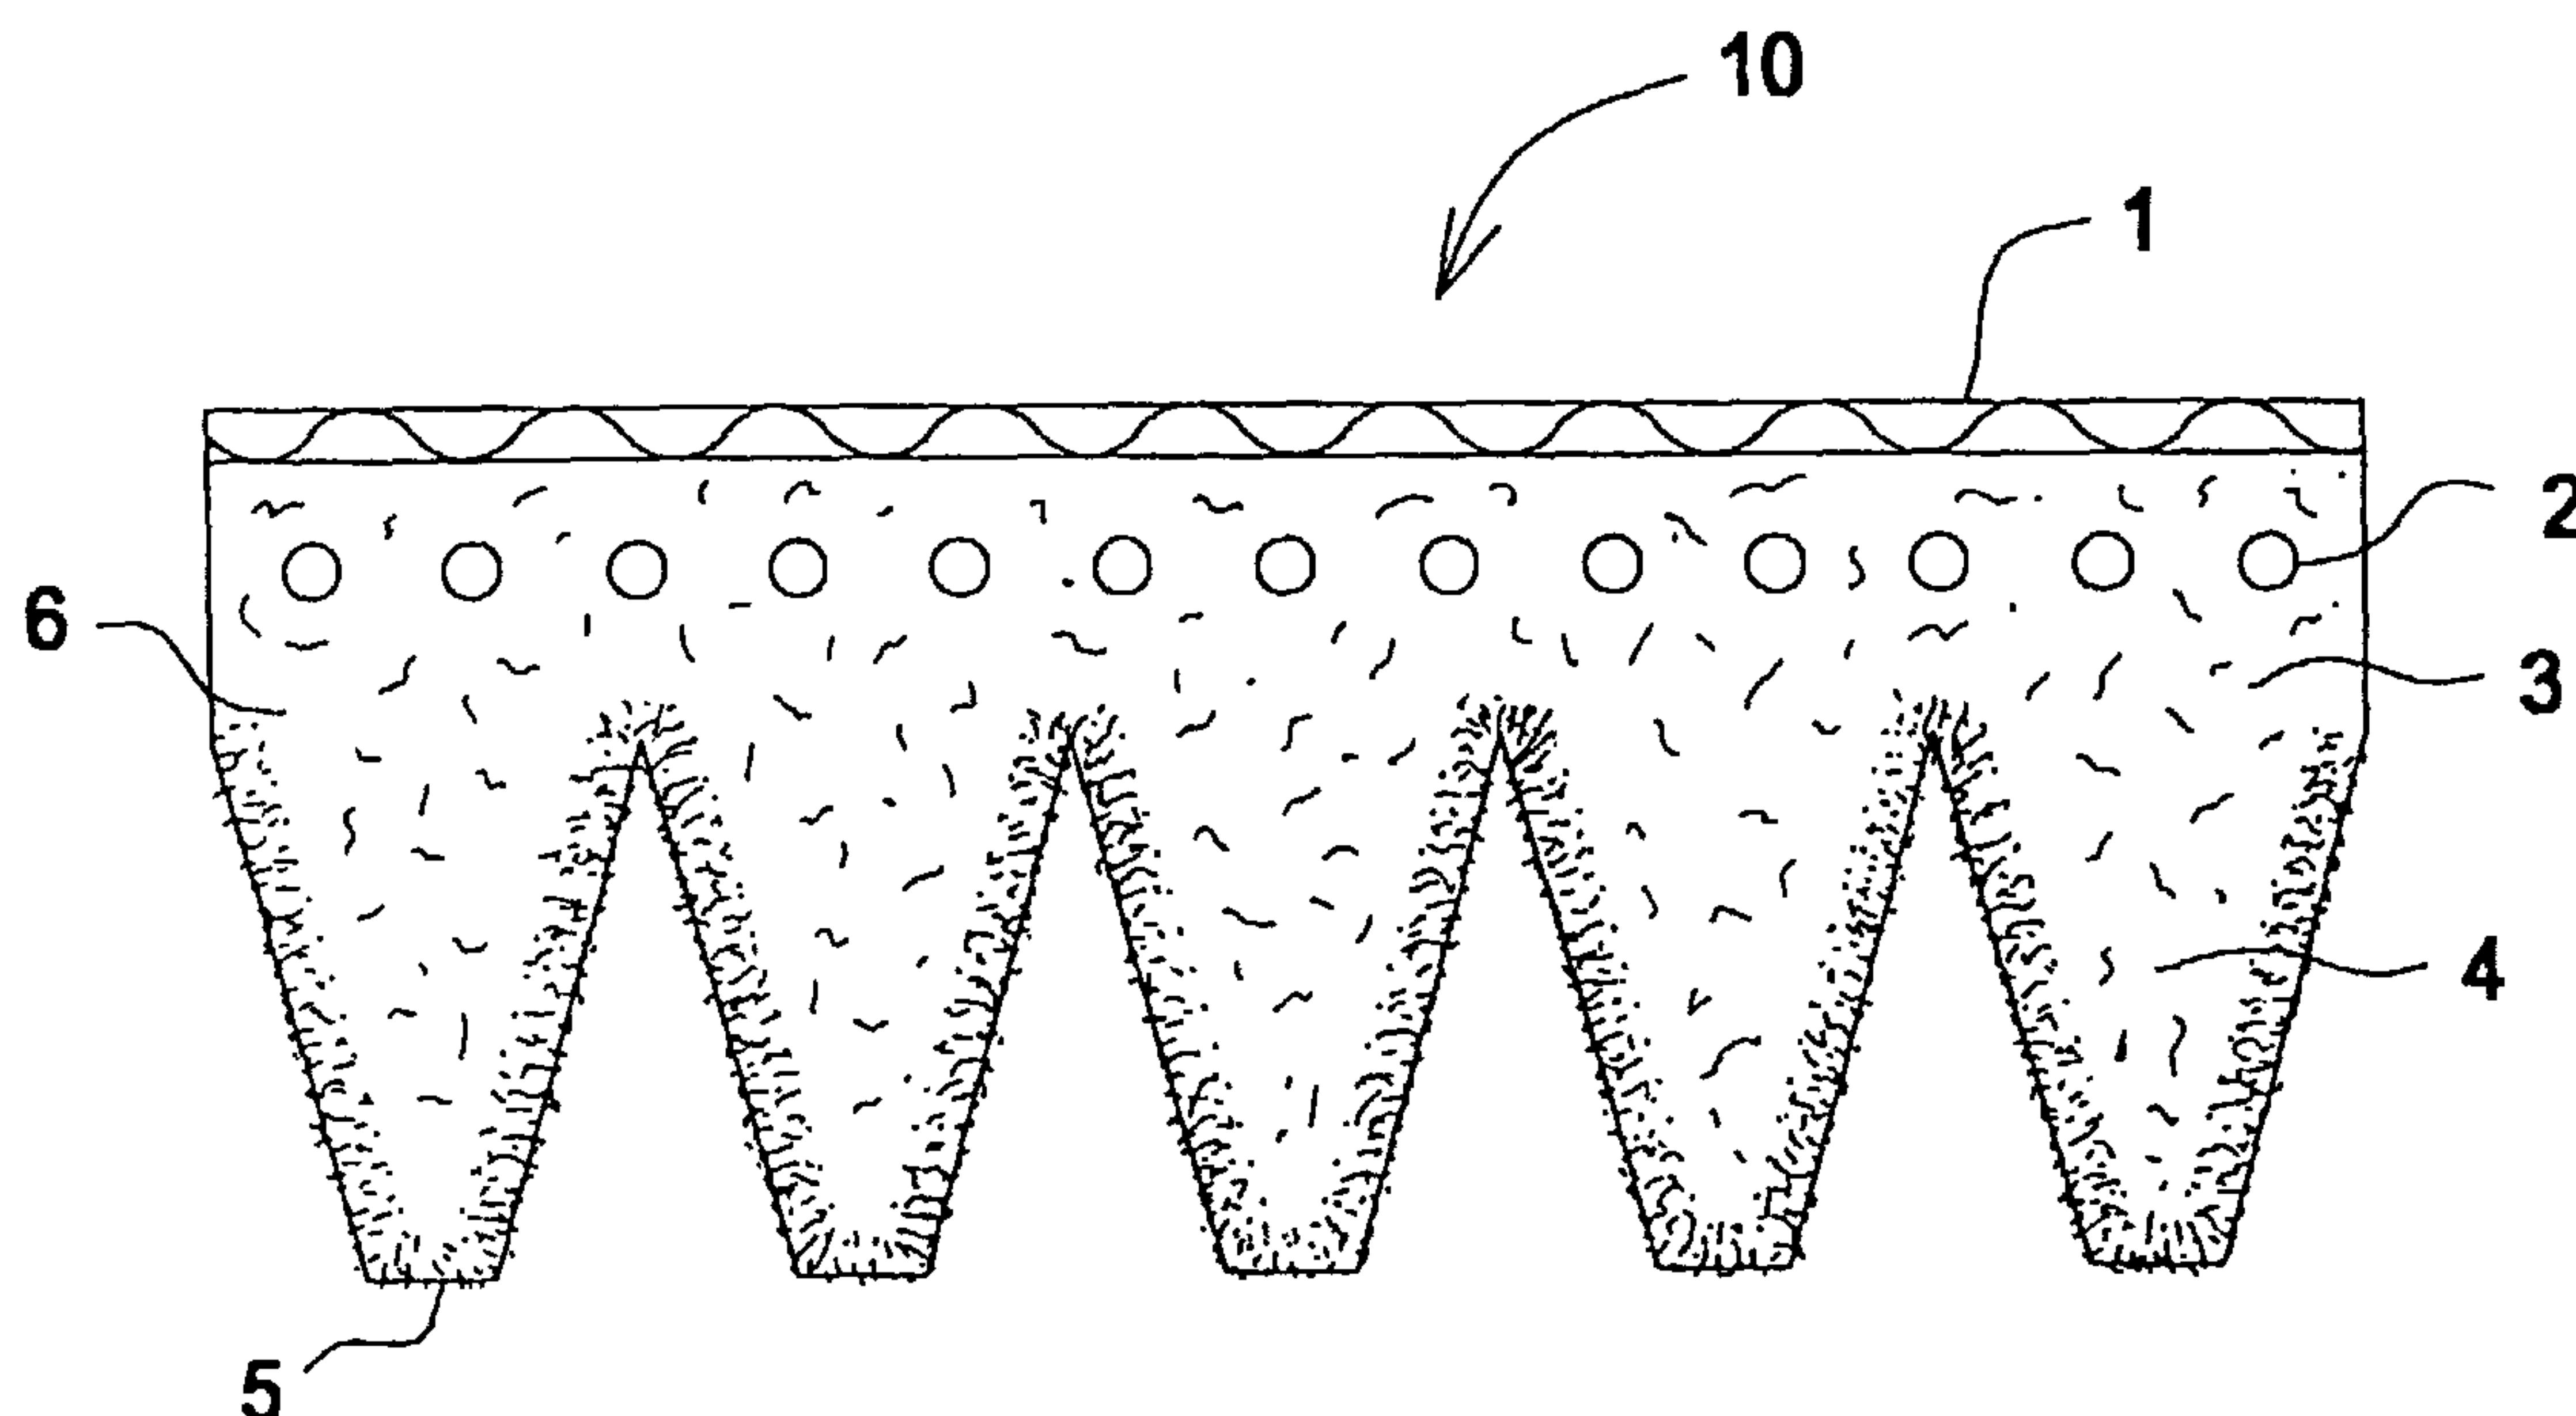

(57) Abstract: A belt having a non-woven region on a pulley engaging surface. The non-woven region has a random coverage to reduce natural frequency harmonics, control frictional characteristics, permeation and thermal resistance. The non-woven may comprise a combination of softwood and hardwood pulp, or synthetic materials applied in a random matrix to a body having a fiber loading.



WO 02/084146 A1

Title

Power Transmission Belt

5

Field of the Invention

The invention relates to power transmission belts having an engineered surface and more particularly, to power transmission belts having an engineered surface comprising a region having a non-woven material and a
10 fiber loaded compression layer.

Background of the Invention

It is known in the art to make power transmission belts from elastomeric materials having an embedded
15 tensile member. The belts may describe a multi-rib, toothed or v type profile. The belts run in pulleys having a matching profile.

It is known that the rib flank surfaces of V and multi-v rib belts are subject to sliding wear,
20 temperature extremes, normal and frictional forces that cause belt noise, rib surface sloughing, slipping, and chatter. It is also known that power transmission capacity and belt longevity are functions of several factors, including the type of material contacting the
25 pulley surfaces. These are currently addressed by incorporating a high loading of various fibers into the mix of the undercord materials. These fibers, or portions of them, are exposed when the V profile is cut or ground to form the belt from the cured belt slab. The resulting
30 surface is a combination of the base polymer and exposed fibers. This technique is limited with regard to an engineering approach for composite design, and/or controlling friction, noise, and slippage. It also

creates a stiff structure that resists bending, which can contribute to belt rib cracking and shortened belt life.

Representative of the art is U.S. patent no. 4,892,510 (1990) to Matsuoka which discloses a v-ribbed belt having a surface layer comprising a non-woven fabric at the outer surface vulcanized to ribs solely made of rubber.

Also representative of the art is U.S. patent no. 5,536,214 (1996) to Akita et al. which discloses a power transmission belt having non-woven fabric on the inside of the belt body on a plurality of the grooves.

Also representative of the art is US patent no. 4,956,036 (1990) to Sedlacek which discloses a discontinuous fiber loaded compressive layer in a multi-ribbed belt. The belt is ground to create the required rib profile, thereby exposing the fibers. The elastomeric body portion is loaded with fiber preferably from about .5 to 20% by volume, with preferred loading at 3% by volume.

What is needed is a power transmission belt having a non-woven pulley engaging surface and fiber loaded compressive layer. What is needed is a power transmission belt having a non-woven pulley engaging surface and fiber loaded compressive layer and a multi-ribbed profile. The present invention meets these needs.

Summary of the Invention

The primary aspect of the invention is to provide a power transmission belt having a non-woven pulley engaging surface and fiber loaded compressive layer.

Another aspect of the invention is to provide a power transmission belt having a non-woven pulley engaging surface and fiber loaded compressive layer and a multi-ribbed profile.

25145-376

3

Other aspects of the invention will be pointed out or made obvious by the following description of the invention and the accompanying drawings.

According to the invention there is provided a
5 belt comprising: a body comprising an elastomeric material and having tensile members running in a longitudinal direction; the body having a pulley engaging region having a profile, the pulley engaging region comprising a non-woven material co-mingled with the elastomeric material; and the
10 elastomeric material further comprises a fiber loading.

The non-woven region has a random coverage of the non-woven material to reduce natural frequency harmonics, control frictional characteristics, permeation and thermal resistance. The non-woven may comprise a combination of
15 softwood and hardwood pulp, as well as synthetic fibers applied in a random matrix to a body having a fiber loading.

Brief Description of the Drawings

Fig. 1 is a side cross-sectional view of the inventive belt.

20 Fig. 2 is a graph of the misaligned noise test results.

Fig. 3 is a graph of the weight loss results.

Detailed Description of the Preferred Embodiment

Fig. 1 is a cross-sectional view of the inventive
25 belt 10. Belt 10 comprises body 3 and pulley engaging ribs 4 running in a longitudinal direction. Belt 10 also comprises load carrying tensile members 2 that run parallel to a longitudinal axis of the belt. Ribs 4 further comprise fibers 6 infused throughout the elastomeric material.

25145-376

3a

Belt 10 may also comprise a jacket 1 applied to an overcord surface.

Ribs 4 may comprise any number and any profile required by a user. Fig. 1 depicts a multi-ribbed profile.

5 The belt may also comprise a single rib v-belt profile.

Pulley engaging non-woven region 5 is a random array of non-woven material co-mingled into the elastomeric of the body 3 and ribs 4 forming a matrix. Region 5 does not have a discrete boundary between the non-woven containing area and the body 3. Due to the co-mingling, both non-woven material and elastomeric are present at a pulley engaging surface.

Non-woven region 5 may comprise a single region or a plurality of overlaid regions of non-woven material. Further, the non-woven region does not have the characteristic of uniformly spaced and aligned fibers as in a cloth or textile. Since the fibers comprising the non-woven region are randomly oriented within the matrix, this reduces the creation and support of natural frequency harmonics one would expect in a more homogeneous material, i.e., where the fibers are more oriented. These harmonics comprise audio oscillation (noise) as well as low frequency oscillations of the belt vibrating between pulleys. A randomly oriented non-woven region tends to substantially damp these oscillations.

Non-woven materials may also be chosen to give a required frictional characteristic, permeation and thermal resistance. A friction reducing agent can be used in the non-woven region to control the coefficient of friction of the outer surface of the non-woven region. The friction reducing agent may be part of the rubber that permeates the non-woven region or is applied to the non-woven material before assembly of the belt. By way of example and not of limitation, friction reducing agents may include waxes, oils, graphite, molybdenum disulfide, PTFE, mica talc, and various blends of the above.

The non-woven material is cellulose based and has a basis weight in the range of 10 lbs./3K sq.ft. up to 45

25145-376

5

lbs./3K sq.ft. The porosity of the non-woven material is in the range of 100 to 370 CFM per ft.² per ½" H₂O ΔP. The thickness of the non-woven region 5 is in the range of .025 mm to 3 mm. The tensile strength in the machine
5 direction is in the range of 230 to 1015 g/inch. The tensile strength in the cross direction is in the range of 66 to 250 g/inch.

The preferred embodiment uses a basis weight of 10 lbs./3K sq.ft.; porosity of 100 CFM per ft.² per ½" H₂O
10 ΔP; tensile strength in the machine direction 550 g/inch; tensile strength in the cross direction 250 g/inch. The non-woven material comprises 50% softwood and 50% hardwood.

Fibers 6 are included in the matrix of the elastomeric body 3 separate from the non-woven region 5.
15 Fibers 6 decrease rib surface sloughing and chatter. The fibers may include aramid, *Kevlar, carbon, polyester, polyethylene, fiberglass, nylon. Other organic fibers may include wool, hemp, cotton, etc. The amount of fibers used in the rib elastomeric may be in the range of .01 to 20
20 parts fiber per hundred parts of rubber. The preferred embodiment utilizes .01 to 5 parts fiber per hundred parts of rubber. The embodiments allow a dramatic reduction in the percentage of flock or fiber loading required in the undercord rib materials. This change has resulted in
25 improved belt performance due to enhanced resilience and bending of the undercord constructions.

The embodiment described herein has been found to reduce/eliminate noise, reduce the instance of rib surface sloughing (or weight loss), while providing excellent
30 tractive effort forces and enhanced V wedging.

*Trade-mark

25145-376

5a

METHOD OF MANUFACTURE

The inventive belt is built up on a mandrel in a series of layers. The elastomeric or fabric overcord of the belt is laid-up first. Each succeeding elastomeric

layer is laid upon the previously applied layer. A gum layer may also be applied. The tensile cords are applied with the elastomeric layers. The elastomeric undercord is then applied. The final element applied to the build
5 upon the final undercord layer is the non-woven region.

At this stage of fabrication, the non-woven region may comprise one or more layers of non-woven material. The non-woven layer or layers have the added advantage of allowing gases developed during the curing process to
10 vent or escape from the edges of the mold. Venting of gases from the mold facilitates impregnation of the elastomeric material into the non-woven material, forming region 5.

The complete build is then subjected to curing
15 pressures and temperatures sufficient to vulcanize and form the belt. For example the fabrication process may comprise;

Once the belt is laid up on a mandrel the slab is removed and placed in the mold;

20 1) evacuating the air from inside the mold and holding for 1 to 5 minutes;

2) increasing the steam pressure on the outside shell to a range of 175 to 235 psig;

25 3) after 2 to 10 minutes, increasing the steam pressure on the inside of the mold to a range of 85 to 210 psig;

4) curing for 10 to 20 minutes;

5) decreasing the steam pressure inside the mold to atmospheric pressure;

30 6) decreasing the steam pressure outside the mold to atmospheric pressure;

7) quenching the mandrel in a cool fluid, such as water;

8) removing the cured belt blank from the mandrel.

Once cooled, the cured belt build is then separated from the mandrel and cut to the appropriate belt widths.

The optimum rib shapes are achieved with process pressures on the high end of the range.

5 Hydraulics or other methods known in the art (pneumatic, electrical) can also be used to apply pressure to the belt, in conjunction with concurrently applied electric heat for curing in lieu of steam cure. The pressure range for a hydraulic cure is 85 to 500
10 psig. The temperature range is 250 to 500 °F. This method of curing broadens the choice of rubber stocks.

Application of pressure prior to curing forces the elastomeric into the non-woven material. The elastomeric material then occupies the interstices between the
15 individual fibers comprising the non-woven material. This results in a region of non-woven material wherein the non-woven materials are co-mingled with the elastomeric.

TESTS

20 Noise and weight loss tests were conducted to compare the inventive belt with belts without a non-woven pulley contact surface. The results indicated the weight loss and noise generated by the belts with a non-woven imbedded surface was reduced significantly.

25 The test belts were as follows:

Belt 1: EPDM - Overcord, Cord, Undercord stock having 12 parts cotton fibers, nonwoven construction.

Belt 2: EPDM - Overcord, Undercord stock having 4 parts nylon fibers, nonwoven construction.

30 Belt 3: CR - Overcord, Cord, Undercord stock with 18 to 20 parts cotton fibers, nonwoven construction.

Belt 4: CR - Overcord with tubular knit, cord, undercord stock with 18 to 20 parts cotton fibers, nonwoven construction.

25145-376

8

Comparison belt A: Std. Chloroprene rubber belt with cut or ground rib profiles, same cord and overcord.

Comparison belt B: Std EPDM belt with cut or ground rib profiles, same cord and overcord.

5 In the misalignment noise test, the non-woven layer belts exhibited a noise reduction in the range of 13 dB to 19 dB for 3 degrees of misalignment as compared to a belt without a non-woven pulley contact surface. The inventive belts exhibited noise generation equivalent to
10 that of standard belts with 1 degree of misalignment. The misalignment noise test is conducted on a two point drive using 140 mm OD pulleys. A horizontal tension of approximately 90 KgF is applied to the test belt. The pulleys are offset from each other and the noise is
15 measured. Test results are shown in Fig. 2.

The weight loss tests demonstrated the inventive belts experienced 87.5% less weight loss as compared to a standard belt for identical operating conditions. Test results are shown in Fig. 3.

20 The test data confirmed that orientation of the non-woven substrate is not critical to the results. Both mill and 90° orientations were tested giving similar results as described above.

The comparative tests were run using the same
25 tensile cord and overcord materials, only the undercord compound and surfaces were enhanced with non-woven materials in the inventive belts.

The data indicates that several non-woven combinations were effective. These range from a formation
30 of 100% softwood, a hardwood/softwood blend, a

25145-376

9

softwood/synthetic blend, and a 100% hardwood.

Example ratios expressed by volume are as follows:

	<u>Softwood</u>	<u>Hardwood</u>	<u>Soft/Syn.</u>
A	100%	0%	0%
5 B	50%	50%	0%
C	75%	25%	0%
D	70%	0%	30%
E	85%	0%	15%
F	0%	100%	0%

10 The forgoing ratios are offered as illustrative of a range of ratios and are not offered by way of limitation. The preferred embodiment utilizes ratio option B.

 The synthetic fibers include aramid, *Kevlar, carbon, polyester, polyethylene, fiberglass, nylon. Other
 15 organic fibres used with the softwoods may include wool, hemp, cotton, etc. These would be included as coefficient of friction and/or structural modifiers. The all hardwood composition may be accomplished using a wood flour or highly processed pulp, blended and mixed into the undercord
 20 elastomeric compounds.

 Although a single form of the invention has been described herein, it will be obvious to those skilled in the art that variations may be made in the construction and relation of parts without departing from the spirit and
 25 scope of the invention described herein.

*Trade-mark

25145-376

10

CLAIMS:

1. A belt comprising:

a body comprising an elastomeric material and having tensile members running in a longitudinal direction;

5 the body having a pulley engaging region having a profile, the pulley engaging region comprising a non-woven material co-mingled with the elastomeric material; and

the elastomeric material further comprises a fiber loading.

10 2. The belt as claimed in claim 1, wherein the pulley engaging region comprises a thickness of .025 mm to 3.0 mm.

3. The belt as claimed in claim 2, wherein the non-woven material comprises a combination of softwood pulp and hardwood pulp.

15 4. The belt as claimed in claim 3, wherein the softwood pulp comprises from greater than 0% to 50% by volume of the non-woven material.

5. The belt as claimed in claim 4, wherein the softwood pulp comprises cotton.

20 6. The belt as claimed in claim 2, wherein the non-woven material comprises a combination of softwood pulp and synthetic material.

7. The belt as claimed in claim 6, wherein the synthetic material comprises nylon.

25 8. The belt as claimed in claim 7, wherein the synthetic material comprises from greater than 0% to 50% by volume of the non-woven material.

25145-376

11

9. The belt as claimed in claim 2, wherein the non-woven material comprises a blend of synthetic and organic materials.

10. The belt as claimed in claim 9, wherein the
5 organic materials comprise softwood pulp and hardwood pulp.

11. The belt as claimed in claim 5, wherein the fiber loading is in the range of .01 to 5 parts per hundred.

12. The belt as claimed in claim 11, wherein the non-woven region comprises at least two layers of non-woven
10 material.

13. The belt as claimed in claim 11, wherein the region comprises a multi-ribbed profile.

14. The belt as claimed in claim 11, wherein the region comprises a v-belt profile.

15 15. The belt as claimed in claim 2, wherein the non-woven material comprises 100% softwood pulp.

16. The belt as claimed in claim 2, wherein the non-woven material comprises 100% hardwood pulp.

FETHERSTONHAUGH & CO.

OTTAWA, CANADA

PATENT AGENTS

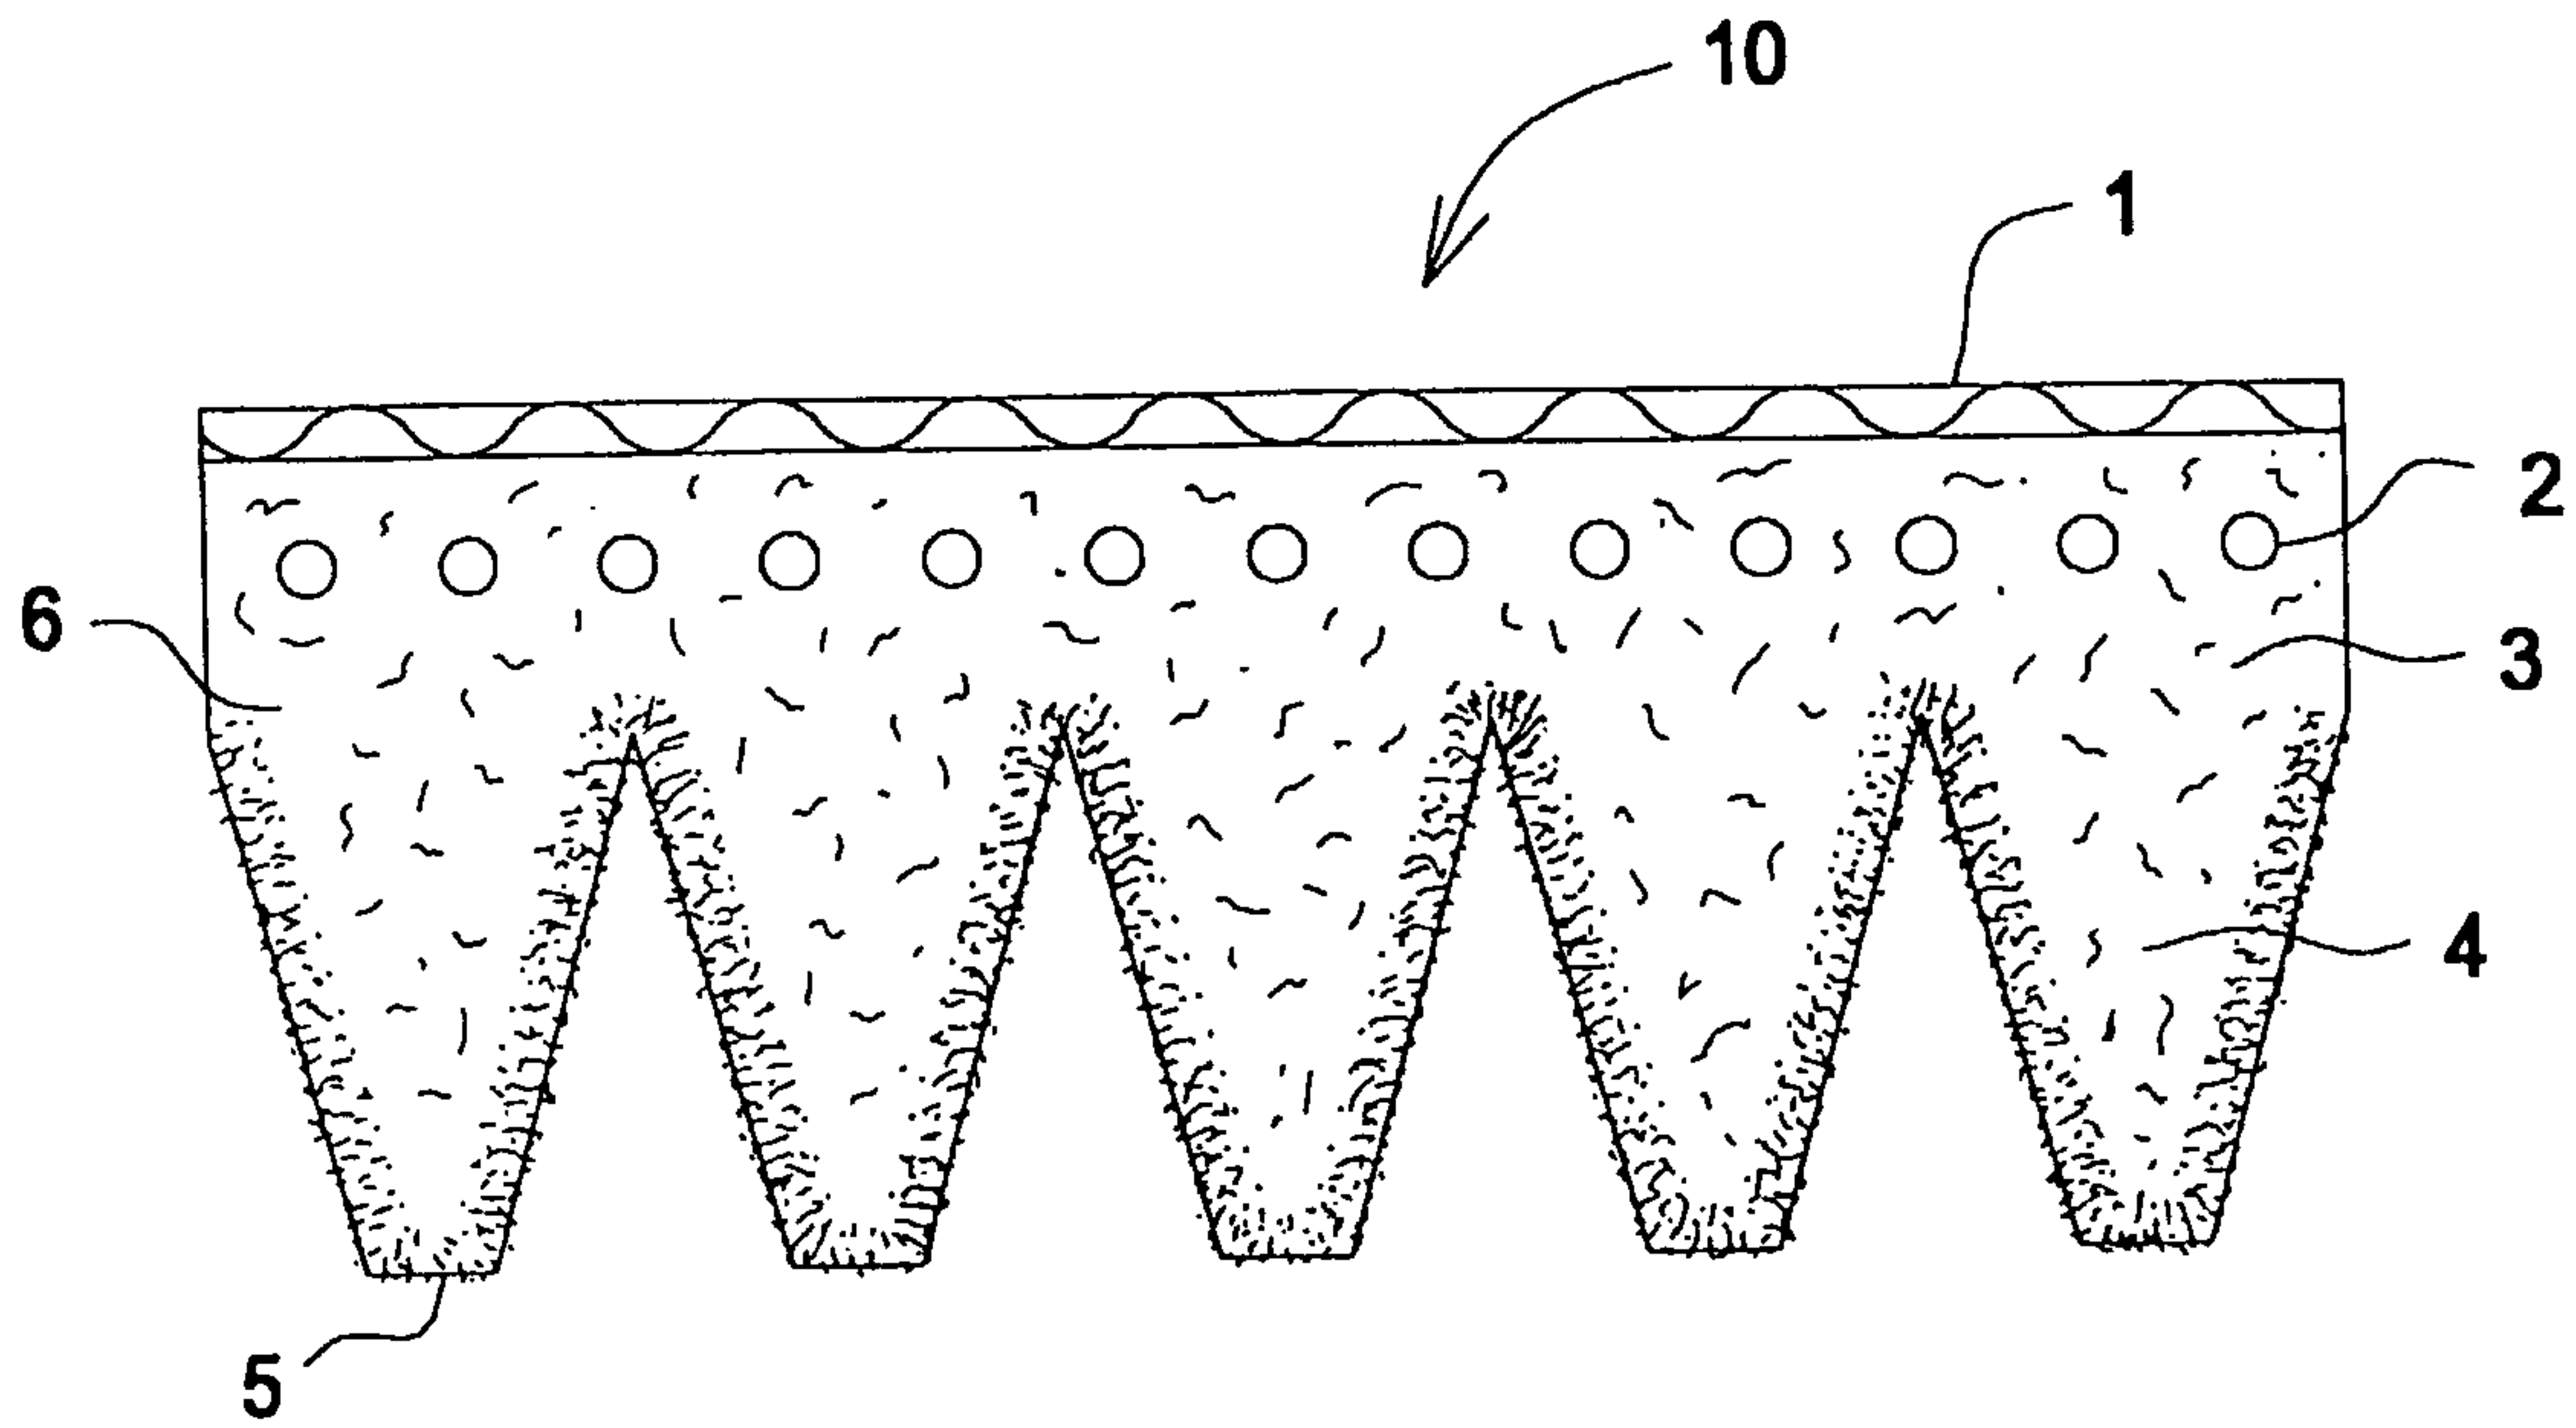


FIG.1

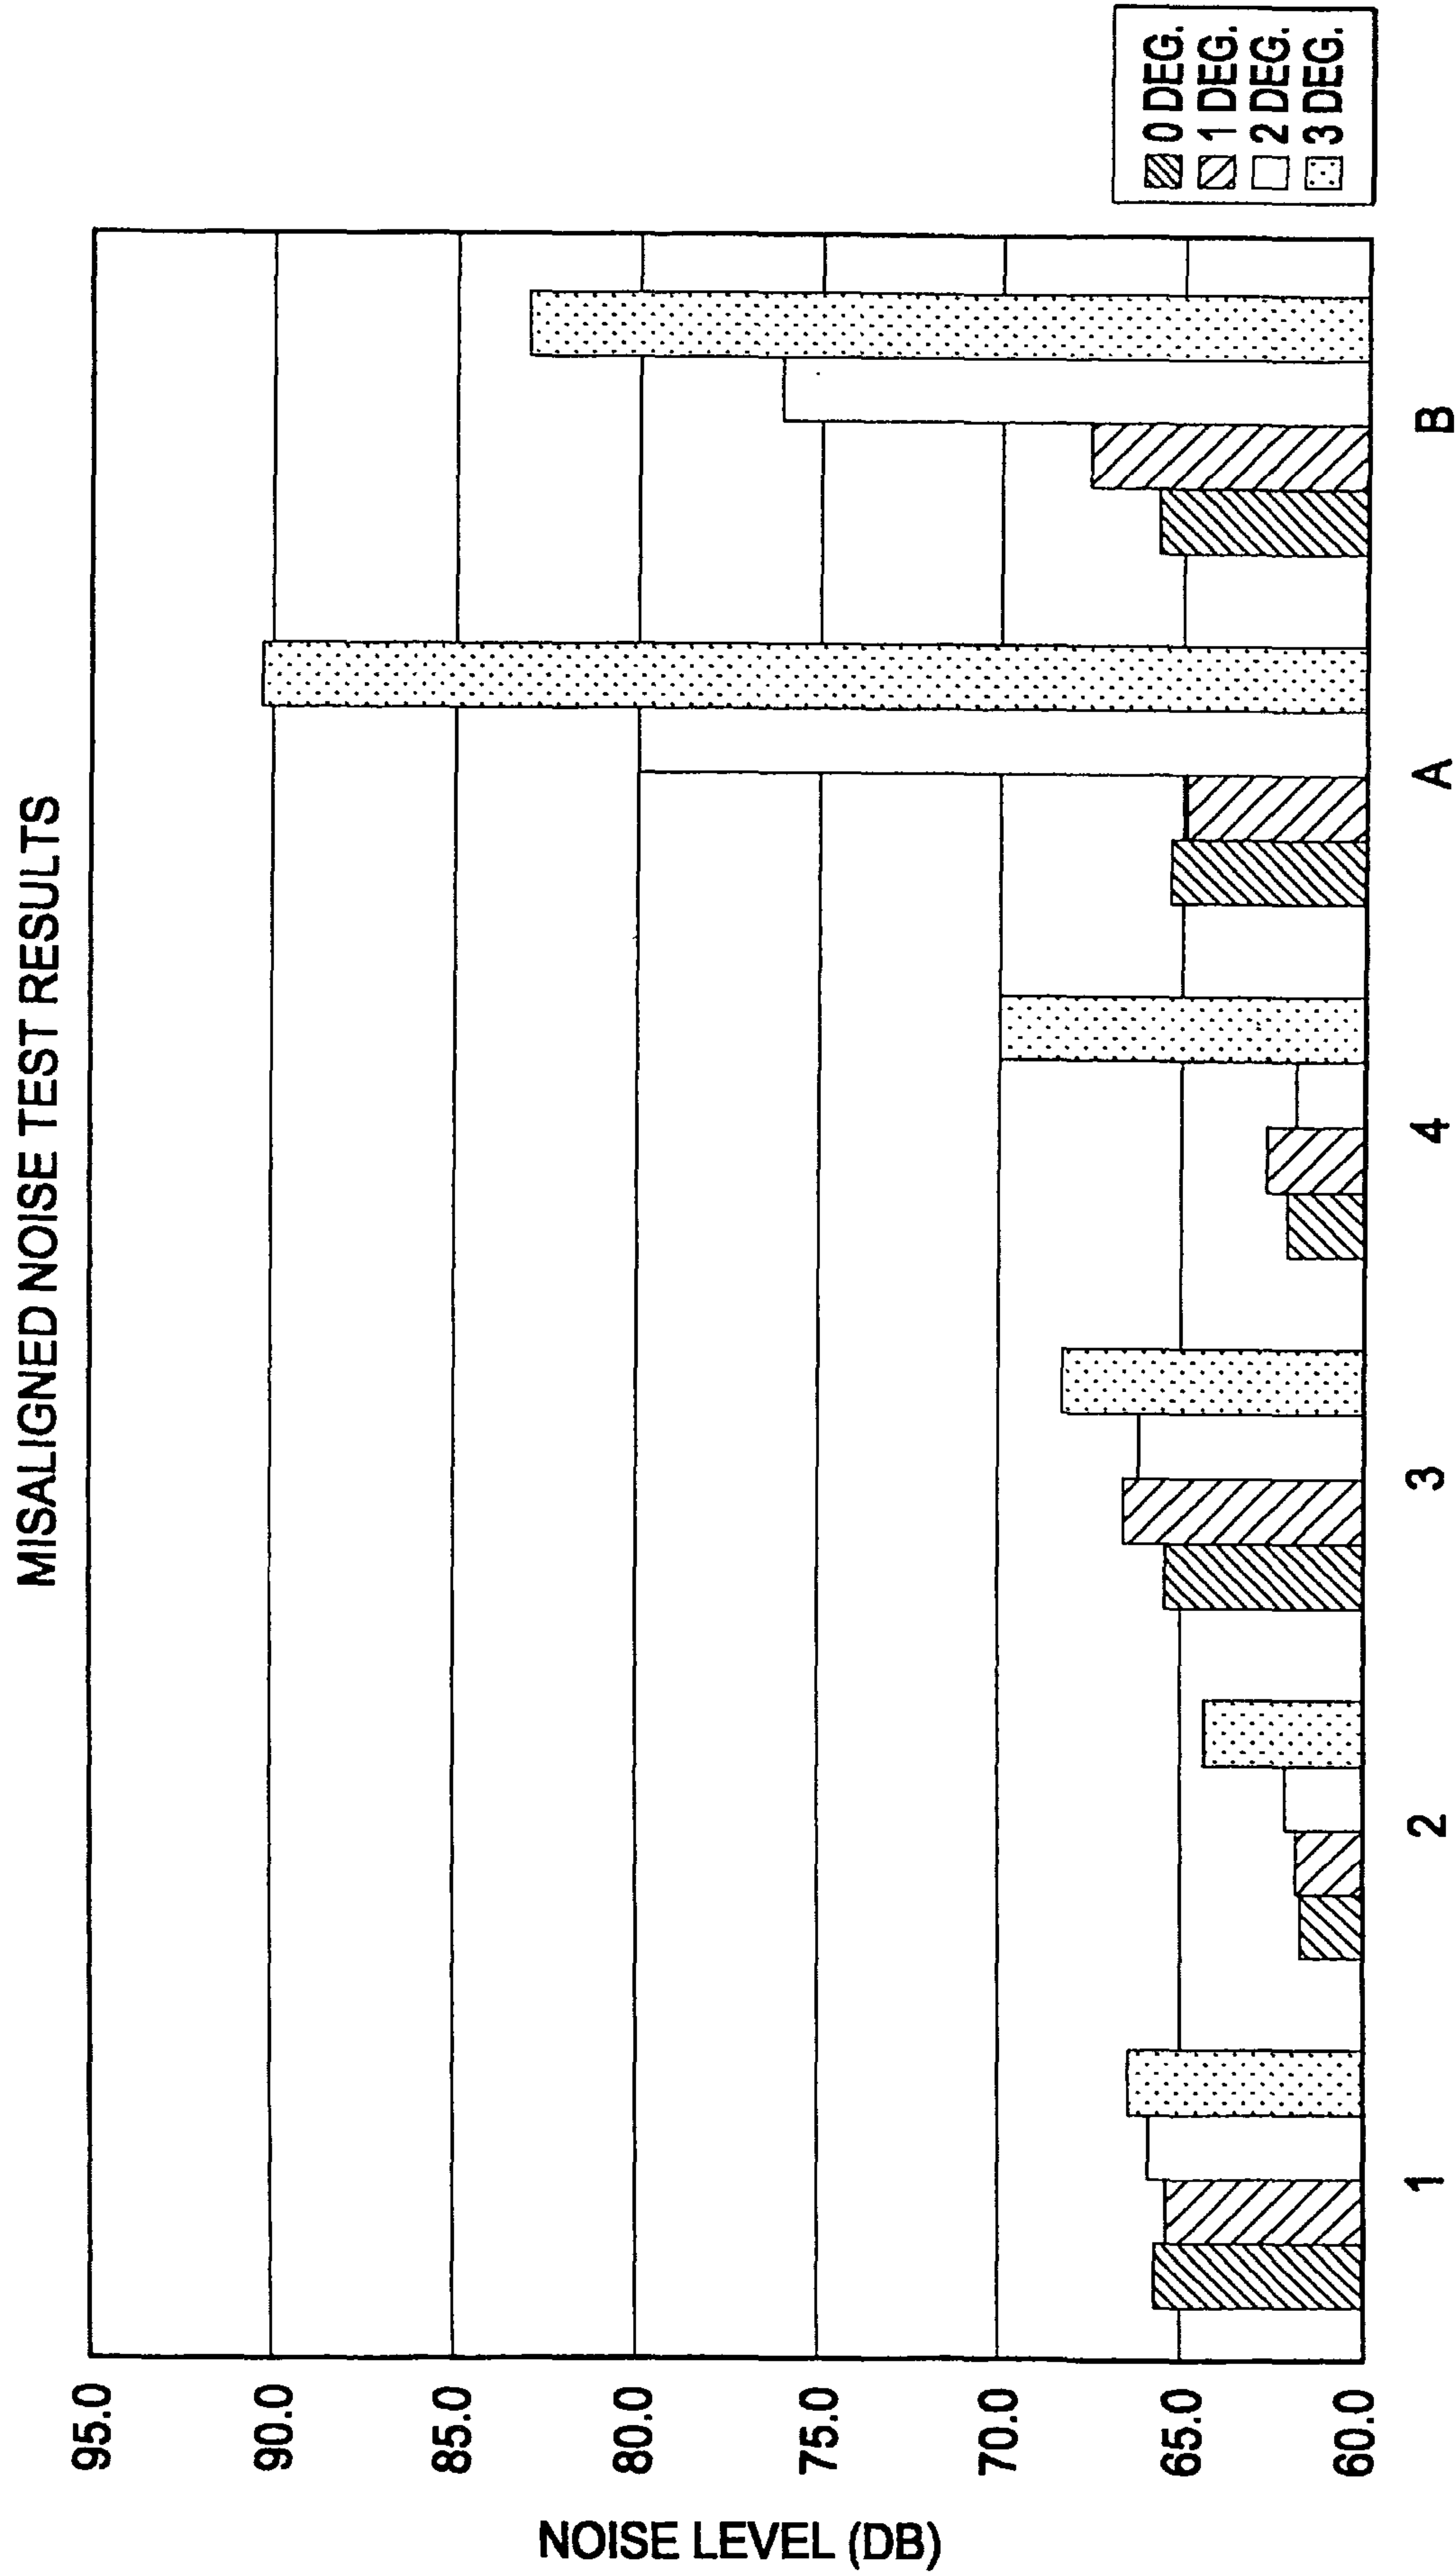


FIG.2

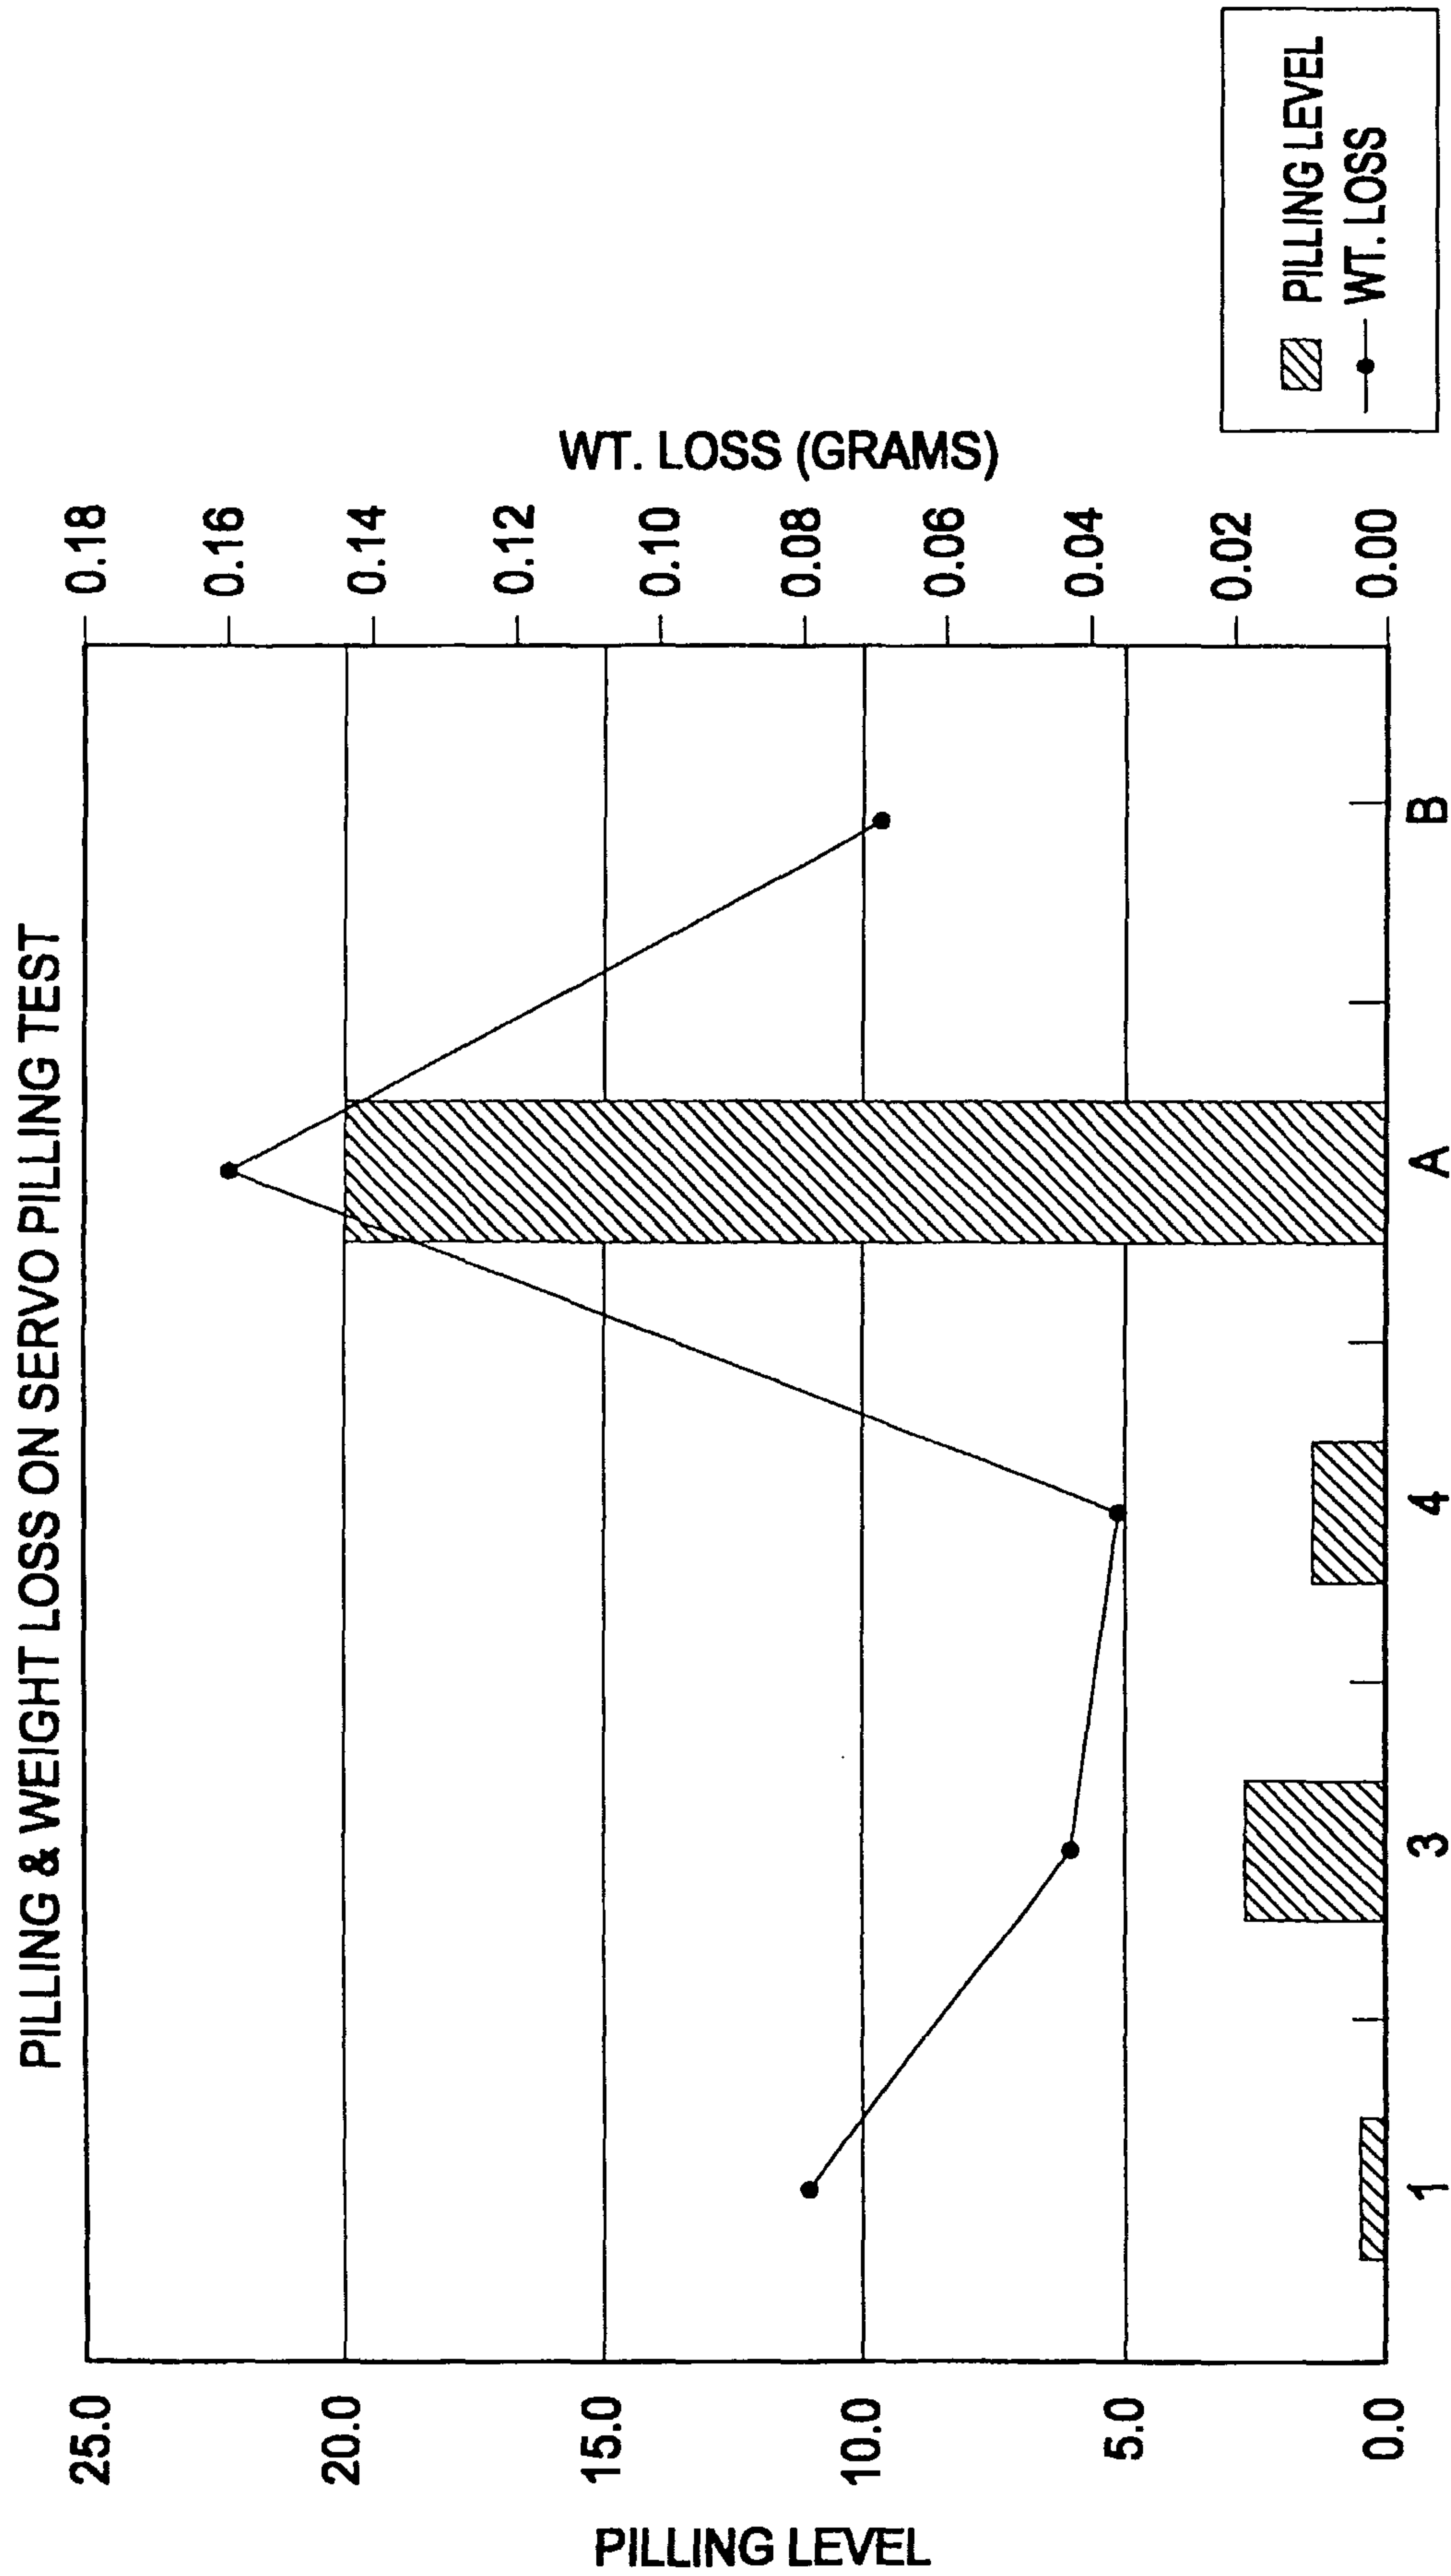


FIG.3

