



(51) International Patent Classification:

F03D 7/02 (2006.01) *F03D 17/00* (2016.01)

(21) International Application Number:

PCT/EP2020/057067

(22) International Filing Date:

16 March 2020 (16.03.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19166597.5 01 April 2019 (01.04.2019) EP

(71) Applicant: SIEMENS GAMESA RENEWABLE ENERGY A/S [DK/DK]; Borupvej 16, 7330 Brande (DK).

(72) Inventor: NAGEL, Eirik; Friesische Strasse 68, 24937 Flensburg (DE).


(74) Agent: ASPACHER, Karl-Georg; Postfach 22 16 34, 80506 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: DETECTING ROTOR BLADE CLEARANCE IN A WIND TURBINE USING DOPPLER SHIFT AND A MATHEMATICAL MODEL

FIG 1

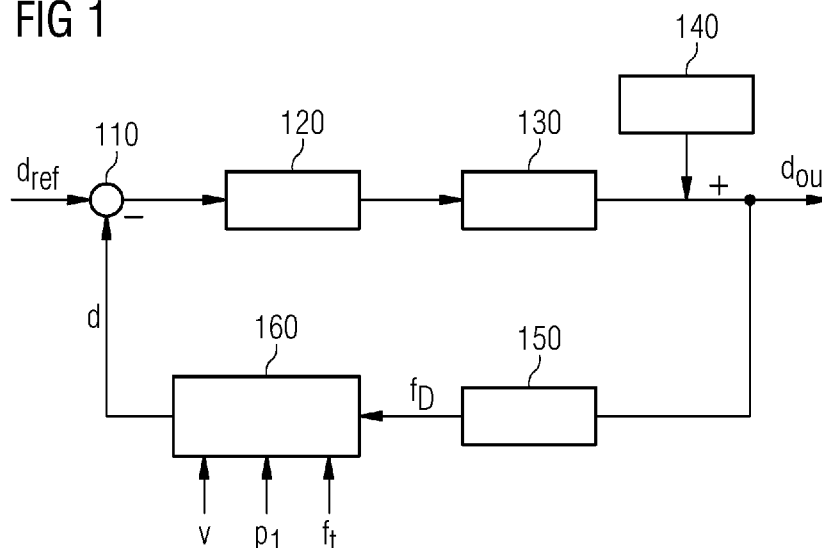

(57) Abstract: A method of determining a blade clearance during operation of a wind turbine is provided, the blade clearance corresponding to a distance between a rotor blade and a tower of the wind turbine. The method comprises (a) detecting a rotor blade velocity, (b) emitting a first signal from an observer location, the first signal having a first frequency, (c) receiving a second signal at the observer location, the second signal being reflected from the rotor blade when the first signal impinges on the rotor blade, (d) determining a Doppler shift of the second signal relative to the first signal, and (e) determining the blade clearance based on the first frequency, the Doppler shift, the observer location, and the rotor blade velocity, wherein the step of determining the blade clearance utilizes a mathematical model. A corresponding system and a wind turbine comprising such a system are also provided.



Published:

— *with international search report (Art. 21(3))*

DESCRIPTION

Detecting rotor blade clearance in a wind turbine using Doppler shift and a mathematical model

5

Field of Invention

The present invention relates to wind turbines. More specifically, the present invention relates to a method of determining a blade clearance during operation of a wind turbine, the blade clearance corresponding to a distance between a rotor blade and a tower of the wind turbine. The present invention further relates to a system for determining a blade clearance during operation of a wind turbine. Furthermore, the present invention relates to a wind turbine comprising such system.

Art Background

In the above defined technical field, systems are known, which comprise a plurality of radar units operatively configured to emit and receive radar signals. The radar units are typically mounted on and around the wind turbine tower, the radar units being positioned so as to measure reflections of an emitted radar signal from the turbine blade. A processing unit is configured to receive measurement data from the radar unit and to determine, by analysis of Doppler shift, time of flight, phase and amplitude in received radar signals relative to transmitted signals due to movement of the blade towards or away from the turbine tower, the velocity of the blade in the direction towards or away from the turbine tower. This permits calculation of the trajectory and, in particular, the absolute speed and position of the blade.

Using radar units to measure blade position based on the Doppler Effect is for example described in EP 2864632 and permits to avoid the installation of other types of sensors on the blades or nacelle of the wind turbine. This reduces manu-

facturing and maintenance costs of the wind turbine, since sensors positioned on the tower are easier to replace in the field.

5 However such a solution is not yet optimal considering that for rotating objects, like the rotor blades or the nacelles, installation of a plurality of radar units is required.

10 A single radar unit may in fact be used but only for detecting the passage of the blade at a single location. At least two radar units (horizontally mounted) are required for following the position of the blade around the nacelle yawing. One radar unit is able to detect the revolution of the blade at a specific position. More than two single radar units may
15 be used for improving redundancy, resolution and confidence of the detection. However, this further increases costs and the need for software resources. Each radar unit requires a dedicated processing unit for analyzing the signals and deriving the position and speed of the blade.

20

Furthermore, using the Doppler shift requires a huge amount of turbine individual empirical data (see e.g. US 7 246 991 B1, column 4, lines 36-39).

25 There may thus be a need for an easier and improved way of efficiently utilizing the Doppler shift to determine rotor blade clearance, in particular without costly and time consuming acquisition of empirical data for each single wind turbine.

30

Summary of the Invention

This need may be met by the subject-matter according to the independent claims. Advantageous embodiments of the present
35 invention are set forth in the dependent claims.

According to a first aspect of the present invention, a method of determining a blade clearance during operation of a

wind turbine is provided, the blade clearance corresponding to a distance between a rotor blade and a tower of the wind turbine. The method comprises (a) detecting a rotor blade velocity, (b) emitting a first signal from an observer location, the first signal having a first frequency, (c) receiving a second signal at the observer location, the second signal being reflected from the rotor blade when the first signal impinges on the rotor blade, (d) determining a Doppler shift of the second signal relative to the first signal, and (e) determining the blade clearance based on the first frequency, the Doppler shift, the observer location, and the rotor blade velocity, wherein the step of determining the blade clearance utilizes a mathematical model.

This aspect of the invention is based on the idea that a mathematical model providing a relation between blade clearance, the first frequency (i.e. the transmitting frequency), Doppler shift, the observer location, and the rotor blade velocity is utilized to determine the blade clearance based on current measurement data (Doppler shift and rotor blade velocity) and known parameter values (first frequency and observer location). Thus, the method can be used for any wind turbine without the need for collecting empirical data.

According to an embodiment of the invention, the step of determining the blade clearance comprises a lookup in a data array stored in a memory unit, the data array being computed using the mathematical model.

In other words, a data array with pre-computed values of blade clearance for a wide range of parameter values is used for looking up the corresponding blade clearance value instead of computing it on the fly using the mathematical model. In this way, processing resources and time can be saved.

The data array may in particular constitute one or more lookup tables or LUTs. Since the static parameter values are known for a given wind turbine, the data array can be pre-computed and stored in a memory unit, e.g. of a wind turbine

controller without having to rely on empirical data collection.

According to a further embodiment of the invention, the method further comprises determining a relative blade velocity based on the blade velocity and the observer location.

In this context, the term "relative blade velocity" denotes the magnitude of the blade velocity in a direction from the observer location towards the part of the rotor blade that reflects the first signal. In other words, the "relative blade velocity" is the change in distance between the reflecting part of the rotor blade and the observer location.

The relative blade velocity may be calculated as the magnitude of a projection of the detected rotor blade velocity vector onto a vector extending between the observer location and the part of the rotor blade (e.g. tip of the rotor blade) that reflects the first signal.

According to a further embodiment of the invention, the data array comprises a blade clearance value for each of a plurality of combinations of first frequency values, Doppler shift values and relative blade velocity values. The latter is influenced/defined by the blade/turbine data (in particular blade length, nominal rotor RPM, position of observer location, e.g. on wind turbine tower).

The data array may in particular comprise a plurality of lookup tables, each lookup table corresponding to a certain value of the relative blade velocity and providing blade clearance values for a plurality of combinations of the first frequency and the Doppler shift.

According to a further embodiment of the invention, the first signal is emitted by a leaky feeder arrangement at the observer location, and the second signal is received by the leaky feeder arrangement.

The leaky feeder arrangement may comprise one or more leaky feeders, i.e. elongate cables or wave guides with leaky sections that allow emission of the first signal and/or receiving of the second signal.

In this case, the observer location (i.e. where the signals are emitted and received) will be a point (leaky section or slot) on a leaky feeder.

According to a second aspect of the invention, a system for determining a blade clearance during operation of a wind turbine is provided, the blade clearance corresponding to a distance between a rotor blade and a tower of the wind turbine.

The system comprises (a) a velocity detector configured to detect a rotor blade velocity, (b) a signal emitter configured to emit a first signal from an observer location, the first signal having a first frequency, (c) a signal receiver configured to receive a second signal at the observer location, the second signal being reflected from the rotor blade when the first signal impinges on the rotor blade, (d) a signal processor coupled to the signal emitter and the signal receiver, wherein the signal processor is configured to determine a Doppler shift of the second signal relative to the first signal, and (e) a determination device configured to determine the blade clearance based on the first frequency, the Doppler shift, the observer location, and the rotor blade velocity utilizing a mathematical model.

The system according to this aspect is essentially based on the same idea as the first aspect described above.

The velocity detector may in particular be capable of detecting the rotor speed of the wind turbine and derive a vector representation of the velocity of a certain part of the rotor blade (the part of interest, such as a tip section of the rotor blade) from the rotor speed (using relevant parameters of

the wind turbine, such as blade length, location of the part of interest, etc.).

The signal processor and/or the determination device may be
5 separate entities, e.g. included in a wind turbine controller, or may form part of control electronics located together with or close to the signal emitter and receiver.

According to an embodiment of the invention, the determination device comprises a memory unit storing a data array computed using the mathematical model, and wherein the determination device is configured to determine the blade clearance by performing a lookup in the data array.

15 In other words, a data array with pre-computed values of blade clearance for a wide range of parameter values is stored in the memory unit and used for looking up the corresponding blade clearance value instead of computing it on the fly using the mathematical model. In this way, processing resources and time can be saved. The data array may in particular constitute one or more lookup tables or LUTs. Since the static parameter values are known for a given wind turbine, the data array can be pre-computed and stored in the memory unit without having to rely on empirical data collection.

25 According to a further embodiment of the invention, the determination device further comprises a velocity calculation unit configured to calculate a relative blade velocity based on the blade velocity and the observer location.

30 As above, the term "relative blade velocity" denotes the magnitude of the blade velocity in a direction from the observer location towards the part of the rotor blade that reflects the first signal. In other words, the "relative blade velocity"
35 is the change in distance between the reflecting part of the rotor blade and the observer location.

The velocity calculation unit may calculate the relative blade velocity as the magnitude of a projection of the detected rotor blade velocity vector onto a vector extending between the observer location and the part of the rotor blade (e.g. tip of the rotor blade) that reflects the first signal.

According to a further embodiment of the invention, the data array comprises a blade clearance value for each of a plurality of combinations of first frequency values, Doppler shift values and relative blade velocity values.

The data array may in particular comprise a plurality of lookup tables, each lookup table corresponding to a certain value of the relative blade velocity and providing blade clearance values for a plurality of combinations of the first frequency and the Doppler shift.

Thus, after determining the relative blade velocity, the appropriate lookup table can be selected and the value of the blade clearance that corresponds to the values of the first frequency and Doppler shift can easily be looked up.

According to a further embodiment of the invention, the signal emitter and the signal receiver are comprised by a leaky feeder arrangement.

The leaky feeder arrangement may comprise one or more leaky feeders, i.e. elongate cables or wave guides with leaky sections that allow emission of the first signal and/or receiving of the second signal.

According to a further embodiment of the invention, the leaky feeder arrangement comprises at least one leaky feeder forming a loop shape around the tower of the wind turbine.

In other words, at least one leaky feeder is arranged as a loop around the tower. Thereby, the at least one leaky feeder is capable of emitting and/or receiving signals relevant for

detecting the rotor blade for any yaw angle, i.e. for any wind direction.

5 In some embodiments, the leaky feeder arrangement does not extend all the way around the tower but only forms an arc shape or an arc segment around a part of the tower circumference.

10 According to a further embodiment of the invention, the at least one leaky feeder is a leaky coaxial cable or a leaky waveguide.

A coaxial leaky cable may in particular be suitable in implementations where the first and second signals are RF signals.
15 A leaky waveguide or a leaky stripline or microstrip may in particular be suitable for embodiments where the first and second radar signals have higher frequencies.

20 According to a third aspect of the invention, a wind turbine comprising a tower and a least one rotor blade is provided. The wind turbine further comprises a system according to the second aspect or any of the above embodiments.

25 This aspect is essentially based on the same idea as the first and second aspects discussed above.

According to a further embodiment of the invention, the observer location is positioned on a loop shape extending around a circumference of the tower.

30

In other words, the observer location is a position on the tower surface at a predetermined height above ground level and thus at a predetermined distance from the rotor axis.

35 The blade clearance determined in accordance with the aspects and embodiments described above may also be used to determine rotor blade vibrations by determining the time derivative of the blade clearance.

Brief Description of the Drawings

The aspects defined above and further aspects of the present invention are apparent from the examples of embodiment to be described hereinafter and are explained with reference to the examples of embodiment. The invention will be described in more detail hereinafter with reference to examples of embodiment but to which the invention is not limited.

Figure 1 shows a block diagram of a wind turbine control system utilizing an embodiment of the present invention.

Figure 2 shows a block diagram of another wind turbine control system utilizing an embodiment of the present invention.

Figure 3 shows a side view of a wind turbine comprising a system according to an embodiment of the present invention.

Figure 4 shows a schematic front view of a rotating rotor blade, in particular with regard to a relation between tangential and radial velocity of the rotating rotor blade in accordance with a mathematical model utilized by embodiments of the present invention.

Figure 5 shows a schematic side view of a wind turbine model as used to establish a mathematical model utilized by embodiments of the present invention.

Detailed Description

The illustrations in the drawings are schematic. It is noted that in different figures, similar or identical elements are provided with the same reference numerals or with reference numerals which differ only within the first digit.

Figure 1 shows a block diagram of a wind turbine control system utilizing an embodiment of the present invention. More

specifically, Figure 1 shows a control system for blade clearance, i.e. for assuring that a rotor blade of a wind turbine keeps a certain distance (clearance) from the tower of the wind turbine during operation.

5

The depicted system comprises a subtraction point 110, a controller 120, a pitch drive 130, a load (or disturbance, e.g. wind) 140, a Doppler shift determining device 150 (or radar unit), and a lookup array device 160. The system receives a clearance set point d_{ref} at one input of subtraction unit 110. The other input of the subtraction unit 110 receives a measured blade clearance d . The difference ($d_{\text{ref}} - d$) is supplied to controller 120 which provides a corresponding control signal to pitch drive unit 130. The load 140 represents an indication of the current load on the wind turbine.

15

The Doppler shift determining device 150 (which will be described in more detail below) is configured to determine a Doppler shift f_D based on a signal emitted towards a rotor blade and a signal reflected from the rotor blade. The determined Doppler shift is supplied to lookup array device 160 which also receives inputs relating to the rotor speed v , an observer location P_1 and a frequency f_t of the signals emitted to determine the Doppler shift. Using these parameter values, the lookup array device 160 determines the value d of the blade clearance and supplies it to the subtraction unit 110 as described above. The subtraction unit 110 thus calculates the difference between the clearance set point d_{ref} and the actual (measured clearance) d .

25
30

Figure 2 shows a block diagram of another wind turbine control system utilizing an embodiment of the present invention in a different way in comparison to the system shown in Figure 1 and discussed above. More specifically, the control system depicted in Figure 2 comprises an empirical lookup unit 161 (as known in the art and discussed in the introduction) to determine a clearance value based on the Doppler shift obtained by Doppler shift determining device 150. Addi-

35

tionally, the lookup array unit 160 is used to check the values provided by the empirical lookup unit 161. Although the drawing shows that values for both d and f_D are output by the lookup array unit 160 and supplied to respective summation points 163, 162, it should be understood that only one of these values are used in a specific implementation. The idea is to have the mathematical model 160 running in the background such that the expected values of either d or f_D can be compared with the measured value output by either the Doppler shift determining device 150 or the empirical lookup unit 161. In case of a deviation exceeding a predetermined threshold, an error message may be output. In other words, the model based device 160 provides a kind of plausibility check.

Figure 3 shows a side view of a wind turbine 1 comprising a system according to an embodiment of the present invention. More specifically, the wind turbine 1 comprises a tower 2, which is mounted on a non-depicted fundament. A nacelle 3 is arranged on top of the tower 2. In between the tower 2 and the nacelle 3, a yaw angle adjustment device (not shown) is provided, which is capable of rotating the nacelle around a vertical yaw axis Z . The wind turbine 1 further comprises a wind rotor 5 having one or more rotor blades 4 (in the perspective of Figure 1 only two blades 4 are visible). The wind rotor 5 is rotatable around a rotational axis Y . In general, when not differently specified, the terms axial, radial and circumferential in the following are made with reference to the rotational axis Y . The rotor blades 4 extend radially with respect to the rotational axis Y . The wind turbine 1 comprises an electric generator 6 having a stator 11 and a rotor 12. The rotor 12 is rotatable with respect to the stator 11 about the rotational axis Y to generate electrical power. The electric generator 6 and the generation of electrical power through the present invention is not a specific object of the present invention and will therefore not be described in further detail.

Figure 3 further shows a Doppler shift determining device 150 of a system according to the present invention. The device 150 comprises a leaky feeder arrangement 20 mounted at the tower 2, and a transmitter 30 and a receiver 40 coupled to the leaky feeder arrangement 20. The transmitter 30 is configured to supply a first signal to the leaky feeder arrangement 20 which emits (leaks) it from the observer location P1. The receiver 40 is configured to receive a second signal from the leaky feeder arrangement 20, e.g. a signal reflected from point P2 on the rotor blade 4 when the first signal hits the rotor blade 4 and received at the observer location P1. The apparatus further comprises a processing unit (not shown) configured to determine the Doppler shift f_D . The leaky feeder arrangement preferably surrounds the entire circumference of the tower 2. The radial distance from the rotor axis Y to the blade tip P2 is R while the radial distance from the rotor axis Y to the leaky feeder arrangement 20 is L1.

Figure 4 shows a schematic front view of a rotating rotor blade 4, in particular with regard to a relation between tangential velocity v and radial velocity (also referred to as relative velocity) v_D of the point P2 on the rotor blade 4 in accordance with a mathematical model utilized by embodiments of the present invention. The observer location P1 is located at the bottom of the drawing. Thus, when the rotor blade 4 rotates and the point P2 moves correspondingly, the rotating movement will cause a radial movement of P2 with a relative velocity v_D given as the projection of the tangential velocity v (i.e. the rotational speed of the rotor 4 at P2) on the vector L extending between P1 and P2. This radial movement will influence the measured Doppler shift f_D and will therefore have to be taken into consideration as shown in the following.

Figure 5 shows a schematic side view of a wind turbine model as used to establish a mathematical model utilized by embodiments of the present invention. As can be seen, the model depicted in Figure 5 corresponds essentially to the view pre-

sented in Figure 3 and introduces a number of angles, vectors and other parameters. The angle θ is the rotational angle (around the rotational axis Y) of the rotor while Ψ is the yaw angle (around the axis of the tower 2). The distance between the central tower axis and the rotor plane is h. Similarly, the distance between the central tower axis and the observer location P1 (i.e. the radius of the loop-shaped leaky feeder arrangement 20) is l. The distance from the rotor axis Y to the observer location P1 is L1.

For given values of transmitter frequency (first frequency) f_t , radial (or relative) velocity v_D and speed of light c_0 , the Doppler shift f_D is given as

$$f_D = 2f_t \frac{v_D}{c_0}$$

The relative velocity v_D is given as

$$v_D = \frac{\vec{L} \cdot \vec{v}}{|\vec{L}|}$$

It can be shown that the scalar product in the numerator of the above equation is given as

$$\vec{L} \cdot \vec{v} = -R\omega(L_1 \sin \theta \cos^2 \psi + L_1 \sin \theta \sin^2 \psi - l \cos \theta \sin \psi)$$

and that the denominator is given as

$$|\vec{L}| = \sqrt{(L_1 + R \cos \theta)^2 + (h \sin \theta + R \sin \theta \cos \psi)^2 + (h \cos \psi - l - r \sin \theta \sin \psi)^2}$$

Referring still to Figure 4 and Figure 5, the following relation between Doppler shift f_D and radial velocity v_D is established:

$$f_D = 2f_t \frac{v}{c_0} \cos \alpha = 2f_t \frac{v_D}{c_0}$$

Using the above formulas, a data array for looking up the blade clearance d for a large number of combinations of val-

ues for Doppler shift f_D , radial velocity v_D , and transmission frequency f_t can be calculated and stored for a given wind turbine (where the observer location P1 is given by the distances L_1 and l in Figure 5). The resulting data array is
5 stored in a lookup array device 160 (see Figure 1 and Figure 2) and allows easy, cheap and precise determination of the blade clearance during operation of a wind turbine.

It should be noted that the term "comprising" does not exclude other elements or steps and "a" or "an" does not exclude a plurality. Also elements described in association
10 with different embodiments may be combined. It should also be noted that reference signs in the claims should not be construed as limiting the scope of the claims.

15

CLAIMS

1. A method of determining a blade clearance during operation of a wind turbine, the blade clearance corresponding to
5 a distance between a rotor blade and a tower of the wind turbine, the method comprising

detecting a rotor blade velocity,

emitting a first signal from an observer location, the first signal having a first frequency,

10 receiving a second signal at the observer location, the second signal being reflected from the rotor blade when the first signal impinges on the rotor blade,

determining a Doppler shift of the second signal relative to the first signal, and

15 determining the blade clearance based on the first frequency, the Doppler shift, the observer location, and the rotor blade velocity,

wherein the step of determining the blade clearance utilizes a mathematical model.

20

2. The method according to the preceding claim, wherein the step of determining the blade clearance comprises a lookup in a data array stored in a memory unit, the data array being computed using the mathematical model.

25

3. The method according to any of the preceding claims, further comprising determining a relative blade velocity based on the blade velocity and the observer location.

30

4. The method according to claim 2 and 3, wherein the data array comprises a blade clearance value for each of a plurality of combinations of first frequency values, Doppler shift values and relative blade velocity values.

35

5. The method according to any of the preceding claims, wherein the first signal is emitted by a leaky feeder arrangement at the observer location, and wherein the second signal is received by the leaky feeder arrangement.

6. A system for determining a blade clearance during operation of a wind turbine, the blade clearance corresponding to a distance between a rotor blade and a tower of the wind turbine, the system comprising

a velocity detector configured to detect a rotor blade velocity,

a signal emitter configured to emit a first signal from an observer location, the first signal having a first frequency,

a signal receiver configured to receive a second signal at the observer location, the second signal being reflected from the rotor blade when the first signal impinges on the rotor blade,

a signal processor coupled to the signal emitter and the signal receiver, wherein the signal processor is configured to determine a Doppler shift of the second signal relative to the first signal, and

a determination device configured to determine the blade clearance based on the first frequency, the Doppler shift, the observer location, and the rotor blade velocity utilizing a mathematical model.

7. The system according to the preceding claim, wherein the determination device comprises a memory unit storing a data array computed using the mathematical model, and wherein the determination device is configured to determine the blade clearance by performing a lookup in the data array.

8. The system according to claim 6 or 7, wherein the determination device further comprises a velocity calculation unit configured to calculate a relative blade velocity based on the blade velocity and the observer location.

9. The system according to claim 7 and 8, wherein the data array comprises a blade clearance value for each of a plurality of combinations of first frequency values, Doppler shift values and relative blade velocity values.

10. The system according to any of claims 6 to 9, wherein the signal emitter and the signal receiver are comprised by a leaky feeder arrangement.

5

11. The system according to the preceding claim, wherein the leaky feeder arrangement comprises at least one leaky feeder forming a loop shape around the tower of the wind turbine.

10 12. The system according to the preceding claim, wherein the at least one leaky feeder is a leaky coaxial cable or a leaky waveguide.

13. A wind turbine comprising a tower and a least one rotor
15 blade, the wind turbine further comprising a system according to any of claims 6 to 12 for determining the blade clearance during operation.

14. The wind turbine according to the preceding claim,
20 wherein the observer location is positioned on a loop shape extending around a circumference of the tower.

FIG 1

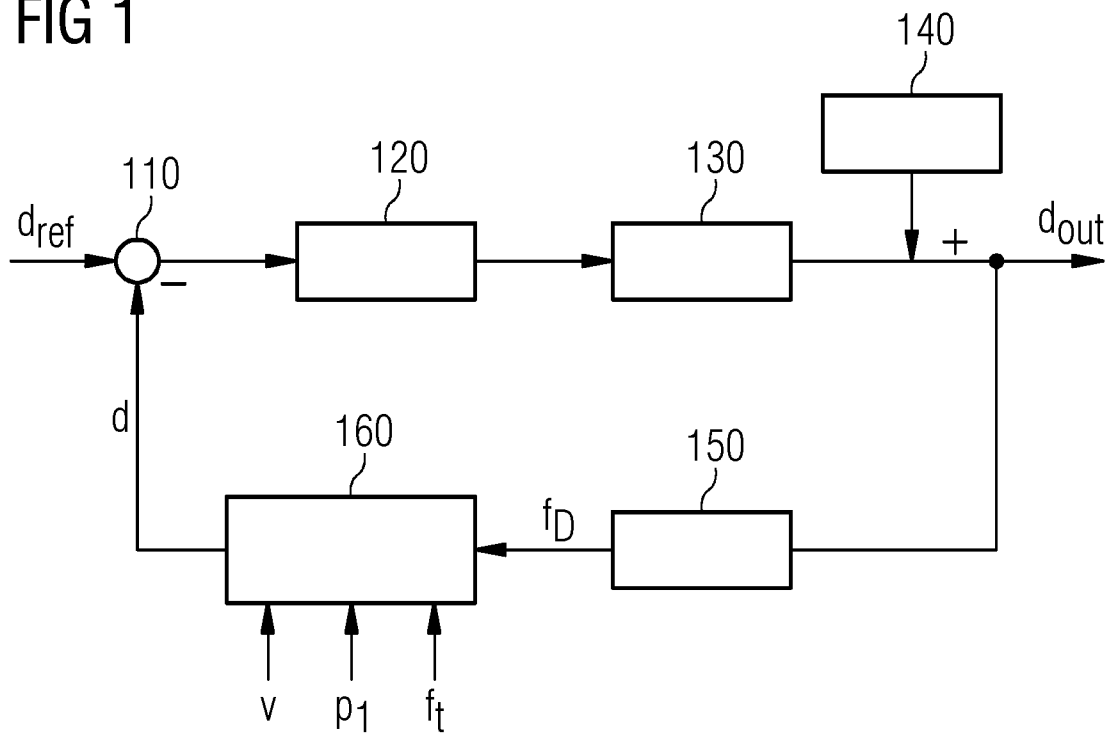


FIG 2


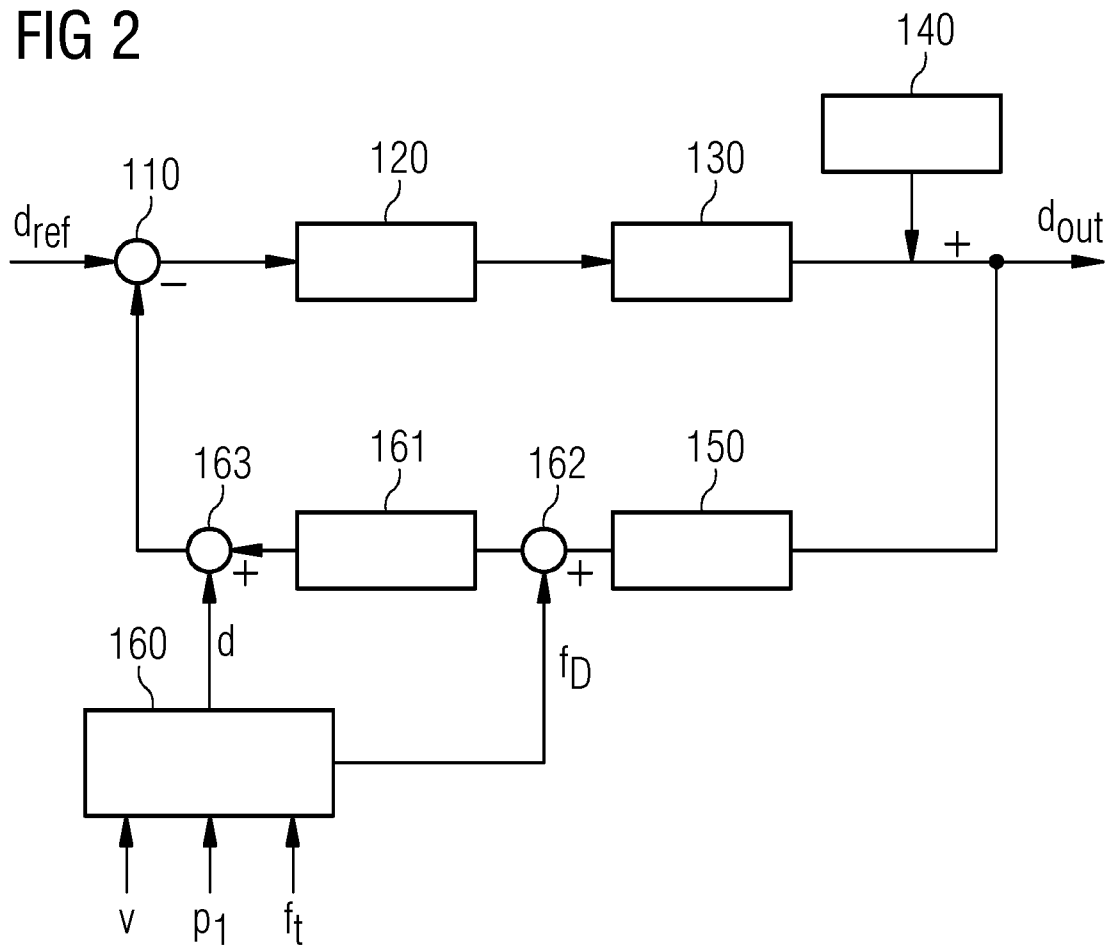


FIG 3

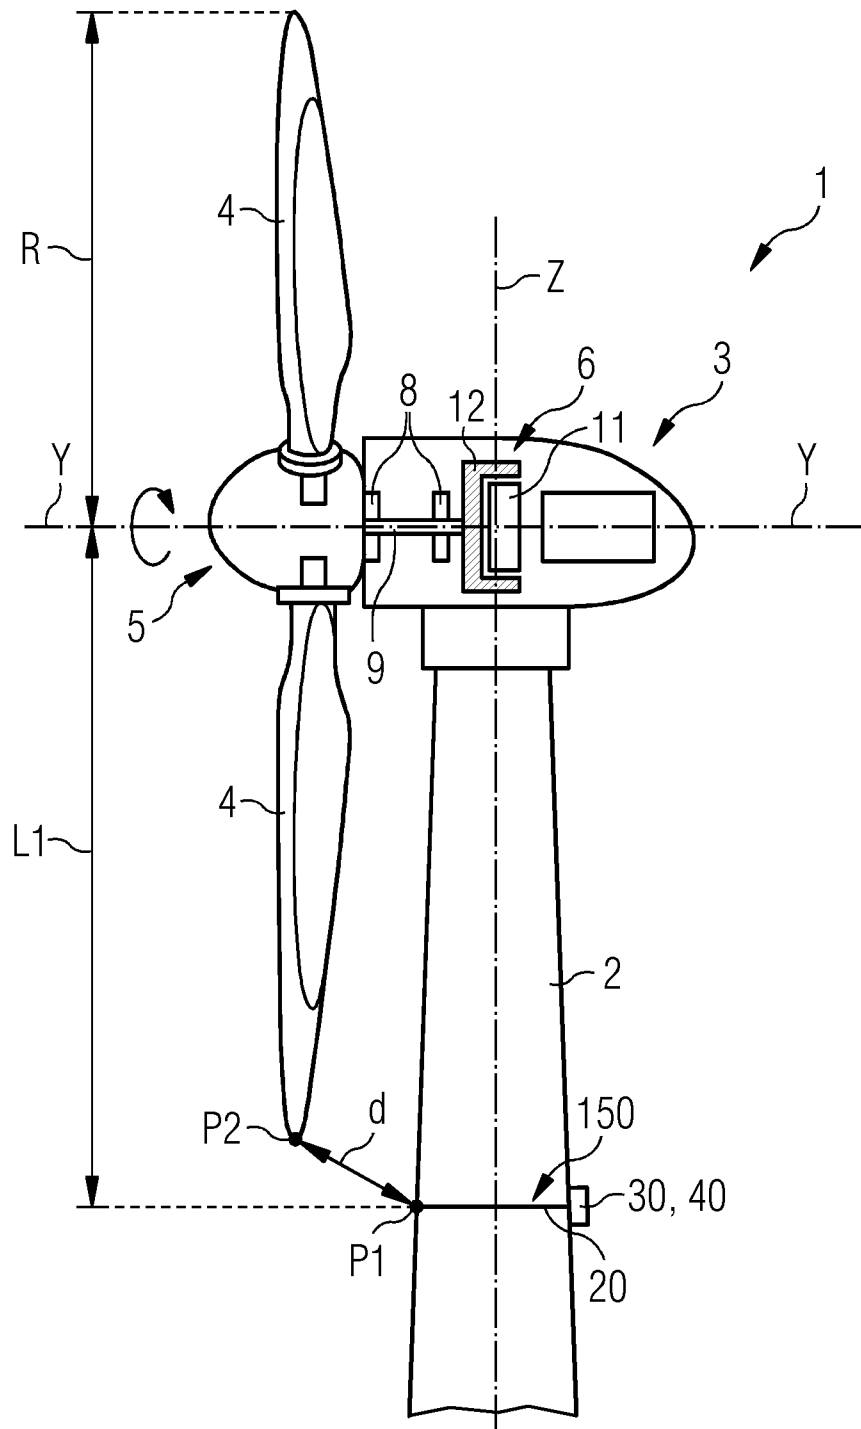

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2020/057067

A. CLASSIFICATION OF SUBJECT MATTER
INV. F03D7/02 F03D17/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
F03D H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/101930 A1 (BOSCHE JOHN V [US]) 1 May 2008 (2008-05-01)	1-4,6-9, 13,14
Y	paragraphs [0013] - [0026] figures	5,10-12
Y	----- WO 2012/032916 A1 (HITACHI INT ELECTRIC INC [JP]; SHIBAHARA MICHITERU [JP] ET AL.) 15 March 2012 (2012-03-15) paragraph [0030]	5,10-12
A	----- EP 2 598 750 A2 (VESTAS WIND SYS AS [DK]) 5 June 2013 (2013-06-05) abstract figures	1-14
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 May 2020

Date of mailing of the international search report

15/06/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Rini, Pietro

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2020/057067

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2011/135466 A1 (LATORRE CARLOS EDUARDO [US] ET AL) 9 June 2011 (2011-06-09) abstract figures -----	1-14
A	US 2014/278151 A1 (NEWMAN JOHN W [US]) 18 September 2014 (2014-09-18) abstract figures -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2020/057067

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008101930	A1	01-05-2008	NONE
WO 2012032916	A1	15-03-2012	CN 203301595 U 20-11-2013 JP 2012080524 A 19-04-2012 WO 2012032916 A1 15-03-2012
EP 2598750	A2	05-06-2013	CN 103038502 A 10-04-2013 DK 2598750 T3 12-09-2016 EP 2598750 A2 05-06-2013 ES 2592939 T3 02-12-2016 GB 2482661 A 15-02-2012 US 2013189102 A1 25-07-2013 WO 2012013195 A2 02-02-2012
US 2011135466	A1	09-06-2011	CN 102141004 A 03-08-2011 EP 2345943 A1 20-07-2011 US 2011135466 A1 09-06-2011
US 2014278151	A1	18-09-2014	BR 112015023102 A2 18-07-2017 EP 2984337 A1 17-02-2016 ES 2668451 T3 18-05-2018 JP 6284168 B2 28-02-2018 JP 6635441 B2 22-01-2020 JP 2016519292 A 30-06-2016 JP 2018105872 A 05-07-2018 US 2014278151 A1 18-09-2014 WO 2014145423 A1 18-09-2014