




(86) Date de dépôt PCT/PCT Filing Date: 2011/07/11
(87) Date publication PCT/PCT Publication Date: 2012/03/22
(45) Date de délivrance/Issue Date: 2019/10/01
(85) Entrée phase nationale/National Entry: 2013/02/27
(86) N° demande PCT/PCT Application No.: US 2011/043552
(87) N° publication PCT/PCT Publication No.: 2012/036781
(30) Priorité/Priority: 2010/09/17 (US12/885,083)

(51) Cl.Int./Int.Cl. *F24F 3/14* (2006.01),
F24F 7/00 (2006.01), *F28F 1/20* (2006.01),
F28F 9/02 (2006.01), *F28F 9/24* (2006.01)
(72) Inventeurs/Inventors:
BUGLER, THOMAS, W. III, US;
VADDER, DAVEY J., US
(73) Propriétaire/Owner:
EVAPCO, INC., US
(74) Agent: NELLIGAN O'BRIEN PAYNE LLP

(54) Titre : APPAREIL A ECHANGEUR DE CHALEUR HYBRIDE ET PROCEDES POUR SON EXPLOITATION
(54) Title: HYBRID HEAT EXCHANGER APPARATUS AND METHODS OF OPERATING THE SAME

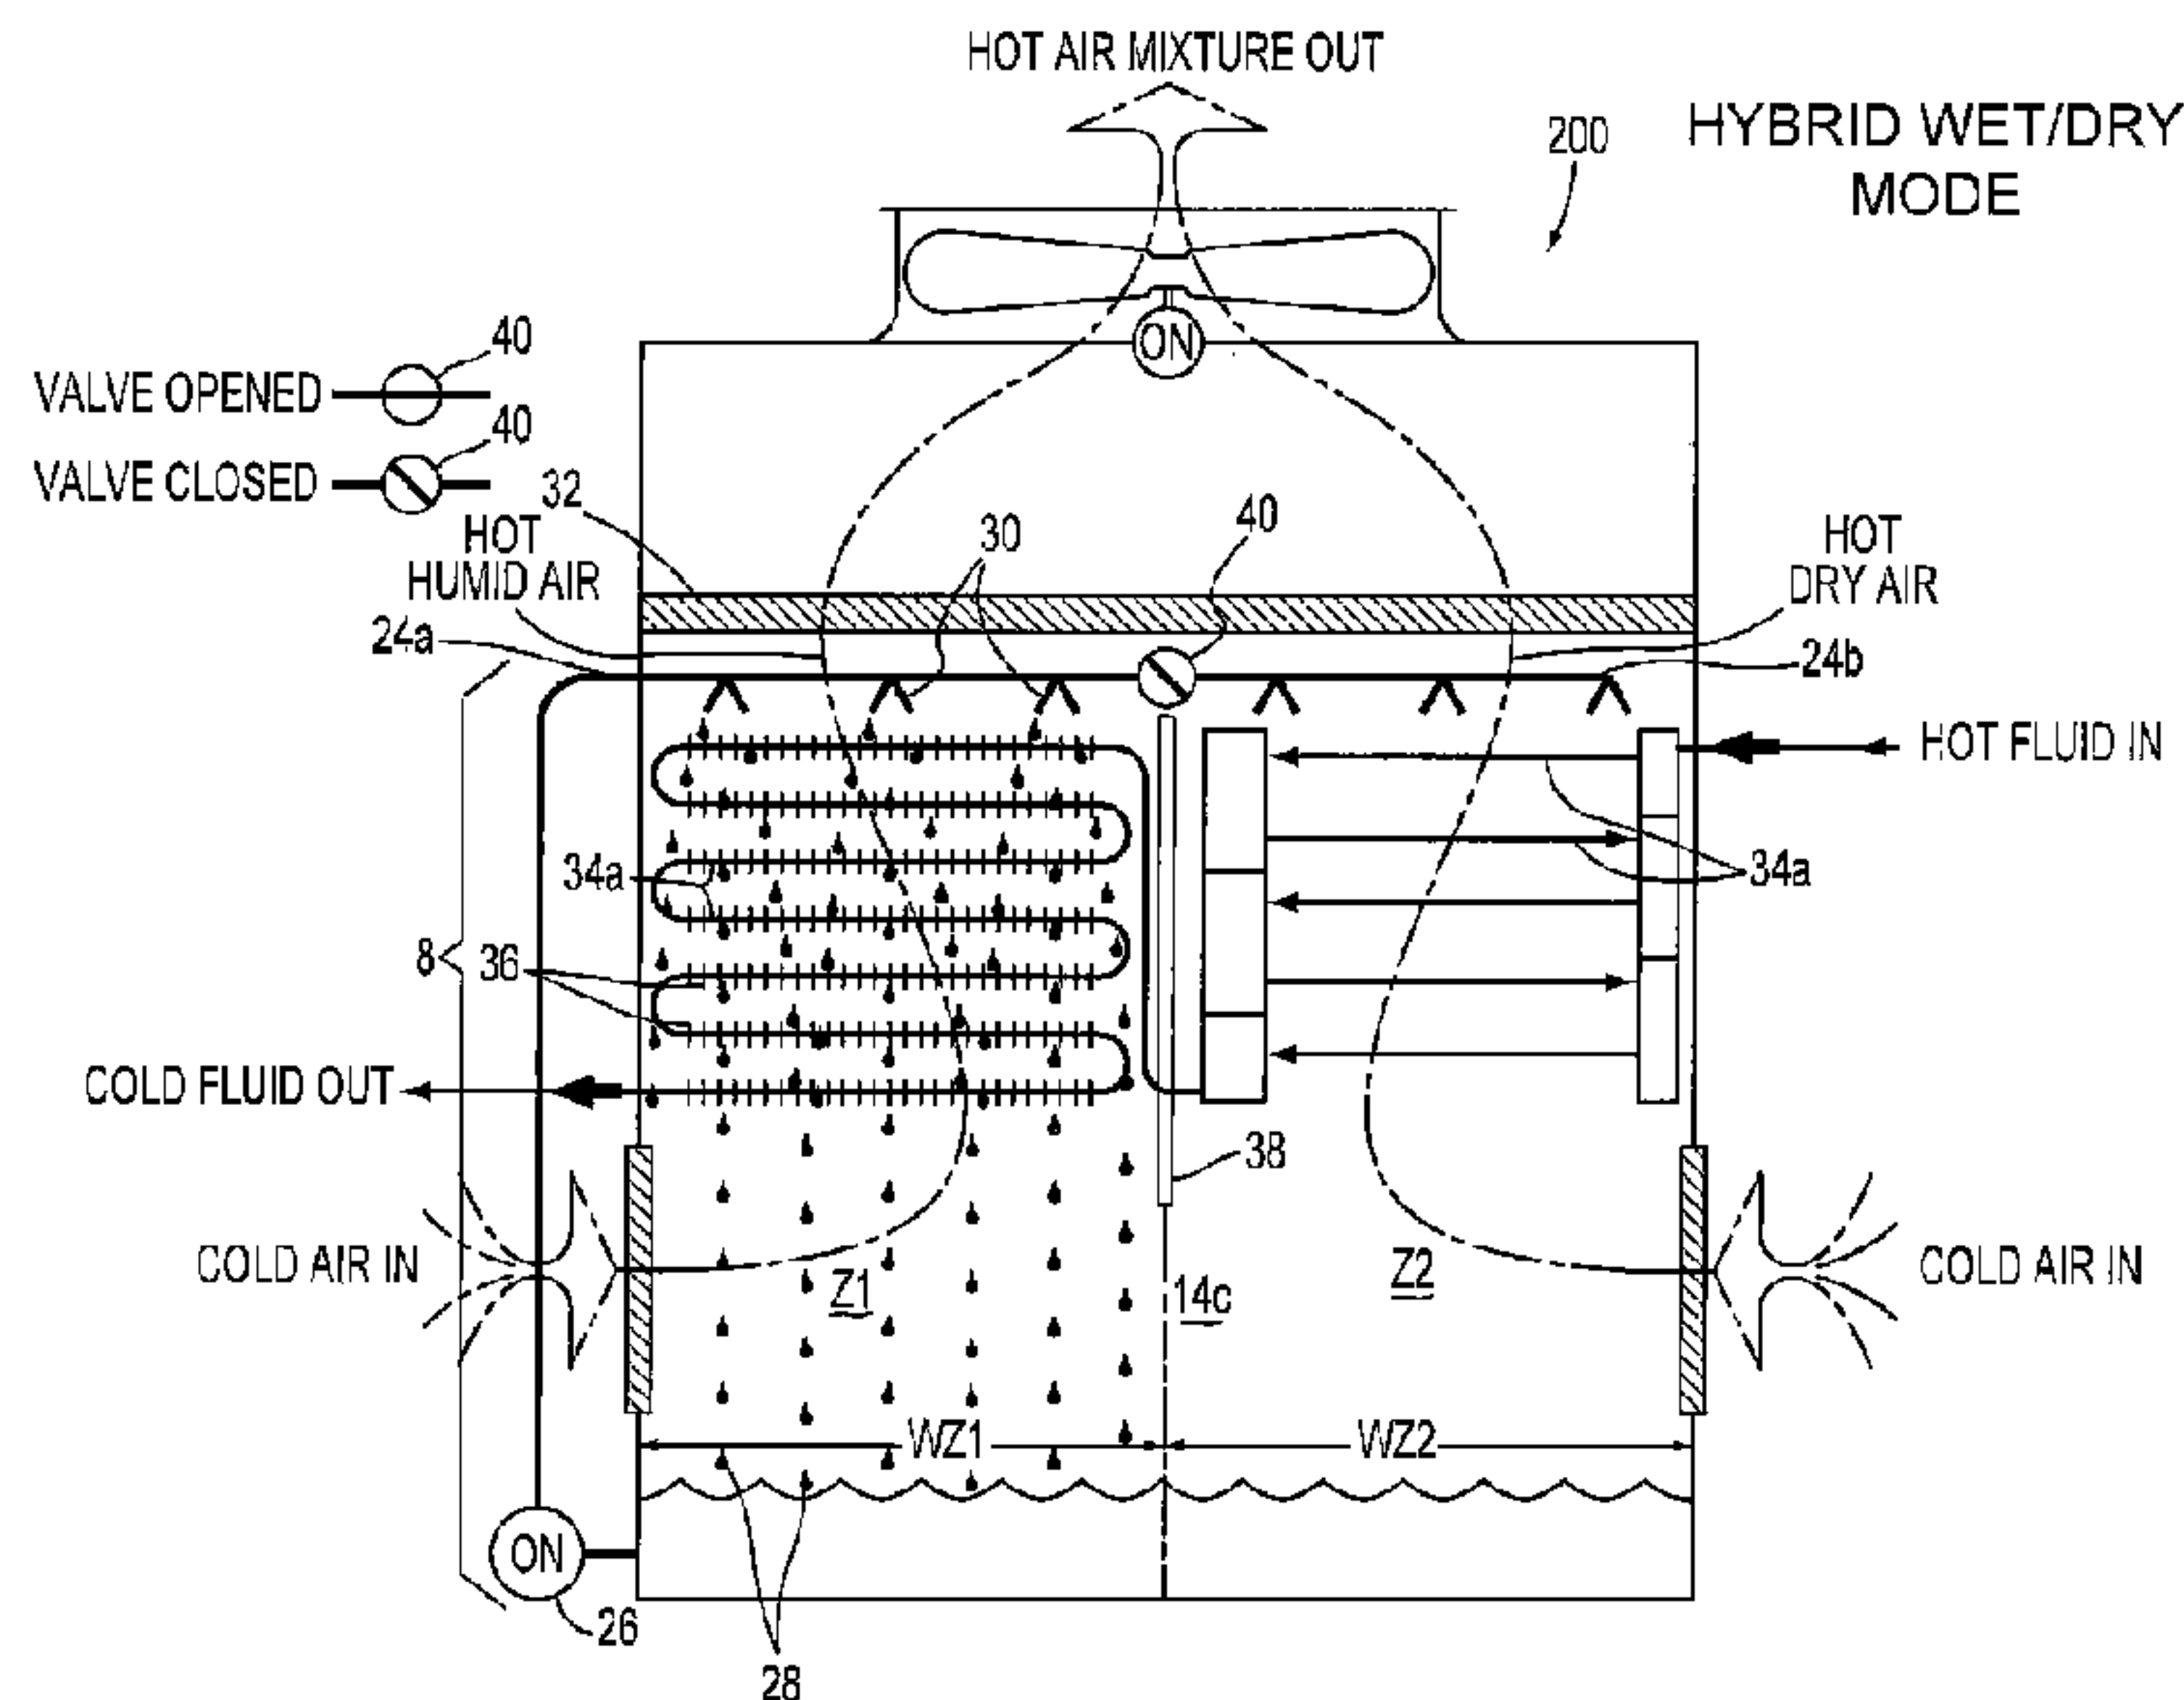

(57) **Abrégé/Abstract:**

A hybrid heat exchanger apparatus having a heat exchanger device with a hot fluid flowing therethrough includes a cooling water distribution system and an air flow mechanism for causing ambient air to flow across the heat exchanger device. The cooling water distribution system distributes evaporative cooling water onto the heat exchanger device to wet only a portion of the heat exchanger device while allowing a remaining portion of the heat exchanger device to be dry. The air flow mechanism causes ambient air to flow across the heat exchanger device to generate hot humid air from the ambient air flowing across the wet portion of the heat exchanger device and hot dry air from the ambient air flowing across the remaining dry portion of the heat exchanger device. Methods are also described.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2012 (22.03.2012)

(10) International Publication Number
WO 2012/036781 A2

(51) International Patent Classification:

F24F 7/00 (2006.01) *F28F 1/20* (2006.01)
F24F 3/14 (2006.01) *F28F 9/24* (2006.01)
F28F 9/02 (2006.01)

(21) International Application Number:

PCT/US2011/043552

(22) International Filing Date:

11 July 2011 (11.07.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/885,083 17 September 2010 (17.09.2010) US

(71) Applicant (for all designated States except US): **EVAP-CO, INC.** [US/US]; 5151 Allendale Lane, Taneytown, MD 21787 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BUGLER, Thomas, W., III** [US/US]; c/o Evapco, Inc., 5151 Allendale Lane, Taneytown, MD 21787 (US). **VADDER, Davey, J.** [US/US]; c/o Evapco, Inc., 5151 Allendale Lane, Taneytown, MD 21787 (US).

(74) Agent: **SCHAUKOWITCH, Carl**; Rader, Fishman & Grauer PLLC, 1233 20th Street, N.W., Suite 501, Washington, DC 20036 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: HYBRID HEAT EXCHANGER APPARATUS AND METHODS OF OPERATING THE SAME

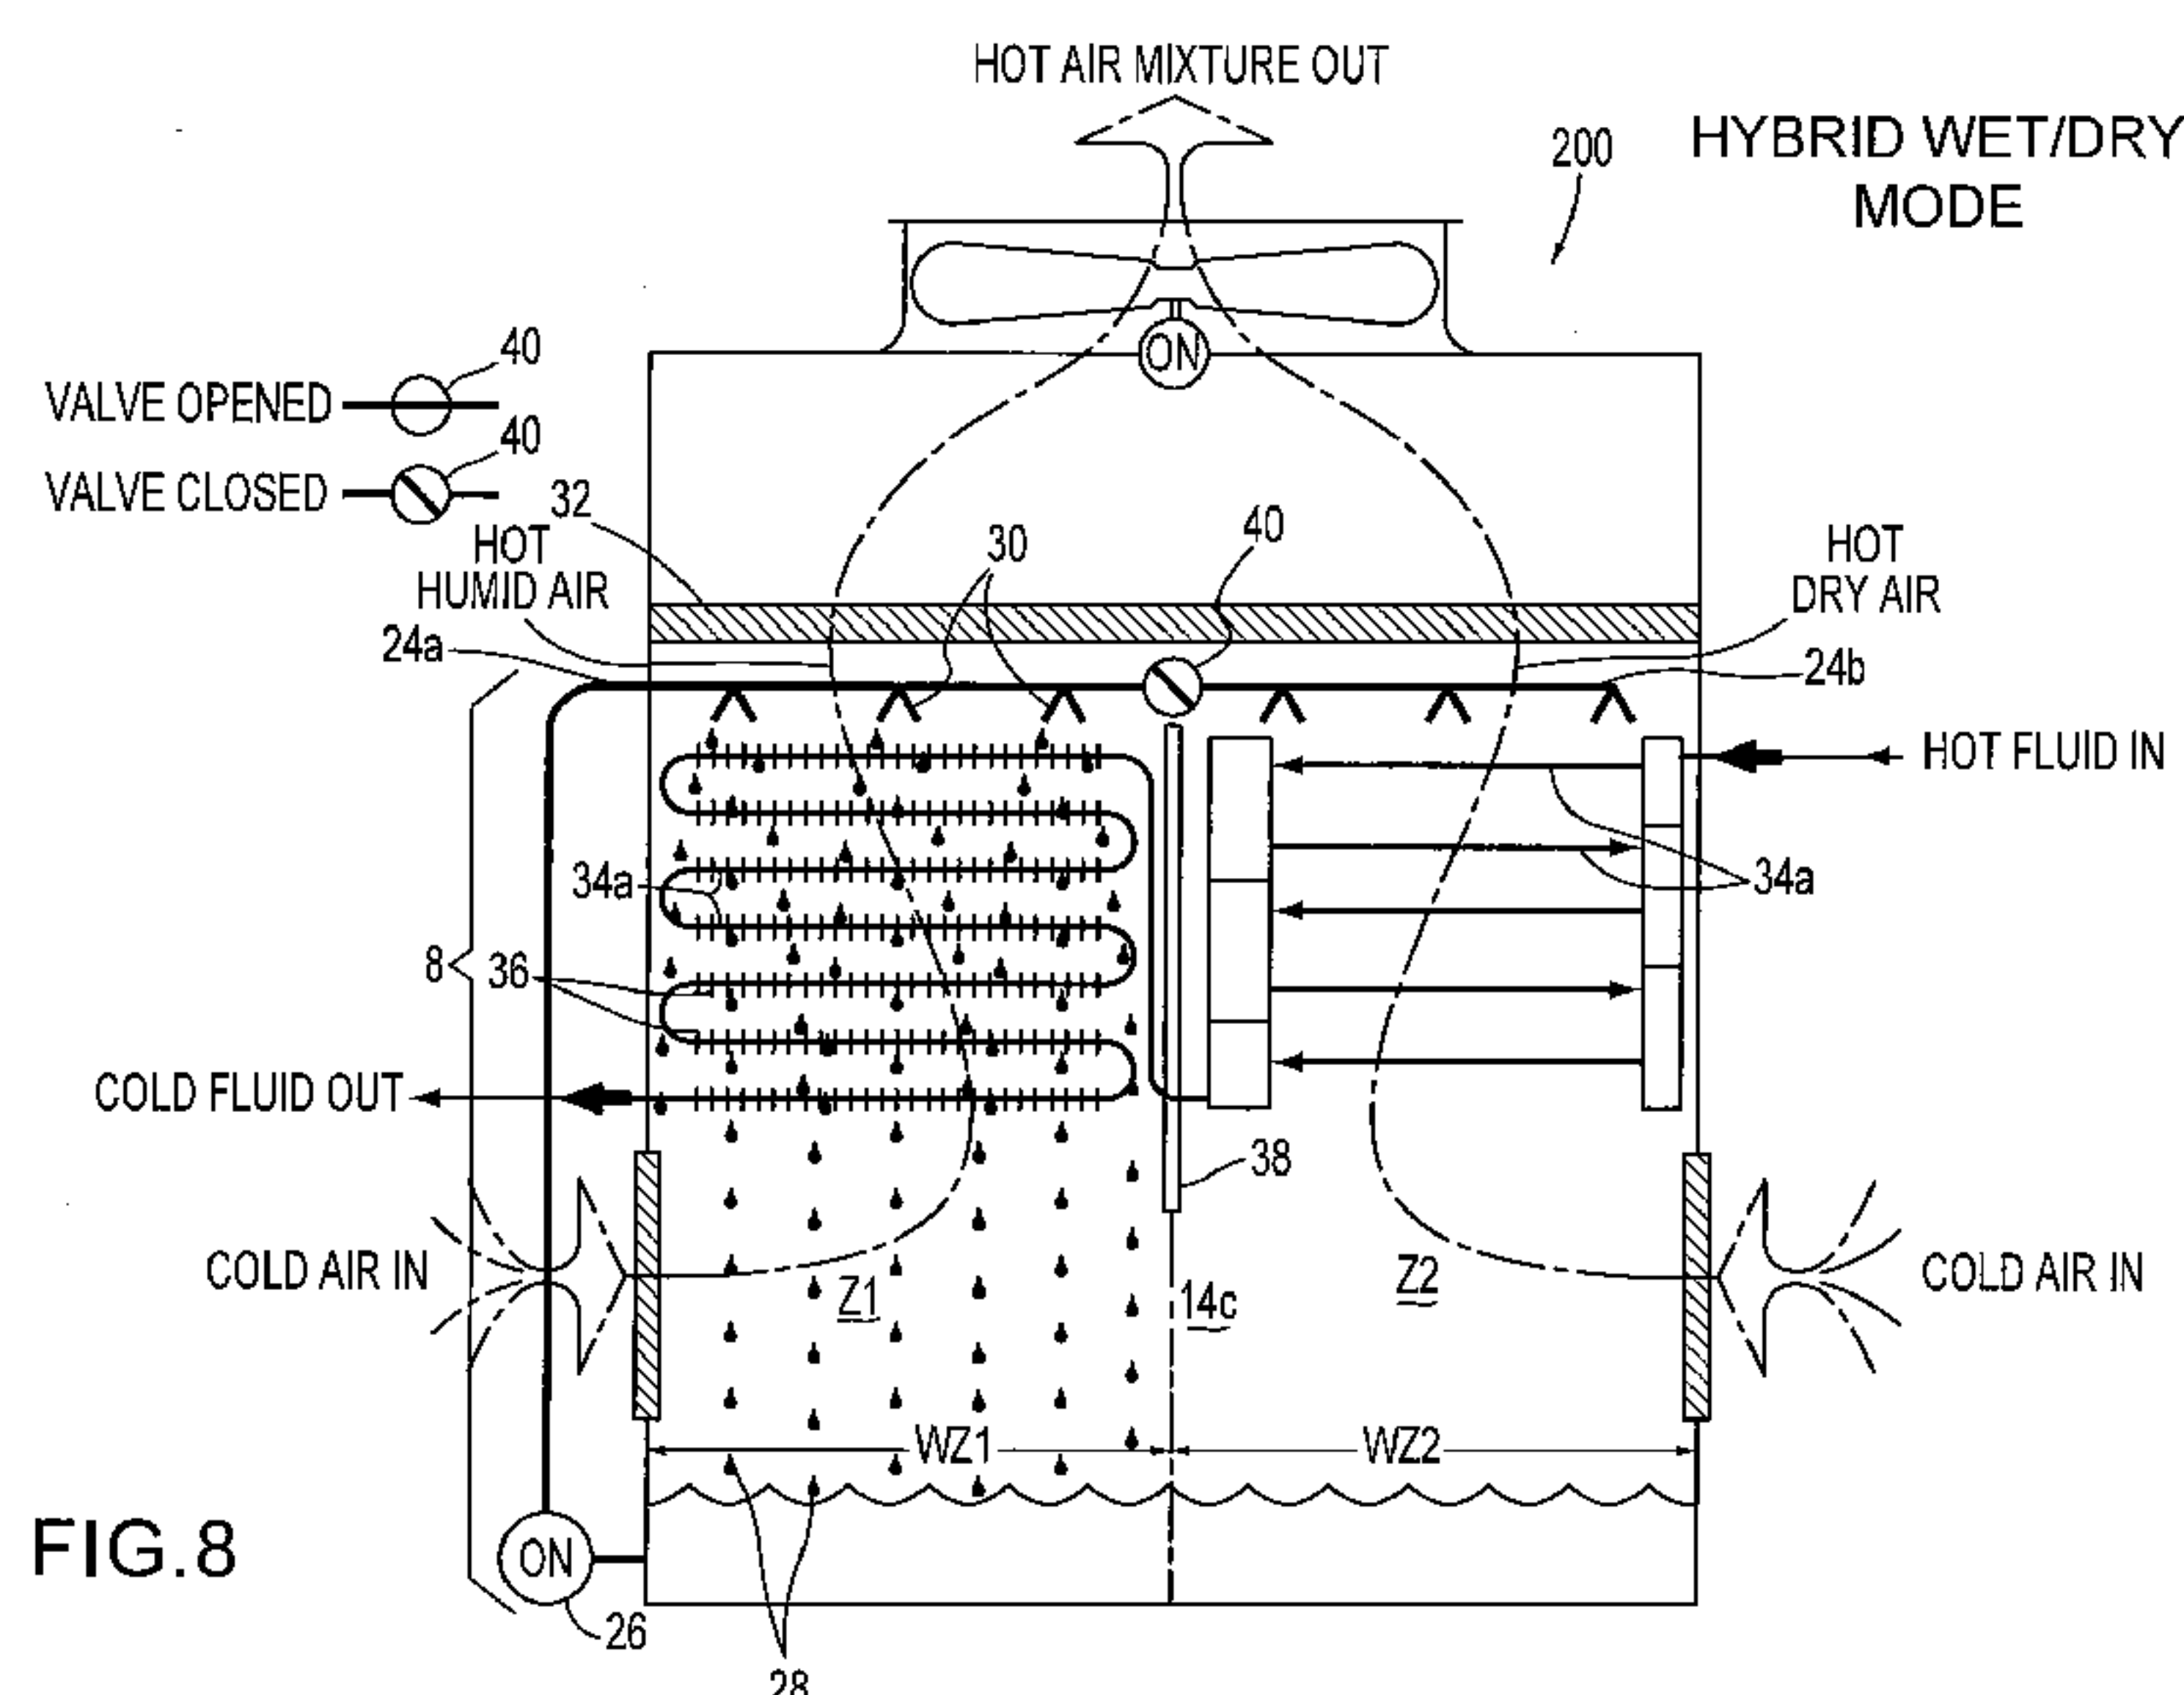

(57) Abstract: A hybrid heat exchanger apparatus having a heat exchanger device with a hot fluid flowing therethrough includes a cooling water distribution system and an air flow mechanism for causing ambient air to flow across the heat exchanger device. The cooling water distribution system distributes evaporative cooling water onto the heat exchanger device to wet only a portion of the heat exchanger device while allowing a remaining portion of the heat exchanger device to be dry. The air flow mechanism causes ambient air to flow across the heat exchanger device to generate hot humid air from the ambient air flowing across the wet portion of the heat exchanger device and hot dry air from the ambient air flowing across the remaining dry portion of the heat exchanger device. Methods are also described.

HYBRID HEAT EXCHANGER APPARATUS AND METHOD OF OPERATING THE SAME

FIELD OF THE INVENTION

The present invention relates to a hybrid heat exchanger apparatus. More particularly, the present invention is directed to a hybrid heat exchanger apparatus that operates in a dry mode, a wet mode and a hybrid wet/dry mode in order to conserve water and, possibly, abate plume.

BACKGROUND OF THE INVENTION

Heat exchangers are well known in the art. By way of example, a conventional heat exchanger 2, sometimes referred to as a “closed-circuit cooler”, is diagrammatically illustrated in Figures 1 and 2. The heat exchanger 2 includes a container 4, a heat exchanger device 6, a cooling water distribution system 8, an air flow mechanism such as a fan assembly 10 as illustrated and a controller 12. The container 4 has a top wall 4a, a bottom wall 4b and a plurality of side walls 4c. The plurality of side walls 4c are connected to each other and connected to the top wall 4a and the bottom wall 4b to form a generally box-shaped chamber 14. The chamber 14 has a water basin chamber portion 14a, an exit chamber portion 14b and a central chamber portion 14c. The water basin portion 14a is defined by the bottom wall 4b and lower portions of the side walls 4c. The water basin portion 14a contains evaporative cooling water CW. The exit chamber portion 14b is defined by the top wall 4a and upper portions of the side walls 4c. The central chamber portion 14c is defined between and among central portions of the connected side walls 4c and is positioned between the water basin chamber portion 14a and the exit chamber portion 14b. The top wall 4a is formed with an air outlet 16. The air outlet 16 is in fluid communication with the exit chamber portion 14b. Also, for this particular conventional heat exchanger 2, each one of the side walls 4c is formed with an air inlet 18 in communication with the central chamber portion 14c. A plurality of louver modules 20 are mounted to the side walls 4c in the respective the air inlets 18. The plurality of louver modules 20 are disposed adjacent to and above the water basin chamber portion 14a and are operative to

permit ambient air, represented as Cold Air IN arrows, to enter into the central chamber portion 14c.

The heat exchanger device 6 is disposed in and extends across the central chamber portion 14c adjacent to and below the exit chamber portion 14b. The heat exchanger device 6 is operative to convey a hot fluid, represented as a Hot Fluid IN arrow, therethrough from a hot fluid source 22. It would be appreciated by a skilled artisan that the hot fluid could be water, a refrigerant, steam or such other gaseous or liquid fluid known in the art to be cooled by a heat exchanger device. The Hot Fluid IN exits the heat exchanger device 6 as cold fluid, represented as a Cold Fluid OUT arrow. Although a single heat exchanger device 6 can be used in any conventional heat exchanger 2, this heat exchanger device 6 includes a conventional first heat exchanger component 6a and a conventional second heat exchanger component 6b juxtaposed and in fluid communication with the first heat exchanger component 6a. Also, in the alternative, a conventional heat exchanger 2 might have a heat exchanger device 6 with a first heat exchanger component 6b and a second heat exchanger component 6b that are fluidically isolated from one another. A connector pipe 22 interconnects the first and second heat exchanger components 6a and 6b so that the first heat exchanger component 6a and the second heat exchanger component 6b are in serial fluid communication with one another. However, the first heat exchanger component 6a and the second heat exchanger component 6b can be connected in parallel fluid communication with one another or, alternatively, the first heat exchanger component 6a and the second heat exchanger component 6b can be disconnected from one another and are then considered in fluid isolation from one another.

As shown in Figures 1 and 2, both the first and second heat exchanger components 6a and 6b are tube structures. The first heat exchanger device 6a is a single, continuous tube 34 having a serpentine configuration with straight tube sections 34a having a plurality of fins 36 depicted by the vertical dashes. The tube structure of the second heat exchanger device 6b includes a plurality of straight bare tube sections 34a, i.e, tube sections without fins, in a straight-through configuration that interconnect an inlet header box 44a and a outlet header box 44b.

The cooling water distribution system 8 includes a water distribution manifold 24 that extends across the central chamber portion 14c and is disposed above and adjacent to the heat exchanger device 6. In a Pump ON state, a pump 26 is operative for pumping the evaporative cooling water CW from the water basin chamber portion 14a to and through the water

distribution manifold 24. Thus, the evaporative cooling water CW is distributed onto the heat exchanger device 6 as represented by the water droplets 28 in Figure 2. When the water droplets 28 rain downwardly onto the heat exchanger device 6 and into the water basin chamber portion 14a, the conventional heat exchanger 2 is in a WET mode as illustrated in Figure 2. Correspondingly, with the pump is in a Pump OFF state, no water droplets 28 rain downwardly and, thus, the heat exchanger 2 is in a DRY mode as illustrated in Figure 1.

As illustrated in Figures 1 and 2, the cooling water distribution system 8 includes a plurality of spray nozzles 30. The spray nozzles 30 are connected to and are in fluid communication with the water distribution manifold 24 so that the pump 26 pumps the evaporative cooling water CW to the water distribution manifold 24 and through the spray nozzles 30. However, one of ordinary skill in the art would appreciate that in lieu of spray nozzles 30, the cooling water distribution system 8 might include a weir arrangement, a drip arrangement or some other cooling water distribution arrangement known in the art.

Furthermore, in Figures 1 and 2, the heat exchanger 2 includes an eliminator structure 32 that extends across the chamber 14 and is disposed between the water distribution manifold 24 and the air outlet 16. The eliminator structure 32 is positioned in a manner such that the exit chamber portion 14b of the chamber 14 is disposed above the eliminator structure 32 and the central chamber portion 14c of the chamber 14 is disposed below the eliminator structure 32.

In a Fan ON state shown in both Figures 1 and 2, the fan assembly 10 is operative for causing the ambient air represented by the Cold Air IN arrows to flow through the heat exchanger 2 from the air inlet 18, across the heat exchanger device 6 and the water distribution manifold 24 and through the air outlet 16. Shown in Figure 1, in the DRY mode, hot dry air represented by the Hot Dry Air Out arrow flows out of the air outlet 16. Shown in Figure 2, in the WET mode, hot humid air represented by Hot Humid Air Out arrow flows out of the air outlet 16. As known in the art, the fan assembly 10 shown in Figures 1 and 2 is an induced draft system to induce the ambient air to flow through the container 4 as illustrated.

The controller 12 is operative to selectively energize or de-energize the cooling water distribution system 8 and the fan assembly 10 by automatically or manually switching the cooling water distribution system 8 and the fan assembly 10 between their respective ON states and an OFF states in order to cause the heat exchanger 2 to operate in either the WET mode or the DRY mode. The controller 12 might be an electro-mechanical device, a software-operated

electronic device or even a human operator. In Figure 1, for the heat exchanger 2 to be in the DRY mode, the controller 12 switches the fan assembly 10 to the Fan ON state and switches the pump 26 to the Pump OFF state. In Figure 2, for the heat exchanger 2 to be in the WET mode, the controller 12 switches the fan assembly 10 to the Fan ON state and switches the pump 26 to the Pump ON state. More particularly, in the WET mode, both the fan assembly 10 and the cooling water distribution system 8 are energized resulting in the ambient air (Cold Air IN arrows) flowing through the heat exchanger device 6 and the evaporative cooling water CW being distributed onto and across the heat exchanger device 6 to generate the hot humid air (Hot Humid Air OUT arrow in Figure 2) that exits through the air outlet 16. And, in the DRY mode, only the fan assembly 10 is energized while the cooling water distribution system 8 is de-energized resulting in the ambient air (Cold Air IN arrows) flowing across the heat exchanger device 6, without the evaporative cooling water CW being distributed onto and across the heat exchanger device 6, to generate hot dry air (Hot Dry Air OUT arrow in Figure 1) that subsequently exits through the air outlet 16.

Typically, during the summer months, the heat exchanger 2 operates in the WET mode and, during the winter months, the heat exchanger 2 operates in the DRY mode. Sometimes, during the spring and fall months, the ambient conditions cause the hot humid air that exits the heat exchanger to condense, thereby forming a visible plume P of water condensate. The general public sometimes mistakenly perceive this visible plume P of water condensate as air-polluting smoke. Also, some people, who know that this plume P is merely water condensate, believe that the minute water droplets that constitute the visible plume P might contain disease-causing bacteria. As a result, a heat exchanger that spews a visible plume P of water condensate is undesirable.

There are two limitations on heat exchangers that the present invention addresses. First, particularly in cold climates, closed circuit coolers can emit plume when the warm, humid air being discharged from the unit meets the cold, dry air in the ambient environment. The general public sometimes mistakenly perceives this visible plume of water condensate as air-polluting smoke. Second, water is considered to be a scarce and valuable resource in certain regions. In certain aspects of the present invention, there is an increased capacity to perform the cooling functions in a DRY mode, where little or no water is needed to achieve the cooling function.

A skilled artisan would appreciate that the diagrammatical views provided herein are representative drawing figures that represent either a single heat exchanger as described herein or a bank of heat exchangers.

It would be beneficial to provide a heat exchanger that conserves water. It would also be beneficial to provide a heat exchanger apparatus that might also inhibit the formation of a plume of water condensate. The present invention provides these benefits.

OBJECTS AND SUMMARY OF THE INVENTION

It is an object of the invention to provide a hybrid heat exchanger apparatus that might inhibit the formation of a plume of water condensate when ambient conditions are optimal for formation of the same.

It is another object of the invention to provide a hybrid heat exchanger apparatus that conserves water by enhanced dry cooling capabilities.

Accordingly, a hybrid heat exchanger apparatus of the present invention is hereinafter described. The hybrid heat exchanger apparatus includes a heat exchanger device with a hot fluid flowing through it, a cooling water distribution system and an air flow mechanism such as a fan assembly for causing ambient air to flow across the heat exchanger device. The cooling water distribution system distributes evaporative cooling water onto the heat exchanger device in a manner to wet only a portion of the heat exchanger device while allowing a remaining dry portion of the heat exchanger device. The remaining dry portion of the heat exchanger enables cooling in a non-evaporative manner. The air flow mechanism causes ambient air to flow across the heat exchanger device to generate hot humid air from the ambient air flowing across the wet portion of the heat exchanger device and hot dry air from the ambient air flowing across the remaining dry portion of the heat exchanger device. One aspect of the present invention mixes the hot humid air and the hot dry air together to form a hot air mixture thereof to abate plume if the appropriate ambient atmospheric conditions are present. Another aspect of the present invention isolates the hot humid air and the hot dry air from one another and, therefore, does not necessarily abate plume.

A method of the present invention inhibits formation of a water-based condensate from a heat exchanger apparatus having a cooling water distribution system and a heat exchanger device with a hot fluid flowing therethrough. The method includes the steps of:

distributing evaporative cooling water from the cooling water distribution system onto the heat exchanger device in a manner to wet a portion of the heat exchanger device while allowing a remaining portion of the heat exchanger device to be dry;

causing ambient air to flow across the heat exchanger device to generate hot humid air from the ambient air flowing across the wet portion of the heat exchanger device and hot dry air from the ambient air flowing across the remaining dry portion of the heat exchanger device; and

mixing the hot humid air and the hot dry air together to form a hot air mixture thereof.

These objects and other advantages of the present invention will be better appreciated in view of the detailed description of the exemplary embodiments of the present invention with reference to the accompanying drawings, in which:

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic diagram of a conventional heat exchanger operating in a dry mode.

Figure 2 is a schematic diagram of a conventional heat exchanger operating in a wet mode.

Figure 3 is a schematic diagram of a first exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the dry mode.

Figure 4 is a schematic diagram of the first exemplary embodiment of the hybrid heat exchanger apparatus of the present invention operating in the wet mode.

Figure 5 is a schematic diagram of the first exemplary embodiment of the hybrid heat exchanger apparatus of the present invention operating in a hybrid wet/dry mode.

Figure 6 is a schematic diagram of a second exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the dry mode.

Figure 7 is a schematic diagram of the second exemplary embodiment of the hybrid heat exchanger apparatus of the present invention operating in the wet mode.

Figure 8 is a schematic diagram of the second exemplary embodiment of the hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 9 is a schematic diagram of a third exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the dry mode.

Figure 10 is a schematic diagram of the third exemplary embodiment of the hybrid heat exchanger apparatus of the present invention operating in the wet mode.

Figure 11 is a schematic diagram of the third exemplary embodiment of the hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 12 is a schematic diagram of a fourth exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 13 is a schematic diagram of a fifth third exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 14 is a schematic diagram of a sixth exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 15 is a schematic diagram of a seventh exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 16 is a schematic diagram of an eighth exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 17 is a flow diagram of a method of operating the hybrid heat exchanger apparatus of the first through eighth exemplary embodiments of the present invention.

Figure 18 is a schematic diagram of a ninth exemplary embodiment of a hybrid heat exchanger apparatus of the present invention operating in the hybrid wet/dry mode.

Figure 19 is a flow diagram of a method of operating the hybrid heat exchanger apparatus of the ninth exemplary embodiment of the present invention in Figure 18.

DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

Hereinafter, exemplary embodiments of the present invention will be described with reference to the attached drawing figures. The structural components common to those of the prior art and the structural components common to respective embodiments of the present invention will be represented by the same symbols and repeated description thereof will be omitted. Furthermore, terms such as “cold”, “hot”, “humid”, “dry”, “cooling” and the like shall be construed as relative terms only as would be appreciated by a skilled artisan and shall not be construed in any limiting manner whatsoever.

A first exemplary embodiment of a hybrid heat exchanger apparatus 100 of the present invention is hereinafter described with reference to Figures 3-5. As shown in Figures 3-5, the hybrid heat exchanger apparatus 100 includes a first cooling water distribution system 8a and a second cooling water distribution system 8b. The first cooling water distribution system 8a has a first water distribution manifold 24a that extends partially across the central chamber portion 14c and is disposed above and adjacent to the first heat exchanger component 6a. The first cooling water distribution system 8a also has a first pump 26a that is operative for pumping the evaporative cooling water CW from the water basin chamber portion 14a to and through the first water distribution manifold 24a. As a result, the spray nozzles 30a spray the evaporative cooling water CW thereby the evaporative cooling water CW is distributed onto the first heat exchanger component 6a. Correspondingly, the second cooling water distribution system 8b has a second water distribution manifold 24b that extends partially across the central chamber portion 14c and is disposed above and adjacent to the second heat exchanger component 6b. The second cooling water distribution system 8b also has a second pump 26b that is operative for pumping the evaporative cooling water CW from the water basin chamber portion 14a to and through the water distribution manifold 24a. As a result, the evaporative cooling water CW is sprayed from the spray nozzles 30b and thus the evaporative cooling water CW is distributed onto the second heat exchanger component 6b. Note that the first and second cooling water distribution systems 8a and 8b operate independently of one another and, other than pumping evaporative cooling water CW from the water basin chamber portion 14a, are otherwise considered in fluid isolation from one another. Also, the first pump 26a and the first water distribution manifold 24a are in selective fluid communication with one another and the second pump 26b and the second water distribution manifold 24b are in selective fluid communication with one another.

A controller (not shown but illustrated for example purposes in Figures 1 and 2) is operative for causing the hybrid heat exchanger apparatus 100 to operate in either a DRY mode as illustrated in Figure 3, a WET mode as illustrated in Figure 4 and a HYBRID WET/DRY mode as illustrated in Figure 5. For sake of clarity of the drawing figures, the controller was intentionally not illustrated because one of ordinary skill in the art would appreciate that a controller can automatically change the ON and OFF states of the pumps 26a and 26b and the fan assembly 10. Alternatively, one of ordinary skill in the art would appreciate that the controller might be a human operator who can manually change the ON and OFF states of the

pumps 26a and 26b and the fan assembly 10. As a result, rather than illustrating a controller, the ON and OFF states of the pumps 26a and 26b and the fan assembly 10 are illustrated.

In the DRY mode illustrated in Figure 3, only the fan assembly 10 is energized in the ON state while both of the cooling water distribution systems 8a and 8b are de-energized, i.e., in the OFF states. As a result, the ambient air represented as the Cold Air IN arrows flows across the first heat exchanger component 6a and the second heat exchanger component 6b device without the evaporative cooling water CW being distributed onto and across the first and second heat exchanger components 6a and 6b. In this manner, hot dry air represented as the Hot Dry Air OUT arrow is generated that subsequently exits through the air outlet 16.

In the WET mode illustrated in Figure 4, the fan assembly 10 and both of the cooling water distribution systems 8a and 8b are energized in their respective ON states. As a result, the ambient air represented as the Cold Air IN arrows flows across respective ones of the first heat exchanger component 6a and the second heat exchanger component 6b and the evaporative cooling water CW is distributed onto and across the first and second heat exchanger components 6a and 6b to generate hot humid air as represented as the Hot Humid Air OUT arrow that subsequently exits through the air outlet 16.

In the HYBRID WET/DRY mode, the fan assembly 10 and the cooling water distribution system 8a are energized in their ON states while the cooling water distribution system 8b is de-energized, i.e., in its OFF state. As a result, the cooling water distribution system 8a distributes evaporative cooling water CW across and onto the first heat exchanger component 6a in a manner to wet the first heat exchanger component 6a while the second heat exchanger component 6b is dry. Simultaneously therewith, the fan assembly 10 causes the ambient air represented as the Cold Air IN arrows to flow across the first heat exchanger component 6a to generate HOT HUMID AIR from the ambient air represented as the Cold Air IN arrows flowing across the wet first heat exchanger component 6a and HOT DRY AIR from the ambient air represented as the Cold Air IN arrows flowing across the dry second heat exchanger component 6b. Thereafter, the HOT HUMID AIR and the HOT DRY AIR mix together to form a HOT AIR MIXTURE that subsequently exits through the air outlet 16 as represented by the HOT AIR MIXTURE OUT arrow. The HOT HUMID AIR and the HOT DRY AIR also flow through the eliminator structure 32, into the exit chamber portion 14b and through the fan assembly 10 before exiting the air outlet 16.

One of ordinary skill in the art would appreciate that mixing of the HOT HUMID AIR and the HOT DRY AIR to form the HOT AIR MIXTURE is achieved as a result of the torrent of air flowing through the container 4 as well as through the fan assembly 10. Additional mixing, if desired, can also be achieved as discussed hereinbelow.

By way of example only and not by way of limitation, each one of the first and second heat exchanger components 6a and 6b is a tubular structure which is represented in the drawing figures as a single, continuous tube 34. However, one of ordinary skill in the art would appreciate that, in practice, the tubular structure is actually fabricated from a plurality of tubes aligned in rows. The representative single, continuous tube 34 is formed in a serpentine tube configuration as shown in Figures 3-5 that has straight tube sections 34a and return bend sections 34b. Although not by way of limitation but by example only, straight tube section 34a has a plurality of fins 36 connected thereto to form a finned tube structure.

A second exemplary embodiment of a hybrid heat exchanger apparatus 200 of the present invention is shown in Figures 6-8. The hybrid heat exchanger apparatus 200 includes a partition 38. The partition 38 vertically divides the heat exchanger device 6 so that, when the hybrid heat exchanger apparatus 200 is in the HYBRID WET/DRY mode as shown in Figure 8, the wet first heat exchanger component 6a and the dry heat exchanger component 6b are delineated. Specifically, the partition 38 is disposed between the first water distribution manifold section 24a and the second water distribution manifold section 24b and between the first heat exchanger component 6a and the second heat exchanger component 6b. As depicted in Figure 8, when the hybrid heat exchanger apparatus 200 is in the HYBRID WET/DRY mode, a first operating zone Z1 in the central chamber portion 14c and a second operating zone of the central chamber portion 14c are delineated. The first operating zone Z1 of the central chamber portion 14c has a horizontal first operating zone width WZ1 and the second operating zone Z2 of the central chamber portion 14c has a horizontal second operating zone width WZ2. By way of example only for the second exemplary embodiment of the hybrid heat exchanger apparatus 200, the horizontal first operating zone width ZW1 and the horizontal second operating zone width ZW2 are at least substantially equal to each other.

For the second exemplary embodiment of the hybrid heat exchanger apparatus 200, the first heat exchanger component 6a is a conventional finned tube structure as discussed above and the second heat exchanger component 6b is has a tube structure formed with a plurality of

straight tube sections 34a in a conventional header-box configuration. Each one of the straight tube sections 34a are bare tubes in that there are no fins connected to the straight tube sections 34a.

With reference to Figures 6-8, the cooling water distribution system 8 includes a valve 40 that is interposed in the water distribution manifold 24 that divides the water distribution manifold 24 into the first water distribution manifold section 24a and the second water distribution manifold section 24b being in selective fluid communication with the first water distribution manifold section 24a. Again, a controller is not shown in Figures 6-8 to maintain clarity of the drawing figures. However, one of ordinary skill in the art would appreciate that the controller is operative to move the valve 40 to and between a Valve OPENED state and a Valve CLOSED state as reflected by the legend on Figures 6-8. With the valve 40 disposed between the first water distribution manifold section 24a and the second water distribution manifold section 24b, when the valve 40 is in the Valve OPENED state as shown in Figures 6 and 7, the first and second water distribution manifold sections 24a and 24b respectively are in fluid communication with one another. In Figure 6 with the hybrid heat exchanger apparatus 200 in the DRY mode, the valve 40 might also be in the Valve CLOSED state because the pump 26 is in the Pump OFF state. As a result, both the first and second operating zones Z1 and Z2 respectively are dry. In Figure 7 with the hybrid heat exchanger apparatus 200 in the WET mode, the valve 40 is in the Valve OPENED state and the pump 26 is in the Pump ON state. As a result, both the first and second operating zones Z1 and Z2 respectively are wet. In Figure 8 with the hybrid heat exchanger apparatus 200 in a HYBRID WET/DRY mode, the valve 40 is in the Valve CLOSED state and the pump 26 is in the Pump ON state. When the valve 40 is in the Valve CLOSED state, the first water distribution manifold section 24a and the second water distribution manifold section 24b are in fluid isolation from one another. As a result, the first operating zone Z1 is wet while the second operating zone Z2 is dry so that the hybrid heat exchanger apparatus 200 can operate in the HYBRID WET/DRY mode.

A third exemplary embodiment of a hybrid heat exchanger apparatus 300 of the present invention is shown in Figures 9-11 that operates in the DRY mode (Figure 9), the WET mode (Figure 10) and the HYBRID WET/DRY mode (Figure 11) in a manner similar to the hybrid heat exchanger apparatus 200 discussed above. By way of example only and not by way of limitation, the hybrid heat exchanger apparatus 300 includes a mixing baffle structure 42. The

mixing baffle structure 42 extends across the chamber 14 in the exit chamber portion 14b thereof. As best shown in Figure 12, the mixing baffle structure 42 is operative to assist in mixing the HOT HUMID AIR and the HOT DRY AIR as the HOT AIR MIXTURE before it exits the air outlet 16.

For the hybrid heat exchanger apparatus 300 illustrated in Figures 9-11, the heat exchanger device 6 includes the first heat exchanger component 6a and the second heat exchanger component 6b, which, as discussed above, are the finned tube structures. Also, heat exchangers sometimes use fill media as a direct means of heat transfer, whether alone or in conjunction with coils such as the invention described in U.S. Patent No. 6,598,862. As depicted in Figures 9-11 of the present invention, the heat exchanger device 6 includes a conventional first fill material structure 6a1 and a conventional second fill material structure 6b1, both of which being fabricated from the fill media. The first heat exchange component 6a and the first fill material structure 6a1 are vertically arranged with one on top of the other and the second heat exchanger component 6b and the second fill material structure 6b1 are vertically arranged with one on top of the other. More specifically, by way of example only and not by way of limitation, the first heat exchange component 6a is vertically positioned above the first fill material structure 6a1 and the second heat exchanger component 6b is vertically positioned above the second fill material structure 6b1.

The following exemplary embodiments of the hybrid heat exchanger apparatus of the present invention are illustrated only in the HYBRID WET/DRY mode. A skilled artisan would comprehend that the controller controls the Fan ON state of the fan assembly 10 and Pump ON and Pump OFF states of the pumps 26a and 26b to achieve the DRY mode, the WET mode and the HYBRID WET/DRY mode of the hybrid heat exchanger apparatus of the present invention as discussed hereinabove.

A fourth exemplary embodiment of a hybrid heat exchanger apparatus 400 of the present invention in the HYBRID WET/DRY mode is shown in Figure 12. The heat exchanger device 6 is conventional and is a single unit, i.e., the heat exchanger device 6 does not include a first heat exchanger component and a second heat exchanger component. The heat exchanger device 6 includes a plurality of straight tube sections 34a with each straight tube section having fins 36. As the HOT FLUID flows through this single-unit heat exchanger device 6, the HOT FLUID as the Hot Fluid IN flows into an inlet header box 44a, then through the plurality of the finned,

straight tube sections 34a and thereafter into an outlet header box 44b as the Cold Fluid OUT. Thus, this tube structure is a straight-through configuration.

Note also that even though the hybrid heat exchanger apparatus 400 lacks a partition, the first operating zone Z1 and the second operating zone Z2 exist. In the HYBRID WET/DRY mode of the hybrid heat exchanger apparatus 400, only the fan assembly 10 and the first cooling water distribution system 6a are energized such that only the first cooling water distribution system 26a distributes evaporative cooling water CW across and onto the single-unit heat exchanger device 6 in a manner to wet a portion of the heat exchanger device 6 in the first operating zone Z1 while a remaining portion of the heat exchanger device 6 is dry in the second operating zone Z2. Simultaneously therewith, the fan assembly 10 in the Fan ON state causes the ambient air illustrated as the Cold Air IN arrows to flow across the heat exchanger device 6 to generate the HOT HUMID AIR from the ambient air (represented as the Cold Air IN arrows) flowing across the wet portion of the heat exchanger device 6 in the first operating zone Z1 and the HOT DRY AIR from the ambient air (represented as the Cold Air IN arrows) flowing across the remaining dry portion of the heat exchanger device 6 in the second operating zone Z2 so that the HOT HUMID AIR and the HOT DRY AIR thereafter mix together to form the HOT AIR MIXTURE that subsequently exits the hybrid heat exchanger apparatus 400 through the air outlet 16.

A fifth exemplary embodiment of a hybrid heat exchanger apparatus 500 of the present invention in the HYBRID WET/DRY mode is shown in Figure 13. The heat exchanger device 6 is conventional and includes the first heat exchanger component 6a and the second heat exchanger component 6b as a finned, serpentine tube structures. In this fifth exemplary embodiment, the first heat exchanger component 6a and the second heat exchanger component 6b are in parallel fluid communication with one another. As the HOT FLUID flows through this heat exchanger device 6, the HOT FLUID as the Hot Fluid IN flows into the inlet header box 44a, then through each one of the first and second heat exchanger components 6a and 6b respectively and thereafter into the outlet header box 44b as the Cold Fluid OUT. Further, the horizontal first operating zone width ZW1 and the horizontal second operating zone width ZW2 are different from one another. More specifically, the horizontal first operating zone width ZW1 is smaller than the horizontal second operating zone width ZW2. Additionally, each one of the

first heat exchanger component 6a and the second heat exchanger component 6b employs bare tubes formed in a serpentine configuration and are serially connected together.

A sixth exemplary embodiment of a hybrid heat exchanger apparatus 600 of the present invention in the HYBRID WET/DRY mode is shown in Figure 14. Each one of the first heat exchanger component 6a and the second heat exchanger component 6b is conventional and employs a single, continuous, bare tube 34 formed in a serpentine configuration. The first heat exchanger component 6a and the second heat exchanger component 6b are serially connected together.

A seventh exemplary embodiment of a hybrid heat exchanger apparatus 700 of the present invention in the HYBRID WET/DRY mode is shown in Figure 15. The first and second water distribution systems 8a and 8b respectfully are like the ones discussed for the first exemplary embodiment of the hybrid heat exchanger apparatus 100. Note, however, that the first heat exchanger component 6a and the second heat exchanger component 6b are in fluid isolation from one another.

An eighth exemplary embodiment of a hybrid heat exchanger apparatus 800 of the present invention in the HYBRID WET/DRY mode is shown in Figure 16. Rather than an induced-draft fan assembly 10 as represented in Figures 1-15 shown mounted to the container 4 adjacent the air outlet 16, a fan assembly 110, sometimes referred to as a forced draft system, is mounted at the air inlet 18 as an alternative air flow mechanism. Thus, rather than an induced draft system as represented in Figures 1-15, the hybrid heat exchanger apparatus 800 is considered a forced draft system.

In Figure 17, a method for inhibiting formation of a water-based condensate from the hybrid heat exchanger apparatus of the present invention is described. The heat exchanger apparatus has the cooling water distribution system 8 and the heat exchanger device 6 as described above. The heat exchanger device has the HOT FLUID that flows therethrough, i.e., from the Hot Fluid IN to the Cold Fluid OUT. Step S10 distributes the evaporative cooling water CW from the cooling water distribution system 8 onto the heat exchanger device 6 in a manner to wet a portion of the heat exchanger device 6 (for instance, in Figure 12) while allowing a remaining portion of the heat exchanger device 6 to be dry (for instance, in Figure 12). Step 12 causes ambient air (represented as the Cold Air IN arrows) to flow across the heat exchanger device 6 to generate HOT HUMID AIR from the ambient air flowing across the wet

portion of the heat exchanger device 6 in the first operating zone Z1 and HOT DRY AIR from the ambient air flowing across the remaining dry portion of the heat exchanger device 6 in the second operating zone Z2. Step 14 mixes the HOT HUMID AIR and the HOT DRY AIR together to form the HOT AIR MIXTURE. To enhance the method of the present invention, it might be beneficial to include yet another step. This step would provide the partition 38 that would extend vertically between the wet portion of the heat exchanger device 6 and the remaining dry portion of the heat exchanger device 6.

Ideally, the HOT AIR MIXTURE of the HOT HUMID AIR and the HOT DRY AIR exits the hybrid heat exchanger apparatus either without a visible plume P (see Figure 2) of the water-based condensate or at least substantially without a visible plume P of the water-based condensate. However, a skilled artisan would appreciate that, when the HOT AIR MIXTURE of the HOT HUMID AIR and the HOT DRY AIR exits the heat exchanger apparatus, visible wisps W of the water-based condensate as represented in Figure 5 might appear exteriorly of the heat exchanger apparatus without departing from the spirit of the invention.

In order to execute the method of the first through eighth embodiments of the present invention, the hybrid heat exchanger apparatus of the present invention has the heat exchanger device 6 with the hot fluid flowing therethrough. The hybrid heat exchanger apparatus of the present invention includes the cooling water distribution system 8 and the air flow mechanism such as the fan assembly 10 or 110 for causing ambient air represented as the Cold Air IN arrows to flow across the heat exchanger device 6. The cooling water distribution system 8 distributes evaporative cooling water CW onto the heat exchanger device 6 in a manner to wet a portion of the heat exchanger device 6 (for example, operating zone Z1 in Figure 12) while allowing a remaining portion of the heat exchanger device 6 to be dry (for example, operating zone Z2 in Figure 12). As best shown in Figure 13, the mixing baffle structure 42 represents the means for mixing the HOT HUMID AIR and the HOT DRY AIR together to form THE HOT AIR MIXTURE. However, one of ordinary skill in the art would appreciate that induced draft-air and forced draft-air heat exchanger apparatuses have high-velocity air flowing therethrough. As a result, it is theorized that shortly after the ambient air passes across the respective ones of the wet and dry portions of the heat exchanger device, the HOT HUMID AIR and the HOT DRY AIR begin to mix. Furthermore, it is theorized that mixing also occurs as the HOT HUMID AIR and the HOT DRY AIR flow through the fan assembly 10 of the induced draft system. Thus, it may

not be necessary to add the mixing baffle structure 42 or any other device or structure to effectively mix the HOT HUMID AIR and the HOT DRY AIR into the HOT AIR MIXTURE in order to inhibit formation of a plume of condensed water as the HOT AIR MIXTURE exits the container 14.

A ninth exemplary embodiment of a hybrid heat exchanger apparatus 900 of the present invention in the HYBRID WET/DRY mode is illustrated in Figure 18. By way of example only, the hybrid heat exchanger apparatus 900 includes a conventional first heat exchanger component 6a that incorporates a combination of straight tube sections 34a with fins 36 and bare tube sections 34a, i.e., without fins and a conventional second heat exchanger component 6b that has all bare tube sections 34a. Note that the partition 38 is disposed between the first heat exchanger component 6a and the second heat exchanger component 6b, between first water distribution manifold 24a and the second water distribution manifold 24b and between a first eliminator structure section 32a and a second eliminator structure 32b and terminates in contact with the top wall 4a of the container 4. In effect, the partition 38 acts as an isolating panel that isolates the HOT HUMID AIR and the HOT DRY AIR from one another inside the heat exchanger apparatus 900.

Further, the hybrid heat exchanger apparatus 900 includes a first fan assembly 10a and a second fan assembly 10b. The first fan assembly 10a causes the ambient air to flow across the first heat exchanger component 6a to generate the HOT HUMID AIR from the ambient air flowing across the wetted first heat exchanger component 6a. The second fan assembly 10b causes the ambient air to flow across the second heat exchanger component 6b to generate the HOT DRY AIR from the ambient air flowing across the remaining dry portion of the second heat exchanger component 6b. Since the HOT HUMID AIR and the HOT DRY AIR are isolated from one another, the HOT HUMID AIR and the HOT DRY AIR are exhausted from the hybrid heat exchanger apparatus separately from one another. Specifically, the first fan assembly 10a exhausts the HOT HUMID AIR from the hybrid heat exchanger apparatus 900 and second fan assembly 10b exhausts the HOT DRY AIR from the hybrid heat exchanger apparatus 900.

Since the HOT HUMID AIR and the HOT DRY AIR are isolated from one another, it is possible that a plume P might form above the first fan assembly 10a under the appropriate atmospheric conditions. In brief, although the ninth embodiment of the hybrid heat exchanger apparatus 900 might not abate plume P, it does conserve water.

In order to execute the method of the ninth embodiment of hybrid heat exchanger apparatus 900 the present invention, the steps of distributing evaporative cooling water on the heat exchanger device and causing ambient air to flow across the heat exchanger device are identical to the method to execute the method of the first through eighth embodiments of the hybrid heat exchanger device described above. In addition thereto, to execute the method of the ninth embodiment of the hybrid heat exchanger device 900, the HOT HUMID AIR and the HOT DRY AIR are isolated from one another inside the hybrid heat exchanger apparatus and thereafter the HOT HUMID AIR and HOT DRY AIR are then exhausted from the hybrid heat exchanger apparatus as separate air-flow streams.

For the embodiments of the hybrid heat exchanger apparatus of the present invention, water conservation is achieved primarily in two ways. First, a lesser amount of cooling water CW is used when the hybrid heat exchanger apparatus is in the HYBRID WET/DRY mode than in the WET mode. For example, compare Figures 4 and 5. Second, a lesser amount of evaporation of the cooling water CW occurs in the HYBRID WET/DRY mode than in the WET mode. To further explain, in the HYBRID WET/DRY mode, an upstream portion of the hot fluid flowing through an upstream-side of the heat exchanger coils of the hybrid heat exchanger apparatus is cooled upstream by dry cooling and a downstream portion of the hot fluid (that has already flowed through the upstream side of the heat exchanger coils and cooled by dry cooling) is further cooled by evaporative cooling from a wetted, downstream-side of the heat exchanger coils. Thus, the embodiments of the hybrid heat exchanger apparatus are considered to have enhanced dry cooling capabilities in the HYBRID WET/DRY mode for conservation of water and, possibly, for abatement of plume.

The present invention, may, however, be embodied in various different forms and should not be construed as limited to the exemplary embodiments set forth herein; rather, these exemplary embodiments are provided so that this disclosure will be thorough and complete and will fully convey the scope of the present invention to those skilled in the art. For instance, although the drawing figures depict the first operating zone Z1 as a wet zone and the second operating zone Z2 as a dry zone, it is possible, with mechanical adjustments in some instances and without mechanical adjustments in other instances, it is possible that the first operating zone Z1 is a dry zone and the second operating zone Z2 is a wet zone. Further, the heat exchanger device described herein might be a condenser.

What is claimed is:

1. A heat exchanger apparatus having a heat exchanger device with a hot fluid flowing therethrough, the heat exchanger apparatus comprising:
 - a first indirect heat exchange section and a second indirect heat exchange section,
 - a cooling water distribution system comprising a first section for distributing evaporative cooling water onto said first indirect heat exchange section and for selectively wetting or drying said first indirect heat exchange section, and a second section for distributing evaporative cooling water onto said second indirect heat exchange section and for selectively wetting or drying second indirect heat exchange section; and
 - an air flow mechanism that is in communication with said first indirect heat exchange section and said second indirect heat exchange section, and causes ambient air to simultaneously flow across said first and second indirect heat exchange sections to generate hot humid air from a wet portion of the heat exchanger device and / or hot dry air from a dry portion of the heat exchanger device.
2. A heat exchanger apparatus according to claim 1, wherein the cooling water distribution system includes a water distribution manifold and a pump in fluid communication with the water distribution manifold and operative to pump the evaporative cooling water to the water distribution manifold.
3. A heat exchanger apparatus according to claim 2, wherein the cooling water distribution system includes a plurality of spray nozzles connected to and in fluid communication with the water distribution manifold, the pump operative to pump the evaporative cooling water to the water distribution manifold and through the plurality of spray nozzles.
4. A heat exchanger apparatus according to claim 1, further comprising means for mixing the generated hot humid and/or dry air from said first and second indirect heat exchange sections to form a hot air mixture thereof.
5. A heat exchanger apparatus according to claim 4, wherein the means for mixing the generated hot humid and/or dry air from said first and second indirect heat exchange sections includes a mixing baffle structure positioned above the cooling water distribution system.

6. A heat exchanger apparatus according to claim 1, further comprising a partition for vertically dividing at least the heat exchanger device into said first and second indirect heat exchange sections.

7. A heat exchanger apparatus according to claim 6, wherein the first and second indirect heat exchanger sections are in fluid communication with one-another.

8. A heat exchanger apparatus according to claim 1, further comprising isolating means for isolating the generated hot humid and/or dry air from said first and second indirect heat exchange sections inside the heat exchanger apparatus.

9. A heat exchanger apparatus according to claim 8, wherein said air flow mechanism comprises a first air flow mechanism for generating the hot humid air from the wet portion of the heat exchanger device; and comprises a second air flow mechanism for generating the hot dry air from the dry portion of the heat exchanger device.

10. A heat exchanger apparatus according to claim 9, further comprising means for exhausting the generated hot humid and/or dry air from the heat exchanger apparatus, wherein the exhaust means is the first air flow mechanism for exhausting the hot humid air from the heat exchanger apparatus and is the second air flow mechanism for exhausting the hot dry air from the heat exchanger apparatus.

11. A method for inhibiting formation of a water-based condensate from a heat exchanger apparatus having a cooling water distribution system and a heat exchanger device, the heat exchanger device having a hot fluid flowing therethrough, the method comprising the steps of:

distributing evaporative cooling water from the cooling water distribution system onto the heat exchanger device to wet only a first portion of the heat exchanger device while allowing a second portion of the heat exchanger device to be dry; and

causing ambient air to flow across the heat exchanger device to generate hot humid air from the ambient air flowing across the wet portion of the heat exchanger device and hot dry air from the ambient air flowing across the dry second portion of the heat exchanger device;

wherein the air flow across said wet portion and said dry portion of the heat exchanger device is in parallel.

12. A method according to claim 11, further comprising the step of mixing the hot humid air and the hot dry air together to form a hot air mixture thereof.

13. A method according to claim 12, further comprising the step of causing the hot air mixture of the hot humid air and the hot dry air to exit the heat exchanger apparatus.

14. A method according to claim 13, wherein the hot air mixture of the hot humid air and the hot dry air exits the heat exchanger apparatus at least substantially without a visible plume of the water-based condensate.

15. A method according to claim 14, wherein when the hot air mixture of the hot humid air and the hot dry air exits the heat exchanger apparatus, visible wisps of the water-based condensate appear exteriorly of the heat exchanger apparatus.

16. A method according to claim 11, further comprising the step of isolating the hot humid air and the hot dry air from one another inside the heat exchanger apparatus.

17. A method according to claim 16, further comprising the step of exhausting the hot humid air and the hot dry air from the heat exchanger apparatus.

18. A method according to claim 11, further comprising the step of providing a partition extending vertically at least between the wet portion of the heat exchanger device and the dry portion of the heat exchanger device.

19. A hybrid heat exchanger apparatus, comprising:
a container having a top wall, a bottom wall and a plurality of side walls connected to the top and bottom wall to form a generally box-shaped chamber, the chamber having a water basin chamber portion defined, in part, by the bottom wall for containing evaporative cooling water, an exit chamber portion defined, in part, by the top wall and a central chamber portion defined, in part, between opposing ones of the side walls and positioned between the water basin chamber portion and the exit chamber portion, the top wall being formed with an air

outlet in communication with the exit chamber portion, at least one side wall formed with an air inlet in communication with the central chamber portion;

a heat exchanger device disposed in and extending across the central chamber portion adjacent to and below the exit chamber portion and operative to convey hot fluid therethrough from a hot fluid source, said heat exchanger device having a first portion and a second portion;

a cooling water distribution system including at least one water distribution manifold extending across the central chamber portion and disposed above and adjacent to both said first and second portions of the heat exchanger device and at least one pump operative for pumping the evaporative cooling water from the water basin chamber portion to and through the water distribution manifold thereby distributing the evaporative cooling water onto the heat exchanger device, said cooling water distributing system selectively wets or dries each of said first and second portions of the heat exchanger device;

an air flow mechanism being in communication with said first and second portions of the heat exchanger device and operative for causing ambient air to flow through the hybrid heat exchanger apparatus from the air inlet, across the heat exchanger device and the water distribution manifold and through the air outlet; and

a controller operative for causing the hybrid heat exchanger apparatus to operate in one of a wet mode, a dry mode and a hybrid mode,

wherein, in the wet mode, both the air flow mechanism and the cooling water distribution system are energized resulting in the ambient air flowing across the heat exchanger device and the evaporative cooling water being distributed onto and across both said first and second portions of the heat exchanger device to generate hot humid air from a wet portion of the heat exchange device that subsequently exits through the air outlet,

wherein, in the dry mode, only the air flow mechanism is energized while the cooling water distribution system is de-energized resulting in the ambient air flowing across the heat exchanger device without the evaporative cooling water being distributed onto and across the heat exchanger device to generate hot dry air from a dry portion of the heat exchange device that subsequently exits through the air outlet, and

wherein in the hybrid mode, both the air flow mechanism and the cooling water distribution system are energized such that the cooling water distribution system distributes evaporative cooling water across and onto the heat exchanger device to wet only said first portion of the heat exchanger device while said second portion of the heat exchanger device is dry and simultaneously the air flow mechanism causes the ambient air to flow across the

heat exchanger device to generate hot humid air from the ambient air flowing across a wet portion of the heat exchanger device and hot dry air from the ambient air flowing across a dry portion of the heat exchanger device.

20. A hybrid heat exchanger apparatus according to claim 19, wherein, after the cooling water distribution system distributes evaporative cooling water across and onto the heat exchanger device to wet a said first portion of the heat exchanger device while said second portion of the heat exchanger device is dry and the air flow mechanism causes the ambient air to flow across the heat exchanger device to generate the hot humid air from the ambient air flowing across the wet portion of the heat exchanger device and the hot dry air from the ambient air flowing across the dry portion of the heat exchanger device, the hot humid air and the hot dry air mix together to form a hot air mixture that subsequently exits through the air outlet.

21. A hybrid heat exchanger apparatus according to claim 19, further comprising a partition for vertically dividing at least the heat exchanger device so that, when the hybrid heat exchanger apparatus is in the hybrid mode, the wet portion of the heat exchanger device and the dry portion of the heat exchanger device are delineated.

22. A hybrid heat exchanger apparatus according to claim 21, wherein the partition is disposed in the hybrid heat exchanger apparatus to isolate the hot humid air and the hot dry air from one another inside the heat exchanger apparatus so that the hot humid air and the hot dry air are exhausted separately from the hybrid heat exchanger apparatus.

23. A hybrid heat exchanger apparatus according to claim 19, wherein said second portion of the heat exchanger device is in fluid communication with said first portion of the heat exchanger device or in fluid isolation from said first portion of the heat exchanger device.

24. A hybrid heat exchanger apparatus according to claim 23, further comprising a partition vertically disposed at least between the first portion of the heat exchanger and the second portion of the heat exchanger such that, when the hybrid heat exchanger apparatus is in the hybrid mode, a first operating zone of the central chamber portion and a second operating zone of the central chamber portion are delineated.

25. A hybrid heat exchanger apparatus according to claim 24, wherein the first operating zone of the central chamber portion has a horizontal first operating zone width and the second operating zone of the central chamber portion has a horizontal second operating zone width, the horizontal first operating zone width and the horizontal second operating zone width being one of equal to each other and different from one another.

26. A hybrid heat exchanger apparatus according to claim 23, wherein the first portion of the heat exchanger and the second portion of the heat exchanger are in parallel fluid communication with one another or the in serial fluid communication with one another or in fluid isolation from one another.

27. A hybrid heat exchanger apparatus according to claim 23, wherein the first portion of the heat exchanger is one of a tube structure, a fill material structure and a combination of both the tube structure and the fill material structure vertically arranged with one on top of the other and the second portion of the heat exchanger is one of the tube structure, the fill material structure and the combination of both the tube structure and the fill material structure vertically arranged with one on top of the other.

28. A hybrid heat exchanger apparatus according to claim 27, wherein the tube structure is one of a serpentine tube configuration, a header-box configuration and a straight-through configuration.

29. A hybrid heat exchanger apparatus according to claim 28, wherein the tube structure includes a plurality of finned tubes or a plurality of bare tubes or a combination of the plurality of the finned tubes and the plurality of the bare tubes.

30. A hybrid heat exchanger apparatus according to claim 24, wherein the cooling water distribution system includes at least one valve and the at least one water distribution manifold includes a first water distribution manifold section and a second water distribution manifold section in selective fluid communication with the first water distribution manifold section with the at least one valve disposed therebetween such that, when the at least one valve is in an opened state, the first and second water distribution manifold sections are in fluid

communication with one another and, when the at least one valve is in a closed state, the first and second water distribution manifold sections are in fluid isolation from one another, the partition being disposed between the first water distribution manifold section and the second water distribution manifold section.

31. A hybrid heat exchanger apparatus according to claim 24, wherein the at least one pump includes a first pump and a second pump and the at least one water distribution manifold includes a first water distribution manifold and a second water distribution manifold, the first pump and the first water distribution manifold are in selective fluid communication with one another and the second pump and the second water distribution manifold are in selective fluid communication with one another, the partition being disposed between the first water distribution manifold and the second water distribution manifold.

32. A hybrid heat exchanger apparatus according to claim 19, wherein the cooling water distribution system includes a valve and wherein the at least one water distribution manifold includes a first water distribution manifold section and a second water distribution manifold section with the valve disposed therebetween such that, when the valve is in an opened state, the first and second water distribution manifold sections are in fluid communication with one another and, when the valve is in a closed state, the first and second water distribution manifold sections are in fluid isolation from one another.

33. A hybrid heat exchanger apparatus according to claim 19, wherein the at least one pump includes a first pump and a second pump and the at least one water distribution manifold includes a first water distribution manifold and a second water distribution manifold, the first pump and the first water distribution manifold are in selective fluid communication with one another and the second pump and the second water distribution manifold are in selective fluid communication with one another.


34. A hybrid heat exchanger apparatus according to claim 19, wherein the controller is operative to energize or de-energize at least one of the cooling water distribution system and the air flow mechanism by automatically or manually switching the at least one of the cooling water distribution system and the air flow mechanism between an ON state and an OFF state.


35. A hybrid heat exchanger apparatus according to claim 19, further comprising an eliminator structure extending across the chamber and disposed between the water distribution manifold and the air outlet with the exit chamber portion of the chamber disposed above the eliminator structure and the central chamber portion of the chamber disposed below the eliminator structure.

36. A hybrid heat exchanger apparatus according to claim 19, further comprising a mixing baffle structure extending across the chamber in the exit chamber portion thereof.


37. A hybrid heat exchanger apparatus according to claim 19, further comprising at least one louver module mounted to one of the plurality of the side walls in the air inlet, disposed adjacent to and above the water basin chamber portion and operative to permit ambient air to enter into the central chamber portion.


38. A hybrid heat exchanger apparatus according to claim 19, wherein the cooling water distribution system includes a plurality of spray nozzles, each spray nozzle being operatively connected to the at least one water distribution manifold.

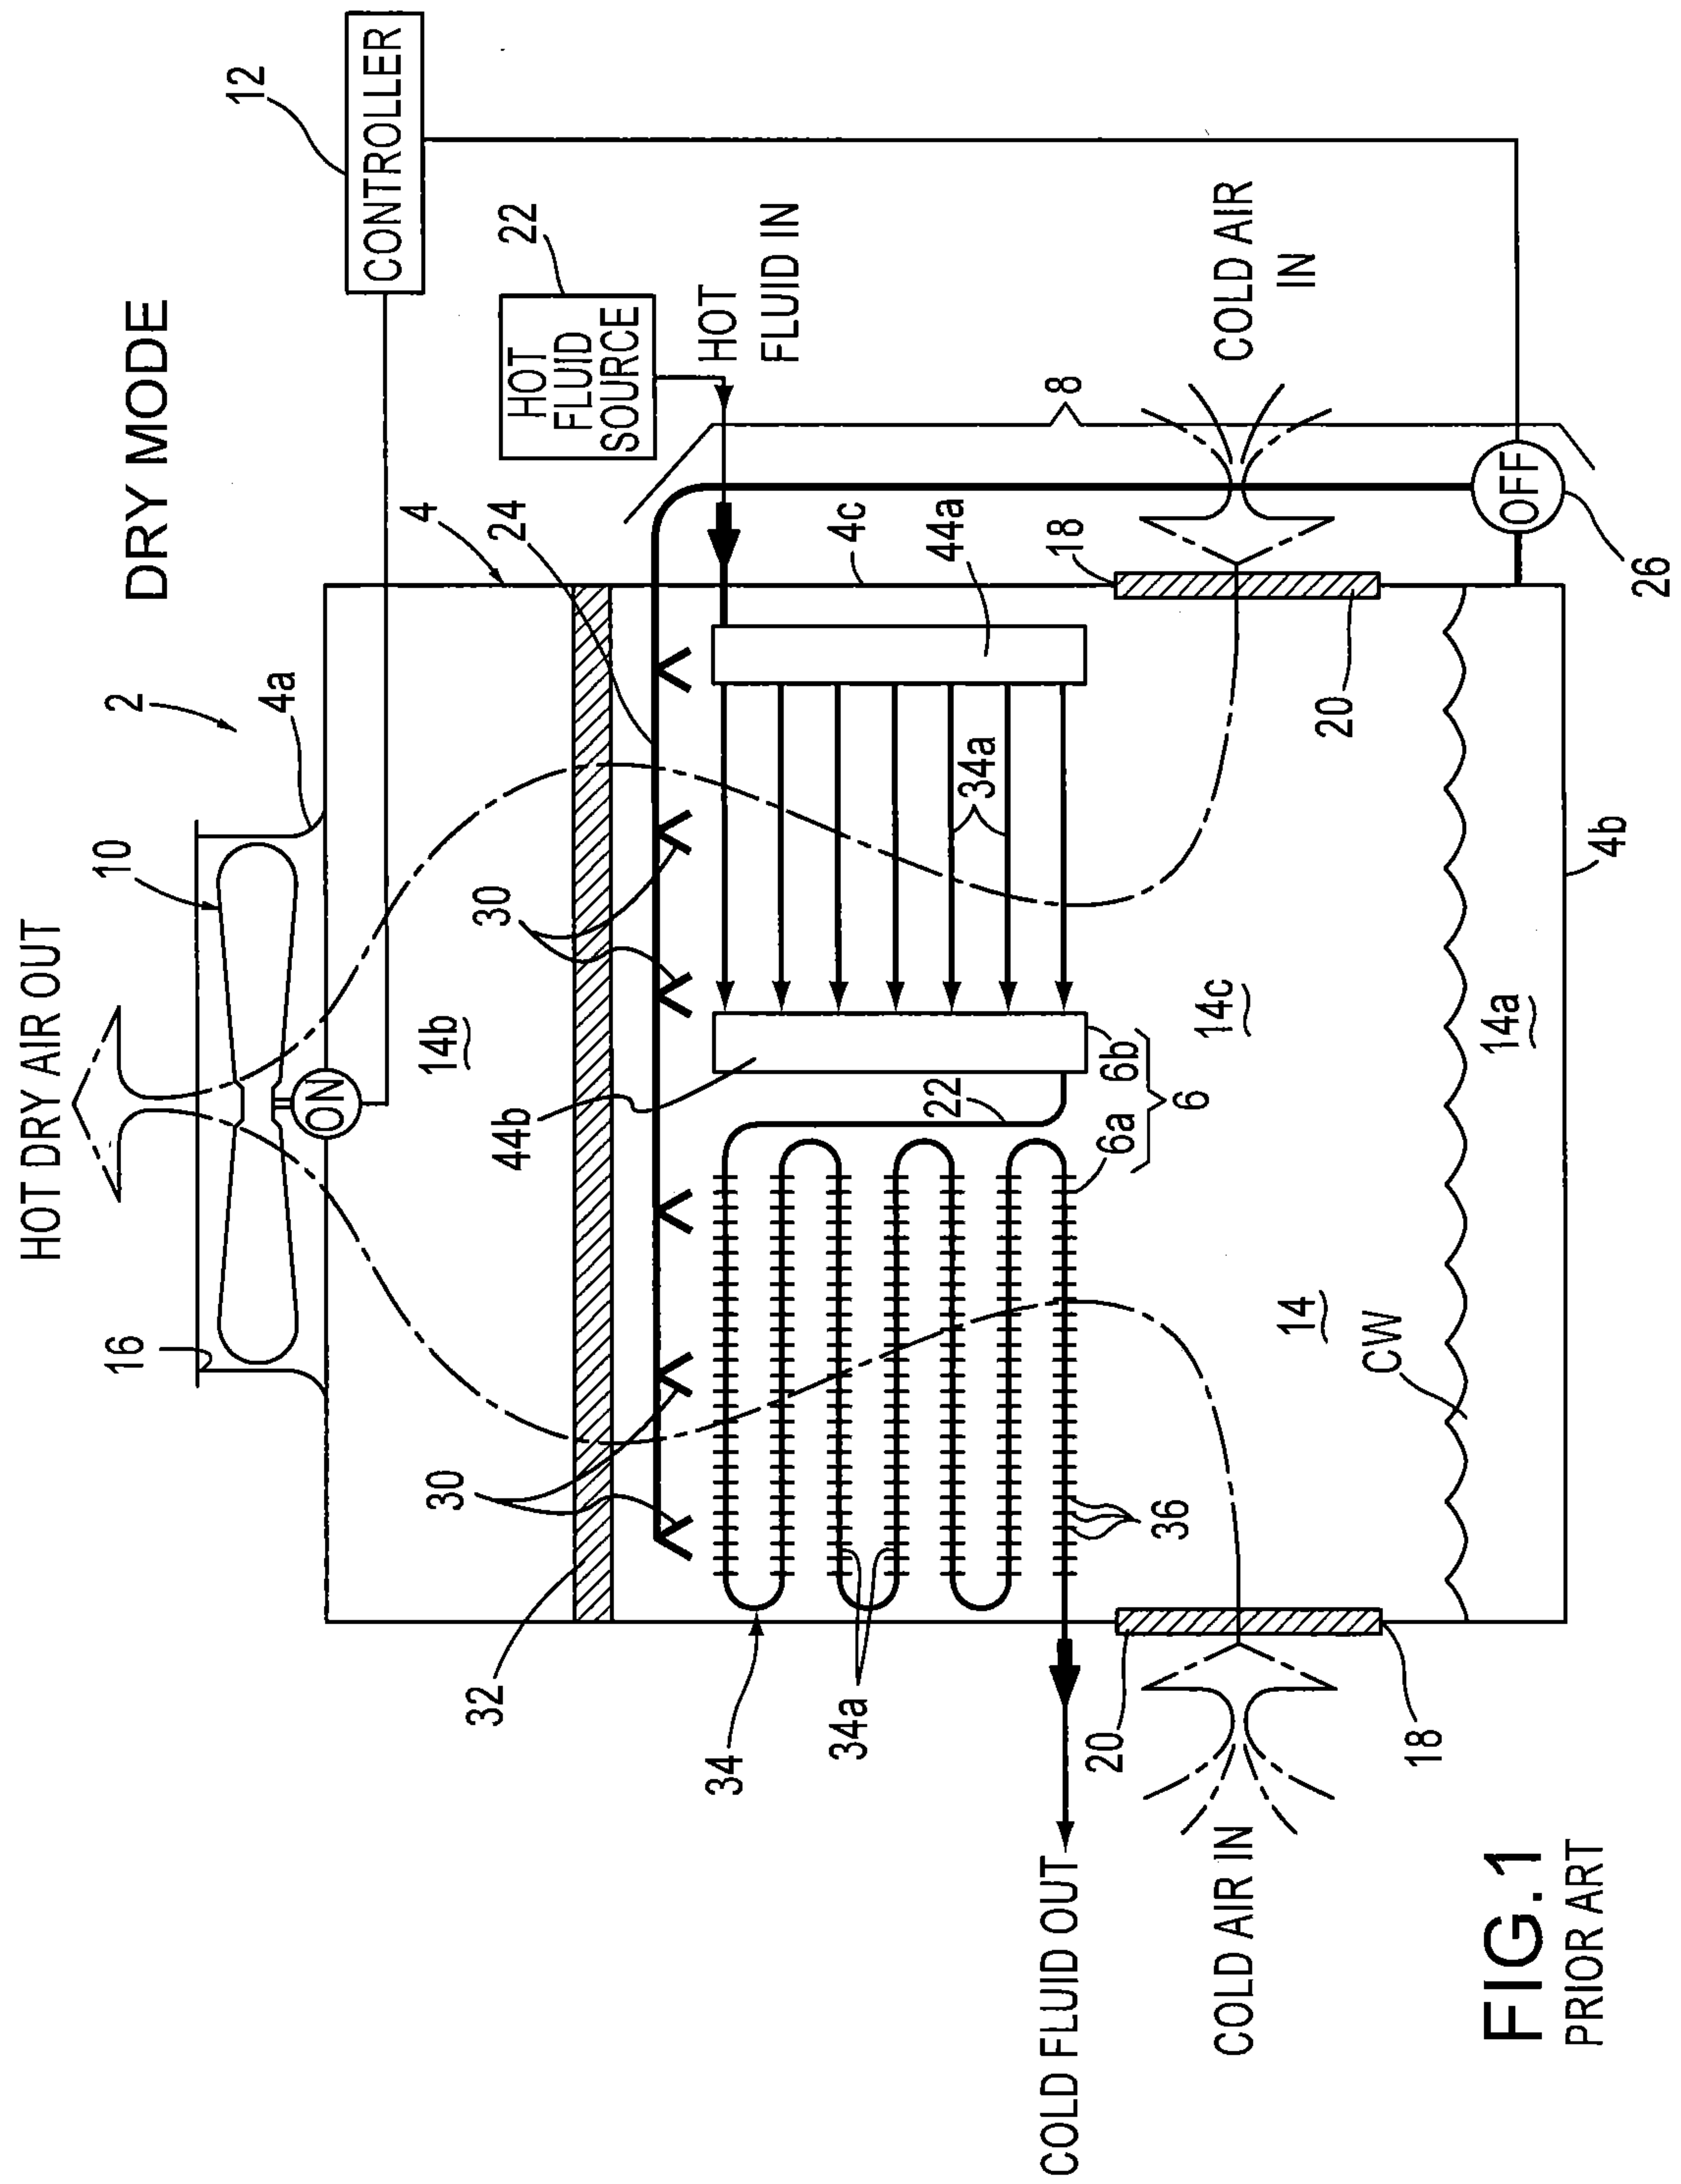

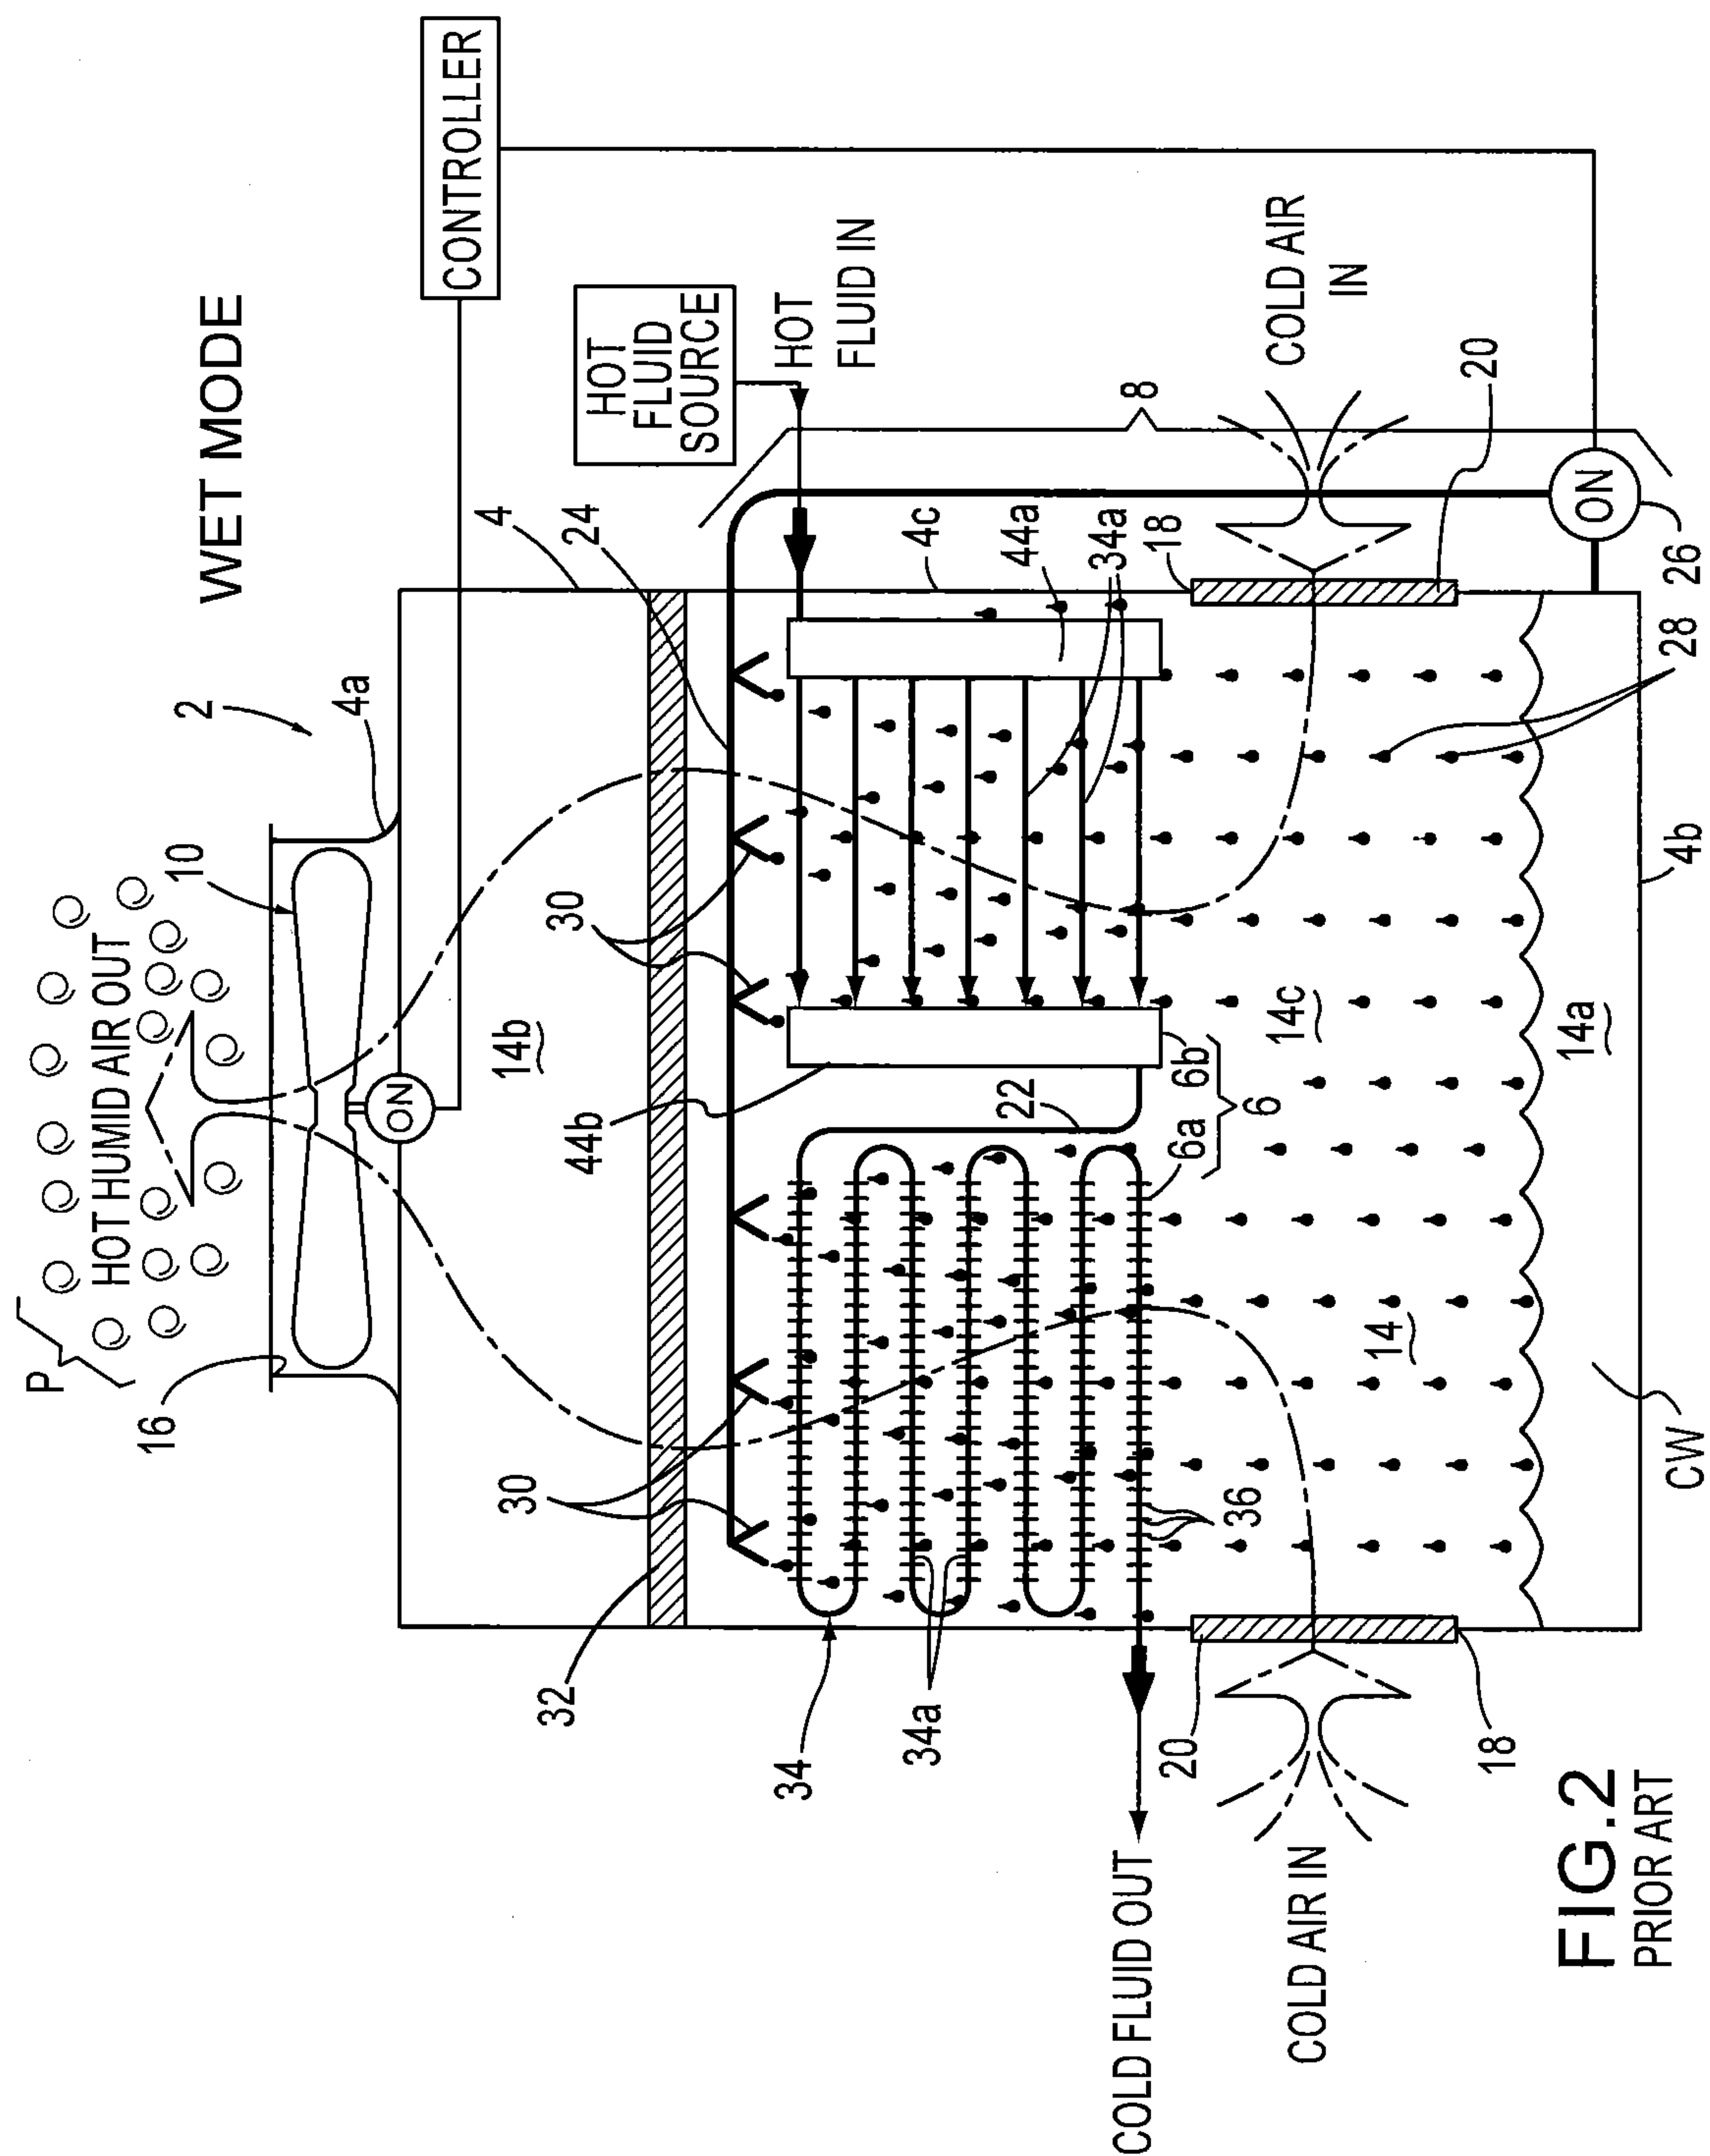

3/19

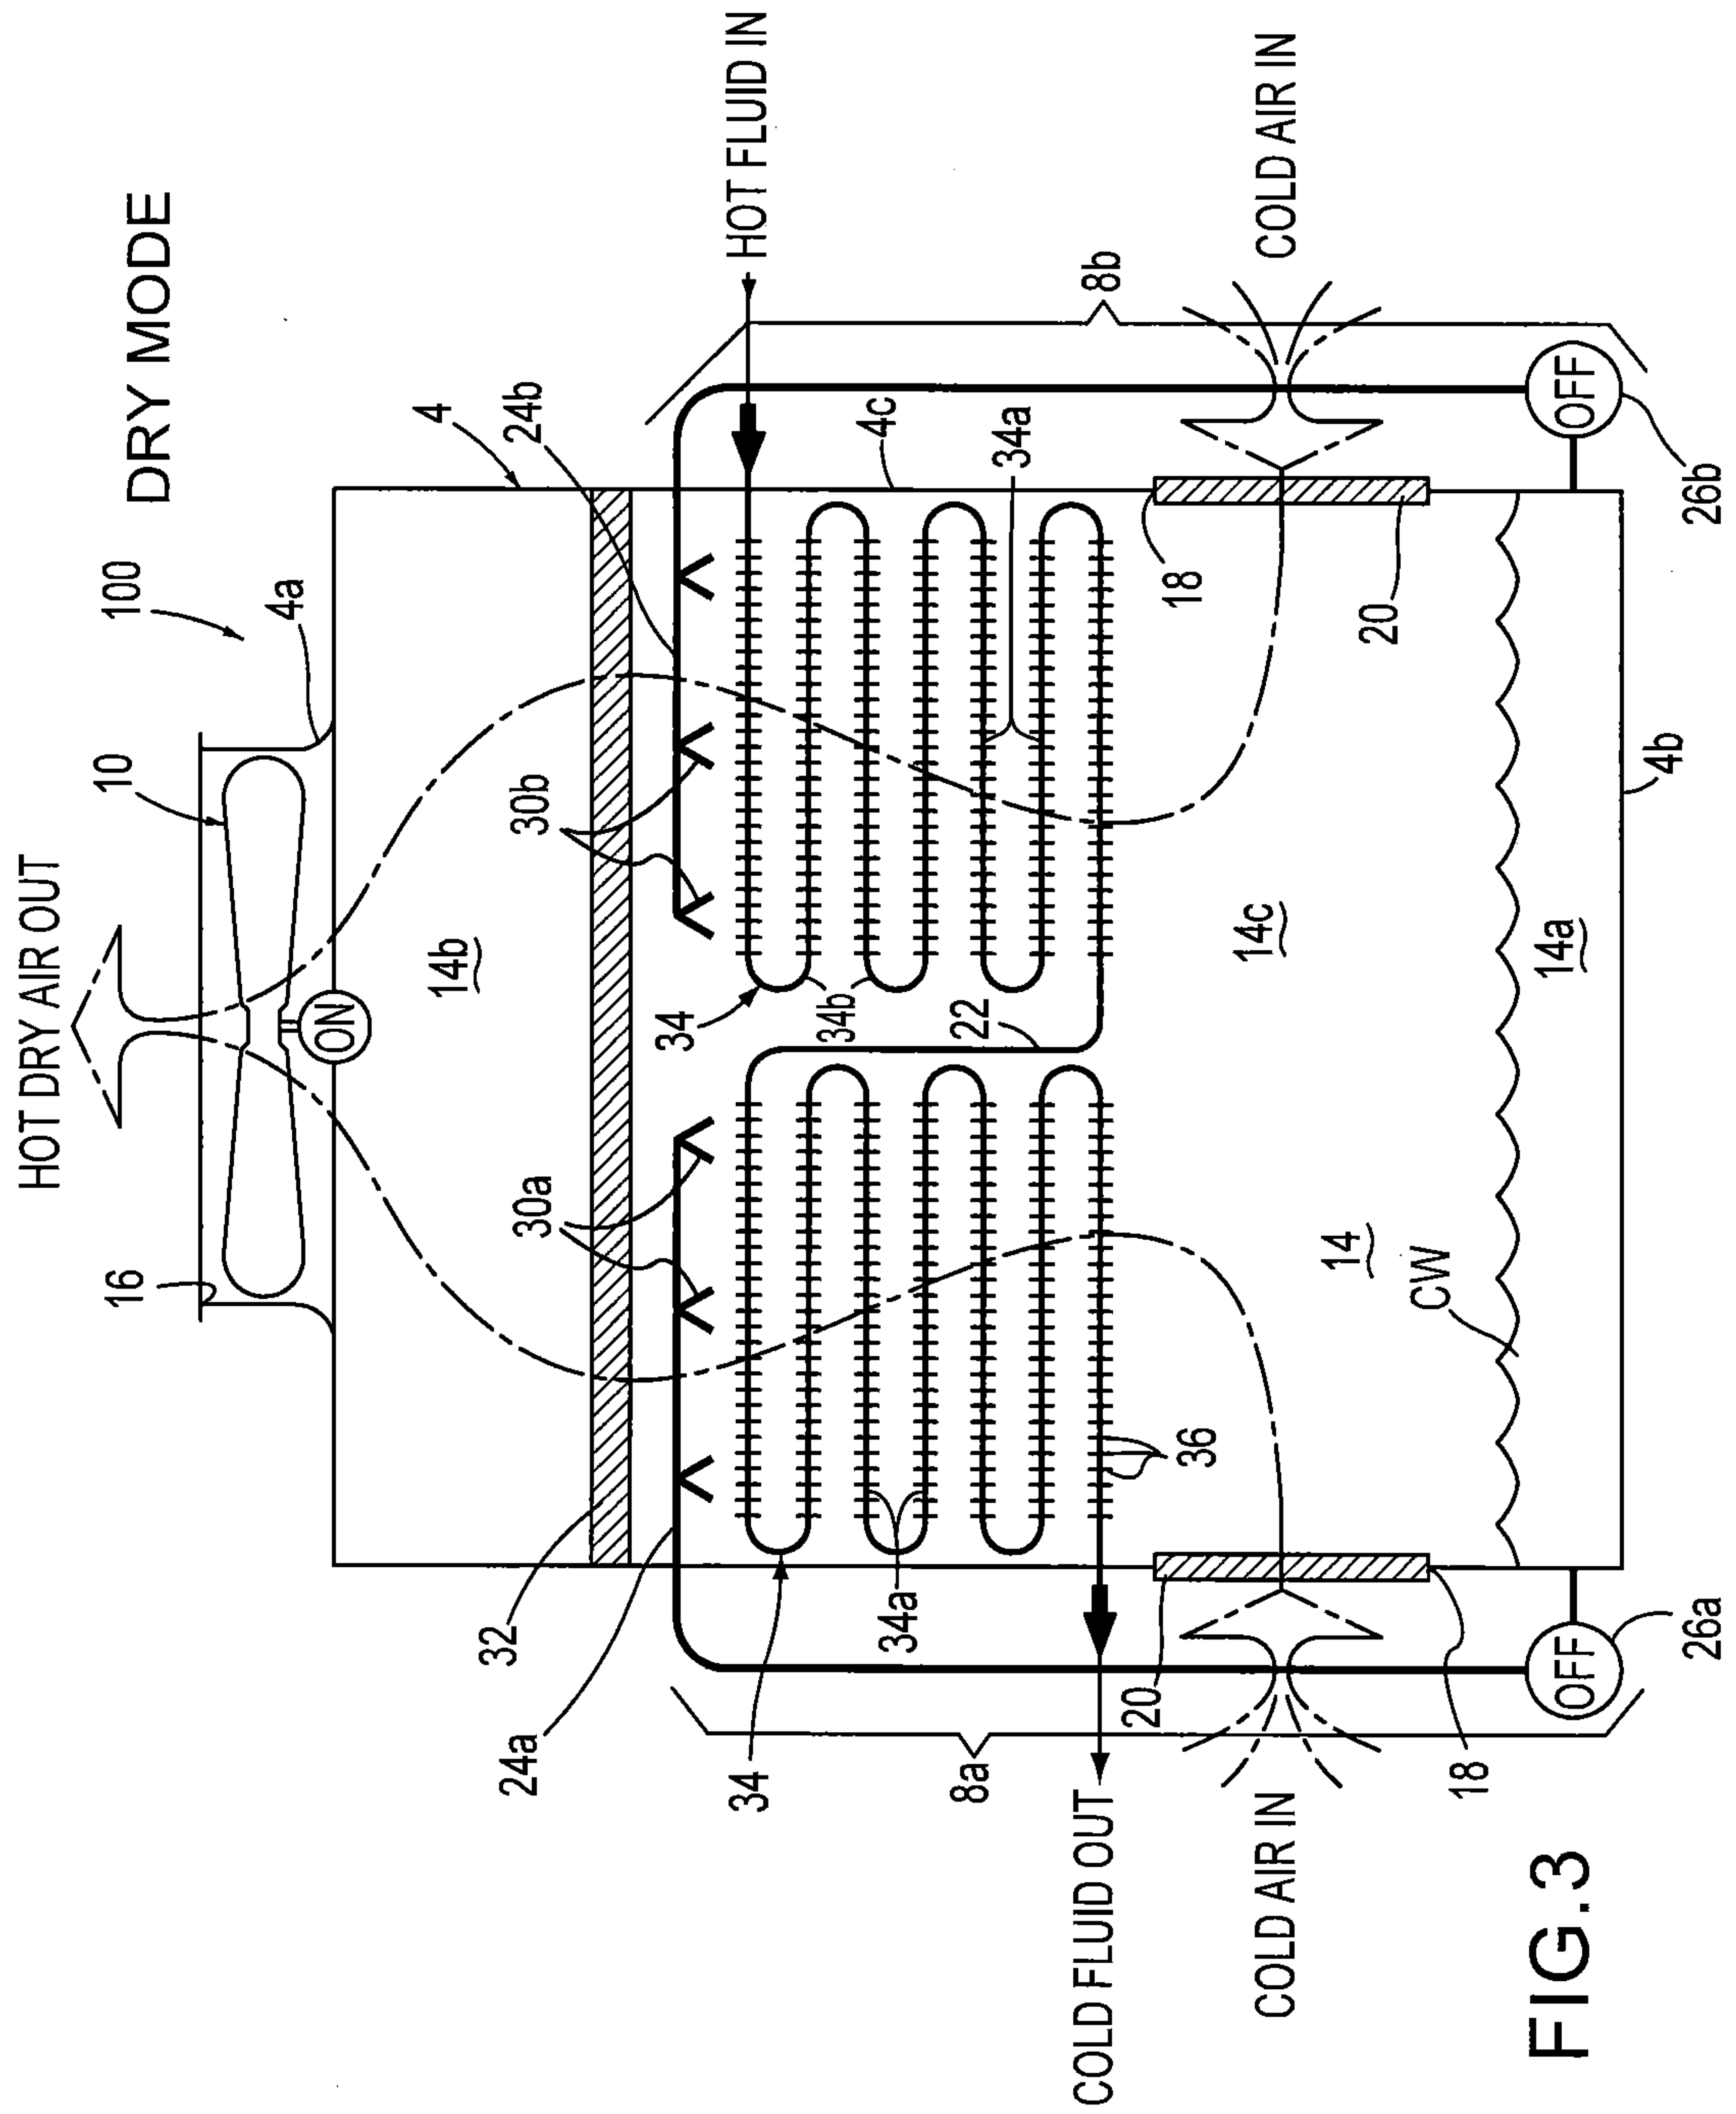

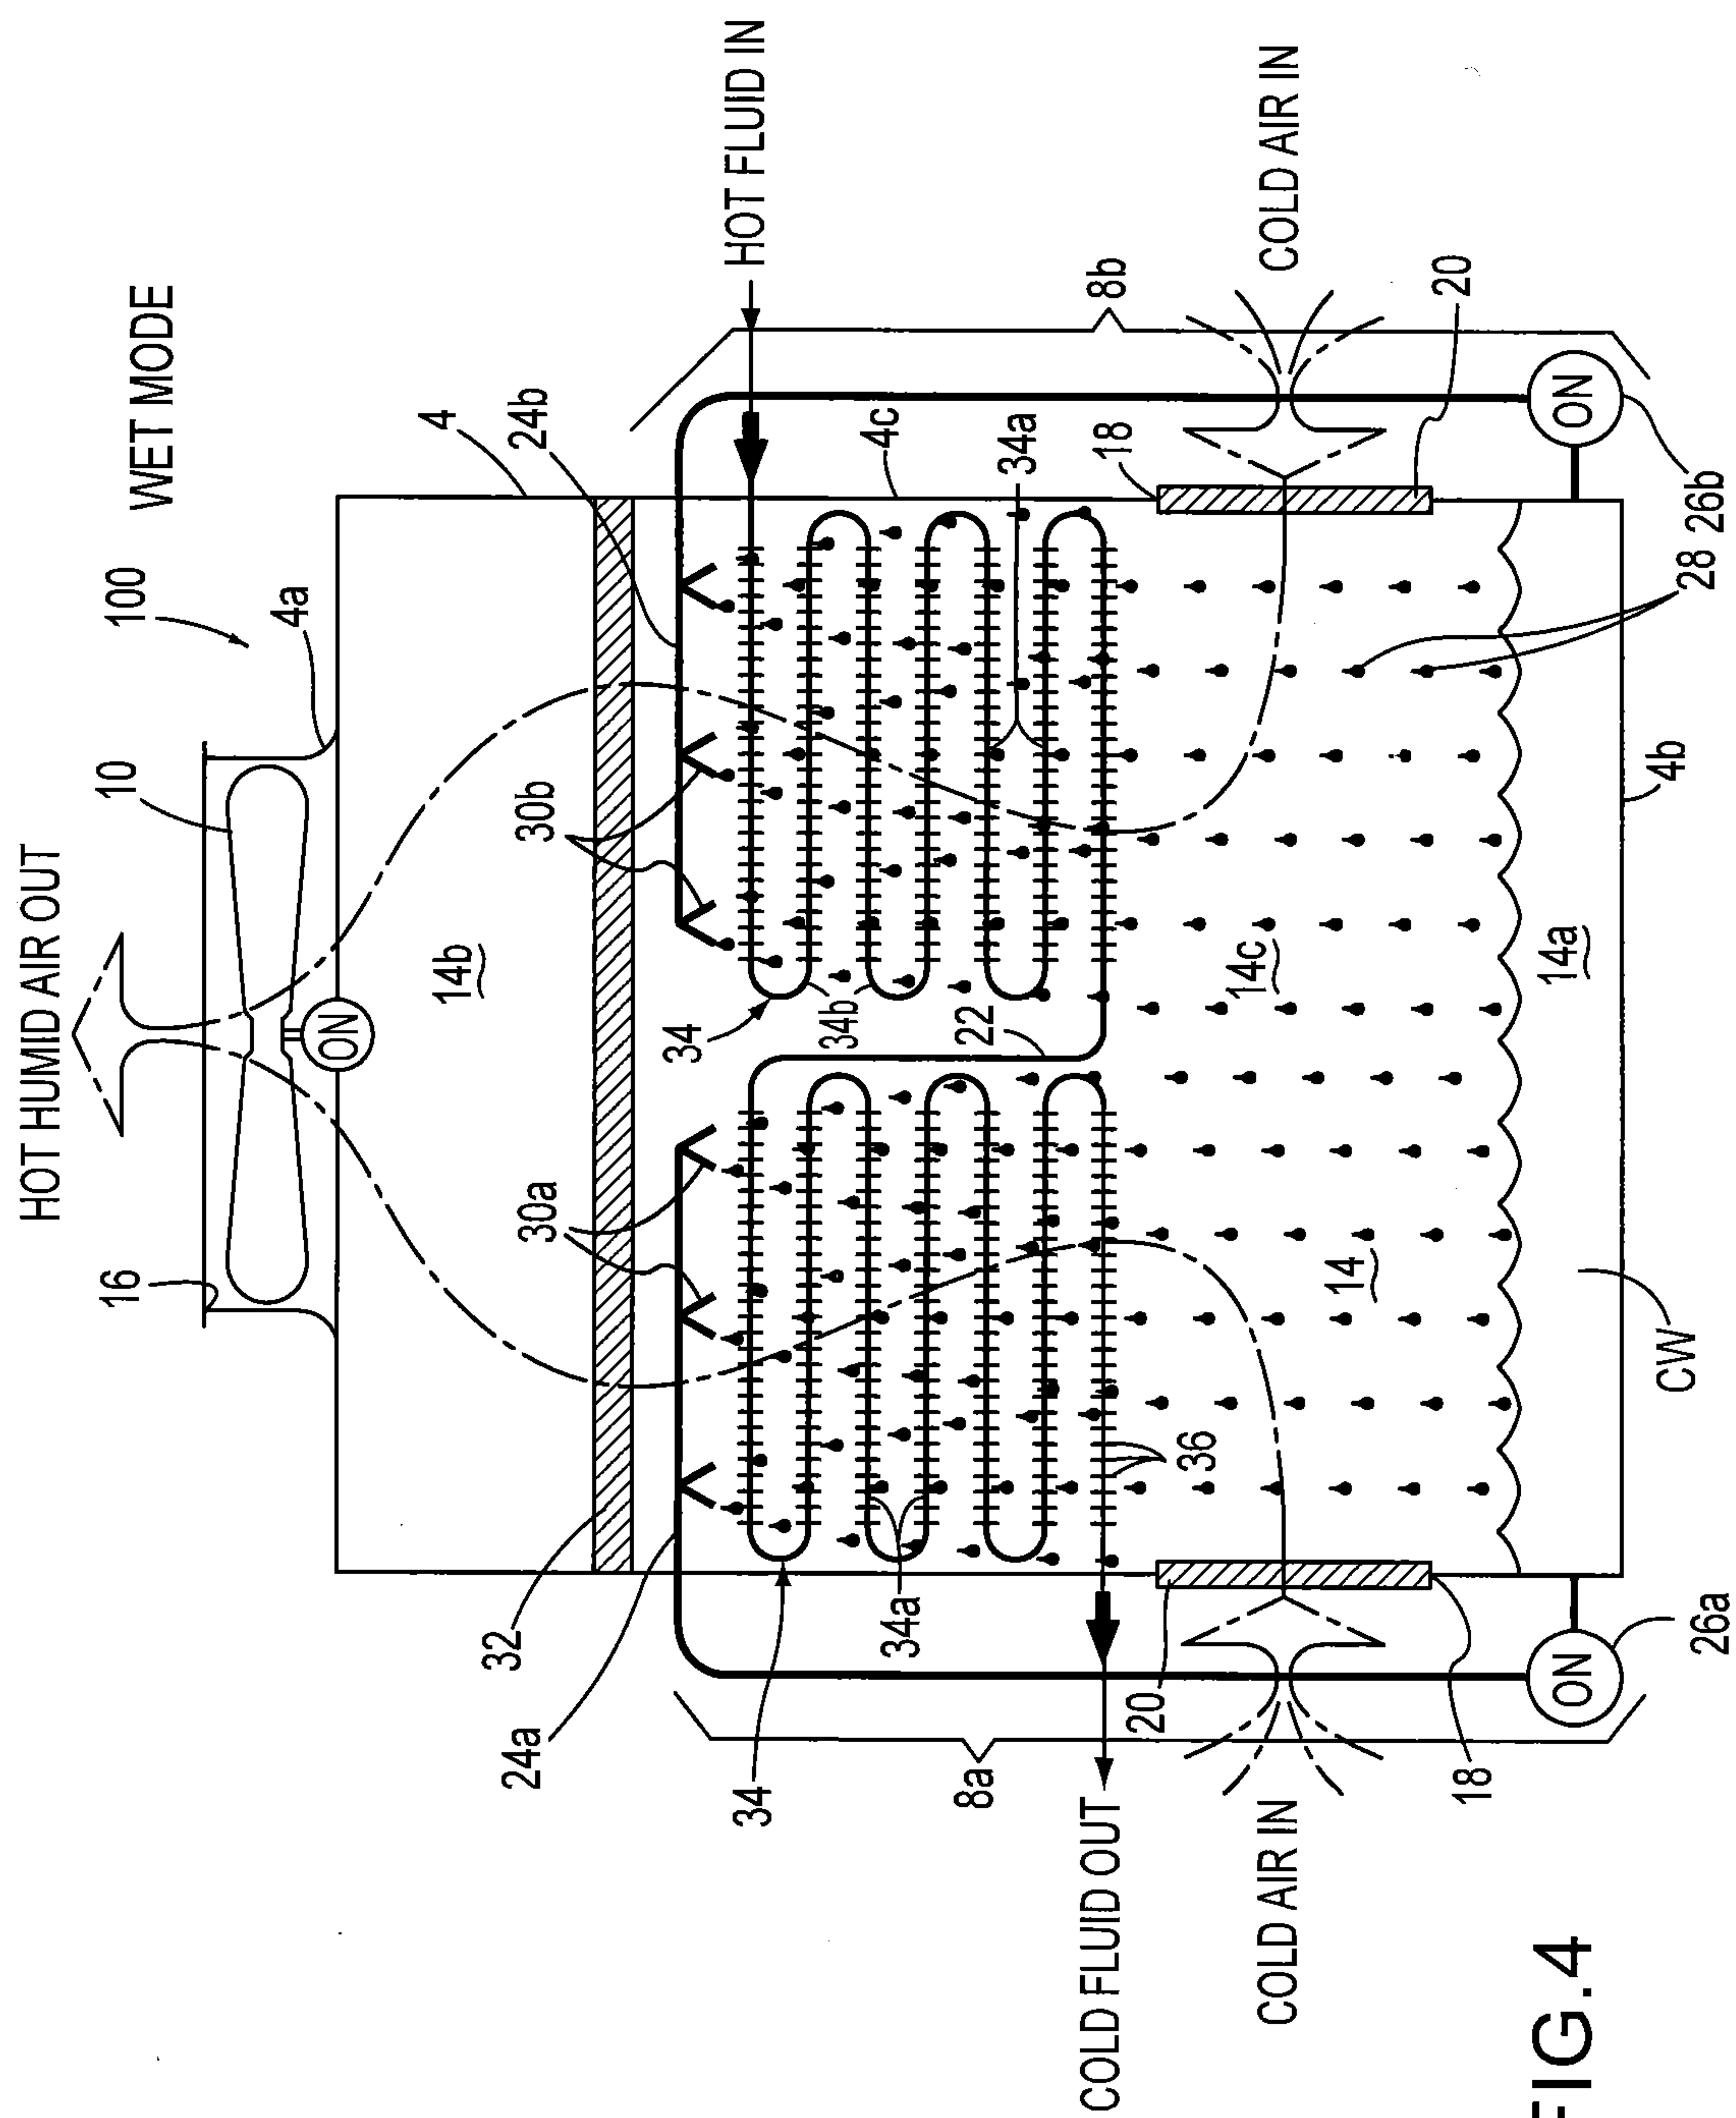

5/19



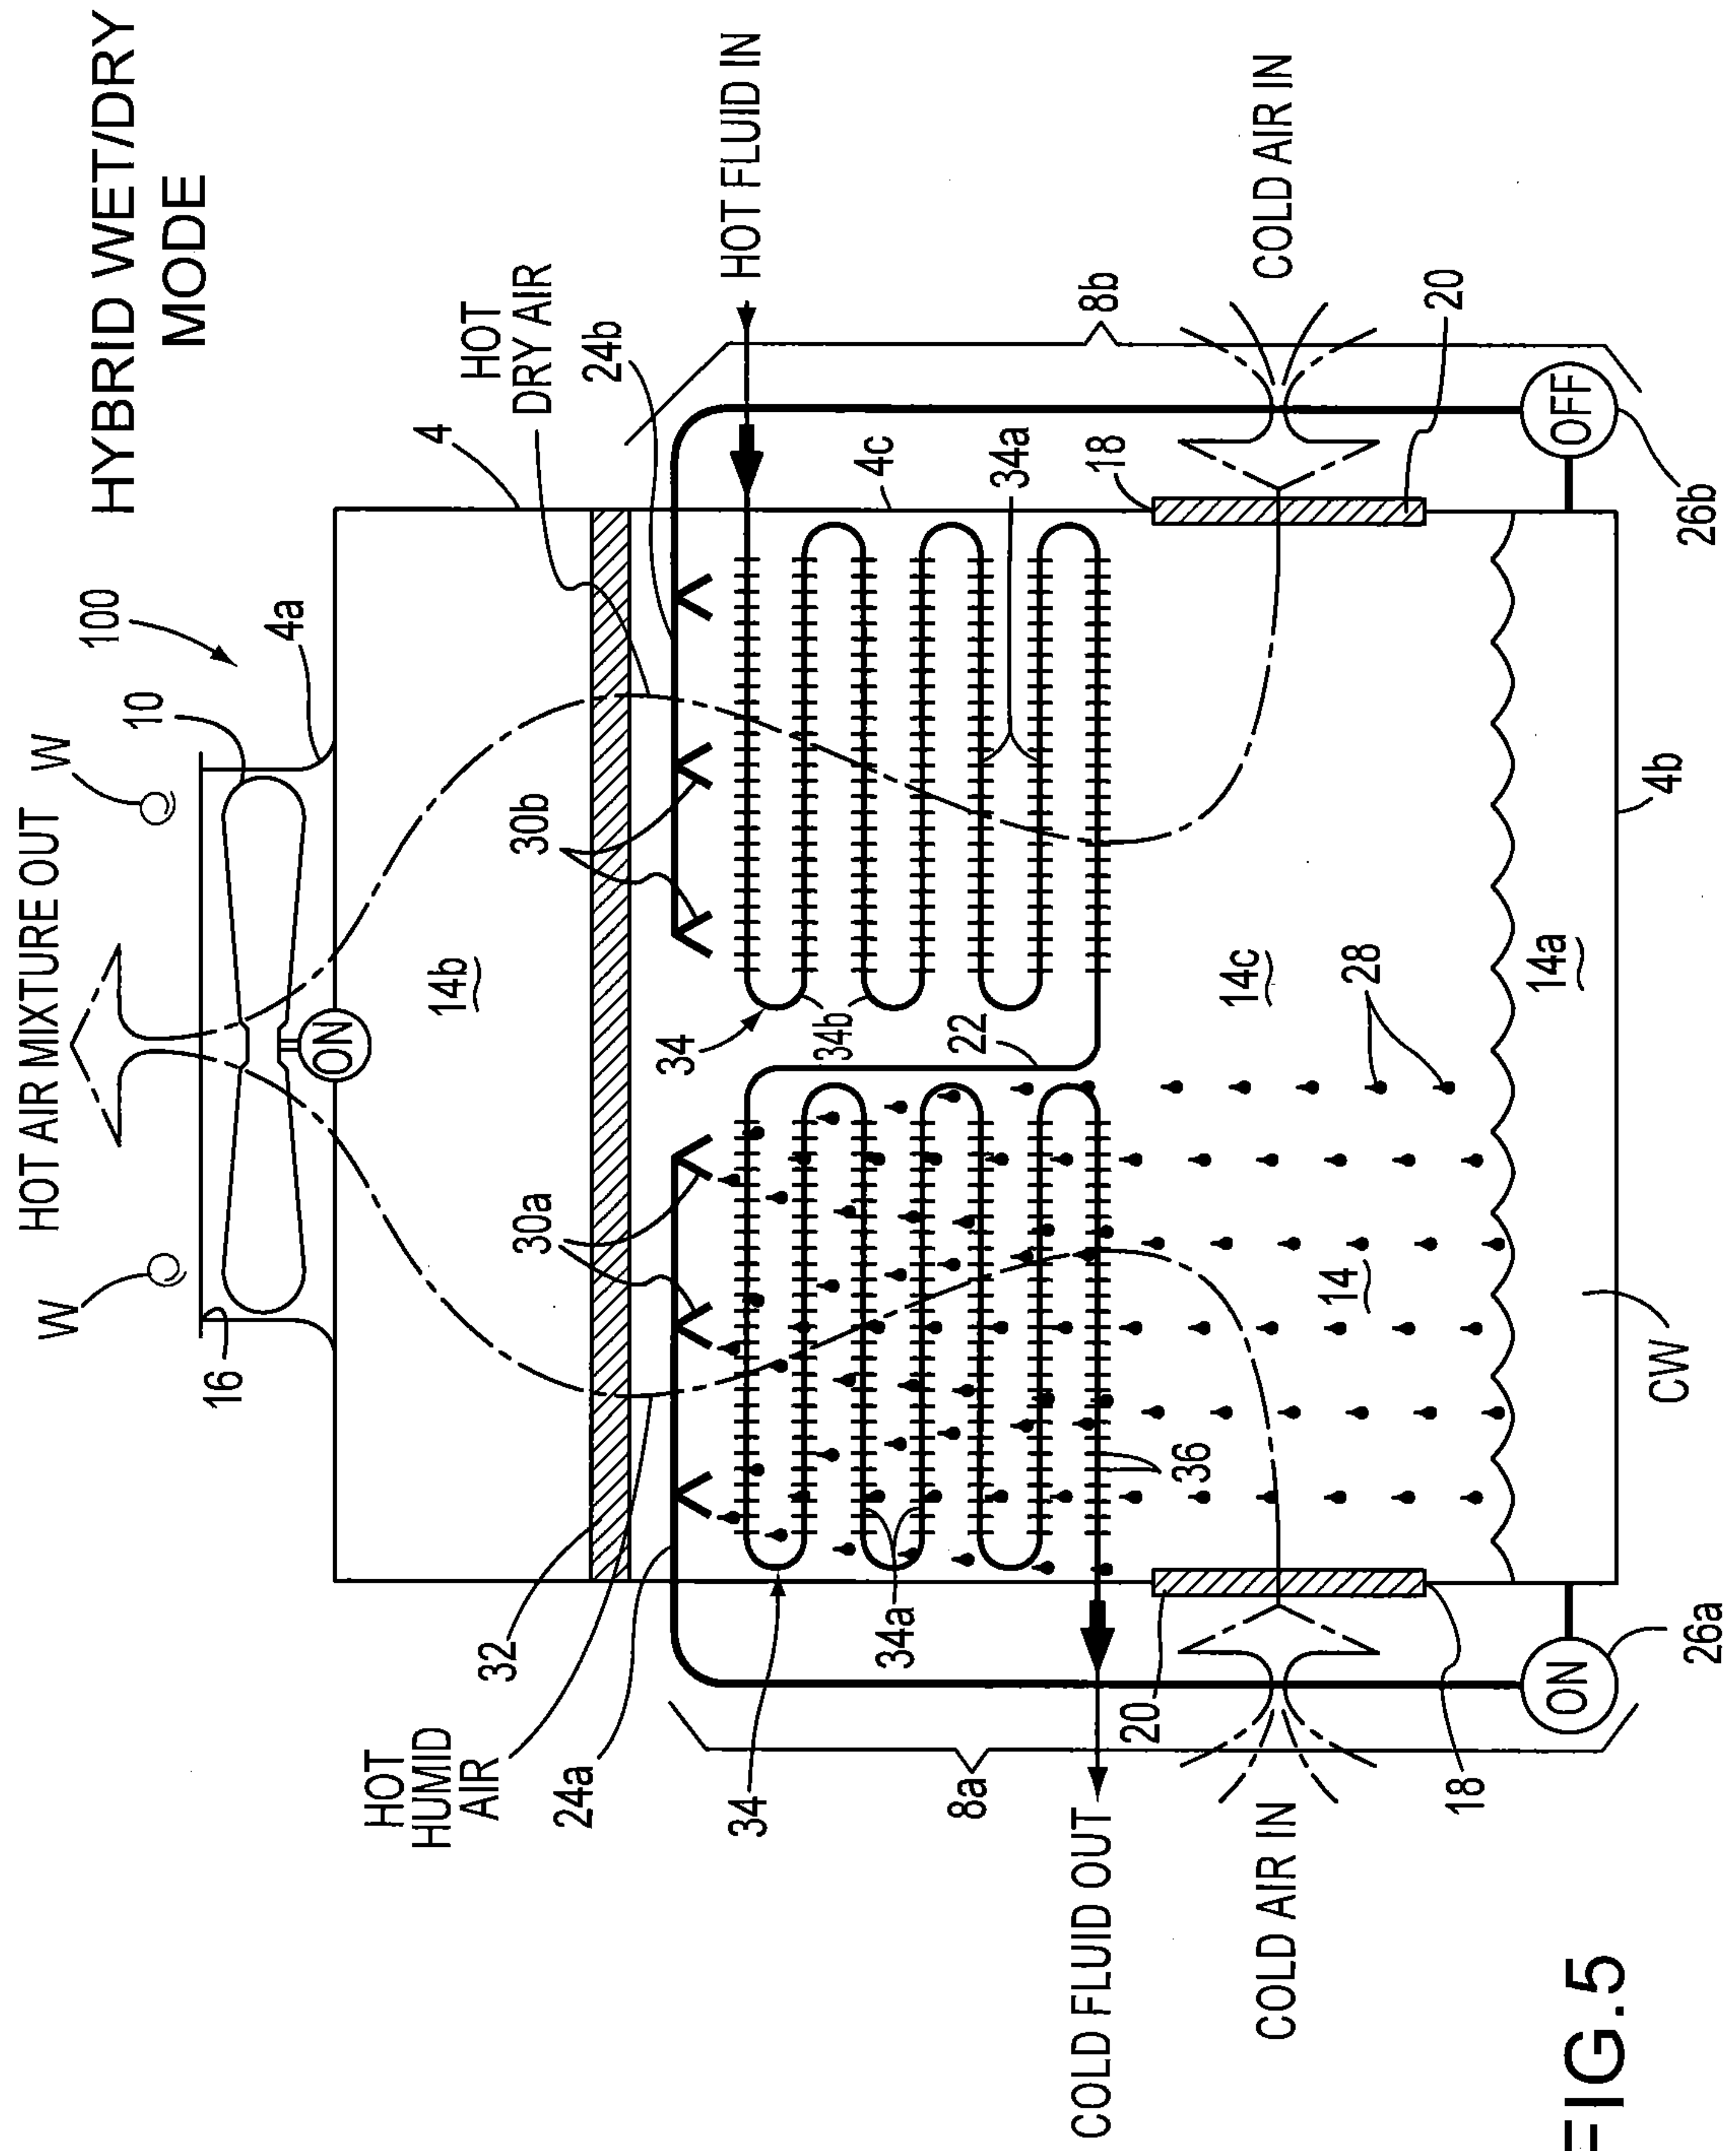


FIG. 5


7/19

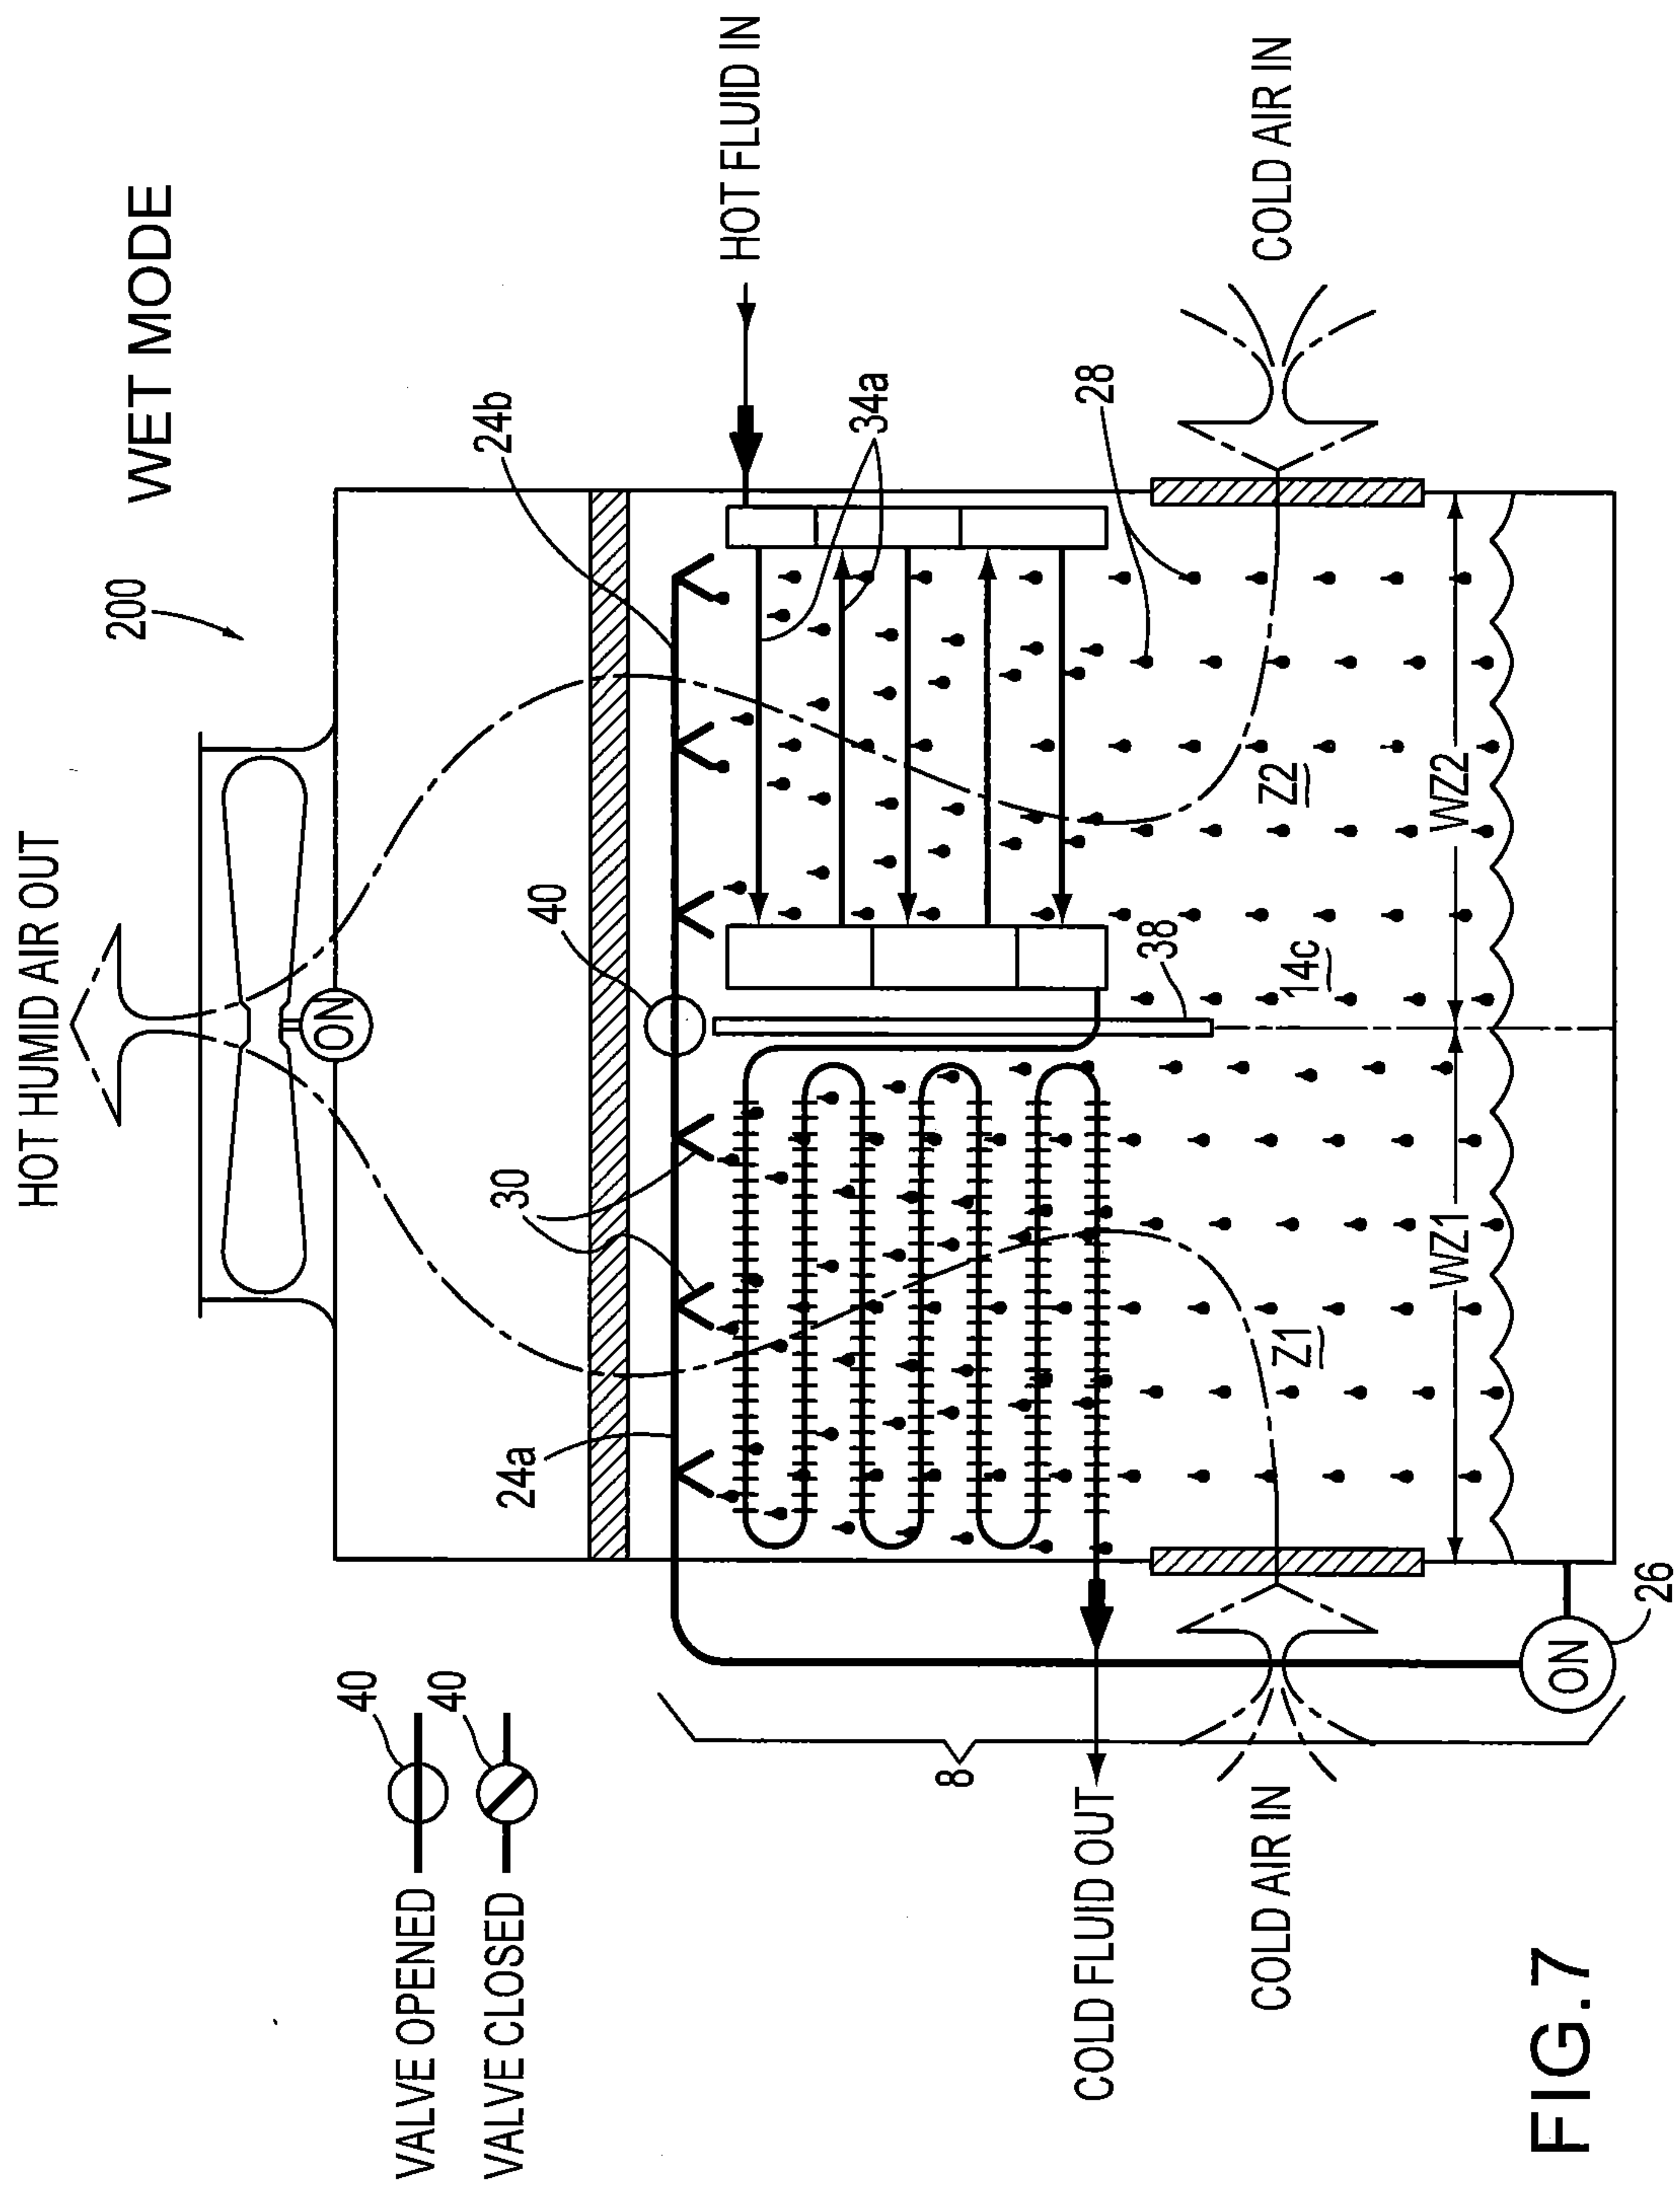


8/19

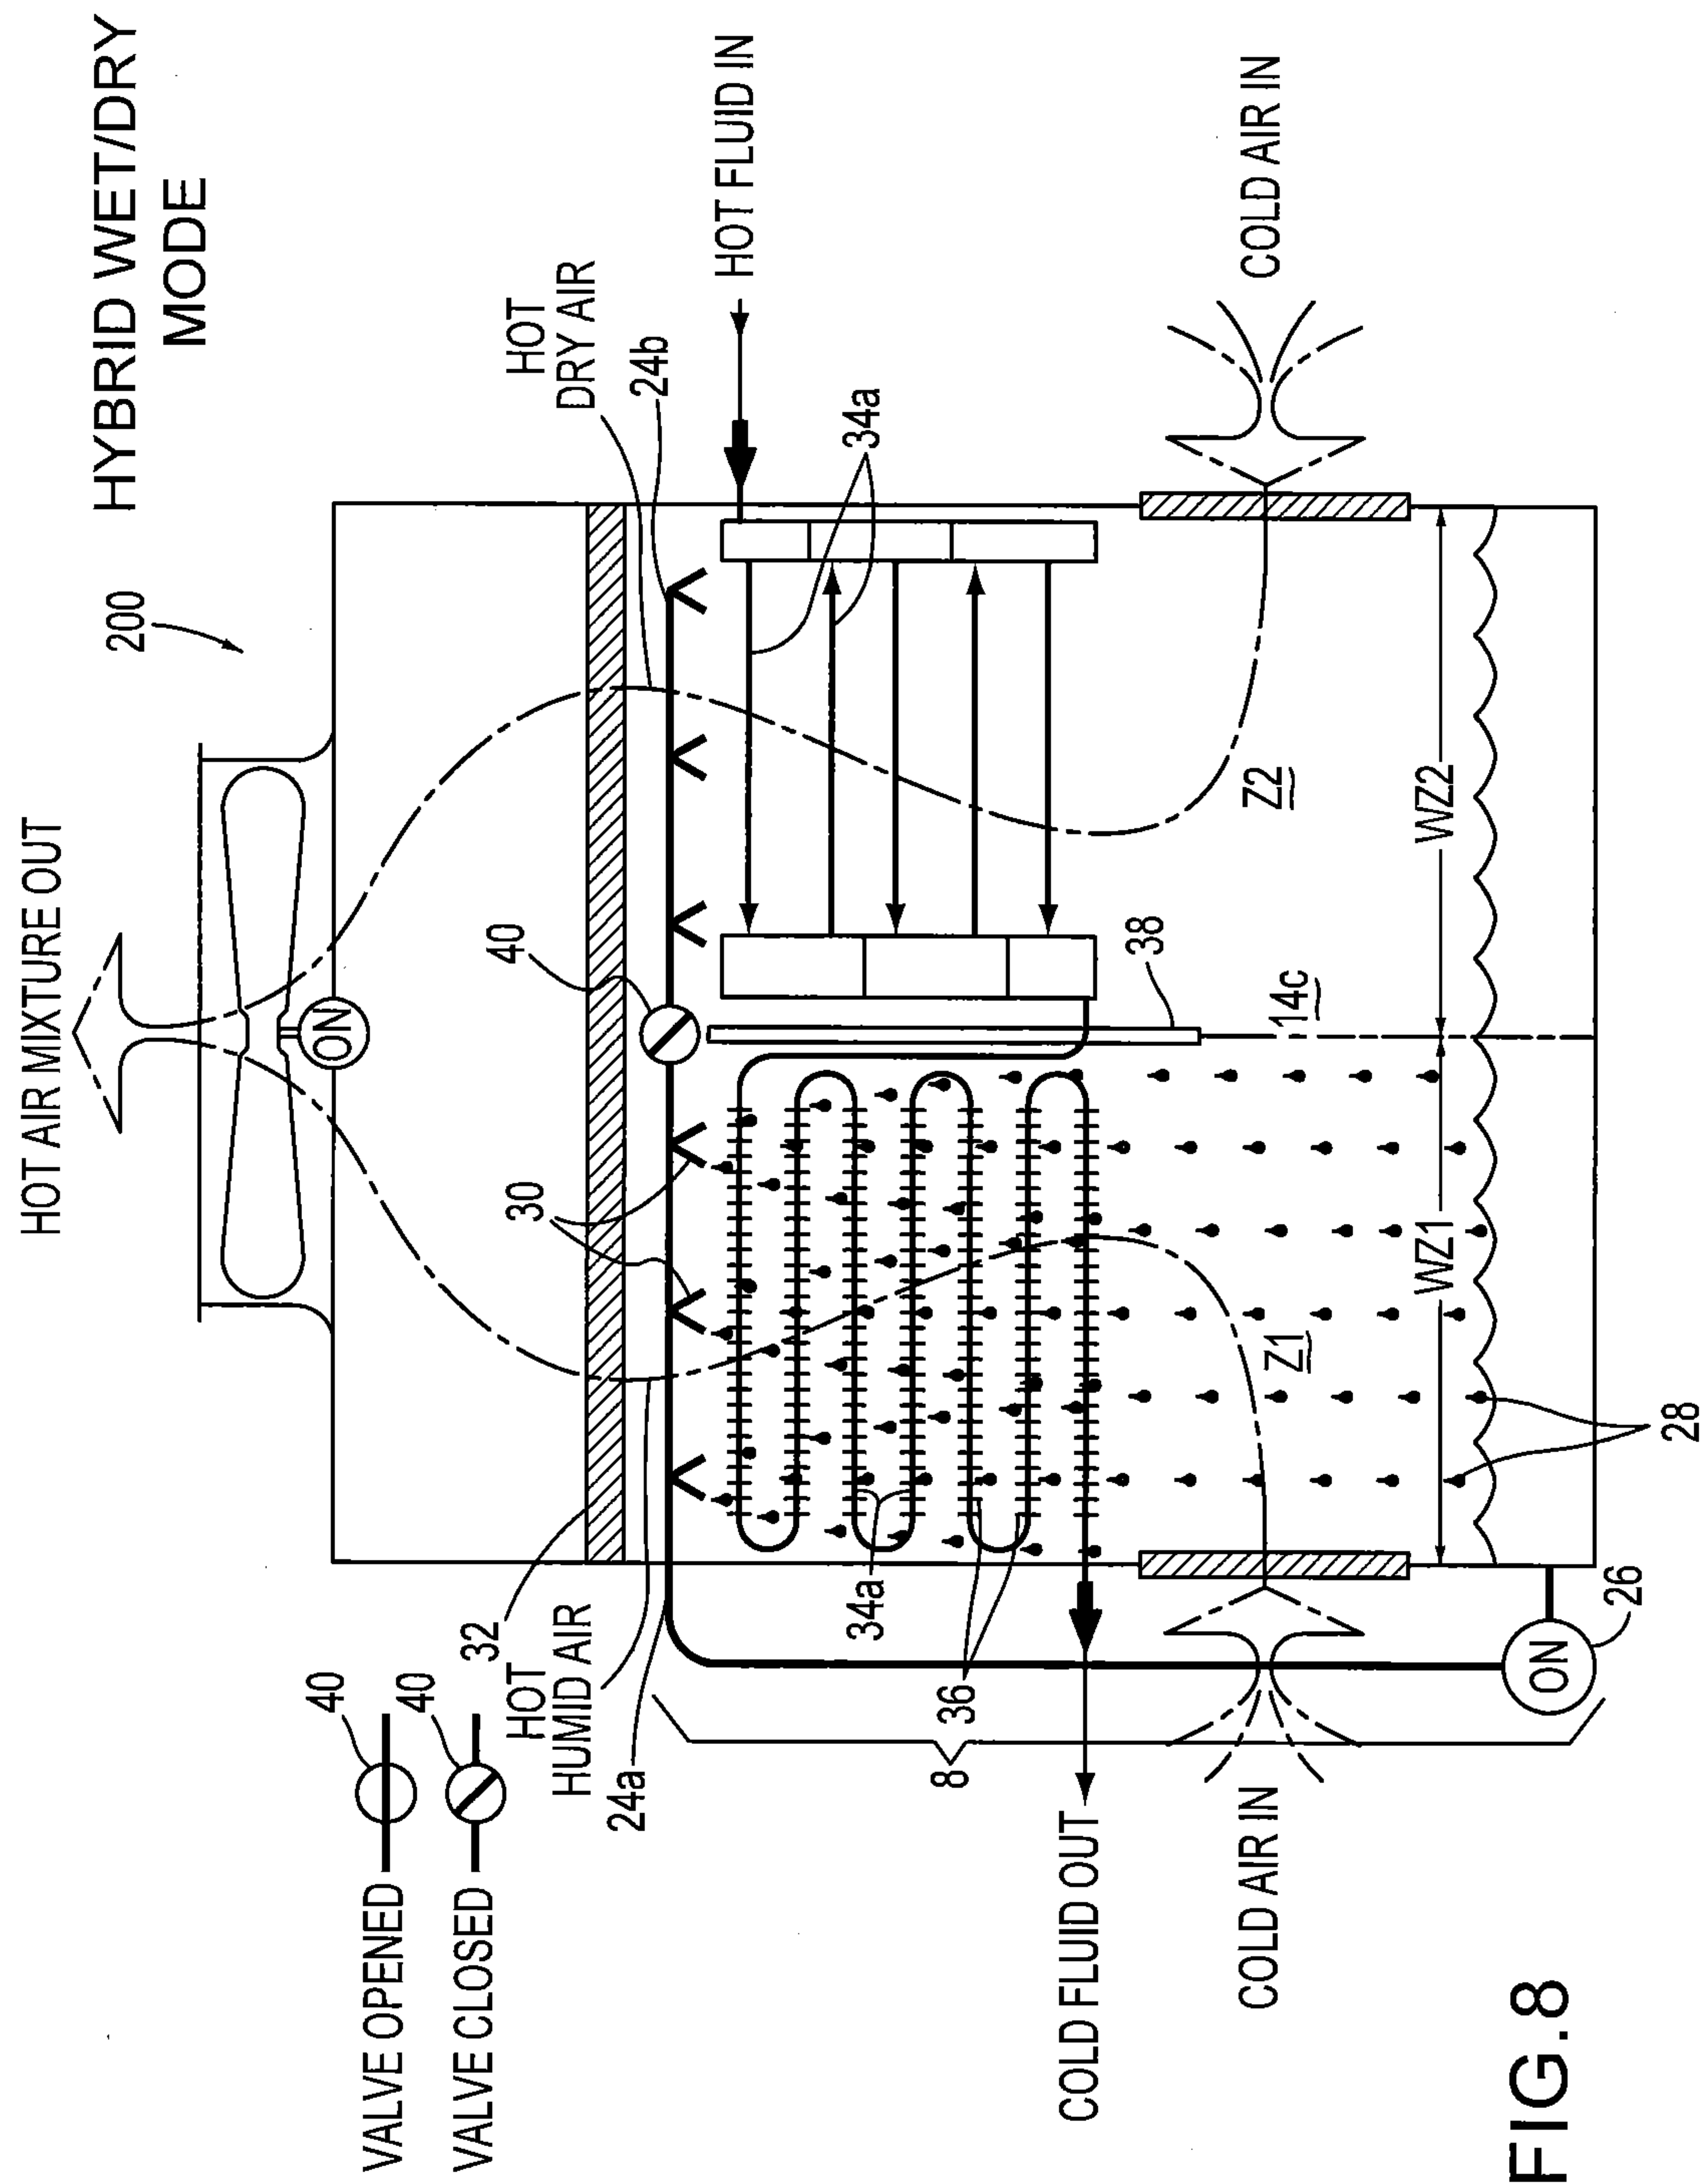

9/19

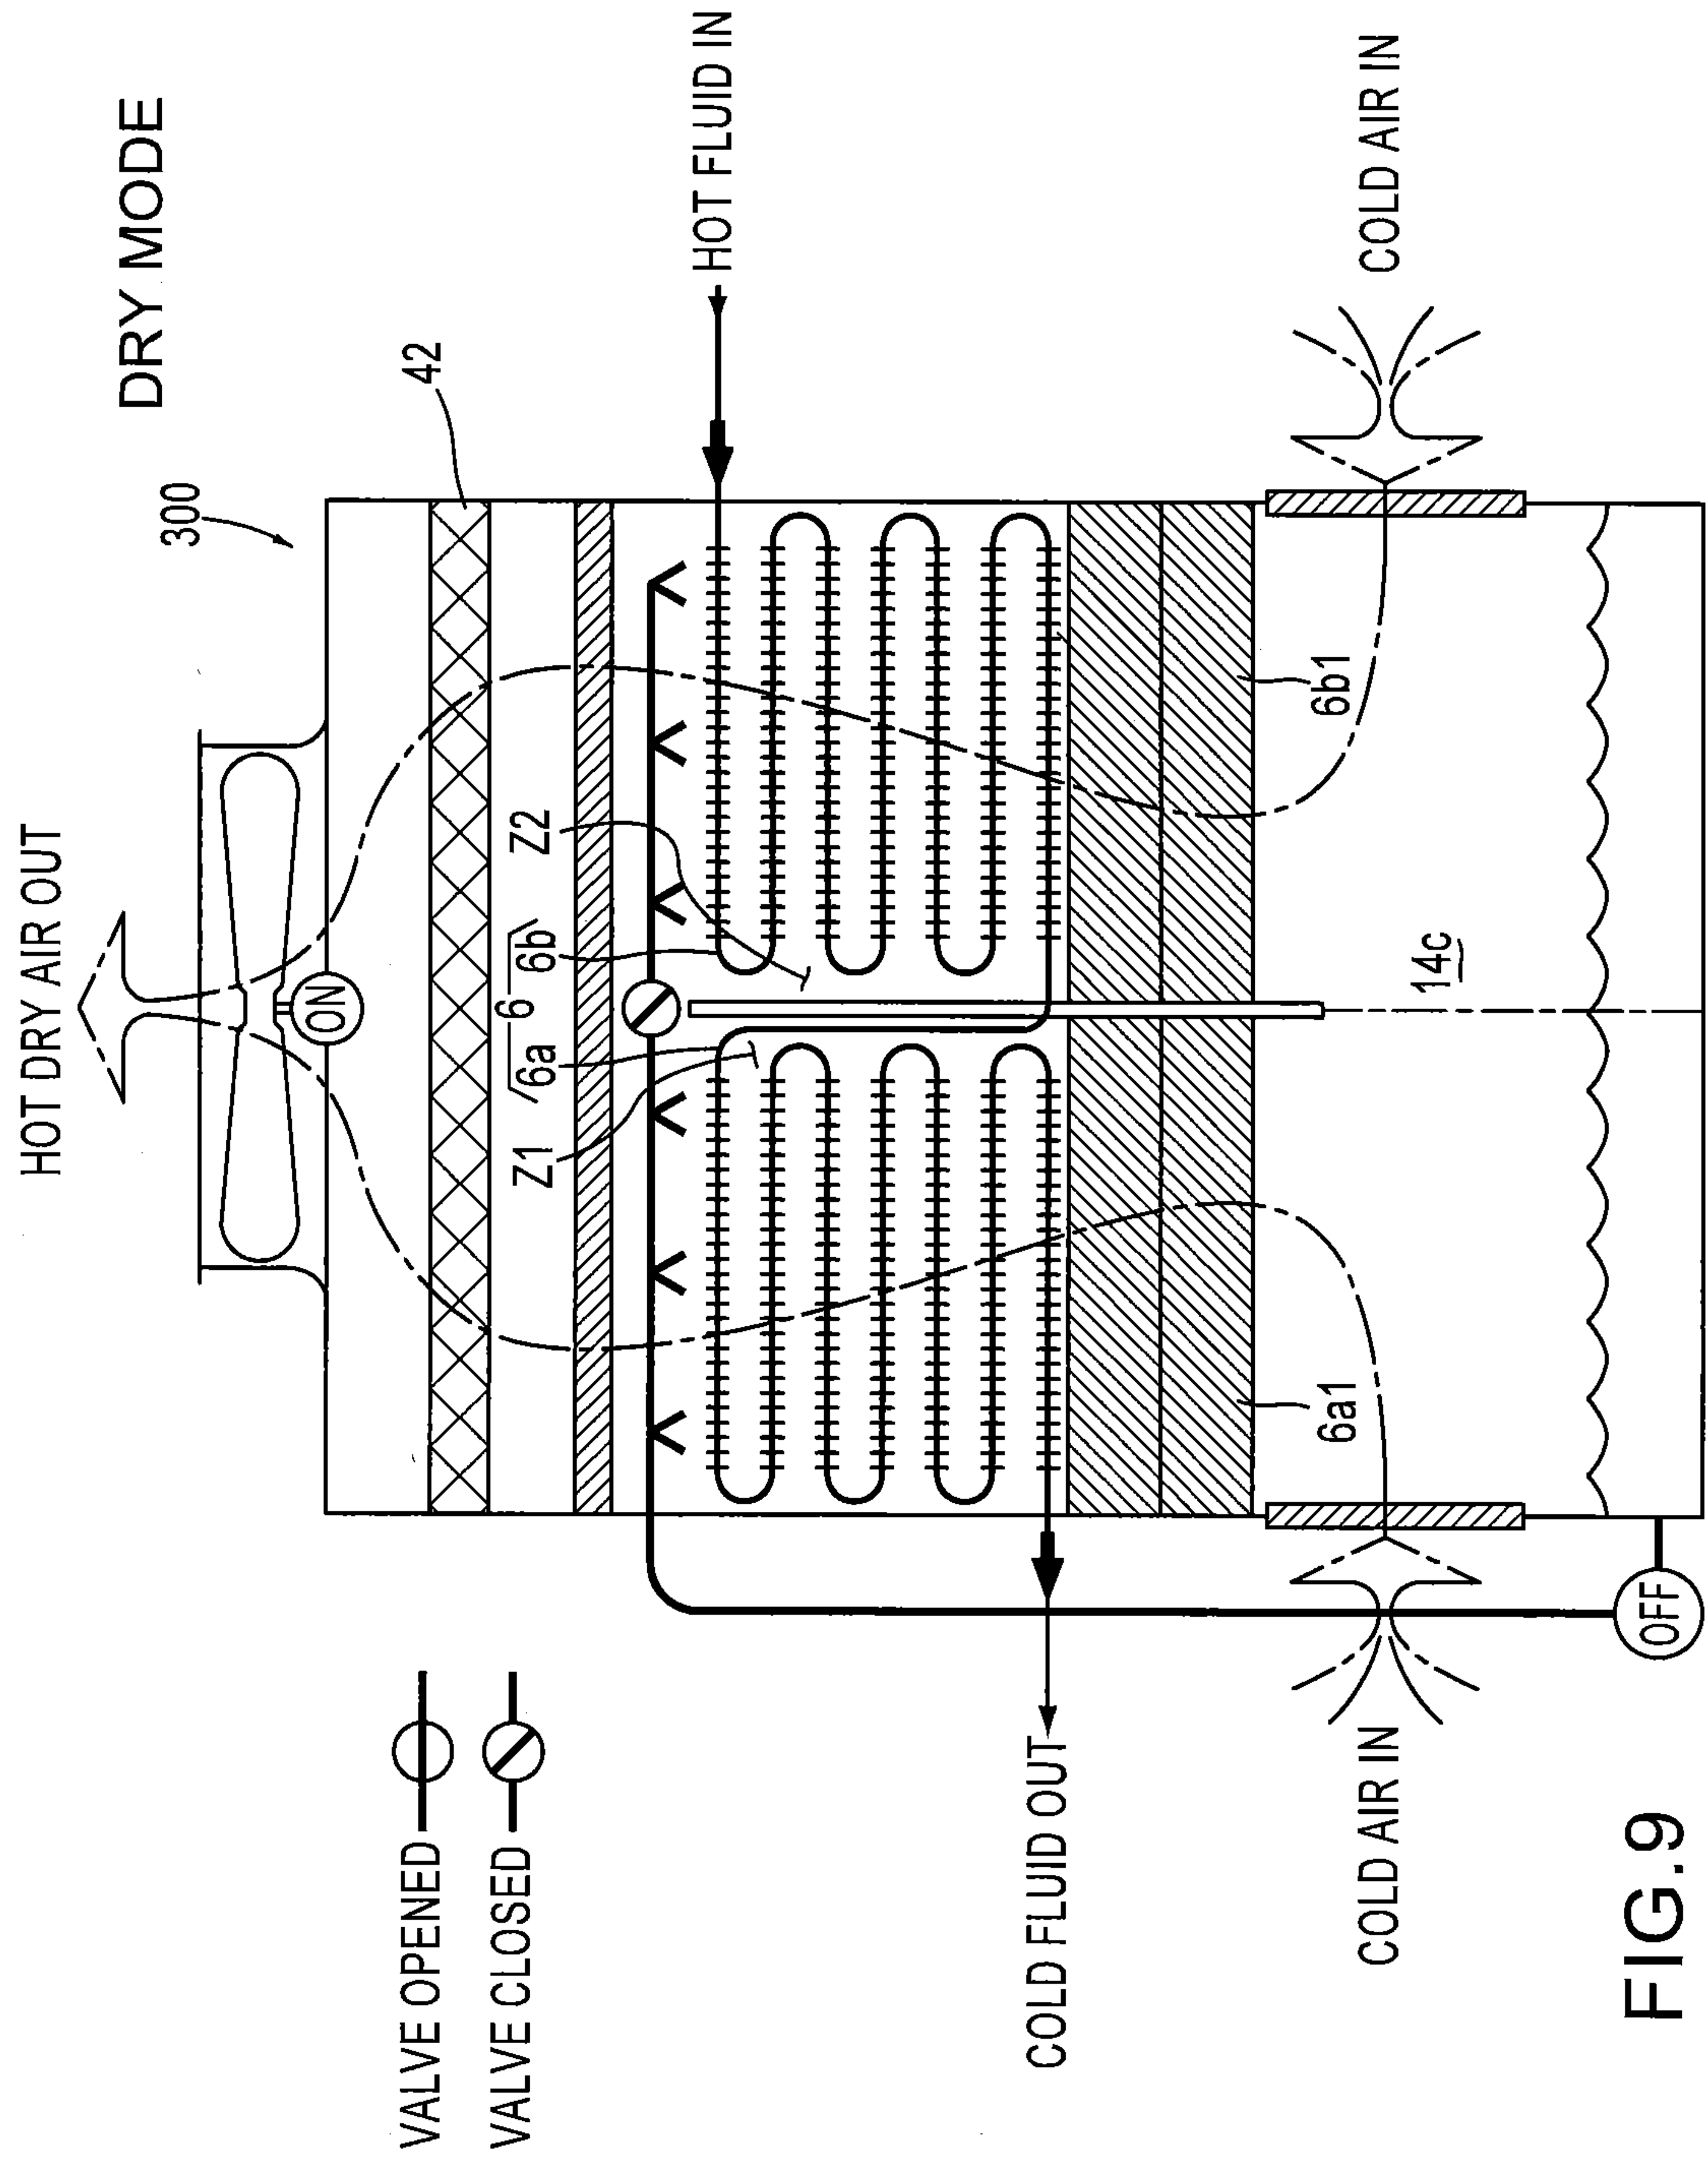

10/19

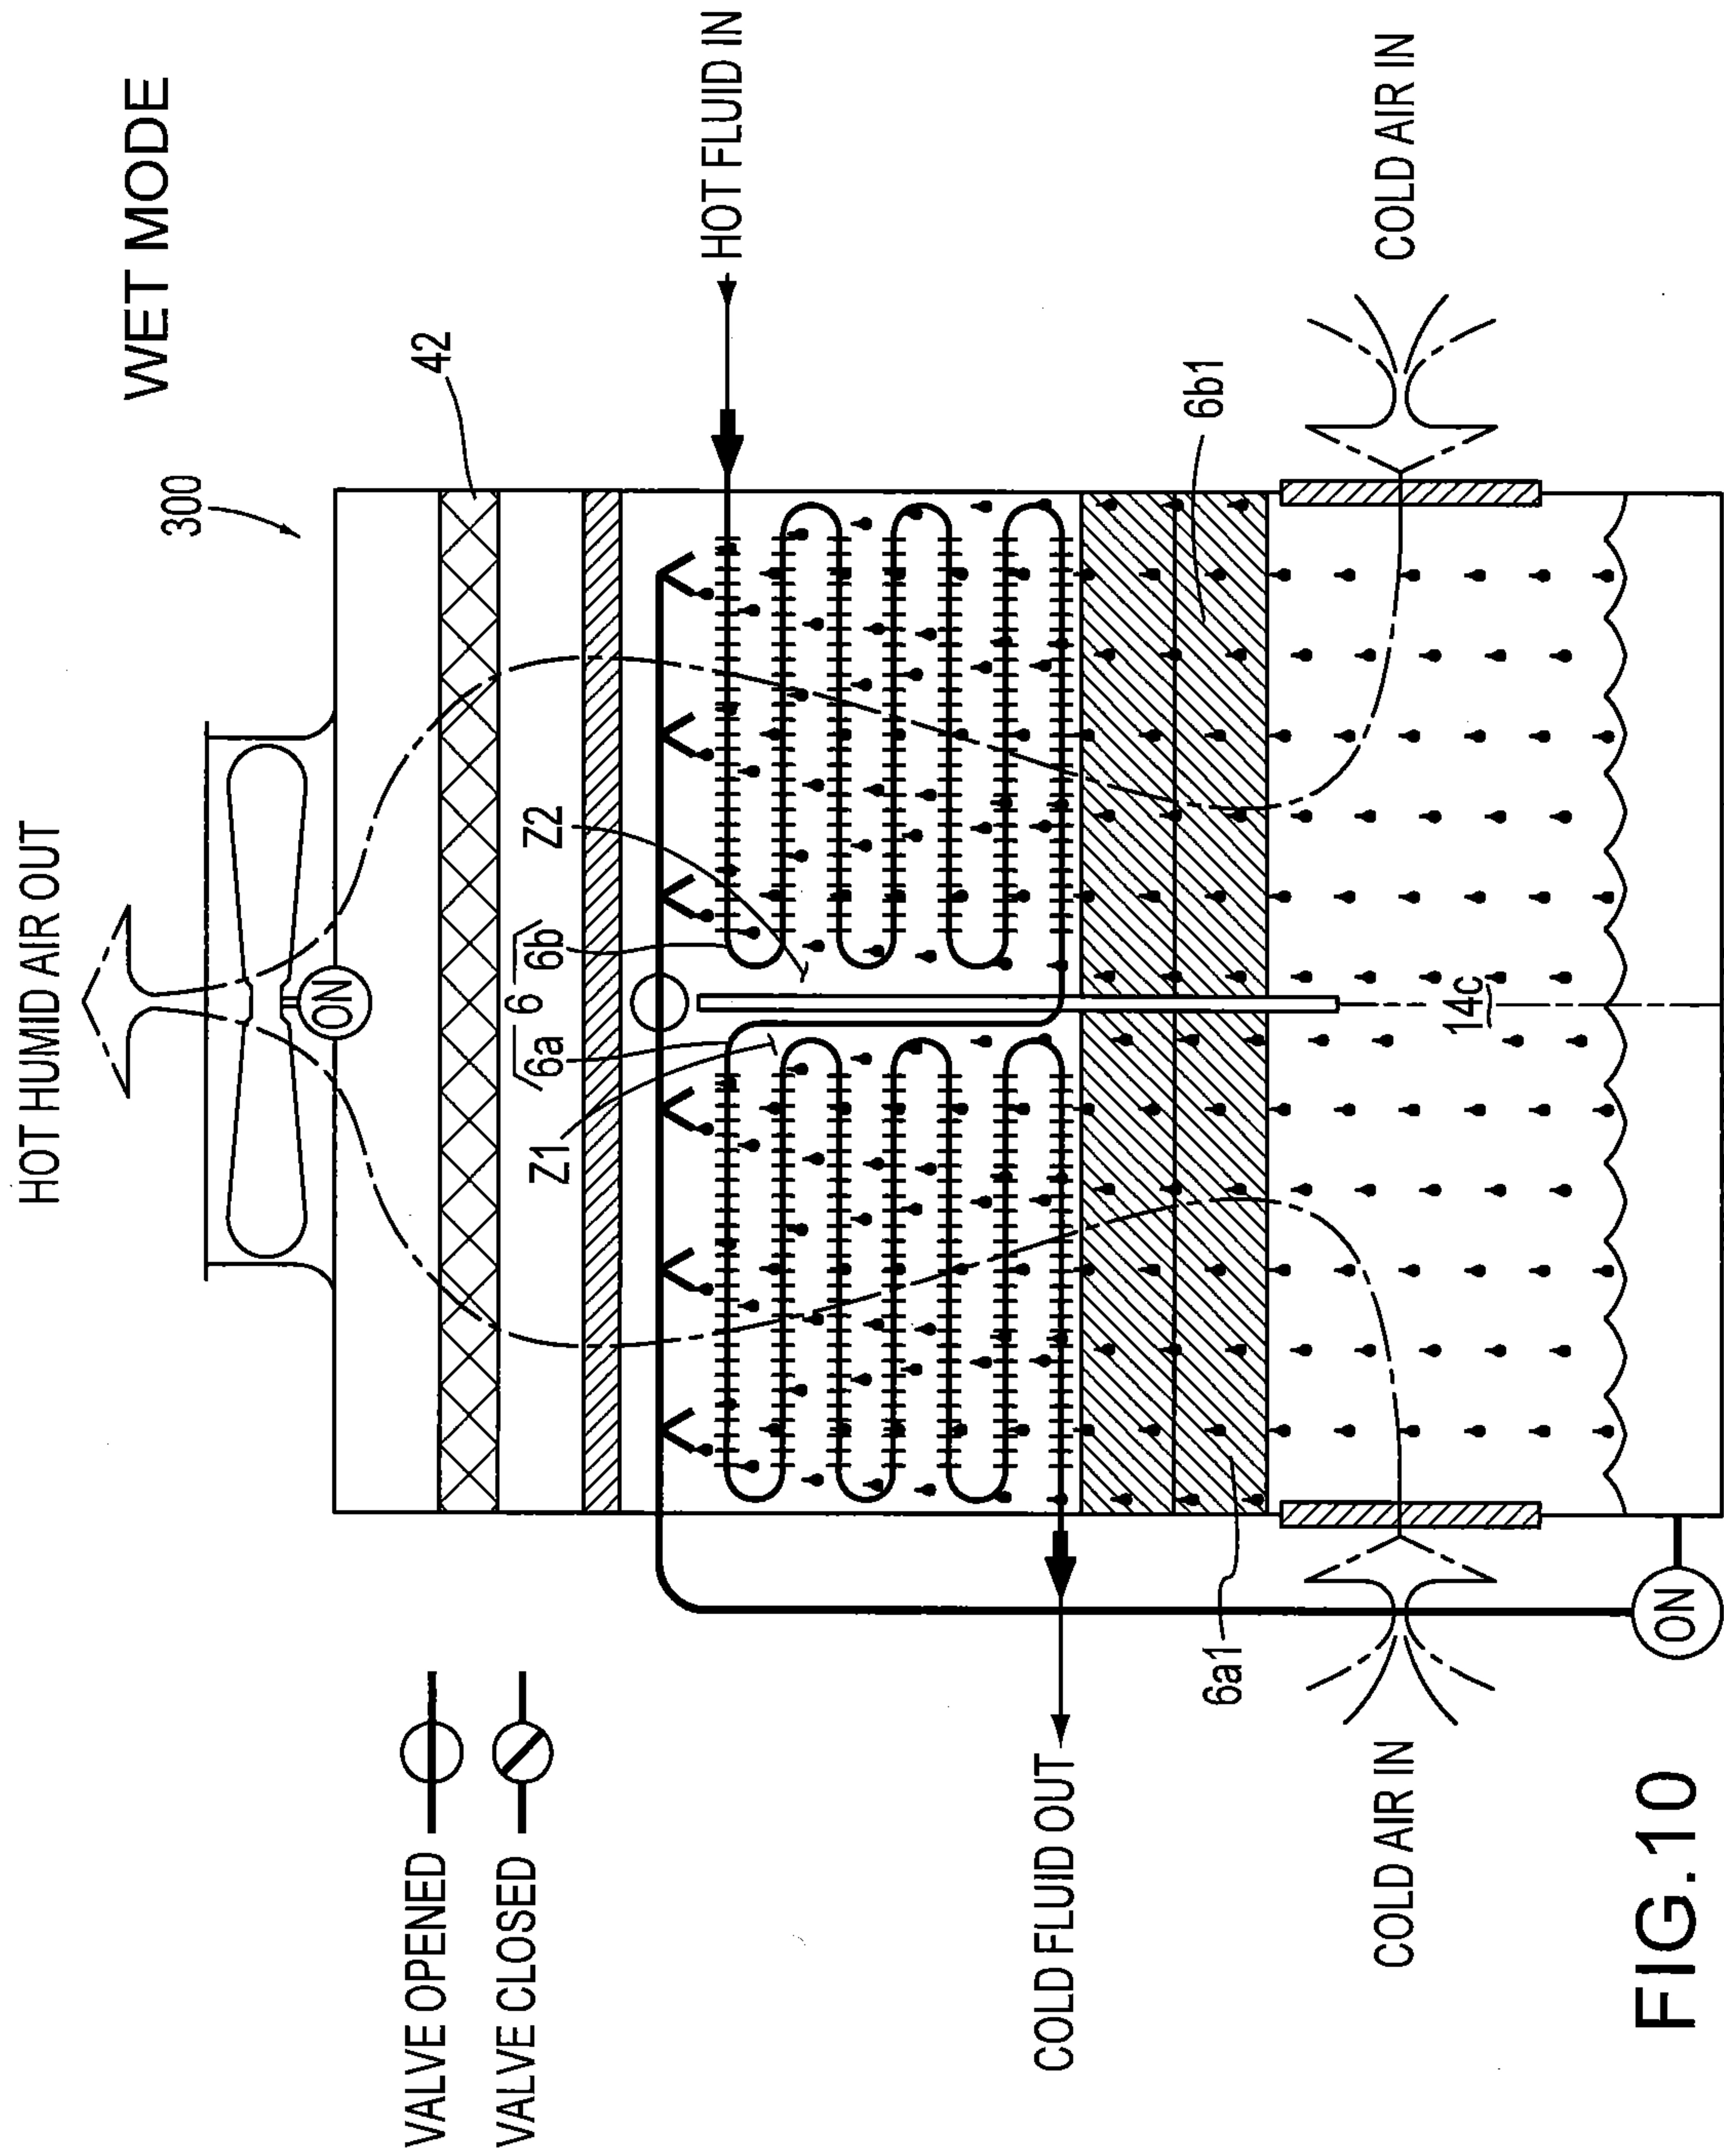

11/19


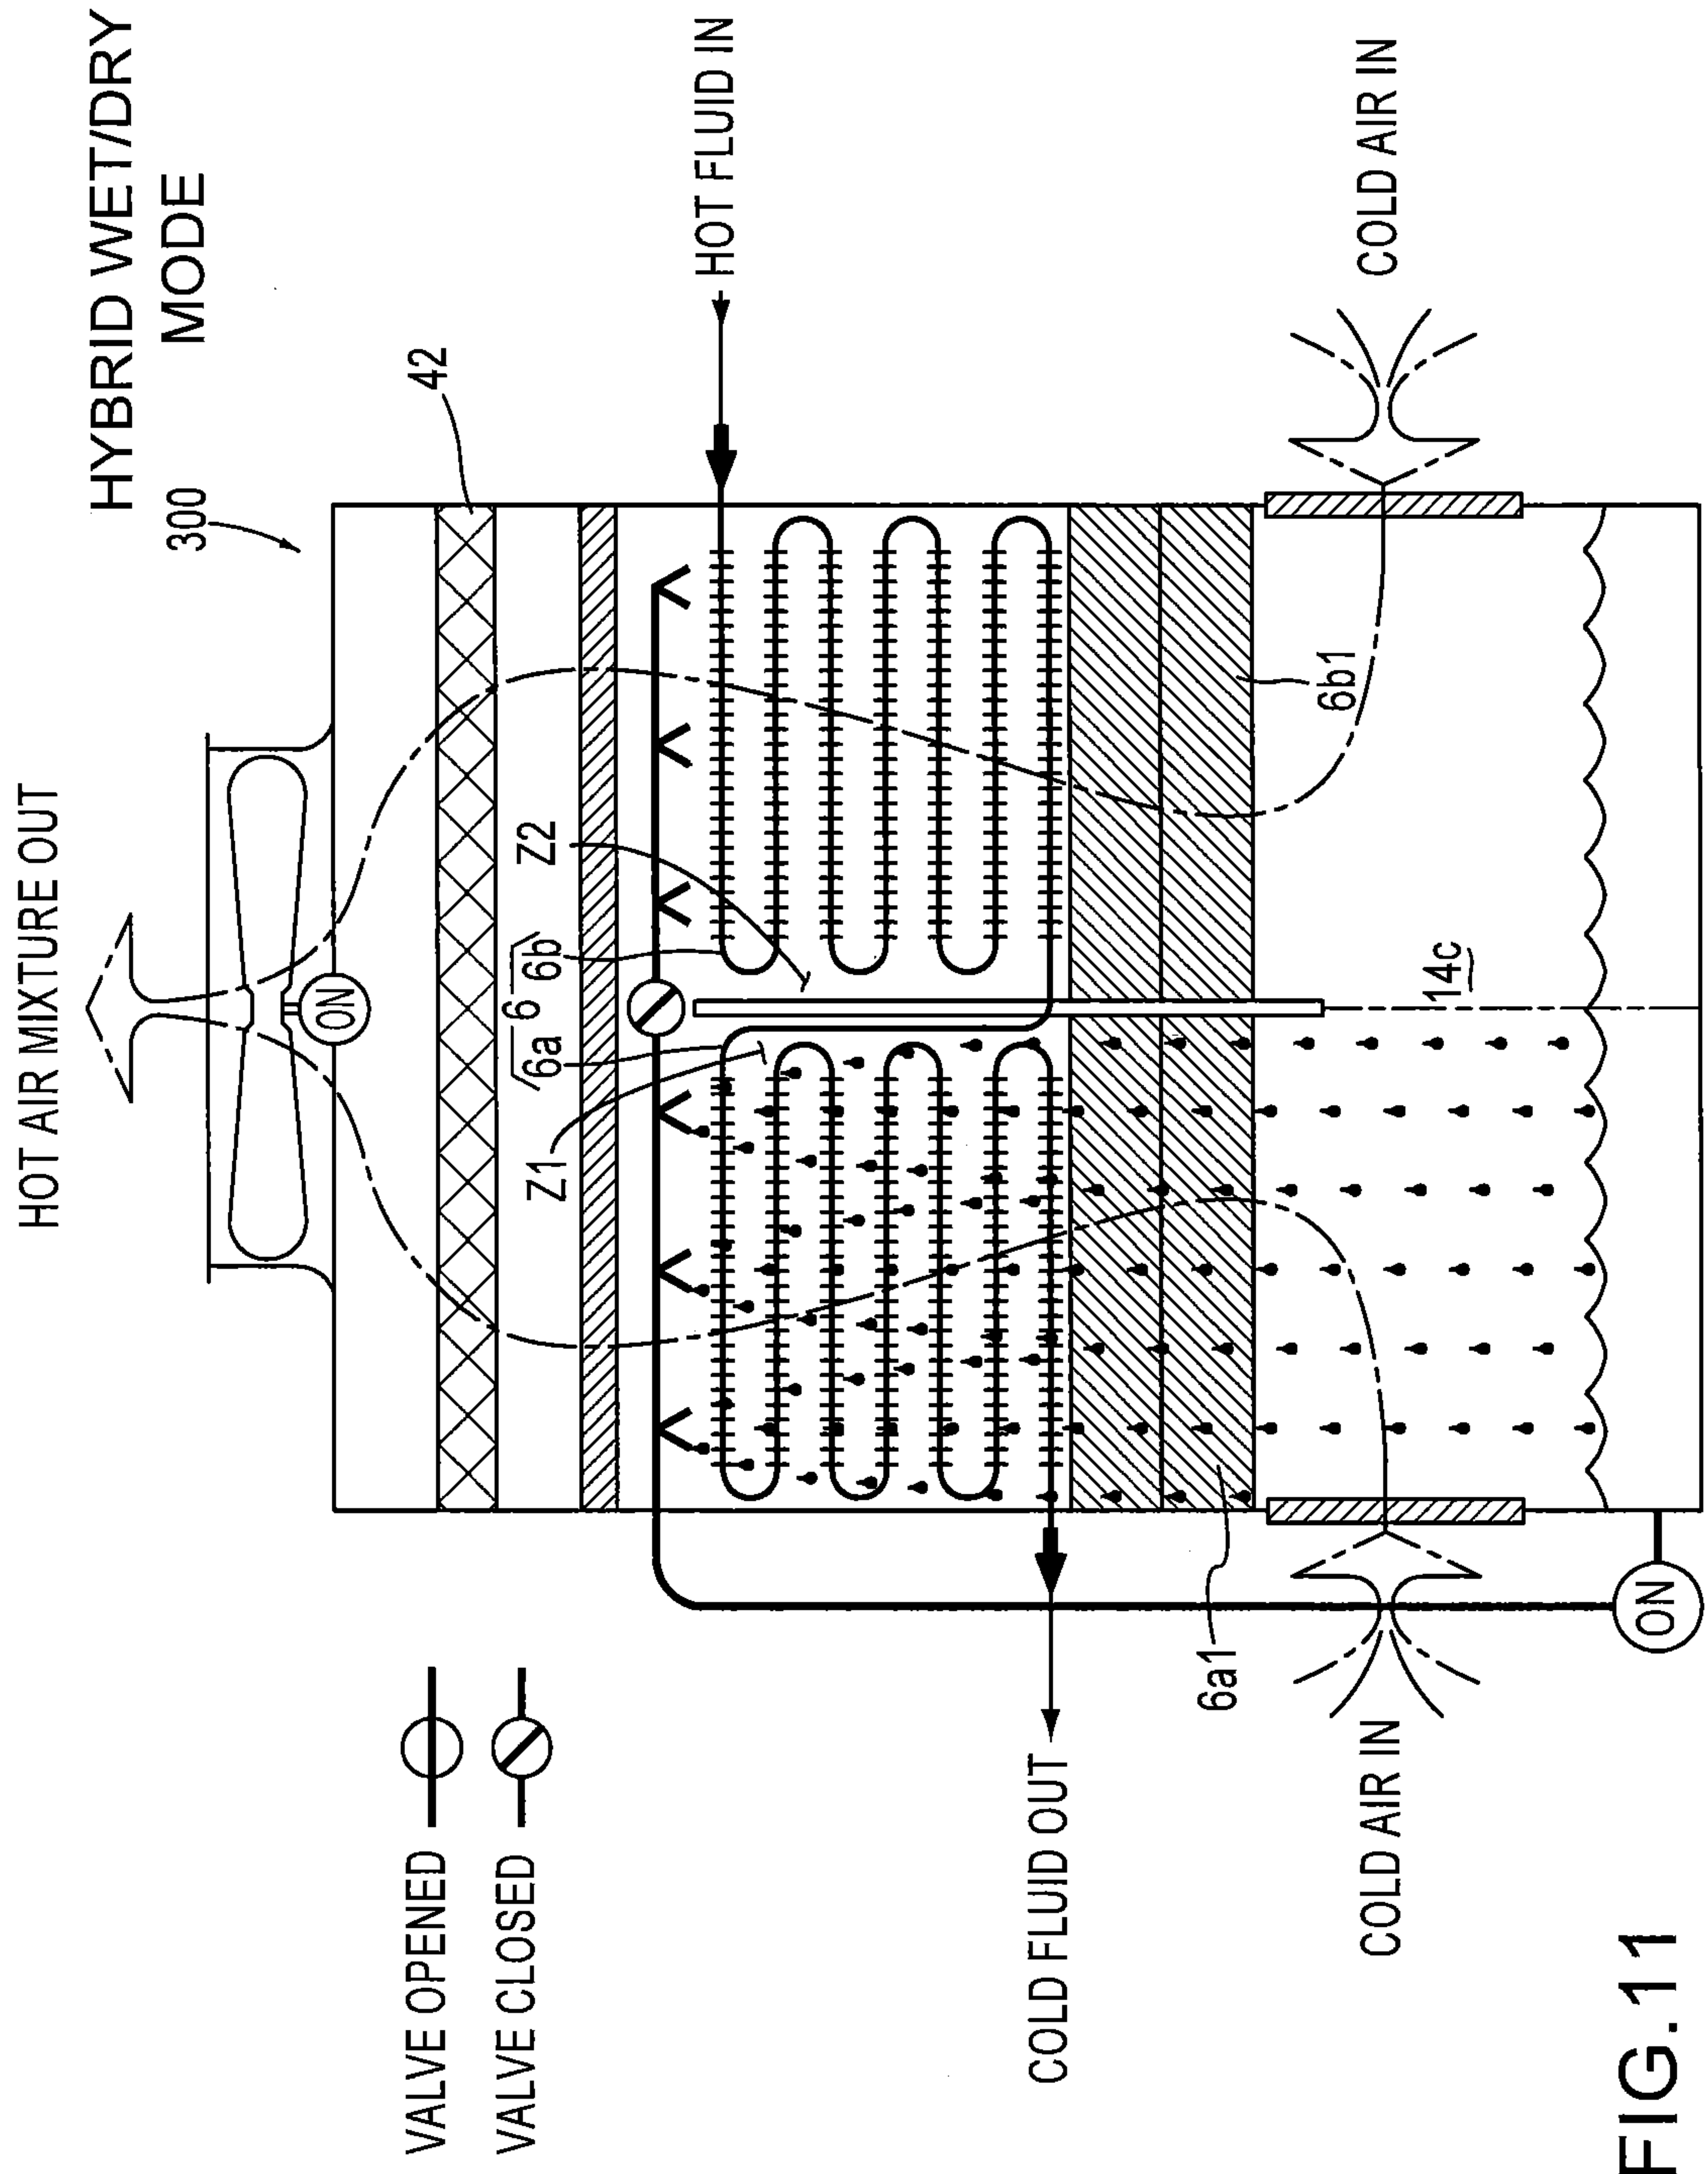


FIG.11

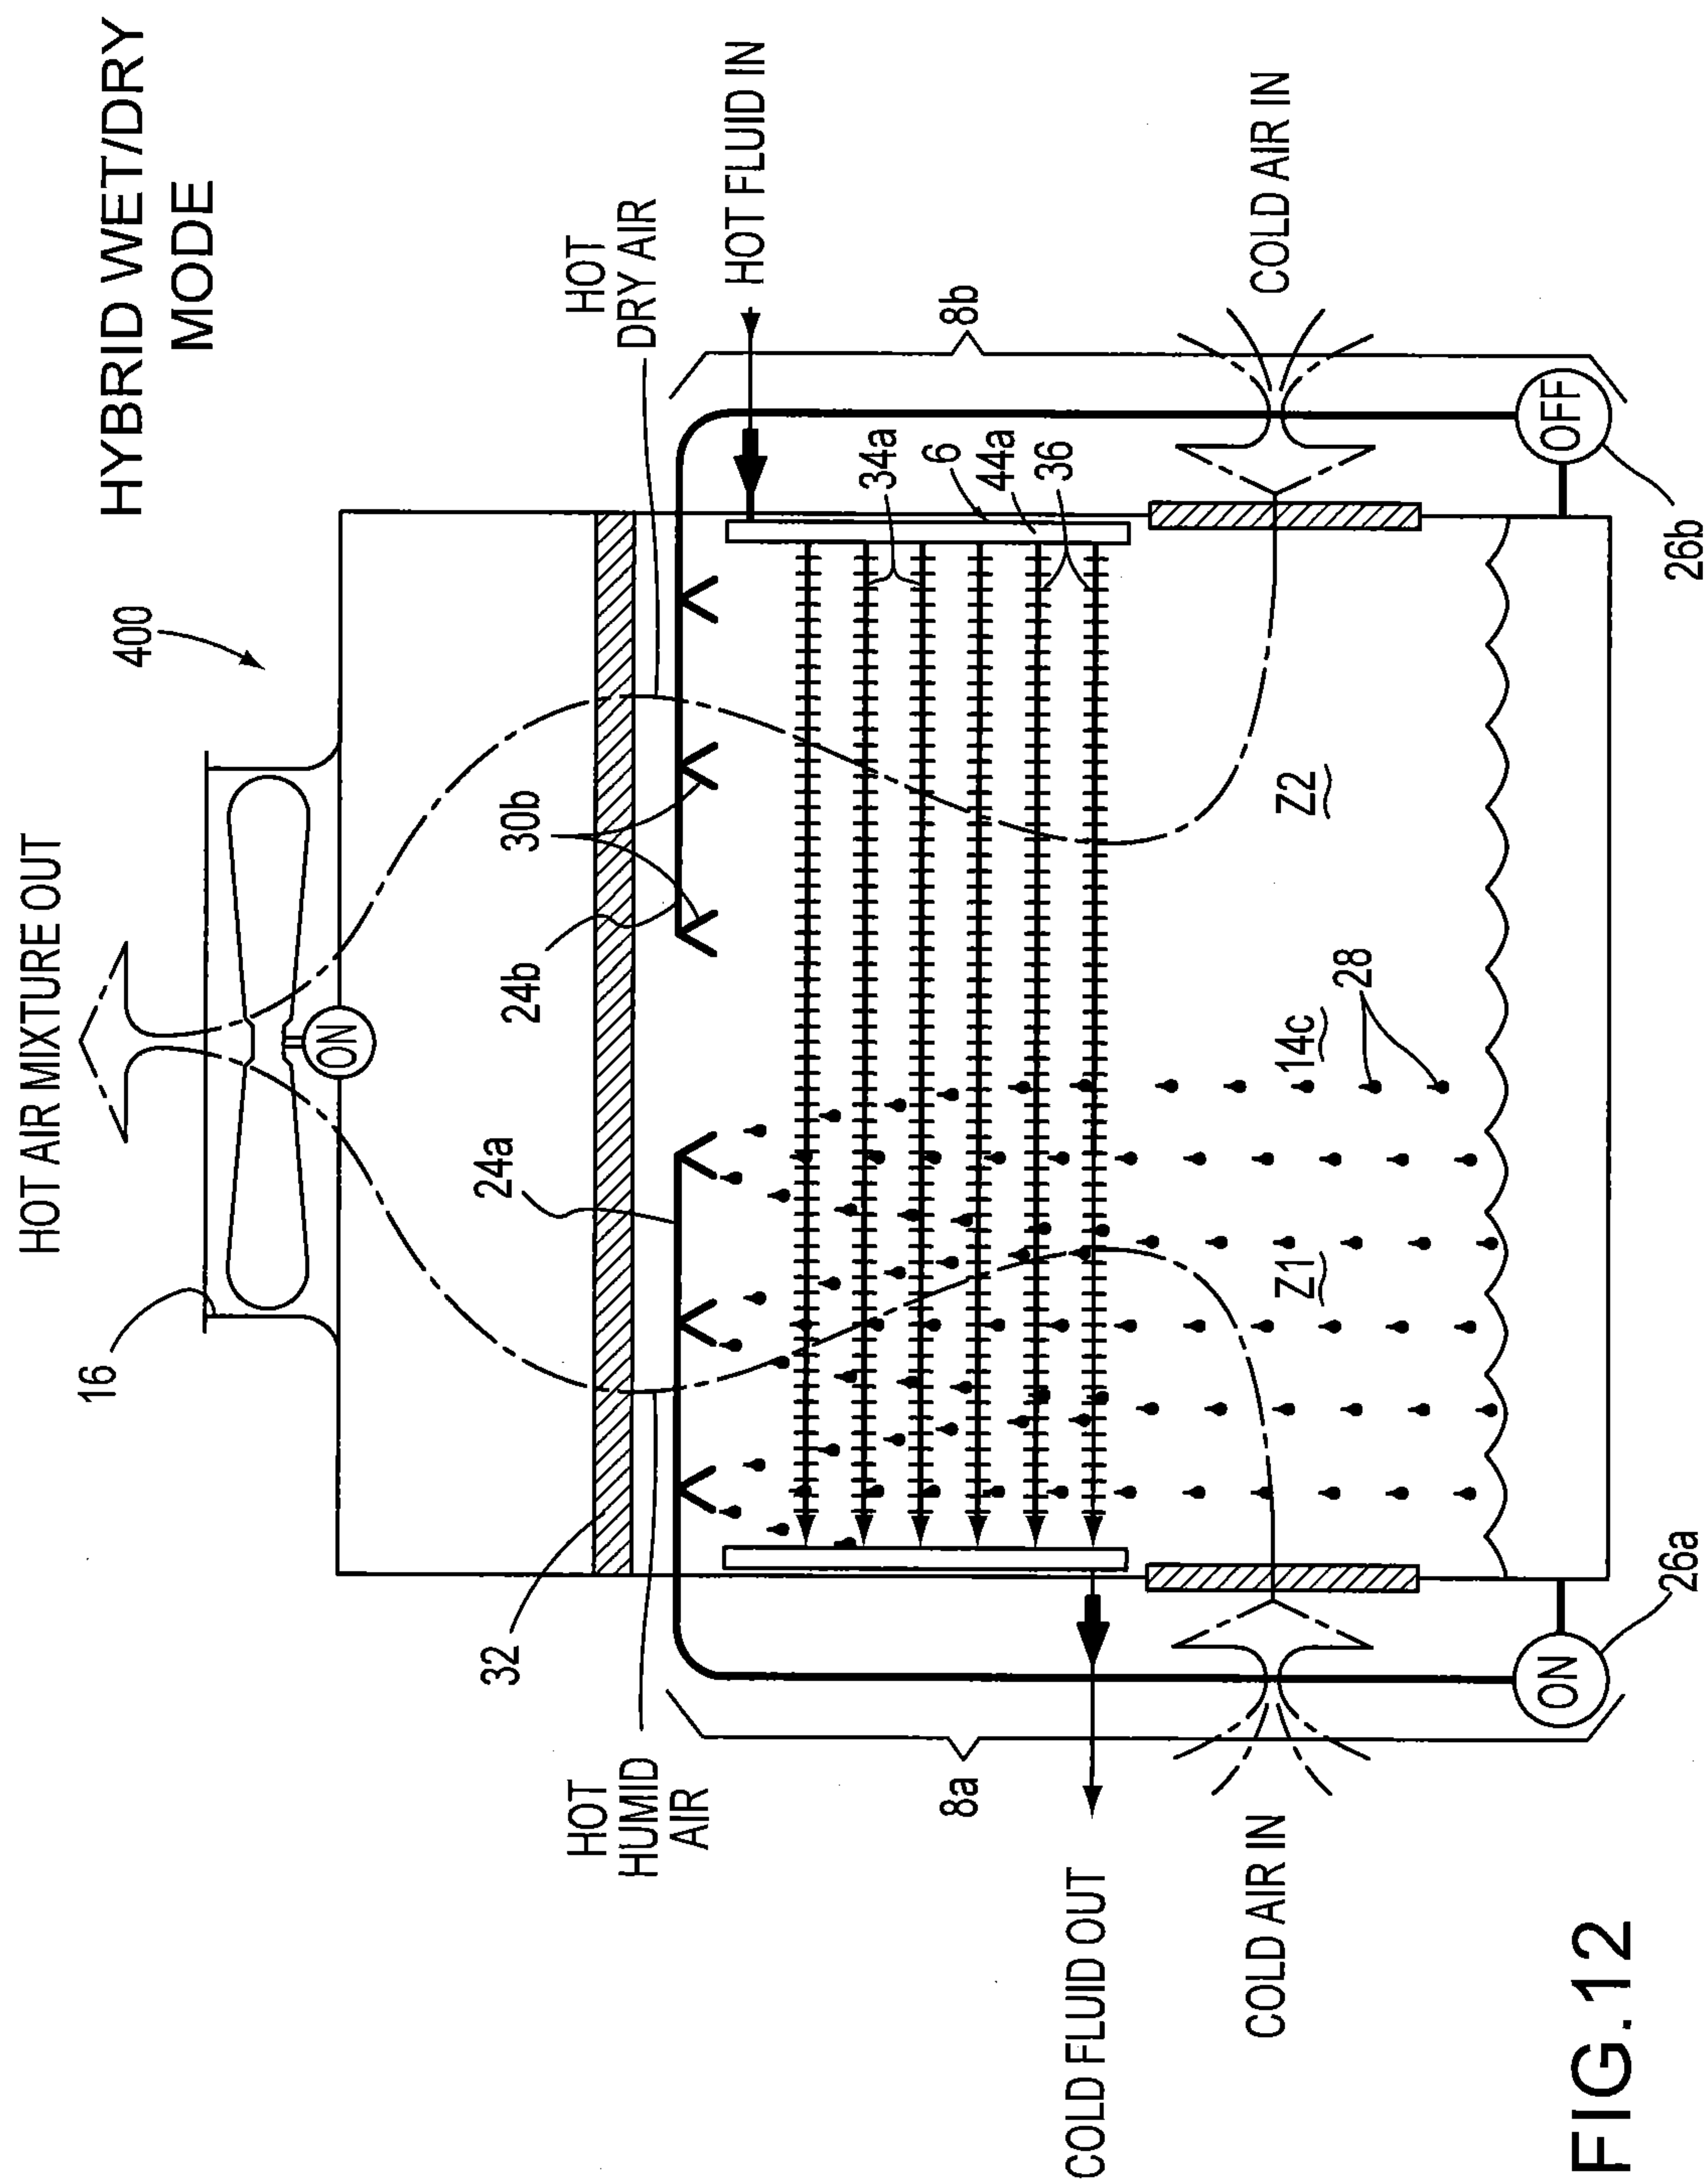

13/19

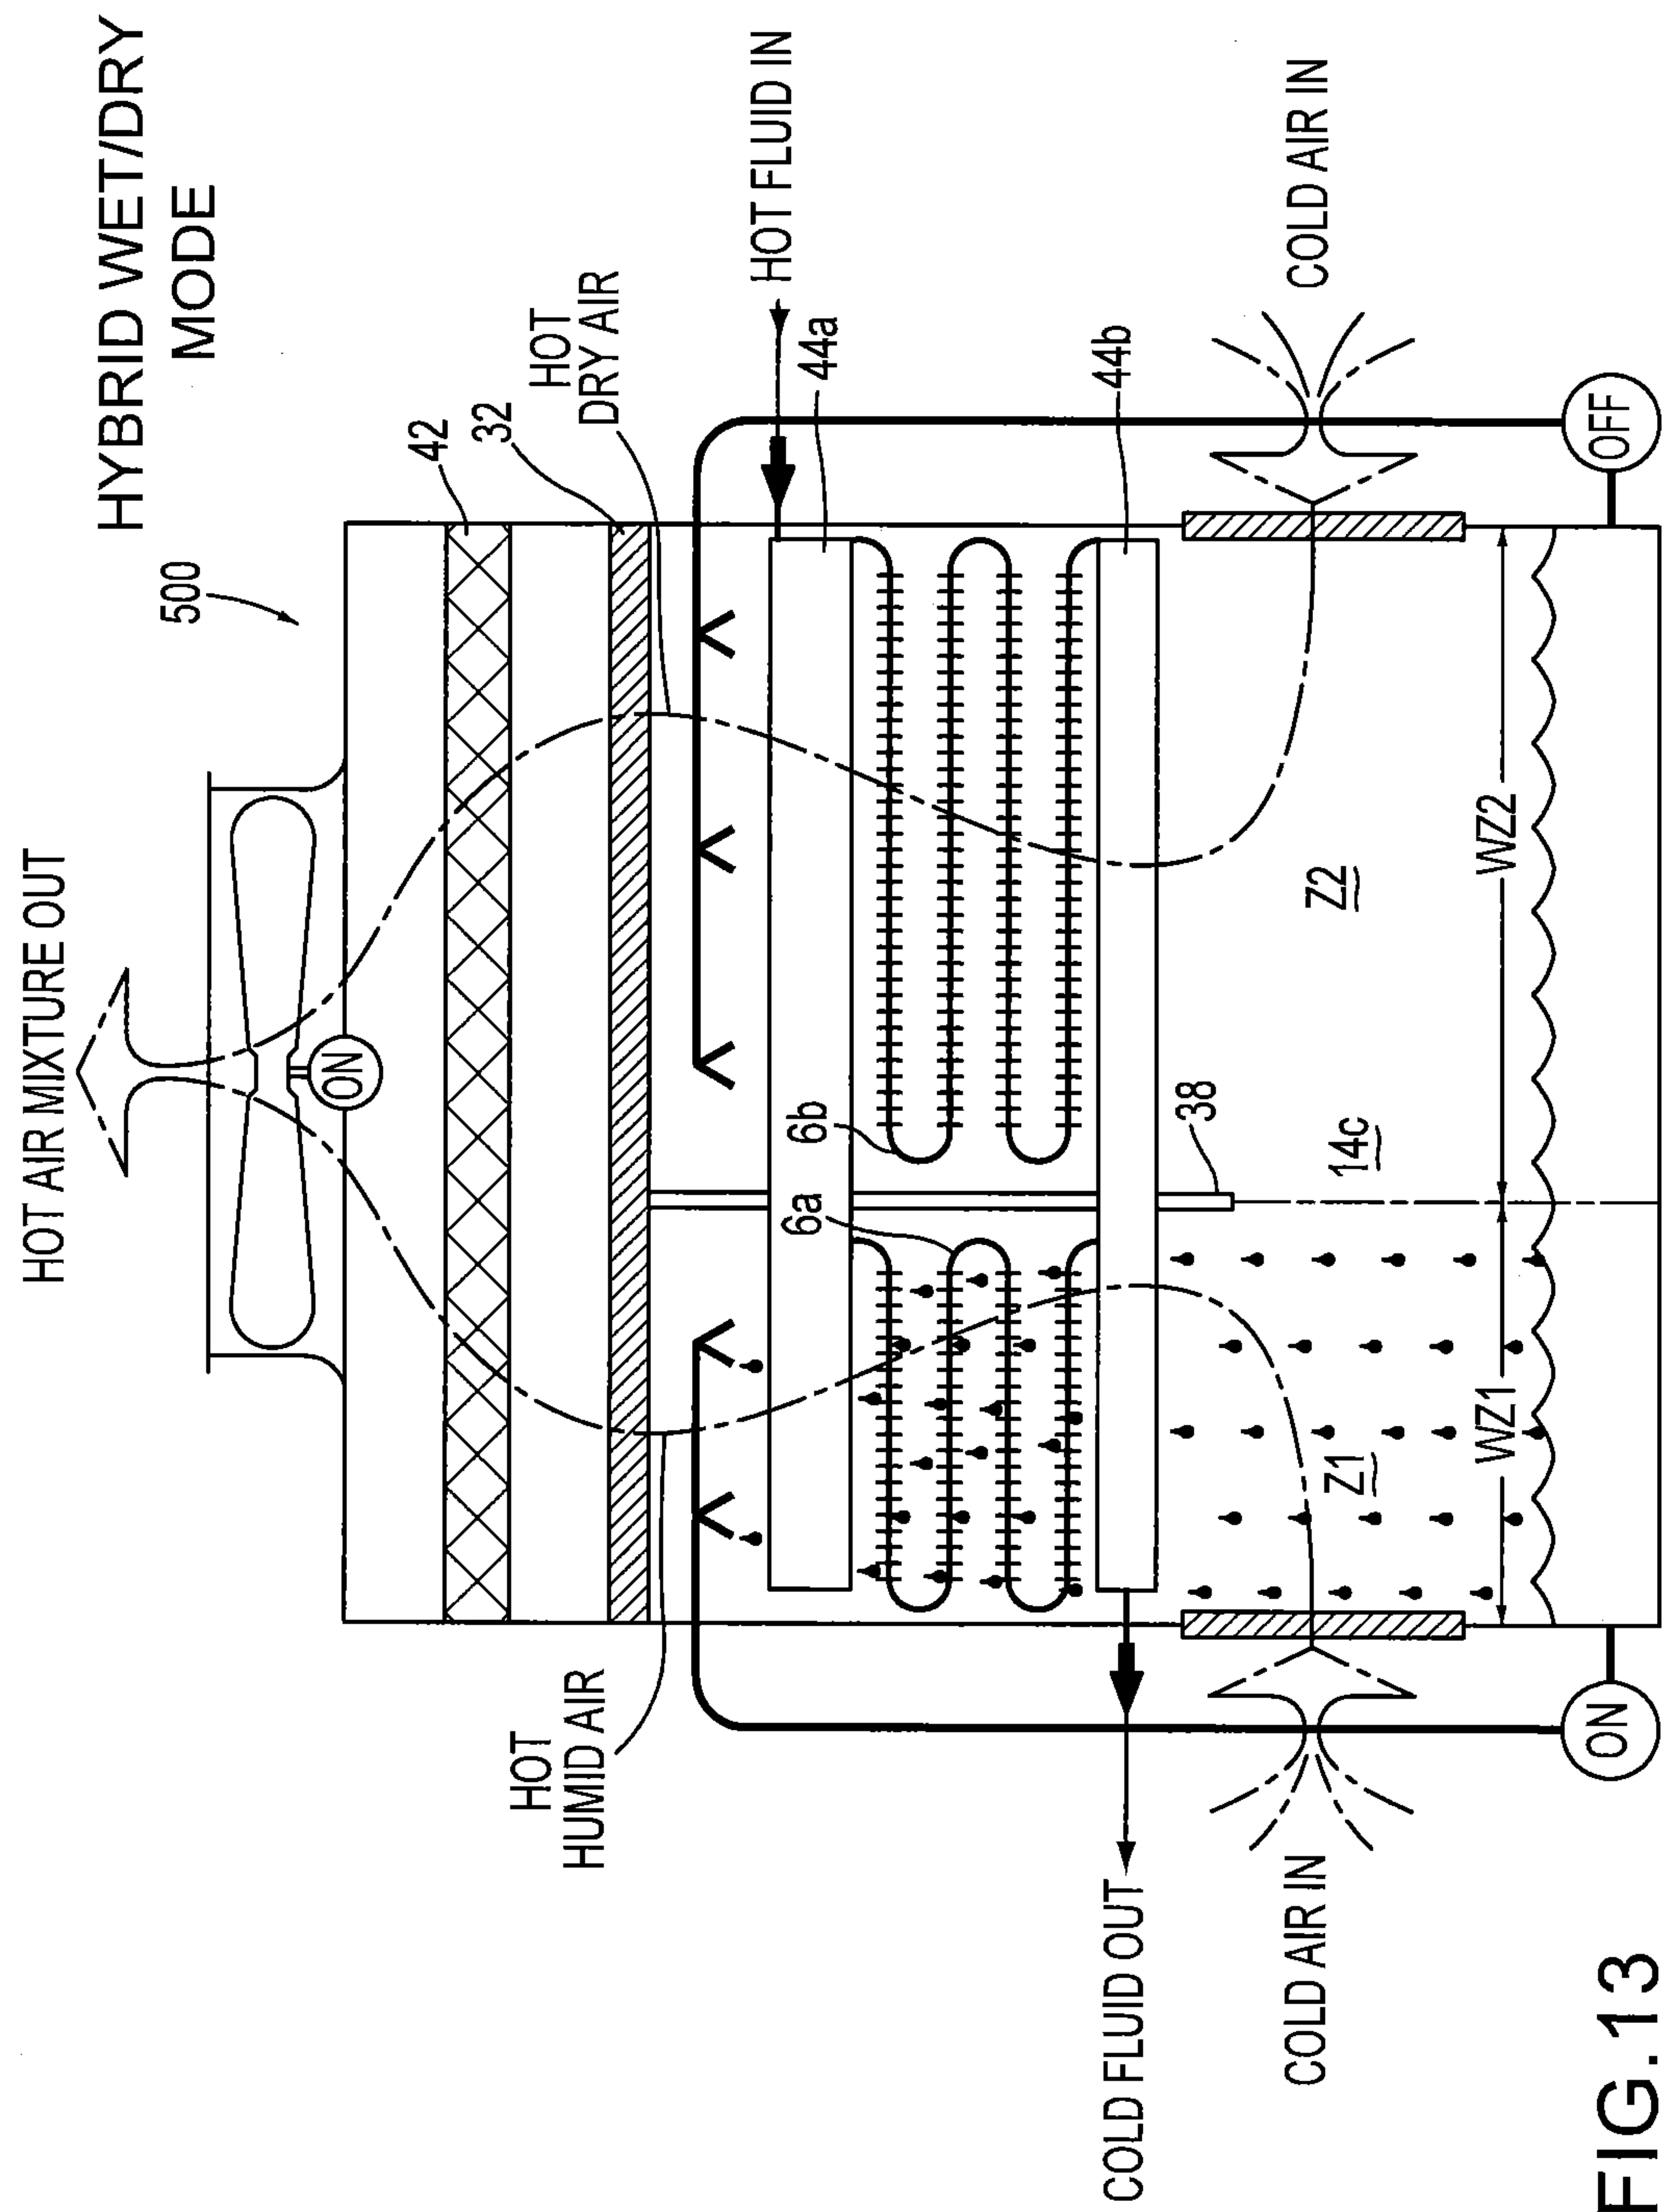


FIG. 13

14/19

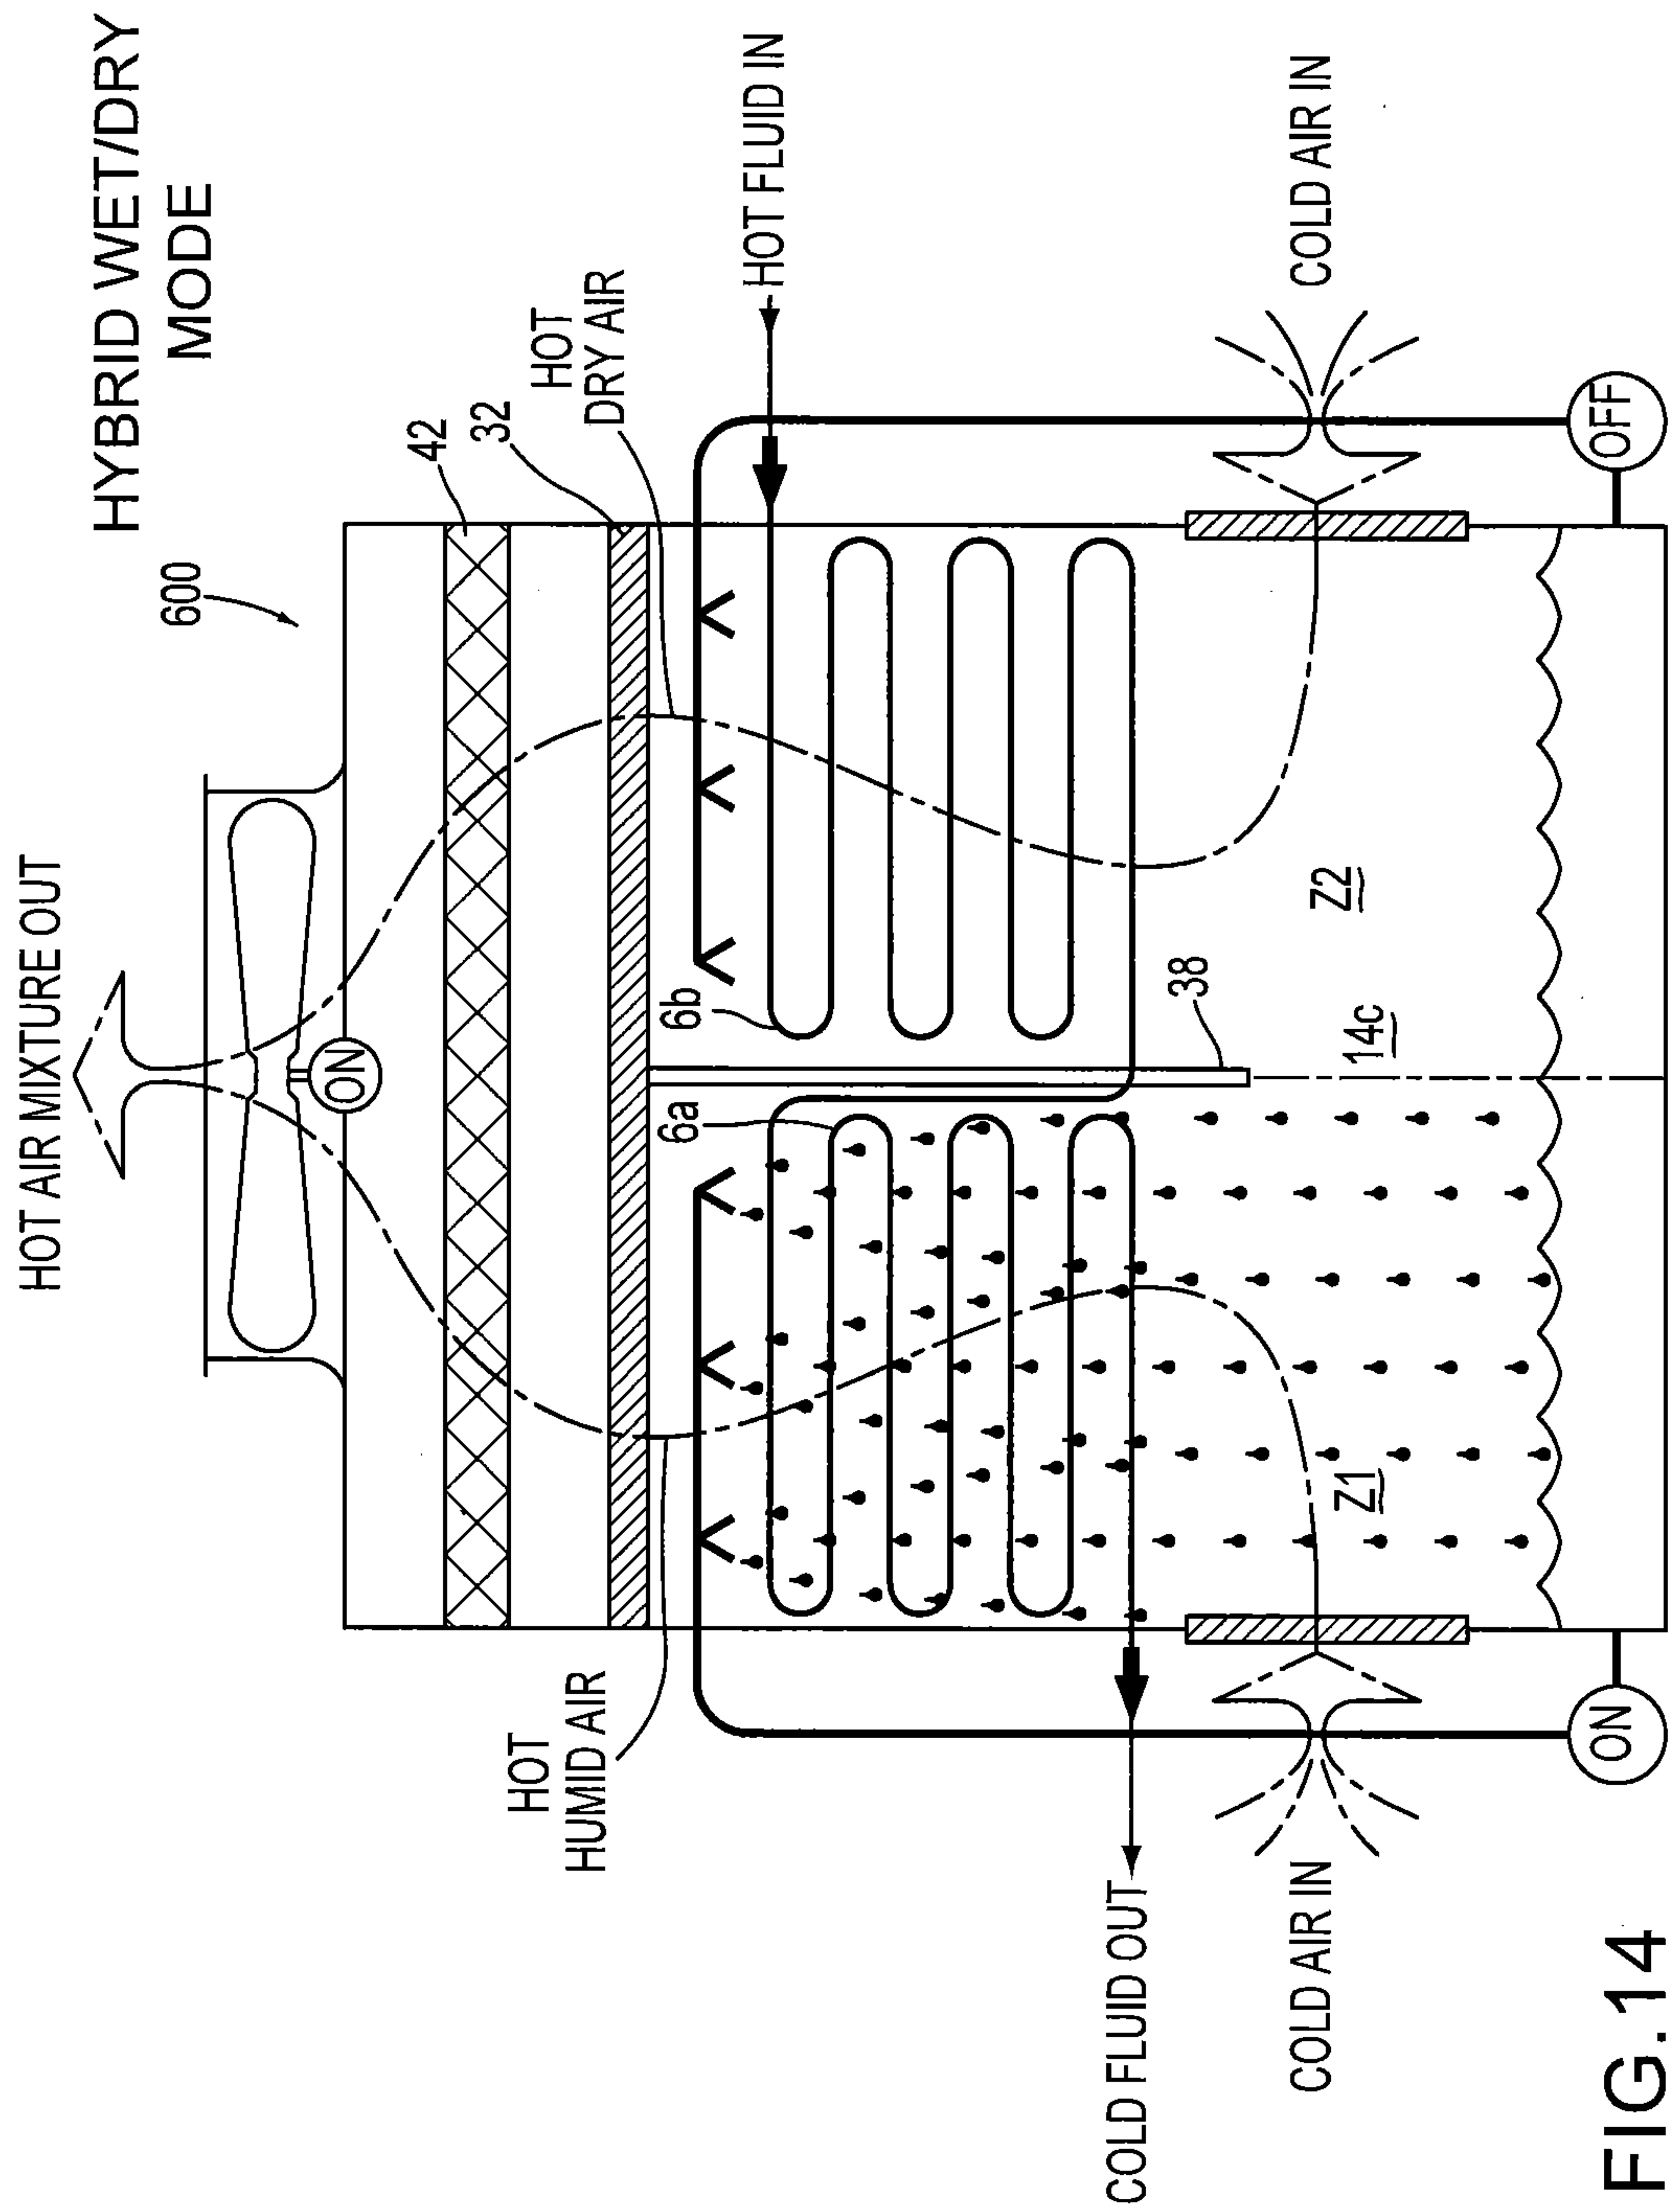


FIG. 14

15/19


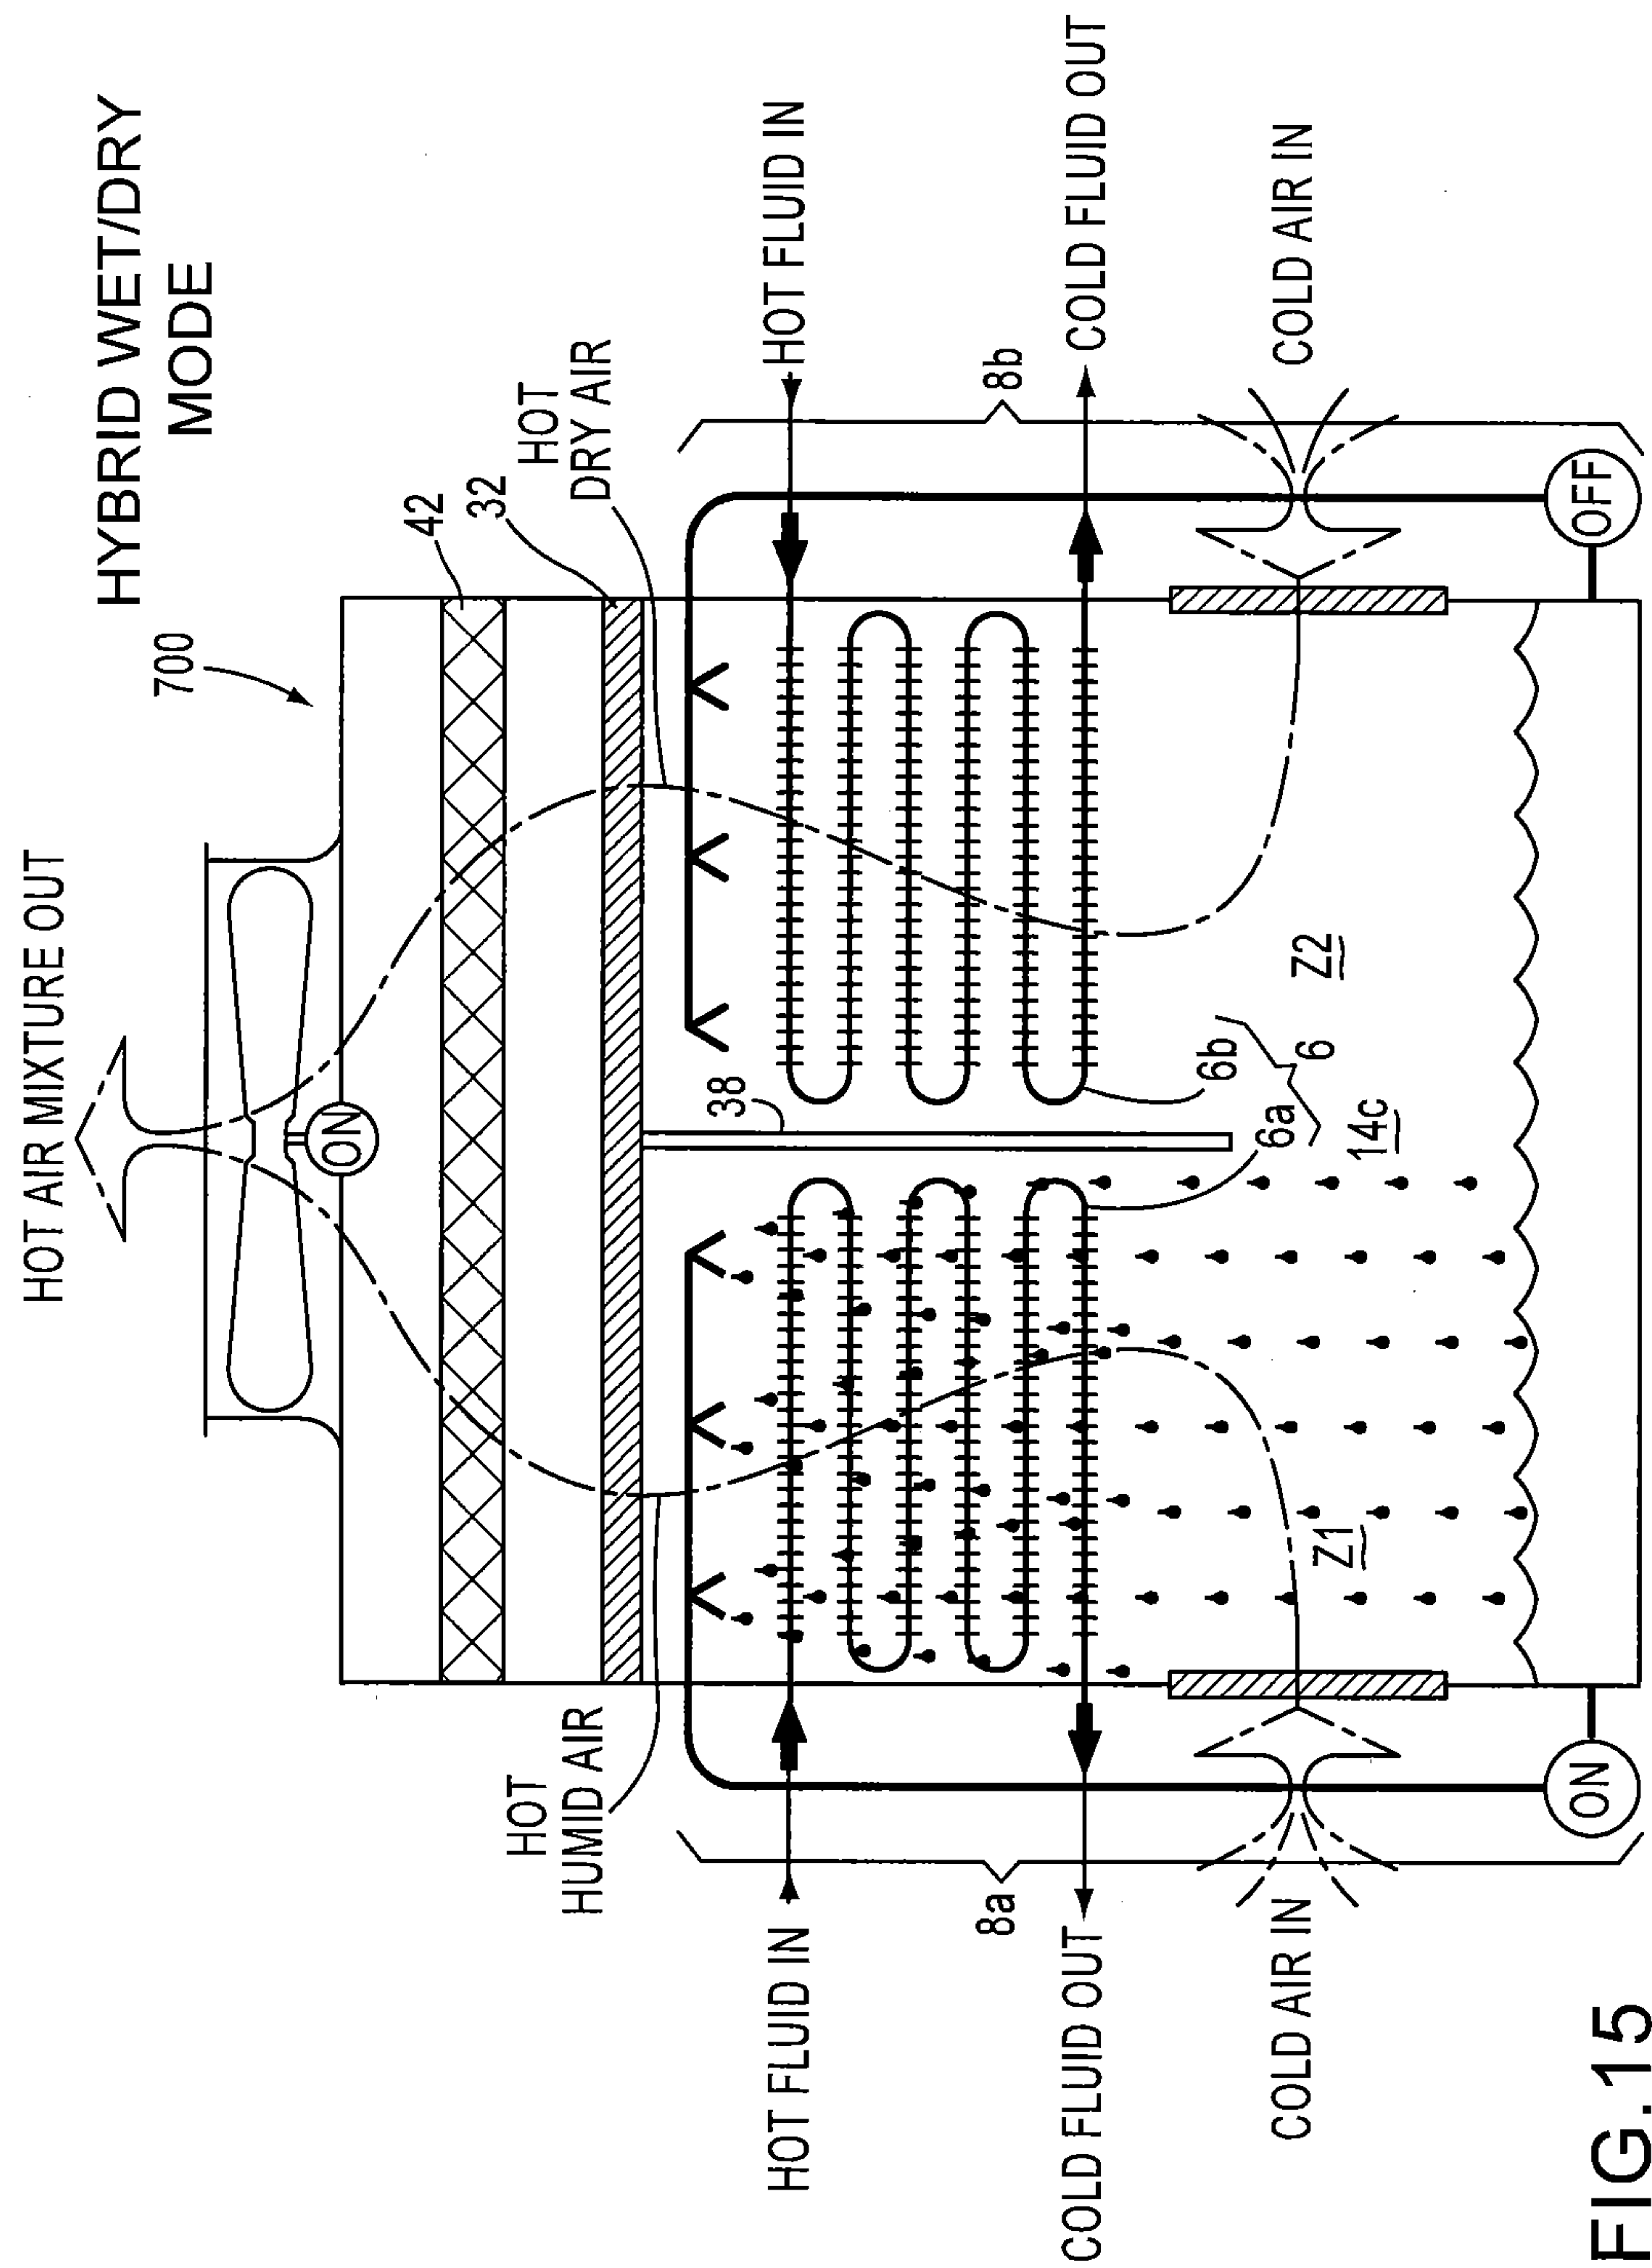


FIG.15

16/19

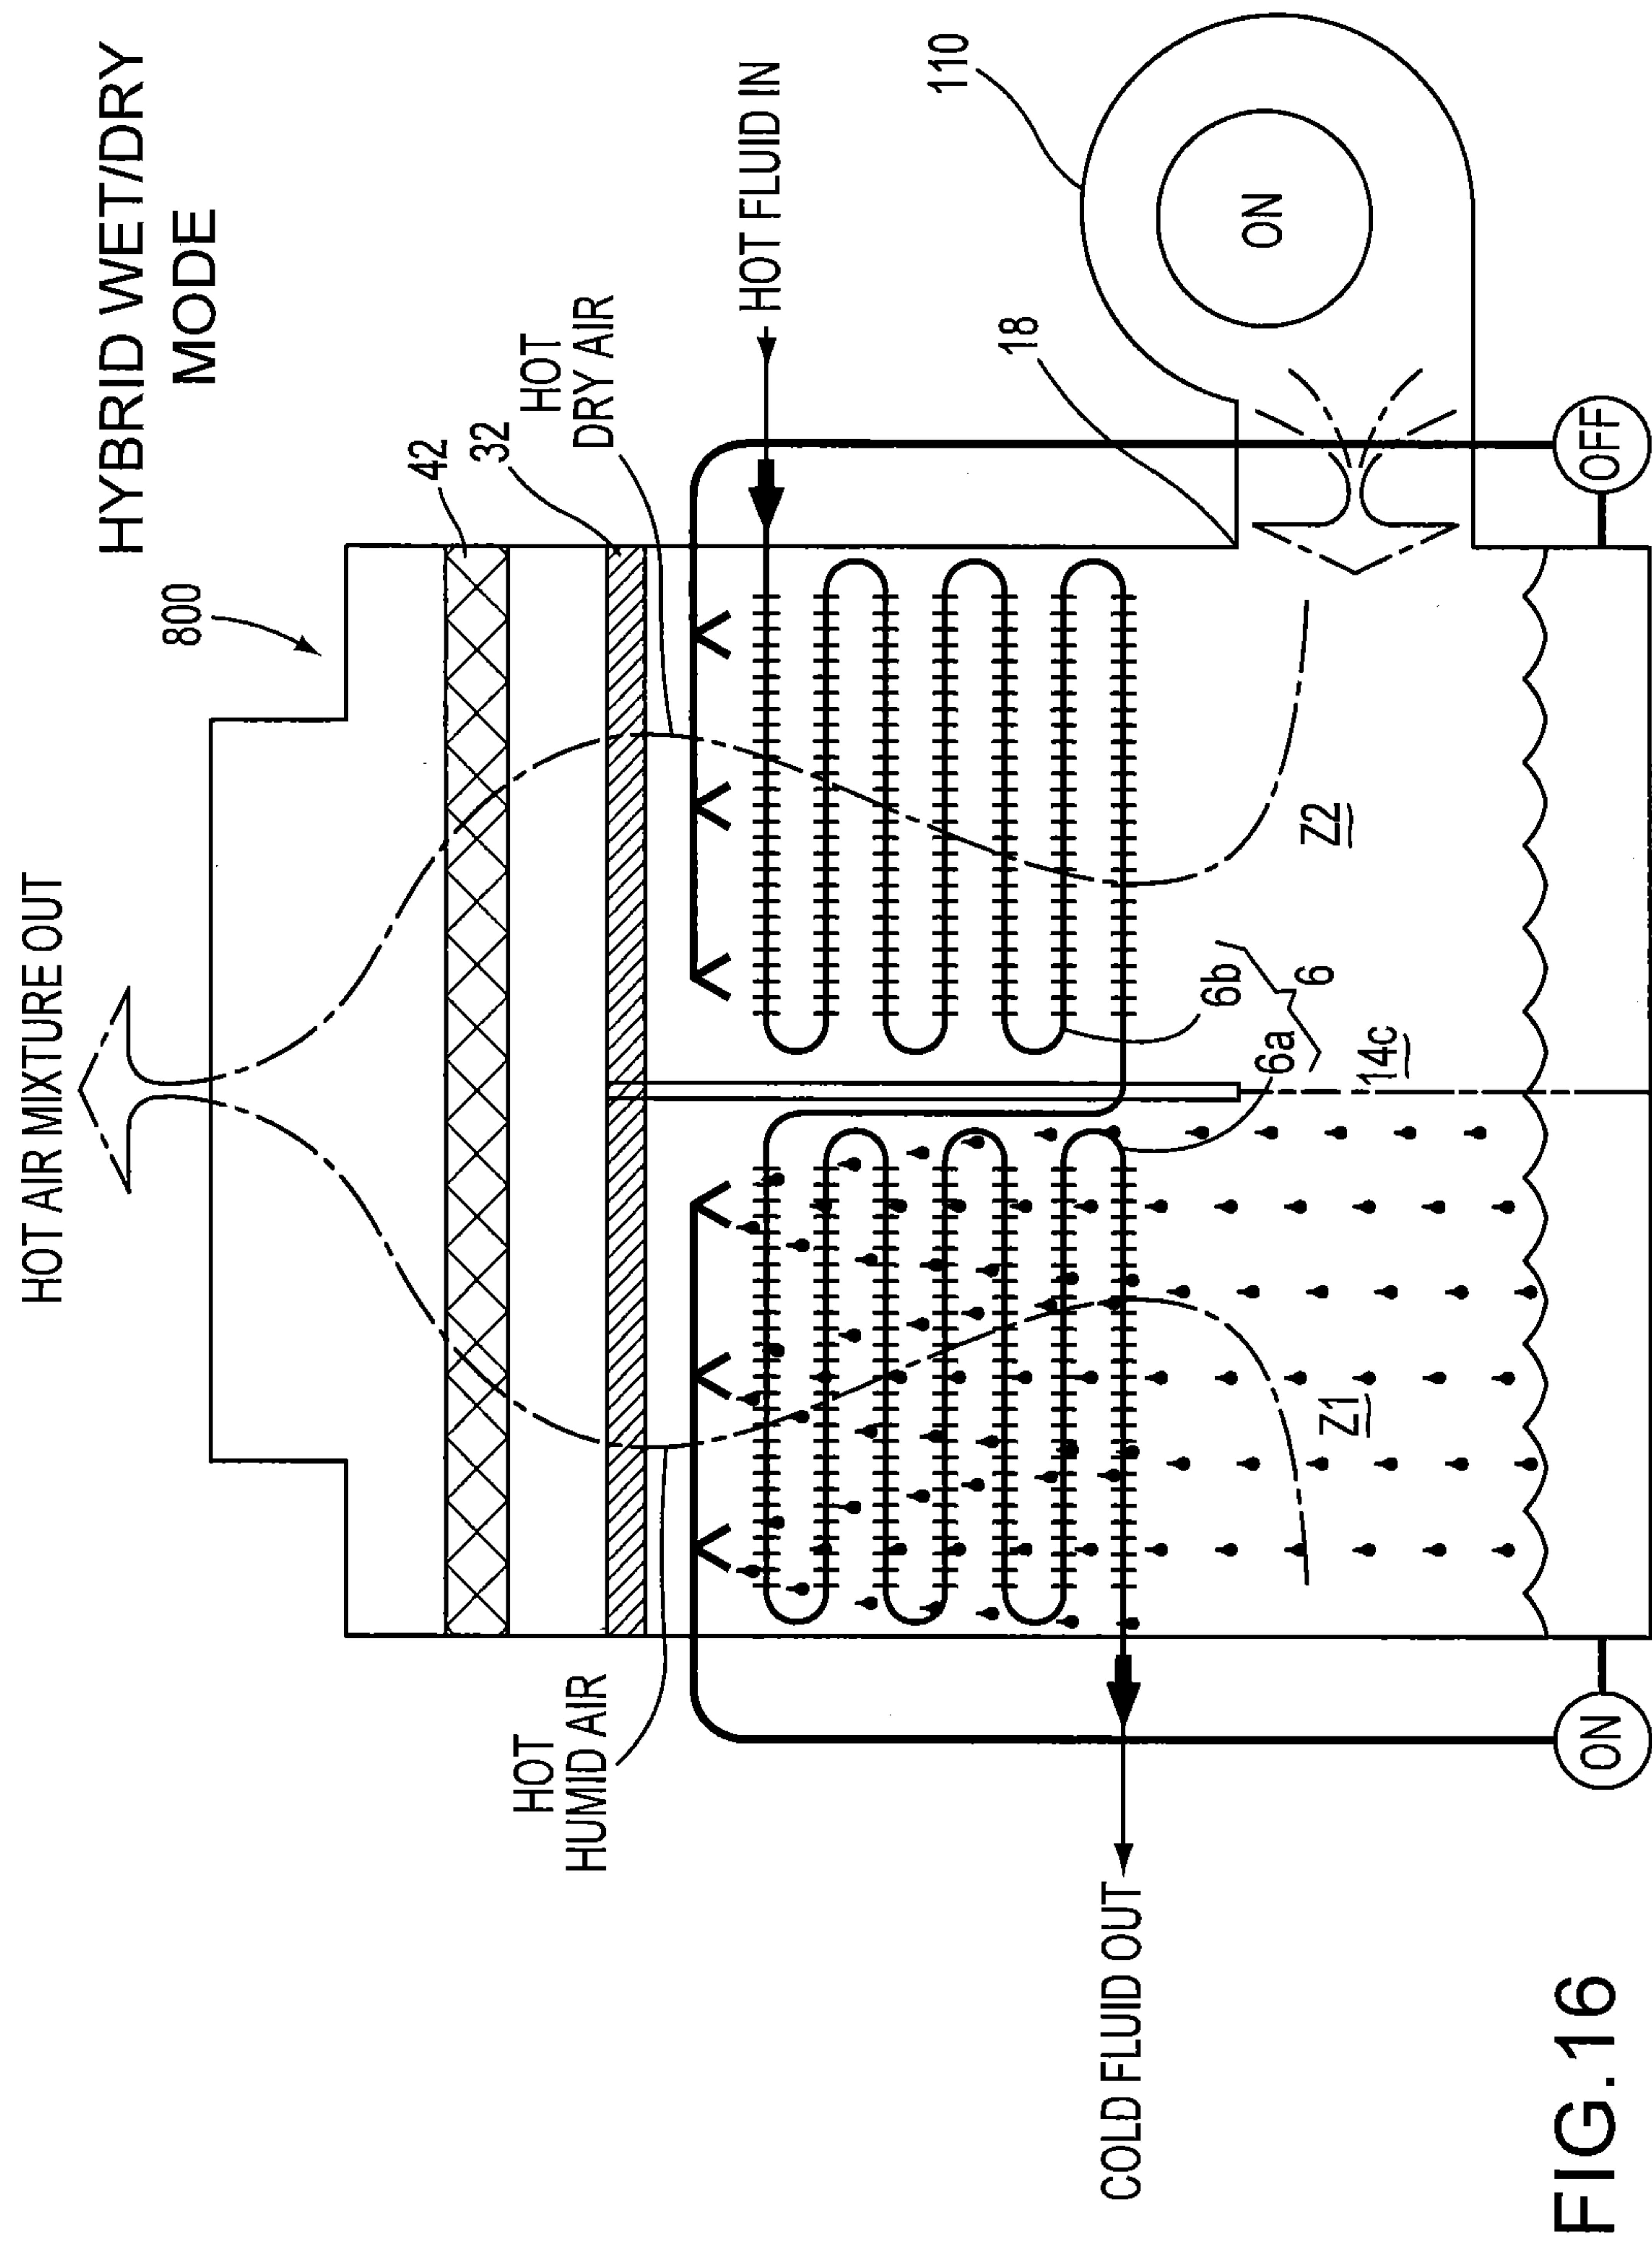

17/19


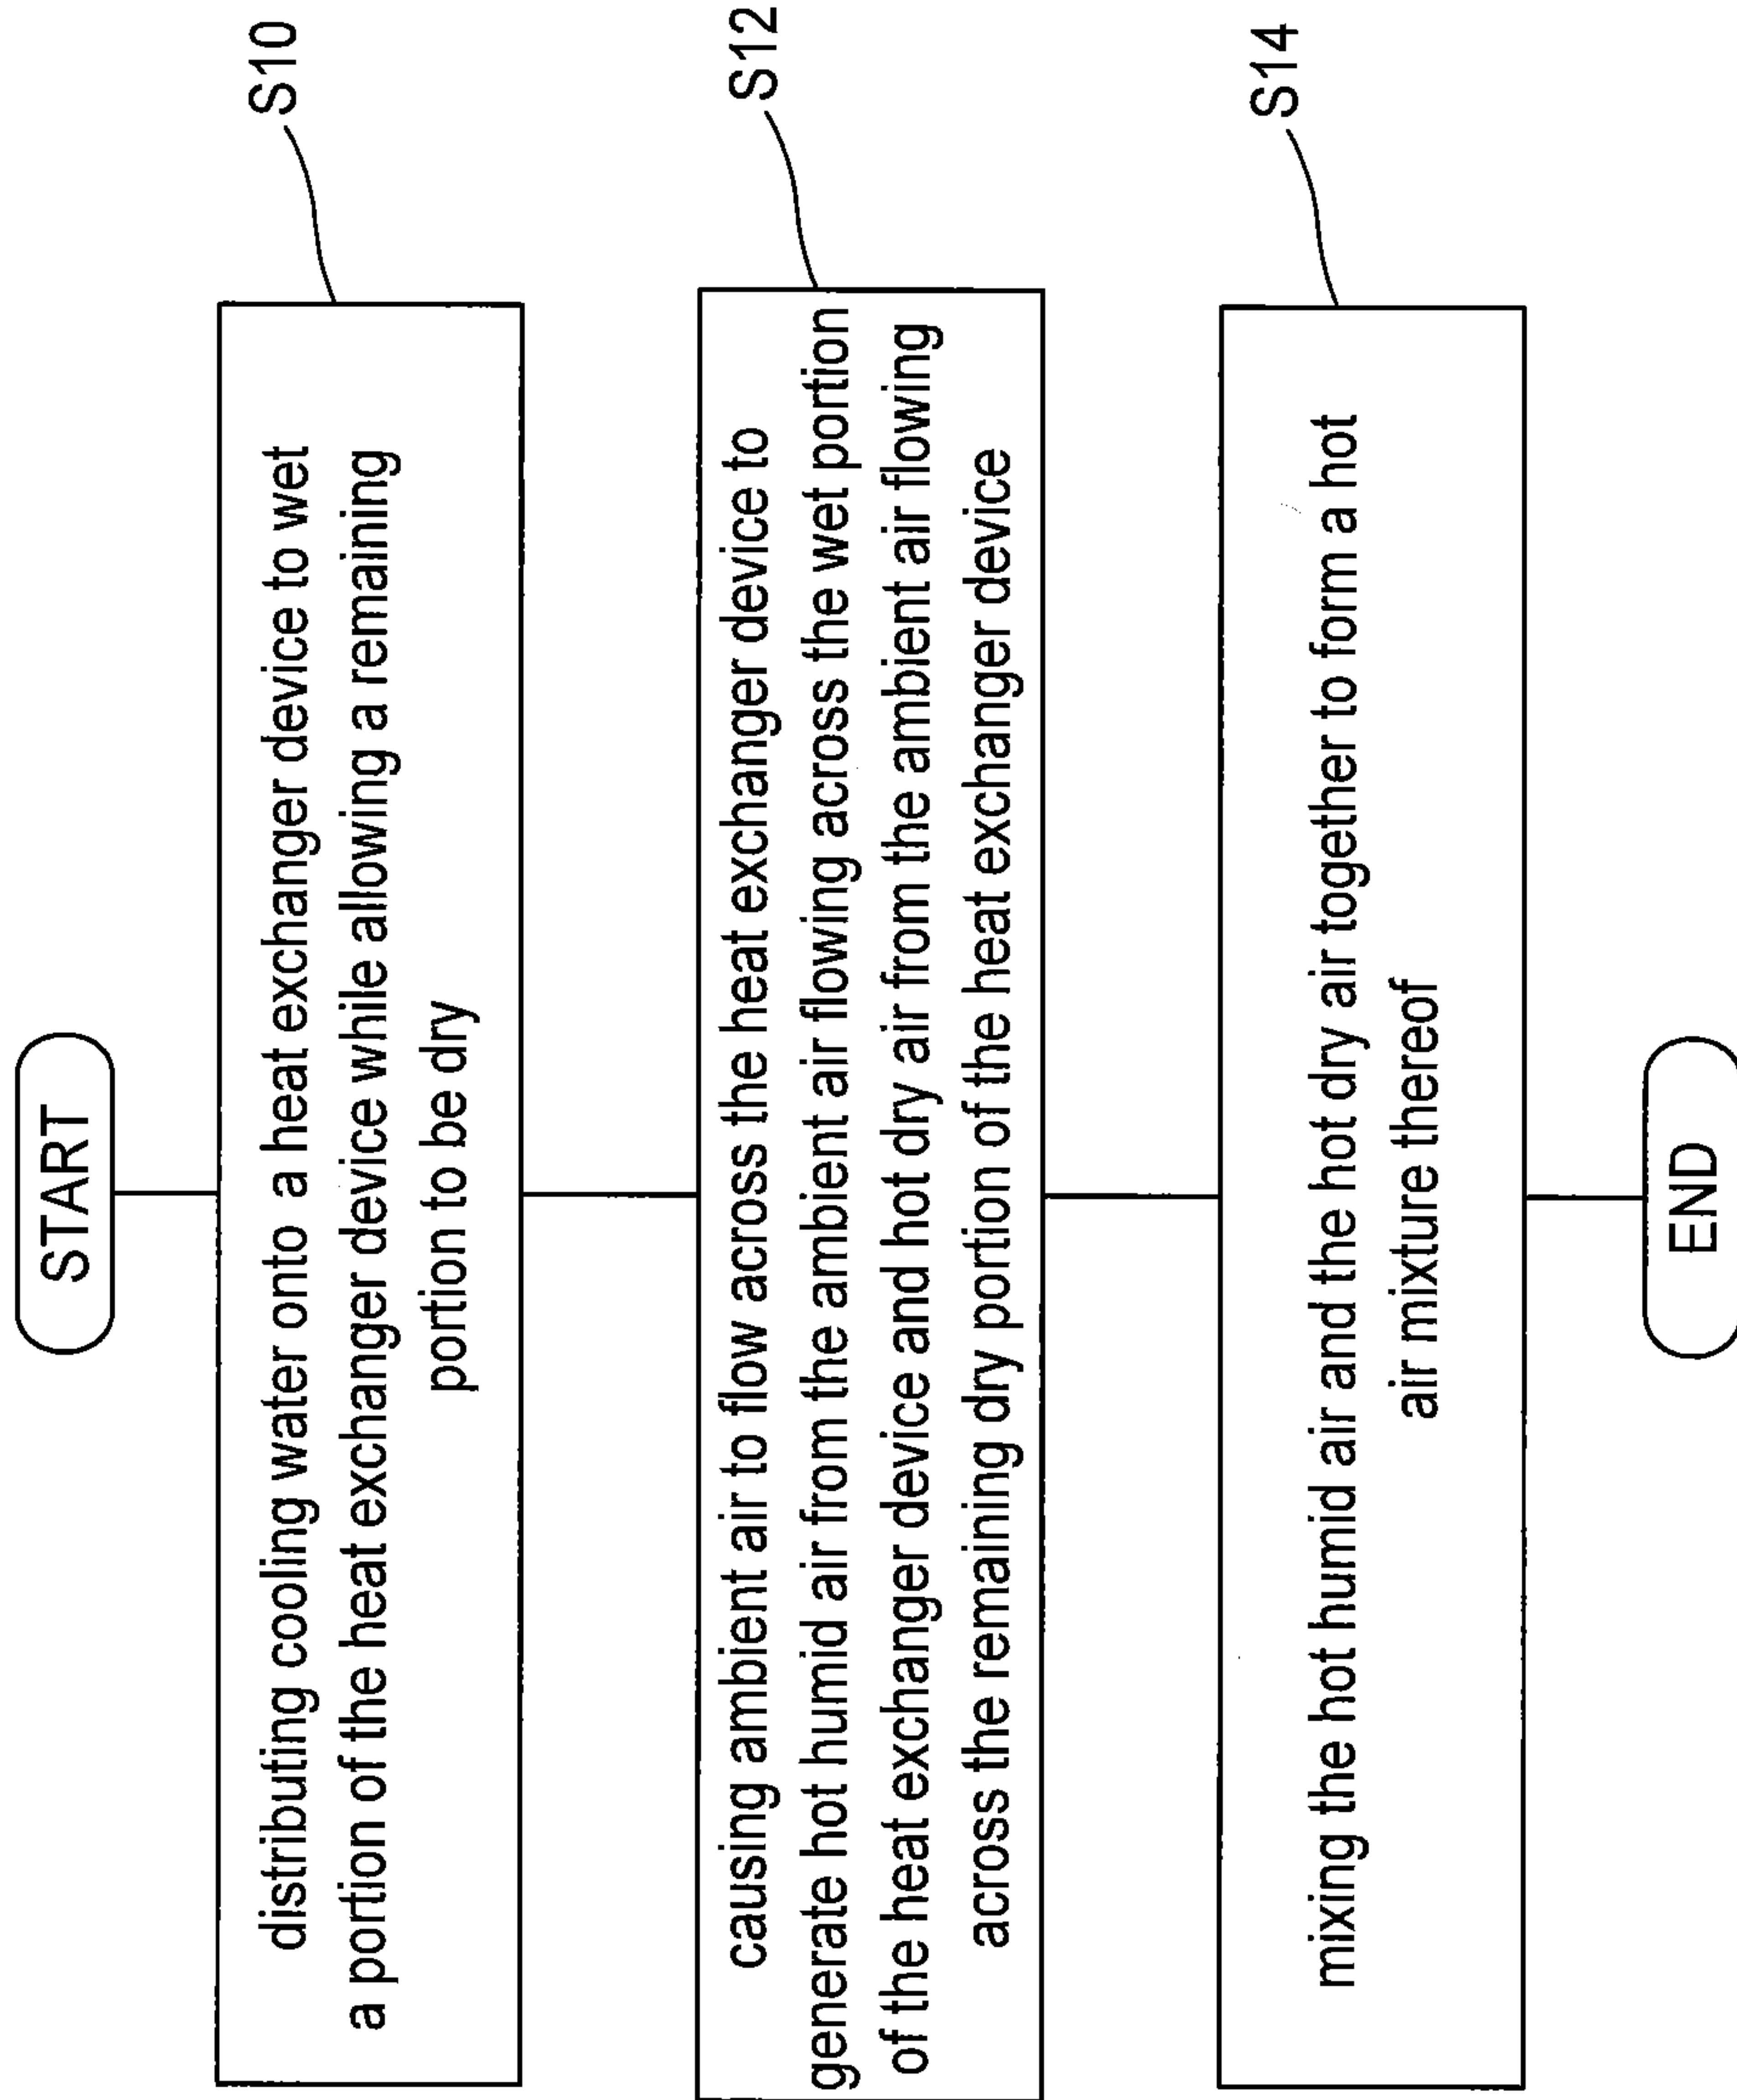


FIG. 17

18/19

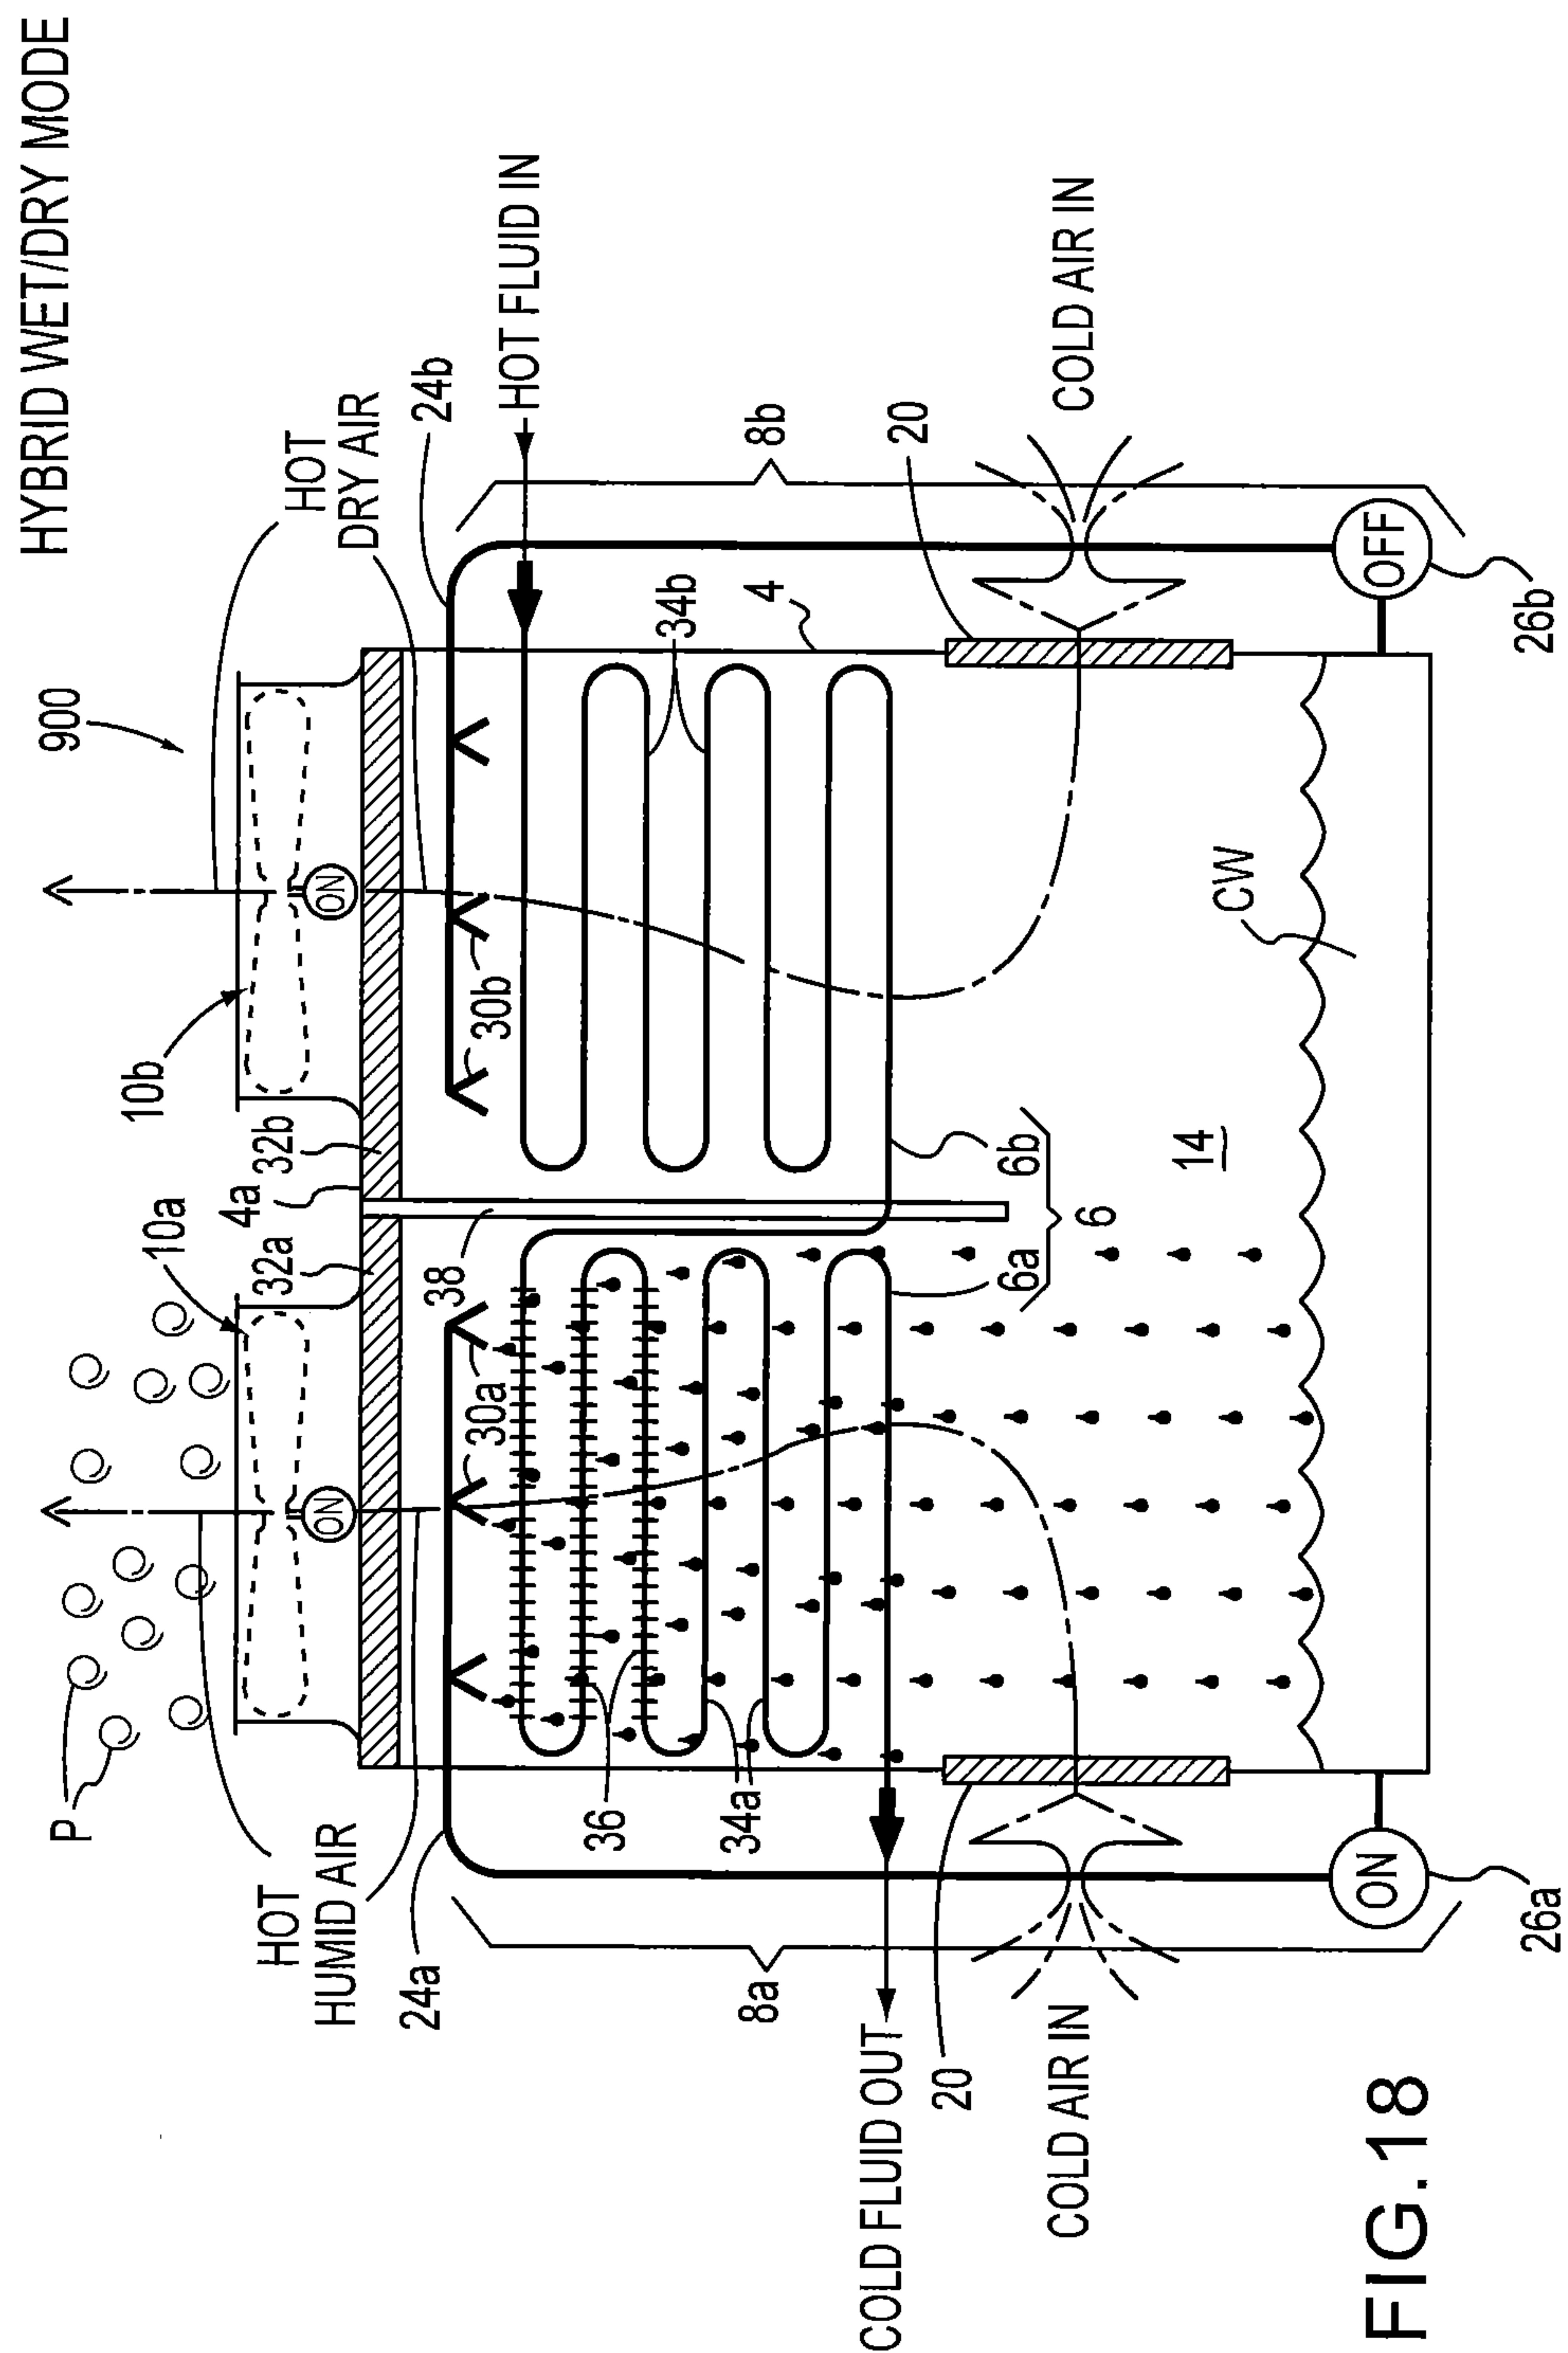

19/19

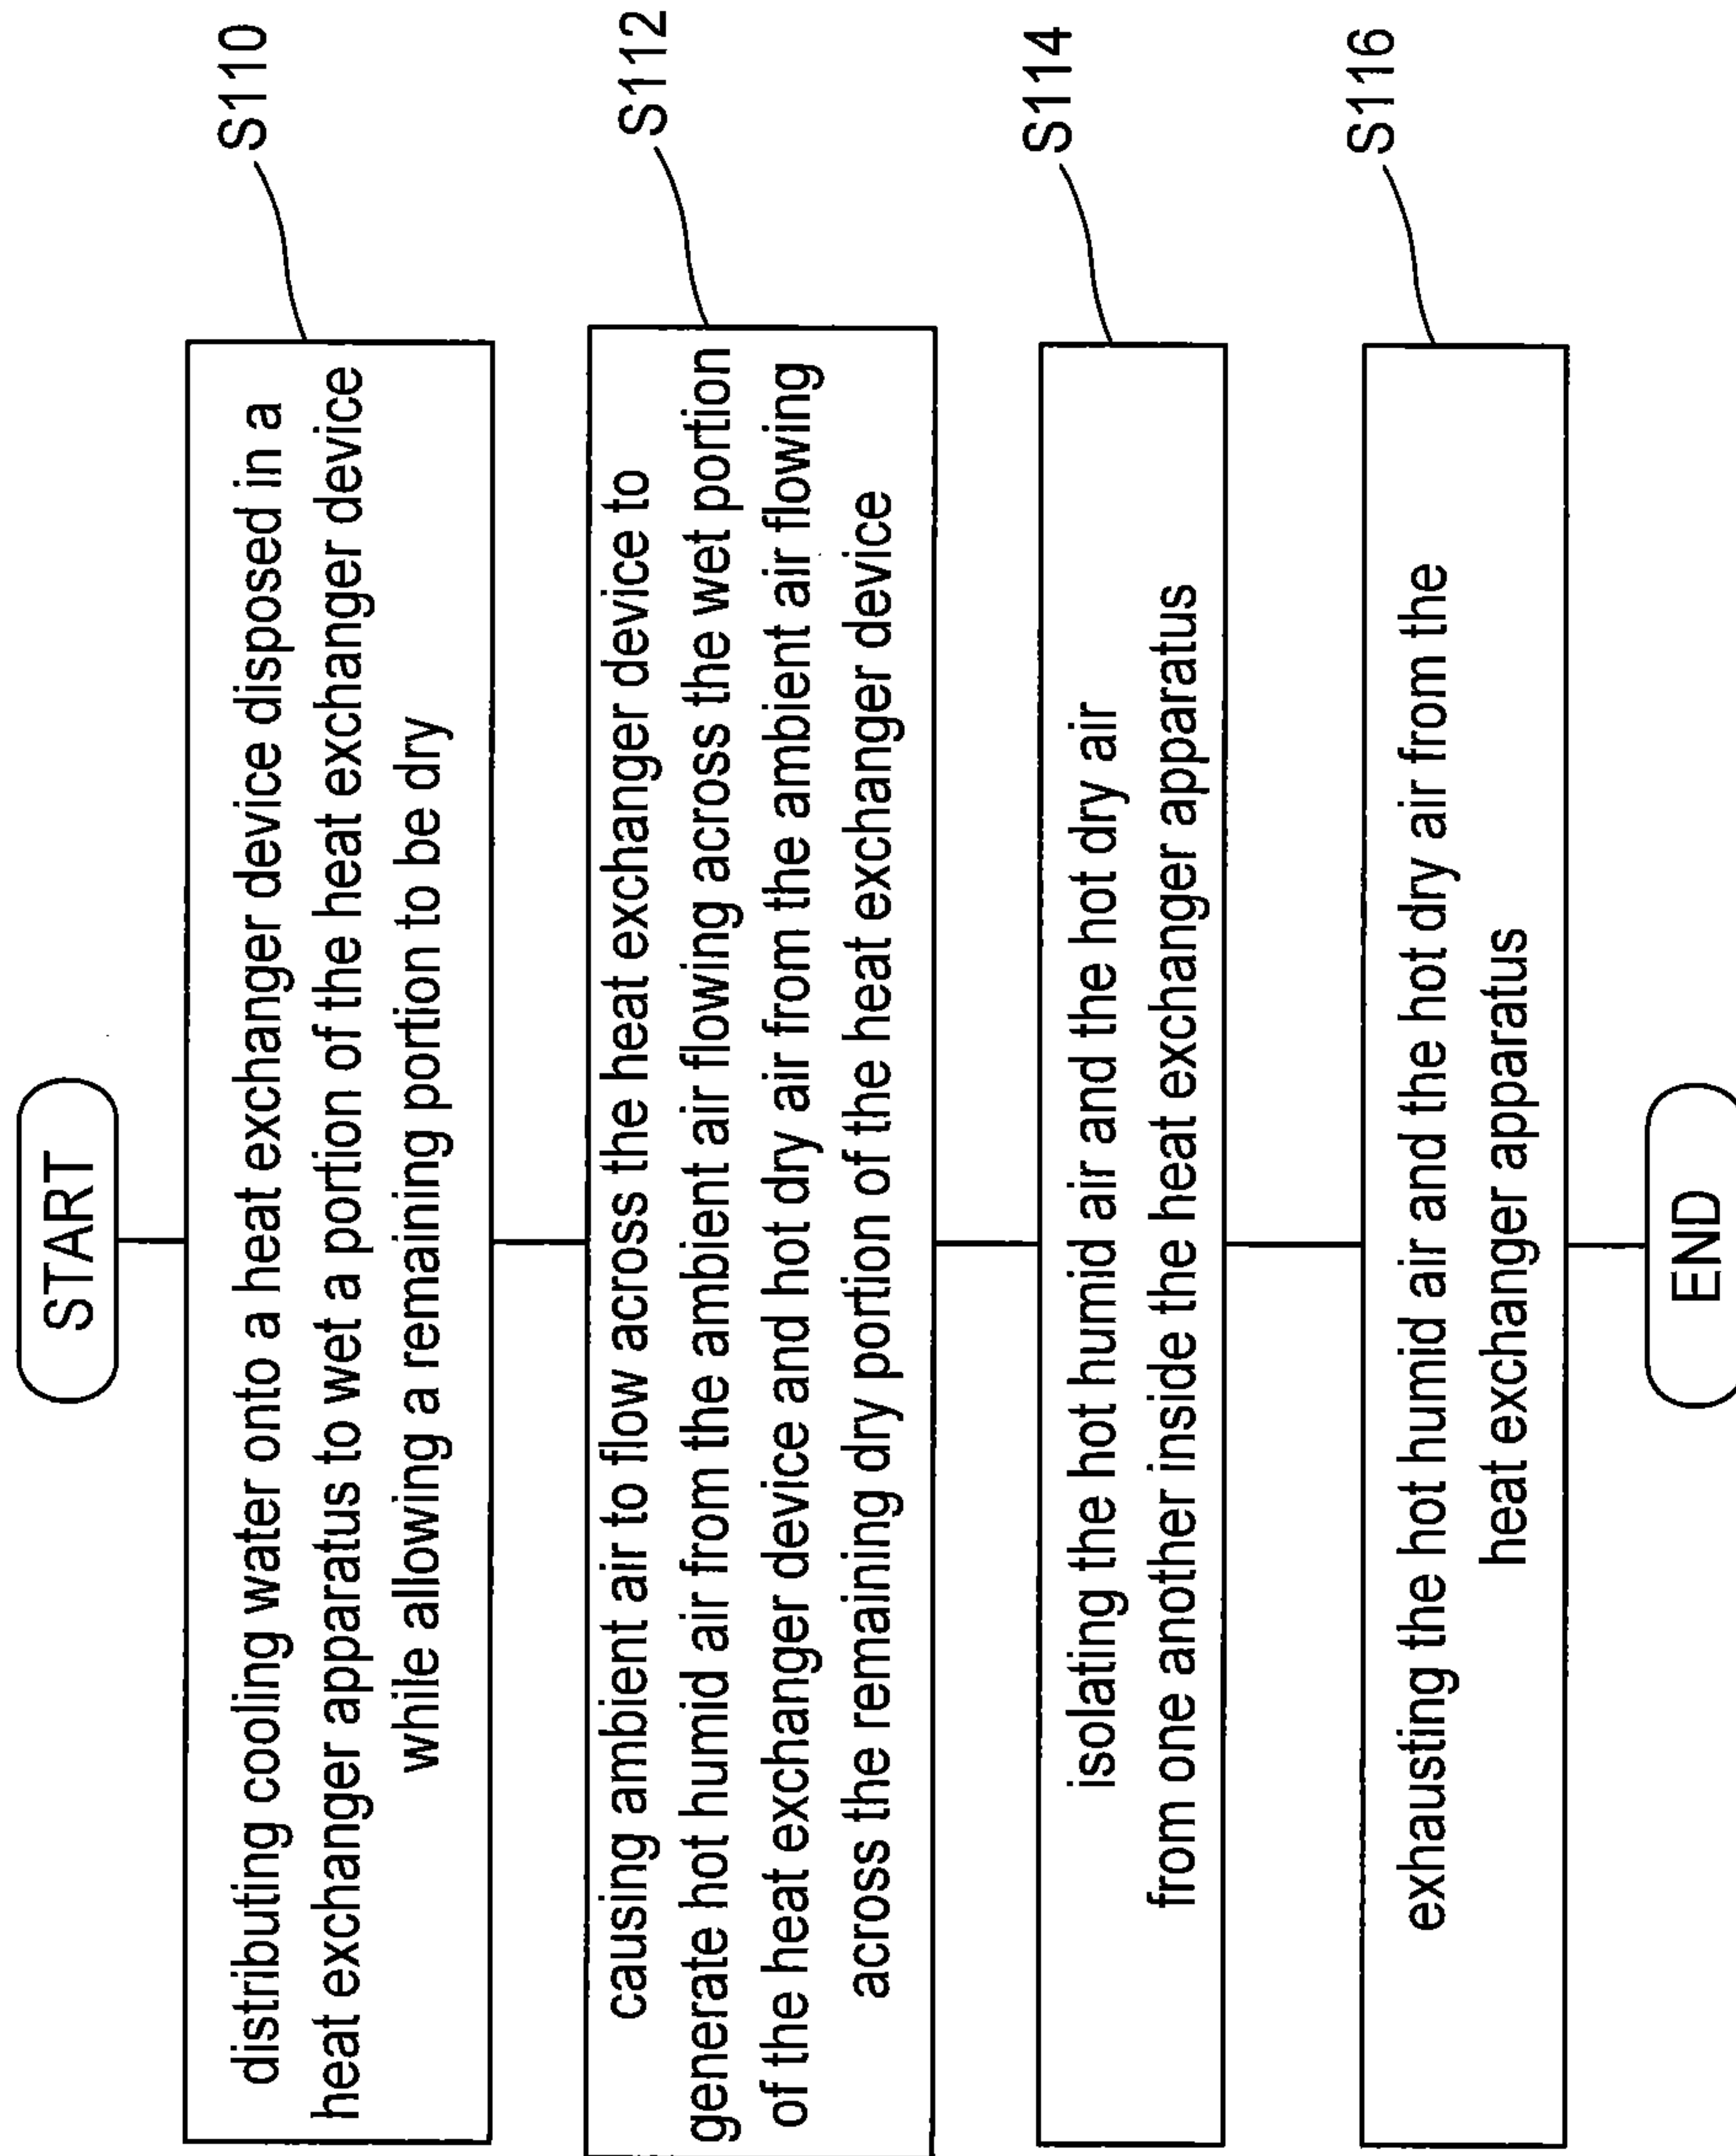


FIG.19

