



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(22) Date de dépôt/Filing Date: 2018/01/31

(41) Mise à la disp. pub./Open to Public Insp.: 2018/09/06

(30) Priorité/Priority: 2017/03/06 (US15/451242)

(51) Cl.Int./Int.Cl. *H04W 24/02* (2009.01),
H04B 7/15 (2006.01)

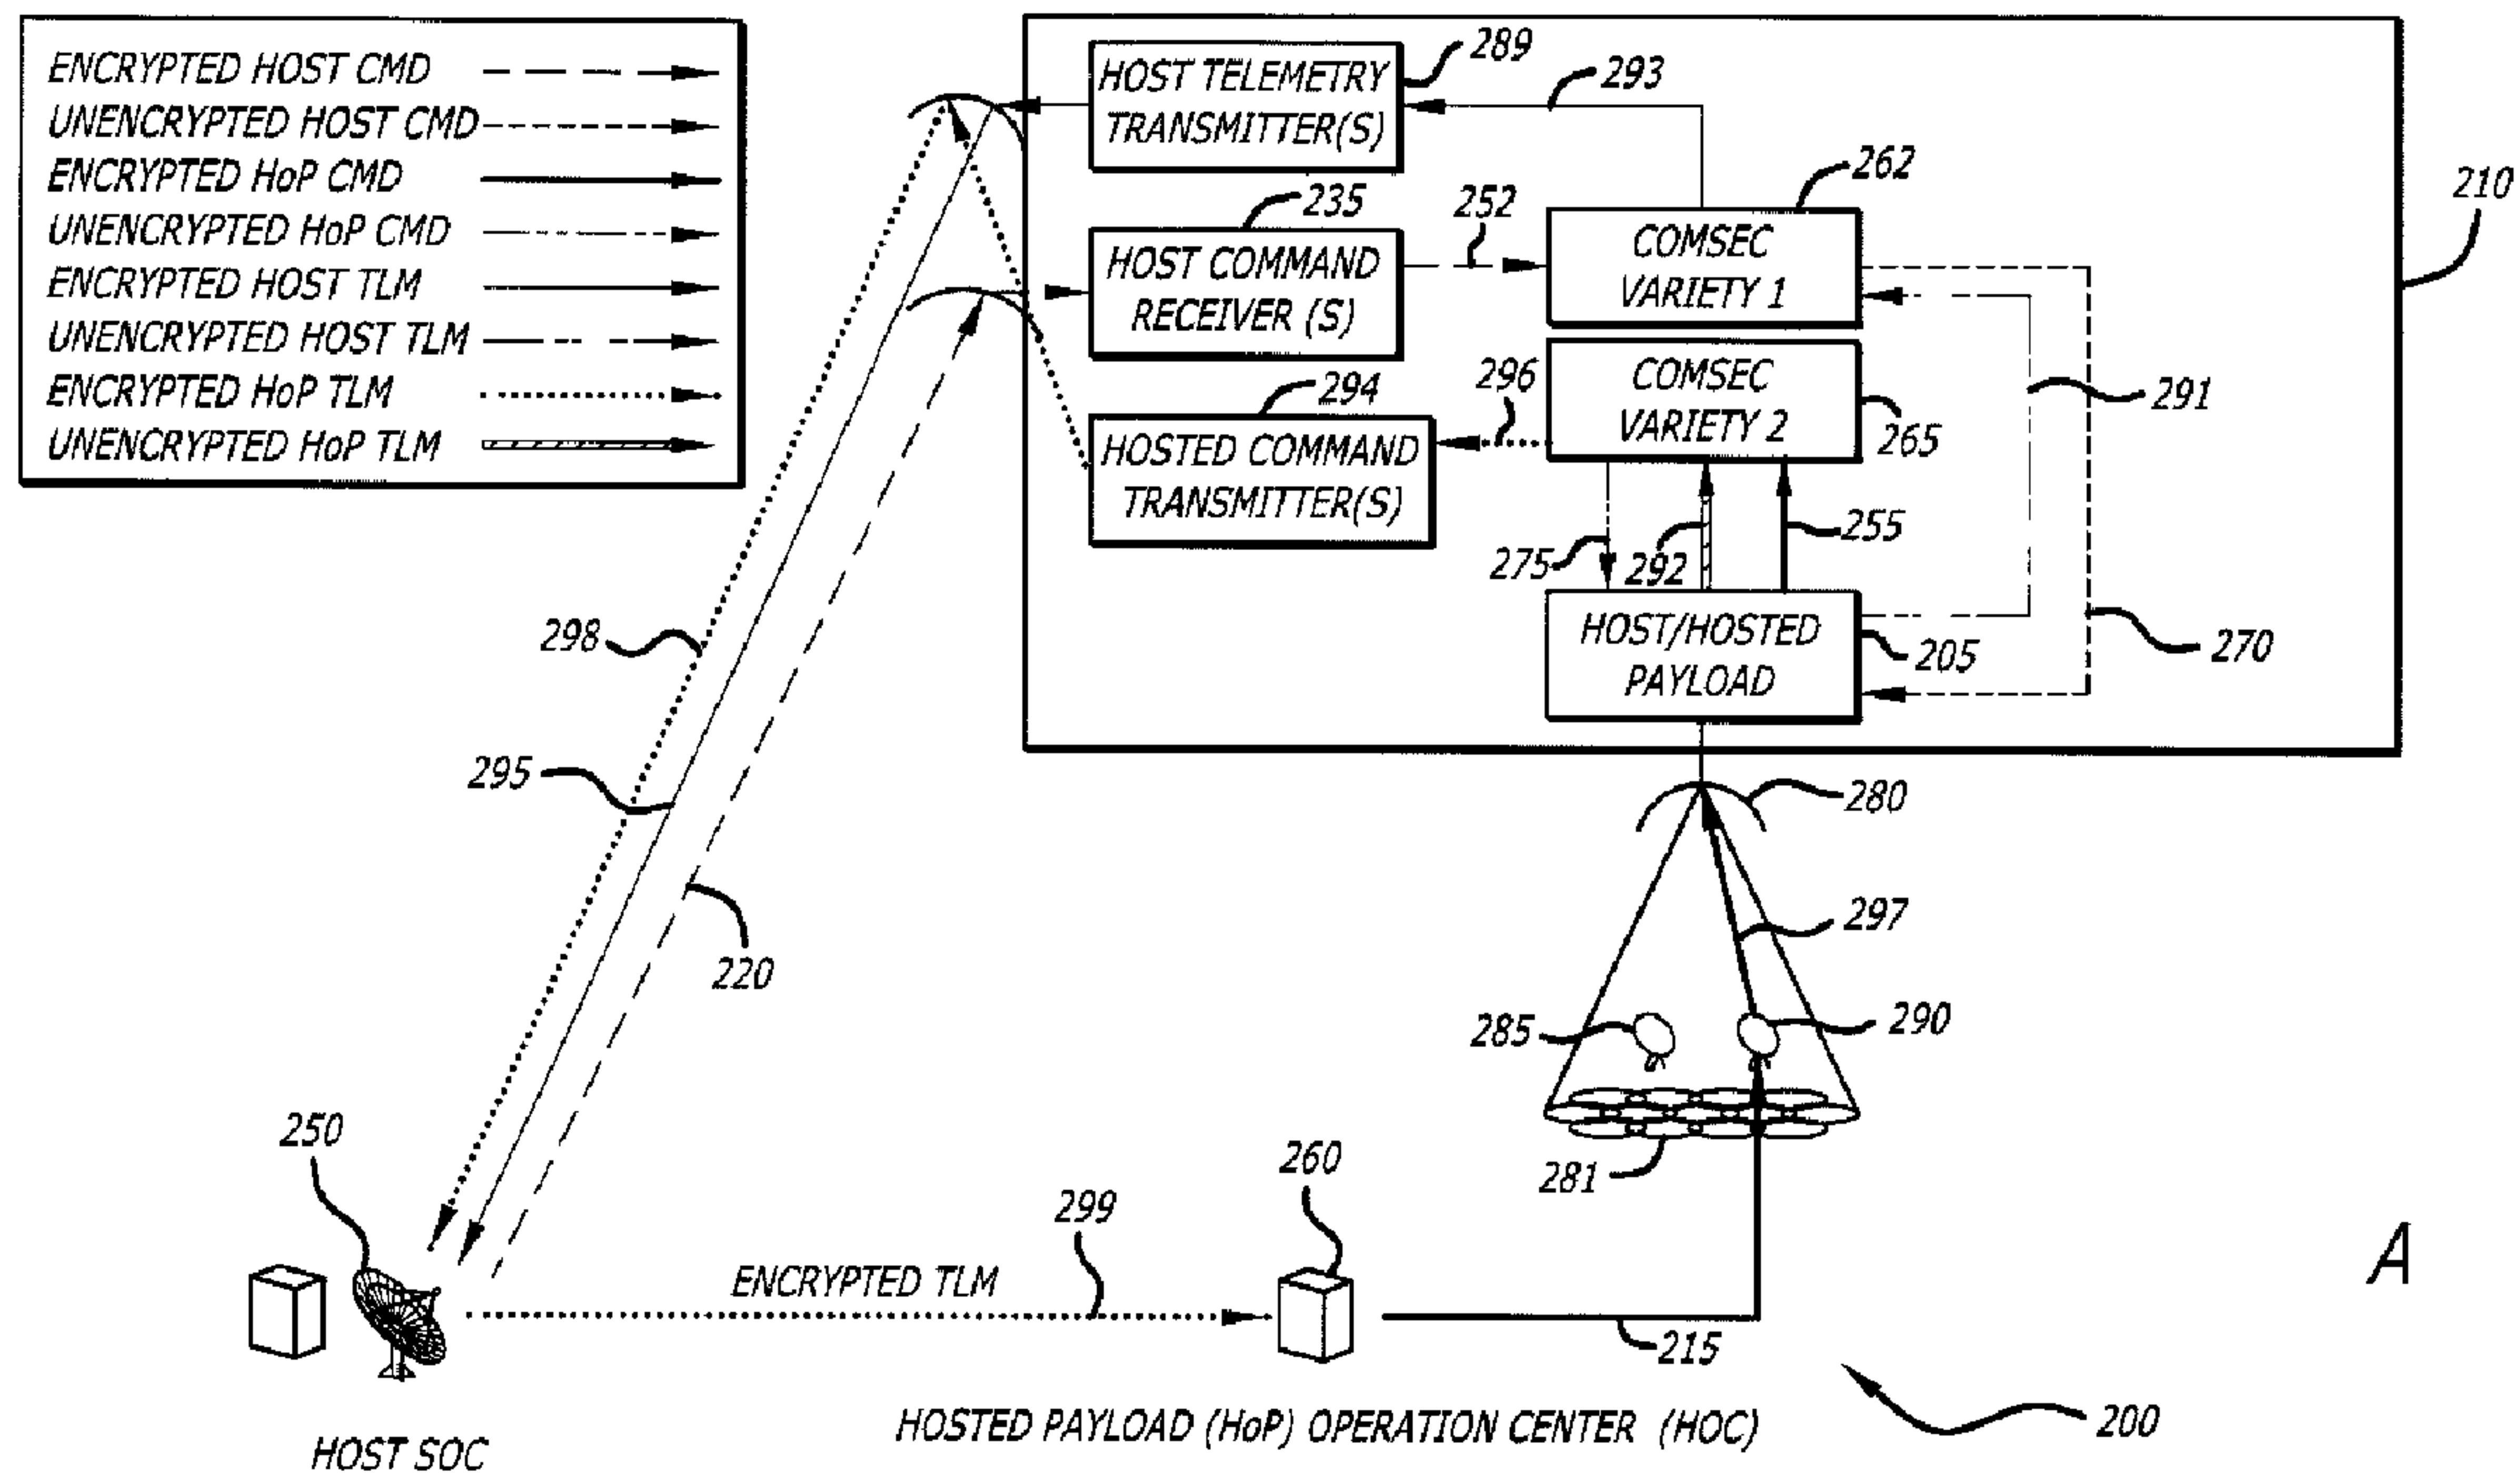
(71) Demandeur/Applicant:
THE BOEING COMPANY, US

(72) Inventeurs/Inventors:
MILLER, KRISTINA, US;
WINIG, ROBERT J., US;
ANDEN, ERIC, US;
THOMAS, DIMITRI, US...

(74) Agent: SMART & BIGGAR

(54) Titre : TRANSPONDEUR VIRTUEL

(54) Title: VIRTUAL TRANSPONDER



(57) Abrégé/Abstract:

A disclosed method for a virtual transponder comprises generating a configuration for a portion of a payload on a vehicle utilized by a host user by using an option for each variable(s) for a portion of the payload utilized by the host user. The method further

(57) **Abrégé(suite)/Abstract(continued):**

comprises generating a configuration for a portion of the payload utilized by a hosted user by using an option for each variable(s) for a portion of the payload utilized by the hosted user. Also, the method comprises generating host commands for reconfiguring the portion of the payload utilized by the host user by using the configuration for the portion of the payload utilized by the host user. Further, the method comprises generating hosted commands for reconfiguring the portion of the payload utilized by the hosted user by using the configuration for the portion of the payload utilized by the hosted user.

ABSTRACT

A disclosed method for a virtual transponder comprises generating a configuration for a portion of a payload on a vehicle utilized by a host user by using an option for each variable(s) for a portion of the payload utilized by the host user. The method further comprises generating a configuration for a portion of the payload utilized by a hosted user by using an option for each variable(s) for a portion of the payload utilized by the hosted user. Also, the method comprises generating host commands for reconfiguring the portion of the payload utilized by the host user by using the configuration for the portion of the payload utilized by the host user. Further, the method comprises generating hosted commands for reconfiguring the portion of the payload utilized by the hosted user by using the configuration for the portion of the payload utilized by the hosted user.

VIRTUAL TRANSPONDER

FIELD

The present disclosure relates to virtual transponders. In particular, it relates to virtual transponders for satellites.

BACKGROUND

Currently, typical transponders on a vehicle (e.g., a satellite) have the ability to perform switching of inputs to outputs of the payload. All of this switching on the payload is commanded and controlled by a single satellite controller with no resource allocation privacy. For example, in a digital transponder, when a user request for a channel with specific bandwidth and antenna characteristics is made, the channel is then set up, used, and then disconnected.

As such, there is a need for an improved transponder design that allows for privacy in the allocation of resources on the payload.

SUMMARY

The present disclosure relates to a method, system, and apparatus for virtual transponders. In at least one embodiment, a method for a virtual transponder on a vehicle comprises generating, by a configuration algorithm (CA), a configuration for a portion of a payload on the vehicle utilized by a host user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user. The method further comprises generating, by the CA, a configuration for a

portion of the payload on the vehicle utilized by a hosted user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user. Also, the method comprises generating, by a host command generator, host commands for reconfiguring the portion of the payload on the vehicle utilized by the host user by using the configuration for the portion of the payload on the vehicle utilized by the host user. In addition, the method comprises generating, by a hosted command generator, hosted commands for reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the configuration for the portion of the payload on the vehicle utilized by the hosted user. Additionally, the method comprises transmitting the host commands and the hosted commands to the vehicle. Also, the method comprises reconfiguring the portion of the payload on the vehicle utilized by the host user by using the host commands. Further the method comprises reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the hosted commands.

In one or more embodiments, at least one variable is: at least one transponder power, at least one transponder spectrum, at least one transponder gain setting, at least one transponder limiter setting, at least one transponder automatic level control setting, at least one transponder phase setting, at least one internal gain generation, bandwidth for at least one beam, at least one frequency band for at least one of at least one beam, at least one transponder beamforming setting, effective isotropic radiation power (EIRP) for at least one of at least one beam, at least one transponder channel, and/or beam steering for at least one of at least one beam.

In at least one embodiment, the reconfiguring comprises reconfiguring: at least one antenna, at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital channelizer, at least one demodulator, at least one modulator, at least one digital switch matrix, at least one digital combiner, and/or at least one analog switch matrix.

In one or more embodiments, at least one antenna a parabolic reflector antenna, a shaped reflector antenna, a multifeed array antenna, and/or a phased array antenna.

In at least one embodiment, the host computing device and the hosted computing device are located at a respective station. In some embodiments, the station a ground station, a terrestrial vehicle, an airborne vehicle, or a marine vehicle.

In one or more embodiments, the vehicle is an airborne vehicle. In some embodiments, the airborne vehicle is a satellite, an aircraft, an unmanned aerial vehicle (UAV), or a space plane.

In at least one embodiment, the method further comprises selecting, with a host graphical user interface (GUI) on a host computing device, the option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user.

In one or more embodiments, the method further comprises selecting, with a hosted GUI on a hosted computing device, the option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user.

In at least one embodiment, a system for a virtual transponder on a vehicle comprises a configuration algorithm (CA) to generate a configuration for a portion of a payload on the vehicle utilized by a host user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user, and to generate a configuration for a portion of the payload on the vehicle utilized by a hosted user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user. The system further comprises a host command generator to generate host commands for reconfiguring the portion of the payload on the vehicle utilized by the host user by using the configuration for the portion of the payload on the vehicle utilized by the host user. Further, the system comprises a hosted command generator to generate hosted commands for reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the configuration for the portion of the payload on the vehicle utilized by the hosted user. In one or more embodiments, the portion of the payload on the vehicle utilized by the host user is reconfigured by using the host commands. In some embodiments, the portion of the payload on the vehicle utilized by the hosted user is reconfigured by using the hosted commands.

In one or more embodiments, the system further comprises a host graphical user interface (GUI), on a host computing device, used to select the option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user.

In at least one embodiment, the system further comprises a hosted GUI, on a hosted computing device, used to select the option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user.

In one or more embodiments, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the method comprises decrypting, by a first communication security module on the vehicle, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module on the vehicle, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. Additionally, the method comprises encrypting, by the first communication security module, unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the method comprises encrypting, by the second communication security module,

unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the method comprises transmitting, by a host telemetry transmitter on the vehicle, the encrypted host telemetry to the host SOC. Additionally, the method comprises transmitting, by the payload antenna, the encrypted hosted telemetry to the hosted receiving antenna. Further, the method comprises transmitting, by the hosted receiving antenna, the encrypted hosted telemetry to the HOC.

In one or more embodiments, the reconfiguring of the payload according to the unencrypted host commands and/or the unencrypted hosted commands comprises adjusting transponder power, transponder spectrum monitoring, transponder connectivity, transponder gain settings, transponder limiter settings, transponder automatic level control settings, transponder phase settings, internal gain generation, bandwidth for at least one beam, at least one frequency band for at least one beam, transponder beamforming settings, effective isotropic radiation power (EIRP) for at least one beam, transponder channels, and/or beam steering.

In at least one embodiment, the reconfiguring of the payload according to the unencrypted host commands and/or the unencrypted hosted commands comprises reconfiguring at least one antenna, at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital channelizer, at least one demodulator, at least one modulator, at least one digital switch matrix, at least one digital combiner, and/or at least one analog switch matrix.

In one or more embodiments, the vehicle is an airborne vehicle. In at least one embodiment, the airborne vehicle is a satellite, aircraft, unmanned aerial vehicle (UAV), or space plane.

In at least one embodiment, the method further comprises encrypting, by the host SOC, the unencrypted host commands by utilizing the first COMSEC variety to produce the encrypted host commands. In addition, the method comprises encrypting, by the HOC, the unencrypted hosted commands by utilizing the second COMSEC variety to produce the encrypted hosted commands.

In at least one embodiment, the method further comprises receiving, by a host command receiver on the vehicle, the encrypted host commands. Also, the method comprises receiving, by a hosted command receiver on the vehicle, the encrypted hosted commands. In addition, the method comprises transmitting, by the host command receiver, the encrypted host commands to the first communication security module. Further, the method comprises transmitting, by the hosted command receiver, the encrypted hosted commands to the second communication security module.

In one or more embodiments, the method further comprises transmitting, by the first communication security module, the unencrypted host commands to the payload. Also, the method comprises transmitting, by the second communication security module, the unencrypted hosted commands to the payload.

In at least one embodiment, the method further comprises transmitting, by the payload, to the first communication security module the unencrypted host telemetry.

Also, the method comprises transmitting, by the payload, to the second communication security module the unencrypted hosted telemetry.

In one or more embodiments, the method further comprises transmitting, by the first communication security module, the encrypted host telemetry to a host telemetry transmitter. In addition, the method comprises transmitting, by the second communication security module, the encrypted hosted telemetry to the payload.

In at least one embodiment, the method further comprises decrypting, by the host SOC, the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry. Also, the method comprises decrypting, by the HOC, the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

In one or more embodiments, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method further comprises transmitting, by the hosted receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by a host spacecraft operations center (SOC), encrypted host commands to the vehicle, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host

commands. Additionally, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Also, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to a host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. Additionally, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. In addition, the method comprises transmitting, by a host telemetry transmitter, the encrypted host telemetry to the host SOC. Also, the method comprises transmitting, by a hosted telemetry transmitter, the encrypted hosted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In one or more embodiments, the reconfiguring of the payload according to the unencrypted host commands and/or the unencrypted hosted commands comprises adjusting at least one of: transponder power, transponder spectrum monitoring, transponder connectivity, transponder gain settings, transponder limiter settings, transponder automatic level control settings, transponder phase settings, internal gain generation, bandwidth for at least one beam, at least one frequency band for at least one of the at least one beam, transponder beamforming settings, effective

isotropic radiation power (EIRP) for at least one of the at least one beam, transponder channels, and/or beam steering.

In at least one embodiment, the reconfiguring of the payload according to the unencrypted host commands and/or the unencrypted hosted commands comprises reconfiguring at least one of: at least one antenna, at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital channelizer, at least one demodulator, at least one modulator, at least one digital switch matrix, at least one digital combiner, and/or at least one analog switch matrix.

In one or more embodiments, the vehicle is an airborne vehicle. In some embodiments, the airborne vehicle is a satellite, aircraft, unmanned aerial vehicle (UAV), or space plane.

In at least one embodiment, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method further comprises transmitting, by the host SOC, the encrypted hosted commands to a vehicle. Also, the method comprises transmitting, by the host SOC, encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to a payload antenna on the vehicle.

Additionally, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or a hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Additionally, the method comprises transmitting, by a host telemetry transmitter, the encrypted host telemetry to the host SOC. Also, the method comprises transmitting, by a hosted telemetry transmitter, the encrypted hosted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method further comprises transmitting, by the hosted

receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by a host spacecraft operations center (SOC), encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to a payload antenna on the vehicle. Additionally, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. In addition, the method comprises encrypting, by the first communication security module, unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. Additionally, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the method comprises transmitting, by a host telemetry transmitter, the encrypted host telemetry to the host SOC. In addition, the method comprises transmitting, by a hosted telemetry transmitter, the encrypted hosted telemetry to the

host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In at least one embodiment, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method further comprises transmitting, by the hosted receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by a host spacecraft operations center (SOC), encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to the payload antenna on the vehicle. Additionally, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted telemetry utilizing the first COMSEC variety to generate

encrypted telemetry. In addition, the method comprises transmitting, by a telemetry transmitter, the encrypted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method further comprises transmitting, by the hosted receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by a host spacecraft operations center (SOC), the encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to the payload antenna. Additionally, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module,

unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Additionally, the method comprises transmitting, by the payload antenna, the encrypted host telemetry to the host receiving antenna. Also, the method comprises transmitting, by the host receiving antenna, the encrypted host telemetry to the host SOC. In addition, the method comprises transmitting, by the payload antenna, the encrypted hosted telemetry to the hosted receiving antenna. Further, the method comprises transmitting, by the hosted receiving antenna, the encrypted hosted telemetry to the HOC.

In at least one embodiment, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method further comprises transmitting, by the hosted receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by a host spacecraft operations center (SOC), encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to the payload antenna. Additionally, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method

comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. In addition, the method comprises transmitting, by the payload antenna, the encrypted telemetry to the host receiving antenna. Additionally, the method comprises transmitting, by the host receiving antenna, the encrypted telemetry to the host SOC. Also, the method comprises transmitting, by the payload antenna, the encrypted telemetry to the hosted receiving antenna. Further, the method comprises transmitting, by the hosted receiving antenna, the encrypted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). In one or more embodiments, the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a host receiving antenna. In one or more embodiments, the encrypted host commands are encrypted utilizing a first COMSEC variety. Also, the method comprises transmitting, by the host receiving antenna, the

encrypted host commands and the encrypted hosted commands to a payload antenna on the vehicle. In addition, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Additionally, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Also, the method comprises reconfiguring a payload on the vehicle according to at least one of the unencrypted host commands or the unencrypted hosted commands. In addition, the method comprises transmitting, by the payload antenna, payload data to at least one of the host receiving antenna or a hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the method comprises transmitting, by a host telemetry transmitter, the encrypted host telemetry to the host SOC. In addition, the method comprises transmitting, by a hosted telemetry transmitter, the encrypted hosted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a hosted receiving antenna, where the

encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system further comprises the hosted receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises a host spacecraft operations center (SOC) to transmit encrypted host commands to the vehicle, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Additionally, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Also, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. In addition, the system comprises the payload antenna to transmit payload data to a host receiving antenna and/or the hosted receiving antenna. Additionally, the system comprises the first communication security module to encrypt unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. Also, the system comprises the second communication security module to encrypt unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. In addition, the system comprises a host telemetry transmitter to transmit the encrypted host telemetry to the host SOC. Additionally, the system comprises a hosted telemetry transmitter to transmit the encrypted hosted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system further comprises the host SOC to transmit the encrypted hosted commands to a vehicle. Also, the system comprises the host SOC to transmit encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to a payload antenna on the vehicle. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises the payload antenna to transmit payload data to the host receiving antenna and/or a hosted receiving antenna. Also, the system comprises the first communication security module to encrypt unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the system comprises the second communication security module to encrypt unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Additionally, the system comprises a host

telemetry transmitter to transmit the encrypted host telemetry to the host SOC. Also, the system comprises a hosted telemetry transmitter to transmit the encrypted hosted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system further comprises the hosted receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises a host spacecraft operations center (SOC) to transmit encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to a payload antenna on the vehicle. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises the payload antenna to transmit payload data to the host receiving antenna and/or the hosted receiving antenna. Also,

the system comprises the first communication security module to encrypt unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the system comprises the second communication security module to encrypt unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Additionally, the system comprises a host telemetry transmitter to transmit the encrypted host telemetry to the host SOC. Also, the system comprises a hosted telemetry transmitter to transmit the encrypted hosted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system further comprises the hosted receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises a host spacecraft operations center (SOC) to transmit encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to the payload antenna on the vehicle. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second communication security module to decrypt the encrypted hosted

commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the system comprises the first communication security module to encrypt unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. In addition, the system comprises a telemetry transmitter to transmit the encrypted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system further comprises the hosted receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises a host spacecraft operations center (SOC) to transmit the encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to the payload antenna. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second

communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises the payload antenna to transmit payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the system comprises the first communication security module to encrypt unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the system comprises the second communication security module to encrypt unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Additionally, the system comprises the payload antenna to transmit the encrypted host telemetry to the host receiving antenna. Also, the system comprises the host receiving antenna to transmit the encrypted host telemetry to the host SOC. In addition, the system comprises the payload antenna to transmit the encrypted hosted telemetry to the hosted receiving antenna. Further, the system comprises the hosted receiving antenna to transmit the encrypted hosted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband commanding comprising a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a hosted receiving antenna, where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system further comprises the hosted receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises a host spacecraft operations center (SOC) to transmit

encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to the payload antenna. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises the payload antenna to transmit payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the system comprises the first communication security module to encrypt unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. In addition, the system comprises the payload antenna to transmit the encrypted telemetry to the host receiving antenna. Additionally, the system comprises the host receiving antenna to transmit the encrypted telemetry to the host SOC. Also, the system comprises the payload antenna to transmit the encrypted telemetry to the hosted receiving antenna. Further, the system comprises the hosted receiving antenna to transmit the encrypted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC).

In one or more embodiments, the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a host receiving antenna. In one or more embodiments, the encrypted host commands are encrypted utilizing a first COMSEC variety. Also, the system comprises the host receiving antenna to transmit the encrypted host commands and the encrypted hosted commands to a payload antenna on the vehicle. In addition, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Additionally, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Also, the system comprises a payload on the vehicle reconfigured according to at least one of the unencrypted host commands or the unencrypted hosted commands. In addition, the system comprises the payload antenna to transmit payload data to at least one of the host receiving antenna or a hosted receiving antenna. Additionally, the system comprises the first communication security module to encrypt unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the system comprises the second communication security module to encrypt unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the system comprises a host telemetry transmitter to transmit the encrypted host telemetry to the host SOC. In addition, the system comprises a hosted telemetry transmitter to transmit the encrypted hosted telemetry to the host SOC.

Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method also comprises transmitting, by the host SOC, the encrypted hosted commands to a host receiving antenna. The method further comprises transmitting, by the host receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by the host SOC, encrypted host commands to the vehicle, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Additionally, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Also, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to a host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. Additionally, the method

comprises encrypting, by the second communication security module, unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. In addition, the method comprises transmitting, by a host telemetry transmitter, the encrypted host telemetry to the host SOC. Also, the method comprises transmitting, by a hosted telemetry transmitter, the encrypted hosted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system also comprises the host SOC to transmit the encrypted hosted commands to a host receiving antenna. The system further comprises the host receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises the host SOC to transmit encrypted host commands to the vehicle, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Additionally, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Also, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands

and/or the unencrypted hosted commands. In addition, the system comprises the payload antenna to transmit payload data to a host receiving antenna and/or the hosted receiving antenna. Additionally, the system comprises the first communication security module to encrypt unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. Also, the system comprises the second communication security module to encrypt unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. In addition, the system comprises a host telemetry transmitter to transmit the encrypted host telemetry to the host SOC. Additionally, the system comprises a hosted telemetry transmitter to transmit the encrypted hosted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In at least one embodiment, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method also comprises transmitting, by the host SOC, the encrypted hosted commands to a host receiving antenna. The method further comprises transmitting, by the host receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by the host SOC, encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to the payload antenna on the vehicle. Additionally, the

method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. In addition, the method comprises transmitting, by a telemetry transmitter, the encrypted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system also comprises the host SOC to transmit the encrypted hosted commands to a host receiving antenna. The system further comprises the host receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises the host SOC to transmit encrypted host commands to a host receiving antenna, where the encrypted host

commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to the payload antenna on the vehicle. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the system comprises the first communication security module to encrypt unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. In addition, the system comprises a telemetry transmitter to transmit the encrypted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method also comprises transmitting, by the host SOC, the encrypted hosted commands to a host receiving antenna. The method further comprises transmitting, by the host receiving antenna, the encrypted

hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by the host SOC, the encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to the payload antenna. Additionally, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Additionally, the method comprises transmitting, by the payload antenna, the encrypted host telemetry to the host receiving antenna. Also, the method comprises transmitting, by the host receiving antenna, the encrypted host telemetry to the host SOC. In addition, the method comprises transmitting, by the payload antenna, the encrypted hosted telemetry to the host receiving antenna. Also, the

method comprises transmitting, by the host receiving antenna, the encrypted hosted telemetry to the host SOC. Further, the method comprises the host SOC, transmitting, the encrypted hosted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband commanding comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system also comprises the host SOC to transmit the encrypted hosted commands to a host receiving antenna. The system further comprises the host receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises a host spacecraft operations center (SOC) to transmit the encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to the payload antenna. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises the payload antenna to transmit payload data to the host receiving antenna and/or the

hosted receiving antenna. Also, the system comprises the first communication security module to encrypt unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the system comprises the second communication security module to encrypt unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry. Additionally, the system comprises the payload antenna to transmit the encrypted host telemetry to the host receiving antenna. Also, the system comprises the host receiving antenna to transmit the encrypted host telemetry to the host SOC. In addition, the system comprises the payload antenna to transmit the encrypted hosted telemetry to the host receiving antenna. Also, the system comprises the host receiving antenna to transmit the encrypted hosted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In at least one embodiment, a method for a virtual transponder utilizing inband commanding comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The method also comprises transmitting by the host SOC the encrypted hosted commands to a host receiving antenna. The method further comprises transmitting, by the host receiving antenna, the encrypted hosted commands to a payload antenna on a vehicle. Also, the method comprises transmitting, by the host SOC, encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety.

In addition, the method comprises transmitting, by the host receiving antenna, the encrypted host commands to the payload antenna. Additionally, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the method comprises transmitting, by the payload antenna, payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the method comprises encrypting, by the first communication security module, unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. In addition, the method comprises transmitting, by the payload antenna, the encrypted telemetry to the host receiving antenna. Additionally, the method comprises transmitting, by the host receiving antenna, the encrypted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband commanding comprising a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC), where the encrypted hosted commands are encrypted utilizing a second communication security (COMSEC) variety. The system also comprises the host SOC to transmit the encrypted hosted commands to a host receiving antenna. The system further

comprises the host receiving antenna to transmit the encrypted hosted commands to a payload antenna on a vehicle. Also, the system comprises the host SOC to transmit encrypted host commands to a host receiving antenna, where the encrypted host commands are encrypted utilizing a first COMSEC variety. In addition, the system comprises the host receiving antenna to transmit the encrypted host commands to the payload antenna. Additionally, the system comprises a first communication security module to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. Also, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. In addition, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Additionally, the system comprises the payload antenna to transmit payload data to the host receiving antenna and/or the hosted receiving antenna. Also, the system comprises the first communication security module to encrypt unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. In addition, the system comprises the payload antenna to transmit the encrypted telemetry to the host receiving antenna. Additionally, the system comprises the host receiving antenna to transmit the encrypted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted telemetry to the HOC.

In at least one embodiment, a method for a virtual transponder on a vehicle comprises generating, by a configuration algorithm (CA), a configuration for a portion of a payload on the vehicle utilized by a host user by using an option for each of at

least one variable for the portion of the payload on the vehicle utilized by the host user. The method further comprises generating, by the CA, a configuration for a portion of the payload on the vehicle utilized by a hosted user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user. Also, the method comprises generating, by a host command generator, host commands for reconfiguring the portion of the payload on the vehicle utilized by the host user by using the configuration for the portion of the payload on the vehicle utilized by the host user. In addition, the method comprises generating, by a hosted command generator, hosted commands for reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the configuration for the portion of the payload on the vehicle utilized by the hosted user. Additionally, the method comprises transmitting the host commands and the hosted commands to the vehicle. Also, the method comprises reconfiguring the portion of the payload on the vehicle utilized by the host user by using the host commands. Further the method comprises reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the hosted commands.

In one or more embodiments, at least one variable is: at least one transponder power, at least one transponder spectrum, at least one transponder gain setting, at least one transponder limiter setting, at least one transponder automatic level control setting, at least one transponder phase setting, at least one internal gain generation, bandwidth for at least one beam, at least one frequency band for at least one of at least one beam, at least one transponder beamforming setting, effective

isotropic radiation power (EIRP) for at least one of at least one beam, at least one transponder channel, and/or beam steering for at least one of at least one beam.

In at least one embodiment, the reconfiguring comprises reconfiguring: at least one antenna, at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital channelizer, at least one demodulator, at least one modulator, at least one digital switch matrix, at least one digital combiner, and/or at least one analog switch matrix.

In one or more embodiments, at least one antenna a parabolic reflector antenna, a shaped reflector antenna, a multifeed array antenna, and/or a phased array antenna.

In at least one embodiment, the host computing device and the hosted computing device are located at a respective station. In some embodiments, the station a ground station, a terrestrial vehicle, an airborne vehicle, or a marine vehicle.

In one or more embodiments, the vehicle is an airborne vehicle. In some embodiments, the airborne vehicle is a satellite, an aircraft, an unmanned aerial vehicle (UAV), or a space plane.

In at least one embodiment, the method further comprises selecting, with a host graphical user interface (GUI) on a host computing device, the option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user.

In one or more embodiments, the method further comprises selecting, with a hosted GUI on a hosted computing device, the option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user.

In at least one embodiment, a system for a virtual transponder on a vehicle comprises a configuration algorithm (CA) to generate a configuration for a portion of a payload on the vehicle utilized by a host user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user, and to generate a configuration for a portion of the payload on the vehicle utilized by a hosted user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user. The system further comprises a host command generator to generate host commands for reconfiguring the portion of the payload on the vehicle utilized by the host user by using the configuration for the portion of the payload on the vehicle utilized by the host user. Further, the system comprises a hosted command generator to generate hosted commands for reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the configuration for the portion of the payload on the vehicle utilized by the hosted user. In one or more embodiments, the portion of the payload on the vehicle utilized by the host user is reconfigured by using the host commands. In some embodiments, the portion of the payload on the vehicle utilized by the hosted user is reconfigured by using the hosted commands.

In one or more embodiments, the system further comprises a host graphical user interface (GUI), on a host computing device, used to select the option for each of

at least one variable for the portion of the payload on the vehicle utilized by the host user.

In at least one embodiment, the system further comprises a hosted GUI, on a hosted computing device, used to select the option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user.

In one or more embodiments, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the method comprises decrypting, by a first communication security module on the vehicle, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module on the vehicle, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. Additionally, the method comprises encrypting, by the first

communication security module, unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the method comprises transmitting, by a host telemetry transmitter on the vehicle, the encrypted host telemetry to the host SOC. Additionally, the method comprises transmitting, by the payload antenna, the encrypted hosted telemetry to the hosted receiving antenna. Further, the method comprises transmitting, by the hosted receiving antenna, the encrypted hosted telemetry to the HOC.

In one or more embodiments, the reconfiguring of the payload according to the unencrypted host commands and/or the unencrypted hosted commands comprises adjusting transponder power, transponder spectrum monitoring, transponder connectivity, transponder gain settings, transponder limiter settings, transponder automatic level control settings, transponder phase settings, internal gain generation, bandwidth for at least one beam, at least one frequency band for at least one beam, transponder beamforming settings, effective isotropic radiation power (EIRP) for at least one beam, transponder channels, and/or beam steering.

In at least one embodiment, the reconfiguring of the payload according to the unencrypted host commands and/or the unencrypted hosted commands comprises reconfiguring at least one antenna, at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital

channelizer, at least one demodulator, at least one modulator, at least one digital switch matrix, at least one digital combiner, and/or at least one analog switch matrix.

In one or more embodiments, the vehicle is an airborne vehicle. In at least one embodiment, the airborne vehicle is a satellite, aircraft, unmanned aerial vehicle (UAV), or space plane.

In at least one embodiment, the method further comprises encrypting, by the host SOC, the unencrypted host commands by utilizing the first COMSEC variety to produce the encrypted host commands. In addition, the method comprises encrypting, by the HOC, the unencrypted hosted commands by utilizing the second COMSEC variety to produce the encrypted hosted commands.

In at least one embodiment, the method further comprises receiving, by a host command receiver on the vehicle, the encrypted host commands. Also, the method comprises receiving, by a hosted command receiver on the vehicle, the encrypted hosted commands. In addition, the method comprises transmitting, by the host command receiver, the encrypted host commands to the first communication security module. Further, the method comprises transmitting, by the hosted command receiver, the encrypted hosted commands to the second communication security module.

In one or more embodiments, the method further comprises transmitting, by the first communication security module, the unencrypted host commands to the payload. Also, the method comprises transmitting, by the second communication security module, the unencrypted hosted commands to the payload.

In at least one embodiment, the method further comprises transmitting, by the payload, to the first communication security module the unencrypted host telemetry. Also, the method comprises transmitting, by the payload, to the second communication security module the unencrypted hosted telemetry.

In one or more embodiments, the method further comprises transmitting, by the first communication security module, the encrypted host telemetry to a host telemetry transmitter. In addition, the method comprises transmitting, by the second communication security module, the encrypted hosted telemetry to the payload.

In at least one embodiment, the method further comprises decrypting, by the host SOC, the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry. Also, the method comprises decrypting, by the HOC, the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

In one or more embodiments, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first COMSEC variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the method comprises decrypting, by a first communication security module on the vehicle, the encrypted host commands utilizing the first COMSEC variety to generate

unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module on the vehicle, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the method comprises encrypting, by the first communication security module, unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. Also, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. In addition, the method comprises transmitting, by the payload antenna, the encrypted host telemetry to the host receiving antenna. Also, the method comprises transmitting, by the host receiving antenna, the encrypted host telemetry to the host SOC. In addition, the method comprises transmitting, by a hosted telemetry transmitter on the vehicle, the encrypted hosted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In at least one embodiment, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host

commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first COMSEC variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the method comprises decrypting, by a first communication security module on the vehicle, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module on the vehicle, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the method comprises encrypting, by the first communication security module, unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. Also, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. In addition, the method comprises transmitting, by the payload antenna, the encrypted host telemetry to the host receiving antenna. Additionally, the method comprises transmitting, by the host receiving antenna, the encrypted host telemetry to the host SOC. Also, the method comprises transmitting, by the payload antenna, the encrypted hosted telemetry to the hosted receiving antenna. Further, the method

comprises transmitting, by the hosted receiving antenna, the encrypted hosted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a vehicle. Also, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing a first communication security (COMSEC) variety to generate unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing a second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring the payload according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the method comprises encrypting, by the first communication security module, unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. Additionally, the method comprises transmitting, by the payload antenna, the encrypted telemetry to the host receiving antenna. Also, the method comprises transmitting, by the host receiving antenna, the encrypted telemetry to the host SOC. In addition, the method comprises transmitting, by the payload antenna, the encrypted telemetry to the hosted receiving

antenna. Further, the method comprises transmitting, by the hosted receiving antenna, the encrypted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband telemetry comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC). The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a vehicle, wherein the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the system comprises a first communication security module on the vehicle to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the system comprises a second communication security module on the vehicle to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the system comprises a payload antenna on the vehicle to transmit payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the system comprises the first communication security module to encrypt unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. Additionally, the system comprises the second communication security module to encrypt unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted

telemetry. Also, the system comprises a host telemetry transmitter on the vehicle to transmit the encrypted host telemetry to the host SOC. In addition, the system comprises the payload antenna to transmit the encrypted hosted telemetry to the hosted receiving antenna. Further, the system comprises the hosted receiving antenna to transmit the encrypted hosted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband telemetry comprising a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC). The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a vehicle, wherein the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the system comprises a first communication security module on the vehicle to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the system comprises a second communication security module on the vehicle to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the system comprises a payload antenna on the vehicle to transmit payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the system comprises the first communication security module to encrypt unencrypted host telemetry from the payload by utilizing the first COMSEC variety to

generate encrypted host telemetry. Additionally, the system comprises the second communication security module to encrypt unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the system comprises the payload antenna to transmit the encrypted host telemetry to the host receiving antenna. Also, the system comprises the host receiving antenna to transmit the encrypted host telemetry to the host SOC. In addition, the system comprises a hosted telemetry transmitter on the vehicle to transmit the encrypted hosted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband telemetry comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC). The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the system comprises a first communication security module on the vehicle to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the system comprises a second communication security module on the vehicle to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted

commands. Also, the system comprises a payload antenna on the vehicle to transmit payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the system comprises the first communication security module to encrypt unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. Additionally, the system comprises the second communication security module to encrypt unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the system comprises the payload antenna to transmit the encrypted host telemetry to the host receiving antenna. In addition, the system comprises the host receiving antenna to transmit the encrypted host telemetry to the host SOC. Additionally, the system comprises the payload antenna to transmit the encrypted hosted telemetry to the hosted receiving antenna. Further, the system comprises the hosted receiving antenna to transmit the encrypted hosted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband telemetry comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC). The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a vehicle. Also, the system comprises a first communication security module to decrypt the encrypted host commands utilizing a first communication security (COMSEC) variety to generate unencrypted host commands. In addition, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing a second COMSEC variety to generate unencrypted hosted commands. Additionally, the system

comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the system comprises a payload antenna on the vehicle to transmit payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the system comprises the first communication security module to encrypt unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. Additionally, the system comprises the payload antenna to transmit the encrypted telemetry to the host receiving antenna. Also, the system comprises the host receiving antenna to transmit the encrypted telemetry to the host SOC. In addition, the system comprises the payload antenna to transmit the encrypted telemetry to the hosted receiving antenna. Further, the system comprises the hosted receiving antenna to transmit the encrypted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the method comprises decrypting, by a first communication security module on the vehicle, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module on the vehicle, the

encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. Additionally, the method comprises encrypting, by the first communication security module, unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. In addition, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the method comprises transmitting, by a host telemetry transmitter on the vehicle, the encrypted host telemetry to the host SOC. Additionally, the method comprises transmitting, by the payload antenna, the encrypted hosted telemetry to the host receiving antenna. Also, the method comprises transmitting, by the host receiving antenna, the encrypted hosted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In at least one embodiment, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center (HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first COMSEC variety and the encrypted

hosted commands are encrypted utilizing a second COMSEC variety. Also, the method comprises decrypting, by a first communication security module on the vehicle, the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module on the vehicle, the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring a payload on the vehicle according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the method comprises encrypting, by the first communication security module, unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. Also, the method comprises encrypting, by the second communication security module, unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. In addition, the method comprises transmitting, by the payload antenna, the encrypted host telemetry and the encrypted hosted telemetry to the host receiving antenna. Additionally, the method comprises transmitting, by the host receiving antenna, the encrypted host telemetry and the encrypted hosted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted hosted telemetry to the HOC.

In one or more embodiments, a method for a virtual transponder utilizing inband telemetry comprises transmitting, by a hosted payload (HoP) operation center

(HOC), encrypted hosted commands to a host spacecraft operations center (SOC). The method further comprises transmitting, by the host SOC, encrypted host commands and the encrypted hosted commands to a vehicle. Also, the method comprises decrypting, by a first communication security module, the encrypted host commands utilizing a first communication security (COMSEC) variety to generate unencrypted host commands. In addition, the method comprises decrypting, by a second communication security module, the encrypted hosted commands utilizing a second COMSEC variety to generate unencrypted hosted commands. Additionally, the method comprises reconfiguring the payload according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the method comprises transmitting, by a payload antenna on the vehicle, payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the method comprises encrypting, by the first communication security module, unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. Additionally, the method comprises transmitting, by the payload antenna, the encrypted telemetry to the host receiving antenna. Also, the method comprises transmitting, by the host receiving antenna, the encrypted telemetry to the host SOC. In addition, the method comprises transmitting, by the payload antenna, the encrypted telemetry to the host receiving antenna. Also, the method comprises transmitting, by the host receiving antenna, the encrypted telemetry to the host SOC. Further, the method comprises transmitting, by the host SOC, the encrypted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband telemetry comprises a hosted payload (HoP) operation center (HOC) to transmit

encrypted hosted commands to a host spacecraft operations center (SOC). The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a vehicle, wherein the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the system comprises a first communication security module on the vehicle to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the system comprises a second communication security module on the vehicle to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the system comprises a payload antenna on the vehicle to transmit payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the system comprises the first communication security module to encrypt unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. Additionally, the system comprises the second communication security module to encrypt unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted telemetry. Also, the system comprises a host telemetry transmitter on the vehicle to transmit the encrypted host telemetry to the host SOC. In addition, the system comprises the payload antenna to transmit the encrypted hosted telemetry to the host receiving antenna. Also, the system comprises the host receiving antenna to transmit

the encrypted hosted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted hosted telemetry to the HOC.

In at least one embodiment, a system for a virtual transponder utilizing inband telemetry comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC). The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a vehicle, where the encrypted host commands are encrypted utilizing a first communication security (COMSEC) variety and the encrypted hosted commands are encrypted utilizing a second COMSEC variety. Also, the system comprises a first communication security module on the vehicle to decrypt the encrypted host commands utilizing the first COMSEC variety to generate unencrypted host commands. In addition, the system comprises a second communication security module on the vehicle to decrypt the encrypted hosted commands utilizing the second COMSEC variety to generate unencrypted hosted commands. Additionally, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the system comprises a payload antenna on the vehicle to transmit payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the system comprises the first communication security module to encrypt unencrypted host telemetry from the payload by utilizing the first COMSEC variety to generate encrypted host telemetry. Additionally, the system comprises the second communication security module to encrypt unencrypted hosted telemetry from the payload by utilizing the second COMSEC variety to generate encrypted hosted

telemetry. Also, the system comprises the payload antenna to transmit the encrypted host telemetry and encrypted hosted telemetry to the host receiving antenna. In addition, the system comprises the host receiving antenna to transmit the encrypted host telemetry and the encrypted hosted telemetry to the host SOC. Further, the system comprises the hosted SOC to transmit the encrypted hosted telemetry to the HOC.

In one or more embodiments, a system for a virtual transponder utilizing inband telemetry comprises a hosted payload (HoP) operation center (HOC) to transmit encrypted hosted commands to a host spacecraft operations center (SOC). The system further comprises the host SOC to transmit encrypted host commands and the encrypted hosted commands to a vehicle. Also, the system comprises a first communication security module to decrypt the encrypted host commands utilizing a first communication security (COMSEC) variety to generate unencrypted host commands. In addition, the system comprises a second communication security module to decrypt the encrypted hosted commands utilizing a second COMSEC variety to generate unencrypted hosted commands. Additionally, the system comprises a payload on the vehicle reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. Also, the system comprises a payload antenna on the vehicle to transmit payload data to a host receiving antenna and/or a hosted receiving antenna. In addition, the system comprises the first communication security module to encrypt unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry. Additionally, the system comprises the payload antenna to transmit the encrypted telemetry to the host receiving antenna.

Also, the system comprises the host receiving antenna to transmit the encrypted telemetry to the host SOC. Further, the system comprises the host SOC to transmit the encrypted telemetry to the HOC. The features, functions, and advantages can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments.

DRAWINGS

These and other features, aspects, and advantages of the present disclosure will become better understood with regard to the following description, appended claims, and accompanying drawings where:

FIG. 1 is a diagram showing simplified architecture for the disclosed system for a virtual transponder, in accordance with at least one embodiment of the present disclosure.

FIGS. 2A – 13H show exemplary systems and methods for a virtual transponder utilizing inband commanding, in accordance with at least one embodiment of the present disclosure.

FIG. 2A is a diagram showing the disclosed system for a virtual transponder utilizing inband commanding for the hosted user using a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIG. 2B is a diagram showing the disclosed system for a virtual transponder utilizing inband commanding for the hosted user using a host receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIGS. 3A, 3B, 3C, and 3D together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the hosted user using a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIGS. 3E, 3F, 3G, and 3H together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the hosted user using a host receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIG. 4 is a diagram showing the disclosed system for a virtual transponder utilizing inband commanding for the host user, in accordance with at least one embodiment of the present disclosure.

FIGS. 5A, 5B, 5C, and 5D together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user, in accordance with at least one embodiment of the present disclosure.

FIG. 6A is a diagram showing the disclosed system for a virtual transponder utilizing inband commanding for the host user and the hosted user using two receiving antennas and employing two communication security (COMSEC) varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. 6B is a diagram showing the disclosed system for a virtual transponder utilizing inband commanding for the host user and the hosted user using one receiving antenna and employing two communication security (COMSEC) varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 7A, 7B, 7C, and 7D together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using two receiving antennas and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 7E, 7F, 7G, and 7H together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using one receiving antenna and employing two communication security (COMSEC) varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. 8A is a diagram showing the disclosed system for a virtual transponder utilizing inband commanding for the host user and the hosted user using two receiving antennas and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. 8B is a diagram showing the disclosed system for a virtual transponder utilizing inband commanding for the host user and the hosted user using one receiving antenna and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 9A, 9B, 9C, and 9D together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using two receiving antennas and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 9E, 9F, 9G, and 9H together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using one receiving antenna and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. 10A is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using two receiving antennas and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. 10B is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using one receiving antenna and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 11A, 11B, 11C, and 11D together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using two receiving antennas and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 11E, 11F, 11G, and 11H together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using one receiving antenna and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. 12A is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using two receiving antennas and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. 12B is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using one receiving antenna and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 13A, 13B, 13C, and 13D together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using two receiving antennas and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 13E, 13F, 13G, and 13H together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using one receiving antenna and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure.

FIGS. 14 – 19B show exemplary systems and methods for a virtual transponder, in accordance with at least one embodiment of the present disclosure.

FIG. 14 is a diagram showing the disclosed system for a virtual transponder on a vehicle, in accordance with at least one embodiment of the present disclosure.

FIG. **15** is a diagram showing an exemplary allocation of bandwidth amongst a plurality of beams when utilizing the disclosed virtual transponder, in accordance with at least one embodiment of the present disclosure.

FIG. **16** is a diagram showing the switch architecture for a flexible allocation of bandwidth amongst a plurality of beams when utilizing the disclosed virtual transponder, in accordance with at least one embodiment of the present disclosure.

FIG. **17** is a diagram showing details of the digital channelizer of FIG. **16**, in accordance with at least one embodiment of the present disclosure.

FIG. **18** is a diagram showing exemplary components on the vehicle that may be utilized by the disclosed virtual transponder, in accordance with at least one embodiment of the present disclosure.

FIGS. **19A** and **19B** together show a flow chart for the disclosed method for a virtual transponder on a vehicle, in accordance with at least one embodiment of the present disclosure.

FIGS. **20A** – **27H** show exemplary systems and methods for a virtual transponder utilizing inband telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. **20A** is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry for the hosted user being transmitted to a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIG. 20B is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry for the hosted user being transmitted to a host receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIGS. 21A, 21B, 21C, and 21D together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the hosted user being transmitted to a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIGS. 21E, 21F, 21G, and 21H together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the hosted user being transmitted to a host receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIG. 22 is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user, in accordance with at least one embodiment of the present disclosure.

FIGS. 23A, 23B, 23C, and 23D together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user, in accordance with at least one embodiment of the present disclosure.

FIG. 24A is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna and a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIG. **24B** is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIGS. **25A**, **25B**, **25C**, and **25D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna and a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIGS. **25E**, **25F**, **25G**, and **25H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna, in accordance with at least one embodiment of the present disclosure.

FIG. **26A** is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna and a hosted receiving antenna, where the telemetry is encrypted utilizing a single communication security (COMSEC) variety, in accordance with at least one embodiment of the present disclosure.

FIG. **26B** is a diagram showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna, where the telemetry is encrypted utilizing a single communication security (COMSEC) variety, in accordance with at least one embodiment of the present disclosure.

FIGS. 27A, 27B, 27C, and 27D together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna and a hosted receiving antenna, where the telemetry is encrypted utilizing a single COMSEC variety, in accordance with at least one embodiment of the present disclosure.

FIGS. 27E, 27F, 27G, and 27H together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna, where the telemetry is encrypted utilizing a single COMSEC variety, in accordance with at least one embodiment of the present disclosure.

DESCRIPTION

The methods and apparatus disclosed herein provide an operative system for virtual transponders. The system of the present disclosure allows for vehicle operators to privately share vehicle resources. It should be noted that in this disclosure, in-band frequency band(s) refer to a frequency band(s) that is the same frequency band(s) utilized to transmit payload data; and out-of-band frequency band(s) refer to a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data.

As previously mentioned above, currently, typical transponders on a vehicle (e.g., a satellite) have the ability to perform switching of inputs to outputs of the payload. All of this switching on the payload is commanded and controlled by a single satellite controller with no resource allocation privacy. For example, in a digital

transponder, when a user request for a channel with specific bandwidth and antenna characteristics is made, the channel is then set up, used, and then disconnected.

The disclosed system allows for private vehicle resource allocation and control that provides vehicle users the ability to privately, dynamically, allocate resources on demand. In particular, the disclosed system employs a virtual transponder, which is a transponder partitioned into multiple transponders with independent command and control. In one or more embodiments, an exemplary virtual transponder includes a digital transponder with a digital channelizer, a digital switch matrix, and a digital combiner that is configured to partition a digital transponder into multiple transponders with independent command and control. Command and control of the virtual transponder is achieved via ground software that provides dynamic allocation and privatization of the digital switch matrix for bandwidth on demand.

It should be noted that the disclosed system for private vehicle resource allocation and control may employ various different types of transponders for the virtual transponder other than the specific disclosed embodiments (e.g., depicted FIGS. 16 – 18) for the virtual transponder. For example, various different types of transponders may be employed for the virtual transponder including, but not limited to, various different types of digital transponders, various different types of analog transponders (e.g., conventional repeater-type transponders), and various different types of combination analog/digital transponders.

In the following description, numerous details are set forth in order to provide a more thorough description of the system. It will be apparent, however, to one skilled in the art, that the disclosed system may be practiced without these specific details. In the other instances, well known features have not been described in detail so as not to unnecessarily obscure the system.

Embodiments of the present disclosure may be described herein in terms of functional and/or logical components and various processing steps. It should be appreciated that such components may be realized by any number of hardware, software, and/or firmware components configured to perform the specified functions. For example, an embodiment of the present disclosure may employ various integrated circuit components (e.g., memory elements, digital signal processing elements, logic elements, look-up tables, or the like), which may carry out a variety of functions under the control of one or more processors, microprocessors, or other control devices. In addition, those skilled in the art will appreciate that embodiments of the present disclosure may be practiced in conjunction with other components, and that the system described herein is merely one example embodiment of the present disclosure.

For the sake of brevity, conventional techniques and components related to satellite communication systems, and other functional aspects of the system (and the individual operating components of the systems) may not be described in detail herein. Furthermore, the connecting lines shown in the various figures contained herein are intended to represent example functional relationships and/or physical

couplings between the various elements. It should be noted that many alternative or additional functional relationships or physical connections may be present in an embodiment of the present disclosure.

FIG. 1 is a diagram **100** showing simplified architecture for the disclosed system for a virtual transponder, in accordance with at least one embodiment of the present disclosure. In this figure, a simplified view of multiple possible hosted payload configurations is illustrated. In particular, this figure shows a space segment **110** and a ground segment **120**. The space segment **110** represents a vehicle. Various different types of vehicles may be employed for the vehicle including, but not limited to, an airborne vehicle. And, various different types of airborne vehicles may be employed for the vehicle including, but not limited to, a satellite, an aircraft, an unmanned aerial vehicle (UAV), and a space plane.

In the case of a satellite being employed for the vehicle, it should be noted that satellites typically include computer-controlled systems. A satellite generally includes a bus **130** and a payload **140**. The bus **130** may include systems (which include components) that control the satellite. These systems perform tasks, such as power generation and control, thermal control, telemetry, attitude control, orbit control, and other suitable operations.

The payload **140** of the satellite provides functions to users of the satellite. The payload **140** may include antennas, transponders, and other suitable devices. For example, with respect to communications, the payload **140** in a satellite may be used

to provide Internet access, telephone communications, radio, television, and other types of communications.

The payload **140** of the satellite may be used by different entities. For example, the payload **140** may be used by the owner of the satellite (i.e. the host user), one or more customers (i.e. the hosted user(s)), or some combination thereof.

For example, the owner of a satellite may lease different portions of the payload **140** to different customers. In one example, one group of antenna beams generated by the payload **140** of the satellite may be leased to one customer, while a second group of antenna beams may be leased to a second customer. In another example, one group of antenna beams generated by the payload **140** of the satellite may be utilized by the owner of the satellite, while a second group of antenna beams may be leased to a customer. In yet another example, some or all of the antenna beams generated by the payload **140** of the satellite may be shared by one customer and a second customer. In another example, some or all of the antenna beams generated by the payload **140** of the satellite may be shared by the owner of the satellite and a customer. When satellites are shared by different users, users may have a shared communications link (e.g., Interface A) to the satellite, or each user may have a separate communications link (e.g., Interfaces A and D) to the satellite.

Leasing a satellite to multiple customers may increase the revenues that an owner of a satellite can obtain. Further, a customer may use a subset of the total resources in a satellite for a cost that is less than the cost for the customer to

purchase and operate a satellite, to build and operate a satellite, or to lease an entire satellite.

Referring back to FIG. 1, the ground segment **120** comprises a host spacecraft operations center (SOC) (e.g., a ground station associated with the owner of the satellite) **150**, and a hosted payload (HoP) operation center(s) (HOC(s)) (e.g., a ground station(s) associated with a customer(s) that is leasing at least a portion of the payload of the satellite from the owner) **160**.

FIG. 1 shows a number of different possible communication links (i.e. Interfaces A – E). It should be noted that the disclosed system may employ some or all of these illustrated communication links. Interface A, which may comprise multiple links, is an out-of-band command and telemetry link from the host SOC **150** to command the satellite. Interface B, which may comprise multiple links, is a communication link, between the bus **130** and the payload **140**. Interface B may be used to control essential items, such as power. Information that may be communicated from the bus **130** to the payload **140** via Interface B may include, but is not limited to, time, ephemeris, and payload commands. Information that may be communicated from the payload **140** to the bus **130** via Interface B may include, but is not limited to, payload telemetry.

Interface C, which may comprise multiple links, is an inband command and telemetry link for bus and/or payload. Interface D, which may comprise multiple links, is a command and telemetry link from the HOC(s) **160** to command the satellite.

Interface E, which may comprise multiple links, between the host SOC **150** and the HOCs **160** allows for requests from the HOCs for resource sharing of the payload **140**.

FIGS. **2A – 13H** show exemplary systems and methods for a virtual transponder utilizing inband commanding, in accordance with at least one embodiment of the present disclosure.

FIG. **2A** is a diagram **200** showing the disclosed system for a virtual transponder utilizing inband commanding for the hosted user (i.e. HOC) **260** using a hosted receiving antenna **290**, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **210**, a host SOC **250**, and a HOC **260** are shown. The HOC **260** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **205** of the vehicle **210** from the owner of a satellite (i.e. the host SOC) **250**. It should be noted that in some embodiments, the HOC **260** may lease all of the payload **205** of the vehicle **210** from the owner of a satellite (i.e. the host SOC) **250**. Also, it should be noted that in some embodiments, the HOC **260** may own the payload **205** (e.g., a steerable antenna) of the vehicle **210**, and contract the host SOC **250** to transmit encrypted hosted commands to the vehicle **210**.

During operation, the HOC **260** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **205** that the HOC **260** is leasing from the host SOC **250**. The host SOC **250** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC

variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **205** that host SOC **250** is utilizing for itself.

It should be noted that, although in FIG. **2A** the host SOC **250** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **250** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **260** then transmits **215** the encrypted hosted commands to a hosted receiving antenna **290**. After the hosted receiving antenna **290** receives the encrypted hosted commands, the hosted receiving antenna **290** transmits **297** the encrypted hosted commands to a payload antenna **280** on the vehicle **210**. The hosted receiving antenna **290** transmits **297** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **280** transmits the encrypted hosted commands to a payload **205**. The payload **205** on the vehicle **210**

receives the encrypted hosted commands. The payload **205** then transmits **255** the encrypted hosted commands to a second communication security module **265**. The second communication security module **265** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **265** may comprise one or more modules. In addition, the second communication security module **265** may comprise one or more processors.

The host SOC **250** transmits **220** the encrypted host commands to the vehicle **210**. The host SOC **250** transmits **220** the encrypted host commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **235** on the vehicle **210** receives the encrypted host commands.

The host command receiver **235** then transmits **252** the encrypted host commands to a first communication security module **262**. The first communication security module **262** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **262** may comprise one or more modules. In addition, the first communication security module **262** may comprise one or more processors.

The first communication security module **262** then transmits **270** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **205**.

The second communication security module **265** transmits **275** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **205**. The payload **205** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **280** then transmits (e.g., in one or more antenna beams **281**) payload data to a host receiving antenna **285** and/or the hosted receiving antenna **290** on the ground.

Also, it should be noted that, although in FIG. **2A**, antenna beams **281** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **281** may include more or less number of beams than is shown in FIG. **2A** (e.g., antenna beams **281** may only include a single beam), and antenna beams **281** may include beams of different shapes than circular spot beams as is shown in FIG. **2A** (e.g., antenna beams **281** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **280** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **280** may comprise one or more multifeed antenna arrays.

The payload **205** transmits **291** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **205** that is utilized by the host SOC **250**) to the first communication security module **262**. The first communication security module **262** then encrypts the unencrypted host telemetry

utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **205** transmits **292** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **205** that is leased by the HOC **260**) to the second communication security module **265**. The second communication security module **265** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **262** then transmits **293** the encrypted host telemetry to a host telemetry transmitter **289**. The host telemetry transmitter **289** then transmits **295** the encrypted host telemetry to the host SOC **250**. The host telemetry transmitter **289** transmits **295** the encrypted host telemetry utilizing an out-of-band frequency band(s). The host SOC **250** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **265** then transmits **296** the encrypted hosted telemetry to a hosted telemetry transmitter **294**. The hosted telemetry transmitter **294** then transmits **298** the encrypted hosted telemetry to the host SOC **250**. The telemetry transmitter **294** transmits **298** the encrypted hosted telemetry utilizing an out-of-band frequency band(s). The host SOC **250** then transmits **299** the encrypted hosted telemetry to the HOC **260**. The HOC **260** then

decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIG. 2B is a diagram **2000** showing the disclosed system for a virtual transponder utilizing inband commanding for the hosted user (i.e. HOC) **2060** using a host receiving antenna **20085**, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **2010**, a host SOC **2050**, and a HOC **2060** are shown. The HOC **2060** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **2005** of the vehicle **2010** from the owner of a satellite (i.e. the host SOC) **2050**. It should be noted that in some embodiments, the HOC **2060** may lease all of the payload **2005** of the vehicle **2010** from the owner of a satellite (i.e. the host SOC) **2050**. Also, it should be noted that in some embodiments, the HOC **2060** may own the payload **2005** (e.g., a steerable antenna) of the vehicle **2010**, and contract the host SOC **2050** to transmit encrypted hosted commands to the vehicle **2010**.

During operation, the HOC **2060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **2005** that the HOC **2060** is leasing from the host SOC **2050**. The host SOC **2050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host

CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **2005** that host SOC **2050** is utilizing for itself.

It should be noted that, although in FIG. **2B** the host SOC **2050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **2050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **2060** then transmits **2015** the encrypted hosted commands to the host SOC **2050**. Then, the host SOC **2050** transmits **2016** the encrypted hosted commands to a host receiving antenna **2085**. After the host receiving antenna **2085** receives the encrypted hosted commands, the host receiving antenna **2085** transmits **2097** the encrypted hosted commands to a payload antenna **2080** on the vehicle **2010**. The host receiving antenna **2085** transmits **2097** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **2080** transmits the encrypted hosted commands to a payload **2005**. The payload **2005** on

the vehicle **2010** receives the encrypted hosted commands. The payload **2005** then transmits **2055** the encrypted hosted commands to a second communication security module **2065**. The second communication security module **2065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **2065** may comprise one or more modules. In addition, the second communication security module **2065** may comprise one or more processors.

The host SOC **2050** transmits **2020** the encrypted host commands to the vehicle **2010**. The host SOC **2050** transmits **2020** the encrypted host commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **2035** on the vehicle **2010** receives the encrypted host commands.

The host command receiver **2035** then transmits **2052** the encrypted host commands to a first communication security module **2062**. The first communication security module **2062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **2062** may comprise one or more modules. In addition, the first communication security module **2062** may comprise one or more processors.

The first communication security module **2062** then transmits **2070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload)

2005. The second communication security module **2065** transmits **2075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **2005**. The payload **2005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **2080** then transmits (e.g., in one or more antenna beams **2081**) payload data to a host receiving antenna **2085** and/or the hosted receiving antenna **2090** on the ground.

Also, it should be noted that, although in FIG. 2B, antenna beams **2081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **2081** may include more or less number of beams than is shown in FIG. 2B (e.g., antenna beams **2081** may only include a single beam), and antenna beams **2081** may include beams of different shapes than circular spot beams as is shown in FIG. 2B (e.g., antenna beams **2081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **2080** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **2080** may comprise one or more multifeed antenna arrays.

The payload **2005** transmits **2091** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **2005** that is utilized by the host SOC **2050**) to the first communication security module **2062**. The first communication security module **2062** then encrypts the unencrypted

host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **2005** transmits **2092** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **2005** that is leased by the HOC **2060**) to the second communication security module **2065**. The second communication security module **2065** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **2062** then transmits **2093** the encrypted host telemetry to a host telemetry transmitter **2089**. The host telemetry transmitter **2089** then transmits **2095** the encrypted host telemetry to the host SOC **2050**. The host telemetry transmitter **2089** transmits **2095** the encrypted host telemetry utilizing an out-of-band frequency band(s). The host SOC **2050** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **2065** then transmits **2096** the encrypted hosted telemetry to a hosted telemetry transmitter **2094**. The hosted telemetry transmitter **2094** then transmits **2098** the encrypted hosted telemetry to the host SOC **2050**. The telemetry transmitter **2094** transmits **2098** the encrypted hosted telemetry utilizing an out-of-band frequency band(s). The host SOC **2050** then transmits **2099** the encrypted hosted telemetry to the HOC **2060**. The HOC **2060** then

decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIGS. 3A, 3B, 3C, and 3D together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the hosted user using a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure. At the start **300** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **305**. Then, the HOC transmits the encrypted hosted commands to a hosted receiving antenna **310**. The hosted receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **315**. Then, the payload antenna transmits the encrypted hosted commands to a payload **320**. The payload then transmits the encrypted hosted commands to a second communication security module **325**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **330**. The host SOC then transmits the encrypted host commands to the vehicle **335**. Then, a host command receiver on the vehicle receives the encrypted host commands **340**. The host command receiver then transmits the encrypted host commands to a first communication security module **345**. Then, the first communication security module decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **350**. The second communication security

module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **355**. Then, the first communication security module transmits the unencrypted host commands to the payload **360**. The second communication security module transmits the unencrypted hosted commands to the payload **365**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **370**. The payload antenna then transmits payload data to a host receiving antenna and/or the hosted receiving antenna **375**. Then, the payload transmits to the first communication security module unencrypted host telemetry **380**. The payload transmits to the second communication security module unencrypted hosted telemetry **385**. Then, the first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **390**. The second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **391**.

Then, the first communication security module transmits the encrypted host telemetry to a host telemetry transmitter **392**. The host telemetry transmitter then transmits the encrypted host telemetry to the host SOC **393**. Then, the host SOC decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **394**.

Then, the second communication security module transmits the encrypted hosted telemetry to a hosted telemetry transmitter **395**. The hosted telemetry

transmitter then transmits the encrypted hosted telemetry to the host SOC **396**. Then, the host SOC transmits the encrypted hosted telemetry to the HOC **397**. The HOC then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **398**. Then, the method ends **399**.

FIGS. **3E**, **3F**, **3G**, and **3H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the hosted user using a host receiving antenna, in accordance with at least one embodiment of the present disclosure. At the start **3000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **3005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **3010**. The host SOC then transmits the encrypted hosted commands to a host receiving antenna **3012**. The host receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **3015**. Then, the payload antenna transmits the encrypted hosted commands to a payload **3020**. The payload then transmits the encrypted hosted commands to a second communication security module **3025**.

Then, a host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **3030**. The host SOC then transmits the encrypted host commands to the vehicle **3035**. Then, a host command receiver on the vehicle receives the encrypted host commands **3040**. The host command receiver then transmits the encrypted host commands to a first

communication security module **3045**. Then, the first communication security module decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **3050**. The second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **3055**. Then, the first communication security module transmits the unencrypted host commands to the payload **3060**. The second communication security module transmits the unencrypted hosted commands to the payload **3065**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **3070**. The payload antenna then transmits payload data to a host receiving antenna and/or the hosted receiving antenna **3075**. Then, the payload transmits to the first communication security module unencrypted host telemetry **3080**. The payload transmits to the second communication security module unencrypted hosted telemetry **3085**. Then, the first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **3090**. The second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **3091**.

Then, the first communication security module transmits the encrypted host telemetry to a host telemetry transmitter **3092**. The host telemetry transmitter then transmits the encrypted host telemetry to the host SOC **3093**. Then, the host SOC

decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **3094**.

Then, the second communication security module transmits the encrypted hosted telemetry to a hosted telemetry transmitter **3095**. The hosted telemetry transmitter then transmits the encrypted hosted telemetry to the host SOC **3096**. Then, the host SOC transmits the encrypted hosted telemetry to the HOC **3097**. The HOC then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **3098**. Then, the method ends **3099**.

FIG. 4 is a diagram **400** showing the disclosed system for a virtual transponder utilizing inband commanding for the host user (i.e. host SOC) **450**, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **410**, a host SOC **450**, and a HOC **460** are shown. The HOC **460** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **405** of the vehicle **410** from the owner of a satellite (i.e. the host SOC) **450**. It should be noted that in some embodiments, the HOC **460** may lease all of the payload **405** of the vehicle **410** from the owner of a satellite (i.e. the host SOC) **450**. Also, it should be noted that in some embodiments, the HOC **460** may own the payload **405** (e.g., a steerable antenna) of the vehicle **410**, and contract the host SOC **450** to transmit encrypted hosted commands to the vehicle **410**.

During operation, the HOC **460** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted

hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **405** that the HOC **460** is leasing from the host SOC **450**. The host SOC **450** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **405** that host SOC **450** is utilizing for itself.

It should be noted that, although in FIG. **4** the host SOC **450** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **450** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The host SOC **450** then transmits **420** the encrypted host commands to a host receiving antenna **485**. After the host receiving antenna **485** receives the encrypted host commands, the host receiving antenna **485** transmits **497** the encrypted host commands to a payload antenna **480** on the vehicle **410**. The host

receiving antenna **485** transmits **497** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **480** transmits the encrypted host commands to a payload **405**. The payload **405** on the vehicle **410** receives the encrypted host commands. The payload **405** then transmits **452** the encrypted host commands to a first communication security module **462**. The first communication security module **462** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **462** may comprise one or more modules. In addition, the first communication security module **462** may comprise one or more processors.

The HOC **460** transmits **415** the encrypted hosted commands to the host SOC **450**. The host SOC **450** transmits **425** the encrypted hosted commands to the vehicle **410**. The host SOC **450** transmits **425** the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The hosted command receiver **435** on the vehicle **410** receives the encrypted host commands.

The hosted command receiver **435** then transmits **455** the encrypted hosted commands to a second communication security module **465**. The second communication security module **465** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **465** may comprise one or more modules. In addition, the second communication security module **465** may comprise one or more processors.

The first communication security module **462** then transmits **470** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **405**. The second communication security module **465** transmits **475** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **405**. The payload **405** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **480** then transmits (e.g., in one or more antenna beams **481**) payload data to a host receiving antenna **485** and/or the hosted receiving antenna **490** on the ground.

Also, it should be noted that, although in FIG. 4, antenna beams **481** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **481** may include more or less number of beams than is shown in FIG. 4 (e.g., antenna beams **481** may only include a single beam), and antenna beams **481** may include beams of different shapes than circular spot beams as is shown in FIG. 4 (e.g., antenna beams **481** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **480** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **480** may comprise one or more multifeed antenna arrays.

The payload **405** transmits **491** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **405** that is utilized by the host SOC **450**) to the first communication security module **462**. The first communication security module **462** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **405** transmits **492** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **405** that is leased by the HOC **460**) to the second communication security module **465**. The second communication security module **465** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **462** then transmits **493** the encrypted host telemetry to a host telemetry transmitter **489**. The host telemetry transmitter **489** then transmits **495** the encrypted host telemetry to the host SOC **450**. The host telemetry transmitter **489** transmits **495** the encrypted host telemetry utilizing an out-of-band frequency band(s). The host SOC **450** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **465** then transmits **496** the encrypted hosted telemetry to a hosted telemetry transmitter **494**. The hosted telemetry transmitter **494** then transmits **498** the encrypted hosted telemetry to the

host SOC **450**. The telemetry transmitter **494** transmits **498** the encrypted hosted telemetry utilizing an out-of-band frequency band(s). The host SOC **450** then transmits **499** the encrypted hosted telemetry to the HOC **460**. The HOC **460** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIGS. **5A**, **5B**, **5C**, and **5D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user, in accordance with at least one embodiment of the present disclosure. At the start **500** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **505**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **510**. The host SOC then transmits the encrypted hosted commands to a vehicle **515**. Then, a hosted command receiver on the vehicle receives the encrypted hosted commands **520**. The hosted command receiver then transmits the encrypted hosted commands to a second communication security module **525**.

Then, the host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **530**. The host SOC then transmits the encrypted host commands to a host receiving antenna **535**. Then, the host receiving antenna transmits the encrypted host commands to a payload antenna on the vehicle **540**. The payload antenna then transmits the encrypted host commands to a payload on the vehicle **545**. Then, the payload transmits the

encrypted host commands to a first communication security module **550**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **555**. The second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **560**. Then, the first communication security module transmits the unencrypted host commands to the payload **565**. The second communication security module transmits the unencrypted hosted commands to the payload **570**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **575**. The payload antenna then transmits payload data to the host receiving antenna and/or a hosted receiving antenna **580**. Then, the payload transmits to the first communication security module unencrypted host telemetry **585**. The payload transmits to the second communication security module unencrypted hosted telemetry **590**. Then, the first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **591**. The second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **592**.

Then, the first communication security module transmits the encrypted host telemetry to a host telemetry transmitter **593**. The host telemetry transmitter then transmits the encrypted host telemetry to the host SOC **594**. Then, the host SOC

decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **595**.

Then, the second communication security module transmits the encrypted hosted telemetry to a hosted telemetry transmitter **596**. The hosted telemetry transmitter then transmits the encrypted hosted telemetry to the host SOC **597**. Then, the host SOC transmits the encrypted hosted telemetry to the HOC **598**. The HOC then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **599**. Then, the method ends **501**.

FIG. **6A** is a diagram **600** showing the disclosed system for a virtual transponder utilizing inband commanding for the host user (i.e. host SOC) **650** and the hosted user (i.e. HOC) **660** using two receiving antennas and employing two communication security (COMSEC) varieties for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **610**, a host SOC **650**, and a HOC **660** are shown. The HOC **660** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **605** of the vehicle **610** from the owner of a satellite (i.e. the host SOC) **650**. It should be noted that in some embodiments, the HOC **660** may lease all of the payload **605** of the vehicle **610** from the owner of a satellite (i.e. the host SOC) **650**. Also, it should be noted that in some embodiments, the HOC **660** may own the payload **605** (e.g., a steerable antenna) of the vehicle **610**, and contract the host SOC **650** to transmit encrypted hosted commands to the vehicle **610**.

During operation, the HOC **660** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **605** that the HOC **660** is leasing from the host SOC **650**. The host SOC **650** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **605** that host SOC **650** is utilizing for itself.

It should be noted that, although in FIG. **6A** the host SOC **650** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **650** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The host SOC **650** then transmits **620** the encrypted host commands to a host receiving antenna **685**. After the host receiving antenna **685** receives the

encrypted host commands, the host receiving antenna **685** transmits **621** the encrypted host commands to a payload antenna **680** on the vehicle **610**. The host receiving antenna **685** transmits **621** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **680** transmits the encrypted host commands to a payload **605**. The payload **605** on the vehicle **610** receives the encrypted host commands. The payload **605** then transmits **652** the encrypted host commands to a first communication security module **662**. The first communication security module **662** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **662** may comprise one or more modules. In addition, the first communication security module **662** may comprise one or more processors.

The HOC **660** then transmits **615** the encrypted hosted commands to a hosted receiving antenna **690**. After the hosted receiving antenna **690** receives the encrypted hosted commands, the hosted receiving antenna **690** transmits **697** the encrypted hosted commands to a payload antenna **680** on the vehicle **610**. The hosted receiving antenna **690** transmits **697** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **680** transmits the encrypted hosted commands to a payload **605**. The payload **605** on the vehicle **610** receives the encrypted hosted commands. The payload **605** then transmits **655** the

encrypted hosted commands to a second communication security module **665**. The second communication security module **665** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **665** may comprise one or more modules. In addition, the second communication security module **665** may comprise one or more processors.

The first communication security module **662** then transmits **670** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **605**. The second communication security module **665** transmits **675** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **605**. The payload **605** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **680** then transmits (e.g., in one or more antenna beams **681**) payload data to the host receiving antenna **685** and/or the hosted receiving antenna **690** on the ground.

Also, it should be noted that, although in FIG. **6A**, antenna beams **681** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **681** may include more or less number of beams than is shown in FIG. **6A** (e.g., antenna beams **681** may only include a single beam), and antenna beams **681** may include beams of different shapes than circular spot beams as is shown in FIG. **6A** (e.g., antenna beams **681** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **680** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **680** may comprise one or more multifeed antenna arrays.

The payload **605** transmits **691** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **605** that is utilized by the host SOC **650**) to the first communication security module **662**. The first communication security module **662** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **605** transmits **692** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **605** that is leased by the HOC **660**) to the second communication security module **665**. The second communication security module **665** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **662** then transmits **693** the encrypted host telemetry to a host telemetry transmitter **689**. The host telemetry transmitter **689** then transmits **695** the encrypted host telemetry to the host SOC **650**. The host telemetry transmitter **689** transmits **695** the encrypted host telemetry utilizing an out-of-band frequency band(s). The host SOC **650** then decrypts the encrypted

host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **665** then transmits **696** the encrypted hosted telemetry to a hosted telemetry transmitter **694**. The hosted telemetry transmitter **694** then transmits **698** the encrypted hosted telemetry to the host SOC **650**. The telemetry transmitter **694** transmits **698** the encrypted hosted telemetry utilizing an out-of-band frequency band(s). The host SOC **650** then transmits **699** the encrypted hosted telemetry to the HOC **660**. The HOC **660** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIG. 6B is a diagram **6000** showing the disclosed system for a virtual transponder utilizing inband commanding for the host user (i.e. host SOC) **6050** and the hosted user (i.e. HOC) **6060** using one receiving antenna and employing two communication security (COMSEC) varieties for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **6010**, a host SOC **6050**, and a HOC **6060** are shown. The HOC **6060** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **6005** of the vehicle **6010** from the owner of a satellite (i.e. the host SOC) **6050**. It should be noted that in some embodiments, the HOC **6060** may lease all of the payload **6005** of the vehicle **6010** from the owner of a satellite (i.e. the host SOC) **6050**. Also, it should be noted that in some embodiments, the HOC **6060** may own the payload **6005** (e.g., a steerable antenna) of the vehicle

6010, and contract the host SOC **6050** to transmit encrypted hosted commands to the vehicle **6010**.

During operation, the HOC **6060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **6005** that the HOC **6060** is leasing from the host SOC **6050**. The host SOC **6050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **6005** that host SOC **6050** is utilizing for itself.

It should be noted that, although in FIG. 6B the host SOC **6050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **6050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **6060** transmits **6015** the encrypted hosted commands to the host SOC **6050**. The host SOC **6050** then transmits **6020**, **6025** the encrypted host commands and the encrypted hosted commands to a host receiving antenna **6085**. After the host receiving antenna **6085** receives the encrypted host commands and the encrypted hosted commands, the host receiving antenna **6085** transmits **6097**, **6021** the encrypted host commands and the encrypted hosted commands to a payload antenna **6080** on the vehicle **6010**. The host receiving antenna **6085** transmits **6097**, **6021** the encrypted host commands and the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **6080** transmits the encrypted host commands and the encrypted hosted commands to a payload **6005**. The payload **6005** on the vehicle **6010** receives the encrypted host commands and the encrypted hosted commands. The payload **6005** then transmits **6052** the encrypted host commands to a first communication security module **6062**. The first communication security module **6062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety 1) to generate unencrypted host commands.

It should be noted that the first communication security module **6062** may comprise one or more modules. In addition, the first communication security module **6062** may comprise one or more processors.

The payload **6005** then transmits **6055** the encrypted hosted commands to a second communication security module **6065**. The second communication security

module **6065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety 2) to generate unencrypted hosted commands.

It should be noted that the second communication security module **6065** may comprise one or more modules. In addition, the second communication security module **6065** may comprise one or more processors.

The first communication security module **6062** then transmits **6070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **6005**. The second communication security module **6065** transmits **6075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **6005**. The payload **6005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **6080** then transmits (e.g., in one or more antenna beams **6081**) payload data to a host receiving antenna **6085** and/or the hosted receiving antenna **6090** on the ground.

Also, it should be noted that, although in FIG. 6B, antenna beams **6081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **6081** may include more or less number of beams than is shown in FIG. 6B (e.g., antenna beams **6081** may only include a single beam), and antenna beams **6081** may include beams of different shapes than circular spot beams as is shown in FIG. 6B (e.g., antenna beams **6081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **6080** may comprise one or more reflector dishes including, but not limited to, parabolic

reflectors and/or shaped reflectors. In some embodiments, the payload antenna **6080** may comprise one or more multifeed antenna arrays.

The payload **6005** transmits **6091** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **6005** that is utilized by the host SOC **6050**) to the first communication security module **6062**. The first communication security module **6062** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **6005** transmits **6092** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **6005** that is leased by the HOC **6060**) to the second communication security module **6065**. The second communication security module **6065** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **6062** then transmits **6093** the encrypted host telemetry to a host telemetry transmitter **6089**. The host telemetry transmitter **6089** then transmits **6095** the encrypted host telemetry to the host SOC **6050**. The host telemetry transmitter **6089** transmits **6095** the encrypted host telemetry utilizing an out-of-band frequency band(s). The host SOC **6050** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **6065** then transmits **6096** the encrypted hosted telemetry to a hosted telemetry transmitter **6094**. The hosted telemetry transmitter **6094** then transmits **6098** the encrypted hosted telemetry to the host SOC **6050**. The telemetry transmitter **6094** transmits **6098** the encrypted hosted telemetry utilizing an out-of-band frequency band(s). The host SOC **6050** then transmits **6099** the encrypted hosted telemetry to the HOC **6060**. The HOC **6060** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIGS. 7A, 7B, 7C, and 7D together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using two receiving antennas and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure. At the start **700** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **705**. Then, the HOC transmits the encrypted hosted commands to a hosted receiving antenna **710**. The hosted receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **715**. Then, the payload antenna transmits the encrypted hosted commands to a payload on the vehicle **720**. The payload then transmits the encrypted hosted commands to a second communication security module **725**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands

730. The host SOC then transmits the encrypted host commands to a host receiving antenna **735**. Then, the host receiving antenna transmits the encrypted host commands to a payload antenna on the vehicle **740**. The payload antenna then transmits the encrypted host commands to the payload **745**. Then, the payload transmits the encrypted host commands to a first communication security module **750**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **755**. The second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **760**. Then, the first communication security module transmits the unencrypted host commands to the payload **765**. The second communication security module then transmits the unencrypted hosted commands to the payload **770**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **775**. The payload antenna then transmits payload data to the host receiving antenna and/or the hosted receiving antenna **780**. Then, the payload transmits to the first communication security module unencrypted host telemetry **785**. The payload then transmits to the second communication security module unencrypted hosted telemetry **790**. Then, the first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **791**. The second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **792**.

Then, the first communication security module transmits the encrypted host telemetry to a host telemetry transmitter **793**. The host telemetry transmitter then transmits the encrypted host telemetry to the host SOC **794**. Then, the host SOC decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **795**.

Then, the second communication security module transmits the encrypted hosted telemetry to a hosted telemetry transmitter **796**. The hosted telemetry transmitter then transmits the encrypted hosted telemetry to the host SOC **797**. Then, the host SOC transmits the encrypted hosted telemetry to the HOC **798**. The HOC then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **799**. Then, the method ends **701**.

FIGS. 7E, 7F, 7G, and 7H together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using one receiving antenna and employing two communication security (COMSEC) varieties for telemetry, in accordance with at least one embodiment of the present disclosure. At the start **70000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **70005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **70010**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **70015**. The host SOC then transmits the encrypted host commands and the encrypted hosted

commands to a host receiving antenna **70020**. Then, the host receiving antenna transmits the encrypted host commands and the encrypted hosted commands to a payload antenna on the vehicle **70025**. The payload antenna then transmits the encrypted host commands and the encrypted hosted commands to a payload on the vehicle **70030**. Then, the payload transmits the encrypted host commands to a first communication security module **70035**. The payload then transmits the encrypted hosted commands to a second communication security module **70040**.

The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **70045**. The second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **70050**. Then, the first communication security module transmits the unencrypted host commands to the payload **70055**. The second communication security module transmits the unencrypted hosted commands to the payload **70060**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **70065**. The payload antenna then transmits payload data to the host receiving antenna and/or a hosted receiving antenna **70070**. Then, the payload transmits to the first communication security module unencrypted host telemetry **70075**. The payload transmits to the second communication security module unencrypted hosted telemetry **70080**. Then, the first communication security module encrypts the unencrypted host telemetry utilizing the

first COMSEC variety to generate encrypted host telemetry **70085**. The second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **70090**.

Then, the first communication security module transmits the encrypted host telemetry to a host telemetry transmitter **70091**. The host telemetry transmitter then transmits the encrypted host telemetry to the host SOC **70092**. Then, the host SOC decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **70093**.

Then, the second communication security module transmits the encrypted hosted telemetry to a hosted telemetry transmitter **70094**. The hosted telemetry transmitter then transmits the encrypted hosted telemetry to the host SOC **70095**. Then, the host SOC transmits the encrypted hosted telemetry to the HOC **70096**. The HOC then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **70097**. Then, the method ends **70098**.

FIG. **8A** is a diagram **800** showing the disclosed system for a virtual transponder utilizing inband commanding for the host user (i.e. host SOC) **850** and the hosted user (i.e. HOC) **860** using two receiving antennas and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **810**, a host SOC **850**, and a HOC **860** are shown. The HOC **860** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **805** of the vehicle **810** from the owner of a satellite (i.e. the host SOC)

850. It should be noted that in some embodiments, the HOC **860** may lease all of the payload **805** of the vehicle **810** from the owner of a satellite (i.e. the host SOC) **850**. Also, it should be noted that in some embodiments, the HOC **860** may own the payload **805** (e.g., a steerable antenna) of the vehicle **810**, and contract the host SOC **850** to transmit encrypted hosted commands to the vehicle **810**.

During operation, the HOC **860** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **805** that the HOC **860** is leasing from the host SOC **850**. The host SOC **850** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **805** that host SOC **850** is utilizing for itself.

It should be noted that, although in FIG. **8A** the host SOC **850** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **850** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second

COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The host SOC **850** then transmits **820** the encrypted host commands to a host receiving antenna **885**. After the host receiving antenna **885** receives the encrypted host commands, the host receiving antenna **885** transmits **821** the encrypted host commands to a payload antenna **880** on the vehicle **810**. The host receiving antenna **885** transmits **821** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **880** transmits the encrypted host commands to a payload **805**. The payload **805** on the vehicle **810** receives the encrypted host commands. The payload **805** then transmits **852** the encrypted host commands to a first communication security module **862**. The first communication security module **862** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **862** may comprise one or more modules. In addition, the first communication security module **862** may comprise one or more processors.

The HOC **860** then transmits **815** the encrypted hosted commands to a hosted receiving antenna **890**. After the hosted receiving antenna **890** receives the encrypted hosted commands, the hosted receiving antenna **890** transmits **897** the encrypted hosted commands to a payload antenna **880** on the vehicle **810**. The

hosted receiving antenna **890** transmits **897** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **880** transmits the encrypted hosted commands to a payload **805**. The payload **805** on the vehicle **810** receives the encrypted hosted commands. The payload **805** then transmits **855** the encrypted hosted commands to a second communication security module **865**. The second communication security module **865** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **865** may comprise one or more modules. In addition, the second communication security module **865** may comprise one or more processors.

The first communication security module **862** then transmits **870** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **805**. The second communication security module **865** transmits **875** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **805**. The payload **805** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **880** then transmits (e.g., in one or more antenna beams **881**) payload data to the host receiving antenna **885** and/or the hosted receiving antenna **890** on the ground.

Also, it should be noted that, although in FIG. **8A**, antenna beams **881** is shown to include a plurality of circular spot beams; in other embodiments, antenna

beams **881** may include more or less number of beams than is shown in FIG. **8A** (e.g., antenna beams **881** may only include a single beam), and antenna beams **881** may include beams of different shapes than circular spot beams as is shown in FIG. **8A** (e.g., antenna beams **881** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **880** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **880** may comprise one or more multifeed antenna arrays.

The payload **805** transmits **891** unencrypted telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **805** that is utilized by the host SOC **850**; and unencrypted HoP TLM, which is telemetry data related to the portion of the payload **805** that is leased by the HOC **860**) to the first communication security module **862**. The first communication security module **862** then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry (i.e. encrypted TLM).

The first communication security module **862** then transmits **893** the encrypted telemetry to a telemetry transmitter **889**. The telemetry transmitter **889** then transmits **895** the encrypted telemetry to the host SOC **850**. The host telemetry transmitter **889** transmits **895** the encrypted telemetry utilizing an out-of-band frequency band(s).

The host SOC **850** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The host SOC **850** then utilizes a database that comprises host payload decommutated information and does not comprise hosted payload decommutated information (i.e. a database without hosted payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **805** that is utilized by the host SOC **850**.

The host SOC **850** then transmits **899** the encrypted telemetry to the HOC **860**. The HOC **860** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The HOC **860** then utilizes a database that comprises hosted payload decommutated information and does not comprise host payload decommutated information (i.e. a database without host payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **805** that is utilized by the HOC **860**.

FIG. **8B** is a diagram **8000** showing the disclosed system for a virtual transponder utilizing inband commanding for the host user (i.e. host SOC) **8050** and the hosted user (i.e. HOC) **8060** using one receiving antenna and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **8010**, a host SOC **8050**, and a HOC **8060** are shown. The HOC **8060** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **8005** of the vehicle **8010** from the owner of a satellite

(i.e. the host SOC) **8050**. It should be noted that in some embodiments, the HOC **8060** may lease all of the payload **8005** of the vehicle **8010** from the owner of a satellite (i.e. the host SOC) **8050**. Also, it should be noted that in some embodiments, the HOC **8060** may own the payload **8005** (e.g., a steerable antenna) of the vehicle **8010**, and contract the host SOC **8050** to transmit encrypted hosted commands to the vehicle **8010**.

During operation, the HOC **8060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **8005** that the HOC **8060** is leasing from the host SOC **8050**. The host SOC **8050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **8005** that host SOC **8050** is utilizing for itself.

It should be noted that, although in FIG. **8B** the host SOC **8050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **8050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm

or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The host SOC **8050** then transmits **8020** the encrypted host commands to a host receiving antenna **8085**. After the host receiving antenna **8085** receives the encrypted host commands, the host receiving antenna **8085** transmits **8021** the encrypted host commands to a payload antenna **8080** on the vehicle **8010**. The host receiving antenna **8085** transmits **8021** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **8080** transmits the encrypted host commands to a payload **8005**. The payload **8005** on the vehicle **8010** receives the encrypted host commands. The payload **8005** then transmits **8052** the encrypted host commands to a first communication security module **8062**. The first communication security module **8062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **8062** may comprise one or more modules. In addition, the first communication security module **8062** may comprise one or more processors.

The HOC **8060** then transmits **8015** the encrypted hosted commands to the host SOC **8050**. The host SOC **8050** then transmits **8016** the encrypted hosted

commands to a host receiving antenna **8085**. After the host receiving antenna **8085** receives the encrypted hosted commands, the host receiving antenna **8085** transmits **8097** the encrypted hosted commands to a payload antenna **8080** on the vehicle **8010**. The host receiving antenna **8085** transmits **8097** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **8080** transmits the encrypted hosted commands to a payload **8005**. The payload **8005** on the vehicle **8010** receives the encrypted hosted commands. The payload **8005** then transmits **8055** the encrypted hosted commands to a second communication security module **8065**. The second communication security module **8065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety 2) to generate unencrypted hosted commands.

It should be noted that the second communication security module **8065** may comprise one or more modules. In addition, the second communication security module **8065** may comprise one or more processors.

The first communication security module **8062** then transmits **8070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **8005**. The second communication security module **8065** transmits **8075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **8005**. The payload **8005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **8080** then transmits

(e.g., in one or more antenna beams **8081**) payload data to the host receiving antenna **8085** and/or the hosted receiving antenna **8090** on the ground.

Also, it should be noted that, although in FIG. **8B**, antenna beams **8081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **8081** may include more or less number of beams than is shown in FIG. **8B** (e.g., antenna beams **8081** may only include a single beam), and antenna beams **8081** may include beams of different shapes than circular spot beams as is shown in FIG. **8B** (e.g., antenna beams **8081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **8080** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **8080** may comprise one or more multifeed antenna arrays.

The payload **8005** transmits **8091** unencrypted telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **8005** that is utilized by the host SOC **8050**; and unencrypted HoP TLM, which is telemetry data related to the portion of the payload **8005** that is leased by the HOC **8060**) to the first communication security module **8062**. The first communication security module **8062** then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry (i.e. encrypted TLM).

The first communication security module **8062** then transmits **8093** the encrypted telemetry to a telemetry transmitter **8089**. The telemetry transmitter **8089**

then transmits **8095** the encrypted telemetry to the host SOC **8050**. The host telemetry transmitter **8089** transmits **8095** the encrypted telemetry utilizing an out-of-band frequency band(s).

The host SOC **8050** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The host SOC **8050** then utilizes a database that comprises host payload decommutated information and does not comprise hosted payload decommutated information (i.e. a database without hosted payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **8005** that is utilized by the host SOC **8050**.

The host SOC **8050** then transmits **8099** the encrypted telemetry to the HOC **8060**. The HOC **8060** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The HOC **8060** then utilizes a database that comprises hosted payload decommutated information and does not comprise host payload decommutated information (i.e. a database without host payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **8005** that is utilized by the HOC **8060**.

FIGS. **9A**, **9B**, **9C**, and **9D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using two receiving antennas and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure. At

the start **900** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **905**. Then, the HOC transmits the encrypted hosted commands to a hosted receiving antenna **910**. The hosted receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **915**. Then, the payload antenna transmits the encrypted hosted commands to a payload on the vehicle **920**. The payload then transmits the encrypted hosted commands to a second communication security module **925**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **930**. The host SOC then transmits the encrypted host commands to a host receiving antenna **935**. Then, the host receiving antenna transmits the encrypted host commands to a payload antenna on the vehicle **940**. The payload antenna then transmits the encrypted host commands to the payload **945**. Then, the payload transmits the encrypted host commands to a first communication security module **950**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **955**. Then, the second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **960**. The first communication security module then transmits the unencrypted host commands to the payload **965**. Then, the second communication security module transmits the unencrypted hosted commands to the payload **970**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **975**. The payload antenna then transmits payload data to the host receiving antenna and/or the hosted receiving antenna **980**. Then, the payload transmits to the first communication security module unencrypted telemetry **985**. The first communication security module then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry **990**.

Then, the first communication security module transmits the encrypted telemetry to a telemetry transmitter **991**. The telemetry transmitter then transmits the encrypted telemetry to the host SOC **992**. Then, the host SOC decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **993**. The host SOC then determining telemetry data related to a portion of the payload utilized by the host SOC by using a database without hosted decommutated information to read the unencrypted telemetry **994**. Then, the host SOC transmits the encrypted telemetry to the HOC **995**. The HOC then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **996**. Then, the HOC determines telemetry data related to a portion of the payload utilized by the HOC by using a database without host decommutated information to read the unencrypted telemetry **997**. Then, the method ends **998**.

FIGS. **9E**, **9F**, **9G**, and **9H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband commanding for the host user and the hosted user using one receiving antenna and employing one COMSEC variety for

telemetry, in accordance with at least one embodiment of the present disclosure. At the start **9000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **9005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **9010**. The host SOC then transmits the encrypted hosted commands to a host receiving antenna **9012**. The host receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **9015**. Then, the payload antenna transmits the encrypted hosted commands to a payload on the vehicle **9020**. The payload then transmits the encrypted hosted commands to a second communication security module **9025**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **9030**. The host SOC then transmits the encrypted host commands to a host receiving antenna **9035**. Then, the host receiving antenna transmits the encrypted host commands to a payload antenna on the vehicle **9040**. The payload antenna then transmits the encrypted host commands to the payload **9045**. Then, the payload transmits the encrypted host commands to a first communication security module **9050**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **9055**. Then, the second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **9060**. The first communication security module then

transmits the unencrypted host commands to the payload **9065**. Then, the second communication security module transmits the unencrypted hosted commands to the payload **9070**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **9075**. The payload antenna then transmits payload data to the host receiving antenna and/or the hosted receiving antenna **9080**. Then, the payload transmits to the first communication security module unencrypted telemetry **9085**. The first communication security module then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry **9090**.

Then, the first communication security module transmits the encrypted telemetry to a telemetry transmitter **9091**. The telemetry transmitter then transmits the encrypted telemetry to the host SOC **9092**. Then, the host SOC decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **9093**. The host SOC then determining telemetry data related to a portion of the payload utilized by the host SOC by using a database without hosted decommutated information to read the unencrypted telemetry **9094**. Then, the host SOC transmits the encrypted telemetry to the HOC **9095**. The HOC then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **9096**. Then, the HOC determines telemetry data related to a portion of the payload utilized by the HOC by using a database without host decommutated information to read the unencrypted telemetry **9097**. Then, the method ends **9098**.

FIG. 10A is a diagram **1000** showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user (i.e. host SOC) **1050** and the hosted user (i.e. HOC) **1060** using two receiving antennas and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **1010**, a host SOC **1050**, and a HOC **1060** are shown. The HOC **1060** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **1005** of the vehicle **1010** from the owner of a satellite (i.e. the host SOC) **1050**. It should be noted that in some embodiments, the HOC **1060** may lease all of the payload **1005** of the vehicle **1010** from the owner of a satellite (i.e. the host SOC) **1050**. Also, it should be noted that in some embodiments, the HOC **1060** may own the payload **1005** (e.g., a steerable antenna) of the vehicle **1010**, and contract the host SOC **1050** to transmit encrypted hosted commands to the vehicle **1010**.

During operation, the HOC **1060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **1005** that the HOC **1060** is leasing from the host SOC **1050**. The host SOC **1050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **1005** that host SOC **1050** is utilizing for itself.

It should be noted that, although in FIG. 10A the host SOC **1050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **1050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The host SOC **1050** then transmits **1020** the encrypted host commands to a host receiving antenna **1085**. After the host receiving antenna **1085** receives the encrypted host commands, the host receiving antenna **1085** transmits **1021** the encrypted host commands to a payload antenna **1080** on the vehicle **1010**. The host receiving antenna **1085** transmits **1021** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **1080** transmits the encrypted host commands to a payload **1005**. The payload **1005** on the vehicle **1010** receives the encrypted host commands. The payload **1005** then transmits **1052** the encrypted host commands to a first communication security module **1062**. The first communication security module **1062** decrypts the encrypted host commands utilizing

the first COMSEC variety (i.e. COMSEC Variety 1) to generate unencrypted host commands.

It should be noted that the first communication security module **1062** may comprise one or more modules. In addition, the first communication security module **1062** may comprise one or more processors.

The HOC **1060** then transmits **1015** the encrypted hosted commands to a hosted receiving antenna **1090**. After the hosted receiving antenna **1090** receives the encrypted hosted commands, the hosted receiving antenna **1090** transmits **1097** the encrypted hosted commands to a payload antenna **1080** on the vehicle **1010**. The hosted receiving antenna **1090** transmits **1097** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **1080** transmits the encrypted hosted commands to a payload **1005**. The payload **1005** on the vehicle **1010** receives the encrypted hosted commands. The payload **1005** then transmits **1055** the encrypted hosted commands to a second communication security module **1065**. The second communication security module **1065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety 2) to generate unencrypted hosted commands.

It should be noted that the second communication security module **1065** may comprise one or more modules. In addition, the second communication security module **1065** may comprise one or more processors.

The first communication security module **1062** then transmits **1070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **1005**. The second communication security module **1065** transmits **1075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **1005**. The payload **1005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **1080** then transmits (e.g., in one or more antenna beams **1081**) payload data to the host receiving antenna **1085** and/or the hosted receiving antenna **1090** on the ground.

Also, it should be noted that, although in FIG. **10A**, antenna beams **1081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **1081** may include more or less number of beams than is shown in FIG. **10A** (e.g., antenna beams **1081** may only include a single beam), and antenna beams **1081** may include beams of different shapes than circular spot beams as is shown in FIG. **10A** (e.g., antenna beams **1081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **1080** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **1080** may comprise one or more multifeed antenna arrays.

The payload **1005** transmits **1091** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **1005** that is utilized by the host SOC **1050**) to the first communication security module

1062. The first communication security module **1062** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **1005** transmits **1092** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **1005** that is leased by the HOC **1060**) to the second communication security module **1065**. The second communication security module **1065** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **1062** then transmits **1093** the encrypted host telemetry to the payload **1005**. The payload **1005** then transmits the encrypted host telemetry to the payload antenna **1080**. The payload antenna **1080** transmits **1095** the encrypted host telemetry to the host receiving antenna **1085**. The payload antenna **1080** transmits **1095** the encrypted host telemetry utilizing an in-band frequency band(s). The host receiving antenna **1085** then transmits **1094** the encrypted host telemetry to the host SOC **1050**. The host SOC **1050** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **1065** then transmits **1096** the encrypted hosted telemetry to the payload **1005**. The payload **1005** then transmits the encrypted hosted telemetry to the payload antenna **1080**. The payload antenna **1080** transmits **1098** the encrypted hosted telemetry to the hosted receiving antenna **1090**.

The payload antenna **1080** transmits **1098** the encrypted hosted telemetry utilizing an in-band frequency band(s). The hosted receiving antenna **1090** then transmits **1099** the encrypted hosted telemetry to the HOC **1060**. The HOC **1060** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIG. **10B** is a diagram **10000** showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user (i.e. host SOC) **10050** and the hosted user (i.e. HOC) **10060** using one receiving antenna and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **10010**, a host SOC **10050**, and a HOC **10060** are shown. The HOC **10060** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **10005** of the vehicle **10010** from the owner of a satellite (i.e. the host SOC) **10050**. It should be noted that in some embodiments, the HOC **10060** may lease all of the payload **10005** of the vehicle **10010** from the owner of a satellite (i.e. the host SOC) **10050**. Also, it should be noted that in some embodiments, the HOC **10060** may own the payload **10005** (e.g., a steerable antenna) of the vehicle **10010**, and contract the host SOC **10050** to transmit encrypted hosted commands to the vehicle **10010**.

During operation, the HOC **10060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the

payload **10005** that the HOC **10060** is leasing from the host SOC **10050**. The host SOC **10050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **10005** that host SOC **10050** is utilizing for itself.

It should be noted that, although in FIG. **10B** the host SOC **10050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **10050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The host SOC **10050** then transmits **10020** the encrypted host commands to a host receiving antenna **10085**. After the host receiving antenna **10085** receives the encrypted host commands, the host receiving antenna **10085** transmits **10021** the encrypted host commands to a payload antenna **10080** on the vehicle **10010**. The host receiving antenna **10085** transmits **10021** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency

band(s) utilized to transmit payload data). The payload antenna **10080** transmits the encrypted host commands to a payload **10005**. The payload **10005** on the vehicle **10010** receives the encrypted host commands. The payload **10005** then transmits **10052** the encrypted host commands to a first communication security module **10062**. The first communication security module **10062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety 1) to generate unencrypted host commands.

It should be noted that the first communication security module **10062** may comprise one or more modules. In addition, the first communication security module **10062** may comprise one or more processors.

The HOC **10060** then transmits **10015** the encrypted hosted commands to the host SOC **10050**. The host SOC **10050** then transmits **10087** the encrypted hosted commands to the host receiving antenna **10085**. After the host receiving antenna **10085** receives the encrypted hosted commands, the host receiving antenna **10085** transmits **10097** the encrypted hosted commands to a payload antenna **10080** on the vehicle **10010**. The host receiving antenna **10085** transmits **10097** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **10080** transmits the encrypted hosted commands to a payload **10005**. The payload **10005** on the vehicle **10010** receives the encrypted hosted commands. The payload **10005** then transmits **10055** the encrypted hosted commands to a second communication security module **10065**. The second communication security module

10065 decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **10065** may comprise one or more modules. In addition, the second communication security module **10065** may comprise one or more processors.

The first communication security module **10062** then transmits **10070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **10005**. The second communication security module **10065** transmits **10075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **10005**. The payload **10005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **10080** then transmits (e.g., in one or more antenna beams **10081**) payload data to the host receiving antenna **10085** and/or the hosted receiving antenna **10090** on the ground.

Also, it should be noted that, although in FIG. **10B**, antenna beams **10081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **10081** may include more or less number of beams than is shown in FIG. **10B** (e.g., antenna beams **10081** may only include a single beam), and antenna beams **10081** may include beams of different shapes than circular spot beams as is shown in FIG. **10B** (e.g., antenna beams **10081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **10080** may comprise one or more reflector dishes including, but not limited to,

parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **10080** may comprise one or more multifeed antenna arrays.

The payload **10005** transmits **10091** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **10005** that is utilized by the host SOC **10050**) to the first communication security module **10062**. The first communication security module **10062** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **10005** transmits **10092** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **10005** that is leased by the HOC **10060**) to the second communication security module **10065**. The second communication security module **10065** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **10062** then transmits **10093** the encrypted host telemetry to the payload **10005**. The payload **10005** then transmits the encrypted host telemetry to the payload antenna **10080**. The payload antenna **10080** transmits **10095** the encrypted host telemetry to the host receiving antenna **10085**. The payload antenna **10080** transmits **10095** the encrypted host telemetry utilizing an in-band frequency band(s). The host receiving antenna **10085** then transmits **10094** the encrypted host telemetry to the host SOC **10050**. The host SOC **10050** then

decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **10065** then transmits **10096** the encrypted hosted telemetry to the payload **10005**. The payload **10005** then transmits the encrypted hosted telemetry to the payload antenna **10080**. The payload antenna **10080** transmits **10098** the encrypted hosted telemetry to the host receiving antenna **10085**. The payload antenna **10080** transmits **10098** the encrypted hosted telemetry utilizing an in-band frequency band(s). The host receiving antenna **10085** then transmits **10086** the encrypted hosted telemetry to the host SOC **10050**. The host SOC **10050** then transmits **10099** the encrypted hosted telemetry to the HOC **10060**. The HOC **10060** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIGS. **11A**, **11B**, **11C**, and **11D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using two receiving antennas and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure. At the start **1100** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **1105**. Then, the HOC transmits the encrypted hosted commands to a hosted receiving antenna **1110**. The hosted receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **1115**. Then, the payload antenna

transmits the encrypted hosted commands to a payload on the vehicle **1120**. The payload then transmits the encrypted hosted commands to a second communication security module **1125**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **1130**. The host SOC then transmits the encrypted host commands to a host receiving antenna **1135**. Then, the host receiving antenna transmits the encrypted host commands to the payload antenna **1140**. The payload antenna then transmits the encrypted host commands to the payload **1145**. Then, the payload transmits the encrypted host commands to a first communication security module **1150**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **1155**. Then, the second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **1160**. Then, the first communication security module transmits the unencrypted host commands to the payload **1165**. The second communication security module then transmits the unencrypted hosted commands to the payload **1170**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **1175**. The payload antenna then transmits payload data to the host receiving antenna and/or the hosted receiving antenna **1180**. Then, the payload transmits to the first communication security module unencrypted host telemetry **1185**. The payload then transmits to the second

communication security module unencrypted hosted telemetry **1190**. Then, the first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **1191**. The second communication security module then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **1192**.

Then, the first communication security module transmits the encrypted host telemetry to the payload **1193**. The payload then transmits the encrypted host telemetry to the payload antenna **1194**. Then, the payload antenna transmits the encrypted host telemetry to the host receiving antenna **1195**. The host receiving antenna transmits the encrypted host telemetry to the host SOC **1196**. Then, the host SOC decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **1197**.

Then, the second communication security module transmits the encrypted hosted telemetry to the payload **1198**. The payload then transmits the encrypted hosted telemetry to the payload antenna **1199**. Then, the payload antenna transmits the encrypted hosted telemetry to the hosted receiving antenna **1101**. The hosted receiving antenna transmits the encrypted hosted telemetry to the HOC **1102**. Then, the HOC decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **1103**. Then, the method ends **1104**.

FIGS. **11E**, **11F**, **11G**, and **11H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the

host user and the hosted user using one receiving antenna and employing two COMSEC varieties for telemetry, in accordance with at least one embodiment of the present disclosure. At the start **11000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **11005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **11010**. The host SOC then transmits the encrypted hosted commands to a host receiving antenna **11012**. The host receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **11015**. Then, the payload antenna transmits the encrypted hosted commands to a payload on the vehicle **11020**. The payload then transmits the encrypted hosted commands to a second communication security module **11025**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **11030**. The host SOC then transmits the encrypted host commands to a host receiving antenna **11035**. Then, the host receiving antenna transmits the encrypted host commands to the payload antenna **11040**. The payload antenna then transmits the encrypted host commands to the payload **11045**. Then, the payload transmits the encrypted host commands to a first communication security module **11050**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **11055**. Then, the second communication security module decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands

11060. Then, the first communication security module transmits the unencrypted host commands to the payload **11065**. The second communication security module then transmits the unencrypted hosted commands to the payload **11070**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **11075**. The payload antenna then transmits payload data to the host receiving antenna and/or the hosted receiving antenna **11080**. Then, the payload transmits to the first communication security module unencrypted host telemetry **11085**. The payload then transmits to the second communication security module unencrypted hosted telemetry **11090**. Then, the first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **11091**. The second communication security module then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **11092**.

Then, the first communication security module transmits the encrypted host telemetry to the payload **11093**. The payload then transmits the encrypted host telemetry to the payload antenna **11094**. Then, the payload antenna transmits the encrypted host telemetry to the host receiving antenna **11095**. The host receiving antenna transmits the encrypted host telemetry to the host SOC **11096**. Then, the host SOC decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **11097**.

Then, the second communication security module transmits the encrypted hosted telemetry to the payload **11098**. The payload then transmits the encrypted

hosted telemetry to the payload antenna **11099**. Then, the payload antenna transmits the encrypted hosted telemetry to the host receiving antenna **11001**. The host receiving antenna transmits the encrypted hosted telemetry to the host SOC **11002**. The host SOC then transmits the encrypted hosted telemetry to the HOC **11003**. Then, the HOC decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **11004**. Then, the method ends **11005**.

FIG. **12A** is a diagram **1200** showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user (i.e. host SOC) **1250** and the hosted user (i.e. HOC) **1260** using two receiving antennas and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **1210**, a host SOC **1250**, and a HOC **1260** are shown. The HOC **1260** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **1205** of the vehicle **1210** from the owner of a satellite (i.e. the host SOC) **1250**. It should be noted that in some embodiments, the HOC **1260** may lease all of the payload **1205** of the vehicle **1210** from the owner of a satellite (i.e. the host SOC) **1250**. Also, it should be noted that in some embodiments, the HOC **1260** may own the payload **1205** (e.g., a steerable antenna) of the vehicle **1210**, and contract the host SOC **1250** to transmit encrypted hosted commands to the vehicle **1210**.

During operation, the HOC **1260** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce

encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **1205** that the HOC **1260** is leasing from the host SOC **1250**. The host SOC **1250** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **1205** that host SOC **1250** is utilizing for itself.

It should be noted that, although in FIG. **12A** the host SOC **1250** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **1250** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The host SOC **1250** then transmits **1220** the encrypted host commands to a host receiving antenna **1285**. After the host receiving antenna **1285** receives the encrypted host commands, the host receiving antenna **1285** transmits **1221** the encrypted host commands to a payload antenna **1280** on the vehicle **1210**. The host

receiving antenna **1285** transmits **1221** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **1280** transmits the encrypted host commands to a payload **1205**. The payload **1205** on the vehicle **1210** receives the encrypted host commands. The payload **1205** then transmits **1252** the encrypted host commands to a first communication security module **1262**. The first communication security module **1262** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety 1) to generate unencrypted host commands.

It should be noted that the first communication security module **1262** may comprise one or more modules. In addition, the first communication security module **1262** may comprise one or more processors.

The HOC **1260** then transmits **1215** the encrypted hosted commands to a hosted receiving antenna **1290**. After the hosted receiving antenna **1290** receives the encrypted hosted commands, the hosted receiving antenna **1290** transmits **1297** the encrypted hosted commands to a payload antenna **1280** on the vehicle **1210**. The hosted receiving antenna **1290** transmits **1297** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **1280** transmits the encrypted hosted commands to a payload **1205**. The payload **1205** on the vehicle **1210** receives the encrypted hosted commands. The payload **1205** then transmits **1255** the encrypted hosted commands to a second communication security

module **1265**. The second communication security module **1265** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **1265** may comprise one or more modules. In addition, the second communication security module **1265** may comprise one or more processors.

The first communication security module **1262** then transmits **1270** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **1205**. The second communication security module **1265** transmits **1275** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **1205**. The payload **1205** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **1280** then transmits (e.g., in one or more antenna beams **1281**) payload data to the host receiving antenna **1285** and/or the hosted receiving antenna **1290** on the ground.

Also, it should be noted that, although in FIG. **12A**, antenna beams **1281** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **1281** may include more or less number of beams than is shown in FIG. **12A** (e.g., antenna beams **1281** may only include a single beam), and antenna beams **1281** may include beams of different shapes than circular spot beams as is shown in FIG. **12A** (e.g., antenna beams **1281** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **1280** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **1280** may comprise one or more multifeed antenna arrays.

The payload **1205** transmits **1291** unencrypted telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **1205** that is utilized by the host SOC **1250**; and unencrypted HoP TLM, which is telemetry data related to the portion of the payload **1205** that is leased by the HOC **1260**) to the first communication security module **1262**. The first communication security module **1262** then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry (i.e. encrypted TLM). The first communication security module **1262** then transmits **1293** the encrypted telemetry to the payload **1205**. The payload **1205** then transmits the encrypted telemetry to the payload antenna **1280**.

The payload antenna **1280** transmits **1295** the encrypted telemetry to the host receiving antenna **1285**. The payload antenna **1280** transmits **1295** the encrypted telemetry utilizing an in-band frequency band(s). The host receiving antenna **1285** then transmits **1294** the encrypted telemetry to the host SOC **1250**. The host SOC **1250** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The host SOC **1250** then utilizes a database that comprises host payload decommutated information and does not comprise hosted payload decommutated information (i.e. a database without hosted payload decommutated information) to read to unencrypted telemetry to determine the

telemetry data related to the portion of the payload **1205** that is utilized by the host SOC **1250**.

The payload antenna **1280** transmits **1298** the encrypted telemetry to the hosted receiving antenna **1290**. The payload antenna **1280** transmits **1298** the encrypted telemetry utilizing an in-band frequency band(s). The hosted receiving antenna **1290** then transmits **1299** the encrypted telemetry to the HOC **1260**. The HOC **1260** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The HOC **1260** then utilizes a database that comprises hosted payload decommutated information and does not comprise host payload decommutated information (i.e. a database without host payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **1205** that is utilized by the HOC **1260**.

FIG. **12B** is a diagram **12000** showing the disclosed system for a virtual transponder utilizing inband telemetry and commanding for the host user (i.e. host SOC) **12050** and the hosted user (i.e. HOC) **12060** using one receiving antenna and employing one COMSEC variety for telemetry, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **12010**, a host SOC **12050**, and a HOC **12060** are shown. The HOC **12060** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **12005** of the vehicle **12010** from the owner of a satellite (i.e. the host SOC) **12050**. It should be noted that in some embodiments, the HOC **12060** may lease all of the payload **12005** of the vehicle

12010 from the owner of a satellite (i.e. the host SOC **12050**). Also, it should be noted that in some embodiments, the HOC **12060** may own the payload **12005** (e.g., a steerable antenna) of the vehicle **12010**, and contract the host SOC **12050** to transmit encrypted hosted commands to the vehicle **12010**.

During operation, the HOC **12060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (e.g., a virtual transponder(s)) of the payload **12005** that the HOC **12060** is leasing from the host SOC **12050**. The host SOC **12050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **12005** that host SOC **12050** is utilizing for itself.

It should be noted that, although in FIG. **12B** the host SOC **12050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **12050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one

encryption algorithm (e.g., a Type 1 encryption algorithm or a Type 2 encryption algorithm).

The host SOC **12050** then transmits **12020** the encrypted host commands to a host receiving antenna **12085**. After the host receiving antenna **12085** receives the encrypted host commands, the host receiving antenna **12085** transmits **12021** the encrypted host commands to a payload antenna **12080** on the vehicle **12010**. The host receiving antenna **12085** transmits **12021** the encrypted host commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **12080** transmits the encrypted host commands to a payload **12005**. The payload **12005** on the vehicle **12010** receives the encrypted host commands. The payload **12005** then transmits **12052** the encrypted host commands to a first communication security module **12062**. The first communication security module **12062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety 1) to generate unencrypted host commands.

It should be noted that the first communication security module **12062** may comprise one or more modules. In addition, the first communication security module **12062** may comprise one or more processors.

The HOC **12060** then transmits **12015** the encrypted hosted commands to the host SOC **12050**. The host SOC **12050** then transmits **12098** the encrypted hosted commands to the host receiving antenna **12085**. After the host receiving antenna **12085** receives the encrypted hosted commands, the host receiving antenna **12085**

transmits **12097** the encrypted hosted commands to a payload antenna **12080** on the vehicle **12010**. The host receiving antenna **12085** transmits **12097** the encrypted hosted commands utilizing an in-band frequency band(s) (i.e. a frequency band(s) that is the same frequency band(s) utilized to transmit payload data). The payload antenna **12080** transmits the encrypted hosted commands to a payload **12005**. The payload **12005** on the vehicle **12010** receives the encrypted hosted commands. The payload **12005** then transmits **12055** the encrypted hosted commands to a second communication security module **12065**. The second communication security module **12065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety 2) to generate unencrypted hosted commands.

It should be noted that the second communication security module **12065** may comprise one or more modules. In addition, the second communication security module **12065** may comprise one or more processors.

The first communication security module **12062** then transmits **12070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **12005**. The second communication security module **12065** transmits **12075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **12005**. The payload **12005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. The payload antenna **12080** then transmits (e.g., in one or more antenna beams **12081**) payload data to the host receiving antenna **12085** and/or the hosted receiving antenna **12090** on the ground.

Also, it should be noted that, although in FIG. **12B**, antenna beams **12081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **12081** may include more or less number of beams than is shown in FIG. **12B** (e.g., antenna beams **12081** may only include a single beam), and antenna beams **12081** may include beams of different shapes than circular spot beams as is shown in FIG. **12B** (e.g., antenna beams **12081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **12080** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **12080** may comprise one or more multifeed antenna arrays.

The payload **12005** transmits **12091** unencrypted telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **12005** that is utilized by the host SOC **12050**; and unencrypted HoP TLM, which is telemetry data related to the portion of the payload **12005** that is leased by the HOC **12060**) to the first communication security module **12062**. The first communication security module **12062** then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry (i.e. encrypted TLM). The first communication security module **12062** then transmits **12093** the encrypted telemetry to the payload **12005**. The payload **12005** then transmits the encrypted telemetry to the payload antenna **12080**.

The payload antenna **12080** transmits **12095** the encrypted telemetry to the host receiving antenna **12085**. The payload antenna **12080** transmits **12095** the encrypted telemetry utilizing an in-band frequency band(s). The host receiving antenna **12085** then transmits **12094** the encrypted telemetry to the host SOC **12050**. The host SOC **12050** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The host SOC **12050** then utilizes a database that comprises host payload decommutated information and does not comprise hosted payload decommutated information (i.e. a database without hosted payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **12005** that is utilized by the host SOC **12050**.

The host SOC **12050** then transmits **12099** the encrypted telemetry to the HOC **12060**. The HOC **12060** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The HOC **12060** then utilizes a database that comprises hosted payload decommutated information and does not comprise host payload decommutated information (i.e. a database without host payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **12005** that is utilized by the HOC **12060**.

FIGS. **13A**, **13B**, **13C**, and **13D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using two receiving antennas and employing one

COMSEC variety, in accordance with at least one embodiment of the present disclosure. At the start **1300** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **1305**. Then, the HOC transmits the encrypted hosted commands to a hosted receiving antenna **1310**. The hosted receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **1315**. Then, the payload antenna transmits the encrypted hosted commands to a payload on the vehicle **1320**. The payload then transmits the encrypted hosted commands to a second communication security module **1325**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **1330**. The host SOC then transmits the encrypted host commands to a host receiving antenna **1335**. Then, the host receiving antenna transmits the encrypted host commands to the payload antenna **1340**. Then, the payload antenna transmits the encrypted host commands to the payload **1345**. The payload then transmits the encrypted host commands to a first communication security module **1350**. Then, the first communication security module decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **1355**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **1360**. Then, the first communication security module transmits the unencrypted host commands to the payload **1365**. The second communication

security module then transmits the unencrypted hosted commands to the payload **1370**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **1375**. The payload antenna then transmits payload data to the host receiving antenna and/or the hosted receiving antenna **1380**. Then, the payload transmits to the first communication security module unencrypted telemetry **1385**. The first communication security module then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry **1390**.

Then, the first communication security module transmits the encrypted telemetry to the payload **1391**. The payload then transmits the encrypted telemetry to the payload antenna **1392**. Then, the payload antenna transmits the encrypted telemetry to the host receiving antenna **1393**. The host receiving antenna then transmits the encrypted telemetry to the host SOC **1394**. Then, the host SOC decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **1395**. The host SOC then determines telemetry data related to a portion of the payload utilized by the host SOC by using a database without hosted decommutated information to read the unencrypted telemetry **1396**.

Then, the payload antenna transmits the encrypted telemetry to the hosted receiving antenna **1397**. The hosted receiving antenna then transmits the encrypted telemetry to the HOC **1398**. Then, the HOC decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **1399**. The HOC then

determines telemetry data related to a portion of the payload utilized by the HOC by using a database without host decommutated information to read the unencrypted telemetry **1301**. Then, the method ends **1302**.

FIGS. **13E**, **13F**, **13G**, and **13H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry and commanding for the host user and the hosted user using one receiving antenna and employing one COMSEC variety, in accordance with at least one embodiment of the present disclosure. At the start **13000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second communication security (COMSEC) variety to produce encrypted hosted commands **13005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **13010**. The host SOC then transmits the encrypted hosted commands to a host receiving antenna **13012**. The host receiving antenna then transmits the encrypted hosted commands to a payload antenna on a vehicle **13015**. Then, the payload antenna transmits the encrypted hosted commands to a payload on the vehicle **13020**. The payload then transmits the encrypted hosted commands to a second communication security module **13025**.

Then, a host spacecraft operations center (SOC) encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **13030**. The host SOC then transmits the encrypted host commands to a host receiving antenna **13035**. Then, the host receiving antenna transmits the encrypted host commands to the payload antenna **13040**. Then, the payload antenna transmits

the encrypted host commands to the payload **13045**. The payload then transmits the encrypted host commands to a first communication security module **13050**. Then, the first communication security module decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **13055**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **13060**. Then, the first communication security module transmits the unencrypted host commands to the payload **13065**. The second communication security module then transmits the unencrypted hosted commands to the payload **13070**.

Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **13075**. The payload antenna then transmits payload data to the host receiving antenna and/or the hosted receiving antenna **13080**. Then, the payload transmits to the first communication security module unencrypted telemetry **13085**. The first communication security module then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry **13090**.

Then, the first communication security module transmits the encrypted telemetry to the payload **13091**. The payload then transmits the encrypted telemetry to the payload antenna **13092**. Then, the payload antenna transmits the encrypted telemetry to the host receiving antenna **13093**. The host receiving antenna then transmits the encrypted telemetry to the host SOC **13094**. Then, the host SOC

decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **13095**. The host SOC then determines telemetry data related to a portion of the payload utilized by the host SOC by using a database without hosted decommutated information to read the unencrypted telemetry **13096**.

The host SOC then transmits the encrypted telemetry to the HOC **13098**. Then, the HOC decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **13099**. The HOC then determines telemetry data related to a portion of the payload utilized by the HOC by using a database without host decommutated information to read the unencrypted telemetry **13001**. Then, the method ends **13002**.

FIGS. **14 – 19B** show exemplary systems and methods for a virtual transponder, in accordance with at least one embodiment of the present disclosure.

FIG. **14** is a diagram **1400** showing the disclosed system for a virtual transponder on a vehicle **1610**, in accordance with at least one embodiment of the present disclosure. In this figure, a computing device **1410** is shown. The computing device **1410** may be located at a station (e.g., a host station or a hosted station). When the computing device **1410** is located at a host station (i.e. a station operated by a host user (Host SOC)), the computing device **1410** is referred to as a host computing device. And, when the computing device **1410** is located at a hosted station (i.e. a station operated by a hosted user (HOC)), the computing device **1410** is referred to as a hosted computing device. In one or more embodiments, the station is

a ground station **1415**, a terrestrial vehicle (e.g., a military jeep) **1420**, an airborne vehicle (e.g., an aircraft) **1425**, or a marine vehicle (e.g., a ship) **1430**.

During operation, a user (e.g., a host user or a hosted user) **1405** selects, via a graphical user interface (GUI) (e.g., a host GUI or a hosted GUI) **1435** displayed on a screen of the computing device **1410** (e.g., a host computing device or a hosted computing device), an option (e.g., a value) for each of at least one different variable for a portion of the payload **1680** on the vehicle **1610** utilized by the user **1405**. It should be noted that the details of payload **1680** as is illustrated in FIG. **16** is depicted on the GUI **1435**, which is displayed on the screen of the computing device **1410**.

Refer FIG. **16** to view the different variables of the payload **1680** on the vehicle **1610** that may be selected by the user **1405** by using the GUI **1435** that is displayed to the user **1405**. Also, refer to FIG. **17** to view the different variables of the digital channelizer **1670** of the payload **1680** that may be selected by the user **1405** by using the GUI **1435** that is displayed to the user **1405**. In one or more embodiments, various different variables may be presented by the GUI **1435** to be selected including, but not limited to, at least one transponder power, at least one transponder spectrum, at least one transponder gain setting, at least one transponder limiter setting, at least one transponder automatic level control setting, at least one transponder phase setting, at least one internal gain generation, bandwidth for at least one beam, at least one frequency band for at least one beam, at least one transponder beamforming setting, effective isotropic radiation power (EIRP) for at least one beam, at least one transponder channel, and/or beam steering for at least

one beam. It should be noted that the user **1405** may select an option by clicking on the associated variable (e.g., clicking on one of the mixers **1665** to change the frequency band of the mixer's associated transmit antenna **1655**) in the payload **1680** by using the GUI **1435**, and by either typing in a value or selecting a value from a drop down menu (e.g., by typing in a desired transmission frequency band for the associated transmit antenna **1655**). It should be noted that the payload **1680** depicted in FIG. **16** is an exemplary payload, and the depiction does not show all possible different variables that may be selected by user **1405** by using the GUI **1435**.

After the user **1405** has selected, via the GUI **1435** displayed on the computing device **1410**, an option for each of at least one variable for the portion of the payload **1680** on the vehicle **1610** utilized by the user **1405**, the option(s) is transmitted **1440** to a configuration algorithm (CA) **1445** (e.g., an algorithm contained in an XML file, such as CAConfig.xml **1450**). The CA **1445** then generates a configuration for the portion of the payload **1680** on the vehicle **1610** utilized by the user **1405** by using the option(s). Then, the CA **1445** transmits **1455** the configuration to a command generator (e.g., a host command generator or a hosted command generator) **1460**. Optionally, the CA **1445** also stores the configuration in a report file **1465**.

After the command generator **1460** has received the configuration, the command generator **1460** generates commands (e.g., host commands or hosted commands) for reconfiguring the portion of the payload **1680** on the vehicle **1610** utilized by the user **1405** by using the configuration. Then, the commands are

transmitted **1470** to an encryption module **1475**. After receiving the commands, the encryption module **1475** then encrypts the commands (e.g., by utilizing a first COMSEC variety or a second COMSEC variety) to generate encrypted commands (e.g., host encrypted commands or hosted encrypted commands).

Then, the encrypted commands are transmitted **1480** from the station (e.g., a ground station **1415**, a terrestrial vehicle (e.g., a military jeep) **1420**, an airborne vehicle (e.g., an aircraft) **1425**, or a marine vehicle (e.g., a ship) **1430**) to the vehicle **1410**. It should be noted that, in one or more embodiments, the computing device **1410**, the CA **1445**, the command generator **1460**, and the encryption module **1475** are all located at the station (e.g., the host station or the hosted station). In other embodiments, some or more of these items may be located in different locations. In addition, in one or more embodiments, the vehicle **1610** is an airborne vehicle (e.g., a satellite, an aircraft, an unmanned vehicle (UAV), or a space plane).

After the vehicle **1610** has received the encrypted commands, the vehicle decrypts the commands to generated unencrypted commands (e.g., host unencrypted commands or hosted unencrypted commands). Then, the portion of the payload **1680** on the vehicle **1610** utilized by the user **1405** is reconfigured by using the unencrypted commands. In one or more embodiments, the reconfiguring of the payload **1680** may comprise reconfiguring at least one antenna **1615**, **1655** (refer to FIG. **16**), at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital channelizer **1710** (refer to FIG. **17**), at least one demodulator, at least one modulator, at least one digital switch matrix **1720** (refer to

FIG. 17), and/or at least one digital combiner 1730 (refer to FIG. 17). It should be noted that in other embodiments, the reconfiguring of the payload 1680 may comprise reconfiguring at least one analog switch matrix.

FIG. 15 is a diagram 1500 showing an exemplary allocation of bandwidth amongst a plurality of beams (U1 – U45) when utilizing the disclosed virtual transponder, in accordance with at least one embodiment of the present disclosure. In this figure, the bandwidth of each of the beams (U1 – U45) is illustrated as a bar.

On the left side 1510 of the diagram 1500, a portion of the bandwidth of each of the beams (U1 – U45) is shown to be utilized by only the host user (i.e. the owner of the vehicle). For this example, the host user is not leasing out any portion of the payload to a hosted user (i.e. a customer).

On the right side 1520 of the diagram 1500, a portion of the bandwidth of each of the beams is shown to be utilized by the host user (i.e. the owner of the vehicle). Also, at least some (if not all) of the portion of the bandwidth of each of the beams (U1 – U45) not utilized by the host user, is shown to be utilized by the hosted user (i.e. a customer). For this example, the host user is leasing out a portion of the payload to a hosted user (i.e. a customer). Specifically, the host user is leasing out a portion the bandwidth of each of the beams (U1 – U45) to the hosted user.

It should be noted that in other embodiments, the host user may lease out the entire bandwidth of some (if not all) of beam(s) to the hosted user. For these, embodiments, the hosted user alone will utilize the bandwidth of these leased beam(s).

FIG. 16 is a diagram 1600 showing the switch architecture for a flexible allocation of bandwidth amongst a plurality of beams (U1 – UN) (i.e. including uplink and downlink beams) when utilizing the disclosed virtual transponder, in accordance with at least one embodiment of the present disclosure. In this figure, details of a payload 1680 on a vehicle 1610 are shown. In particular, each of a plurality (i.e. N number) of receive antennas 1615, on the vehicle 1610, is shown to be receiving one of the uplink beams (U1 - UN). As such, for example, receive antenna 1615 connected to input port 1 receives uplink beam U6, receive antenna 1615 connected to input port 2 receives uplink beam U14, and receive antenna 1615 connected to input port N receives uplink beam U34. Each receive antenna 1615 is shown to be followed by a polarizer (i.e. pol) 1620 and a waveguide filter (i.e. WG Filter) 1625.

Also, in this figure, each of a plurality (i.e. N number) of transmit antennas 1655, on the vehicle 1610, is shown to be receiving one of the downlink beams (U1 - UN). As such, for example, transmit antenna 1655 connected to output port 1 receives downlink beam U19, transmit antenna 1655 connected to output port 2 receives downlink beam U6, and transmit antenna 1655 connected to output port N receives downlink beam U1. Each transmit antenna 1655 is shown to be preceded by a polarizer (i.e. pol) 1645 and a waveguide filter (i.e. WG Filter) 1650.

It should be noted that, in one or more embodiments, various different types of antennas may be employed for the receive antennas 1615 and the transmit antennas 1655 including, but not limited to, parabolic reflector antennas, shaped

reflector antennas, multifeed array antennas, phase array antennas, and/or any combination thereof.

During operation, a host user **1605** encrypts unencrypted host commands to produce encrypted host commands. Also, a hosted user **1630** encrypts unencrypted hosted commands to produce encrypted hosted commands. The hosted user **1630** transmits **1635** the encrypted hosted commands to the host user **1605**. The host user **1605** transmits **1640** the encrypted host commands and the encrypted hosted commands to the vehicle **1610**. The encrypted host commands and encrypted hosted commands are decrypted on the vehicle **1610** to produce the unencrypted host commands and unencrypted hosted commands.

Then, the payload on the vehicle **1610** receives the unencrypted host commands and unencrypted hosted commands. The digital channelizer **1670** then reconfigures the channels of the uplink beams (U1 – UN) and downlink beams (U1 – UN) according to the unencrypted host commands and unencrypted hosted commands. The configuring of the channels allocates the bandwidth of the uplink beams (U1 – UN) and downlink beams (U1 – UN) amongst the host user **1605** and the hosted user **1630**.

Also, the transmit antennas **1655** and the receive antennas **1615** are configured according to the unencrypted host commands and/or unencrypted hosted commands. For example, some, if not all, of the transmit antennas **1655** and/or the receive antennas **1615** may be gimbaled to project their beams on different locations on the ground. Also, for example, some, if not all, of the transmit antennas **1655**

and/or the receive antennas **1615** may have their phase changed such that (1) the shape of the beam is changed (e.g., has the effect of changing the coverage area of the beam, changing the peak(s) amplitude of the beam, and/or the changing the peak(s) amplitude location on the ground), and/or (2) the beam is projected on a different location on the ground (i.e. has the same effect as gimbaling the antenna **1615**, **1655**).

Additionally, the mixers **1660** on the input ports and/or the mixers **1665** on the output ports are configured according to the unencrypted host commands and/or unencrypted hosted commands. For example, some, if not all, of the mixers **1660** on the input ports and/or the mixers **1665** on the output ports may mix in different frequency bands to change the frequency band(s) of the beams (U1 – UN).

FIG. 17 is a diagram **1700** showing details of the digital channelizer **1670** of FIG. 16, in accordance with at least one embodiment of the present disclosure. In this figure, the digital channelizer **1670** is shown to include three main parts, which are the channelizer **1710**, the switch matrix **1720**, and the combiner **1730**. The digital channelizer **1710** divides the input beam spectrum (i.e. frequency band) from each input port into input subchannels (i.e. frequency slices). In this figure, each beam spectrum (i.e. frequency band) is shown to be divided into twelve (12) input subchannels (i.e. frequency slices). It should be noted that in other embodiments, each input beam spectrum may be divided into more or less than twelve (12) input subchannels, as is shown in FIG. 17.

The switch matrix **1720** routes the input subchannels from the input ports to their assigned respective output ports, where they are referred to as output subchannels. In this figure, five (5) exemplary types of routing that may be utilized by the switch matrix **1720** are shown, which include direct mapping **1740**, in-beam multicast **1750**, cross-beam multicast **1760**, cross-beam mapping **1770**, and cross-beam point-to-point routing **1780**. The combiner **1730** combines the output subchannels to create an output beam spectrum for each output port. As previously mentioned above, during the reconfiguring of the payload **1680**, the channelizer **1710**, the switch matrix **1720**, and/or the combiner **1730** of the digital channelizer **1670** may be reconfigured a various different number of ways (e.g., changing the dividing of the input beam spectrums into input subchannels, changing the routing of the input subchannels, and/or changing the combining of the output subchannels to create the output beam spectrums).

FIG. **18** is a diagram **1800** showing exemplary components on the vehicle (e.g., satellite) **1810** that may be utilized by the disclosed virtual transponder, in accordance with at least one embodiment of the present disclosure. In this figure, various components, on the vehicle **1810**, are shown that may be configured according to the unencrypted host commands (e.g., the host channel **1830**) and/or unencrypted hosted commands (e.g., the hosted channel **1820**).

In this figure, the uplink antenna **1840**, the downlink antenna **1850**, and various components of the all-digital payload **1860** (including the analog-to-digital (A/D) converter **1865**, the digital channelizer **1875**, the digital switch matrix **1895**, the

digital combiner **1815**, and the digital-to-analog (D/A) converter **1835**) are shown that may be configured according to the unencrypted host commands (e.g., the host channel **1830**) and/or unencrypted hosted commands (e.g., the hosted channel **1820**). In addition, some other components of the all-digital payload **1860** (including the uplink beamforming **1870**, the demodulator **1880**, the modulator **1890**, and the downlink beamforming **1825**) may optionally be configured according to the unencrypted host commands (e.g., the host channel **1830**) and/or unencrypted hosted commands (e.g., the hosted channel **1820**).

FIGS. **19A** and **19B** together show a flow chart for the disclosed method for a virtual transponder on a vehicle, in accordance with at least one embodiment of the present disclosure. At the start **1900** of the method, a host user, with a host graphical user interface (GUI) on a host computing device, selects an option for each of at least one variable for a portion of a payload on the vehicle utilized by the host user **1905**. Also, a hosted user, with a hosted GUI on a hosted computing device, selects an option for each of at least one variable for a portion of the payload on the vehicle utilized by the hosted user **1910**. Then, a configuration algorithm (CA) generates a configuration for the portion of the payload on the vehicle utilized by the host user by using the option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user **1915**. Also, the CA generates a configuration for the portion of the payload on the vehicle utilized by the hosted user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user **1920**.

A host command generator then generates host commands for reconfiguring the portion of the payload on the vehicle utilized by the host user by using the configuration for the portion of the payload on the vehicle utilized by the host user **1925**. And, a hosted command generator generates hosted commands for reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the configuration for the portion of the payload on the vehicle utilized by the hosted user **1930**. Then, the host commands and the hosted commands are transmitted to the vehicle **1935**. The portion of the payload on the vehicle utilized by the host user is then reconfigured by using the host commands **1940**. Also, the portion of the payload on the vehicle utilized by the hosted user is reconfigured by using the hosted commands **1945**. Then, the method ends **1950**.

FIGS. **20A – 27H** show exemplary systems and methods for a virtual transponder utilizing inband telemetry, in accordance with at least one embodiment of the present disclosure.

FIG. **20A** is a diagram **20000** showing the disclosed system for a virtual transponder utilizing inband telemetry for the hosted user (i.e. the HOC) **20060** being transmitted to a hosted receiving antenna **20090**, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **20010**, a host SOC **20050**, and a HOC **20060** are shown. The HOC **20060** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **20005** of the vehicle **20010** from the owner of a satellite (i.e. the host SOC) **20050**. It should be noted that in some embodiments, the HOC **20060** may lease all of the payload **20005** of the vehicle

20010 from the owner of a satellite (i.e. the host SOC) **20050**. Also, it should be noted that in some embodiments, the HOC **20060** may own the payload **20005** (e.g., a steerable antenna) of the vehicle **20010**, and contract the host SOC **20050** to transmit encrypted hosted commands to the vehicle **20010**.

During operation, the HOC **20060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second communication security (COMSEC) variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (i.e. a virtual transponder(s)) of the payload **20005** that the HOC **20060** is leasing from the host SOC **20050**. The host SOC **20050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **20005** that host SOC **20050** is utilizing for itself.

It should be noted that, although in FIG. **20A** the host SOC **20050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **20050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second

COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type 1 encryption algorithm or a Type 2 encryption algorithm).

The HOC **20060** then transmits **20015** the encrypted hosted commands to the host SOC **20050**. After the host SOC **20050** receives the encrypted hosted commands, the host SOC **20050** transmits **20020** the encrypted host commands and transmits **20025** the encrypted hosted commands to the vehicle **20010**. The host SOC **20050** transmits **20020**, **20025** the encrypted host commands and the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **20035** on the vehicle **20010** receives the encrypted host commands. In addition, the hosted command receiver **20045** on the vehicle **20010** receives the encrypted hosted commands.

It should be noted that in other embodiments, the disclosed system for a virtual transponder utilizing inband telemetry may employ more or less receivers **20035**, **20045** than as is shown in FIG. 20A.

The host command receiver **20035** then transmits **20052** the encrypted host commands to a first communication security module **20062**. The first communication security module **20062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety 1) to generate unencrypted host commands.

It should be noted that the first communication security module **20062** may comprise one or more modules. In addition, the first communication security module **20062** may comprise one or more processors.

The hosted command receiver **20045** then transmits **20055** the encrypted hosted commands to a second communication security module **20065**. The second communication security module **20065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **20065** may comprise one or more modules. In addition, the second communication security module **20065** may comprise one or more processors.

The first communication security module **20062** then transmits **20070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **20005**. The second communication security module **20065** transmits **20075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **20005**. The payload **20005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. A payload antenna **20080** then transmits (e.g., in one or more antenna beams **20081**) payload data to a host receiving antenna **20085** and/or a hosted receiving antenna **20090** on the ground. It should be noted that in some embodiments, the hosted receiving antenna **20090** may be air based, sea based, or ground based, as is shown in FIG. **20A**.

Also, it should be noted that, although in FIG. 20A, antenna beams **20081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **20081** may include more or less number of beams than is shown in FIG. 20A (e.g., antenna beams **20081** may only include a single beam), and antenna beams **20081** may include beams of different shapes than circular spot beams as is shown in FIG. 20A (e.g., antenna beams **20081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **20080** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **20080** may comprise one or more multifeed antenna arrays.

The payload **20005** transmits **20091** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **20005** that is utilized by the host SOC **20050**) to the first communication security module **20062**. The first communication security module **20062** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **20005** transmits **20092** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **20005** that is leased by the HOC **20060**) to the second communication security module **20065**. The second communication security module **20065** then encrypts the

unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **20062** then transmits **20093** the encrypted host telemetry to a host telemetry transmitter **20094**. The host telemetry transmitter **20094** then transmits **20095** the encrypted host telemetry to the host SOC **20050**. The host SOC **20050** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **20065** then transmits **20096** the encrypted hosted telemetry to the payload **20005**. The payload antenna **20080** then transmits **20097** the encrypted hosted telemetry to the hosted receiving antenna **20090**. The payload antenna **20080** transmits **20097** the encrypted hosted telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The hosted receiving antenna **20090** then transmits **20098** the encrypted hosted telemetry to the HOC **20060**. The HOC **20060** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIG. **20B** is a diagram **20100** showing the disclosed system for a virtual transponder utilizing inband telemetry for the hosted user (i.e. the HOC) **20160** being transmitted to a host receiving antenna **20185**, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **20110**, a host SOC **20150**, and a HOC **20160** are shown. The HOC **20160** has leased at least a portion (e.g., a virtual transponder(s)) of the payload **20105** of the vehicle **20110** from the

owner of a satellite (i.e. the host SOC) **20150**. It should be noted that in some embodiments, the HOC **20160** may lease all of the payload **20105** of the vehicle **20110** from the owner of a satellite (i.e. the host SOC) **20150**. Also, it should be noted that in some embodiments, the HOC **20160** may own the payload **20105** (e.g., a steerable antenna) of the vehicle **20110**, and contract the host SOC **20150** to transmit encrypted hosted commands to the vehicle **20110**.

During operation, the HOC **20160** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second communication security (COMSEC) variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (i.e. a virtual transponder(s)) of the payload **20105** that the HOC **20160** is leasing from the host SOC **20150**. The host SOC **20150** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **20105** that host SOC **20150** is utilizing for itself.

It should be noted that, although in FIG. **20B** the host SOC **20150** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **20150** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type 1 encryption algorithm or a Type 2 encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type 1 encryption algorithm or a Type 2 encryption algorithm).

The HOC **20160** then transmits **20115** the encrypted hosted commands to the host SOC **20150**. After the host SOC **20150** receives the encrypted hosted commands, the host SOC **20150** transmits **20120** the encrypted host commands and transmits **20125** the encrypted hosted commands to the vehicle **20110**. The host SOC **20150** transmits **20120**, **20125** the encrypted host commands and the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **20135** on the vehicle **20110** receives the encrypted host commands. In addition, the hosted command receiver **20145** on the vehicle **20110** receives the encrypted hosted commands.

It should be noted that in other embodiments, the disclosed system for a virtual transponder utilizing inband telemetry may employ more or less receivers **20135**, **20145** than as is shown in FIG. 20B.

The host command receiver **20135** then transmits **20152** the encrypted host commands to a first communication security module **20162**. The first communication

security module **20162** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **20162** may comprise one or more modules. In addition, the first communication security module **20162** may comprise one or more processors.

The hosted command receiver **20145** then transmits **20155** the encrypted hosted commands to a second communication security module **20165**. The second communication security module **20165** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **20165** may comprise one or more modules. In addition, the second communication security module **20165** may comprise one or more processors.

The first communication security module **20162** then transmits **20170** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **20105**. The second communication security module **20165** transmits **20175** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **20105**. The payload **20105** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. A payload antenna **20180** then transmits (e.g., in one or more antenna beams **20181**) payload data to a host receiving antenna **20185** and/or a hosted receiving antenna **20190** on the ground. It

should be noted that in some embodiments, the hosted receiving antenna **20190** may be air based, sea based, or ground based, as is shown in FIG. **20B**.

Also, it should be noted that, although in FIG. **20B**, antenna beams **20181** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **20181** may include more or less number of beams than is shown in FIG. **20B** (e.g., antenna beams **20181** may only include a single beam), and antenna beams **20181** may include beams of different shapes than circular spot beams as is shown in FIG. **20B** (e.g., antenna beams **20181** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **20180** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **20180** may comprise one or more multifeed antenna arrays.

The payload **20105** transmits **20191** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **20105** that is utilized by the host SOC **20150**) to the first communication security module **20162**. The first communication security module **20162** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **20105** transmits **20192** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **20105** that is leased by the HOC **20160**) to the second communication security

module **20165**. The second communication security module **20165** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **20162** then transmits **20193** the encrypted host telemetry to a host telemetry transmitter **20194**. The host telemetry transmitter **20194** then transmits **20195** the encrypted host telemetry to the host SOC **20150**. The host SOC **20150** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **20165** then transmits **20196** the encrypted hosted telemetry to the payload **20105**. The payload antenna **20180** then transmits **20197** the encrypted hosted telemetry to the host receiving antenna **20185**. The payload antenna **20180** transmits **20197** the encrypted hosted telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The host receiving antenna **20185** then transmits **20198** the encrypted hosted telemetry to the host SOC **20150**. The host SOC **20150** transmits **20199** the encrypted hosted telemetry to the HOC **20160**. The HOC **20160** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIGS. **21A**, **21B**, **21C**, and **21D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the hosted user being transmitted to a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure. At the start **2100** of the method, a hosted

payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second COMSEC variety to produce encrypted hosted commands **2105**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **2110**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **2115**. Then, the host SOC transmits (out-of-band) the encrypted host commands and the encrypted hosted commands to a vehicle **2120**.

Then, a host command receiver on the vehicle receives the encrypted host commands **2125**. And, a hosted command receiver on the vehicle receives the encrypted hosted commands **2130**. The host command receiver transmits the encrypted host commands to a first communication security module **2135**. The hosted command receiver transmits the encrypted hosted commands to a second communication security module **2140**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **2145**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **2150**.

The first communication security module then transmits the unencrypted host commands to the payload **2155**. The second communication security module then transmits the unencrypted hosted commands to the payload **2160**. Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted

hosted commands **2165**. A payload antenna on the vehicle then transmits payload data to a host receiving antenna and/or a hosted receiving antenna **2170**.

Then, the payload transmits to the first communication security module unencrypted host telemetry **2175**. And, the payload transmits to the second communication security module unencrypted hosted telemetry **2180**. The first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **2185**. And, the second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **2190**.

The first communication security module then transmits the encrypted host telemetry to a host telemetry transmitter **2191**. Then, the host telemetry transmitter transmits the encrypted host telemetry to the host SOC **2192**. The host SOC then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **2193**.

The second communication security module transmits the encrypted hosted telemetry to the payload **2194**. Then, the payload antenna transmits the encrypted hosted telemetry to the hosted receiving antenna **2195**. The hosted receiving antenna then transmits the encrypted hosted telemetry to the HOC **2196**. Then, the HOC decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **2197**. Then, the method ends **2198**.

FIGS. **21E**, **21F**, **21G**, and **21H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the hosted user being

transmitted to a host receiving antenna, in accordance with at least one embodiment of the present disclosure. At the start **21000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second COMSEC variety to produce encrypted hosted commands **21005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **21010**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **21015**. Then, the host SOC transmits (out-of-band) the encrypted host commands and the encrypted hosted commands to a vehicle **21020**.

Then, a host command receiver on the vehicle receives the encrypted host commands **21025**. And, a hosted command receiver on the vehicle receives the encrypted hosted commands **21030**. The host command receiver transmits the encrypted host commands to a first communication security module **21035**. The hosted command receiver transmits the encrypted hosted commands to a second communication security module **21040**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **21045**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **21050**.

The first communication security module then transmits the unencrypted host commands to the payload **21055**. The second communication security module then transmits the unencrypted hosted commands to the payload **21060**. Then, the payload

is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **21065**. A payload antenna on the vehicle then transmits payload data to a host receiving antenna and/or a hosted receiving antenna **21070**.

Then, the payload transmits to the first communication security module unencrypted host telemetry **21075**. And, the payload transmits to the second communication security module unencrypted hosted telemetry **21080**. The first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **21085**. And, the second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **21090**.

The first communication security module then transmits the encrypted host telemetry to a host telemetry transmitter **21091**. Then, the host telemetry transmitter transmits the encrypted host telemetry to the host SOC **21092**. The host SOC then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **21093**.

The second communication security module transmits the encrypted hosted telemetry to the payload **21094**. Then, the payload antenna transmits the encrypted hosted telemetry to the host receiving antenna **21095**. The host receiving antenna then transmits the encrypted hosted telemetry to the host SOC **21096**. The host SOC transmits the encrypted hosted telemetry to the HOC **21097**. Then, the HOC decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **21098**. Then, the method ends **21099**.

FIG. 22 is a diagram 2200 showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user (i.e. the host SOC) 2250, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle 2210, a host SOC 2250, and a HOC 2260 are shown. The HOC 2260 has leased at least a portion (i.e. a virtual transponder(s)) of the payload 2205 of the vehicle 2210 from the owner of a satellite (i.e. the host SOC) 2250. It should be noted that in some embodiments, the HOC 2260 may lease all of the payload 2205 of the vehicle 2210 from the owner of a satellite (i.e. the host SOC) 2250. Also, it should be noted that in some embodiments, the HOC 2260 may own the payload 2205 (e.g., a steerable antenna) of the vehicle 2210, and contract the host SOC 2250 to transmit encrypted hosted commands to the vehicle 2210.

During operation, the HOC 2260 encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (i.e. a virtual transponder(s)) of the payload 2205 that the HOC 2260 is leasing from the host SOC 2250. The host SOC 2250 encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload 2205 that host SOC 2250 is utilizing for itself.

It should be noted that, although in FIG. 22 the host SOC 2250 is depicted to have its ground antenna located right next to its operations building; in other

embodiments, the host SOC **2250** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **2260** then transmits **2215** the encrypted hosted commands to the host SOC **2250**. After the host SOC **2250** receives the encrypted hosted commands, the host SOC **2250** transmits **2220** the encrypted host commands and transmits **2225** the encrypted hosted commands to the vehicle **2210**. The host SOC **2250** transmits **2220**, **2225** the encrypted host commands and the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **2235** on the vehicle **2210** receives the encrypted host commands. In addition, the hosted command receiver **2245** on the vehicle **2210** receives the encrypted hosted commands.

It should be noted that in other embodiments, the disclosed system for a virtual transponder utilizing inband telemetry may employ more or less receivers **2235**, **2245** than as is shown in FIG. **22**.

The host command receiver **2235** then transmits **2252** the encrypted host commands to a first communication security module **2262**. The first communication security module **2262** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety 1) to generate unencrypted host commands.

It should be noted that the first communication security module **2262** may comprise one or more modules. In addition, the first communication security module **2262** may comprise one or more processors.

The hosted command receiver **2245** then transmits **2255** the encrypted hosted commands to a second communication security module **2265**. The second communication security module **2265** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety 2) to generate unencrypted hosted commands.

It should be noted that the second communication security module **2265** may comprise one or more modules. In addition, the second communication security module **2265** may comprise one or more processors.

The first communication security module **2262** then transmits **2270** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **2205**. The second communication security module **2265** transmits **2275** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **2205**. The payload **2205** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. A payload antenna **2280** then transmits (e.g., in one or more antenna beams **2281**) payload data to a host receiving antenna

2285 and/or a hosted receiving antenna **2290** on the ground. It should be noted that in some embodiments, the hosted receiving antenna **2290** may be air based, sea based, or ground based, as is shown in FIG. **22**.

Also, it should be noted that, although in FIG. **22**, antenna beams **2281** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **2281** may include more or less number of beams than is shown in FIG. **22** (e.g., antenna beams **2281** may only include a single beam), and antenna beams **2281** may include beams of different shapes than circular spot beams as is shown in FIG. **22** (e.g., antenna beams **2281** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **2280** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **2280** may comprise one or more multifeed antenna arrays.

The payload **2205** transmits **2291** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **2205** that is utilized by the host SOC **2250**) to the first communication security module **2262**. The first communication security module **2262** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **2205** transmits **2292** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload

2205 that is leased by the HOC **2260**) to the second communication security module **2265**. The second communication security module **2265** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **2262** then transmits **2293** the encrypted host telemetry to the payload **2205**. The payload antenna **2280** then transmits **2297** the encrypted host telemetry to the host receiving antenna **2285**. The payload antenna **2280** transmits **2297** the encrypted host telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The host receiving antenna **2285** then transmits **2298** the encrypted host telemetry to the host SOC **2250**. The host SOC **2250** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **2265** then transmits **2296** the encrypted hosted telemetry to a hosted telemetry transmitter **2294**. The hosted telemetry transmitter **2294** then transmits **495** the encrypted hosted telemetry to the host SOC **2250**. The host SOC **2250** then transmits **2299** the encrypted hosted telemetry to the HOC **2260**. The HOC **2260** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIGS. **23A**, **23B**, **23C**, and **23D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user, in

accordance with at least one embodiment of the present disclosure. At the start **2300** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second COMSEC variety to produce encrypted hosted commands **2305**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **2310**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **2315**. Then, the host SOC transmits (out-of-band) the encrypted host commands and the encrypted hosted commands to a vehicle **2320**.

Then, a host command receiver on the vehicle receives the encrypted host commands **2325**. And, a hosted command receiver on the vehicle receives the encrypted hosted commands **2330**. The host command receiver transmits the encrypted host commands to a first communication security module **2335**. The hosted command receiver transmits the encrypted hosted commands to a second communication security module **2340**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **2345**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **2350**.

The first communication security module then transmits the unencrypted host commands to the payload **2355**. The second communication security module then transmits the unencrypted hosted commands to the payload **2360**. Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted

hosted commands **2365**. A payload antenna on the vehicle then transmits payload data to a host receiving antenna and/or a hosted receiving antenna **2370**.

Then, the payload transmits to the first communication security module unencrypted host telemetry **2375**. And, the payload transmits to the second communication security module unencrypted hosted telemetry **2380**. The first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **2385**. And, the second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **2390**.

The first communication security module then transmits the encrypted host telemetry to the payload **2391**. Then, the payload antenna transmits the encrypted host telemetry to the host receiving antenna **2392**. The host receiving antenna transmits the encrypted host telemetry to the host SOC **2393**. Then, the host SOC decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **2394**.

The second communication security module then transmits the encrypted hosted telemetry to a hosted telemetry transmitter **2395**. Then, the hosted telemetry transmitter transmits the encrypted hosted telemetry to the host SOC **2396**. The host SOC transmits the encrypted hosted telemetry to the HOC **2397**. Then, the HOC decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **2398**. Then, the method ends **2399**.

FIG. **24A** is a diagram **2400** showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user (i.e. the host SOC) **2450** and the hosted user (i.e. the HOC) **2460** being transmitted to a host receiving antenna **2485** and a hosted receiving antenna **2490**, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **2410**, a host SOC **2450**, and a HOC **2460** are shown. The HOC **2460** has leased at least a portion (i.e. a virtual transponder(s)) of the payload **2405** of the vehicle **2410** from the owner of a satellite (i.e. the host SOC) **2450**. It should be noted that in some embodiments, the HOC **2460** may lease all of the payload **2405** of the vehicle **2410** from the owner of a satellite (i.e. the host SOC) **2450**. Also, it should be noted that in some embodiments, the HOC **2460** may own the payload **2405** (e.g., a steerable antenna) of the vehicle **2410**, and contract the host SOC **2450** to transmit encrypted hosted commands to the vehicle **2410**.

During operation, the HOC **2460** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (i.e. a virtual transponder(s)) of the payload **2405** that the HOC **2460** is leasing from the host SOC **2450**. The host SOC **2450** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **2405** that host SOC **2450** is utilizing for itself.

It should be noted that, although in FIG. **24A** the host SOC **2450** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **2450** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **2460** then transmits **2415** the encrypted hosted commands to the host SOC **2450**. After the host SOC **2450** receives the encrypted hosted commands, the host SOC **2450** transmits **2420** the encrypted host commands and transmits **2425** the encrypted hosted commands to the vehicle **2410**. The host SOC **2450** transmits **2420**, **2425** the encrypted host commands and the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **2435** on the vehicle **2410** receives the encrypted host commands. In addition, the hosted command receiver **2445** on the vehicle **2410** receives the encrypted hosted commands.

It should be noted that in other embodiments, the disclosed system for a virtual transponder utilizing inband telemetry may employ more or less receivers **2435**, **2445** than as is shown in FIG. **24A**.

The host command receiver **2435** then transmits **2452** the encrypted host commands to a first communication security module **2462**. The first communication security module **2462** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **2462** may comprise one or more modules. In addition, the first communication security module **2462** may comprise one or more processors.

The hosted command receiver **2445** then transmits **2455** the encrypted hosted commands to a second communication security module **2465**. The second communication security module **2465** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **2465** may comprise one or more modules. In addition, the second communication security module **2465** may comprise one or more processors.

The first communication security module **2462** then transmits **2470** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **2405**. The second communication security module **2465** transmits **2475** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload).

2405. The payload **2405** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. A payload antenna **2480** then transmits (e.g., in one or more antenna beams **2481**) payload data to a host receiving antenna **2485** and/or a hosted receiving antenna **2490** on the ground. It should be noted that in some embodiments, the hosted receiving antenna **2490** may be air based, sea based, or ground based, as is shown in FIG. **24A**.

Also, it should be noted that, although in FIG. **24A**, antenna beams **2481** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **2481** may include more or less number of beams than is shown in FIG. **24A** (e.g., antenna beams **2481** may only include a single beam), and antenna beams **2481** may include beams of different shapes than circular spot beams as is shown in FIG. **24A** (e.g., antenna beams **2481** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **2480** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **2480** may comprise one or more multifeed antenna arrays.

The payload **2405** transmits **2491** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **2405** that is utilized by the host SOC **2450**) to the first communication security module **2462**. The first communication security module **2462** then encrypts the unencrypted

host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **2405** transmits **2492** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **2405** that is leased by the HOC **2460**) to the second communication security module **2465**. The second communication security module **2465** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **2462** then transmits **2493** the encrypted host telemetry to the payload **2405**. The payload antenna **2480** then transmits **2497** the encrypted host telemetry to the host receiving antenna **2485**. The payload antenna **2480** transmits **2497** the encrypted host telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The host receiving antenna **2485** then transmits **2498** the encrypted host telemetry to the host SOC **2450**. The host SOC **2450** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **2465** then transmits **2496** the encrypted hosted telemetry to the payload **2405**. The payload antenna **2480** then transmits **2496** the encrypted hosted telemetry to the hosted receiving antenna **2490**. The payload antenna **2480** transmits **2496** the encrypted hosted telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least

one frequency band utilized to transmit payload data). The hosted receiving antenna **2490** then transmits **2499** the encrypted hosted telemetry to the HOC **2460**. The HOC **2460** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIG. **24B** is a diagram **24000** showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user (i.e. the host SOC) **24050** and the hosted user (i.e. the HOC) **24060** being transmitted to a host receiving antenna **24085**, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **24010**, a host SOC **24050**, and a HOC **24060** are shown. The HOC **24060** has leased at least a portion (i.e. a virtual transponder(s)) of the payload **24005** of the vehicle **24010** from the owner of a satellite (i.e. the host SOC) **24050**. It should be noted that in some embodiments, the HOC **24060** may lease all of the payload **24005** of the vehicle **24010** from the owner of a satellite (i.e. the host SOC) **24050**. Also, it should be noted that in some embodiments, the HOC **24060** may own the payload **24005** (e.g., a steerable antenna) of the vehicle **24010**, and contract the host SOC **24050** to transmit encrypted hosted commands to the vehicle **24010**.

During operation, the HOC **24060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (i.e. a virtual transponder(s)) of the payload **24005** that the HOC **24060** is leasing from the host SOC **24050**. The host SOC **24050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by

utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **24005** that host SOC **24050** is utilizing for itself.

It should be noted that, although in FIG. **24B** the host SOC **24050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **24050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **24060** then transmits **24015** the encrypted hosted commands to the host SOC **24050**. After the host SOC **24050** receives the encrypted hosted commands, the host SOC **24050** transmits **24020** the encrypted host commands and transmits **24025** the encrypted hosted commands to the vehicle **24010**. The host SOC **24050** transmits **24020**, **24025** the encrypted host commands and the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **24035** on the vehicle **24010** receives the encrypted host

commands. In addition, the hosted command receiver **24045** on the vehicle **24010** receives the encrypted hosted commands.

It should be noted that in other embodiments, the disclosed system for a virtual transponder utilizing inband telemetry may employ more or less receivers **24035**, **24045** than as is shown in FIG. **24B**.

The host command receiver **24035** then transmits **24052** the encrypted host commands to a first communication security module **24062**. The first communication security module **24062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **24062** may comprise one or more modules. In addition, the first communication security module **24062** may comprise one or more processors.

The hosted command receiver **24045** then transmits **24055** the encrypted hosted commands to a second communication security module **24065**. The second communication security module **24065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **24065** may comprise one or more modules. In addition, the second communication security module **24065** may comprise one or more processors.

The first communication security module **24062** then transmits **24070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload)

24005. The second communication security module **24065** transmits **24075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **24005**. The payload **24005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. A payload antenna **24080** then transmits (e.g., in one or more antenna beams **24081**) payload data to a host receiving antenna **24085** and/or a hosted receiving antenna **24090** on the ground. It should be noted that in some embodiments, the hosted receiving antenna **24090** may be air based, sea based, or ground based, as is shown in FIG. **24B**.

Also, it should be noted that, although in FIG. **24B**, antenna beams **24081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **24081** may include more or less number of beams than is shown in FIG. **24B** (e.g., antenna beams **24081** may only include a single beam), and antenna beams **24081** may include beams of different shapes than circular spot beams as is shown in FIG. **24B** (e.g., antenna beams **24081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **24080** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **2480** may comprise one or more multifeed antenna arrays.

The payload **24005** transmits **24091** unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **24005** that is utilized by the host SOC **24050**) to the first communication security

module **24062**. The first communication security module **24062** then encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry (i.e. encrypted host TLM).

The payload **24005** transmits **24092** unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **24005** that is leased by the HOC **24060**) to the second communication security module **24065**. The second communication security module **24065** then encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry (i.e. encrypted HoP TLM).

The first communication security module **24062** then transmits **24093** the encrypted host telemetry to the payload **24005**. The payload antenna **24080** then transmits **24097** the encrypted host telemetry to the host receiving antenna **24085**. The payload antenna **24080** transmits **24097** the encrypted host telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The host receiving antenna **24085** then transmits **24098** the encrypted host telemetry to the host SOC **24050**. The host SOC **24050** then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry.

The second communication security module **24065** then transmits **24096** the encrypted hosted telemetry to the payload **24005**. The payload antenna **24080** then transmits **24096** the encrypted hosted telemetry to the host receiving antenna **24085**. The payload antenna **24080** transmits **24096** the encrypted hosted telemetry utilizing

an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The host receiving antenna **24085** then transmits **24099** the encrypted hosted telemetry to the host SOC **24050**. The host SOC **24050** transmits **24090** the encrypted hosted telemetry to the HOC **24060**. The HOC **24060** then decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry.

FIGS. **25A**, **25B**, **25C**, and **25D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna and a hosted receiving antenna, in accordance with at least one embodiment of the present disclosure. At the start **2500** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second COMSEC variety to produce encrypted hosted commands **2505**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **2510**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **2515**. Then, the host SOC transmits (out-of-band) the encrypted host commands and the encrypted hosted commands to a vehicle **2520**.

Then, a host command receiver on the vehicle receives the encrypted host commands **2525**. And, a hosted command receiver on the vehicle receives the encrypted hosted commands **2530**. The host command receiver transmits the encrypted host commands to a first communication security module **2535**. The hosted command receiver transmits the encrypted hosted commands to a second

communication security module **2540**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **2545**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **2550**.

The first communication security module then transmits the unencrypted host commands to the payload **2555**. The second communication security module then transmits the unencrypted hosted commands to the payload **2560**. Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **2565**. A payload antenna on the vehicle then transmits payload data to a host receiving antenna and/or a hosted receiving antenna **2570**.

Then, the payload transmits to the first communication security module unencrypted host telemetry **2575**. And, the payload transmits to the second communication security module unencrypted hosted telemetry **2580**. The first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **2585**. And, the second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **2590**.

Then, the first communication security module transmits the encrypted host telemetry to the payload **2591**. The payload antenna then transmits the encrypted host telemetry to the host receiving antenna **2592**. Then, the host receiving antenna transmits the encrypted host telemetry to the host SOC **2593**. The host SOC then

decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **2594**.

The second communication security module transmits the encrypted hosted telemetry to the payload **2595**. The payload antenna then transmits the encrypted hosted telemetry to the hosted receiving antenna **2596**. The hosted receiving antenna then transmits the encrypted hosted telemetry to the HOC **2597**. Then, the HOC decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **2598**. Then, the method ends **2599**.

FIGS. **25E**, **25F**, **25G**, and **25H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna, in accordance with at least one embodiment of the present disclosure. At the start **25000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second COMSEC variety to produce encrypted hosted commands **25005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **25010**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **25015**. Then, the host SOC transmits (out-of-band) the encrypted host commands and the encrypted hosted commands to a vehicle **25020**.

Then, a host command receiver on the vehicle receives the encrypted host commands **25025**. And, a hosted command receiver on the vehicle receives the encrypted hosted commands **25030**. The host command receiver transmits the

encrypted host commands to a first communication security module **25035**. The hosted command receiver transmits the encrypted hosted commands to a second communication security module **25040**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **25045**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **25050**.

The first communication security module then transmits the unencrypted host commands to the payload **25055**. The second communication security module then transmits the unencrypted hosted commands to the payload **25060**. Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **25065**. A payload antenna on the vehicle then transmits payload data to a host receiving antenna and/or a hosted receiving antenna **25070**.

Then, the payload transmits to the first communication security module unencrypted host telemetry **25075**. And, the payload transmits to the second communication security module unencrypted hosted telemetry **25080**. The first communication security module encrypts the unencrypted host telemetry utilizing the first COMSEC variety to generate encrypted host telemetry **25085**. And, the second communication security module encrypts the unencrypted hosted telemetry utilizing the second COMSEC variety to generate encrypted hosted telemetry **25090**.

Then, the first communication security module transmits the encrypted host telemetry to the payload **25091**. The payload antenna then transmits the encrypted

host telemetry to the host receiving antenna **25092**. Then, the host receiving antenna transmits the encrypted host telemetry to the host SOC **25093**. The host SOC then decrypts the encrypted host telemetry utilizing the first COMSEC variety to generate the unencrypted host telemetry **25094**.

The second communication security module transmits the encrypted hosted telemetry to the payload **25095**. The payload antenna then transmits the encrypted hosted telemetry to the host receiving antenna **25096**. The host receiving antenna then transmits the encrypted hosted telemetry to the host SOC **25097**. The host SOC transmits the encrypted hosted telemetry to the HOC **25098**. Then, the HOC decrypts the encrypted hosted telemetry utilizing the second COMSEC variety to generate the unencrypted hosted telemetry **25099**. Then, the method ends **25001**.

FIG. **26A** is a diagram **2600** showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user (i.e. the host SOC) **2650** and the hosted user (i.e. the HOC) **2660** being transmitted to a host receiving antenna **2685** and a hosted receiving antenna **2690**, where the telemetry is encrypted utilizing a single communication security (COMSEC) variety, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **2610**, a host SOC **2650**, and a HOC **2660** are shown. The HOC **2660** has leased at least a portion (i.e. a virtual transponder(s)) of the payload **2605** of the vehicle **2610** from the owner of a satellite (i.e. the host SOC) **2650**. It should be noted that in some embodiments, the HOC **2660** may lease all of the payload **2605** of the vehicle **2610** from the owner of a satellite (i.e. the host SOC) **2650**. Also, it should be noted that in some embodiments,

the HOC **2660** may own the payload **2605** (e.g., a steerable antenna) of the vehicle **2610**, and contract the host SOC **2650** to transmit encrypted hosted commands to the vehicle **2610**.

During operation, the HOC **2660** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (i.e. a virtual transponder(s)) of the payload **2605** that the HOC **2660** is leasing from the host SOC **2650**. The host SOC **2650** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **2605** that host SOC **2650** is utilizing for itself.

It should be noted that, although in FIG. **26A** the host SOC **2650** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **2650** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one

encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **2660** then transmits **2615** the encrypted hosted commands to the host SOC **2650**. After the host SOC **2650** receives the encrypted hosted commands, the host SOC **2650** transmits **2620** the encrypted host commands and transmits **2625** the encrypted hosted commands to the vehicle **2610**. The host SOC **2650** transmits **2620**, **2625** the encrypted host commands and the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **2635** on the vehicle **2610** receives the encrypted host commands. In addition, the hosted command receiver **2645** on the vehicle **2610** receives the encrypted hosted commands.

It should be noted that in other embodiments, the disclosed system for a virtual transponder utilizing inband telemetry may employ more or less receivers **2635**, **2645** than as is shown in FIG. **26A**.

The host command receiver **2635** then transmits **2652** the encrypted host commands to a first communication security module **2662**. The first communication security module **2662** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **2662** may comprise one or more modules. In addition, the first communication security module **2662** may comprise one or more processors.

The hosted command receiver **2645** then transmits **2655** the encrypted hosted commands to a second communication security module **2665**. The second communication security module **2665** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **2665** may comprise one or more modules. In addition, the second communication security module **2665** may comprise one or more processors.

The first communication security module **2662** then transmits **2670** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **2605**. The second communication security module **2665** transmits **2675** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload) **2605**. The payload **2605** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. A payload antenna **2680** then transmits (e.g., in one or more antenna beams **2681**) payload data to a host receiving antenna **2685** and/or a hosted receiving antenna **2690** on the ground. It should be noted that in some embodiments, the hosted receiving antenna **2690** may be air based, sea based, or ground based, as is shown in FIG. **26A**.

It should be noted that, although in FIG. **26A**, antenna beams **2681** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **2681** may include more or less number of beams than is shown in FIG. **26A** (e.g., antenna beams **2681** may only include a single beam), and antenna beams **2681** may

include beams of different shapes than circular spot beams as is shown in FIG. **26A** (e.g., antenna beams **2681** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **2680** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **2680** may comprise one or more multifeed antenna arrays.

The payload **2605** transmits **2691** unencrypted telemetry to the first communication security module **2662**. The unencrypted telemetry comprises unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **2605** that is utilized by the host SOC **2650**) and unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data related to the portion of the payload **2605** that is leased by the HOC **2660**). The first communication security module **2662** then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry (i.e. encrypted TLM).

The first communication security module **2662** then transmits **2693** the encrypted telemetry to the payload **2605**. The payload antenna **2680** then transmits **2697** the encrypted telemetry to the host receiving antenna **2685**. The payload antenna **2680** transmits **2697** the encrypted telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The host receiving antenna **2685** then

transmits **2698** the encrypted telemetry to the host SOC **2650**. The host SOC **2650** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The host SOC **2650** then utilizes a database that comprises host payload decommutated information and does not comprise hosted payload decommutated information (i.e. a database without hosted payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **2605** that is utilized by the host SOC **2650**.

The payload antenna **2680** then transmits **2696** the encrypted telemetry to the hosted receiving antenna **2690**. The payload antenna **2680** transmits **2696** the encrypted telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The hosted receiving antenna **2690** then transmits **2699** the encrypted telemetry to the HOC **2660**. The HOC **2660** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The HOC **2660** then utilizes a database that comprises hosted payload decommutated information and does not comprise host payload decommutated information (i.e. a database without host payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **2605** that is utilized by the HOC **2660**.

FIG. **26B** is a diagram **26000** showing the disclosed system for a virtual transponder utilizing inband telemetry for the host user (i.e. the host SOC) **26050** and

the hosted user (i.e. the HOC) **26060** being transmitted to a host receiving antenna **26085**, where the telemetry is encrypted utilizing a single communication security (COMSEC) variety, in accordance with at least one embodiment of the present disclosure. In this figure, a vehicle **26010**, a host SOC **26050**, and a HOC **26060** are shown. The HOC **26060** has leased at least a portion (i.e. a virtual transponder(s)) of the payload **26005** of the vehicle **26010** from the owner of a satellite (i.e. the host SOC) **26050**. It should be noted that in some embodiments, the HOC **26060** may lease all of the payload **26005** of the vehicle **26010** from the owner of a satellite (i.e. the host SOC) **26050**. Also, it should be noted that in some embodiments, the HOC **26060** may own the payload **26005** (e.g., a steerable antenna) of the vehicle **26010**, and contract the host SOC **26050** to transmit encrypted hosted commands to the vehicle **26010**.

During operation, the HOC **26060** encrypts unencrypted hosted commands (i.e. unencrypted HoP CMD), by utilizing a second COMSEC variety, to produce encrypted hosted commands (i.e. encrypted HoP CMD). The hosted commands are commands that are used to configure the portion (i.e. a virtual transponder(s)) of the payload **26005** that the HOC **26060** is leasing from the host SOC **26050**. The host SOC **26050** encrypts unencrypted host commands (i.e. unencrypted host CMD), by utilizing a first COMSEC variety, to produce encrypted host commands (i.e. encrypted host CMD). The host commands are commands that are used to configure the portion (e.g., a transponder(s)) of the payload **26005** that host SOC **26050** is utilizing for itself.

It should be noted that, although in FIG. 26B the host SOC **26050** is depicted to have its ground antenna located right next to its operations building; in other embodiments, the host SOC **26050** may have its ground antenna located very far away from the its operations building (e.g., the ground antenna may be located in another country than the operations building).

Also, it should be noted that the first COMSEC variety may include at least one encryption key and/or at least one algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm). Additionally, it should be noted that the second COMSEC variety may include at least one encryption key and/or at least one encryption algorithm (e.g., a Type **1** encryption algorithm or a Type **2** encryption algorithm).

The HOC **26060** then transmits **26015** the encrypted hosted commands to the host SOC **26050**. After the host SOC **26050** receives the encrypted hosted commands, the host SOC **26050** transmits **26020** the encrypted host commands and transmits **26025** the encrypted hosted commands to the vehicle **26010**. The host SOC **26050** transmits **26020**, **26025** the encrypted host commands and the encrypted hosted commands utilizing an out-of-band frequency band(s) (i.e. a frequency band(s) that is not the same frequency band(s) utilized to transmit payload data). The host command receiver **26035** on the vehicle **26010** receives the encrypted host commands. In addition, the hosted command receiver **26045** on the vehicle **26010** receives the encrypted hosted commands.

It should be noted that in other embodiments, the disclosed system for a virtual transponder utilizing inband telemetry may employ more or less receivers **26035**, **26045** than as is shown in FIG. **26B**.

The host command receiver **26035** then transmits **26052** the encrypted host commands to a first communication security module **26062**. The first communication security module **26062** decrypts the encrypted host commands utilizing the first COMSEC variety (i.e. COMSEC Variety **1**) to generate unencrypted host commands.

It should be noted that the first communication security module **26062** may comprise one or more modules. In addition, the first communication security module **26062** may comprise one or more processors.

The hosted command receiver **26045** then transmits **26055** the encrypted hosted commands to a second communication security module **26065**. The second communication security module **26065** decrypts the encrypted hosted commands utilizing the second COMSEC variety (i.e. COMSEC Variety **2**) to generate unencrypted hosted commands.

It should be noted that the second communication security module **26065** may comprise one or more modules. In addition, the second communication security module **26065** may comprise one or more processors.

The first communication security module **26062** then transmits **26070** the unencrypted host commands to the payload (i.e. the shared host/hosted payload) **26005**. The second communication security module **26065** transmits **26075** the unencrypted hosted commands to the payload (i.e. the shared host/hosted payload)

26005. The payload **26005** is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands. A payload antenna **26080** then transmits (e.g., in one or more antenna beams **26081**) payload data to a host receiving antenna **26085** and/or a hosted receiving antenna **26090** on the ground. It should be noted that in some embodiments, the hosted receiving antenna **26090** may be air based, sea based, or ground based, as is shown in FIG. **26B**.

It should be noted that, although in FIG. **26B**, antenna beams **26081** is shown to include a plurality of circular spot beams; in other embodiments, antenna beams **26081** may include more or less number of beams than is shown in FIG. **26B** (e.g., antenna beams **26081** may only include a single beam), and antenna beams **26081** may include beams of different shapes than circular spot beams as is shown in FIG. **26B** (e.g., antenna beams **26081** may include elliptical beams and/or shaped beams of various different shapes).

It should be noted that in one or more embodiments, the payload antenna **26080** may comprise one or more reflector dishes including, but not limited to, parabolic reflectors and/or shaped reflectors. In some embodiments, the payload antenna **26080** may comprise one or more multifeed antenna arrays.

The payload **26005** transmits **26091** unencrypted telemetry to the first communication security module **26062**. The unencrypted telemetry comprises unencrypted host telemetry (i.e. unencrypted host TLM, which is telemetry data related to the portion of the payload **26005** that is utilized by the host SOC **26050**) and unencrypted hosted telemetry (i.e. unencrypted HoP TLM, which is telemetry data

related to the portion of the payload **26005** that is leased by the HOC **26060**). The first communication security module **26062** then encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry (i.e. encrypted TLM).

The first communication security module **26062** then transmits **26093** the encrypted telemetry to the payload **26005**. The payload antenna **26080** then transmits **26097** the encrypted telemetry to the host receiving antenna **26085**. The payload antenna **26080** transmits **26097** the encrypted telemetry utilizing an inband frequency band(s) (i.e. at least one frequency band that is the same as at least one frequency band utilized to transmit payload data). The host receiving antenna **26085** then transmits **26098** the encrypted telemetry to the host SOC **26050**. The host SOC **26050** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The host SOC **26050** then utilizes a database that comprises host payload decommutated information and does not comprise hosted payload decommutated information (i.e. a database without hosted payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **26005** that is utilized by the host SOC **26050**.

The host SOC **26050** transmits **26099** the encrypted telemetry to the HOC **26060**. The HOC **26060** then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry. The HOC **26060** then utilizes a database that comprises hosted payload decommutated information and

does not comprise host payload decommutated information (i.e. a database without host payload decommutated information) to read to unencrypted telemetry to determine the telemetry data related to the portion of the payload **26005** that is utilized by the HOC **26060**.

FIGS. **27A**, **27B**, **27C**, and **27D** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna and a hosted receiving antenna, where the telemetry is encrypted utilizing a single COMSEC variety, in accordance with at least one embodiment of the present disclosure. At the start **2700** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second COMSEC variety to produce encrypted hosted commands **2705**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **2710**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **2715**. Then, the host SOC transmits (out-of-band) the encrypted host commands and the encrypted hosted commands to a vehicle **2720**.

Then, a host command receiver on the vehicle receives the encrypted host commands **2725**. And, a hosted command receiver on the vehicle receives the encrypted hosted commands **2730**. The host command receiver transmits the encrypted host commands to a first communication security module **2735**. The hosted command receiver transmits the encrypted hosted commands to a second communication security module **2740**. The first communication security module then

decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **2745**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **2750**.

The first communication security module then transmits the unencrypted host commands to the payload **2755**. The second communication security module then transmits the unencrypted hosted commands to the payload **2760**. Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **2765**. A payload antenna on the vehicle then transmits payload data to a host receiving antenna and/or a hosted receiving antenna **2770**.

Then, the payload transmits to the first communication security module unencrypted telemetry **2775**. The first communication security module encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry **2780**.

Then, the first communication security module transmits the encrypted telemetry to the payload **2785**. The payload antenna then transmits the encrypted telemetry to the host receiving antenna **2790**. Then, the host receiving antenna transmits the encrypted telemetry to the host SOC **2791**. The host SOC then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **2792**. Then, the host SOC determines the telemetry data related to a portion of the payload utilized by the host SOC by using a database without hosted decommutated information to read the encrypted telemetry **2793**.

The payload antenna transmits the encrypted telemetry to the hosted receiving antenna **2794**. The hosted receiving antenna then transmits the encrypted telemetry to the HOC **2795**. Then, the HOC decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **2796**. Then, the HOC determines the telemetry data related to a portion of the payload utilized by the HOC by using a database without host decommutated information to read the encrypted telemetry **2797**. Then, the method ends **2798**.

FIGS. **27E**, **27F**, **27G**, and **27H** together show a flow chart for the disclosed method for a virtual transponder utilizing inband telemetry for the host user and the hosted user being transmitted to a host receiving antenna, where the telemetry is encrypted utilizing a single COMSEC variety, in accordance with at least one embodiment of the present disclosure. At the start **27000** of the method, a hosted payload (HoP) operation center (HOC) encrypts unencrypted hosted commands by utilizing a second COMSEC variety to produce encrypted hosted commands **27005**. Then, the HOC transmits the encrypted hosted commands to a host spacecraft operations center (SOC) **27010**. The host SOC encrypts unencrypted host commands by utilizing a first COMSEC variety to produce encrypted host commands **27015**. Then, the host SOC transmits (out-of-band) the encrypted host commands and the encrypted hosted commands to a vehicle **27020**.

Then, a host command receiver on the vehicle receives the encrypted host commands **27025**. And, a hosted command receiver on the vehicle receives the encrypted hosted commands **27030**. The host command receiver transmits the

encrypted host commands to a first communication security module **27035**. The hosted command receiver transmits the encrypted hosted commands to a second communication security module **27040**. The first communication security module then decrypts the encrypted host commands utilizing the first COMSEC variety to generate the unencrypted host commands **27045**. The second communication security module then decrypts the encrypted hosted commands utilizing the second COMSEC variety to generate the unencrypted hosted commands **27050**.

The first communication security module then transmits the unencrypted host commands to the payload **27055**. The second communication security module then transmits the unencrypted hosted commands to the payload **27060**. Then, the payload is reconfigured according to the unencrypted host commands and/or the unencrypted hosted commands **27065**. A payload antenna on the vehicle then transmits payload data to a host receiving antenna and/or a hosted receiving antenna **27070**.

Then, the payload transmits to the first communication security module unencrypted telemetry **27075**. The first communication security module encrypts the unencrypted telemetry utilizing the first COMSEC variety to generate encrypted telemetry **27080**.

Then, the first communication security module transmits the encrypted telemetry to the payload **27085**. The payload antenna then transmits the encrypted telemetry to the host receiving antenna **27090**. Then, the host receiving antenna transmits the encrypted telemetry to the host SOC **27091**. The host SOC then decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the

unencrypted telemetry **27092**. Then, the host SOC determines the telemetry data related to a portion of the payload utilized by the host SOC by using a database without hosted decommutated information to read the encrypted telemetry **27093**.

The host SOC then transmits the encrypted telemetry to the HOC **27095**. Then, the HOC decrypts the encrypted telemetry utilizing the first COMSEC variety to generate the unencrypted telemetry **27096**. Then, the HOC determines the telemetry data related to a portion of the payload utilized by the HOC by using a database without host decommutated information to read the encrypted telemetry **27097**. Then, the method ends **27098**.

Although particular embodiments have been shown and described, it should be understood that the above discussion is not intended to limit the scope of these embodiments. While embodiments and variations of the many aspects of the invention have been disclosed and described herein, such disclosure is provided for purposes of explanation and illustration only. Thus, various changes and modifications may be made without departing from the scope of the claims.

Where methods described above indicate certain events occurring in certain order, those of ordinary skill in the art having the benefit of this disclosure would recognize that the ordering may be modified and that such modifications are in accordance with the variations of the present disclosure. Additionally, parts of methods may be performed concurrently in a parallel process when possible, as well as performed sequentially. In addition, more parts or less part of the methods may be performed.

Accordingly, embodiments are intended to exemplify alternatives, modifications, and equivalents that may fall within the scope of the claims.

Although certain illustrative embodiments and methods have been disclosed herein, it can be apparent from the foregoing disclosure to those skilled in the art that variations and modifications of such embodiments and methods can be made without departing from the teachings herein. Many other examples of the art disclosed exist, each differing from others in matters of detail only. Accordingly, it is intended that the art disclosed shall be limited only to the extent required by the appended claims and the rules and principles of applicable law.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method for a virtual transponder on a vehicle, the method comprising:

generating, by a configuration routing algorithm (CRA), a configuration for a portion of a payload on the vehicle utilized by a host user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the host user;

generating, by the CRA, a configuration for a portion of the payload on the vehicle utilized by a hosted user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user;

generating, by a host command generator, host commands for reconfiguring the portion of the payload on the vehicle utilized by the host user by using the configuration for the portion of the payload on the vehicle utilized by the host user;

generating, by a hosted command generator, hosted commands for reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the configuration for the portion of the payload on the vehicle utilized by the hosted user;

transmitting the host commands and the hosted commands to the vehicle;

reconfiguring the portion of the payload on the vehicle utilized by the host user by using the host commands; and

reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the hosted commands.

2. The method of claim 1, wherein the at least one variable is at least one of: at least one transponder power, at least one transponder spectrum, at least one transponder gain setting, at least one transponder limiter setting, at least one transponder automatic level control setting, at least one transponder phase setting, at least one internal gain generation, bandwidth for at least one beam, at least one frequency band for at least one of the at least one beam, at least one transponder beamforming setting, effective isotropic radiation power (EIRP) for at least one of the at least one beam, at least one transponder channel, or beam steering for at least one of the at least one beam.
3. The method of any one of claims 1 or 2, wherein the reconfiguring comprises reconfiguring at least one of: at least one antenna, at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital channelizer, at least one demodulator, at least one modulator, at least one digital switch matrix, or at least one digital combiner.
4. The method of claim 3, wherein the at least one antenna is one of a parabolic reflector antenna, a shaped reflector antenna, a multifeed array antenna, or a phased array antenna.

5. The method of any one of claims 1-4, wherein the host computing device and the hosted computing device are located at a respective station.
6. The method of claim 5, wherein the station is one of a ground station, a terrestrial vehicle, an airborne vehicle, or a marine vehicle.
7. The method of any one of claims 1-6, wherein the vehicle is an airborne vehicle.
8. The method of claim 7, wherein the airborne vehicle is one of satellite, aircraft, unmanned aerial vehicle (UAV), or space plane.
9. The method of any one of claims 1-8, wherein the method further comprises:

selecting, with a host graphical user interface (GUI) on a host computing device, the option for each of the at least one variable for the portion of the payload on the vehicle utilized by the host user.
10. The method of any one of claims 1-9, wherein the method further comprises:

selecting, with a hosted GUI on a hosted computing device, the option for each of the at least one variable for the portion of the payload on the vehicle utilized by the hosted user.
11. A system for a virtual transponder on a vehicle, the system comprising:

a configuration routing algorithm (CRA) to generate a configuration for a portion of a payload on the vehicle utilized by a host user by using an option for each of at least one variable for the portion of the payload on the

vehicle utilized by the host user, and to generate a configuration for a portion of the payload on the vehicle utilized by a hosted user by using an option for each of at least one variable for the portion of the payload on the vehicle utilized by the hosted user;

a host command generator to generate host commands for reconfiguring the portion of the payload on the vehicle utilized by the host user by using the configuration for the portion of the payload on the vehicle utilized by the host user; and

a hosted command generator to generate hosted commands for reconfiguring the portion of the payload on the vehicle utilized by the hosted user by using the configuration for the portion of the payload on the vehicle utilized by the hosted user,

wherein the portion of the payload on the vehicle utilized by the host user is reconfigured by using the host commands, and

wherein the portion of the payload on the vehicle utilized by the hosted user is reconfigured by using the hosted commands.

12. The system of claim 11, wherein the at least one variable is at least one of: at least one transponder power, at least one transponder spectrum, at least one transponder gain setting, at least one transponder limiter setting, at least one transponder automatic level control setting, at least one transponder phase setting, at least one internal gain generation, bandwidth for at least one beam, at

least one frequency band for at least one of the at least one beam, at least one transponder beamforming setting, effective isotropic radiation power (EIRP) for at least one of the at least one beam, at least one transponder channel, or beam steering for at least one of the at least one beam.

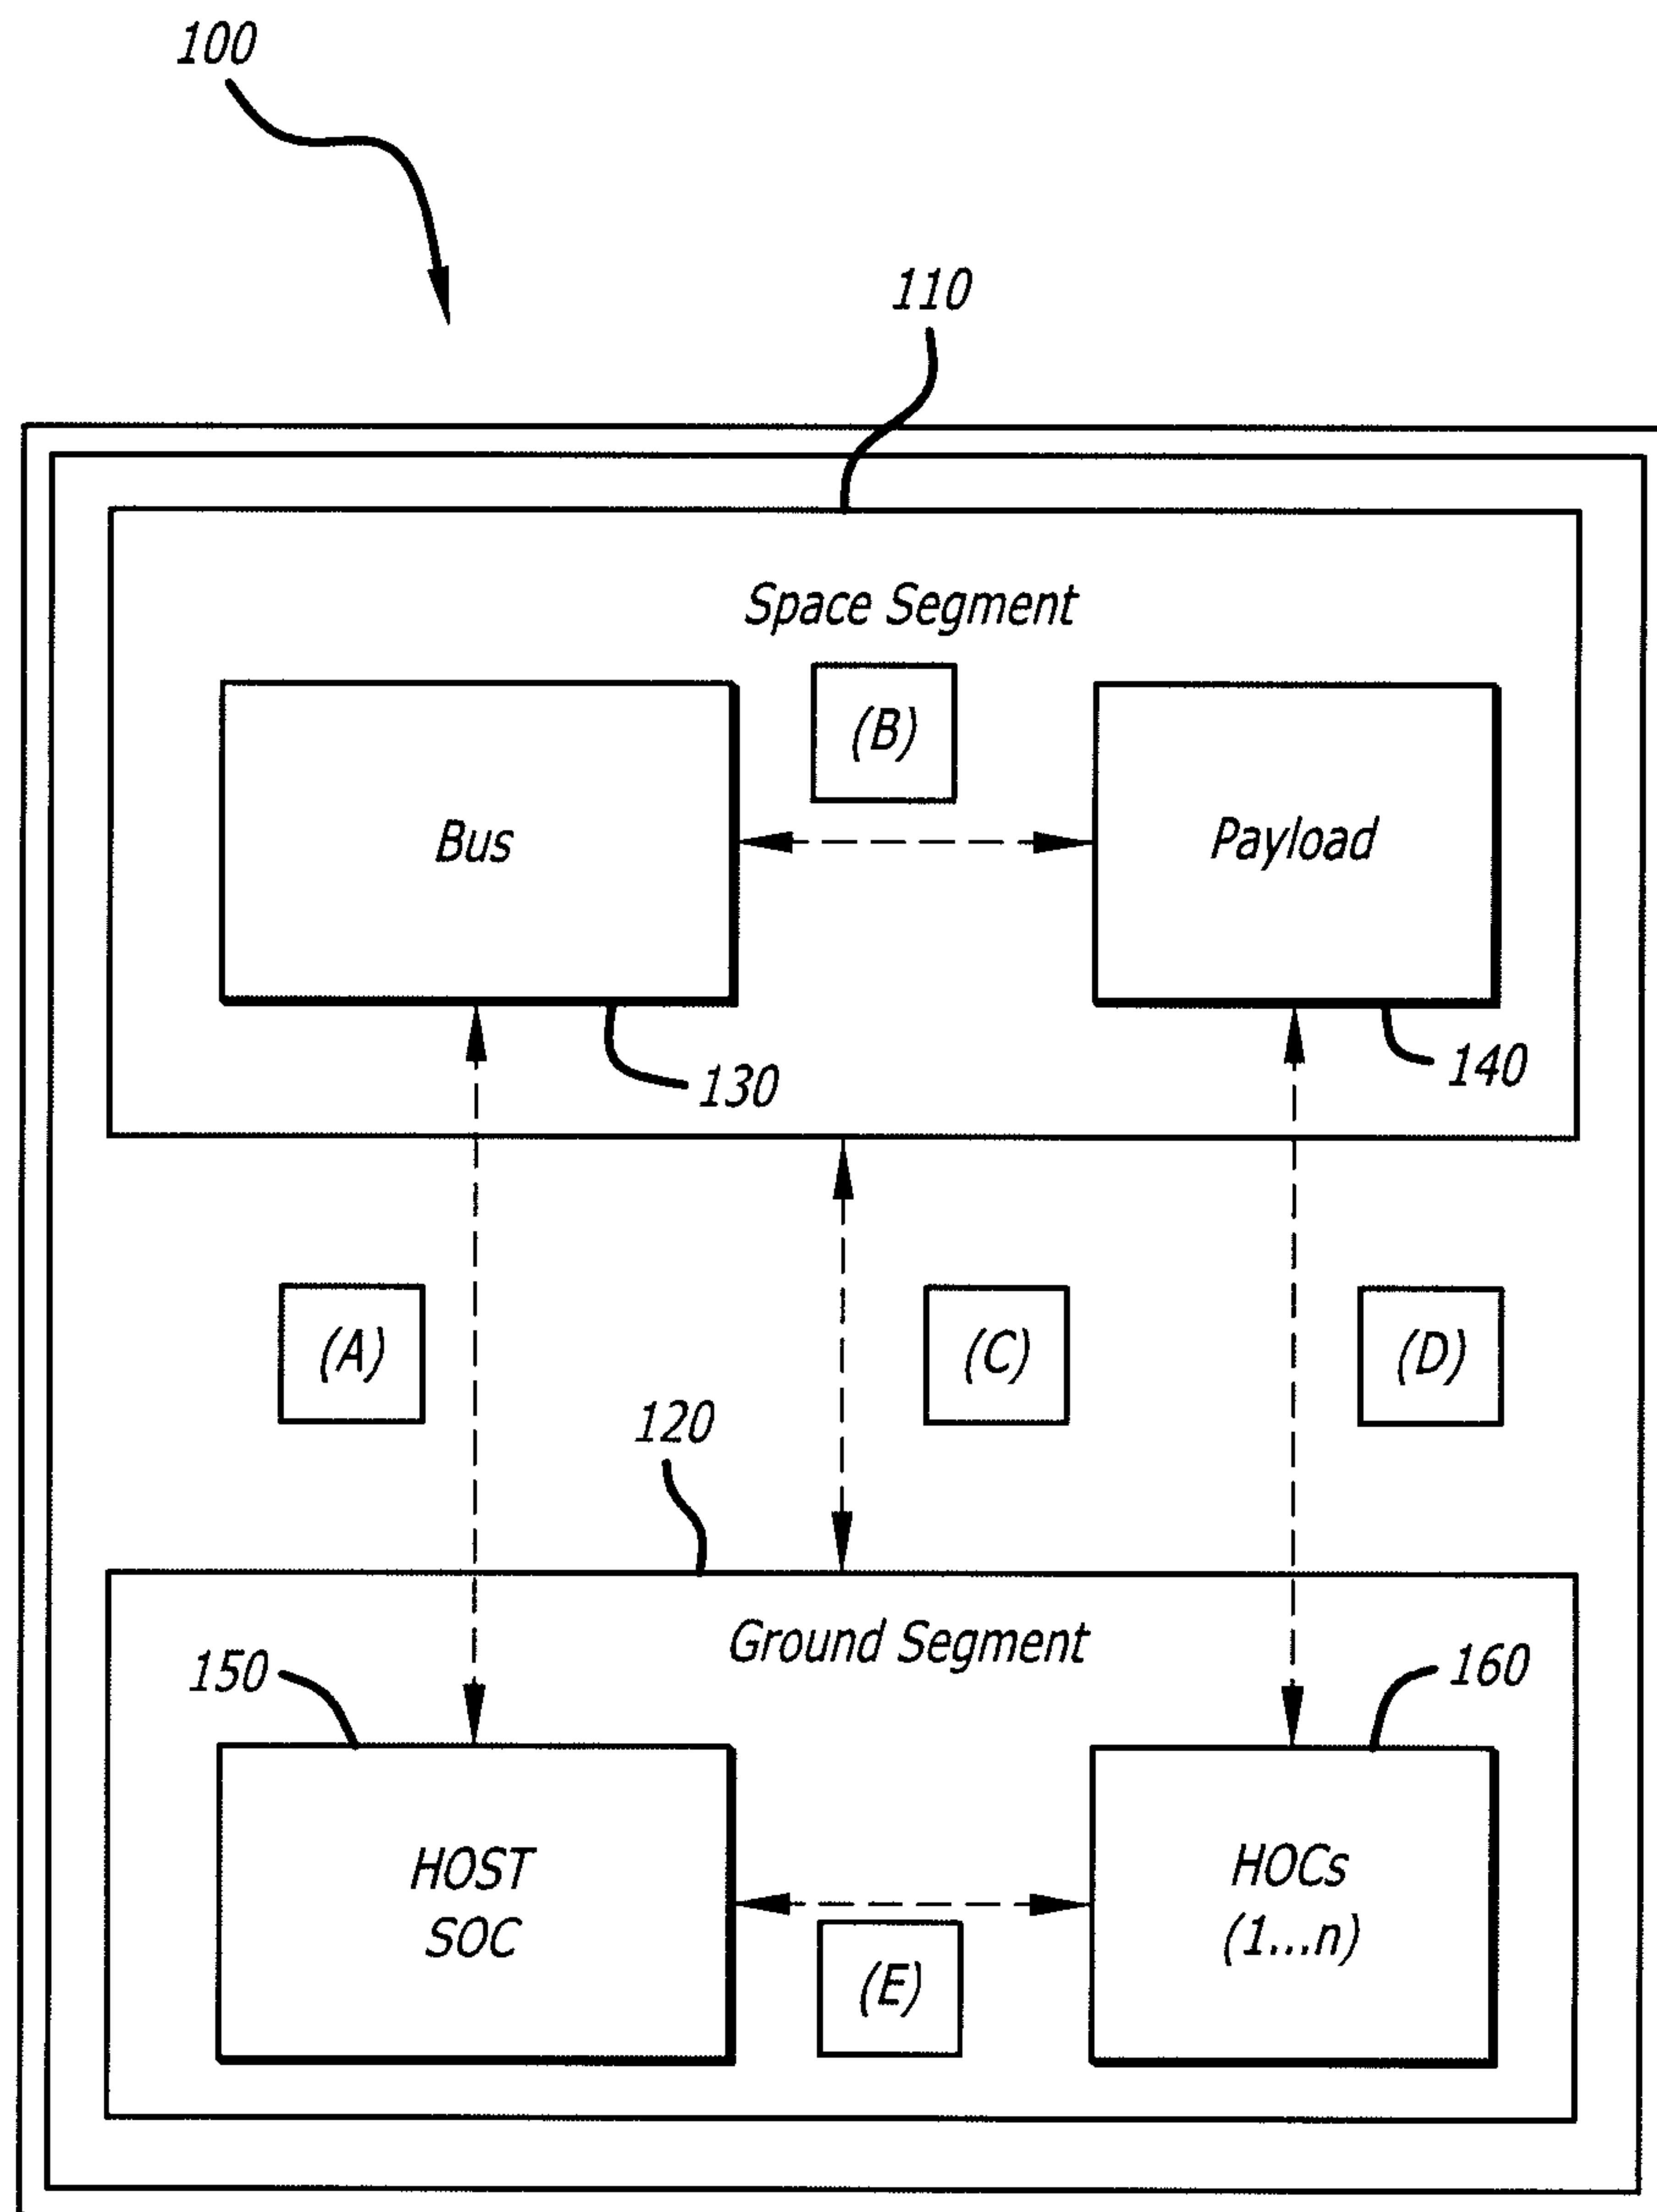
- 13.** The system of any one of claims **11** or **12**, wherein the reconfiguring comprises reconfiguring at least one of: at least one antenna, at least one analog-to-digital converter, at least one digital-to-analog converter, at least one beamformer, at least one digital channelizer, at least one demodulator, at least one modulator, at least one digital switch matrix, or at least one digital combiner.
- 14.** The system of claim **13**, wherein the at least one antenna is one of a parabolic reflector antenna, a shaped reflector antenna, a multifeed array antenna, or a phased array antenna.
- 15.** The system of any one of claims **11-14**, wherein the host computing device and the hosted computing device are located at a respective station.
- 16.** The system of claim **15**, wherein the station is one of a ground station, a terrestrial vehicle, an airborne vehicle, or a marine vehicle.
- 17.** The system of any one of claims **11-16**, wherein the vehicle is an airborne vehicle.
- 18.** The system of claim **17**, wherein the airborne vehicle is one of a satellite, an aircraft, an unmanned aerial vehicle (UAV), or a space plane.

19. The system of any one of claims **11-18**, wherein the system further comprises:

a host graphical user interface (GUI), on a host computing device, used to select the option for each of the at least one variable for the portion of the payload on the vehicle utilized by the host user.

20. The system of any one of claims **11-19**, wherein the system further comprises:

a hosted GUI, on a hosted computing device, used to select the option for each of the at least one variable for the portion of the payload on the vehicle utilized by the hosted user.

*FIG. 1*

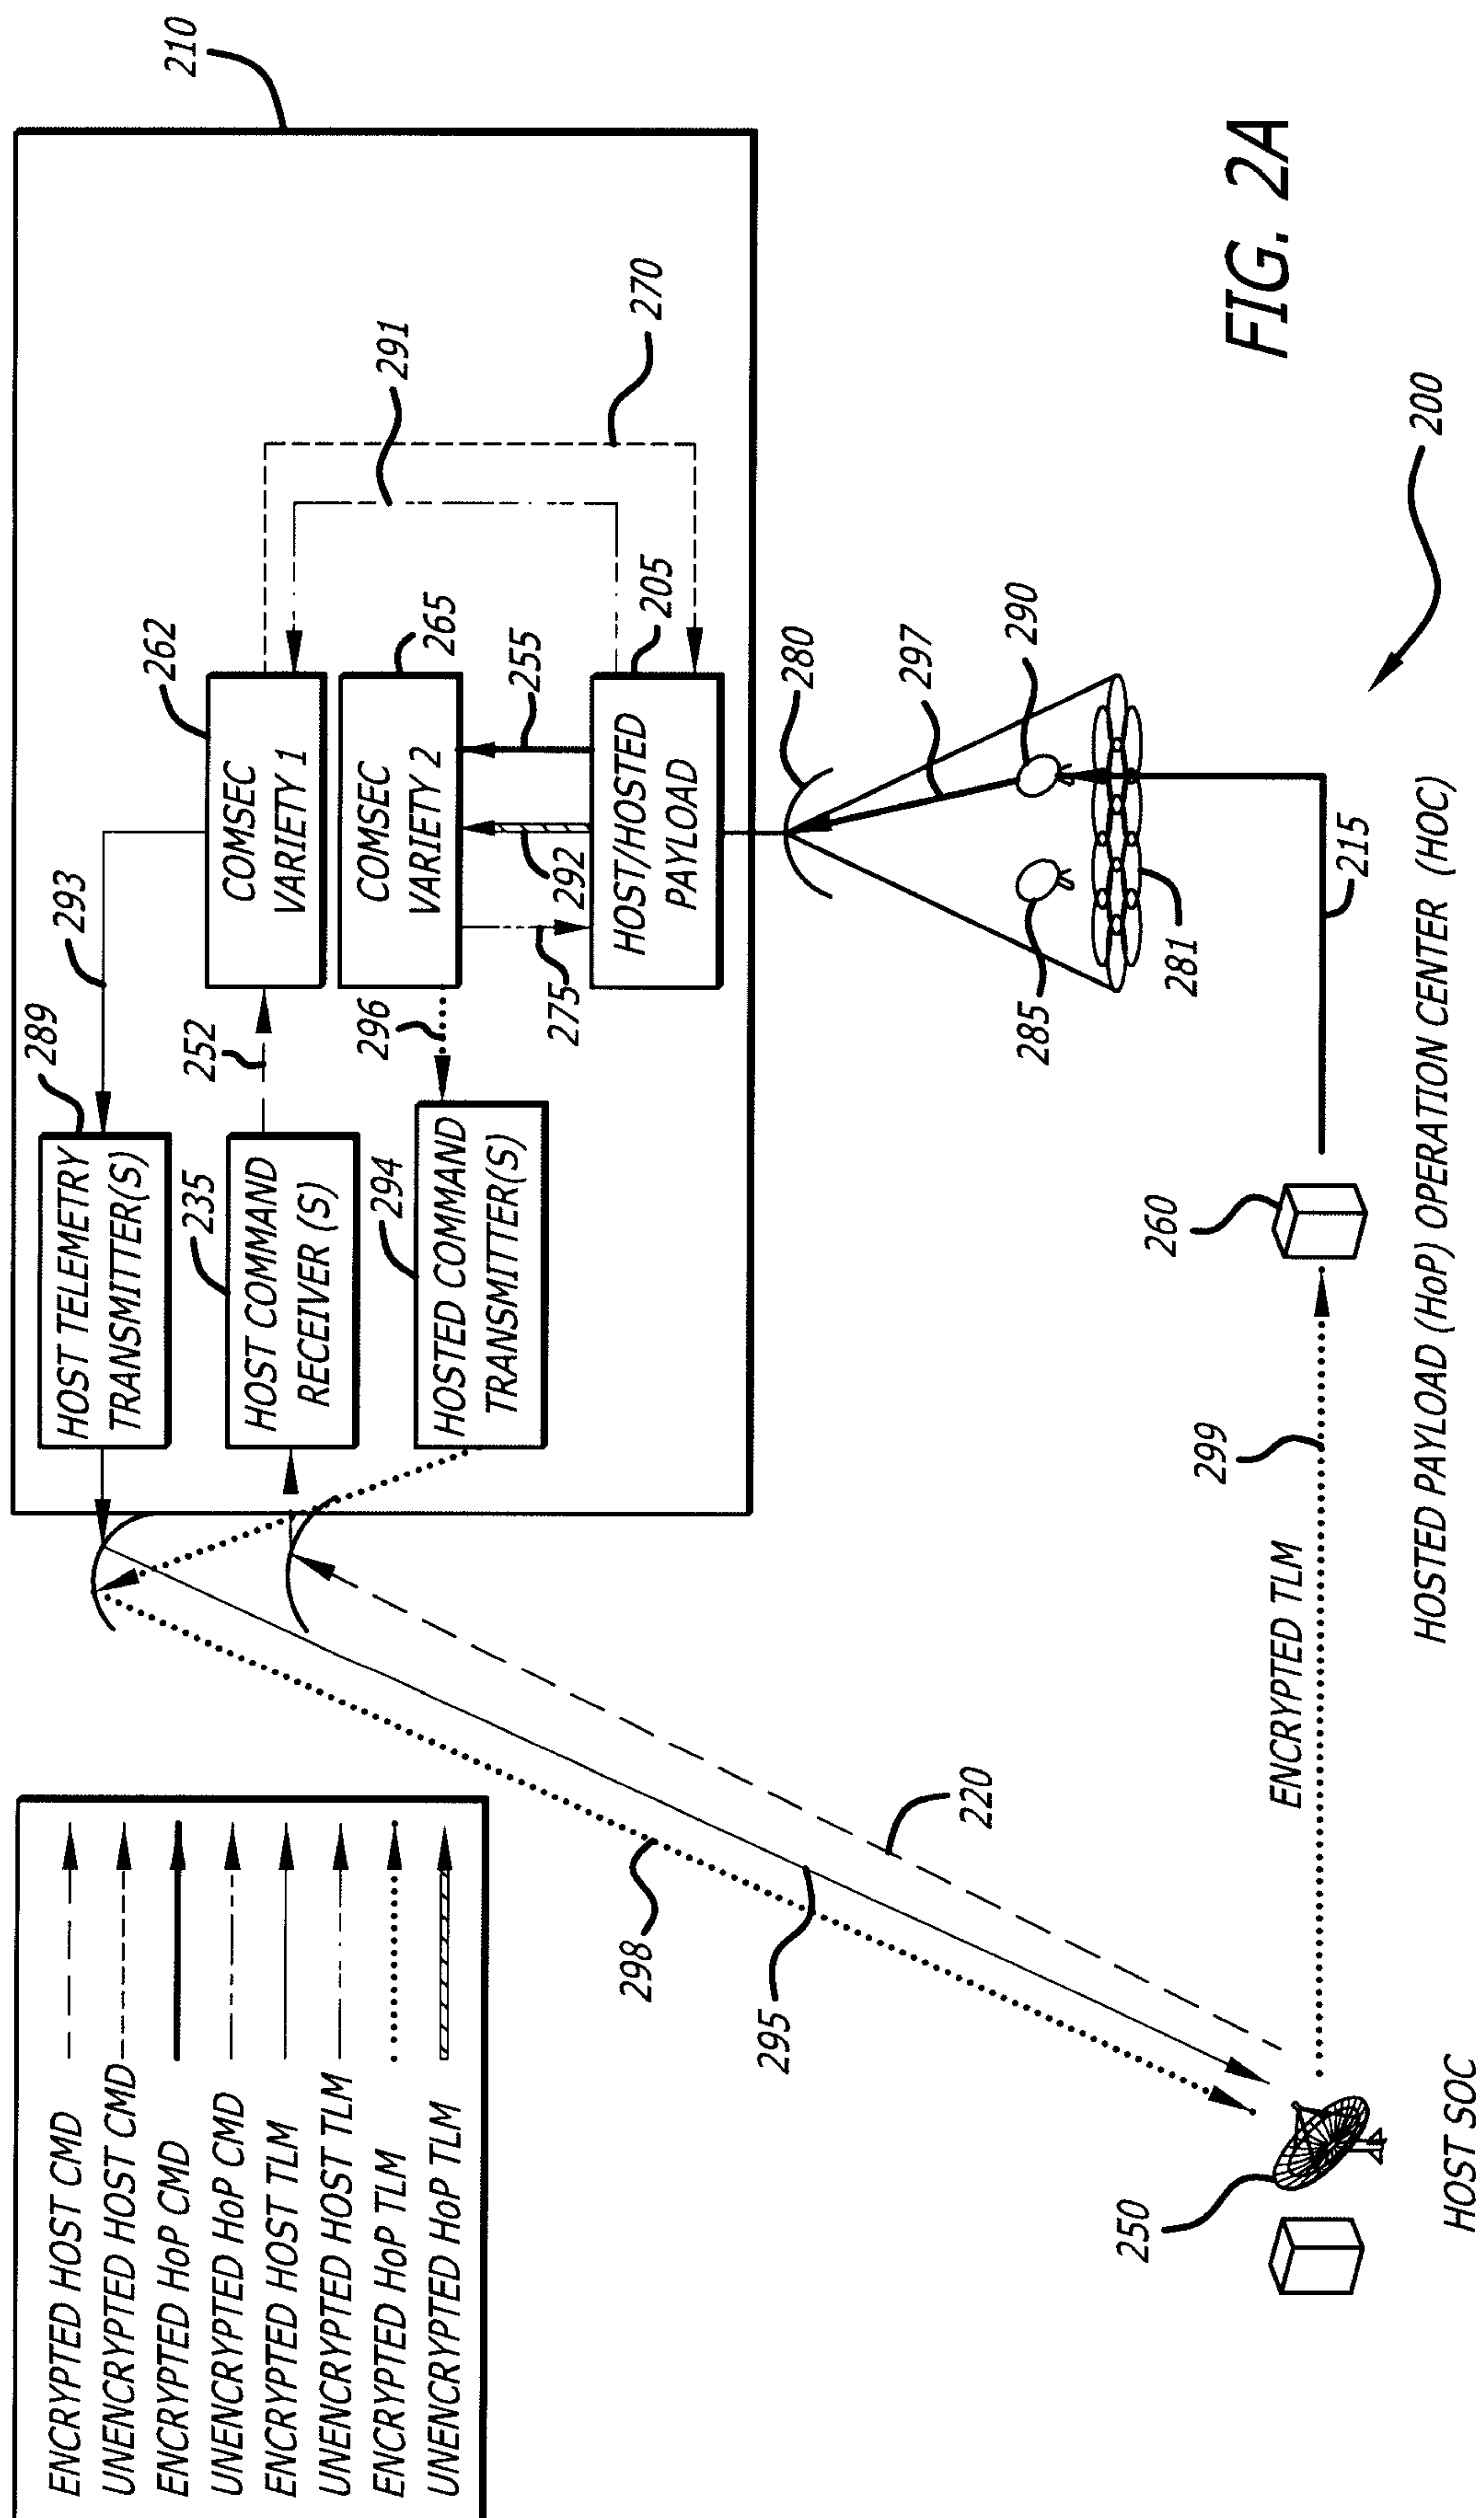


FIG. 3A

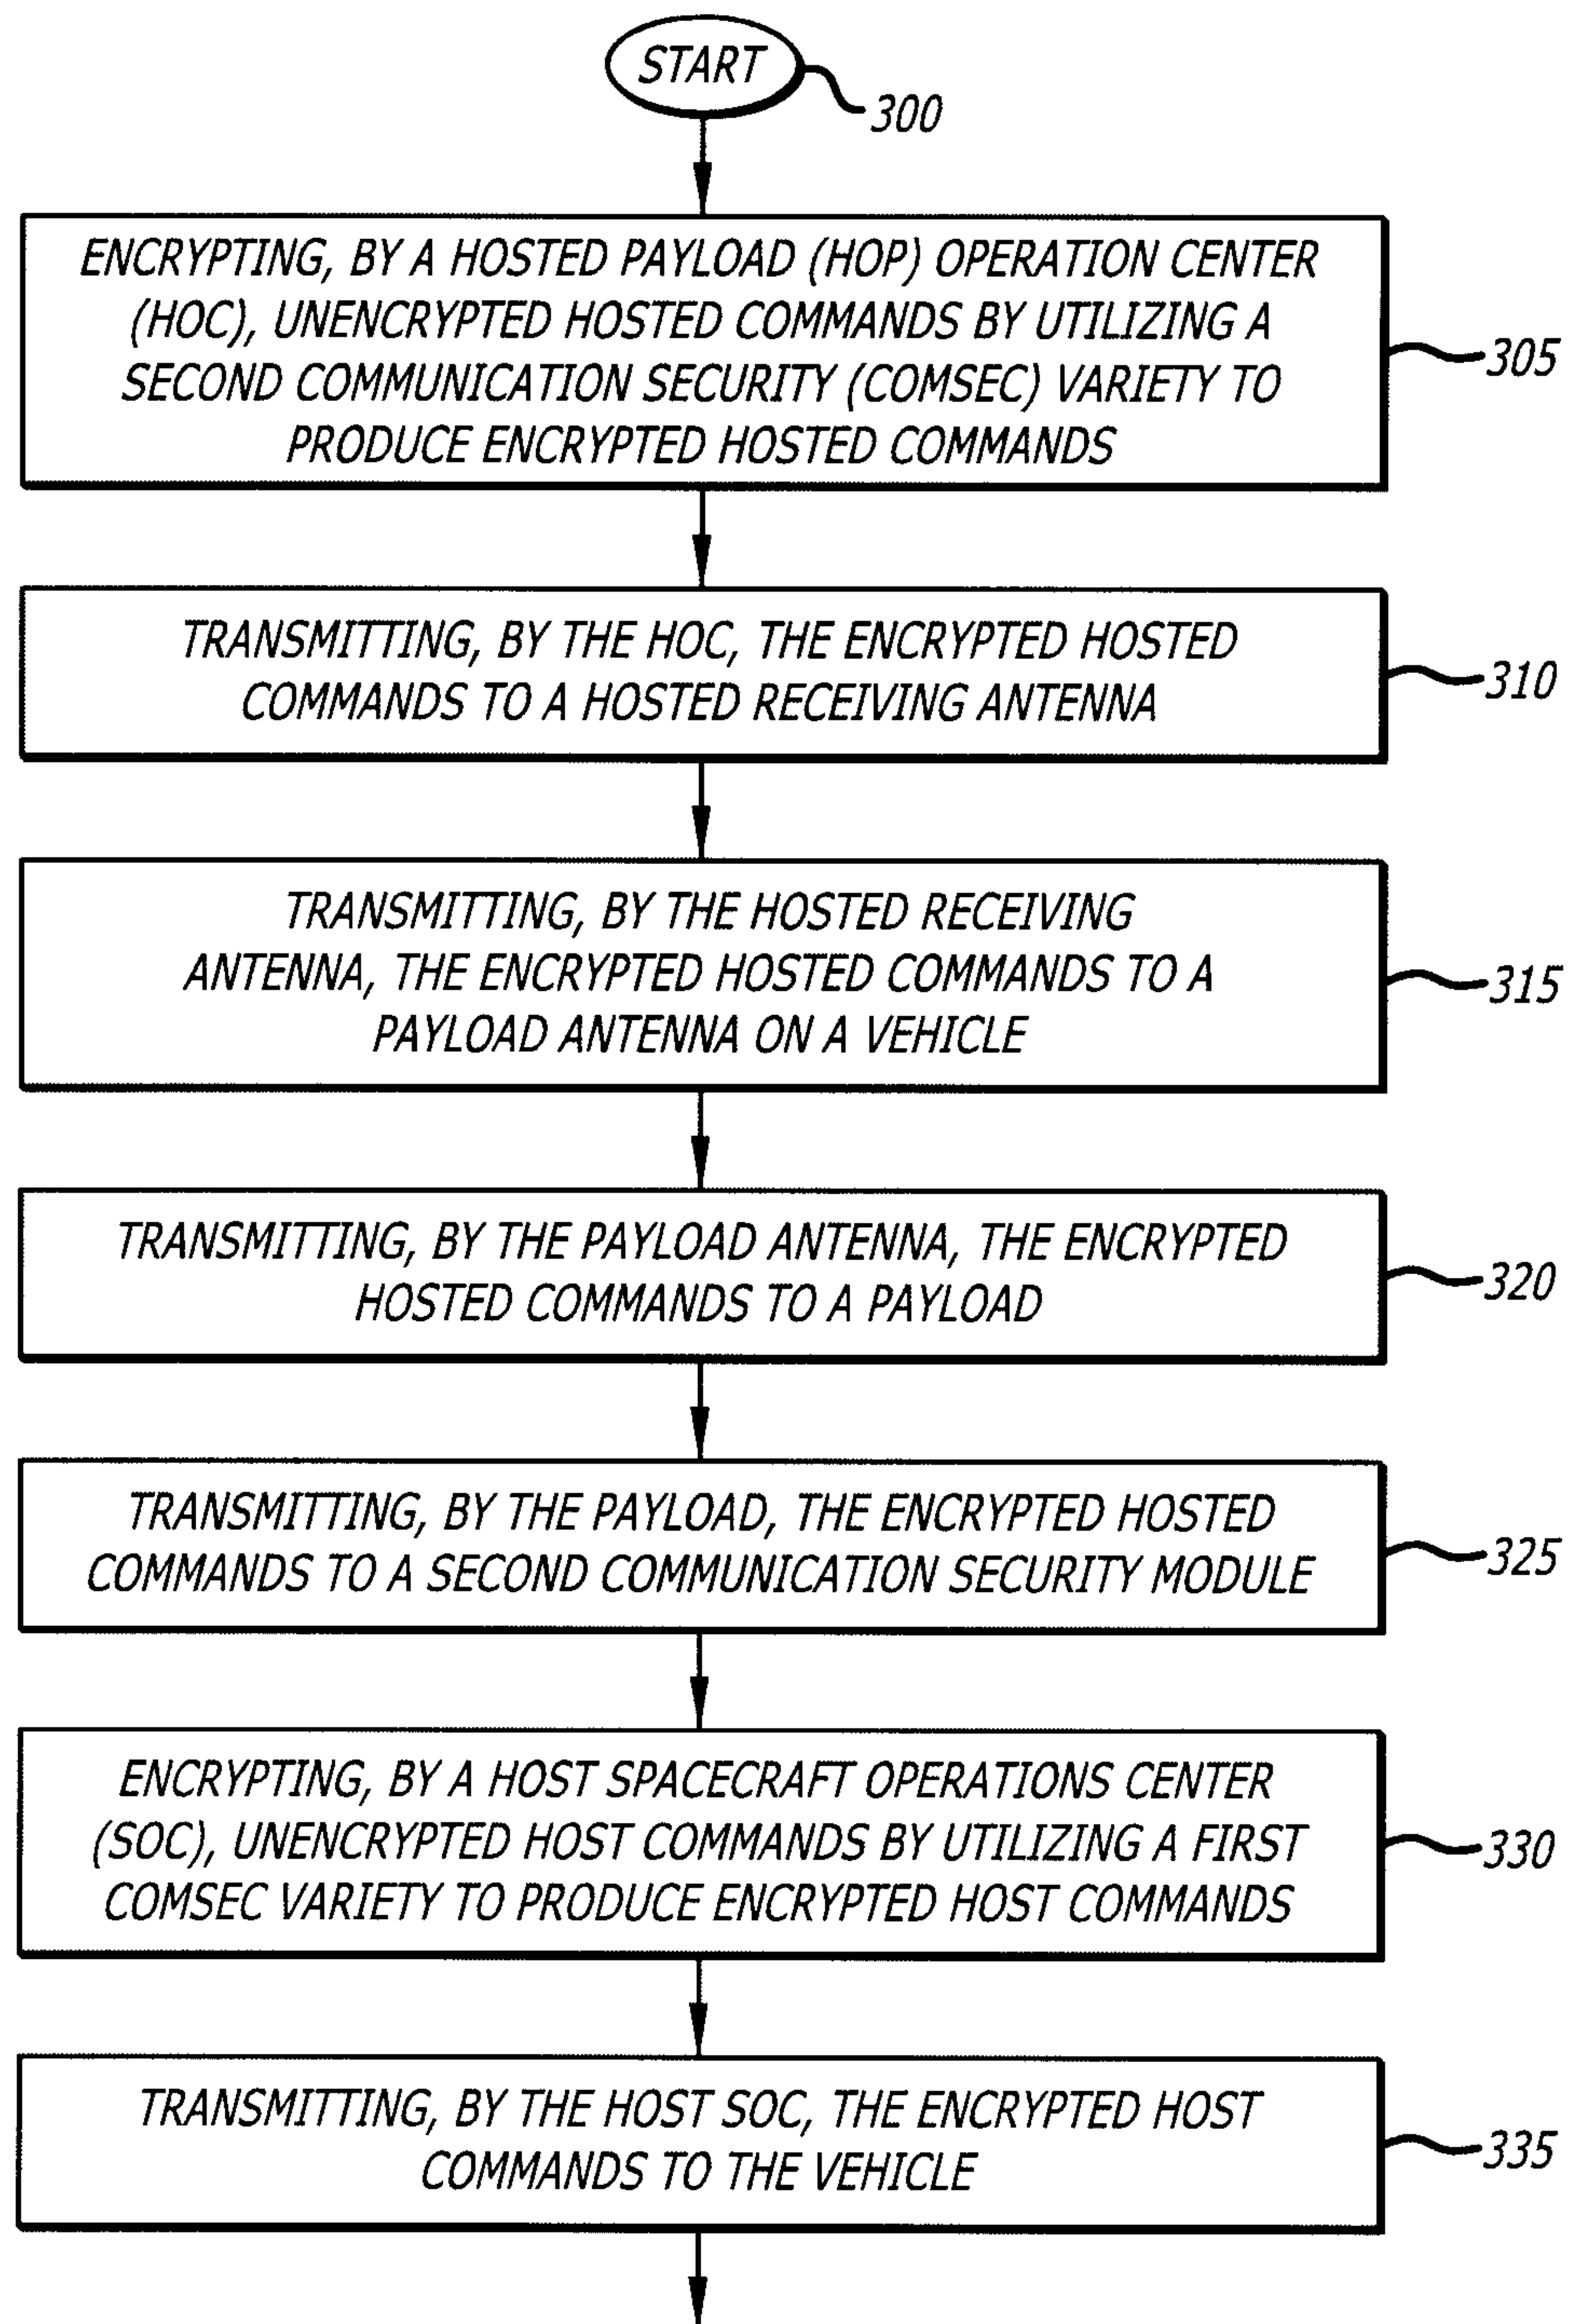


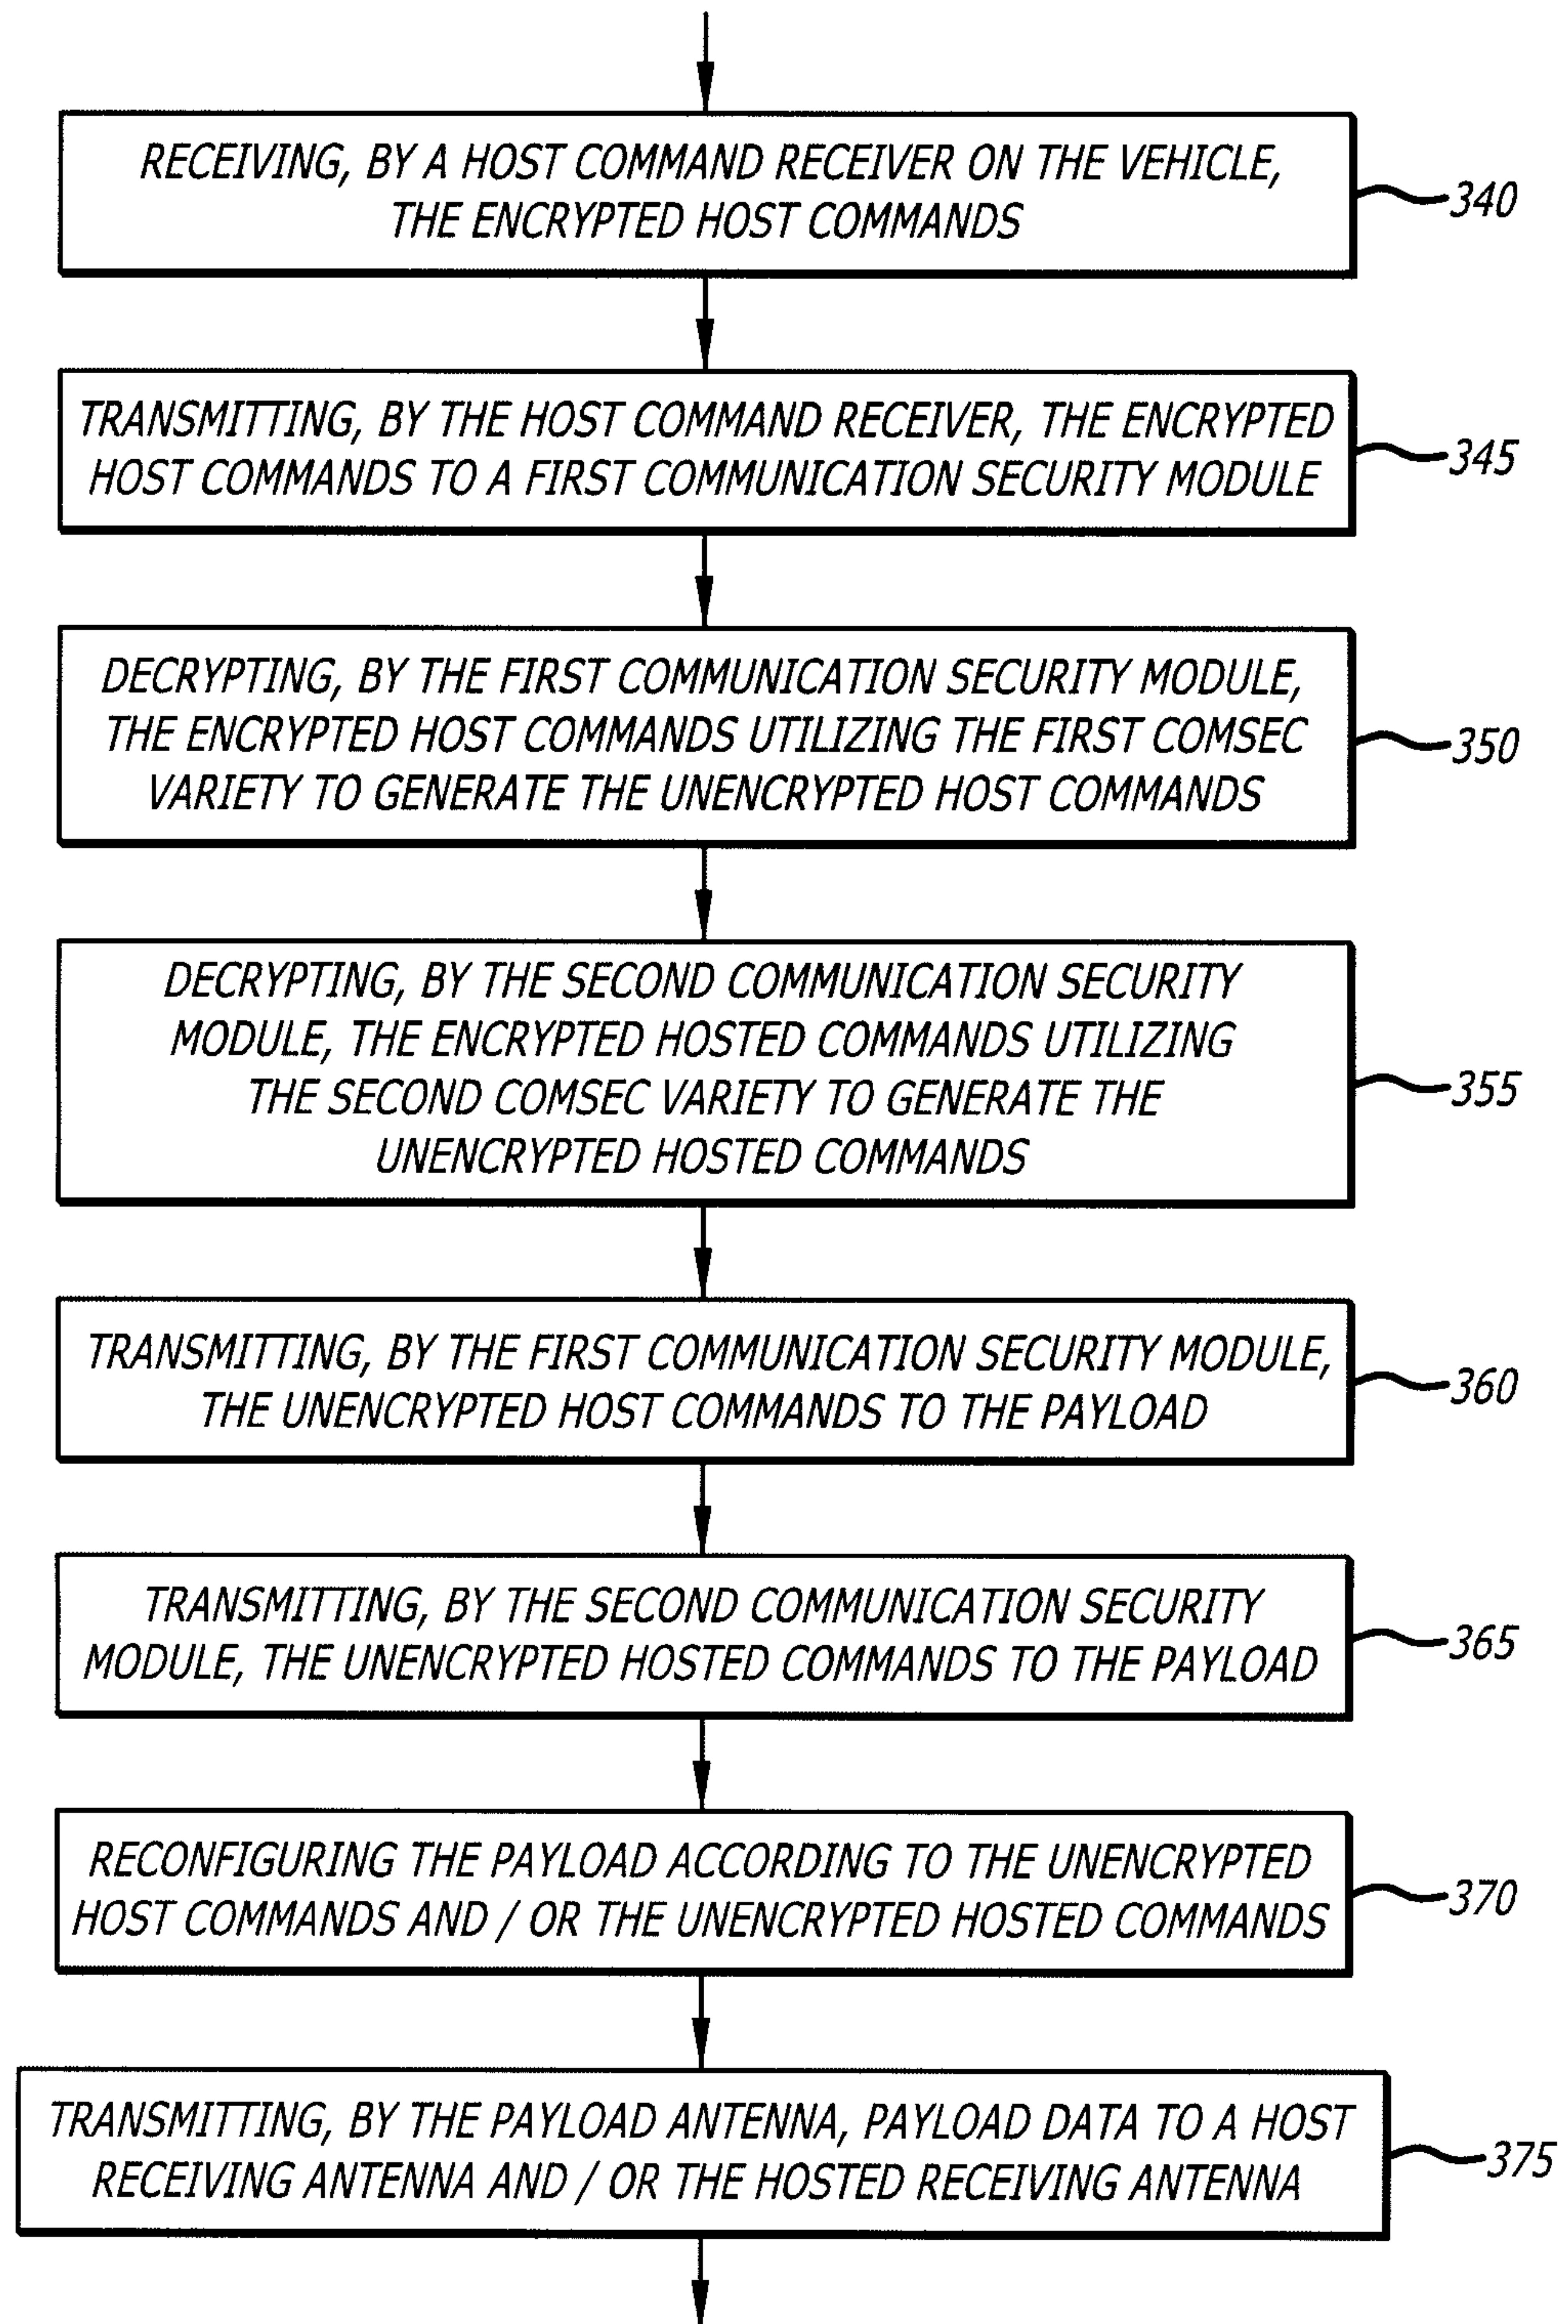
FIG. 3B

FIG. 3C

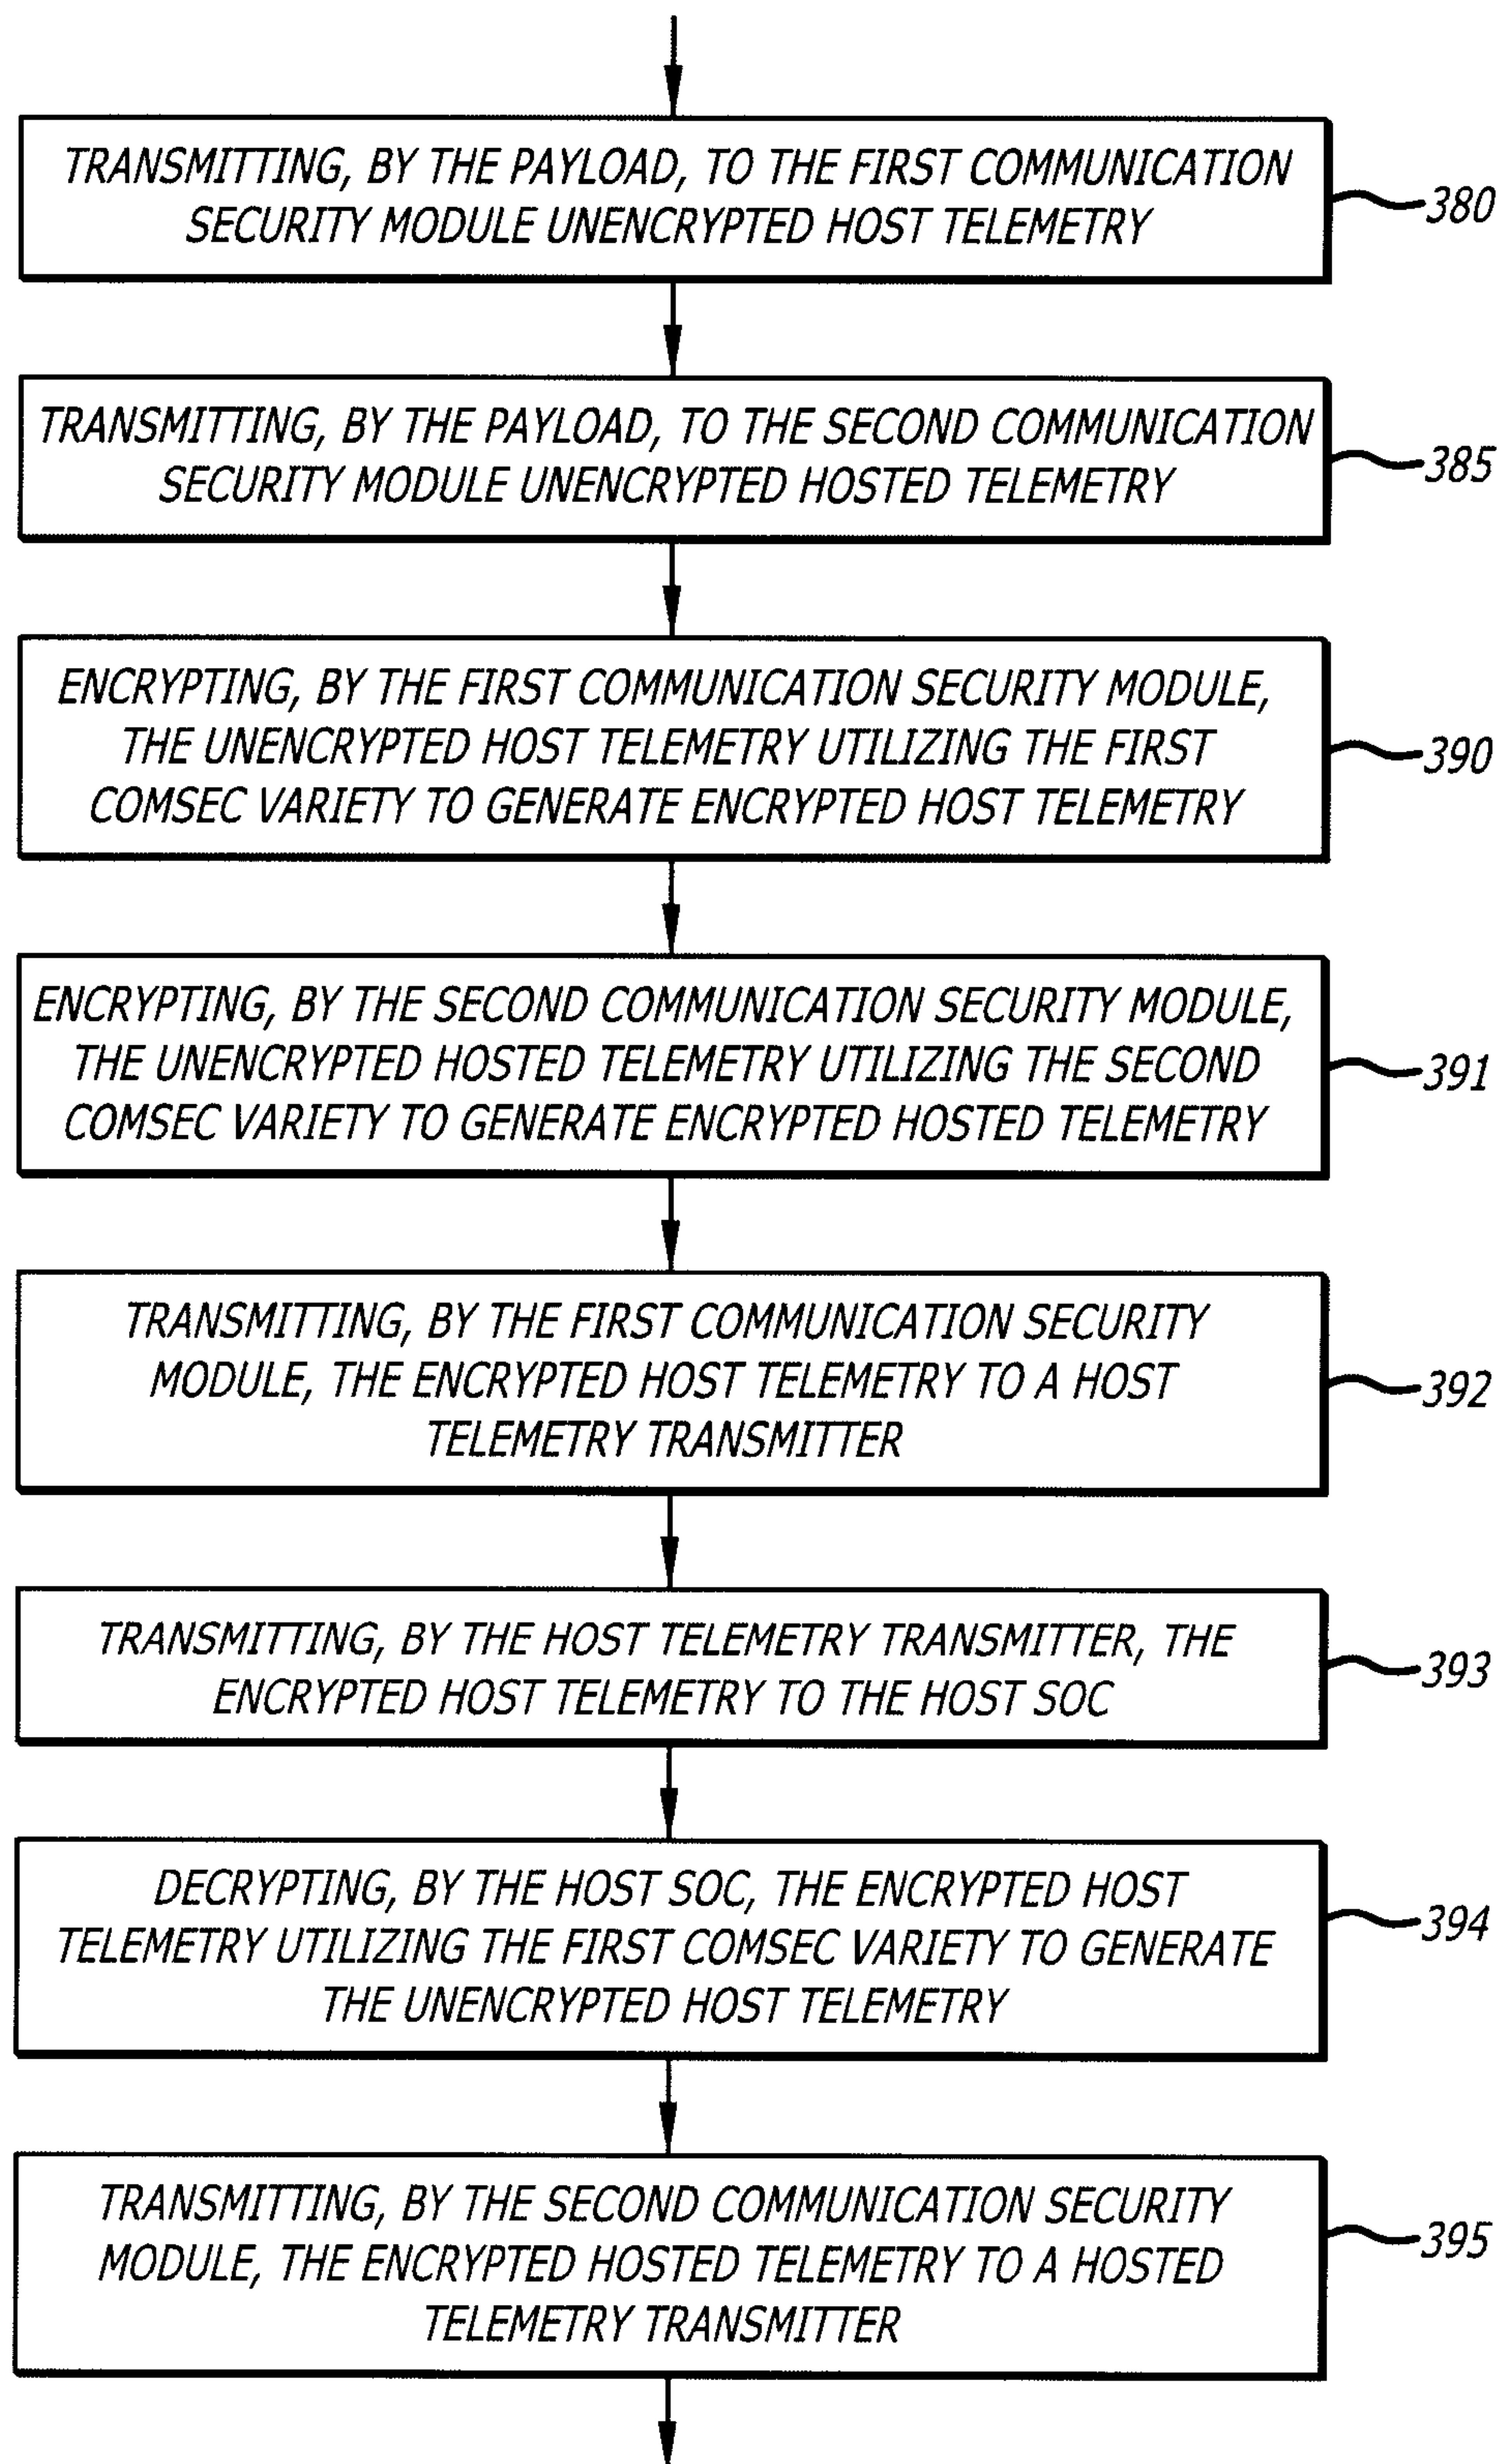


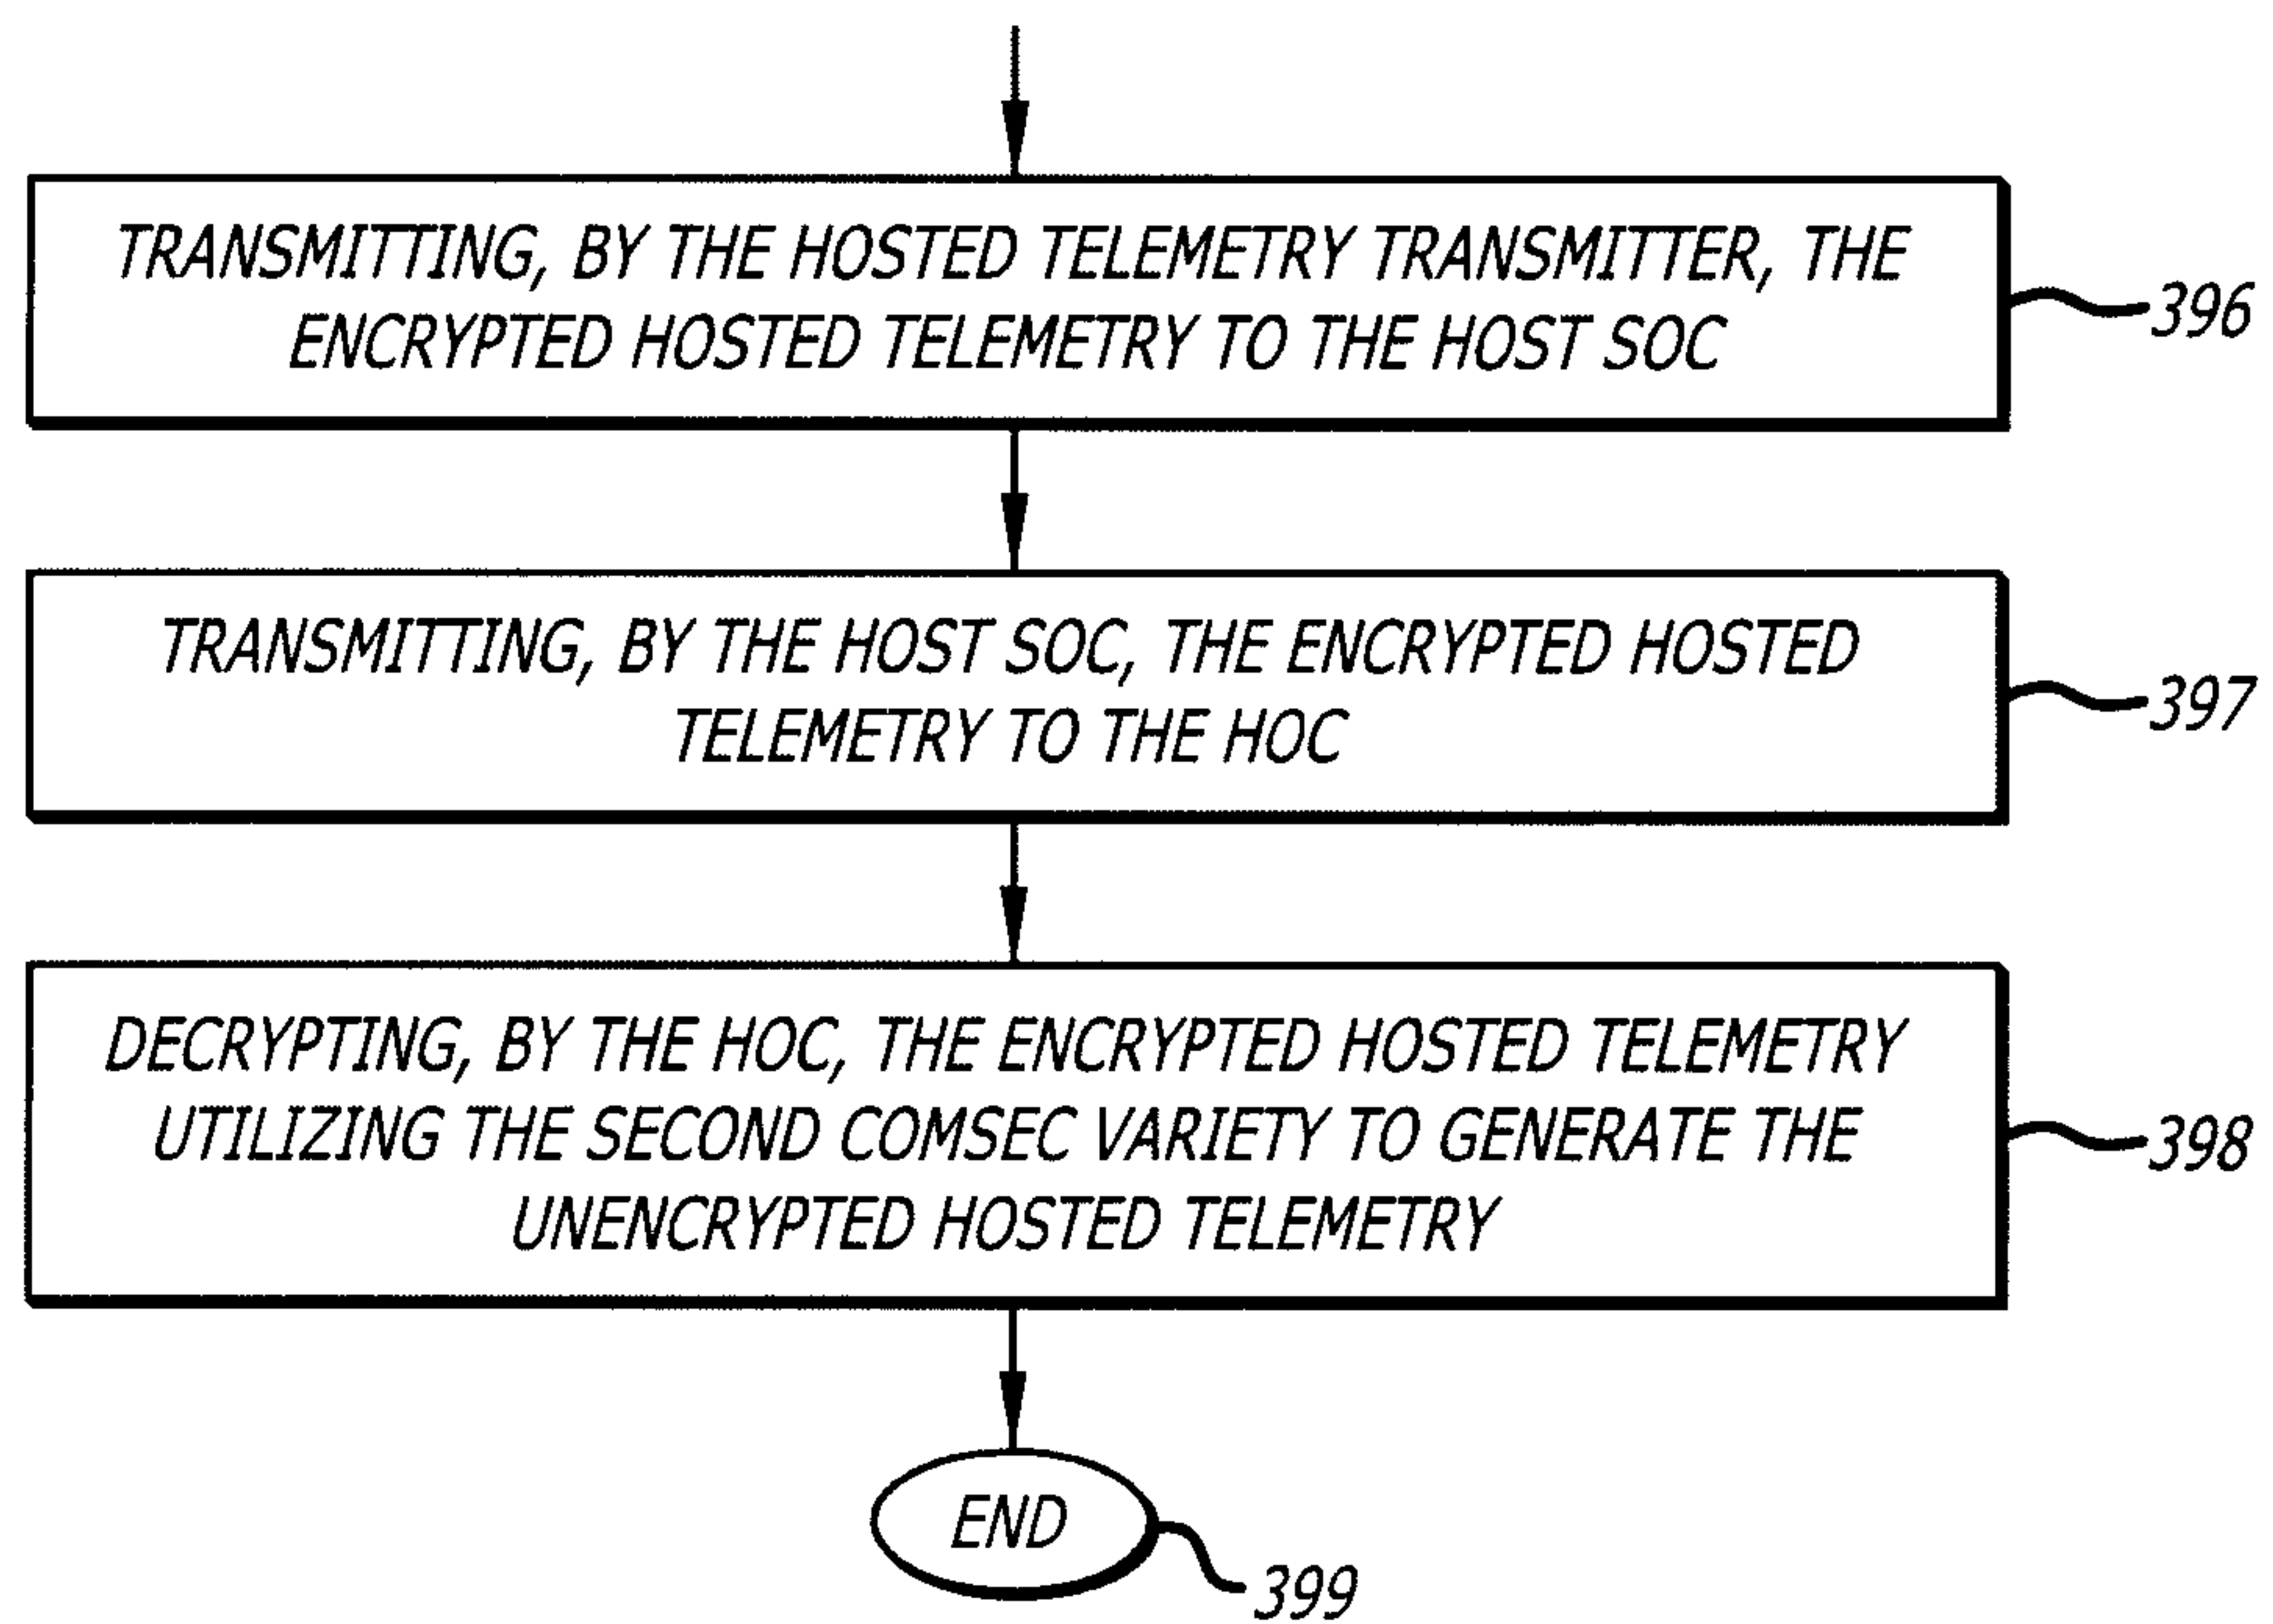
FIG. 3D

FIG. 3E

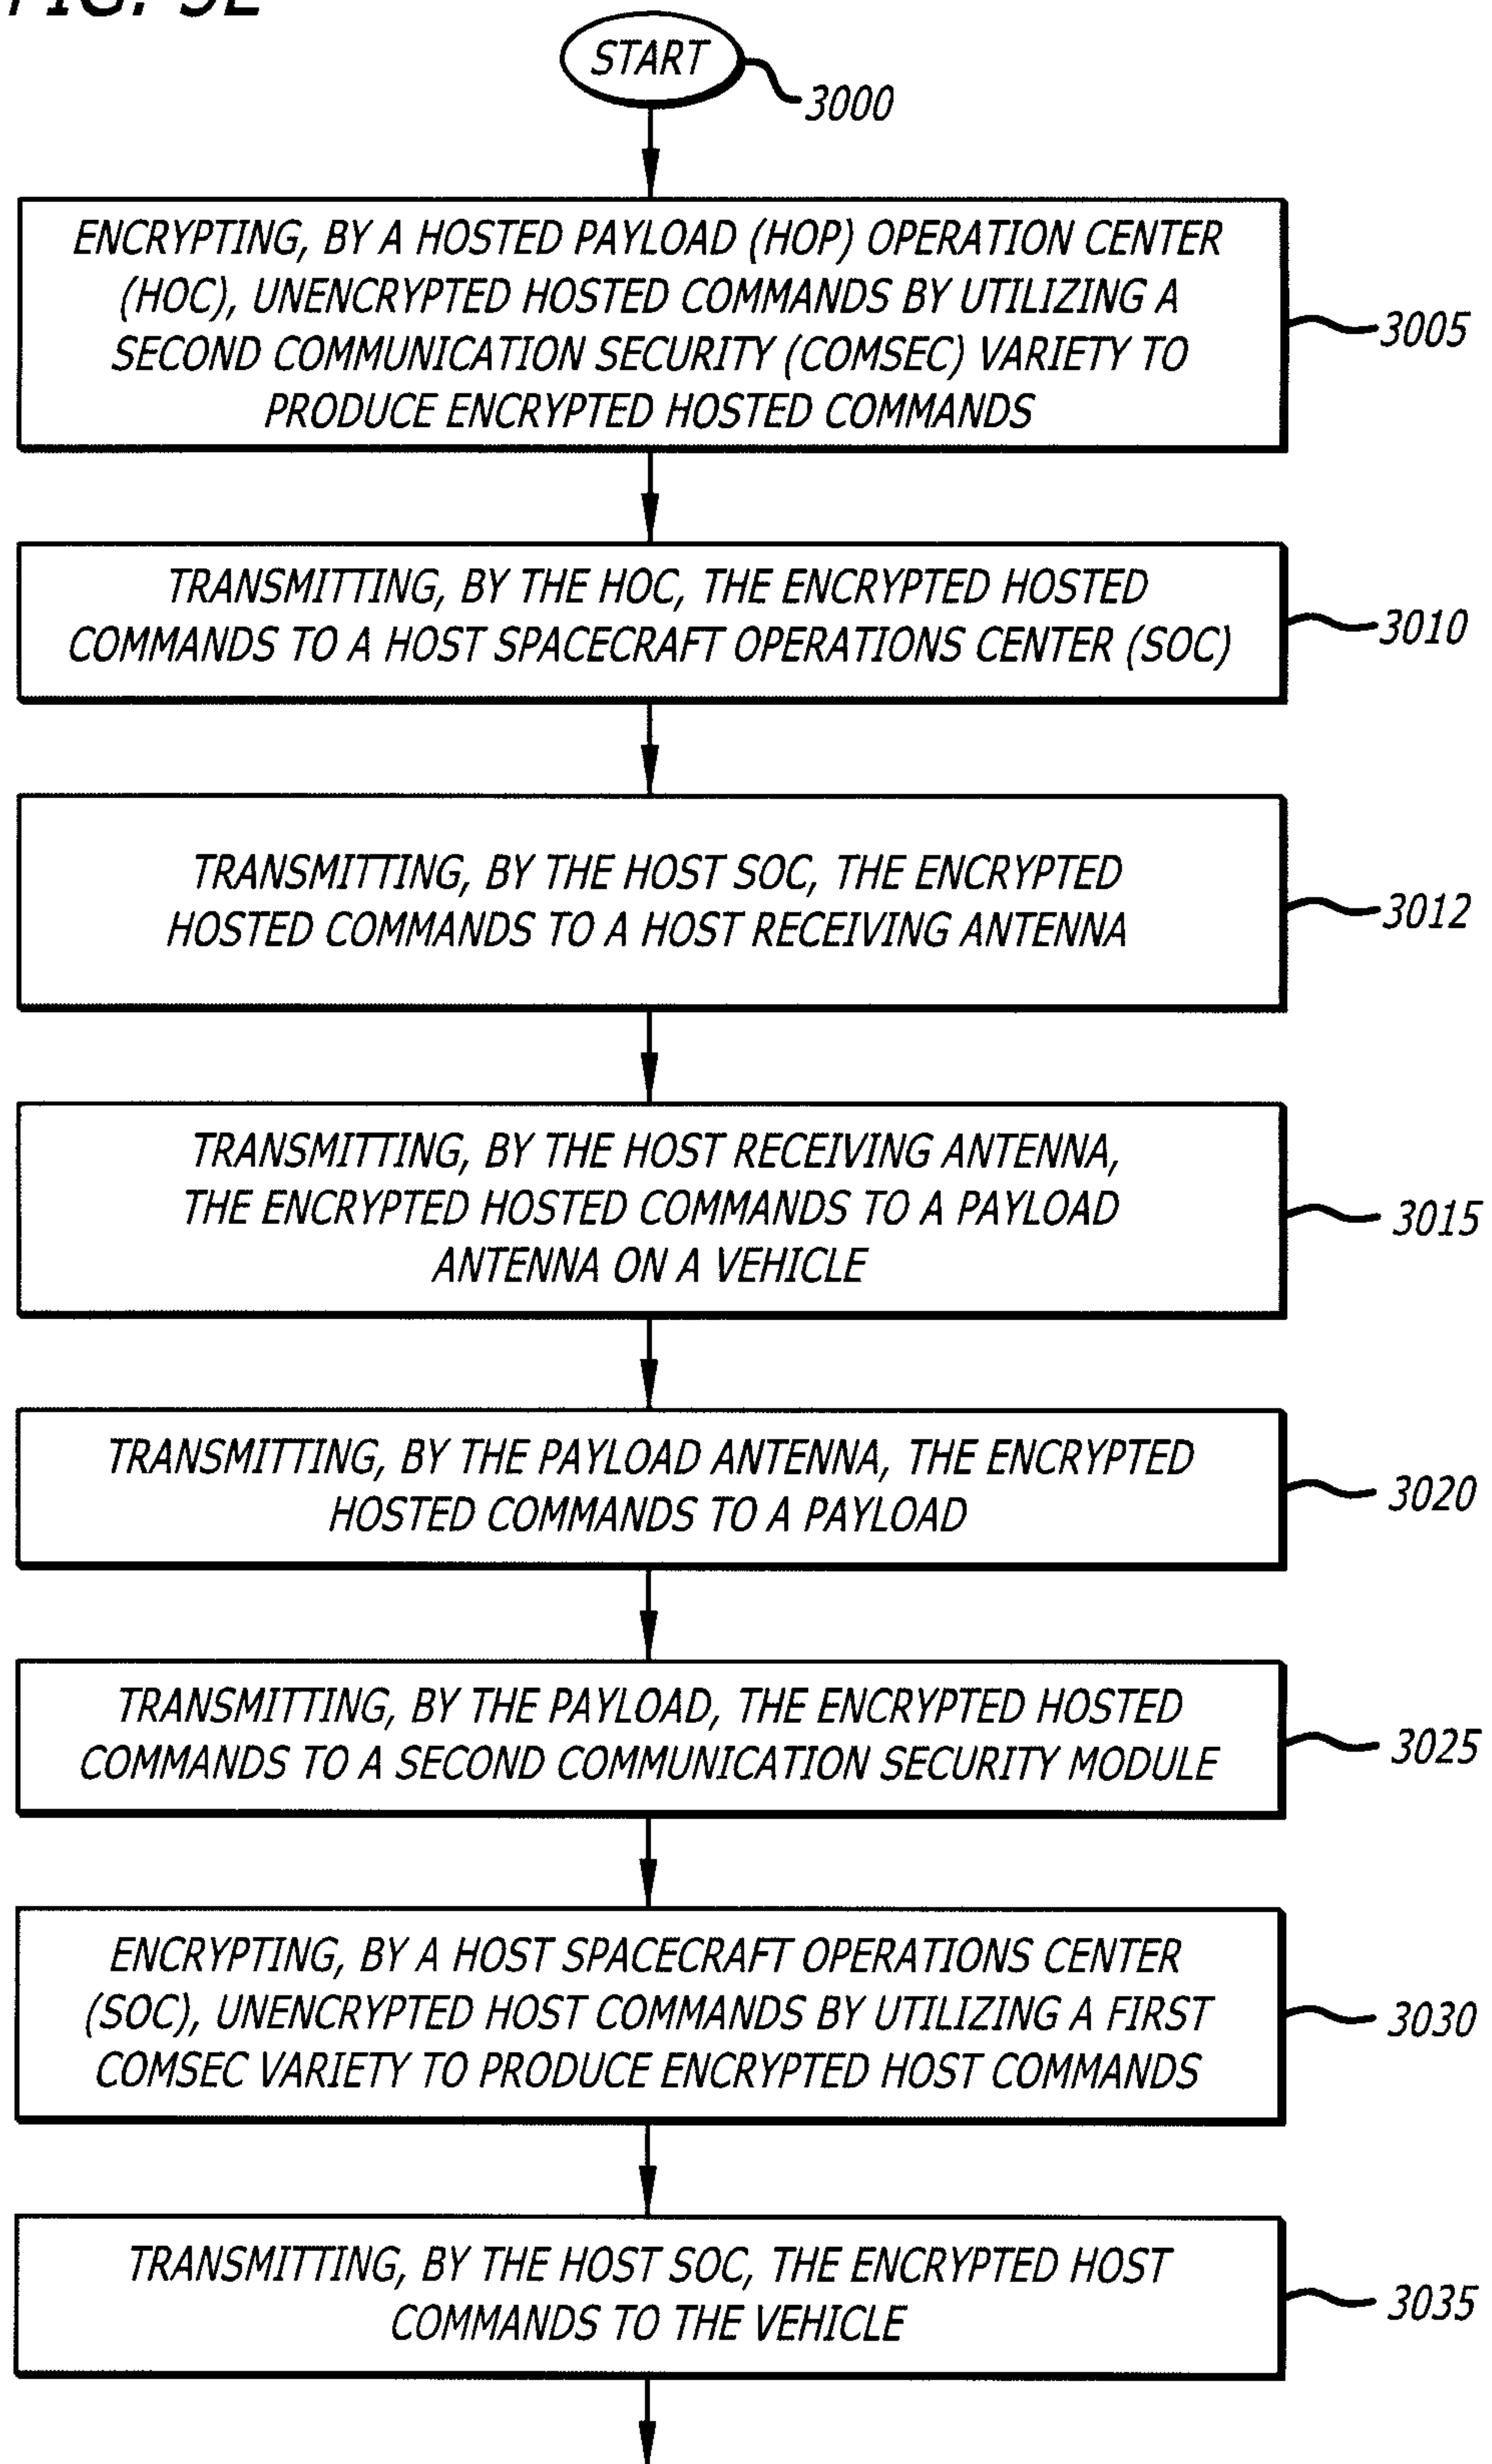


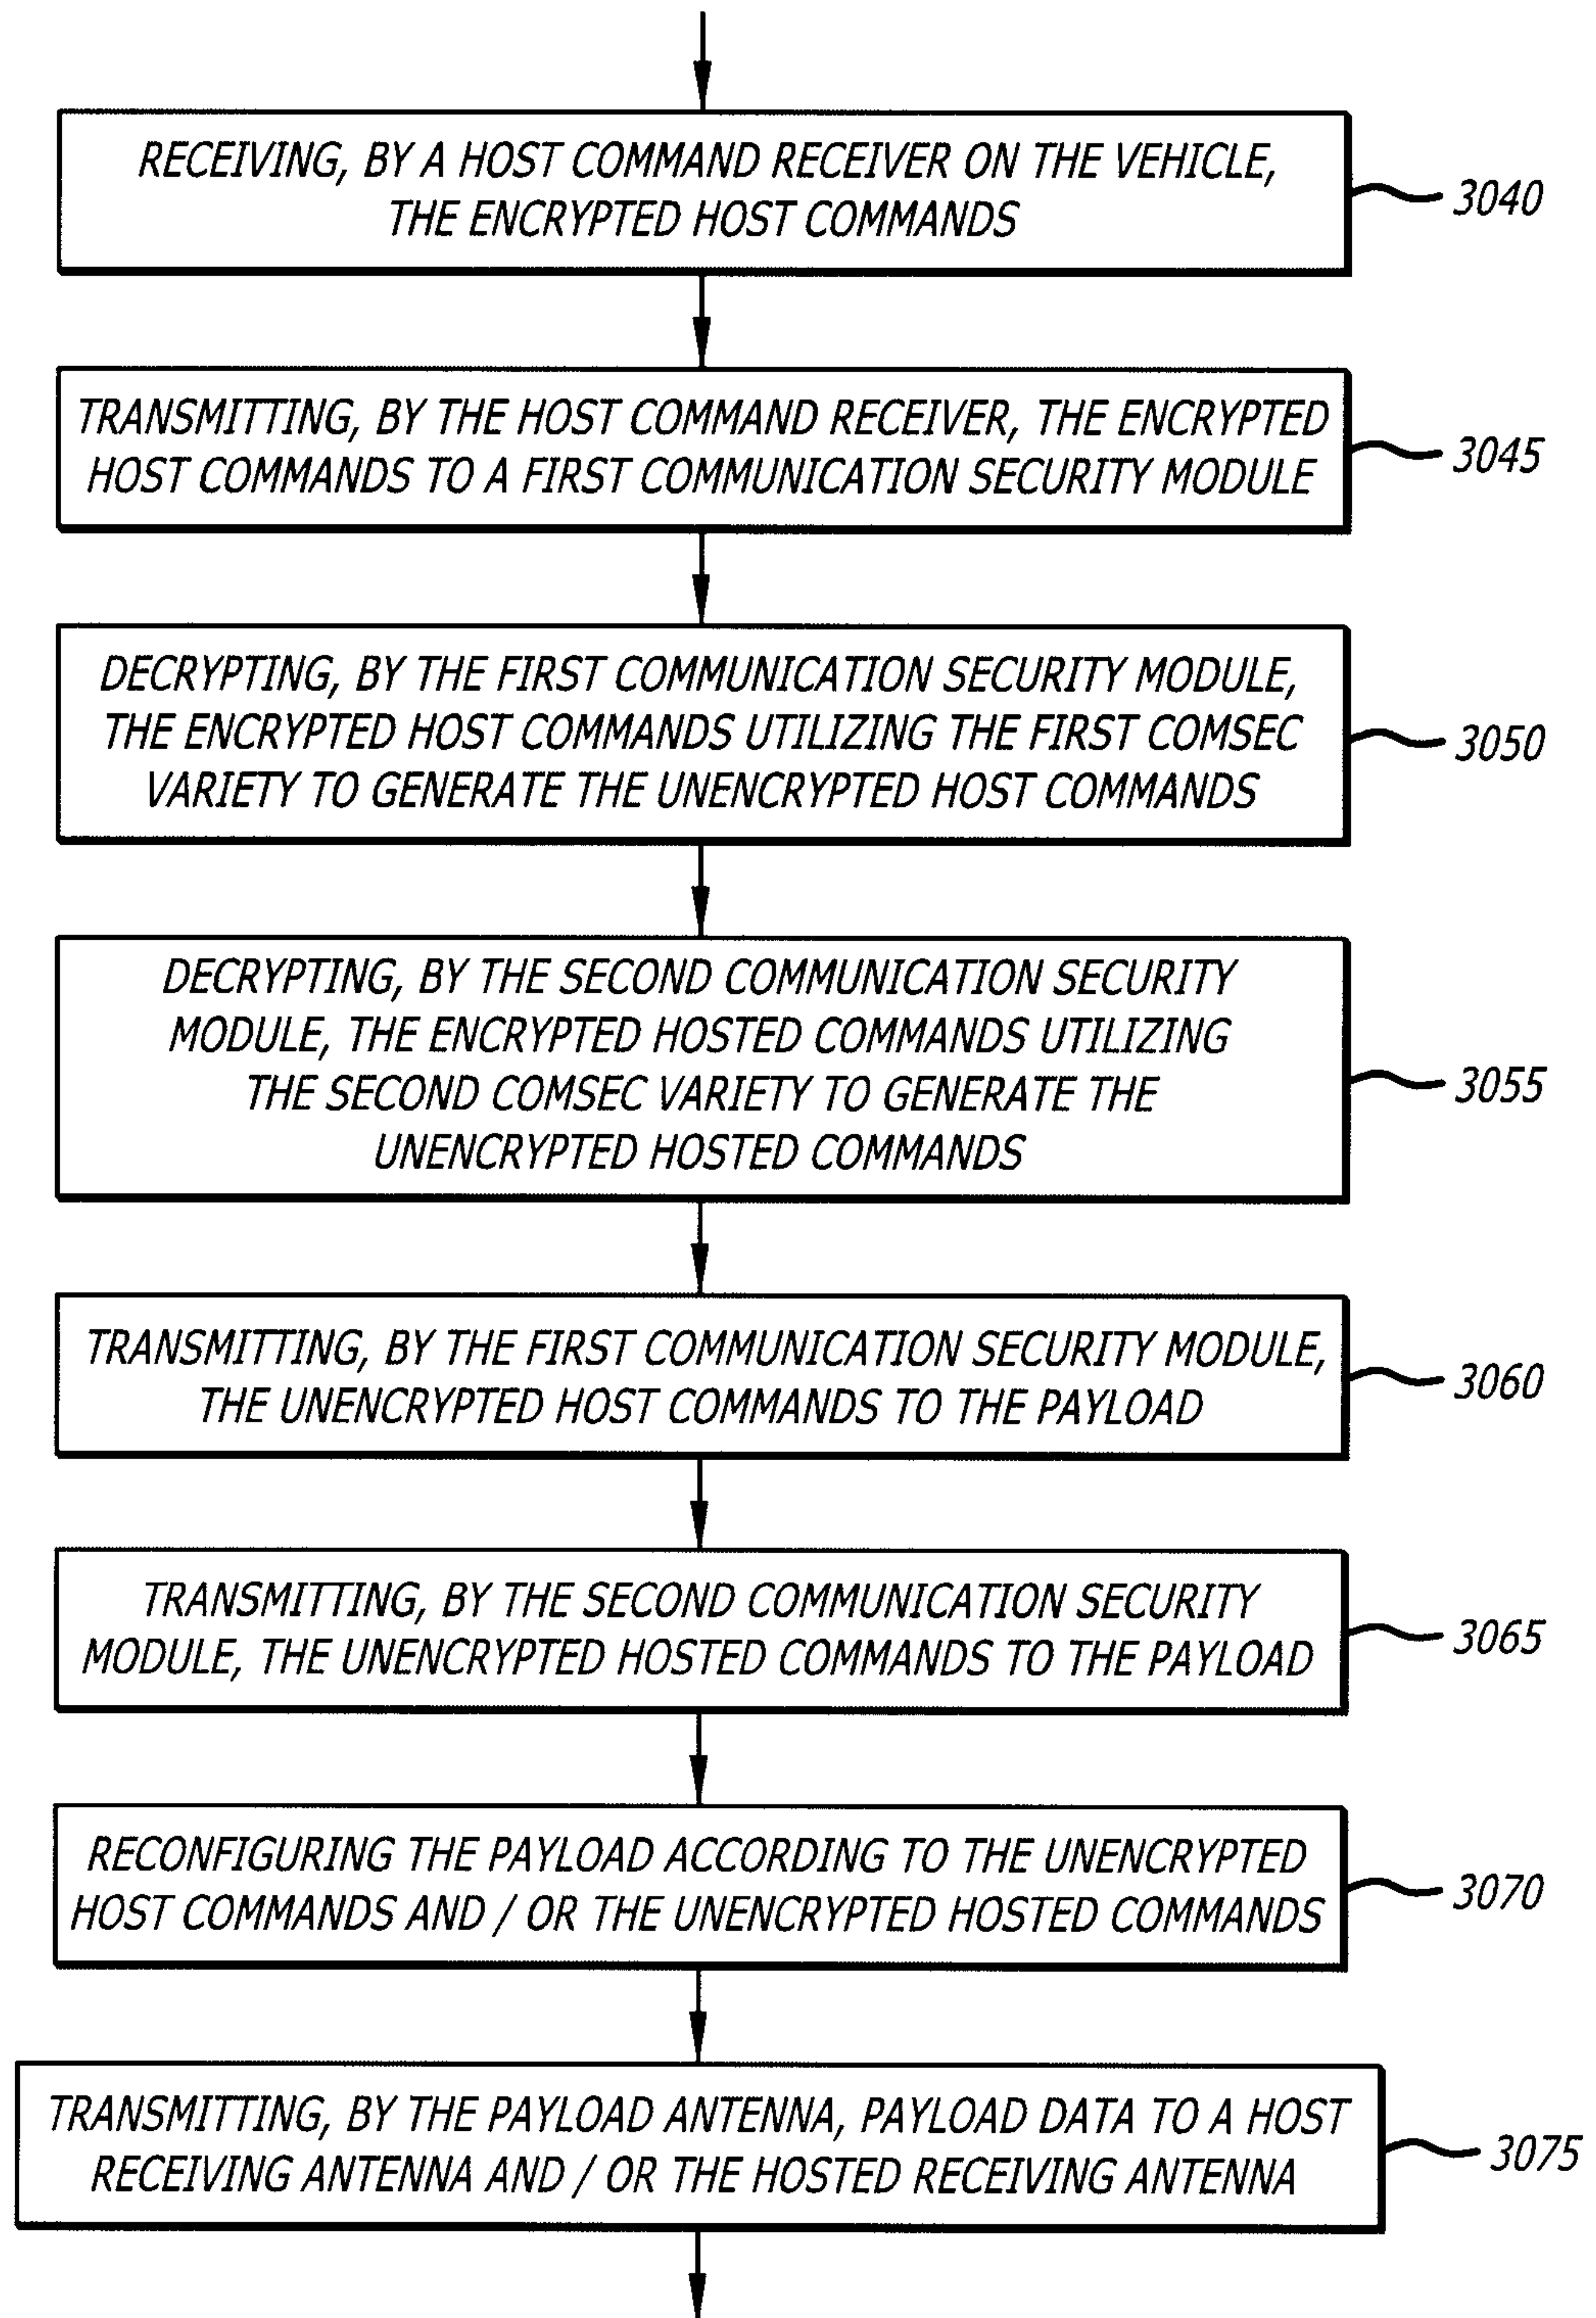
FIG. 3F

FIG. 3G

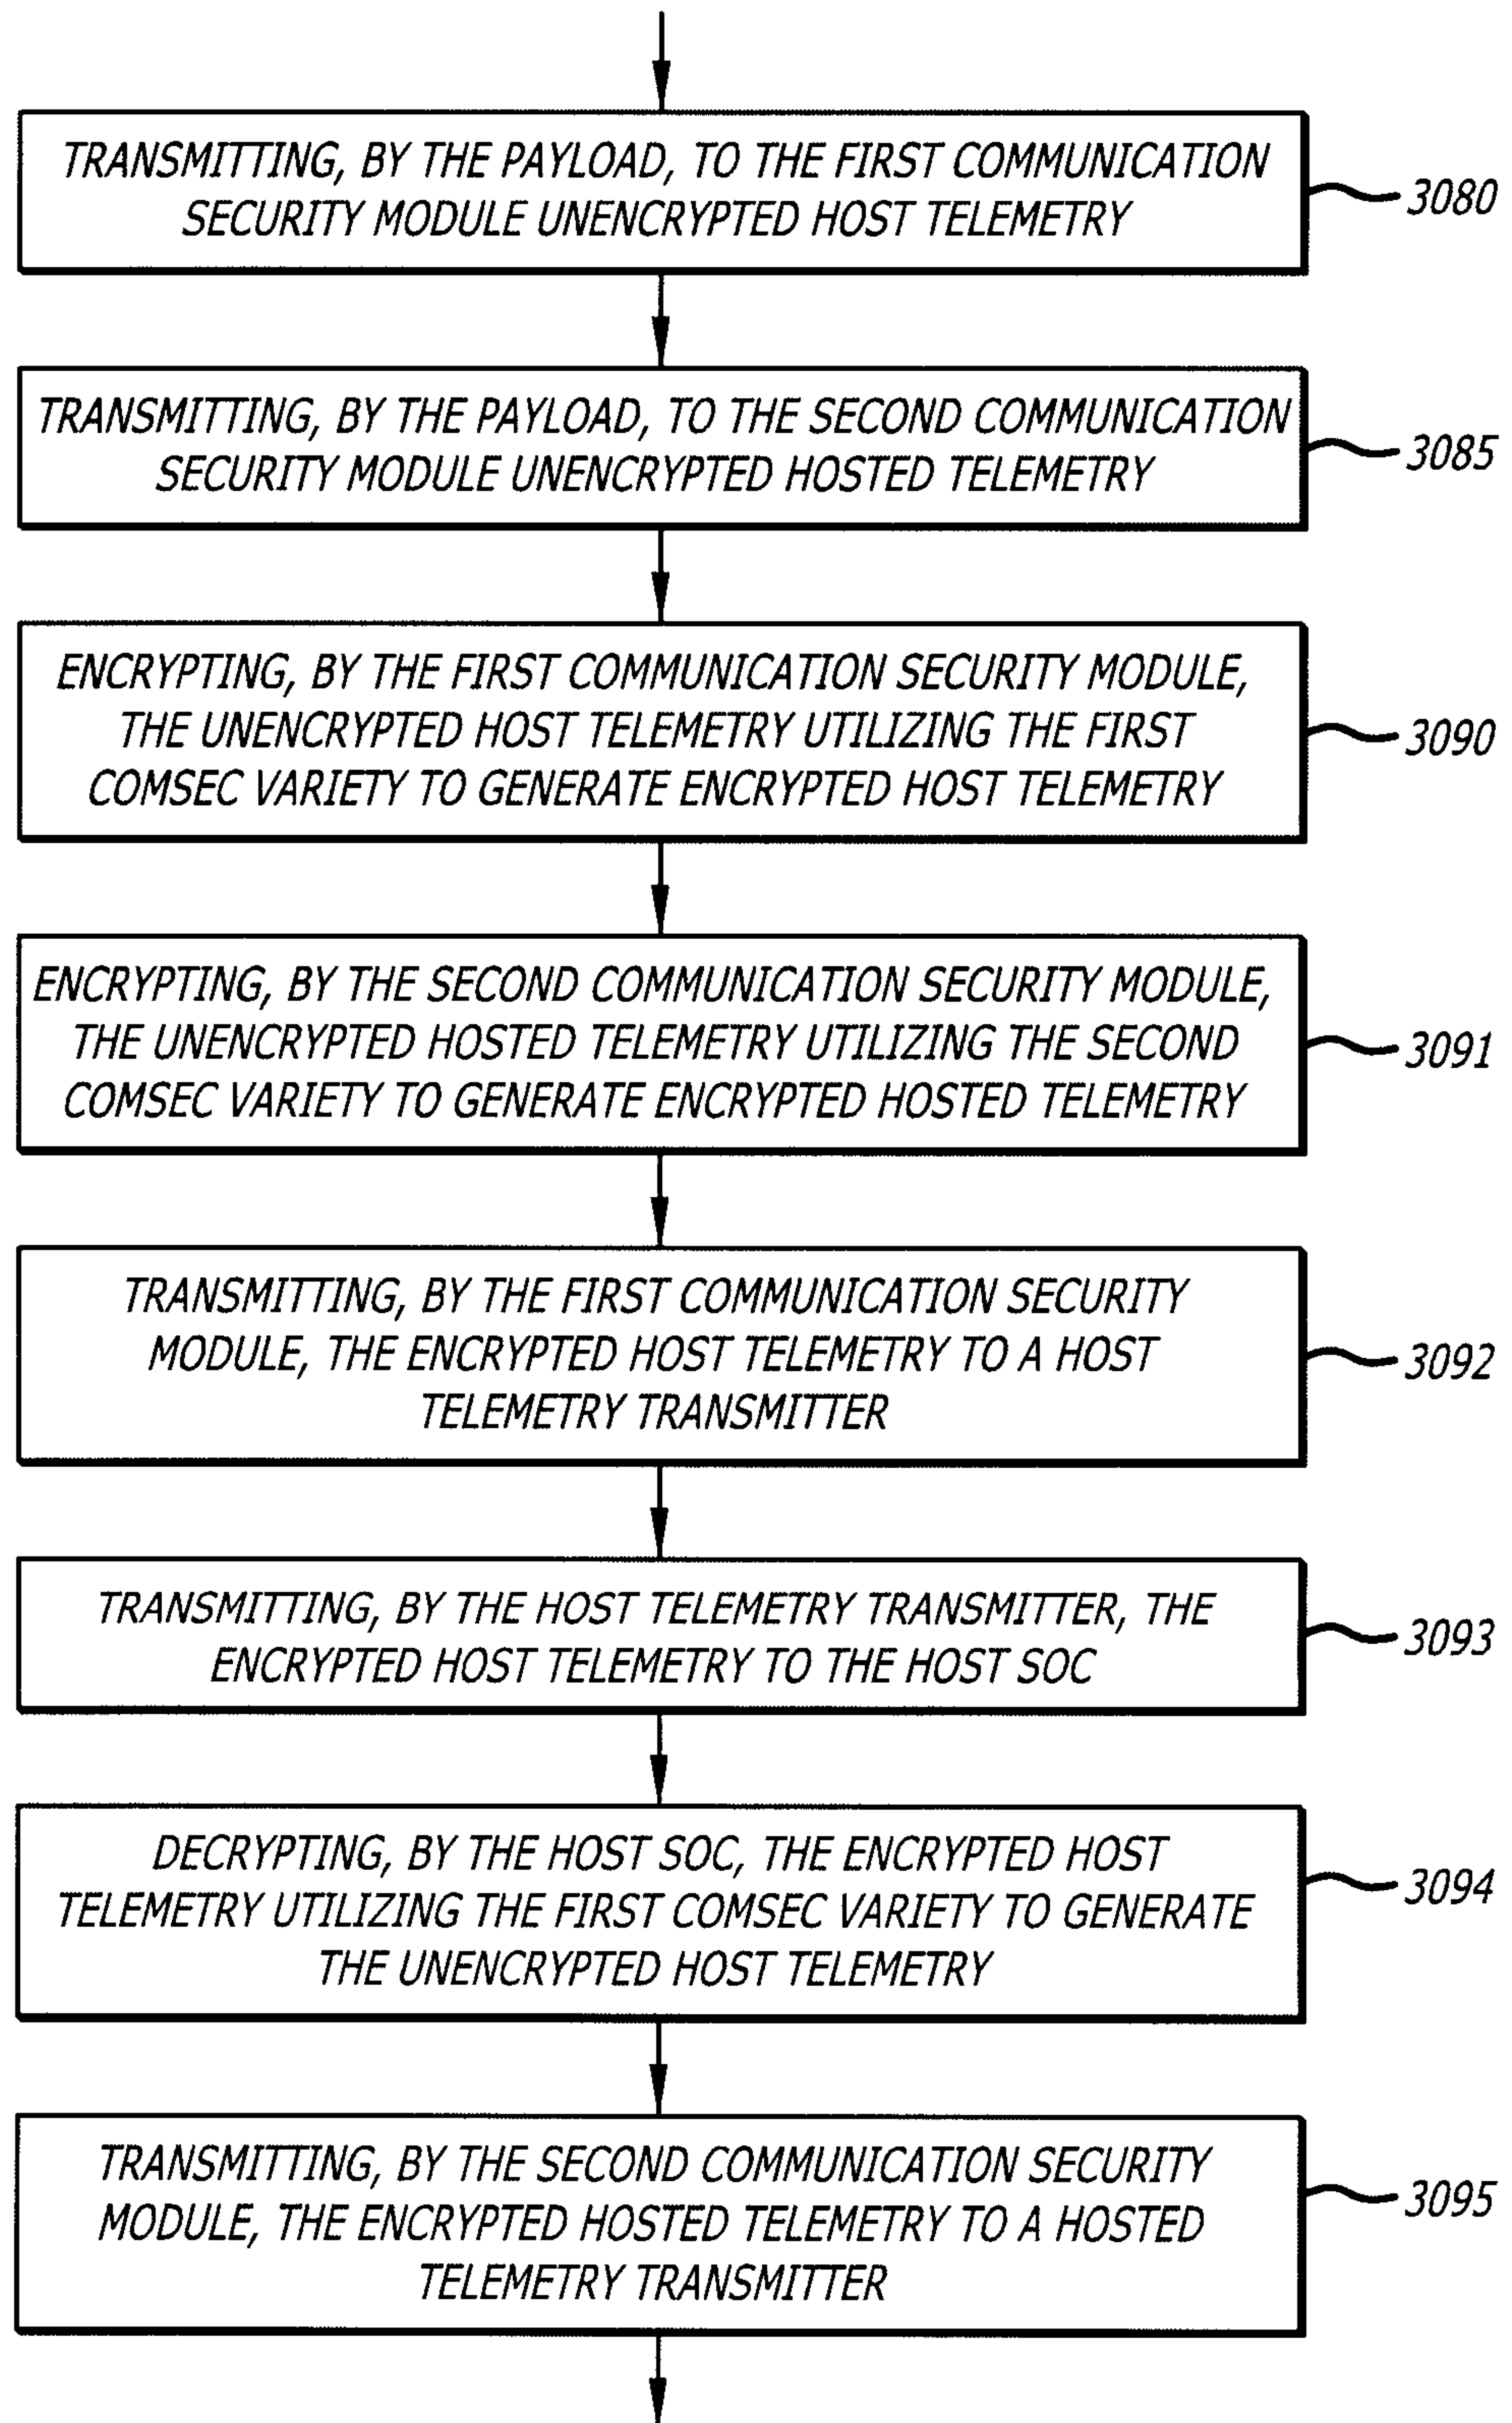
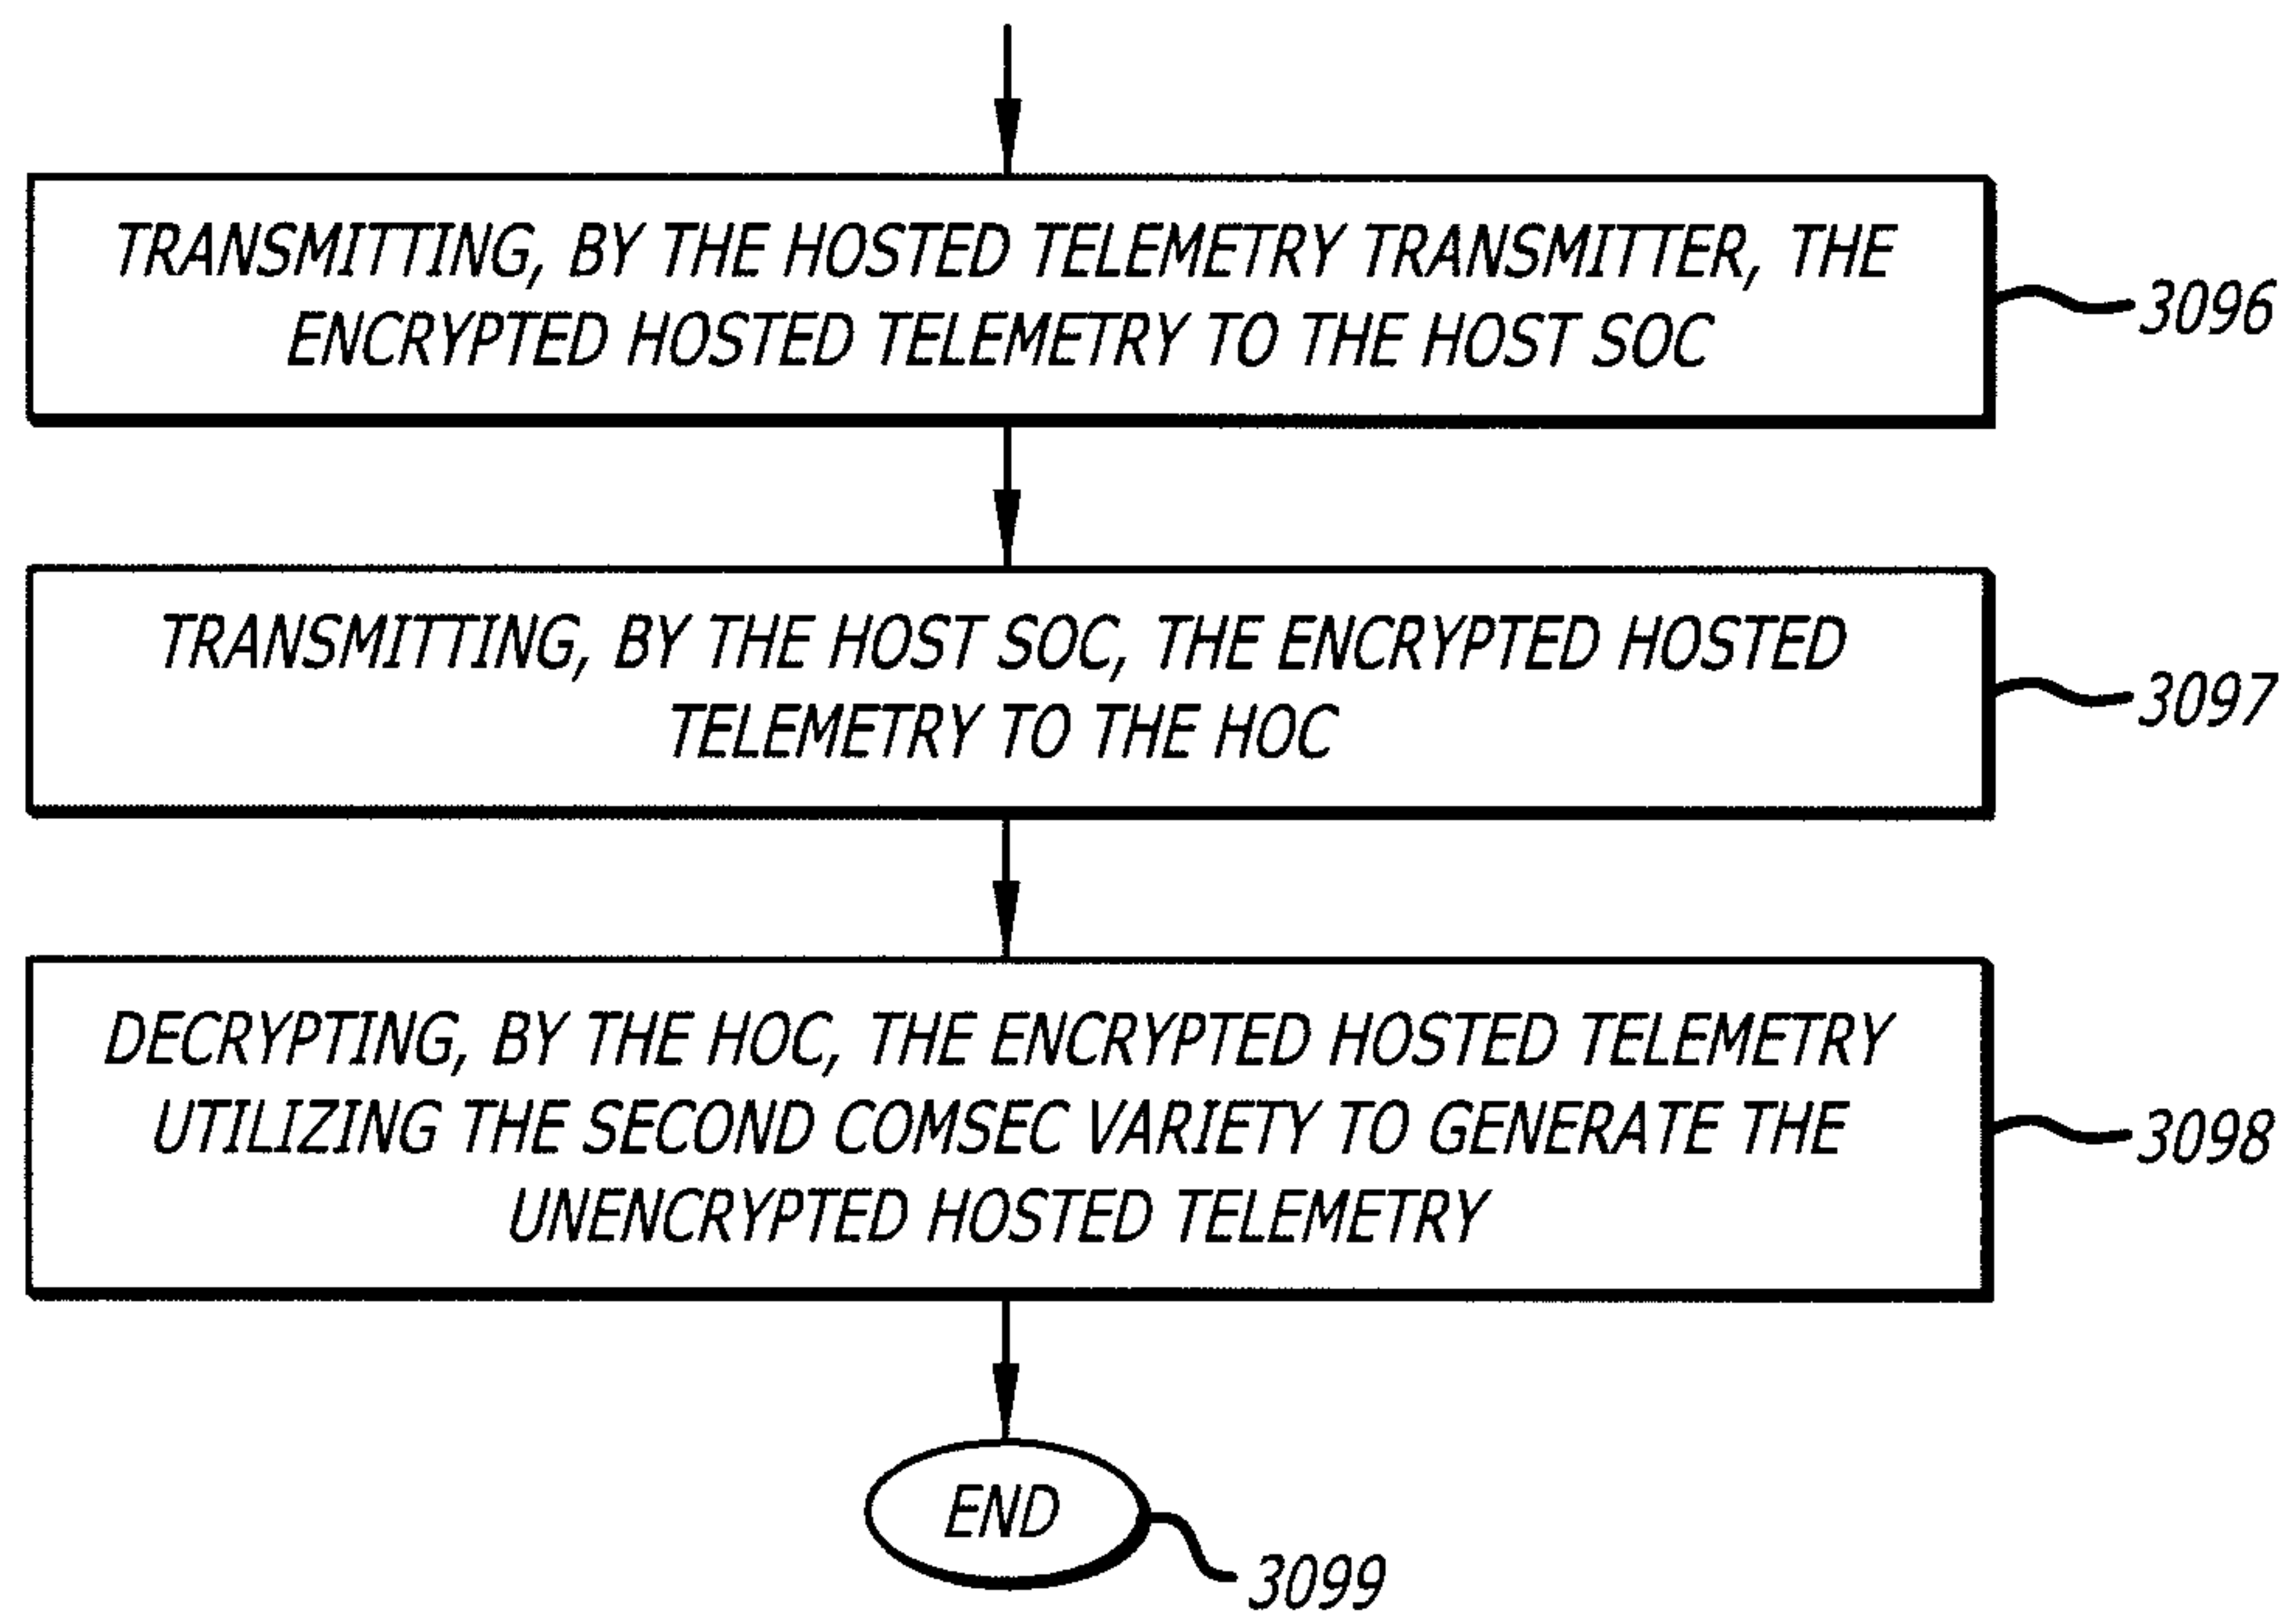


FIG. 3H

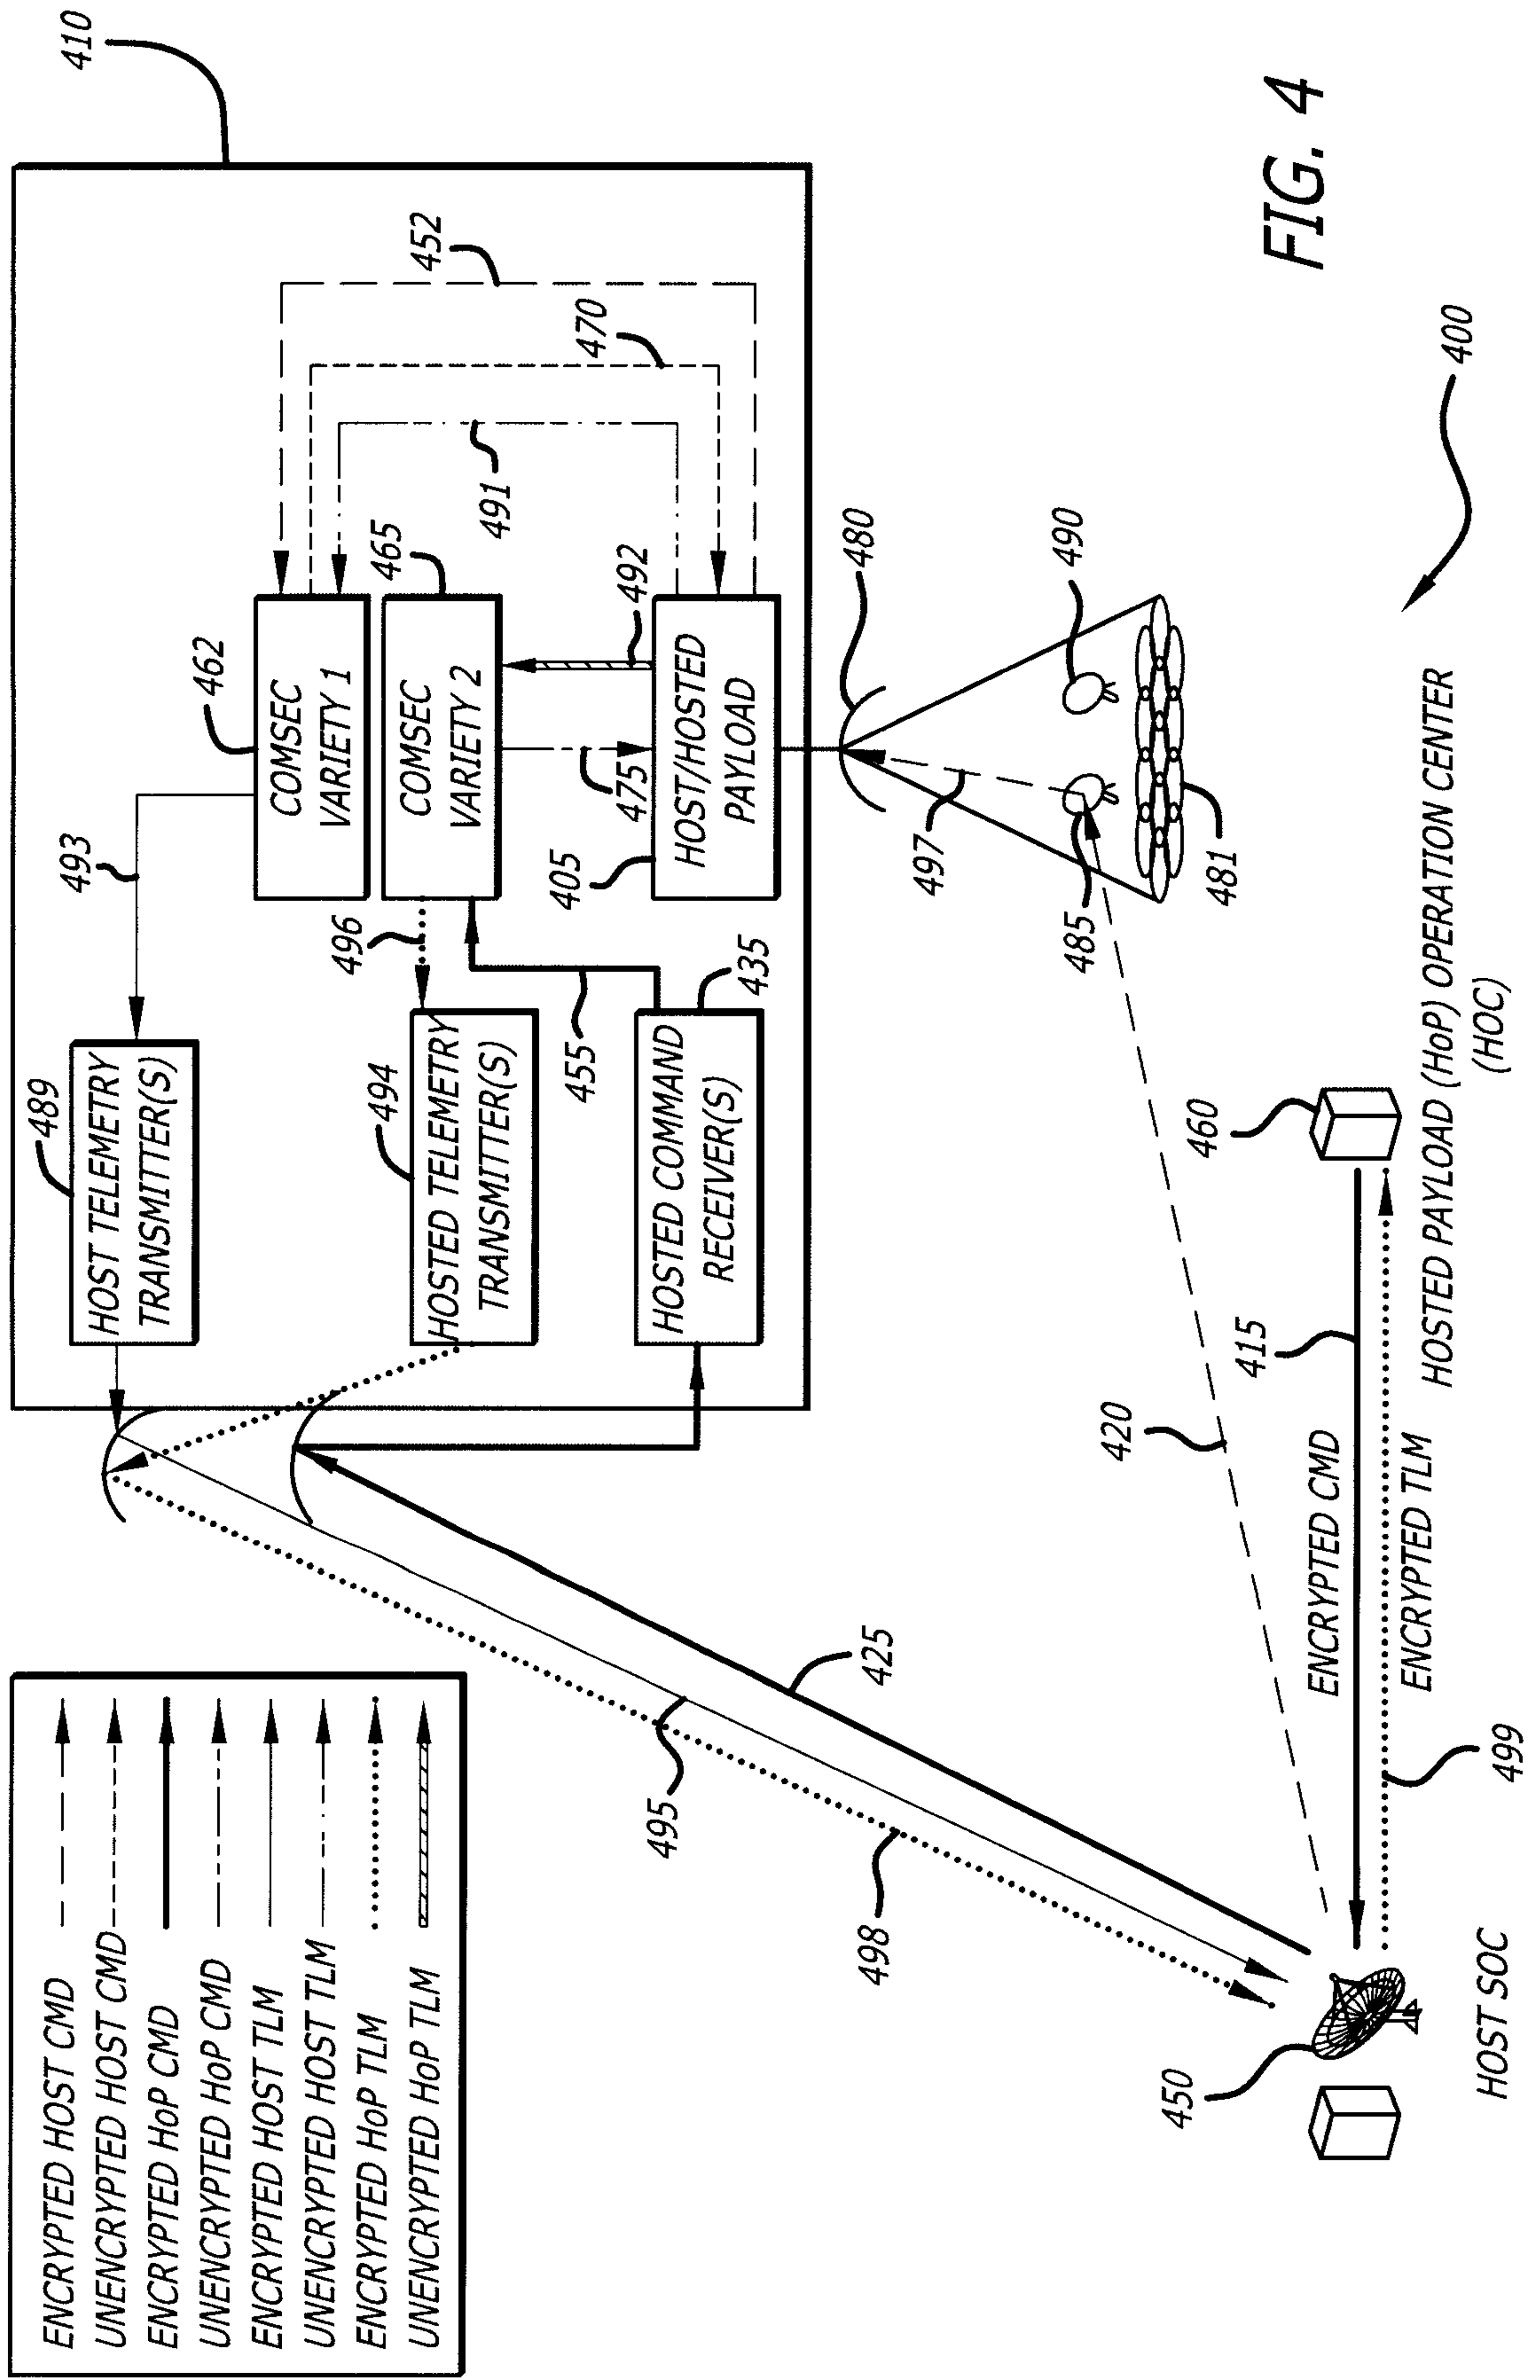


FIG. 4

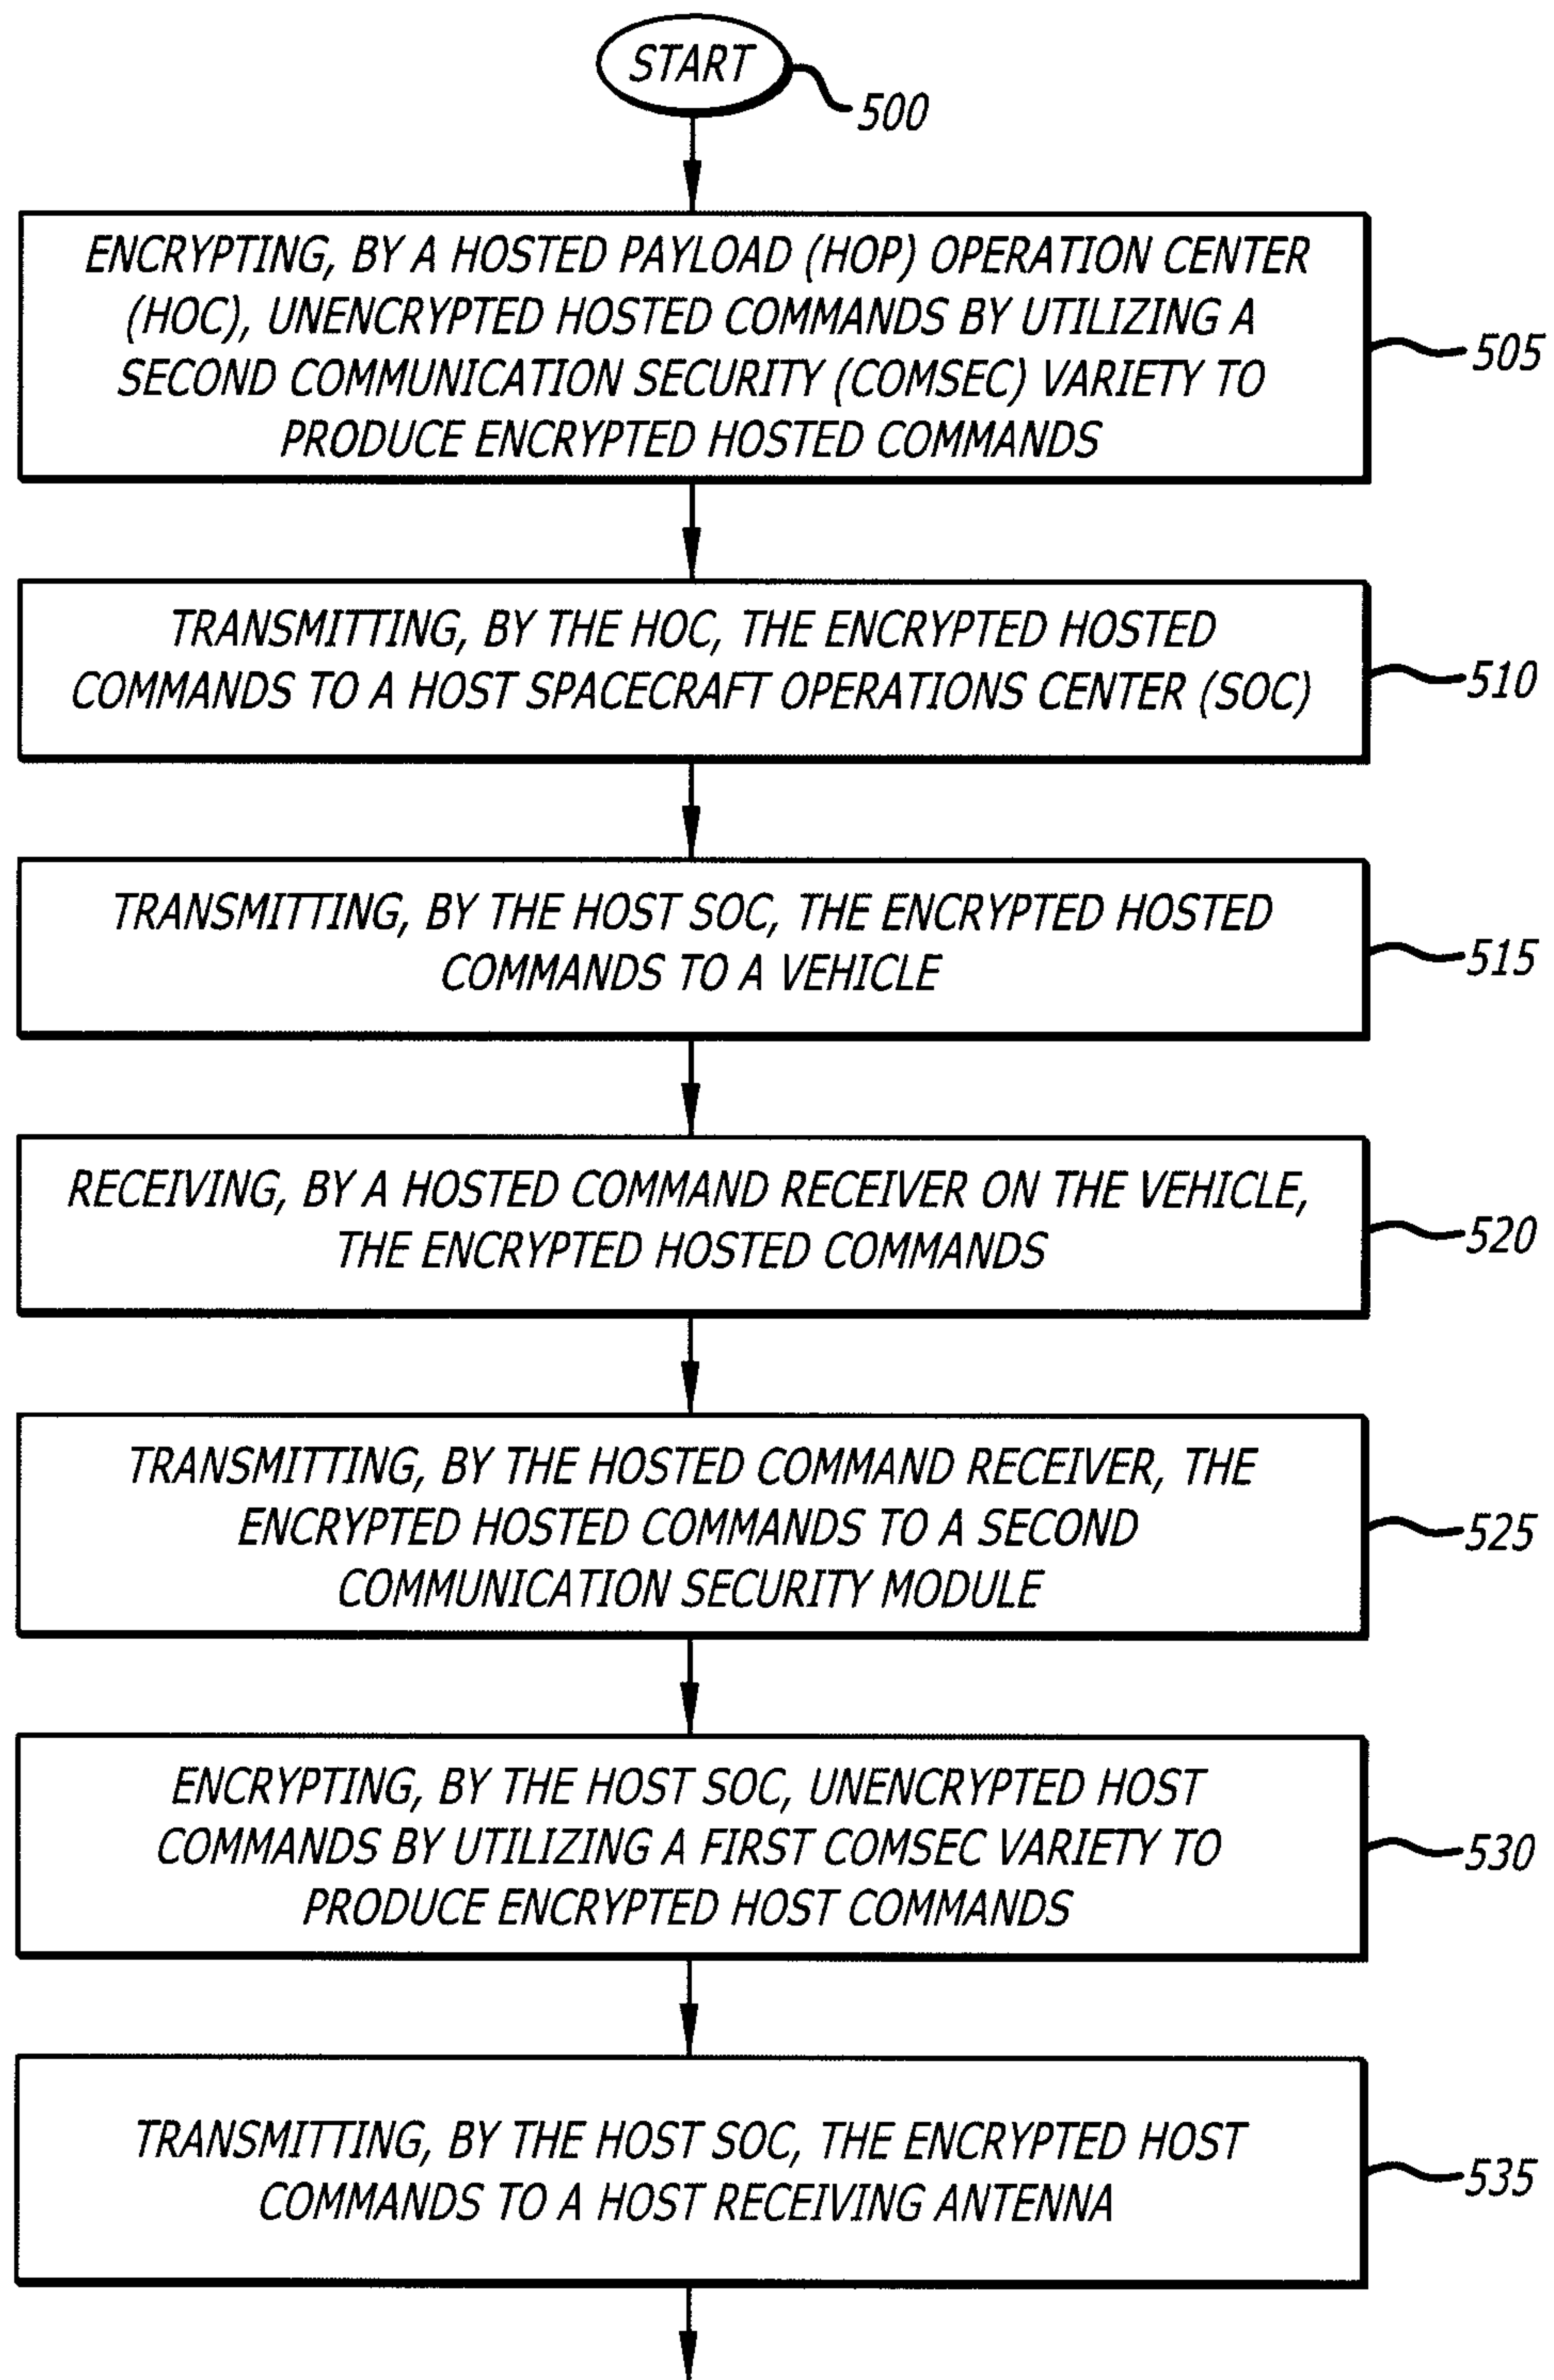
FIG. 5A

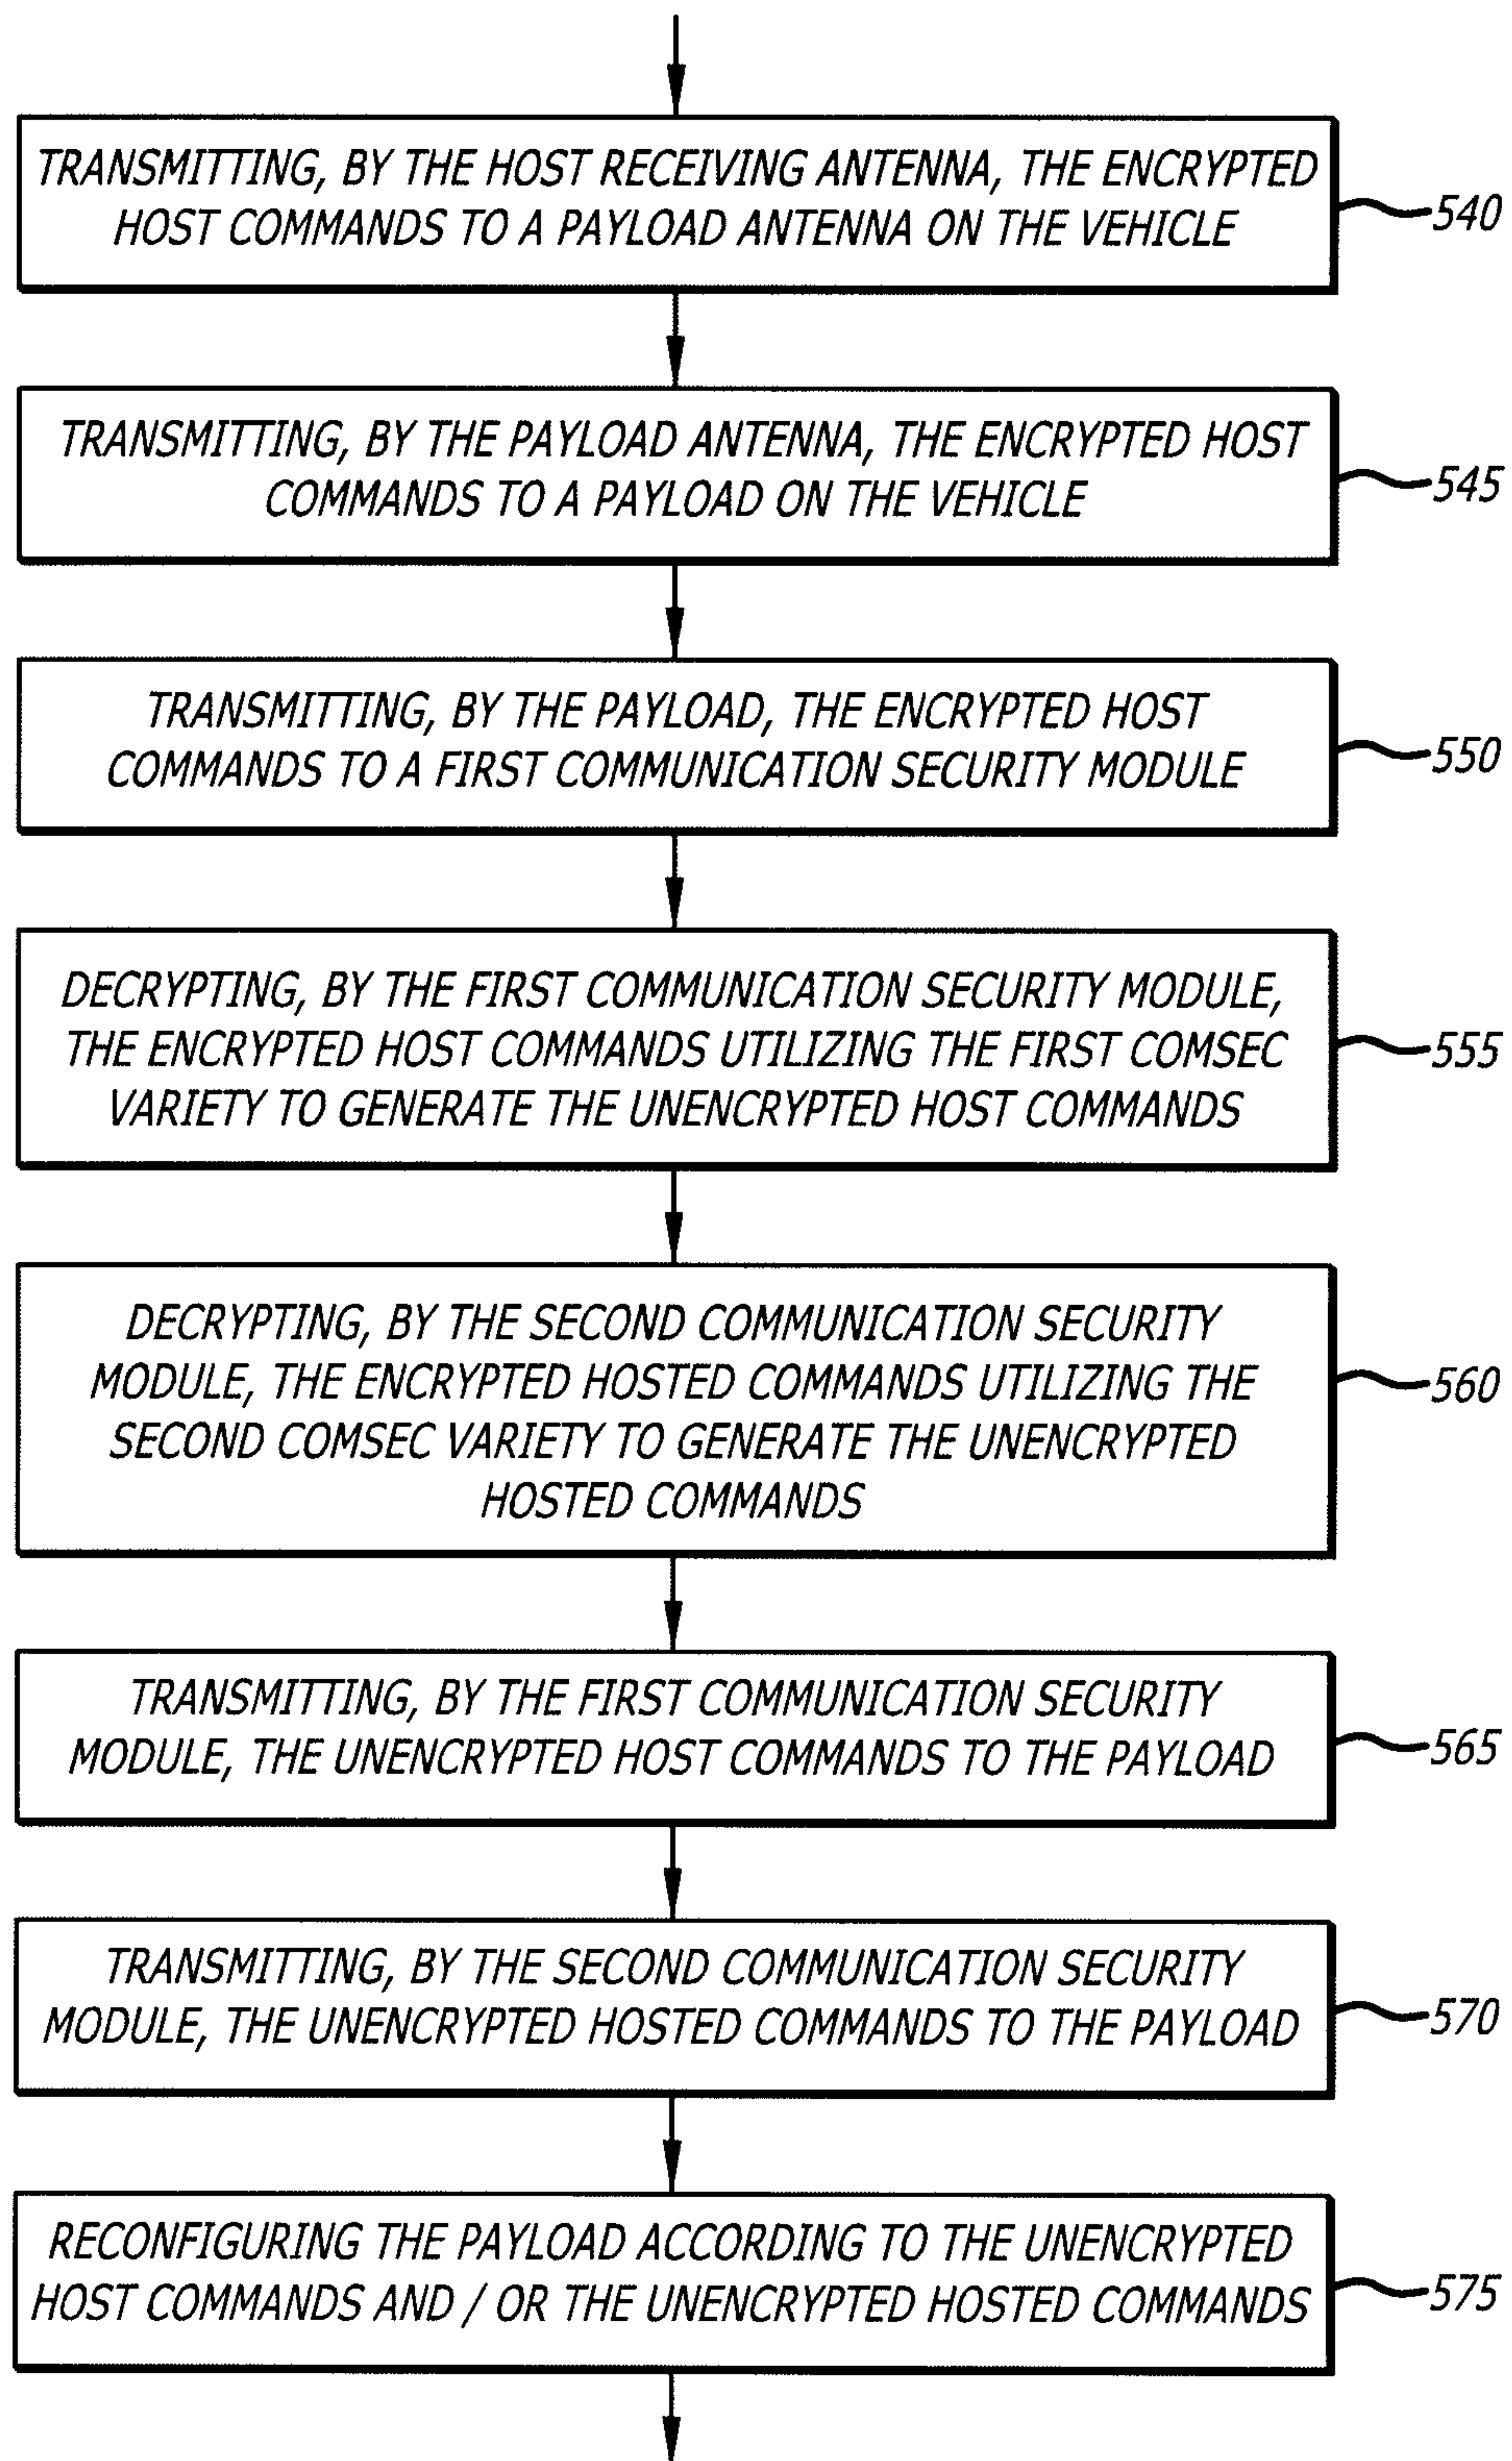
FIG. 5B

FIG. 5C

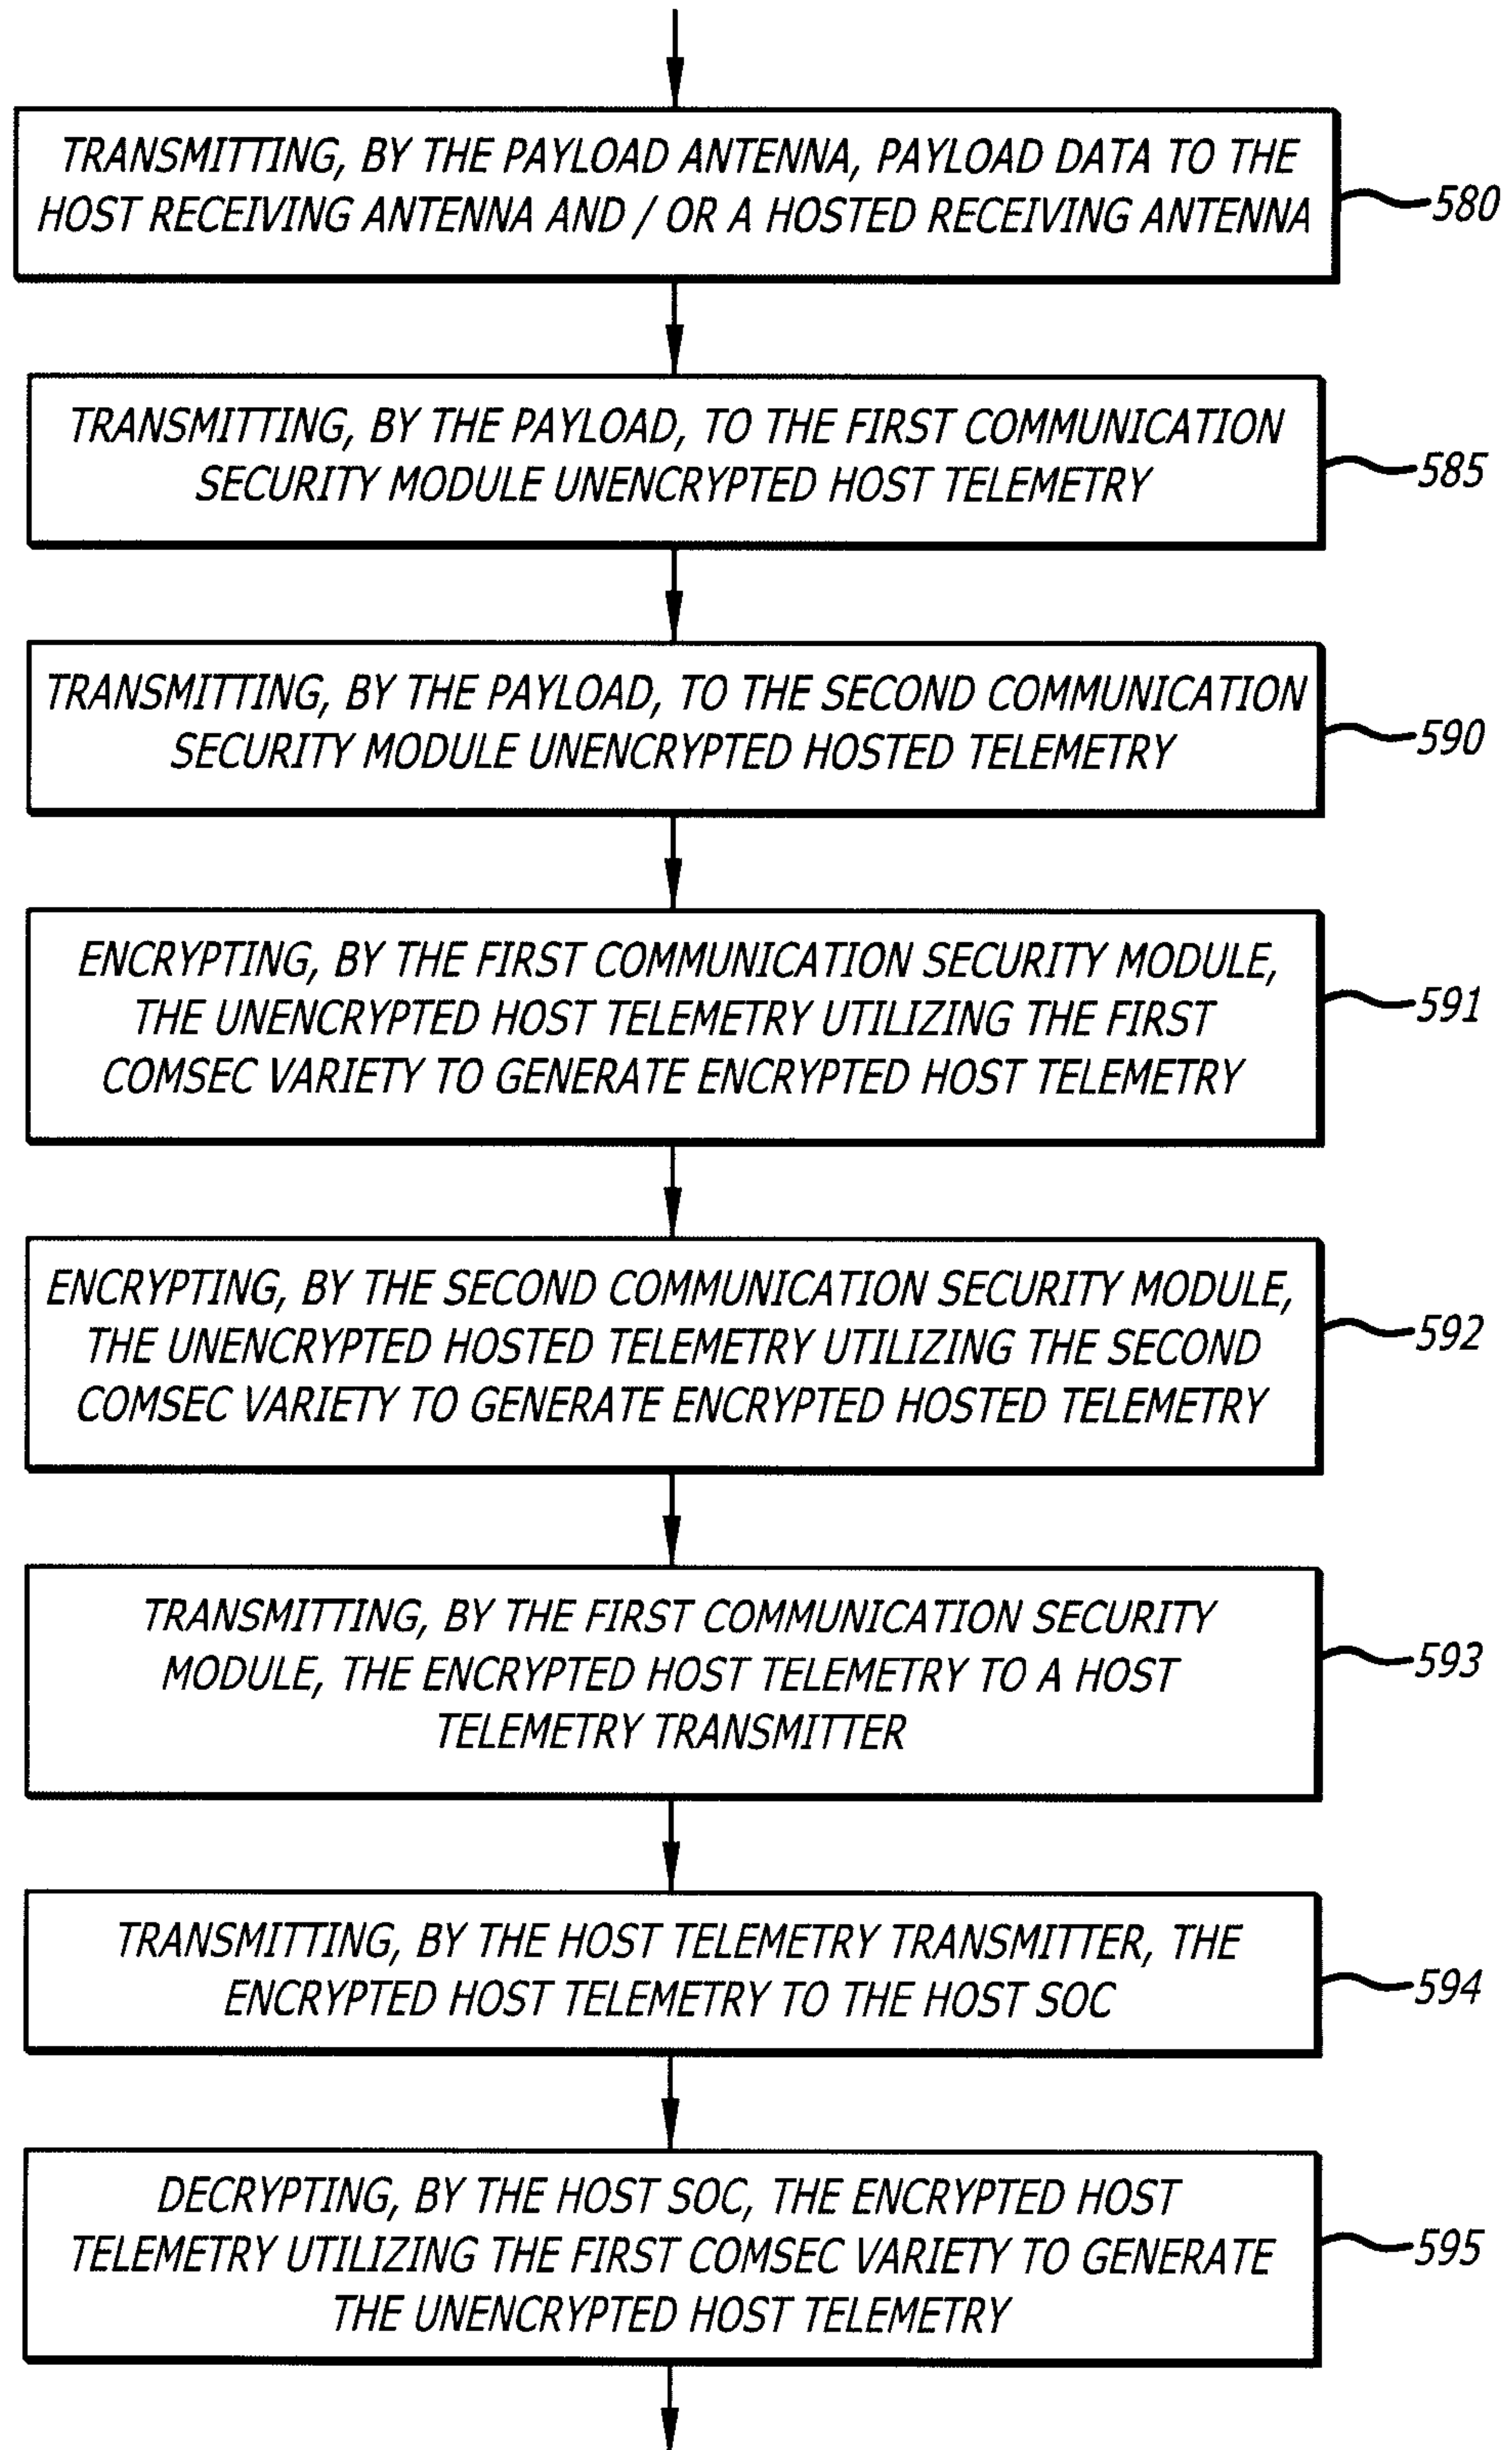
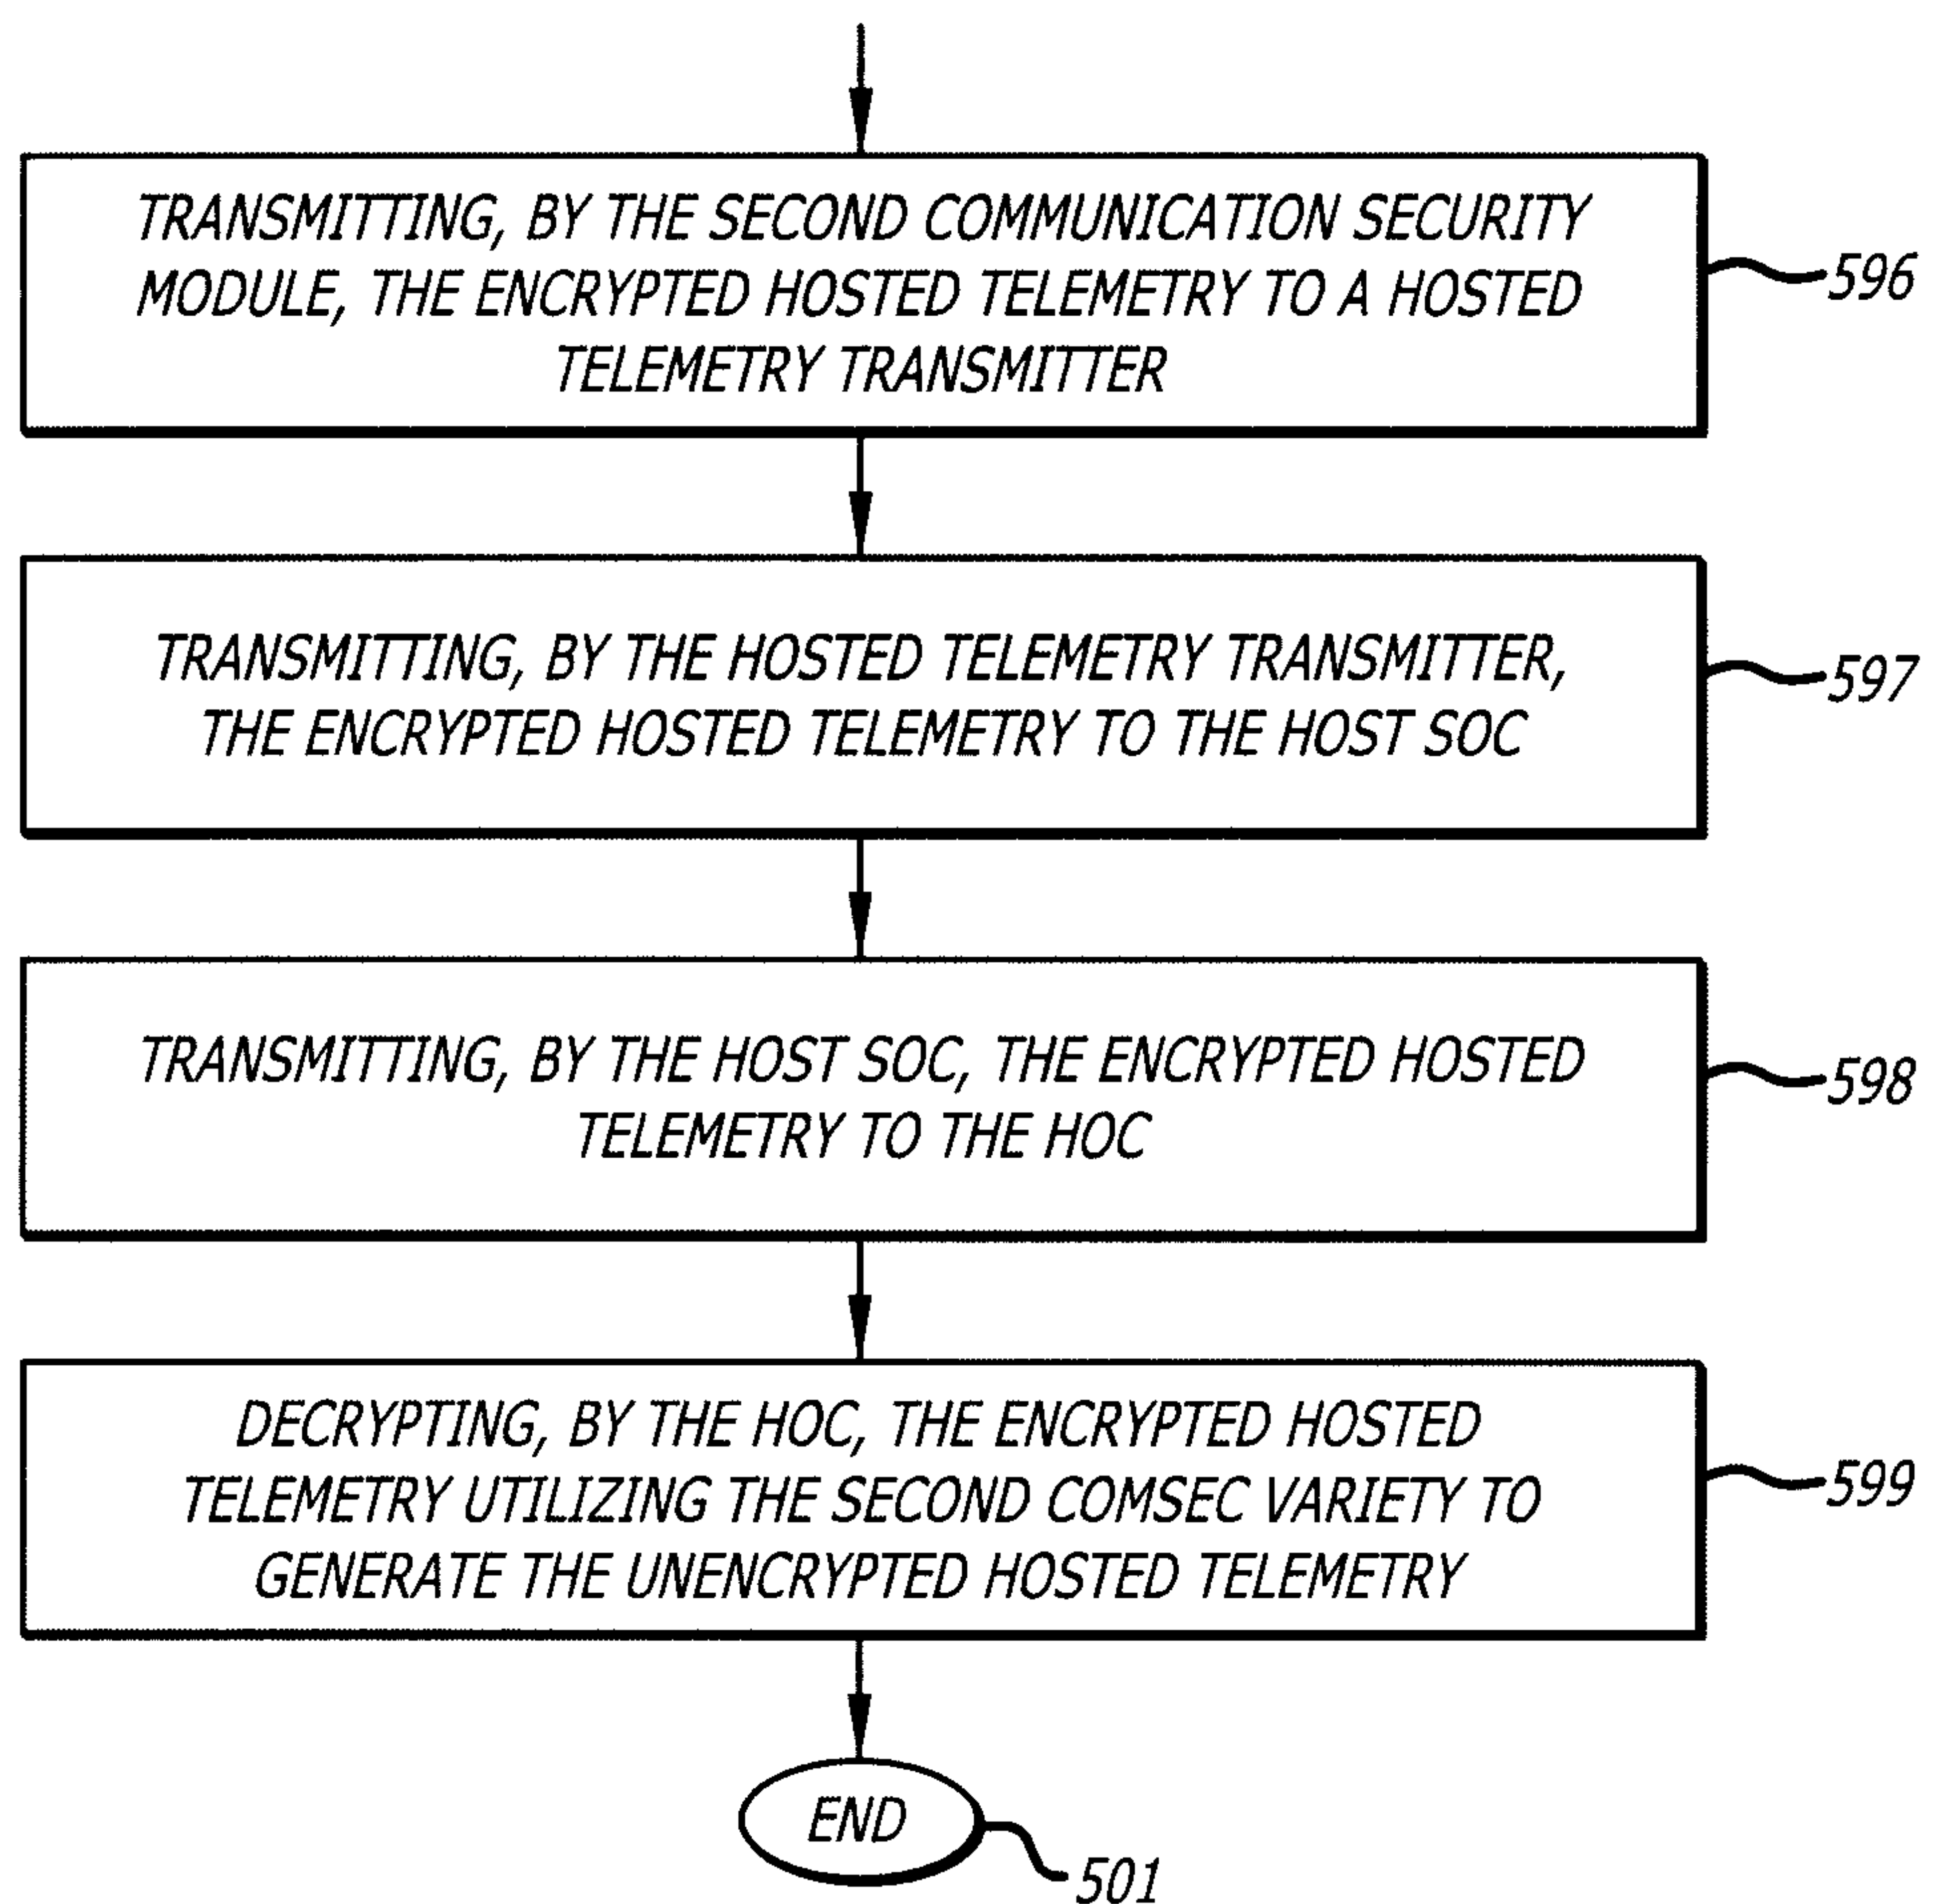
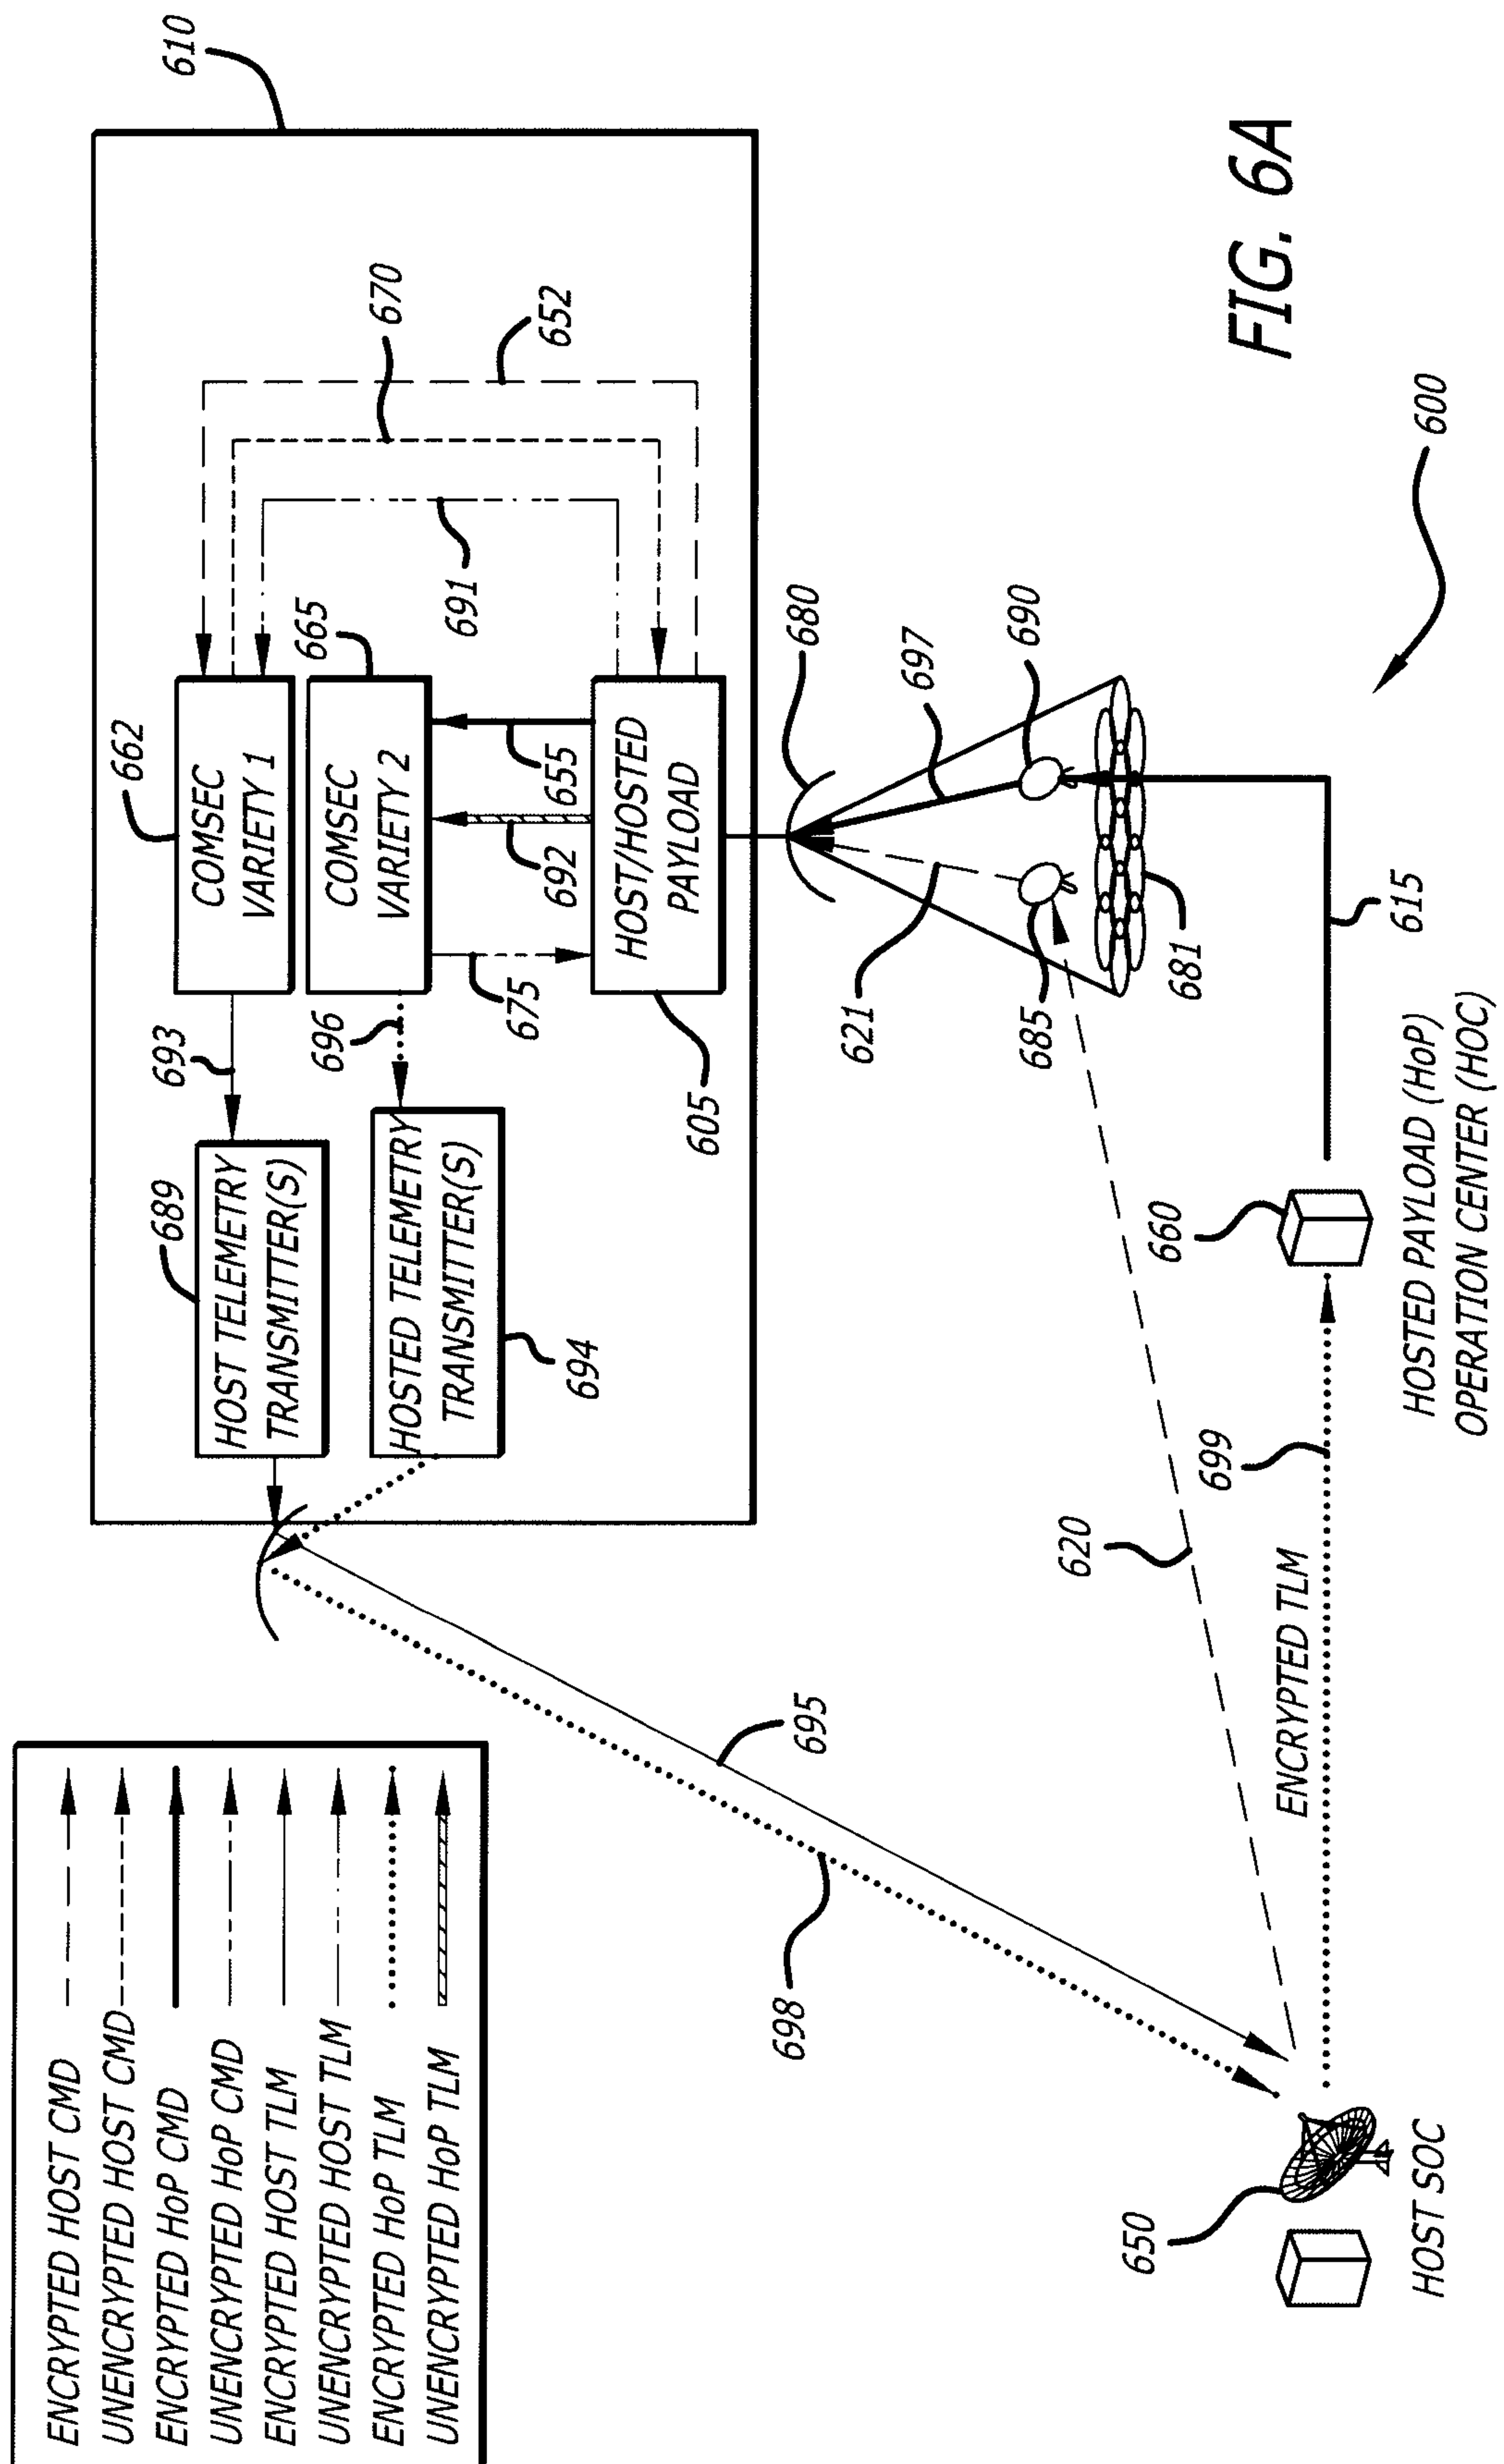


FIG. 5D



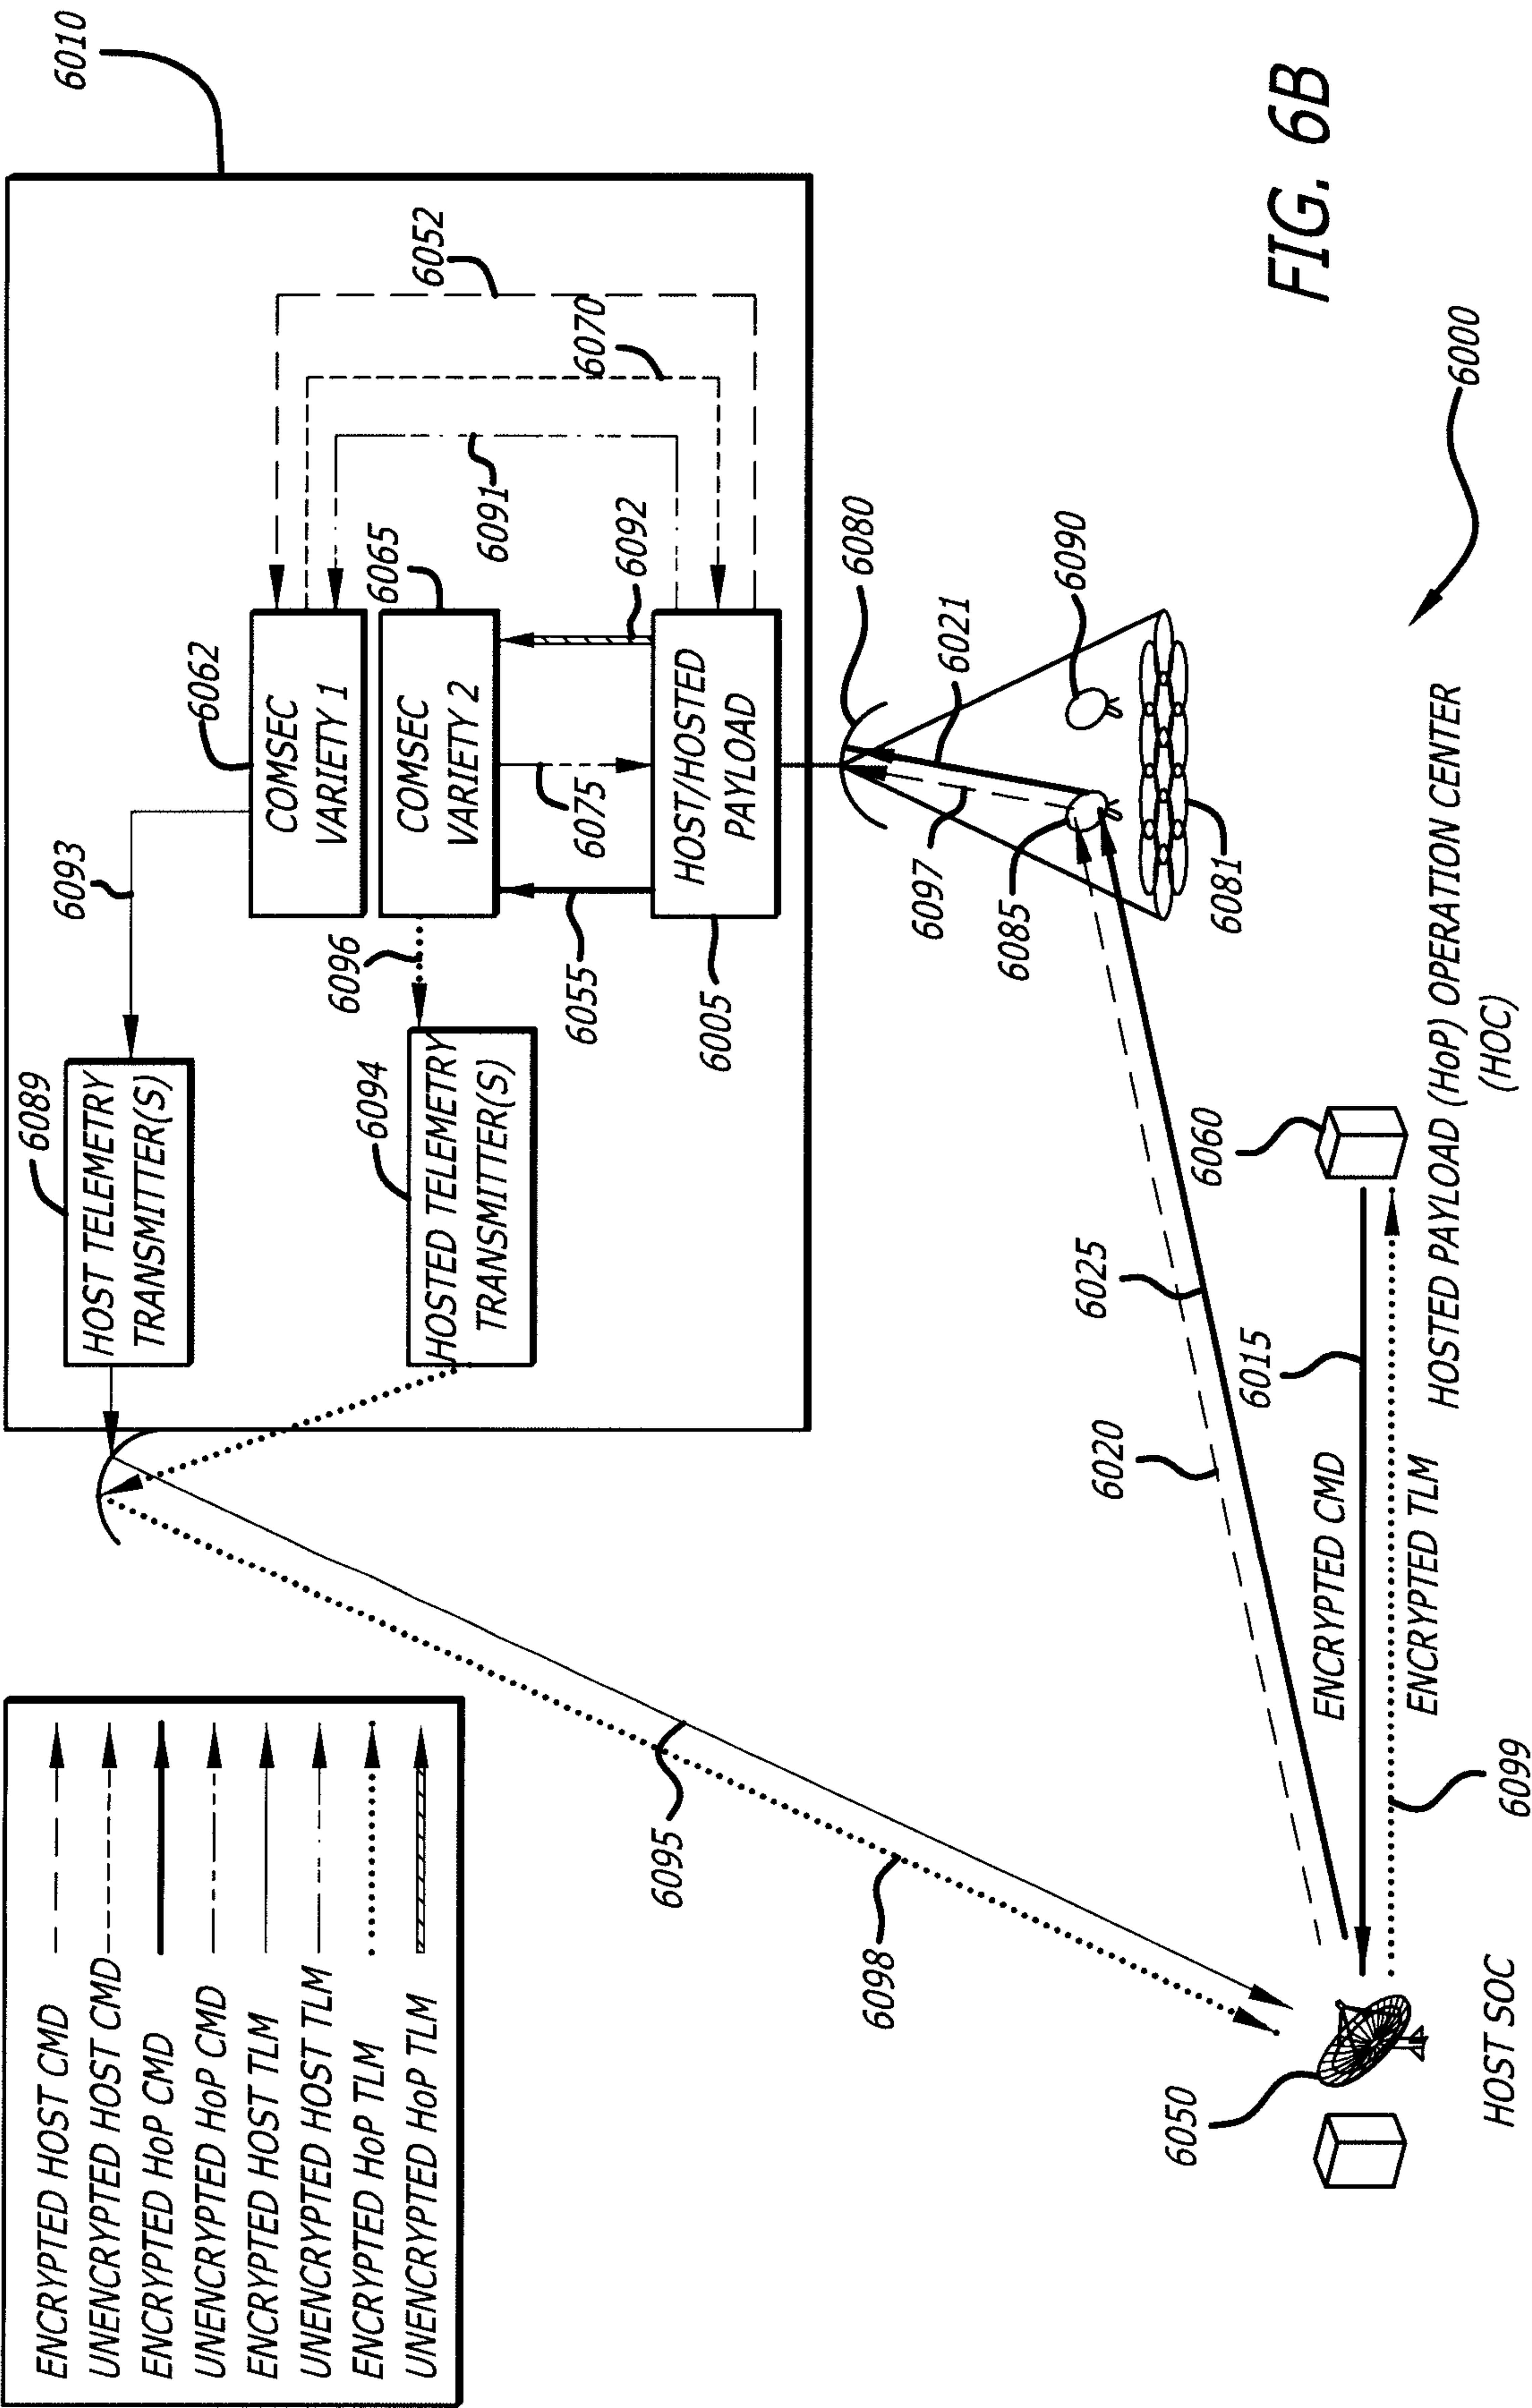


FIG. 7A

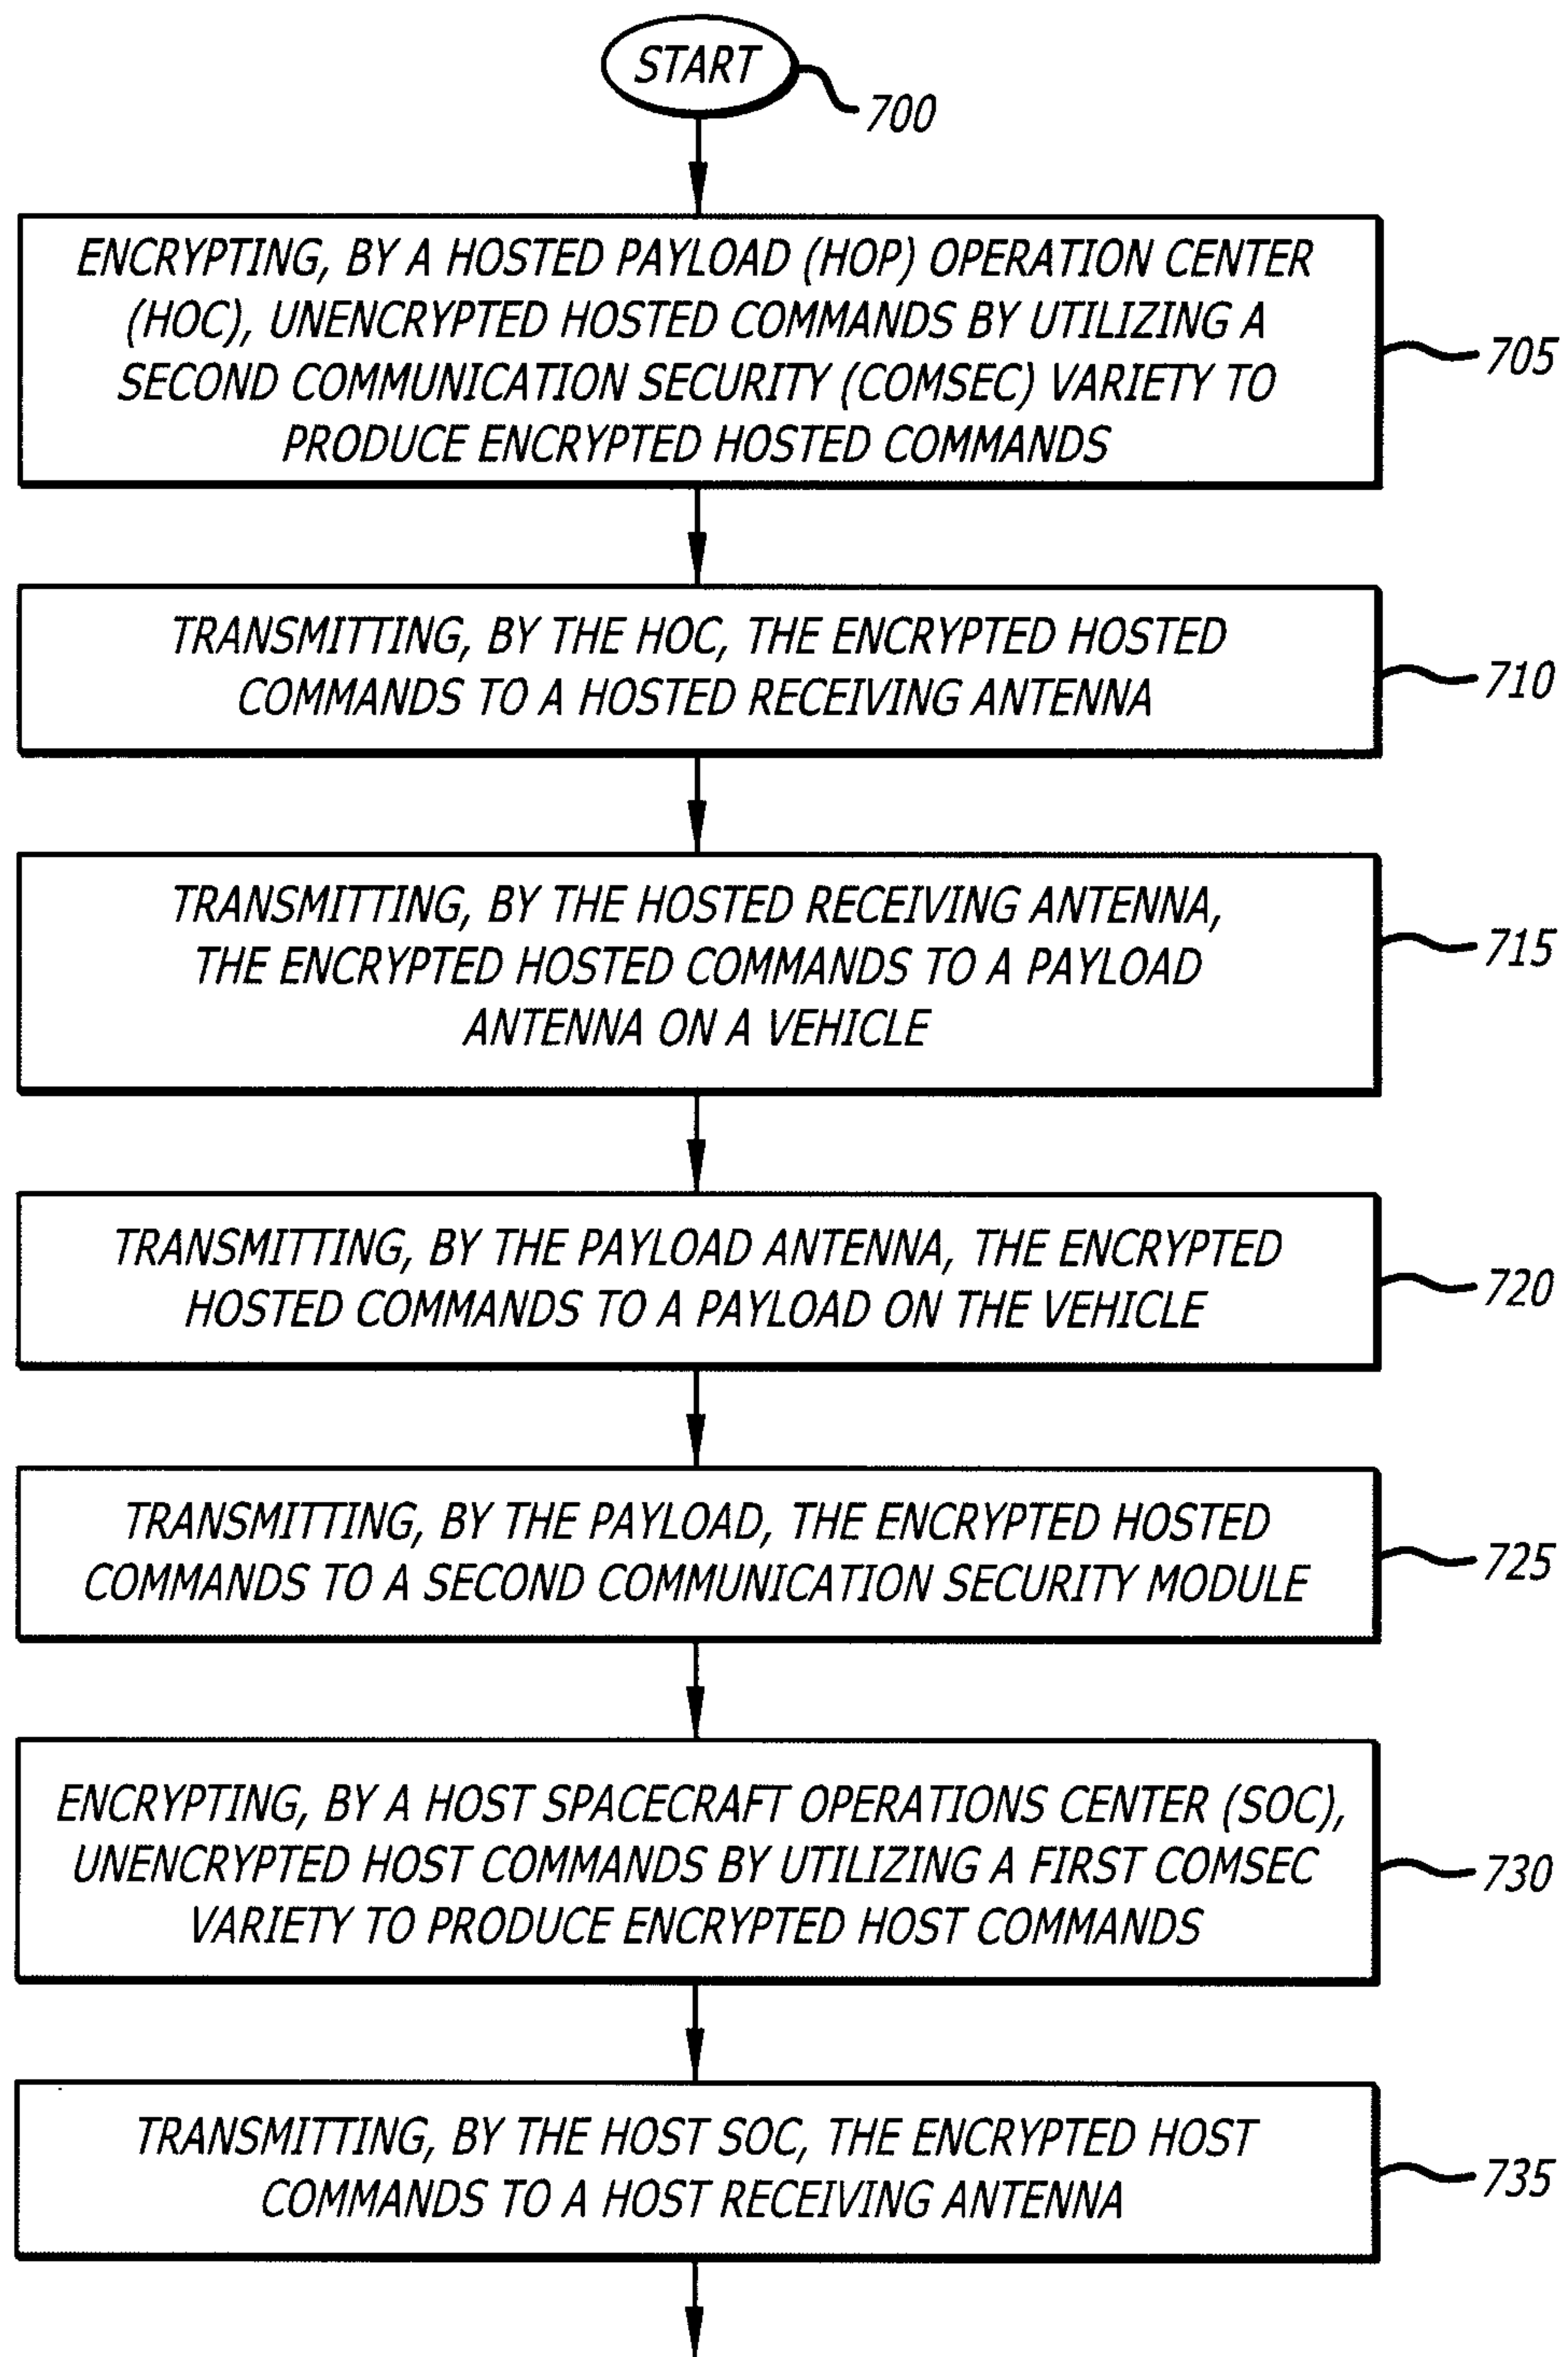


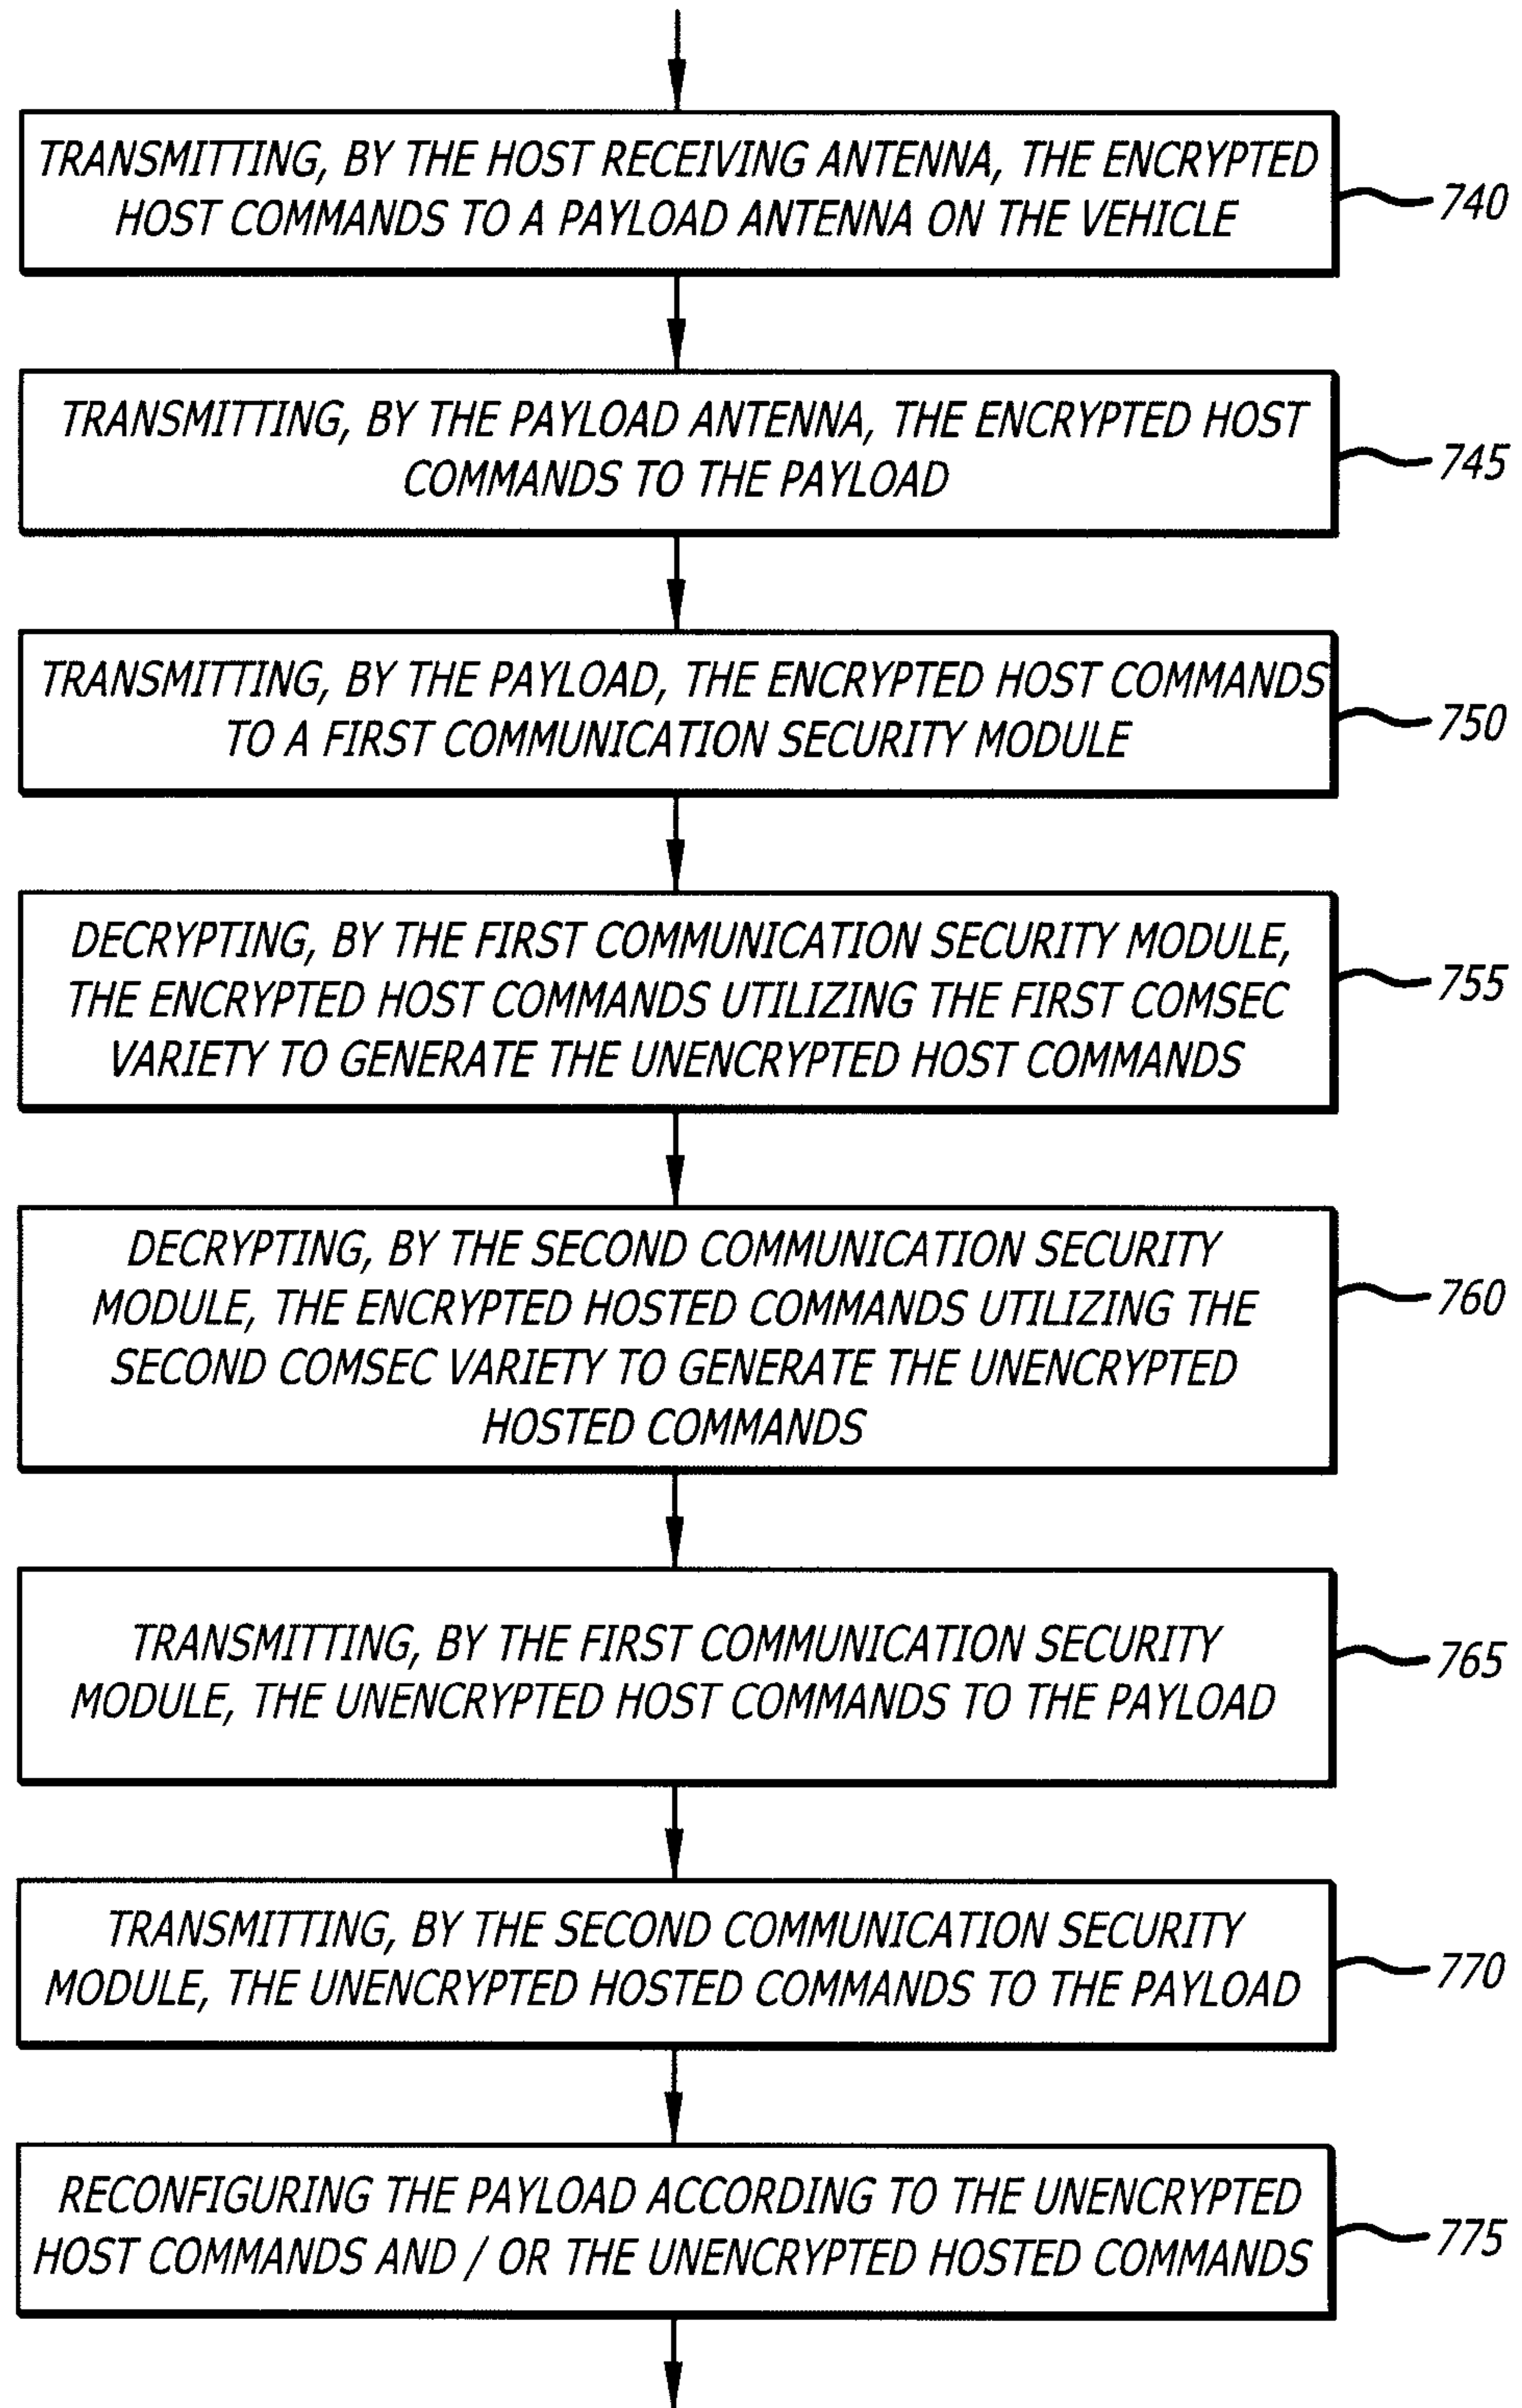
FIG. 7B

FIG. 7C

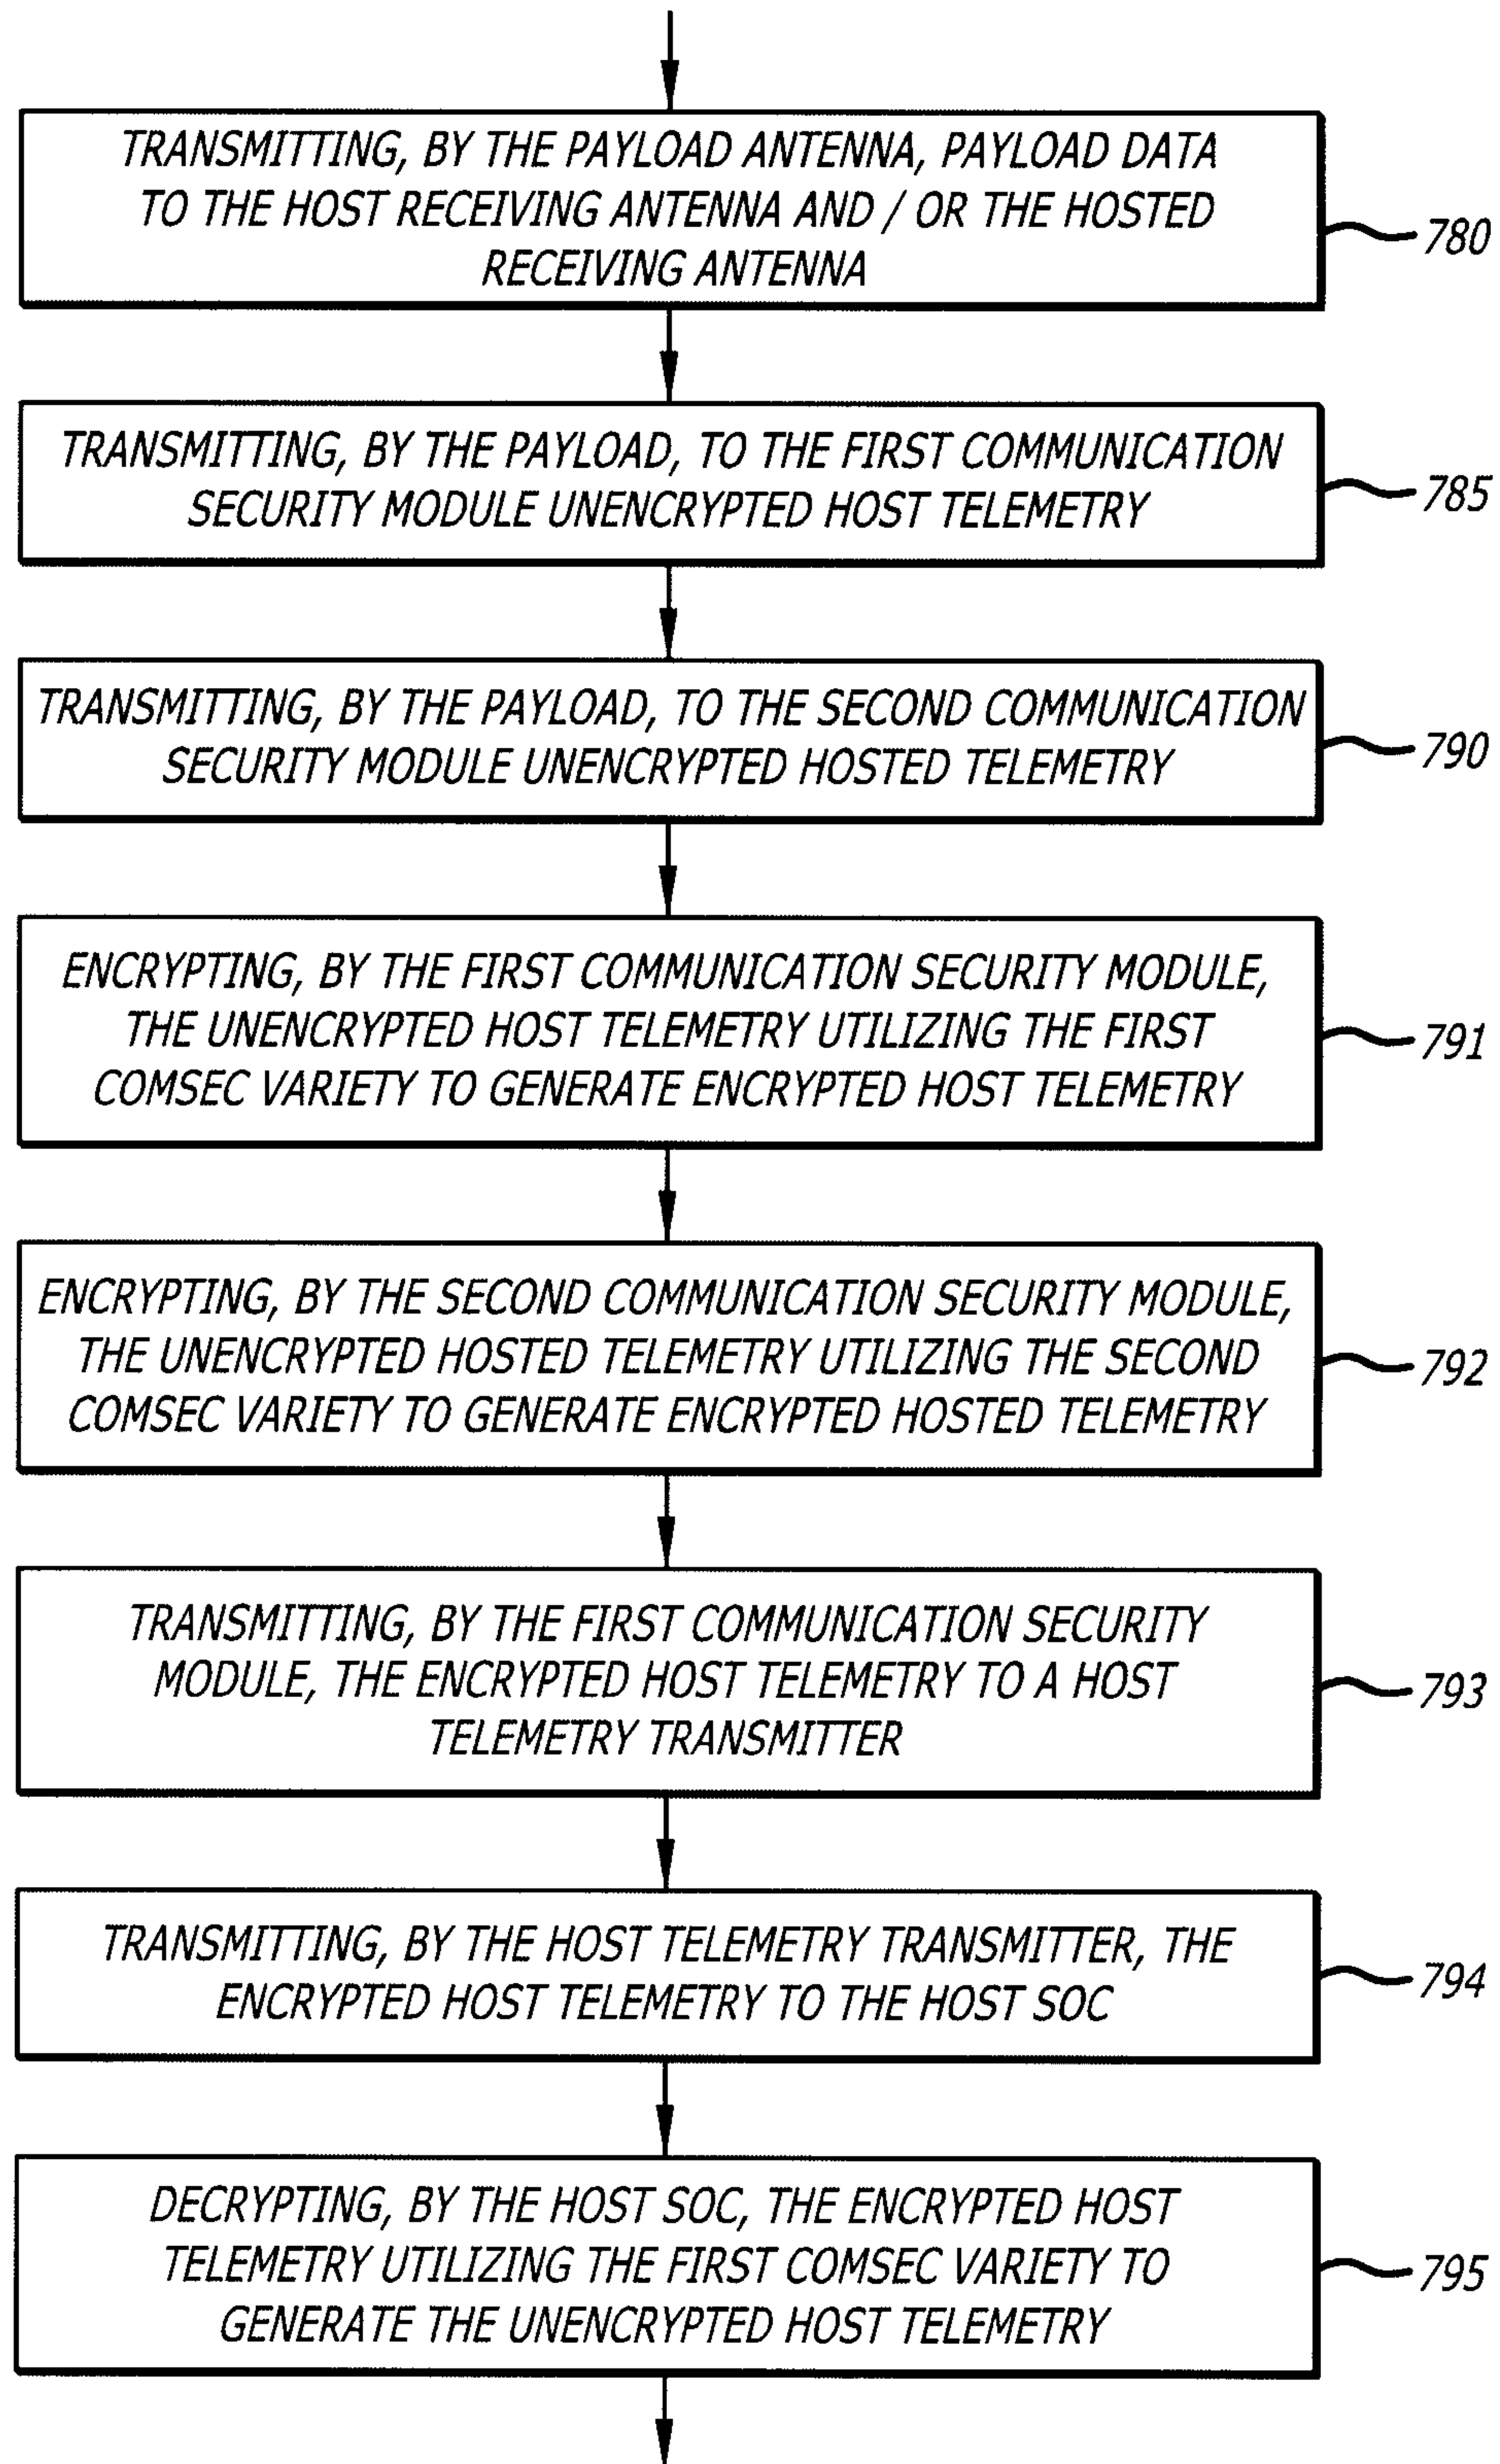


FIG. 7D

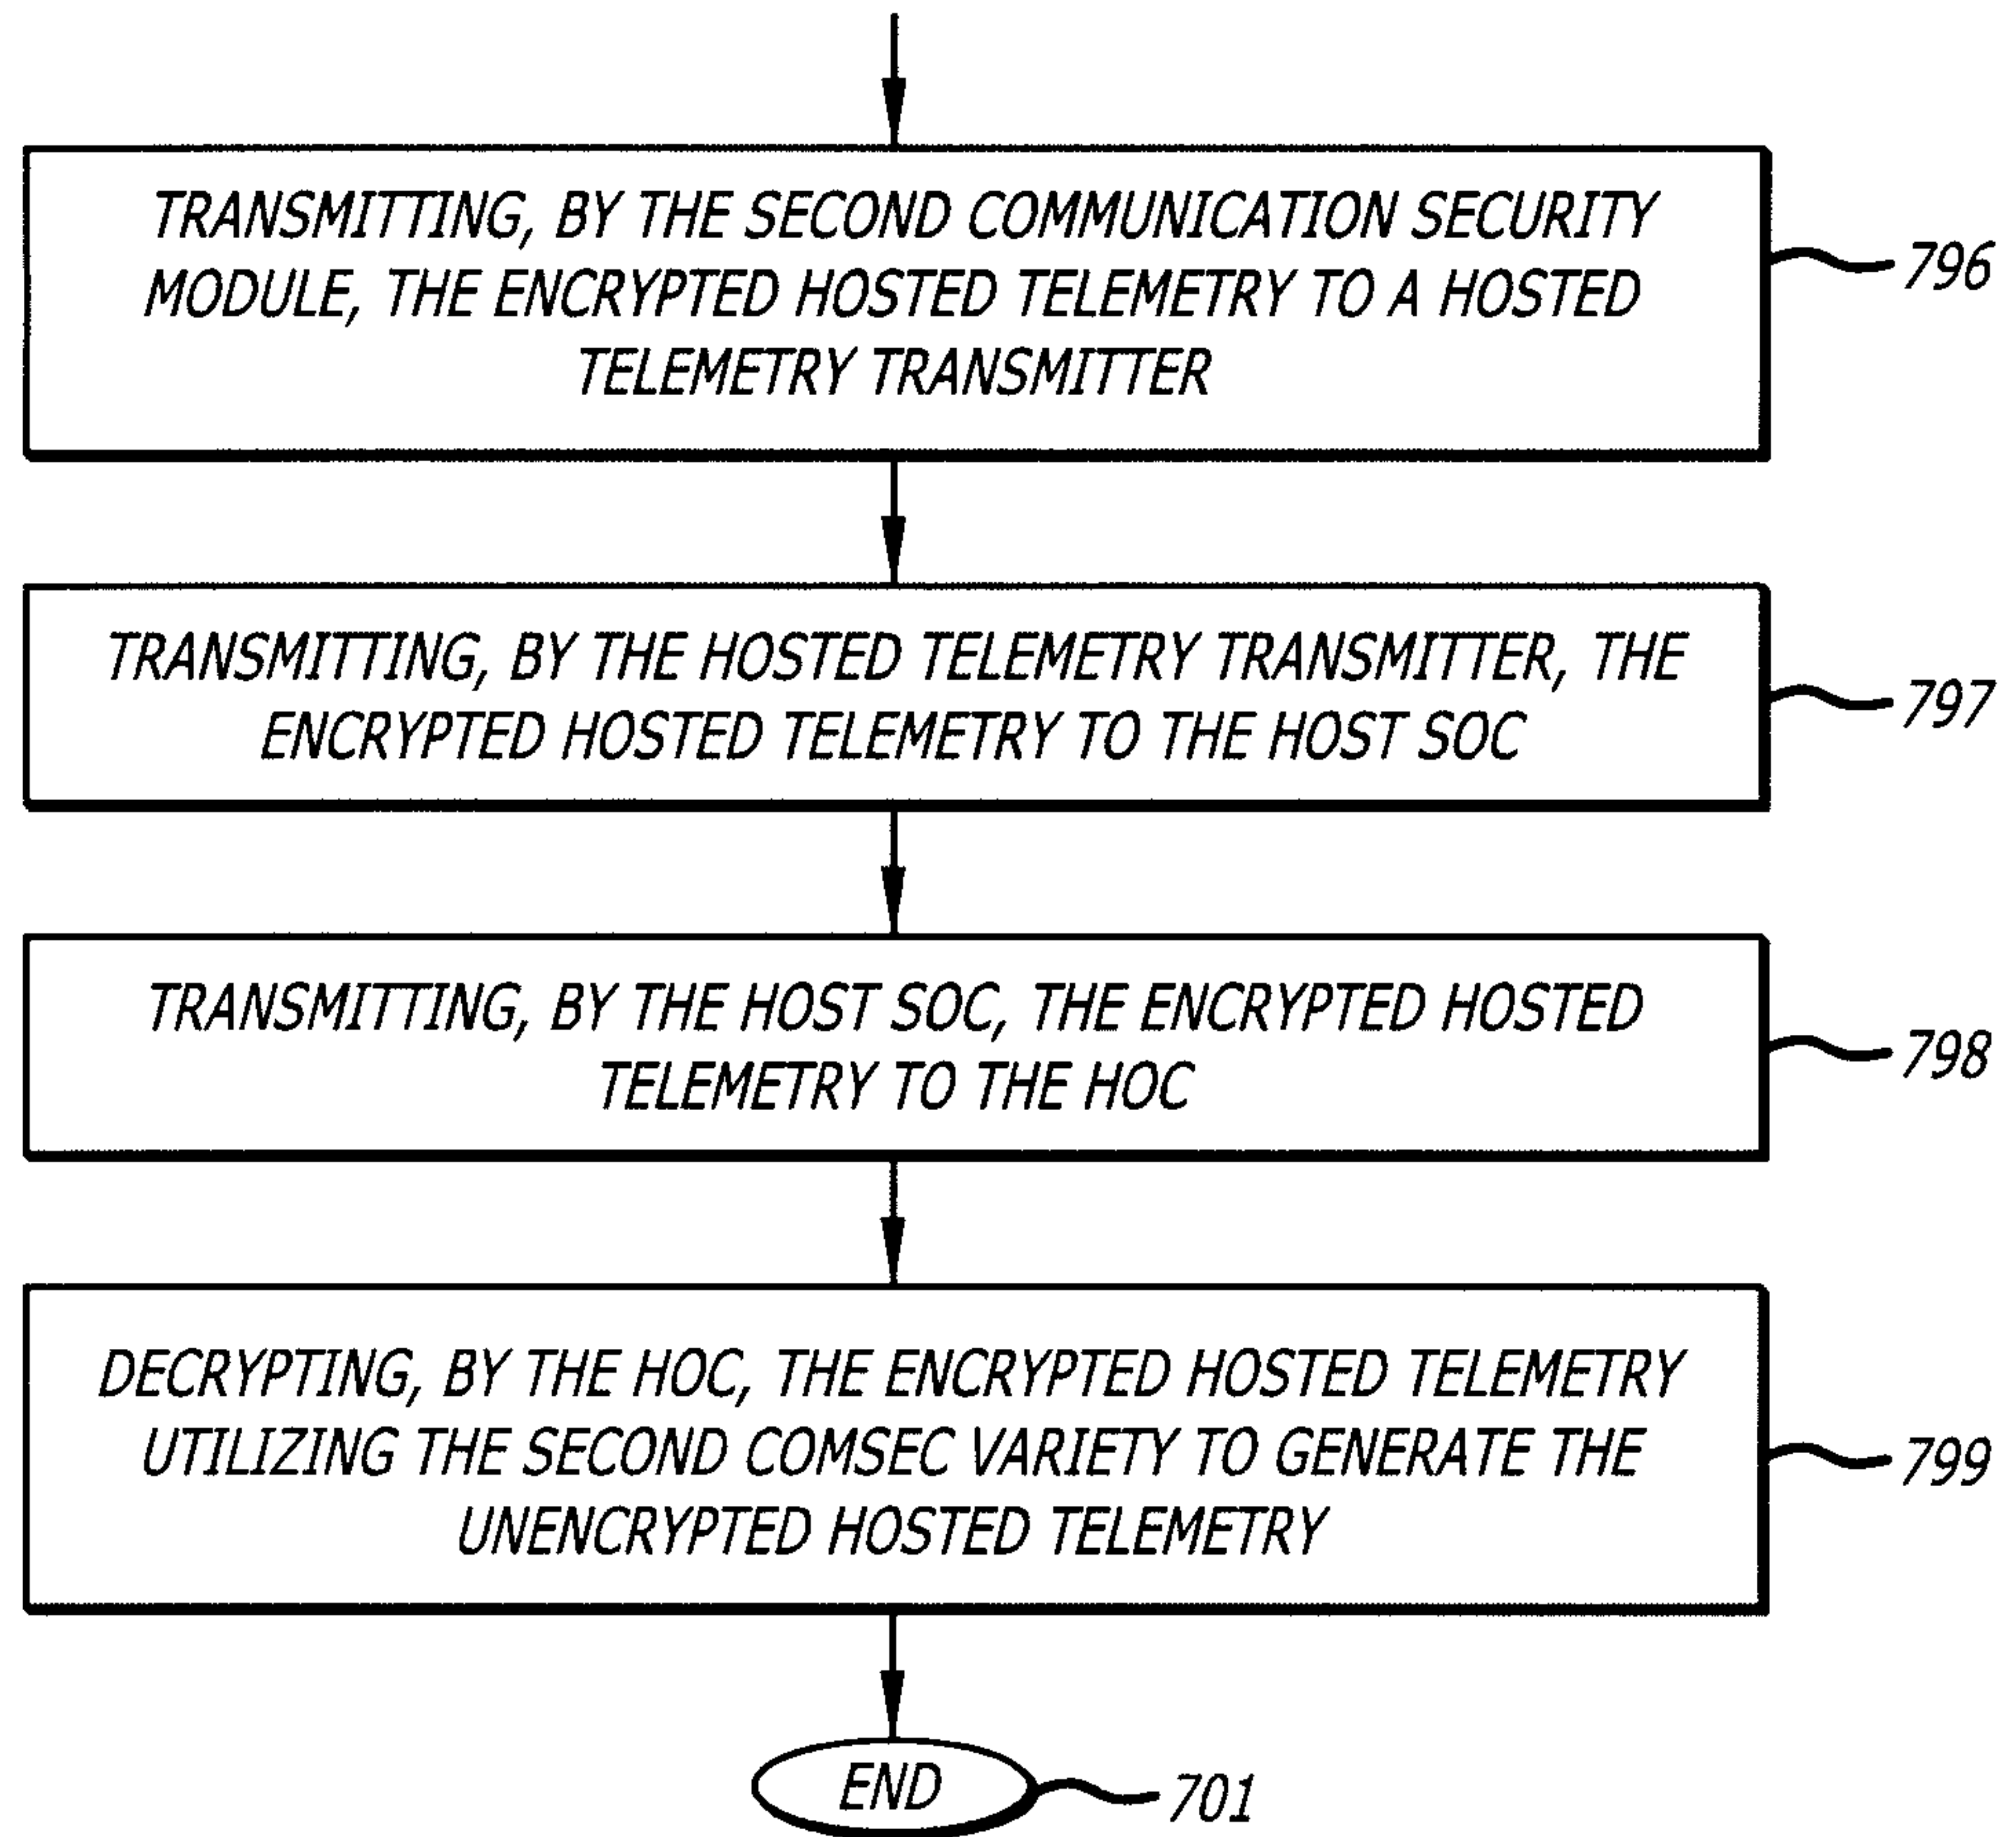


FIG. 7E

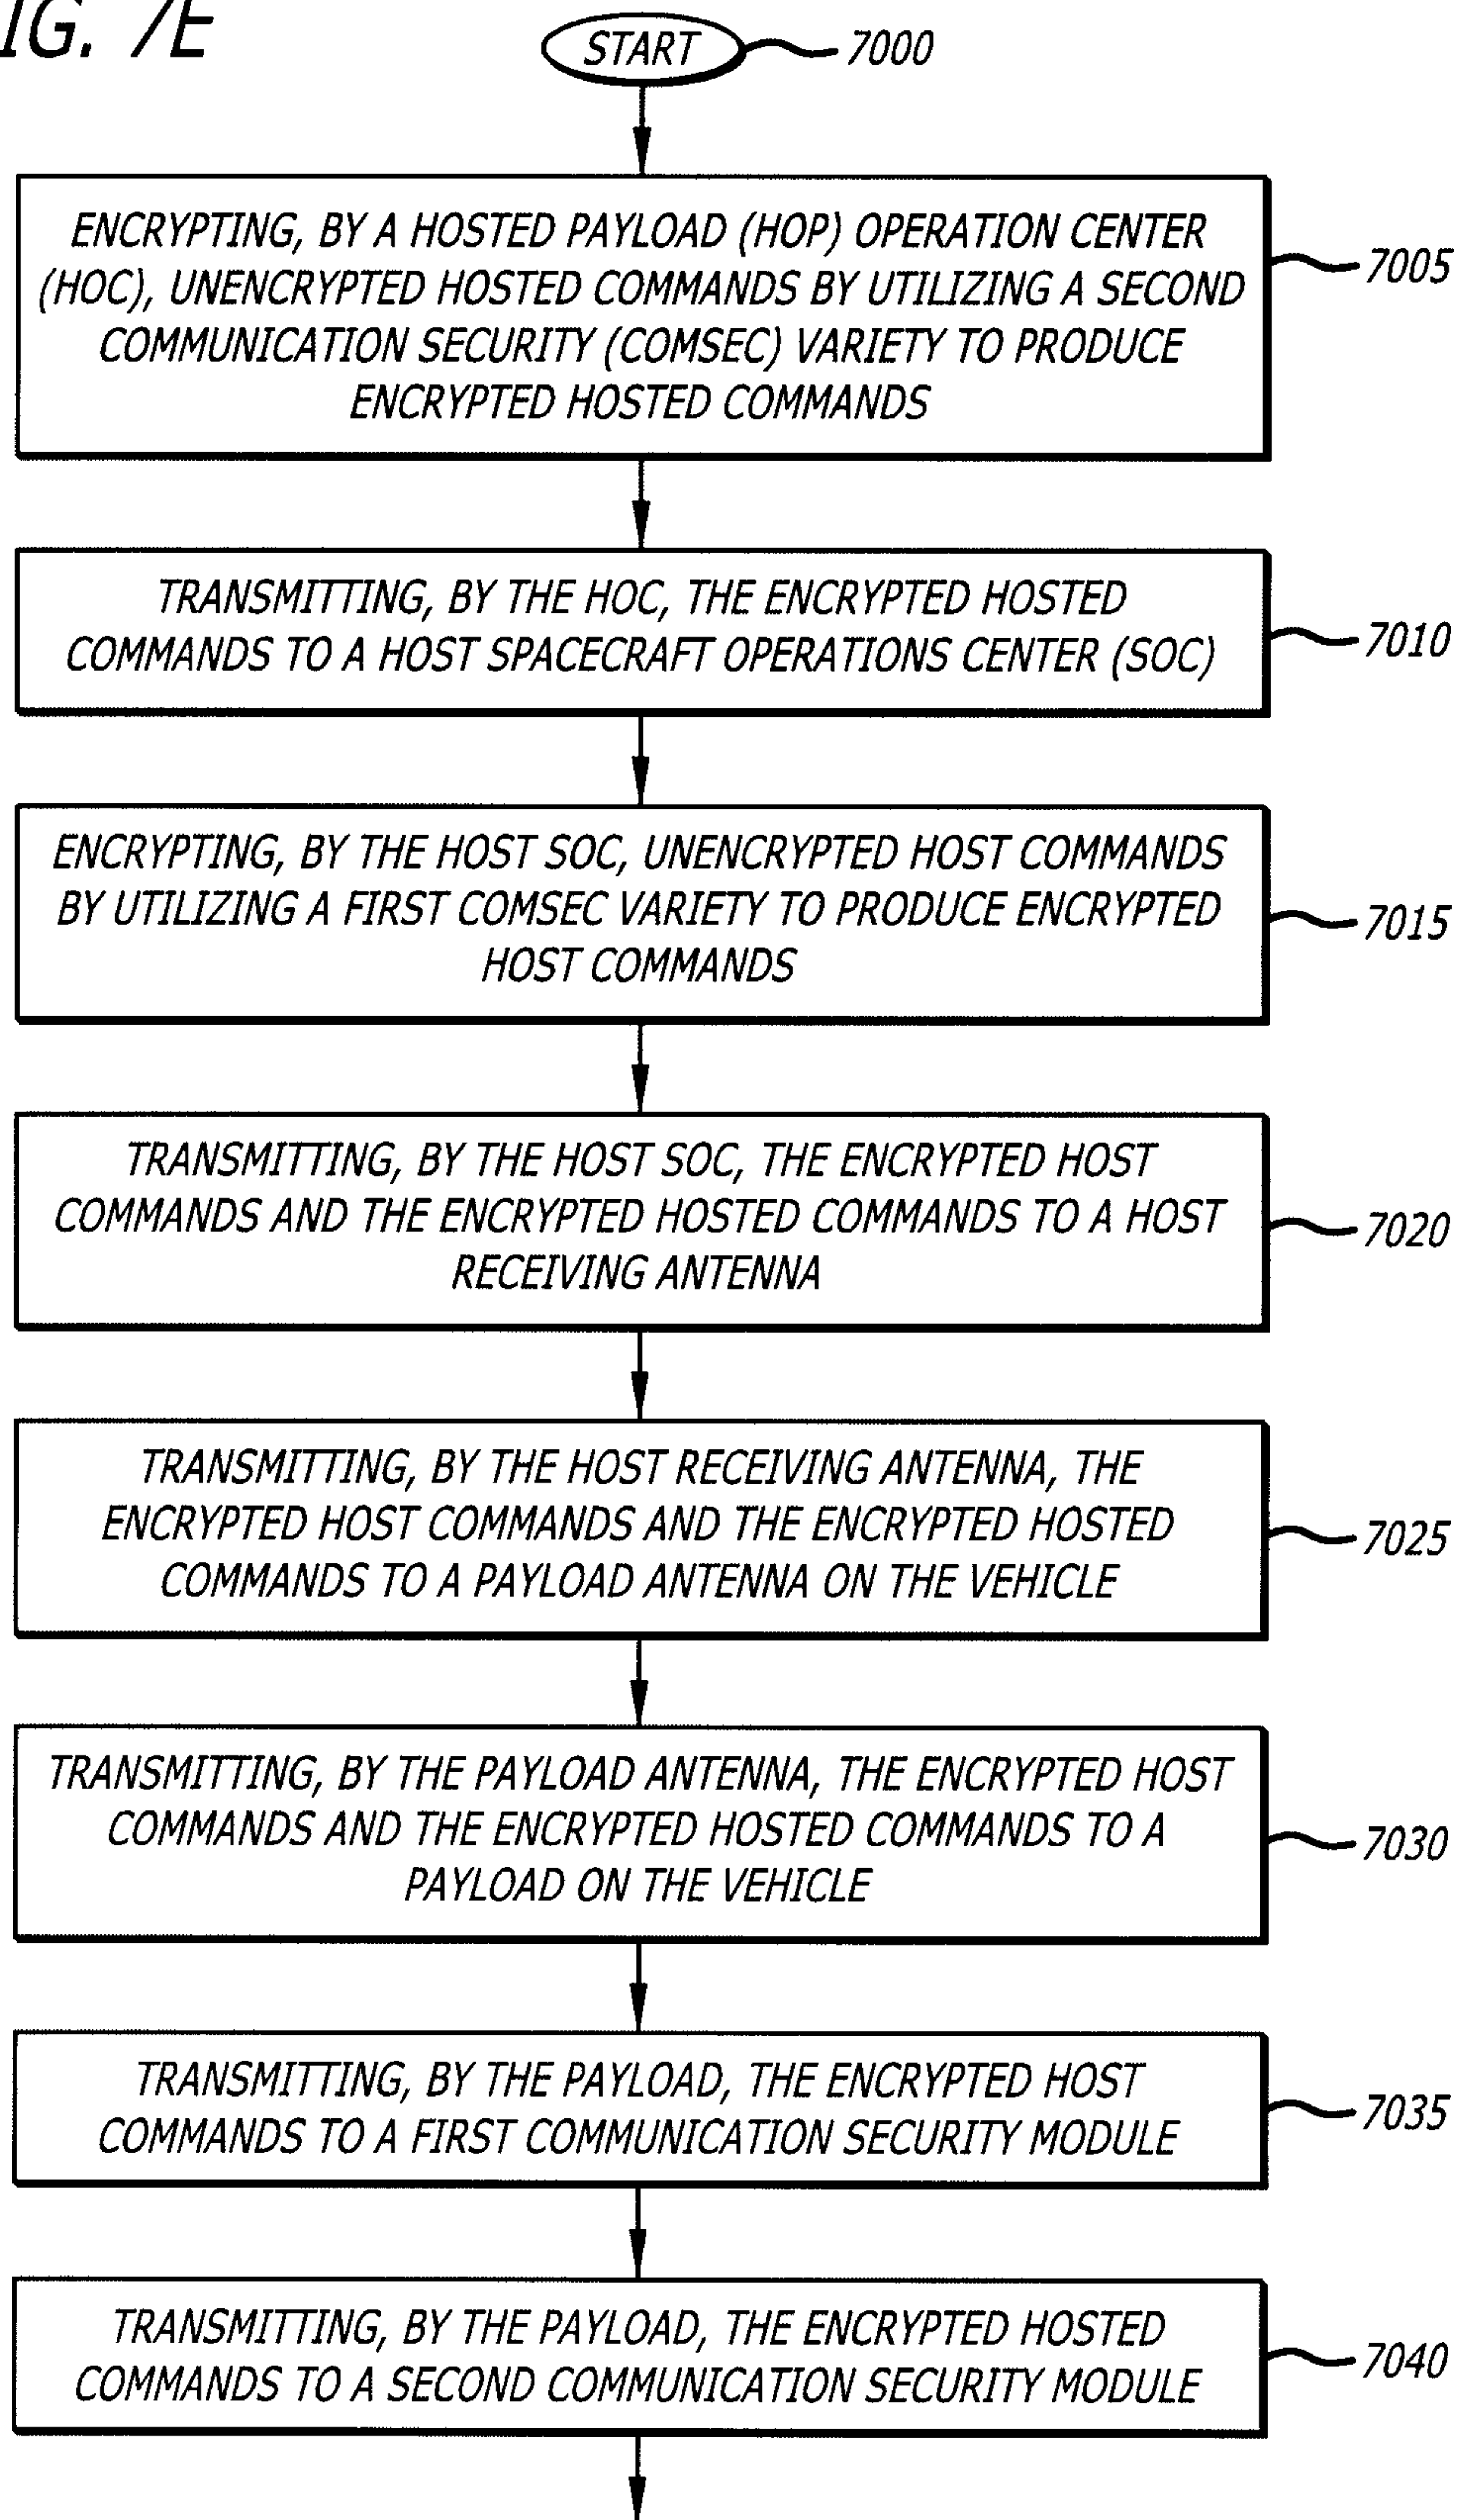


FIG. 7F

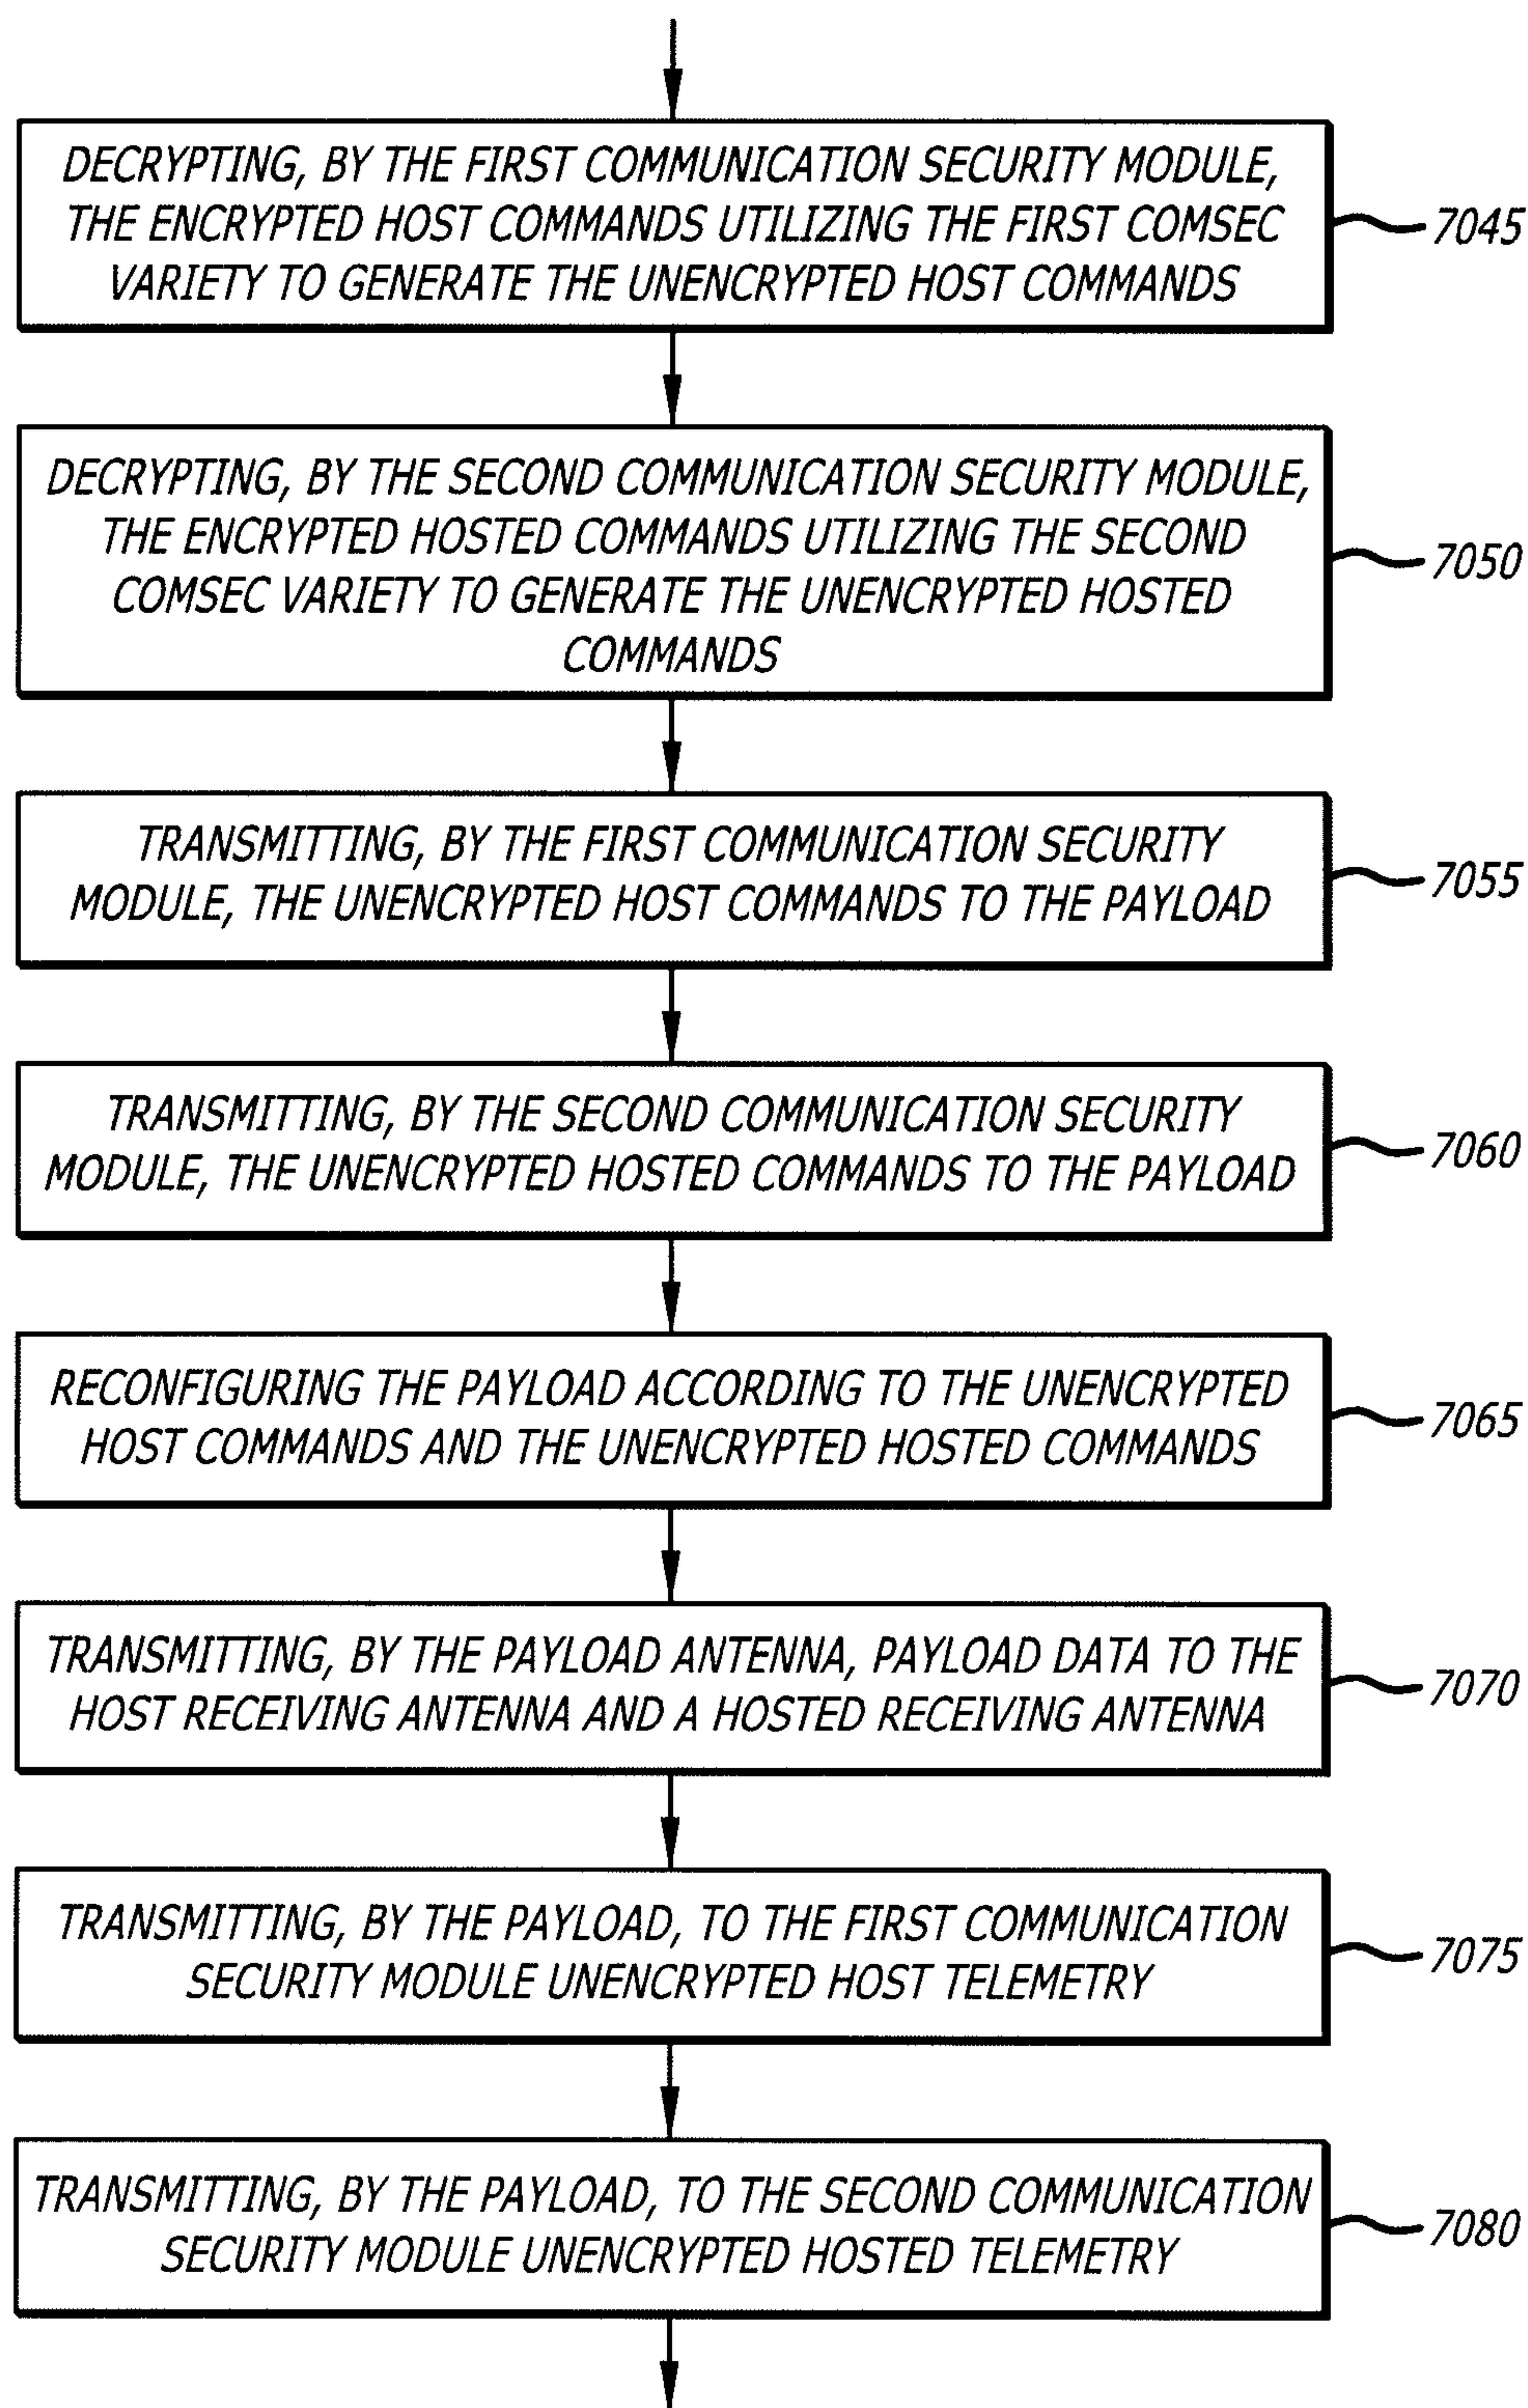


FIG. 7G

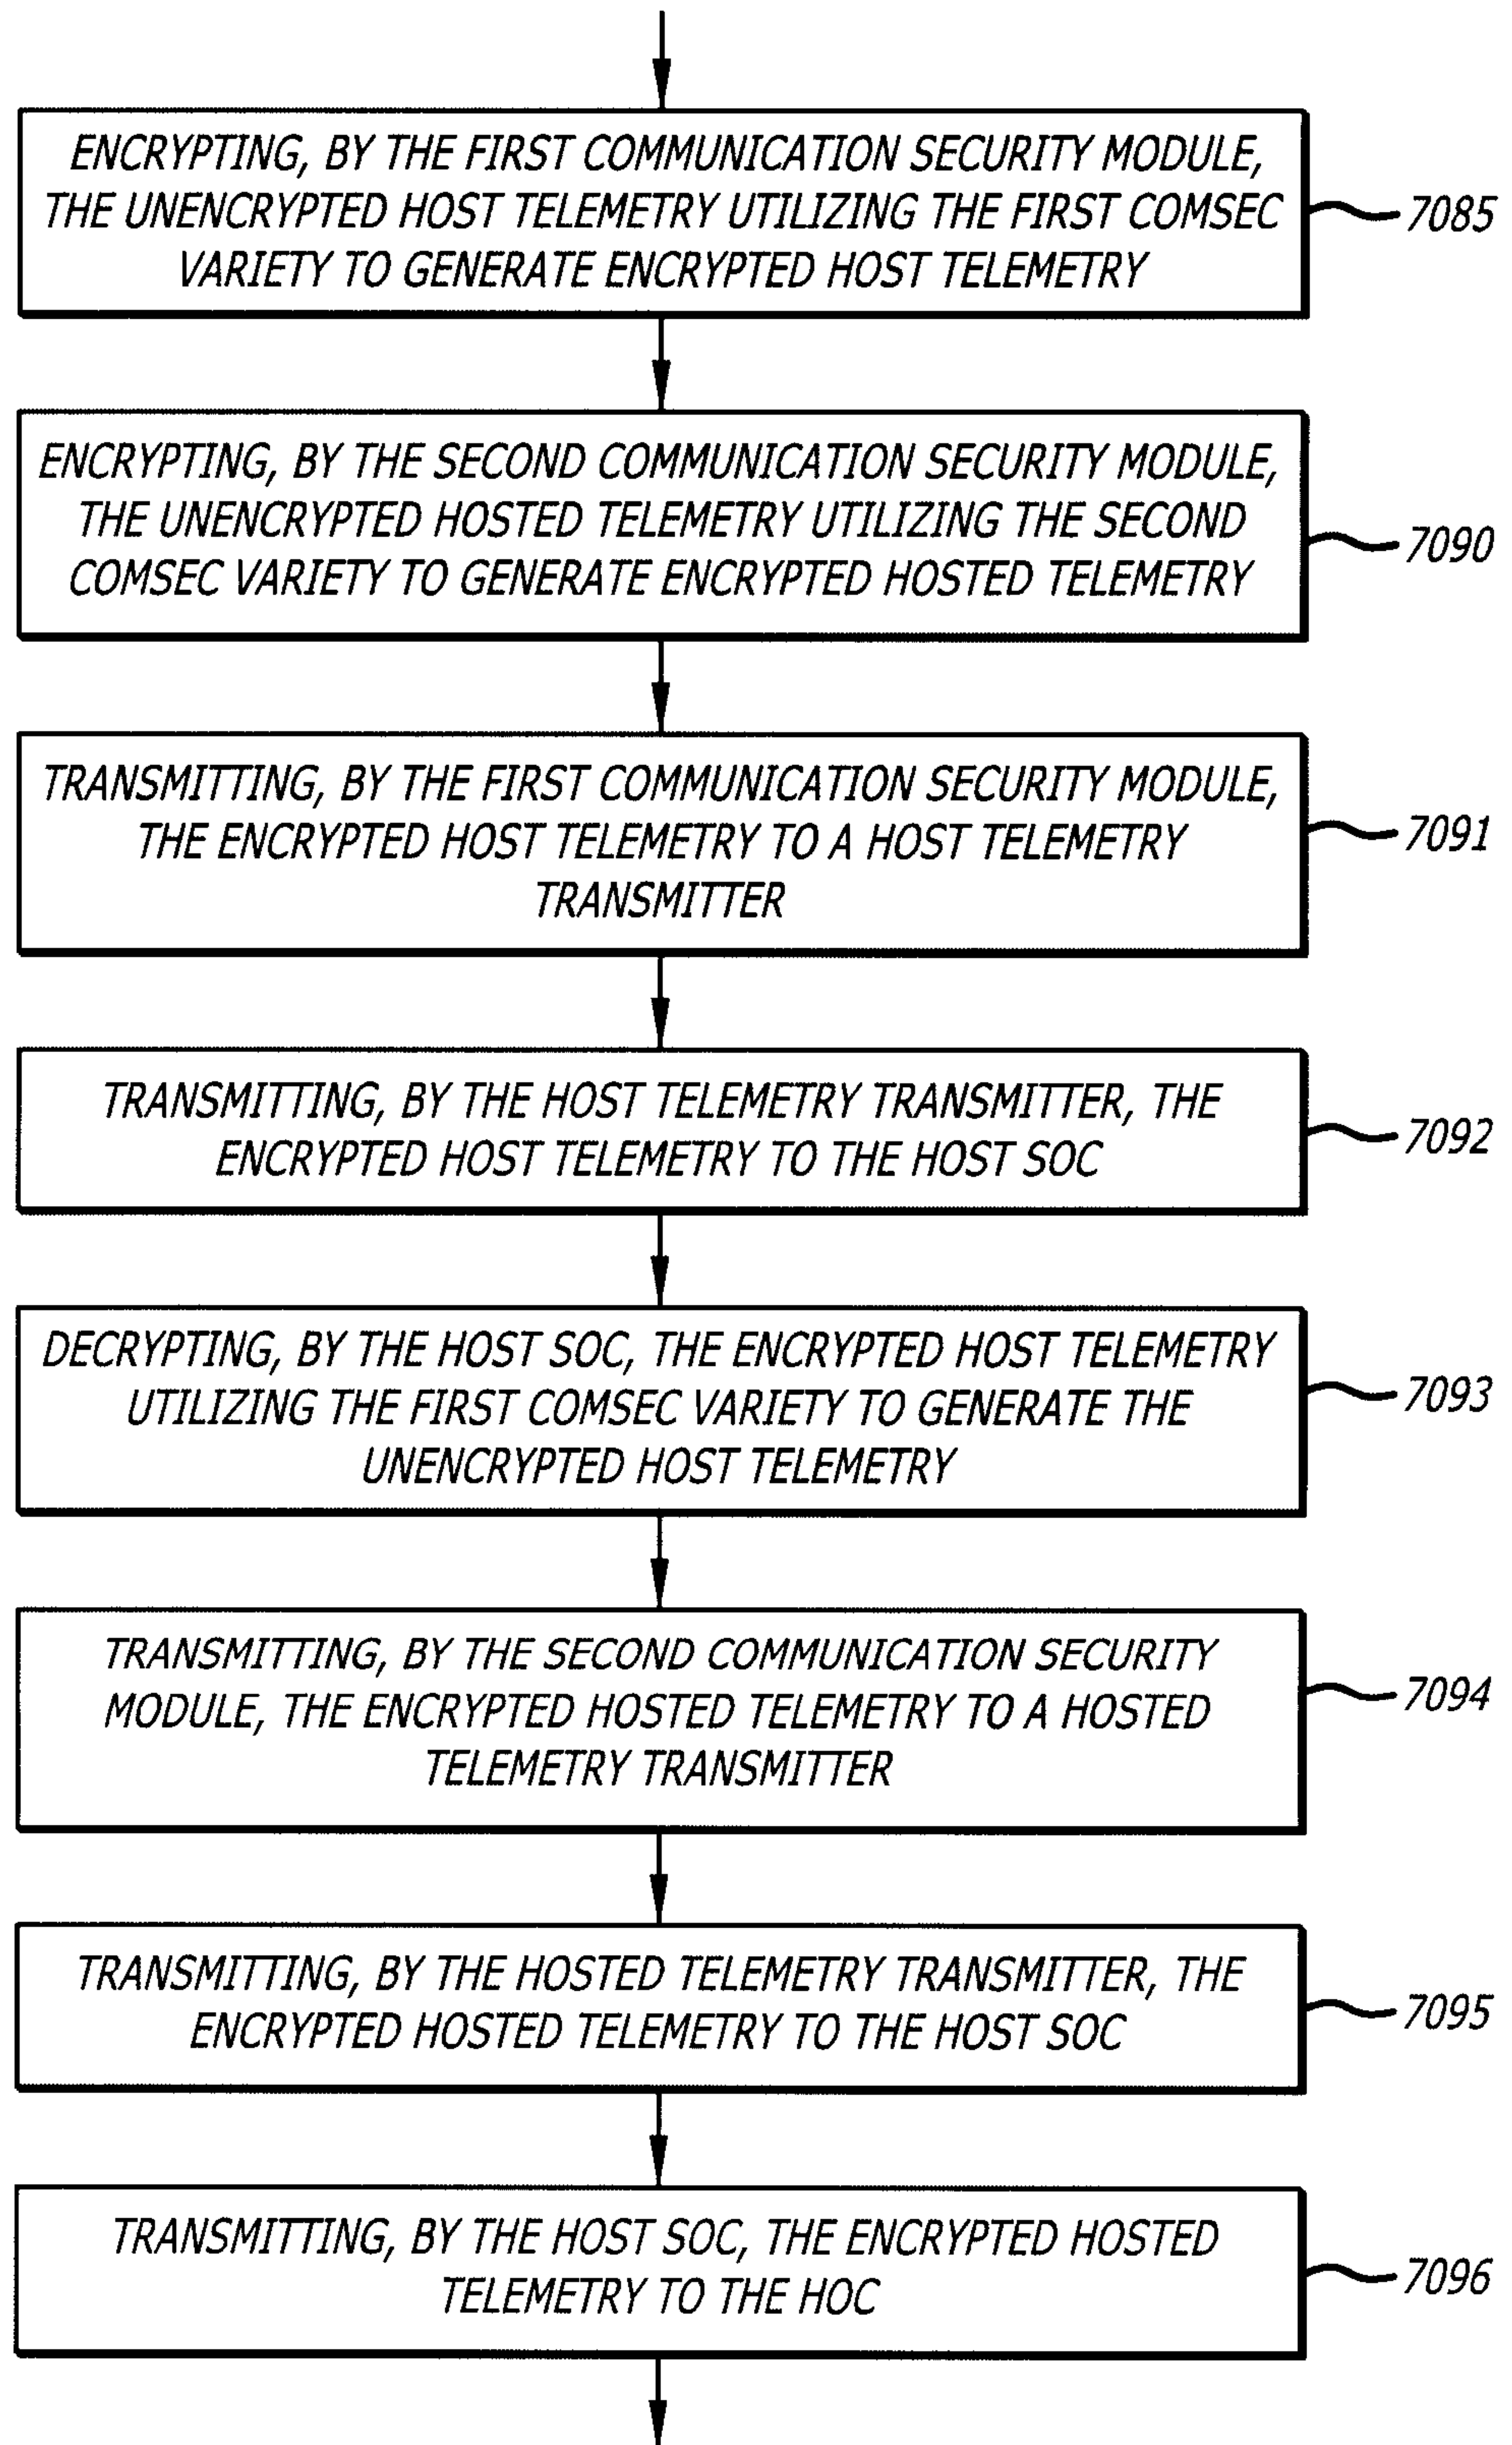
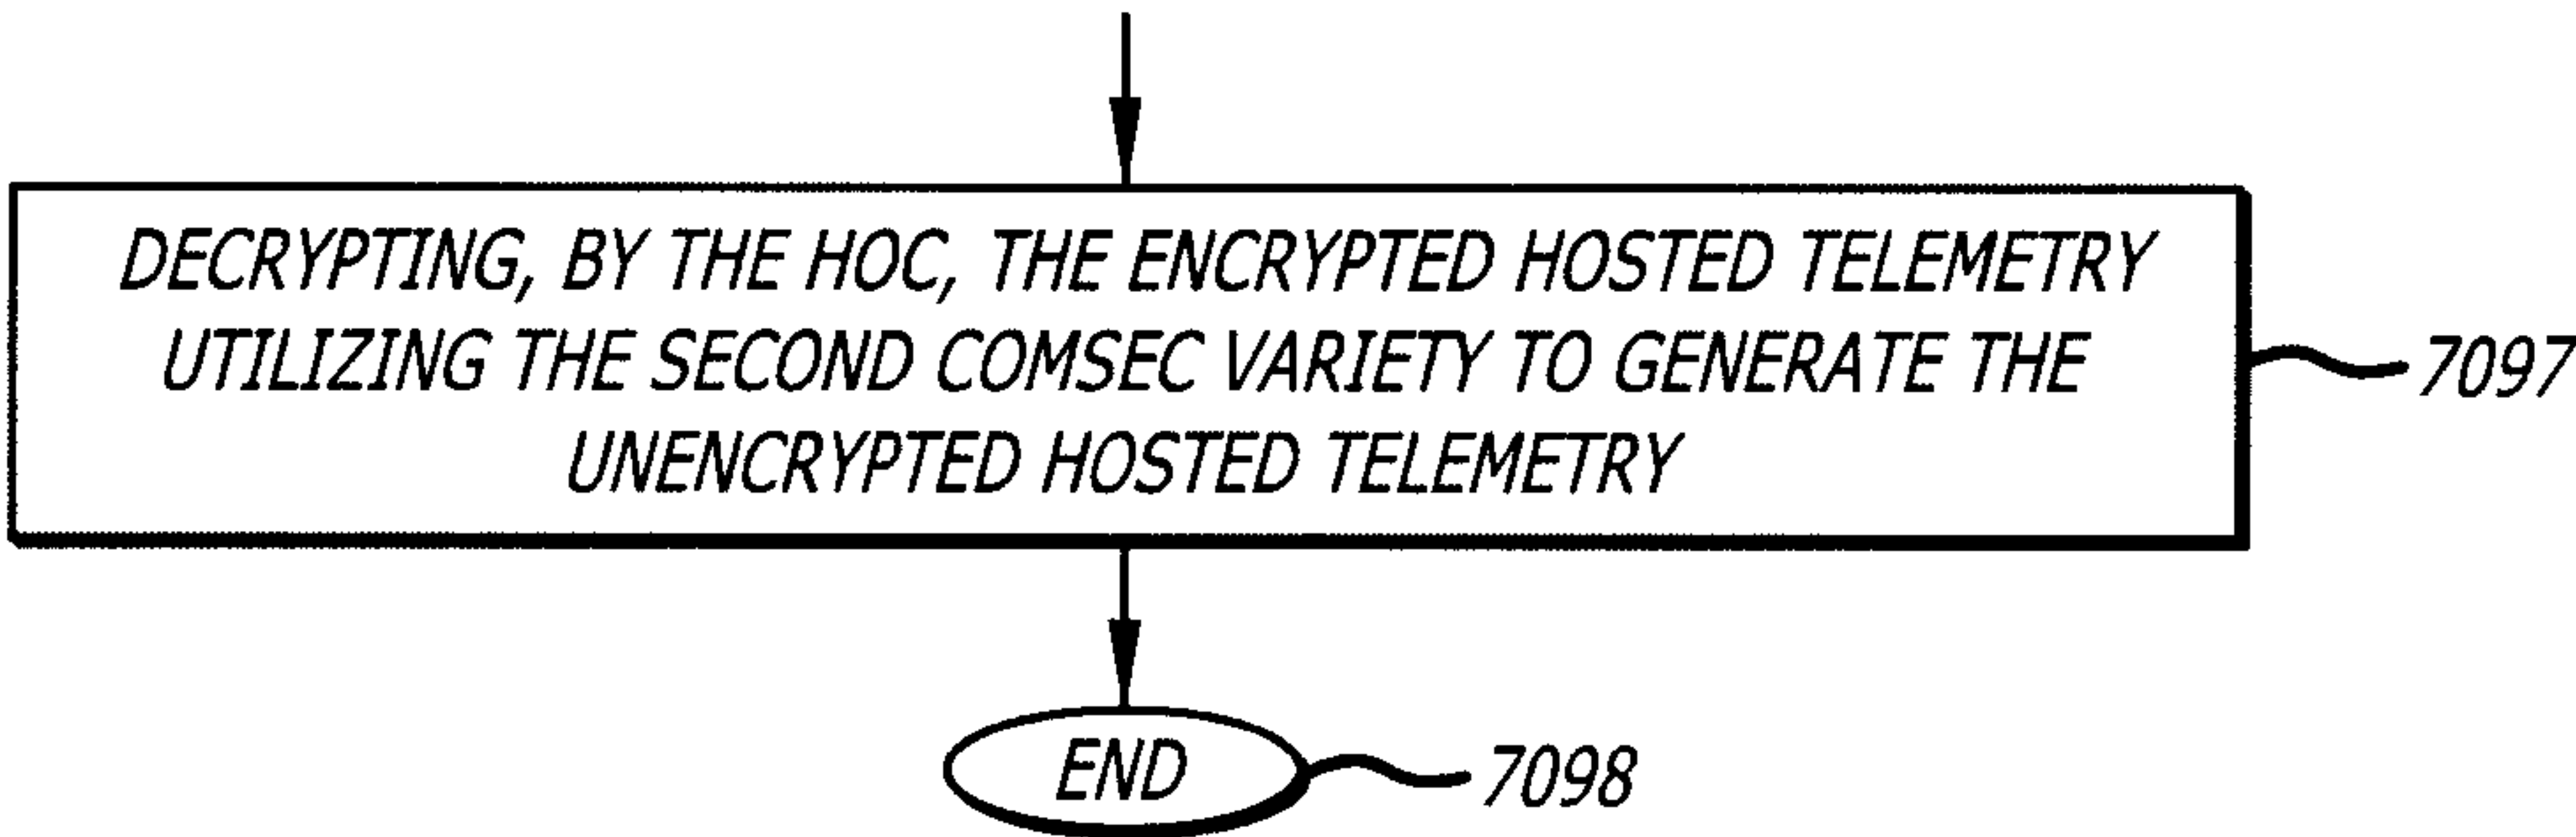
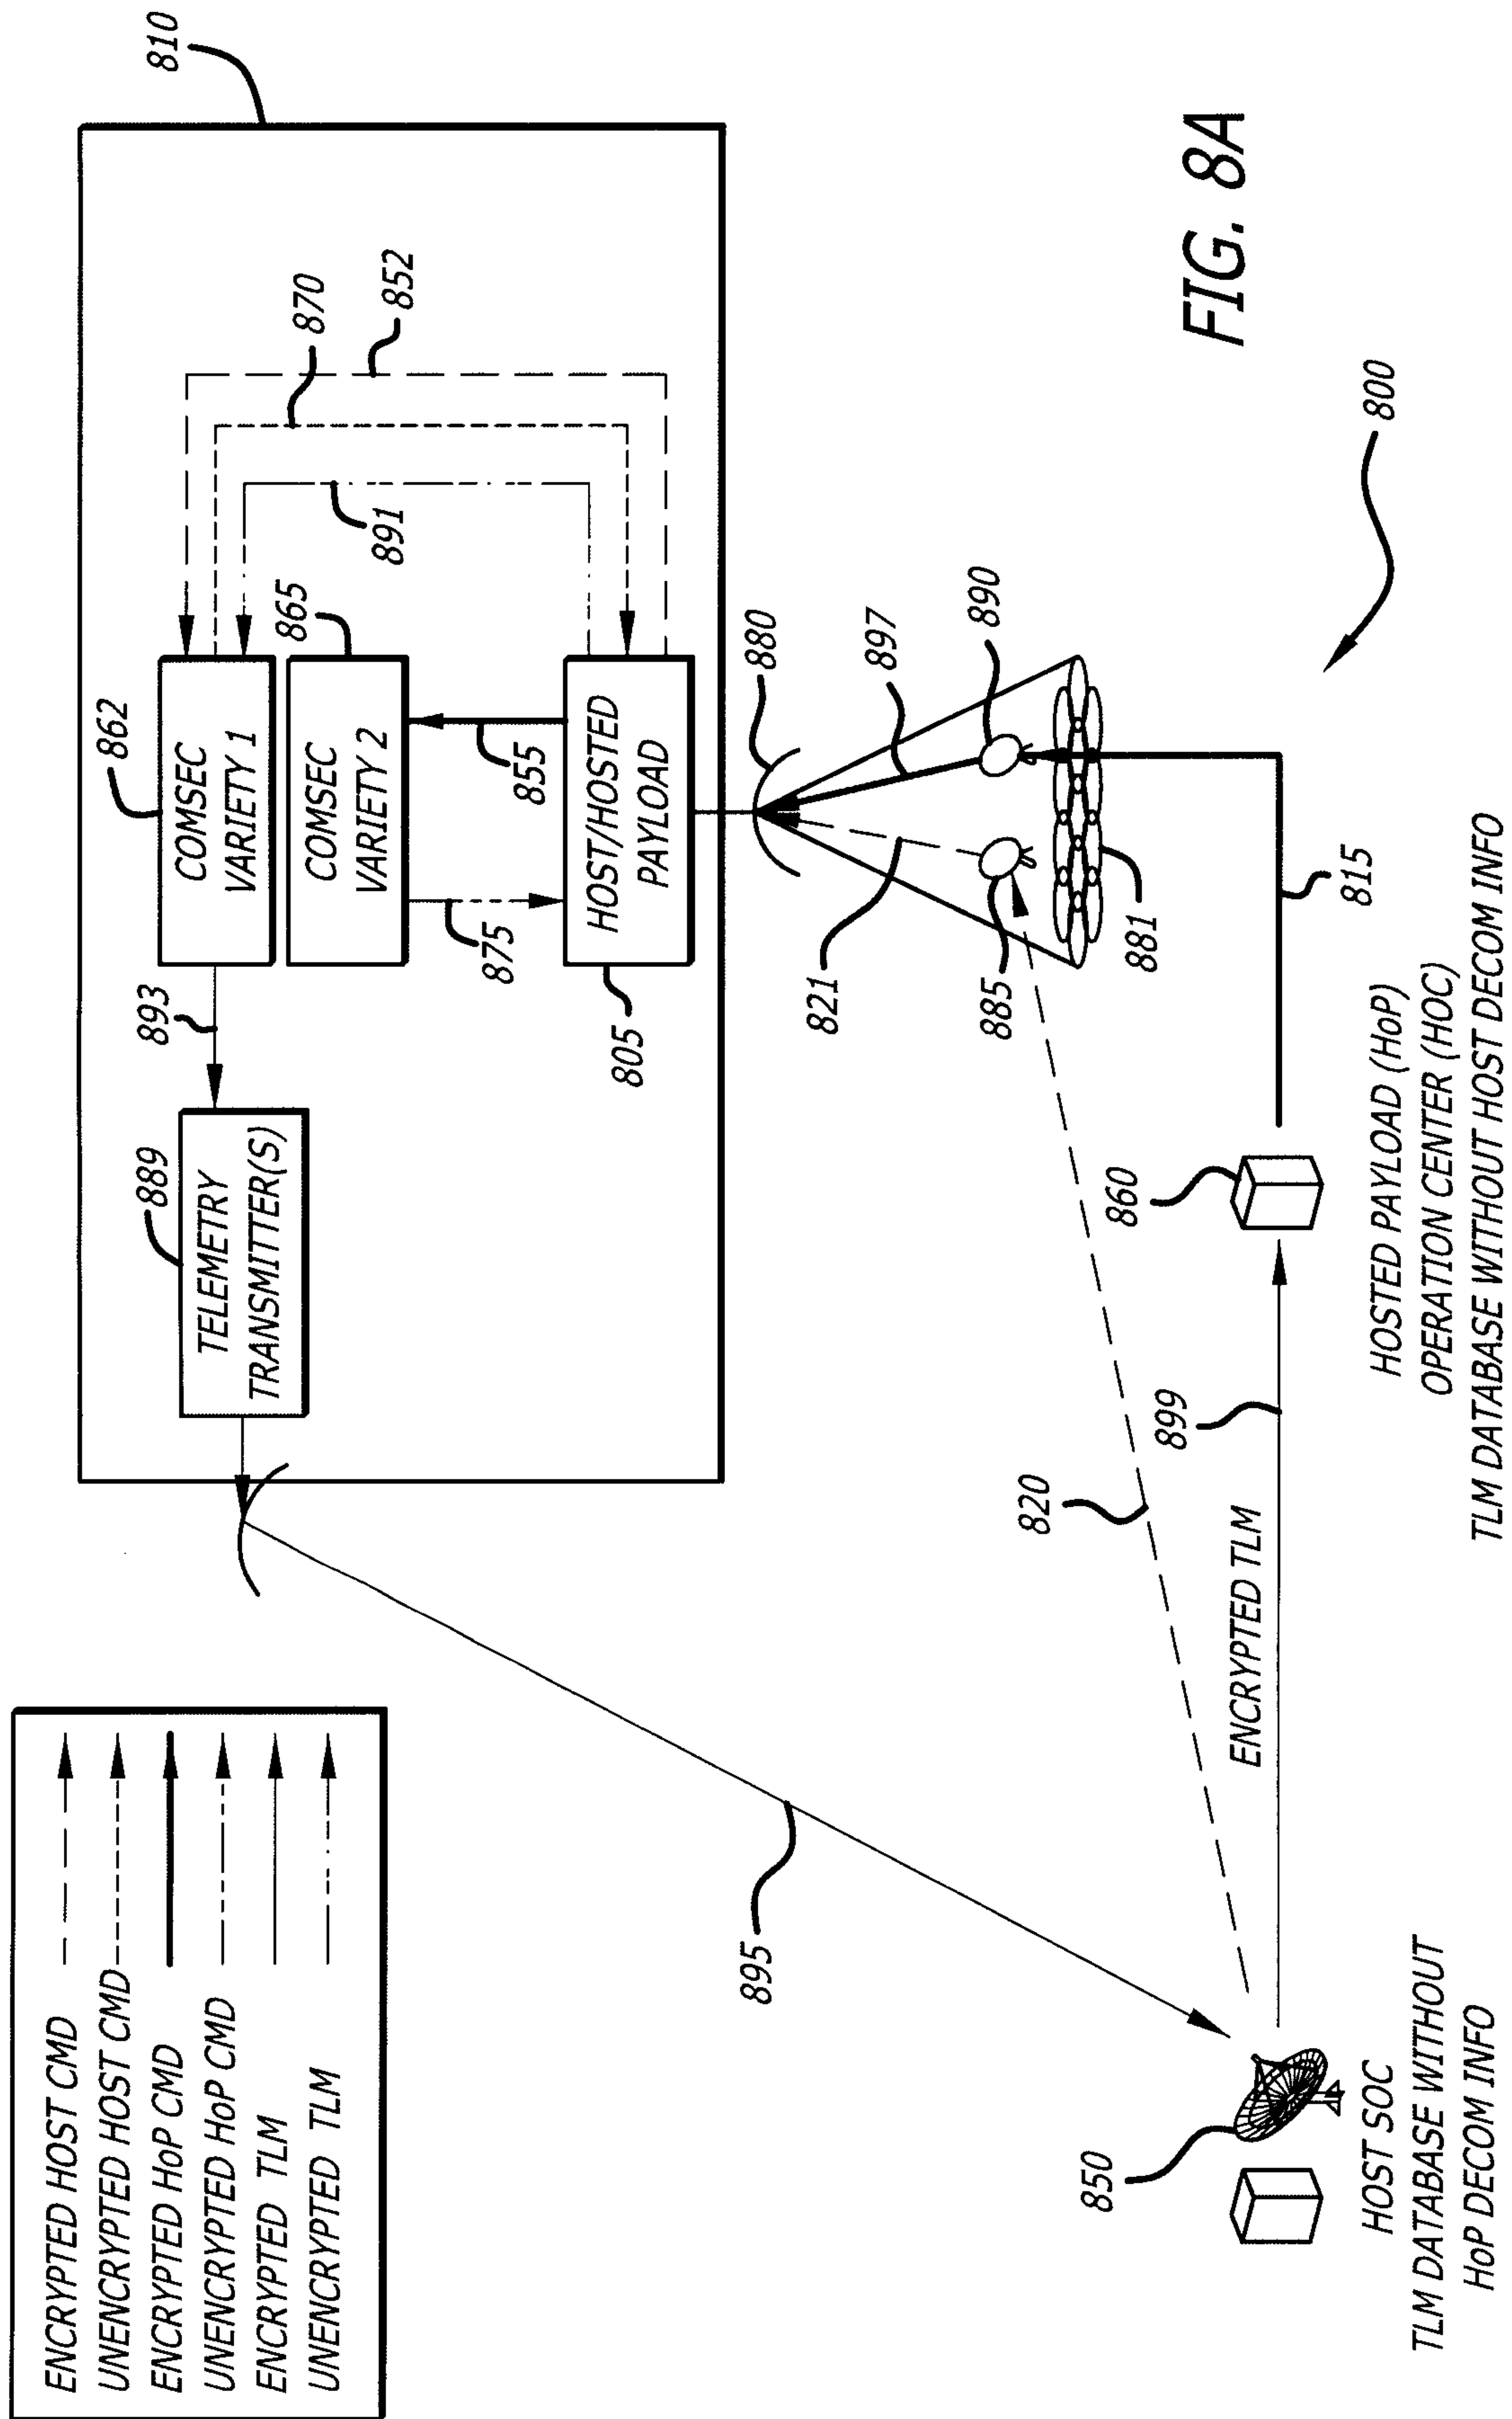


FIG. 7H





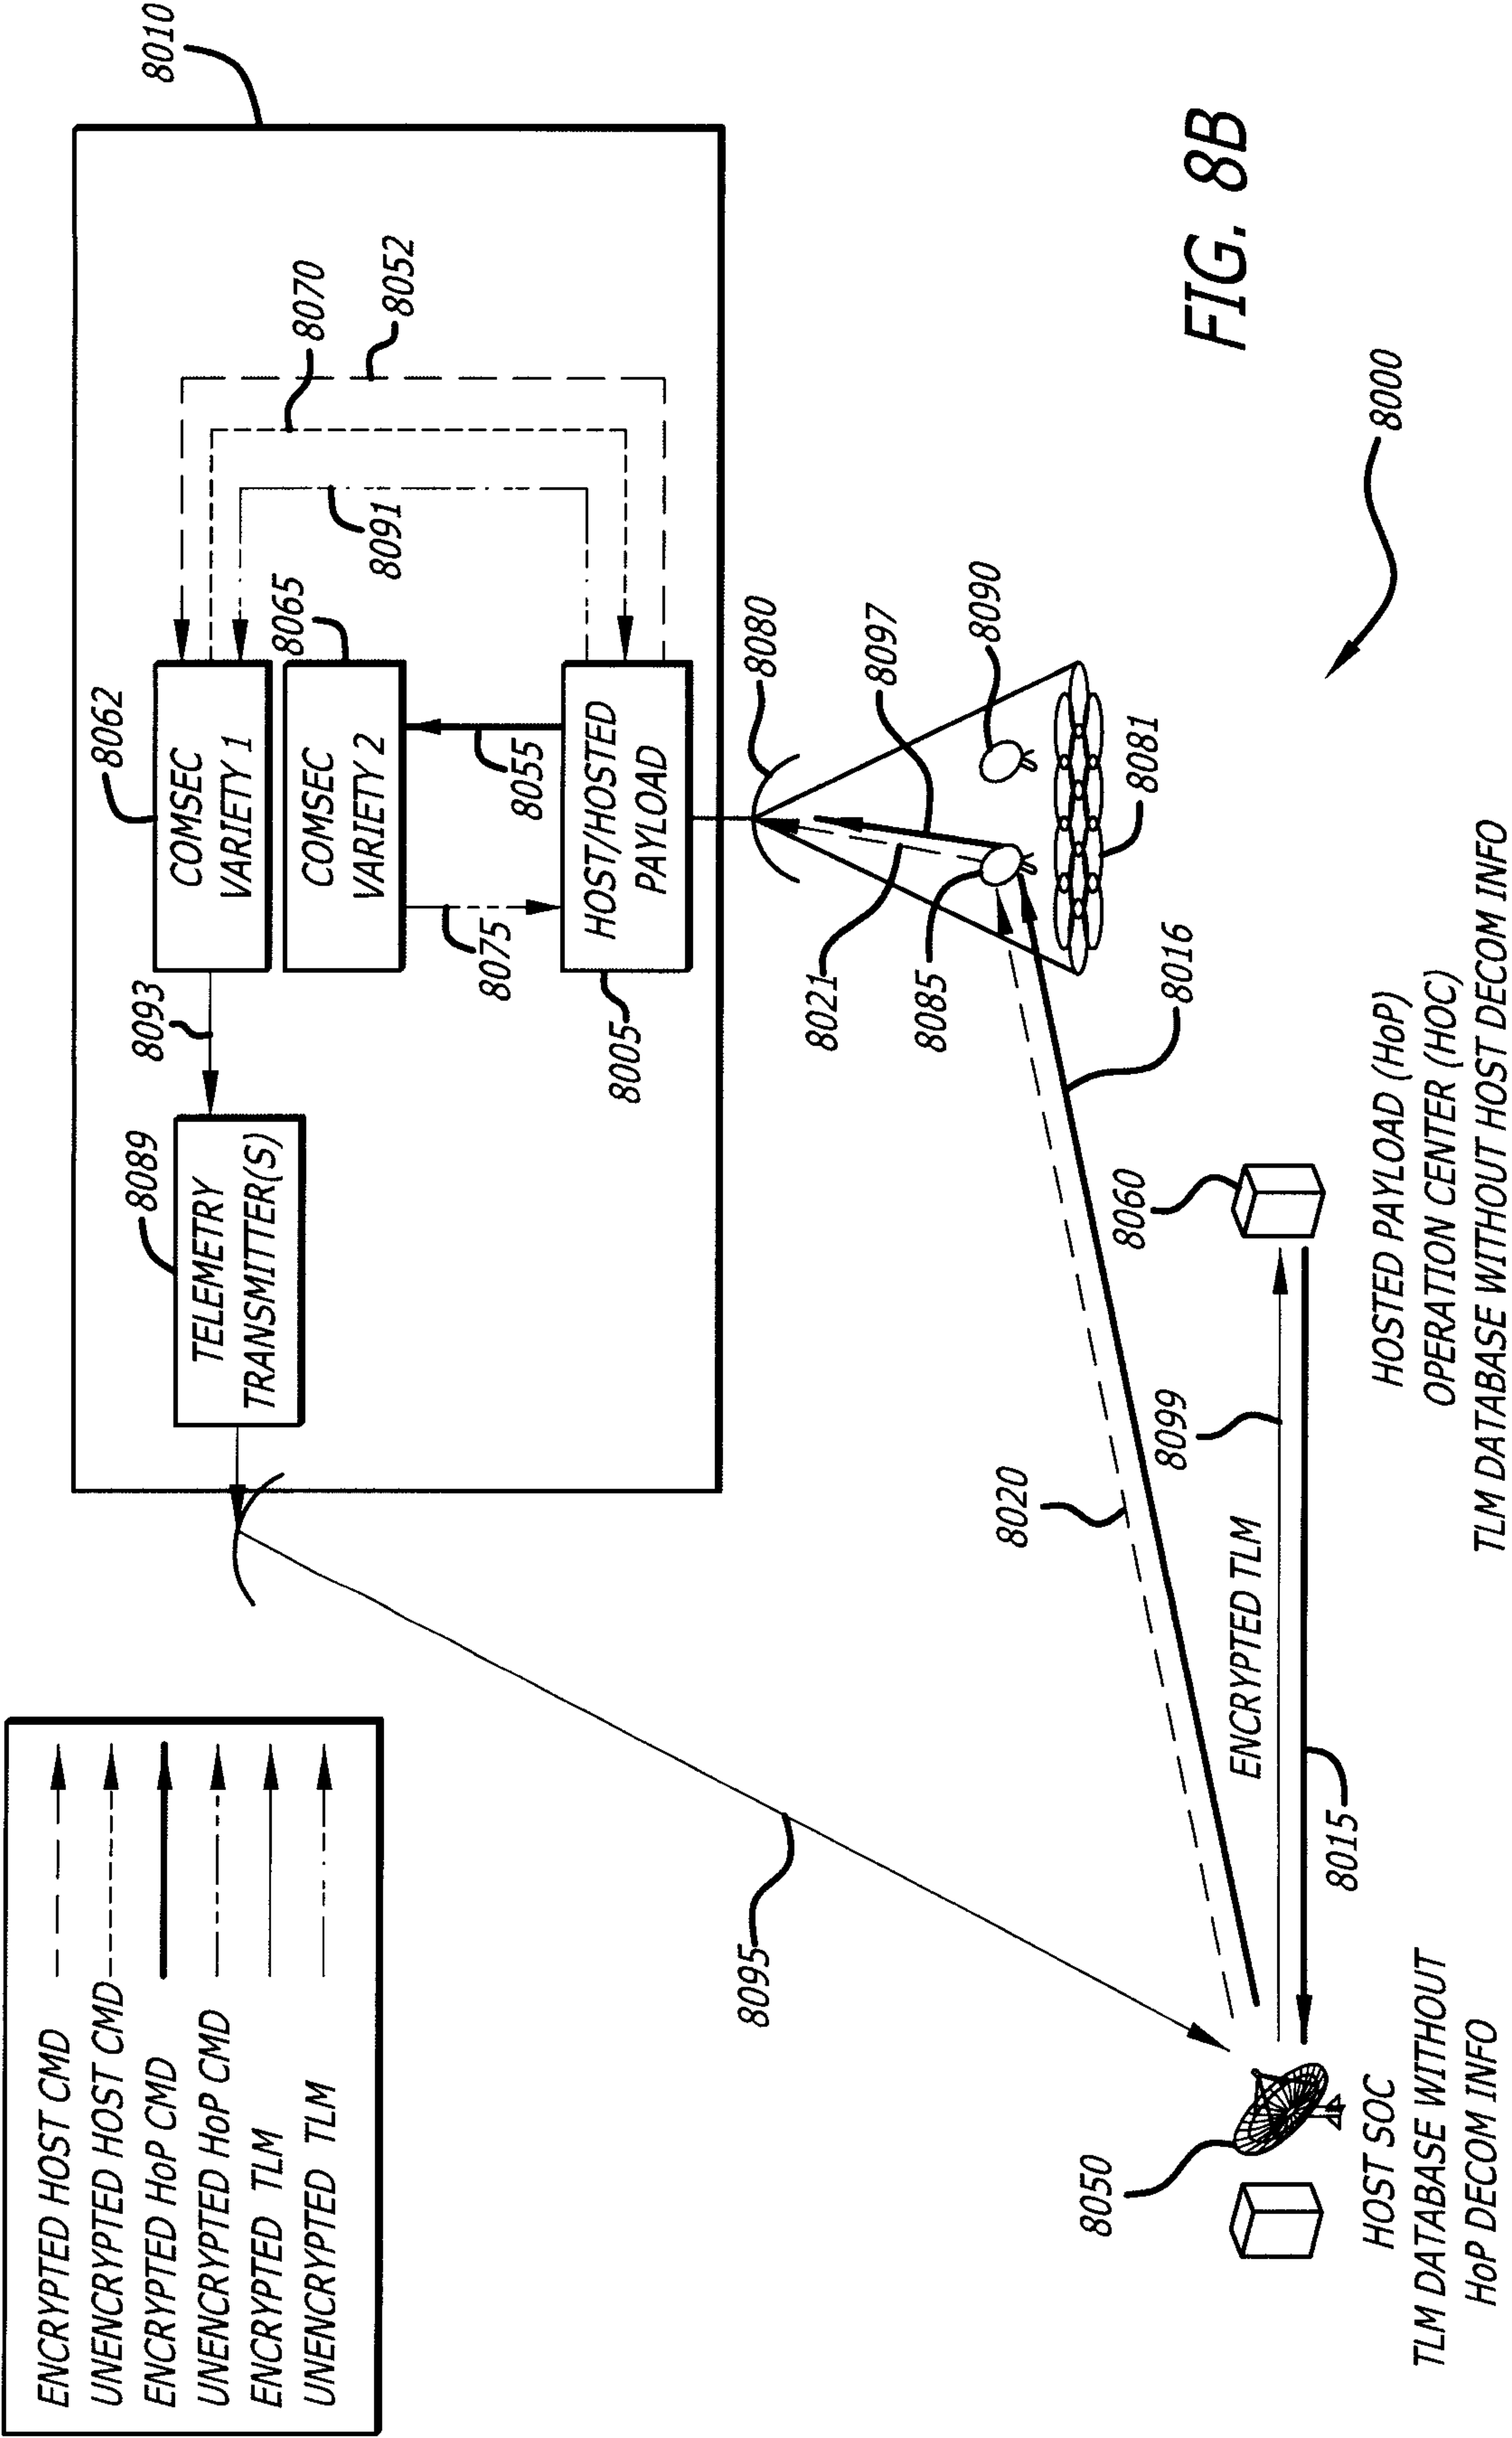


FIG. 9A

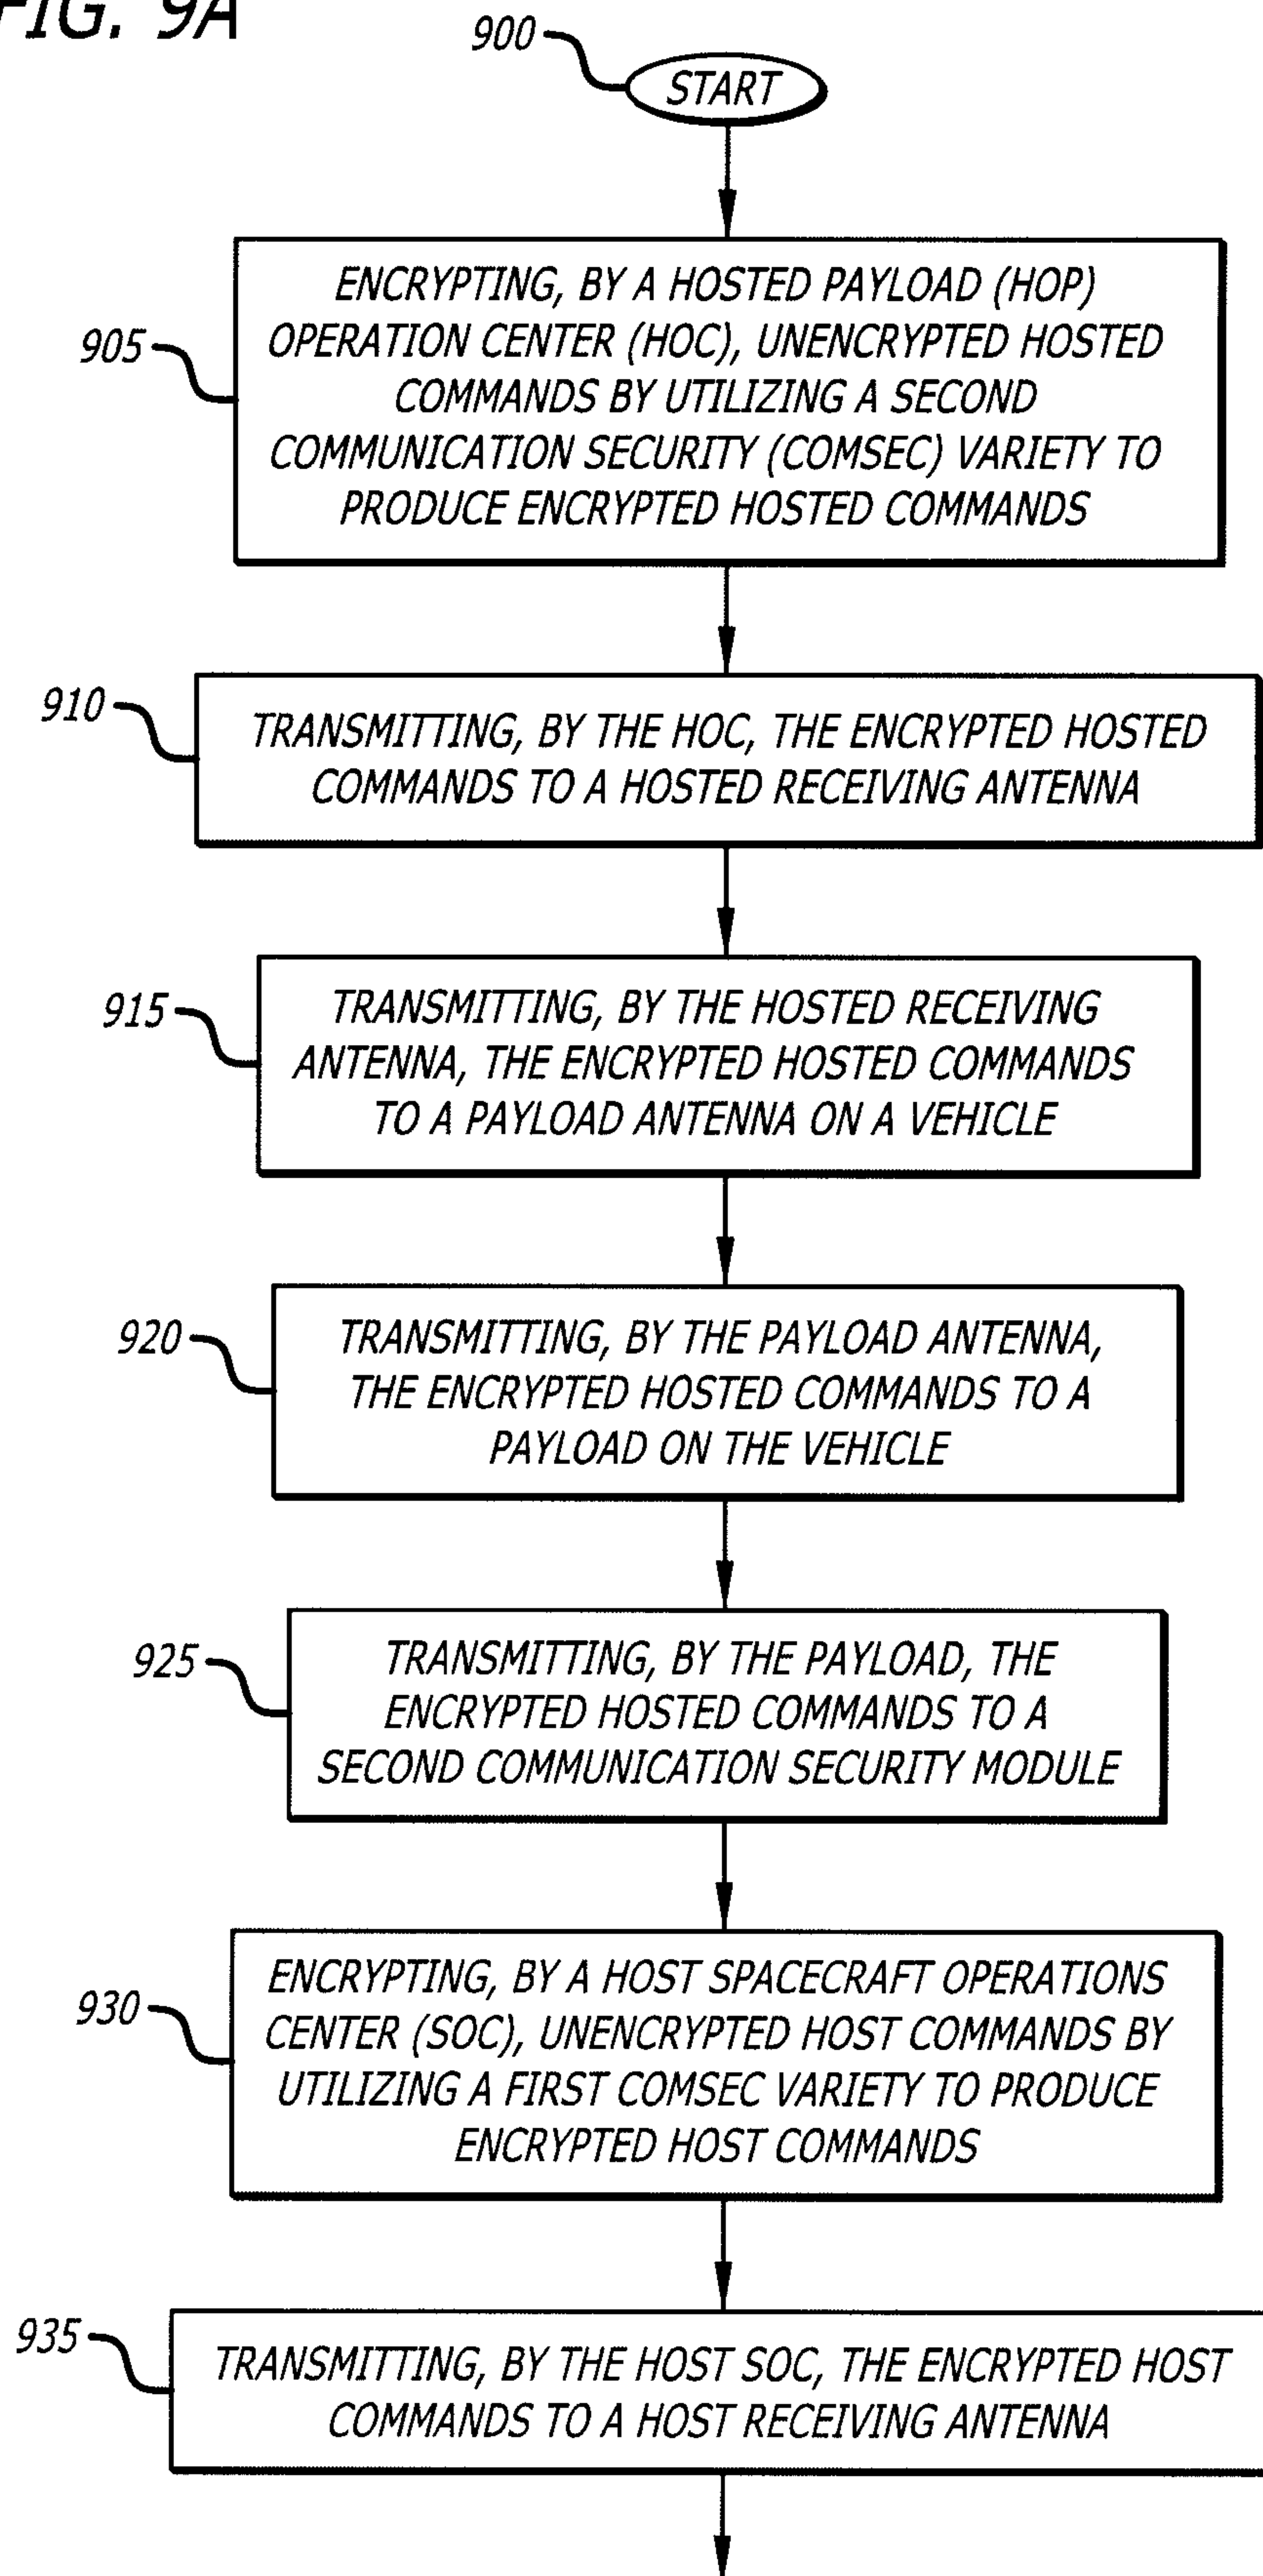
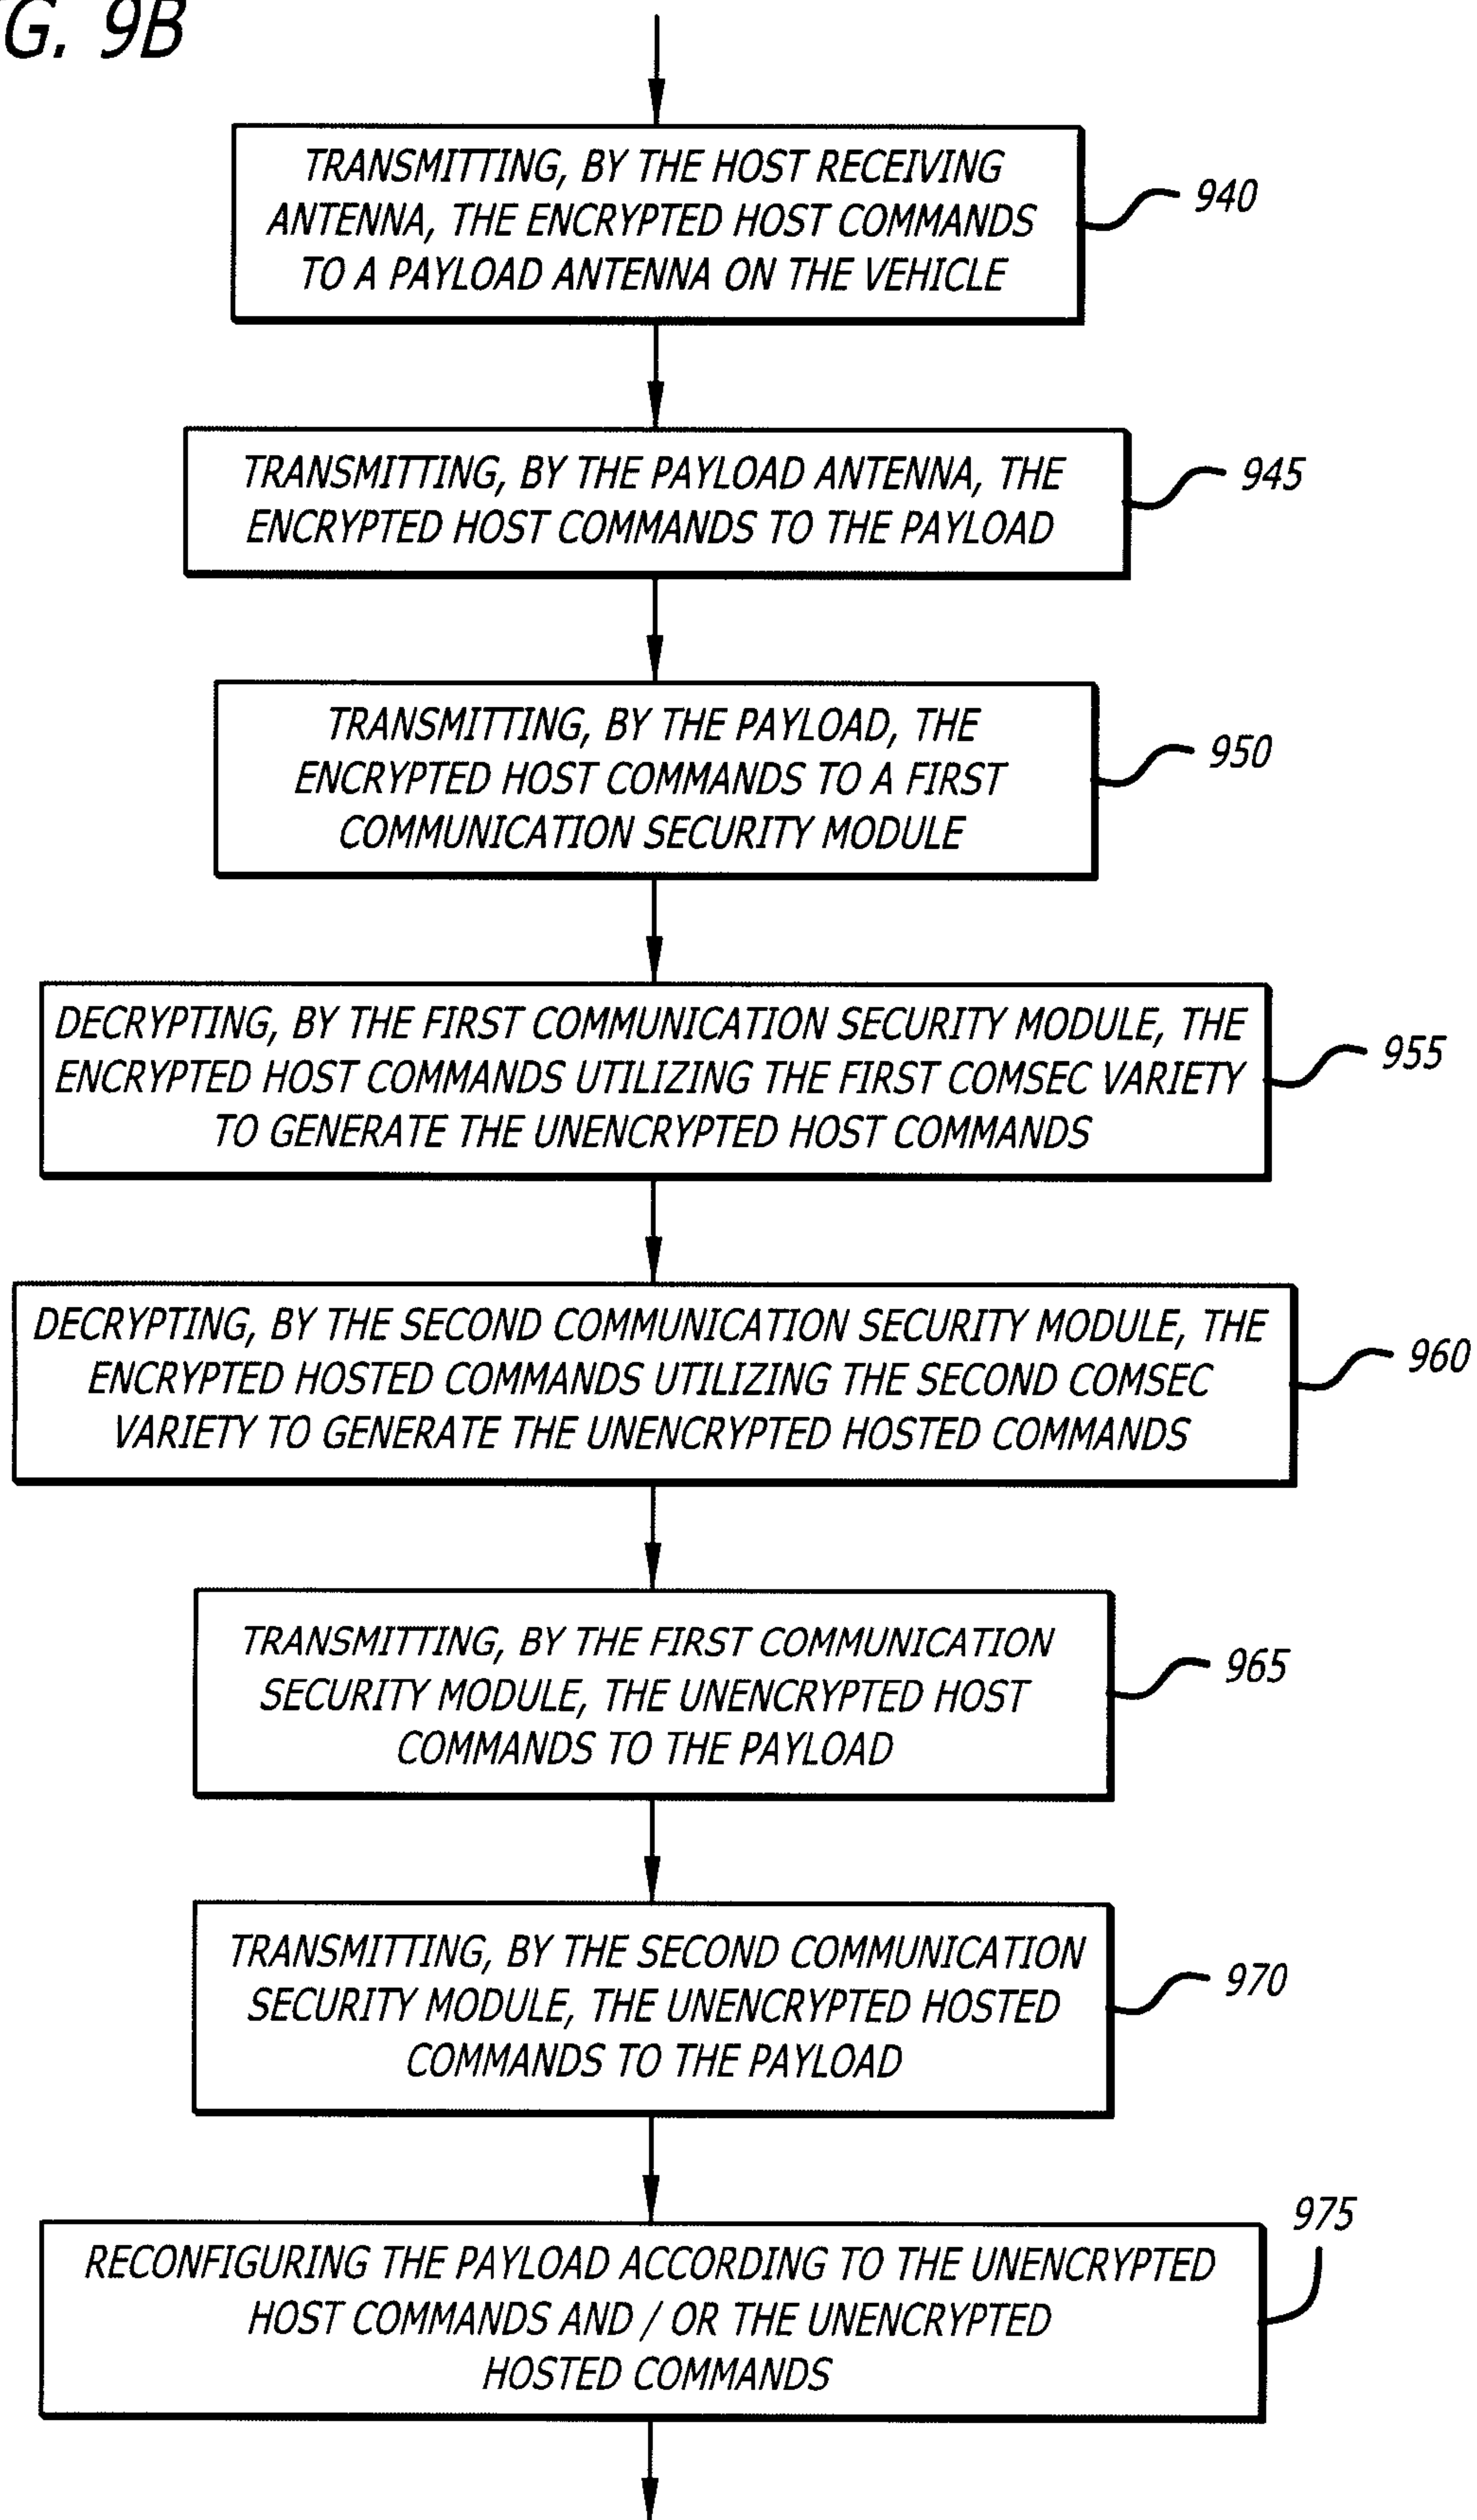


FIG. 9B



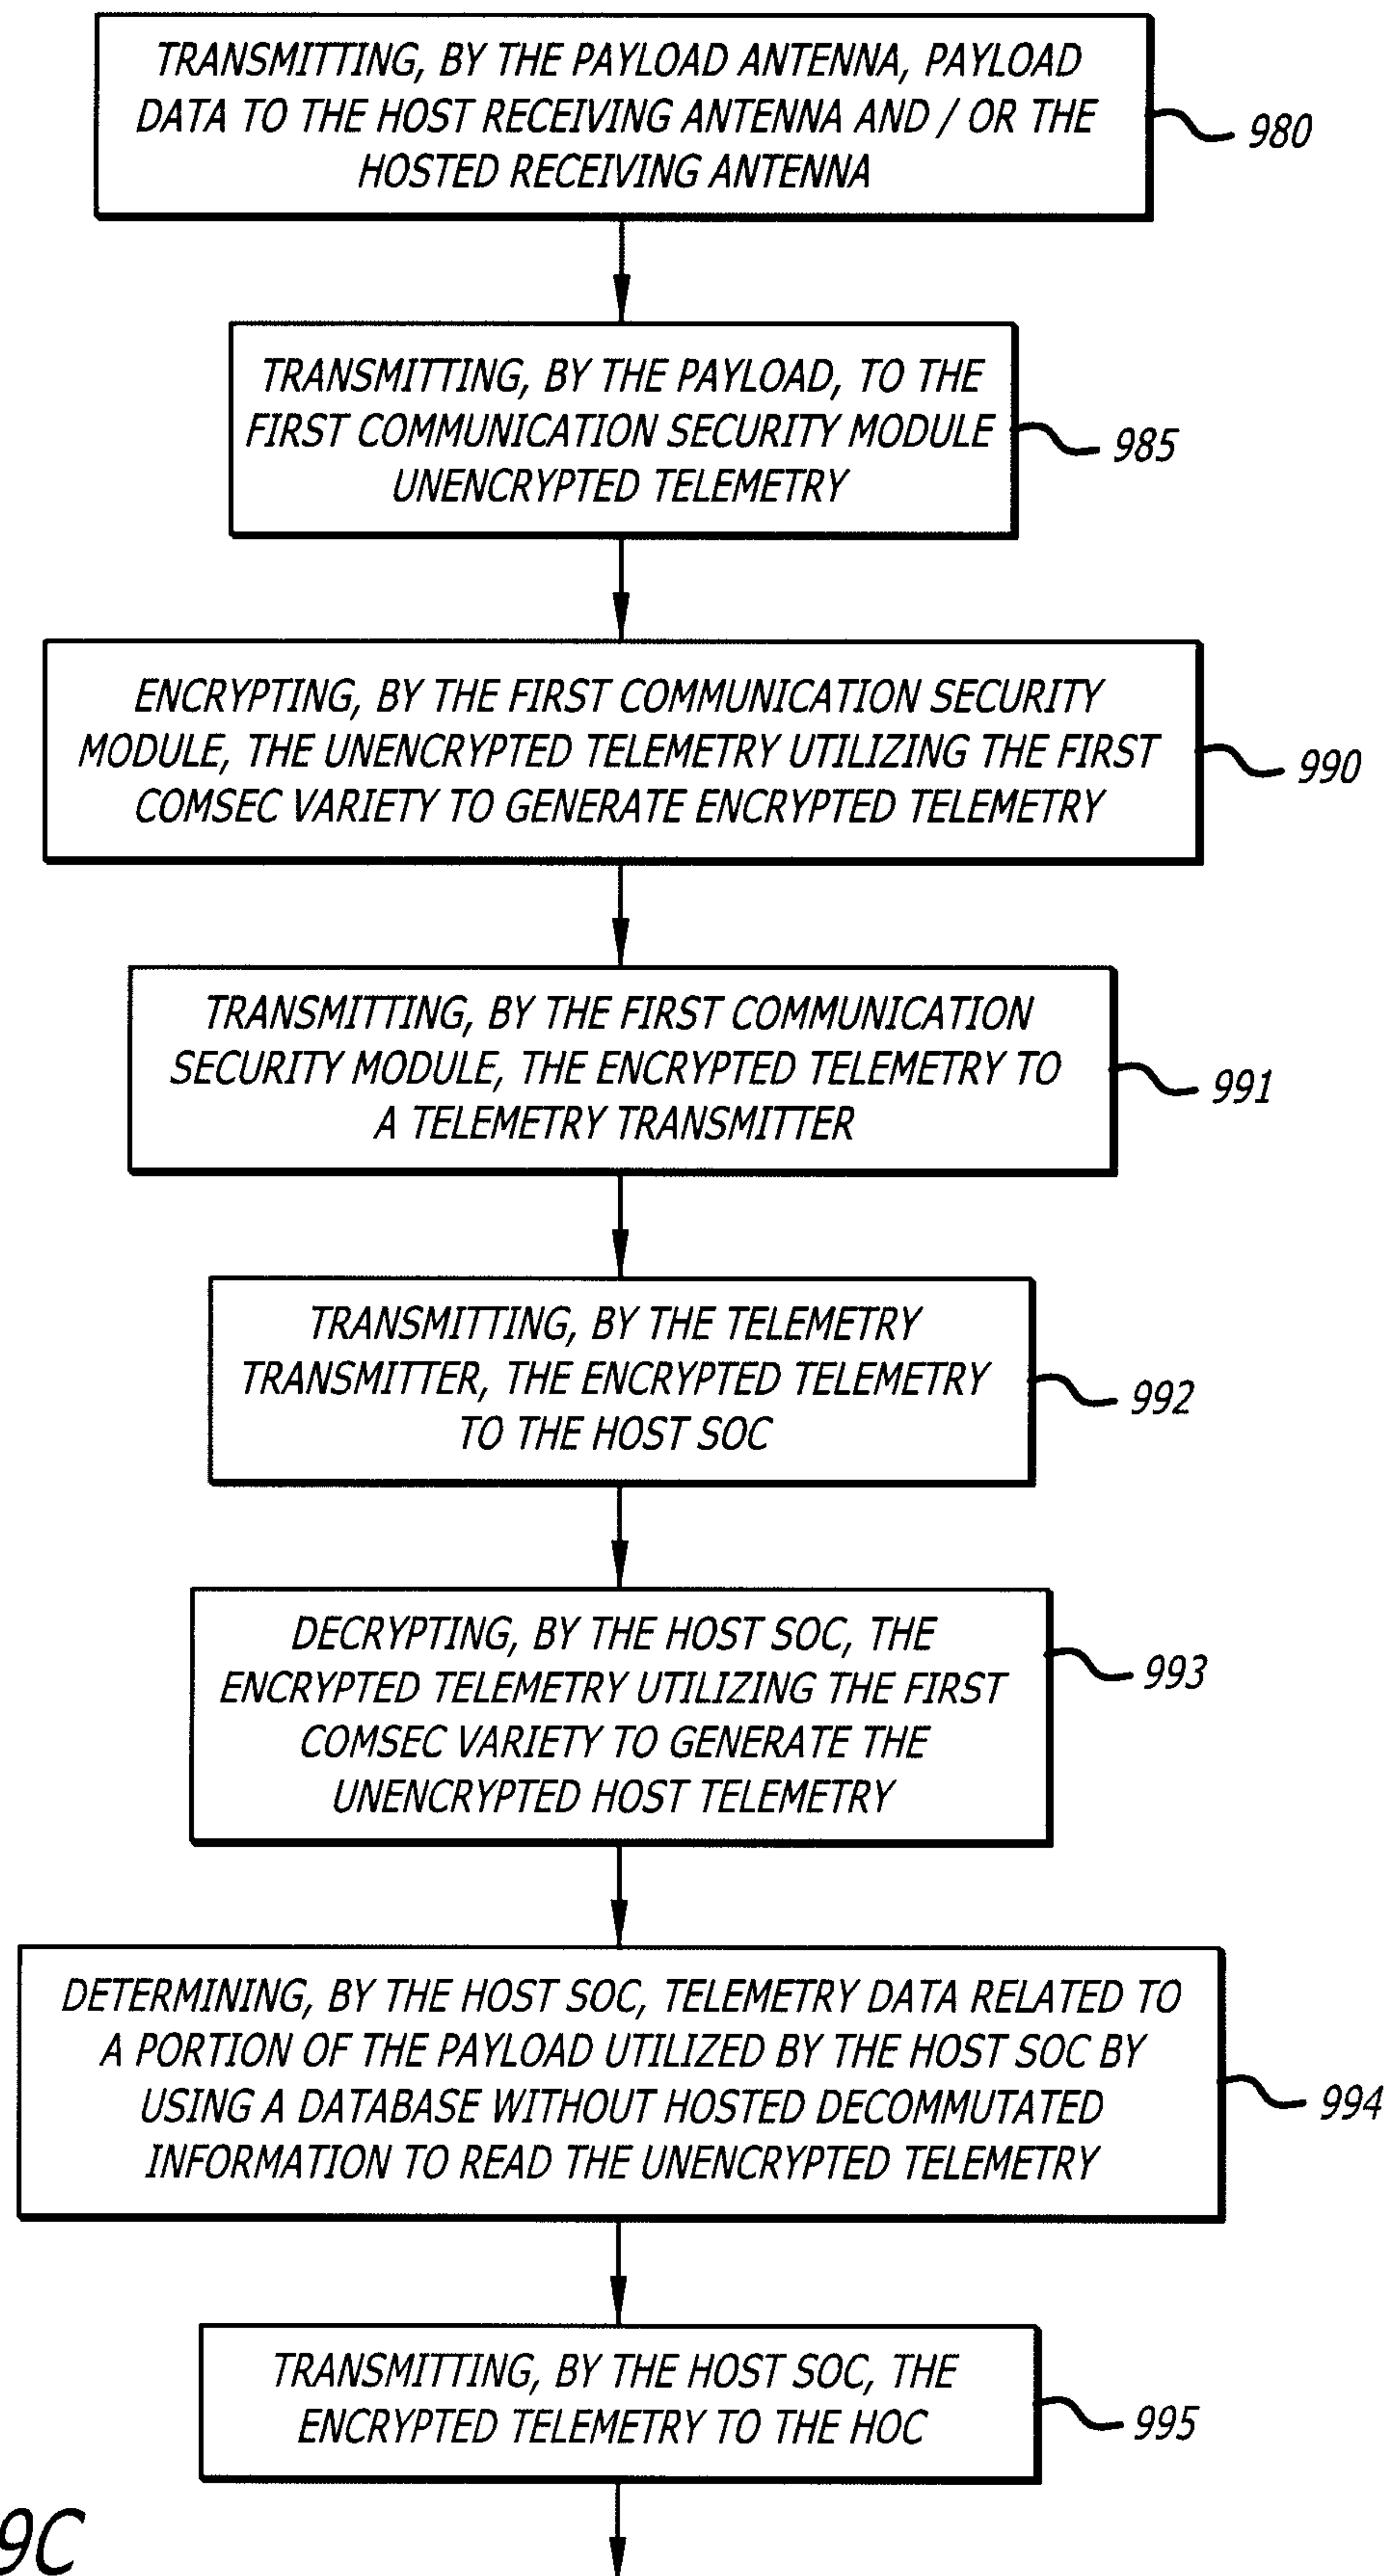


FIG. 9C

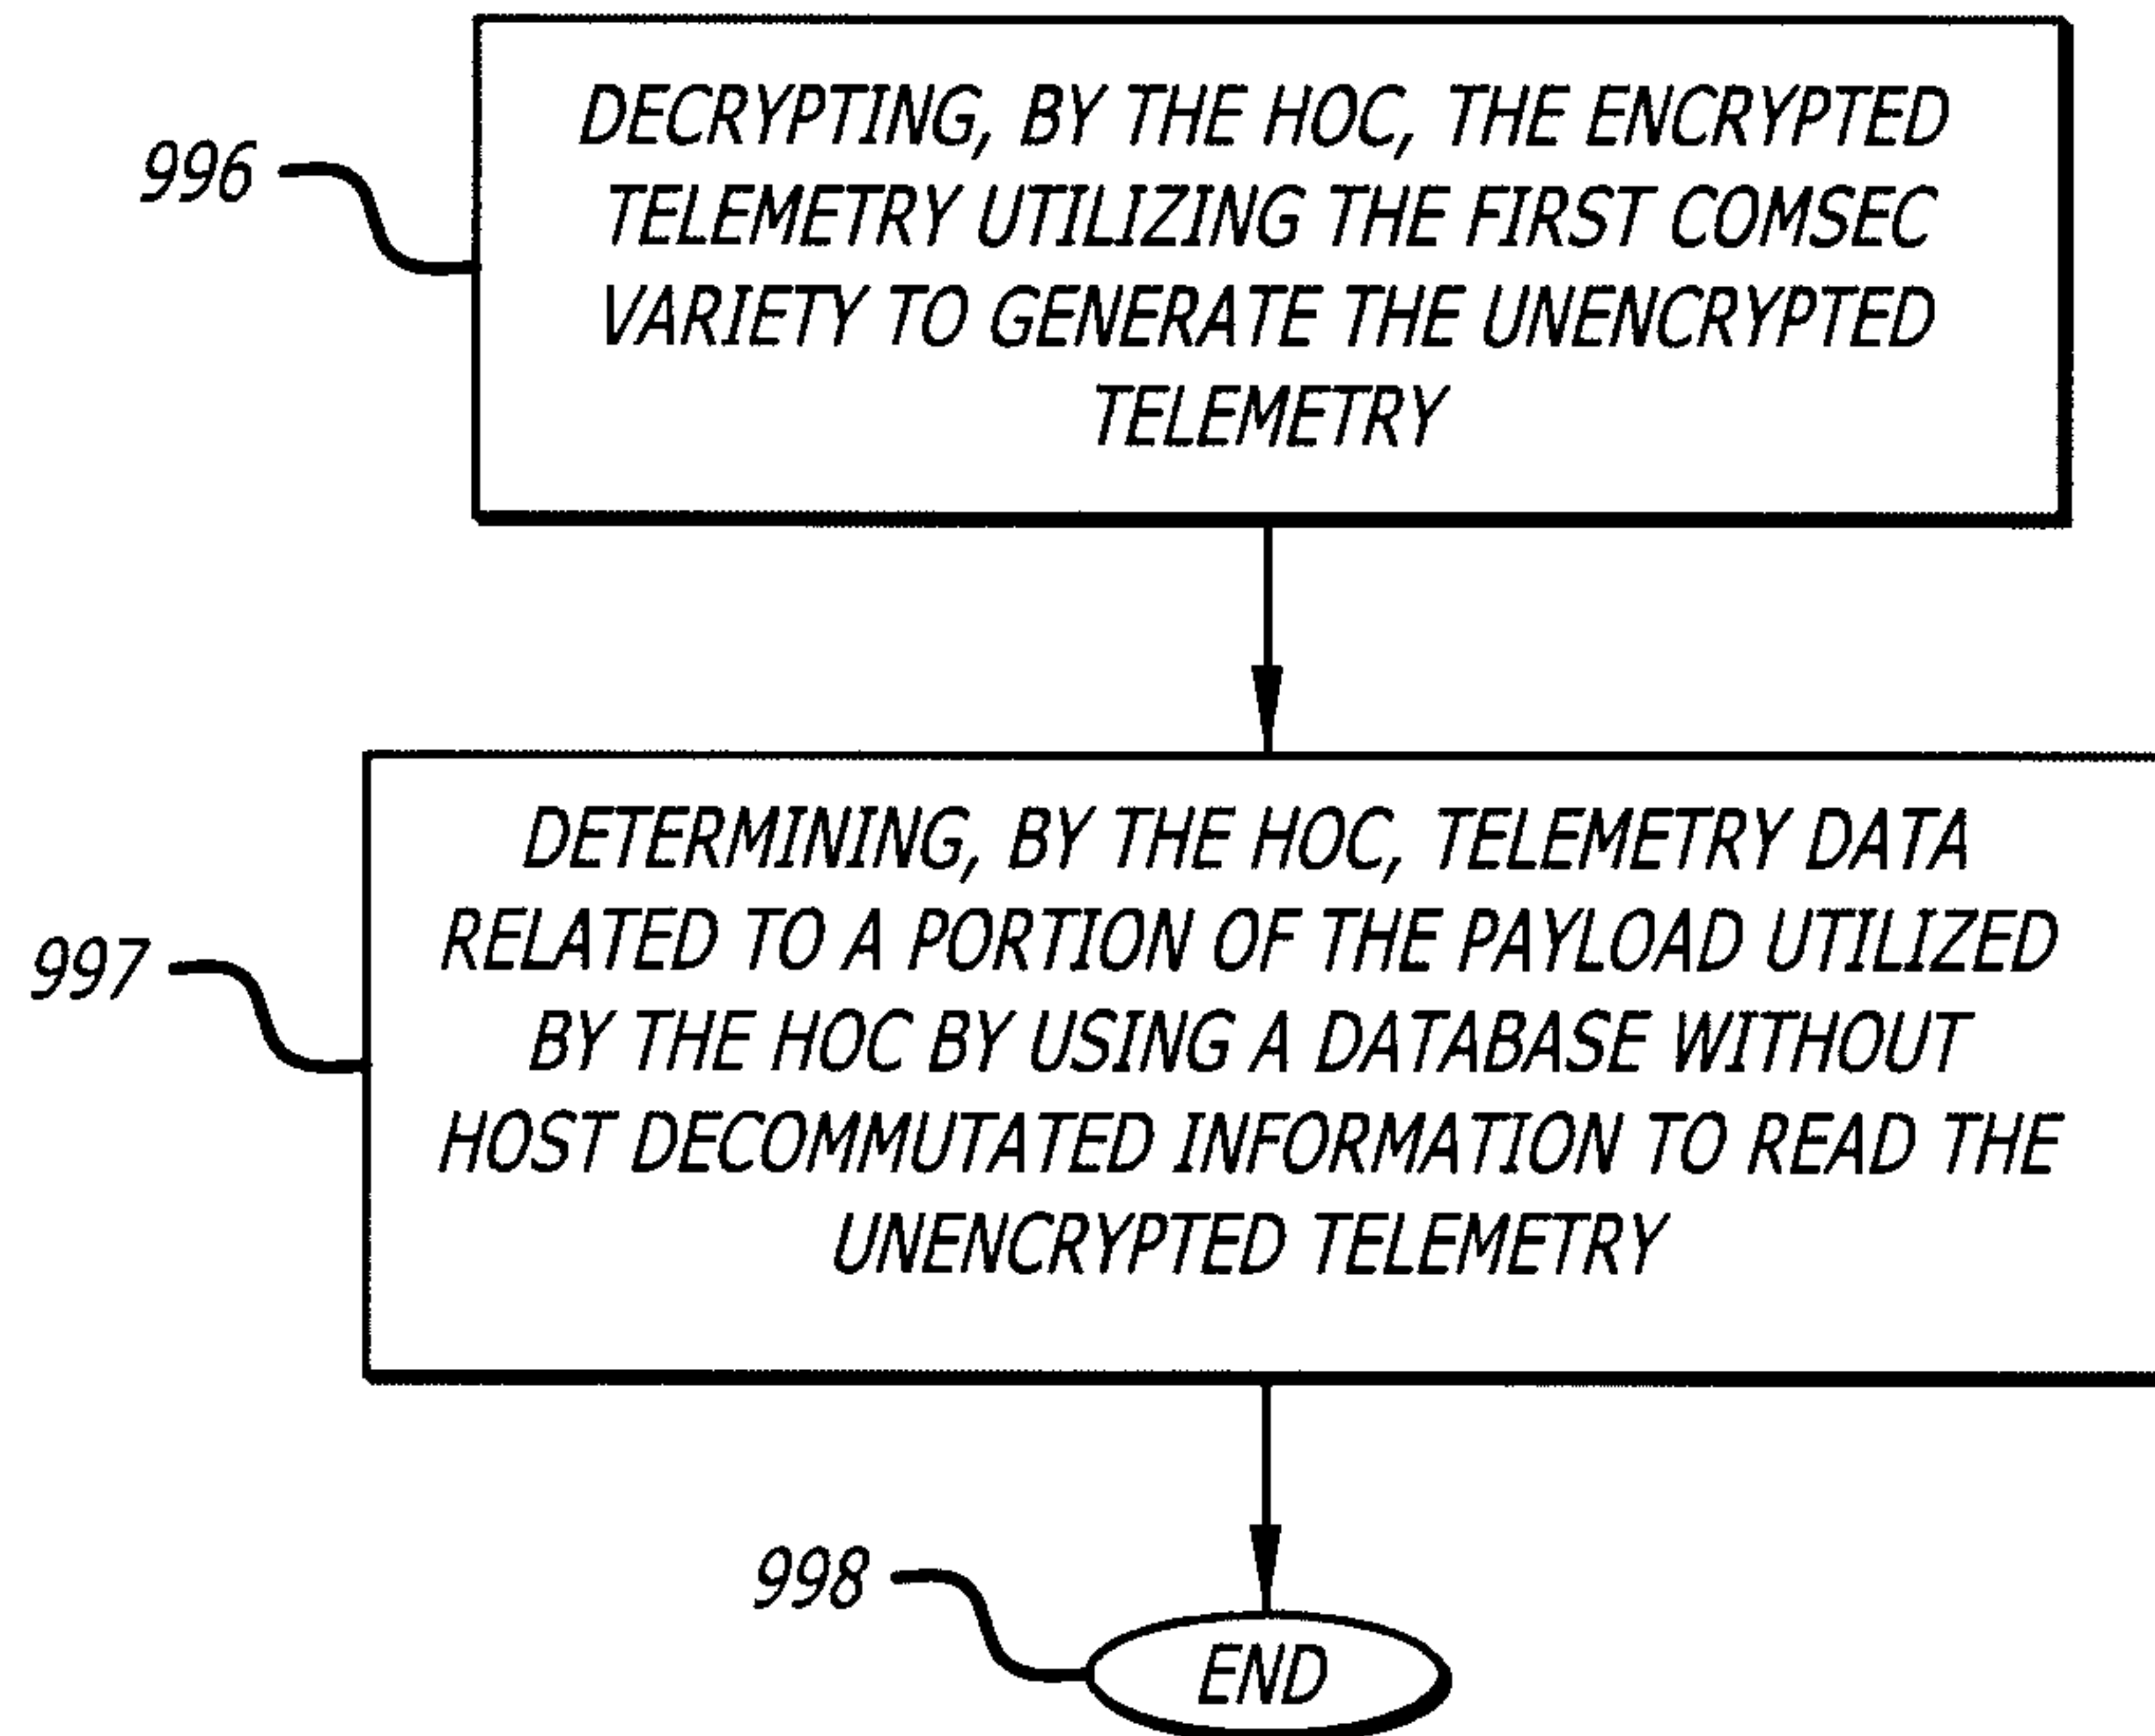


FIG. 9D

FIG. 9E

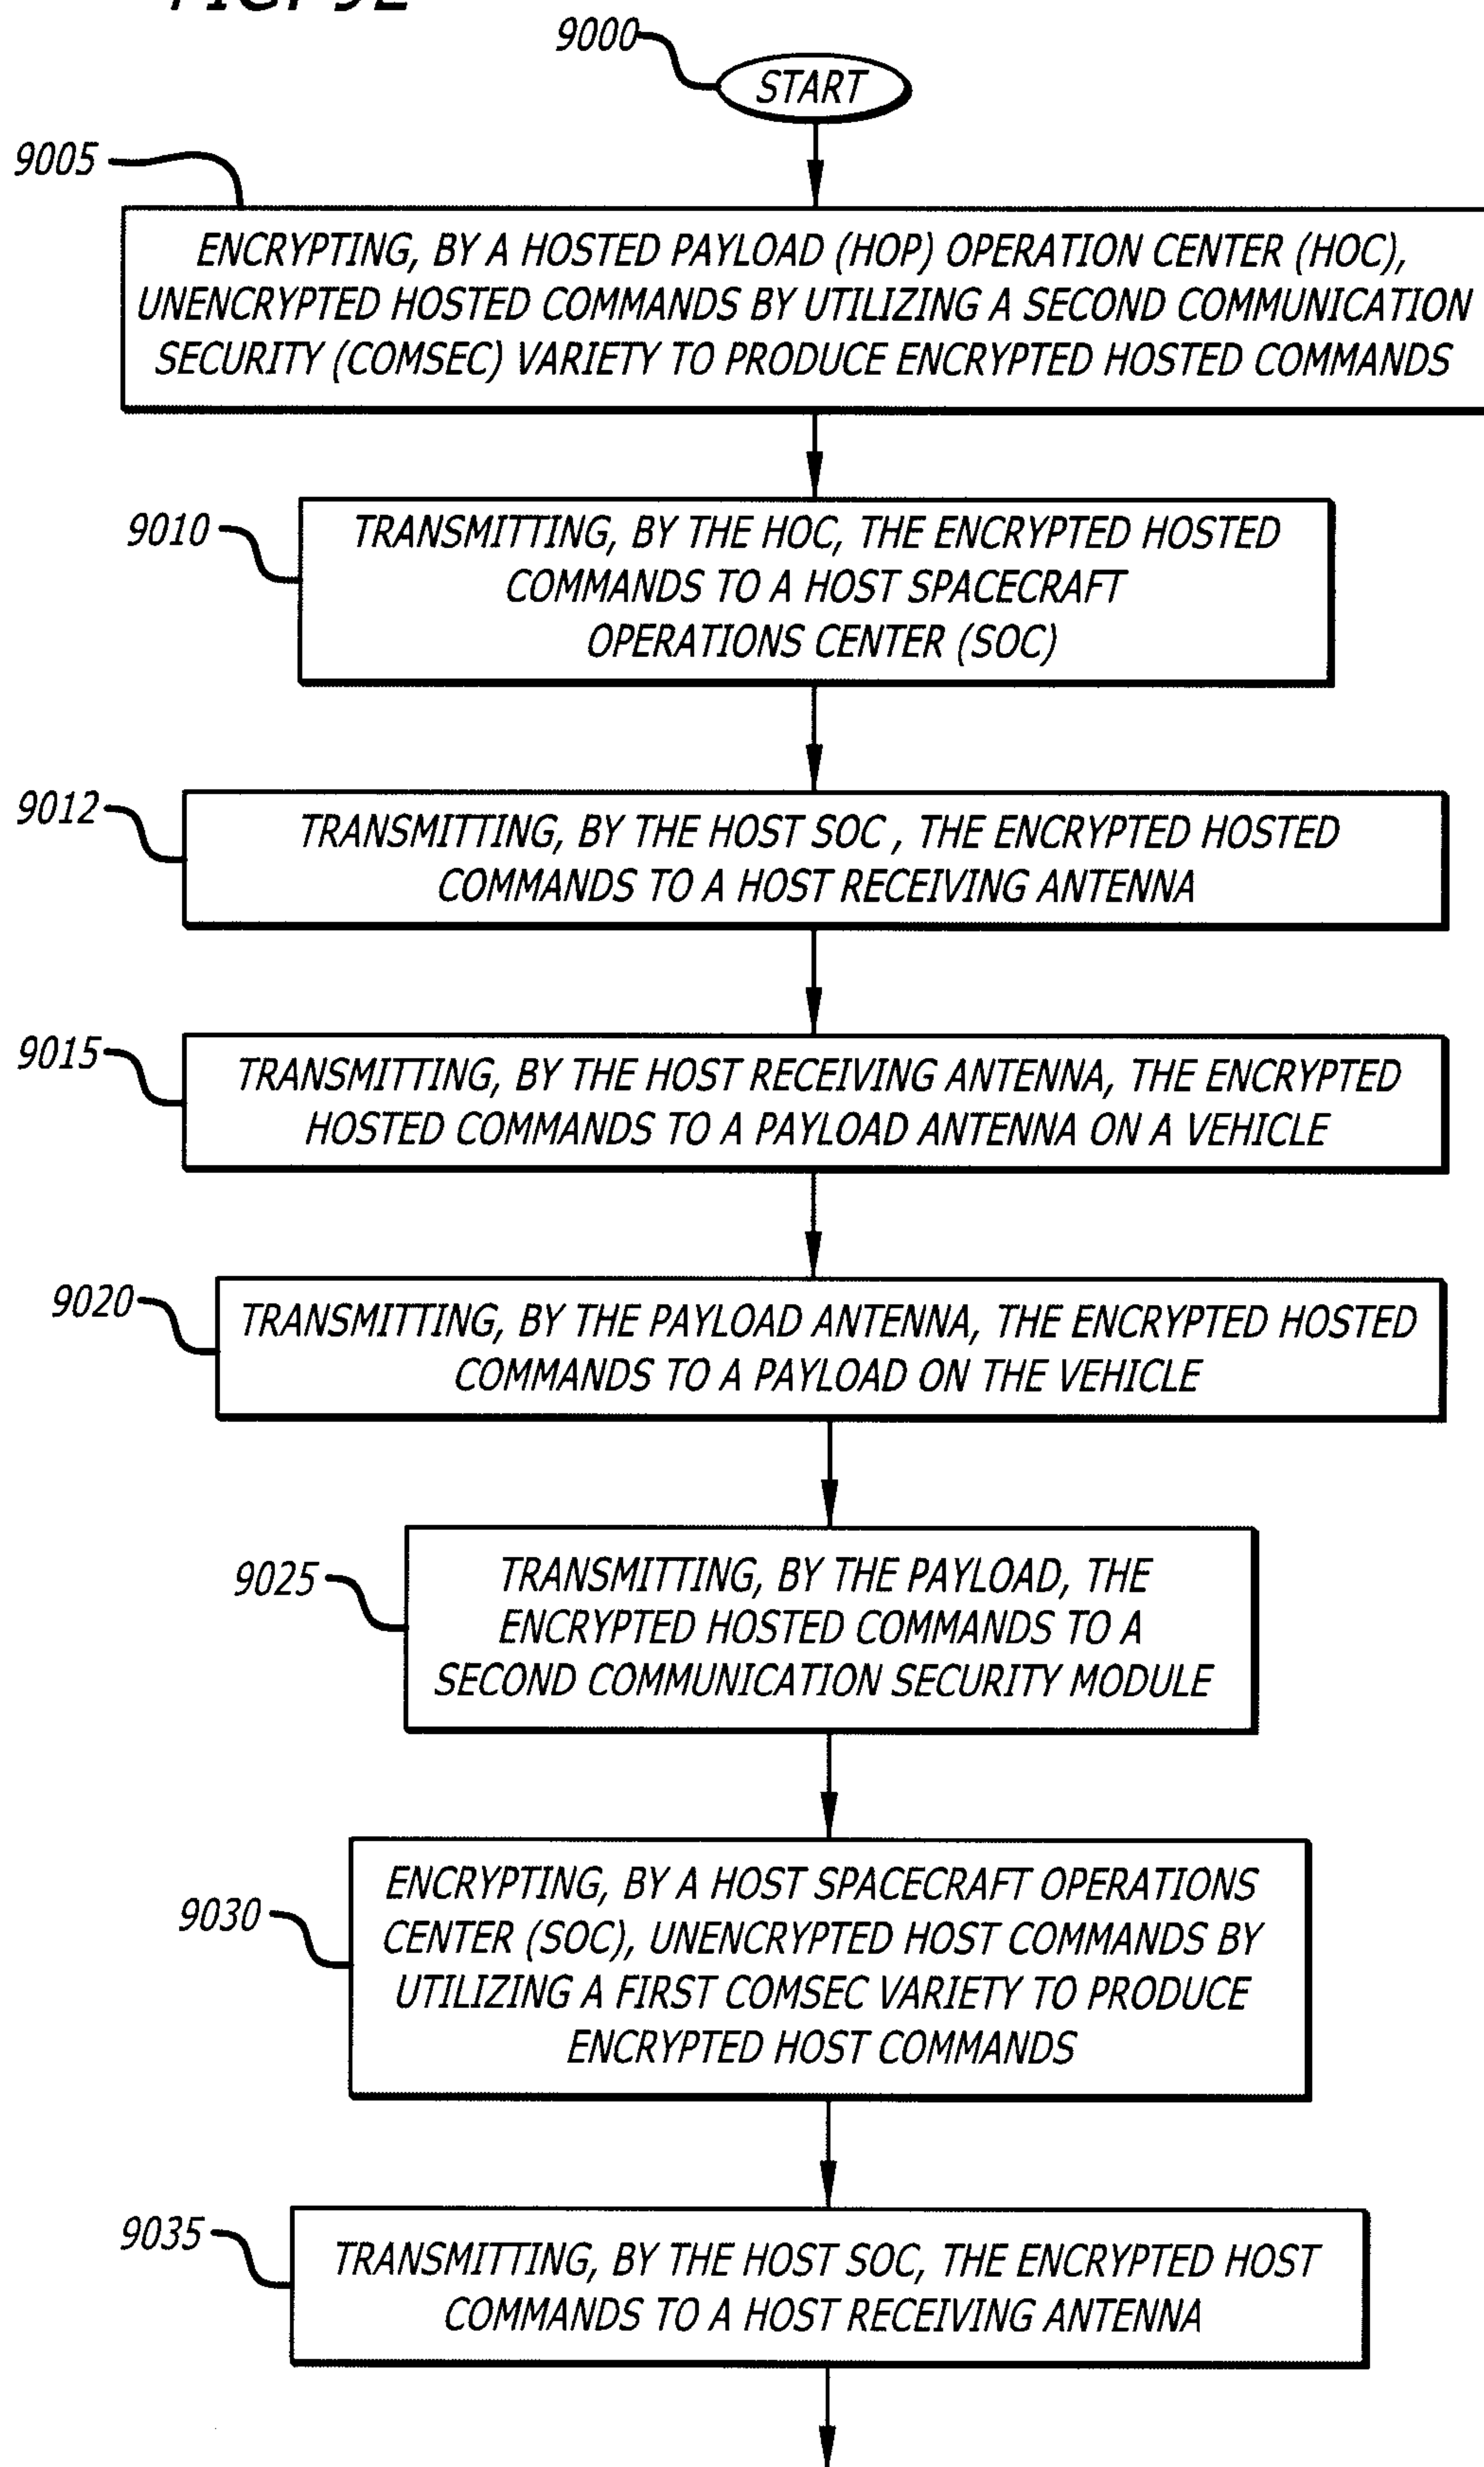
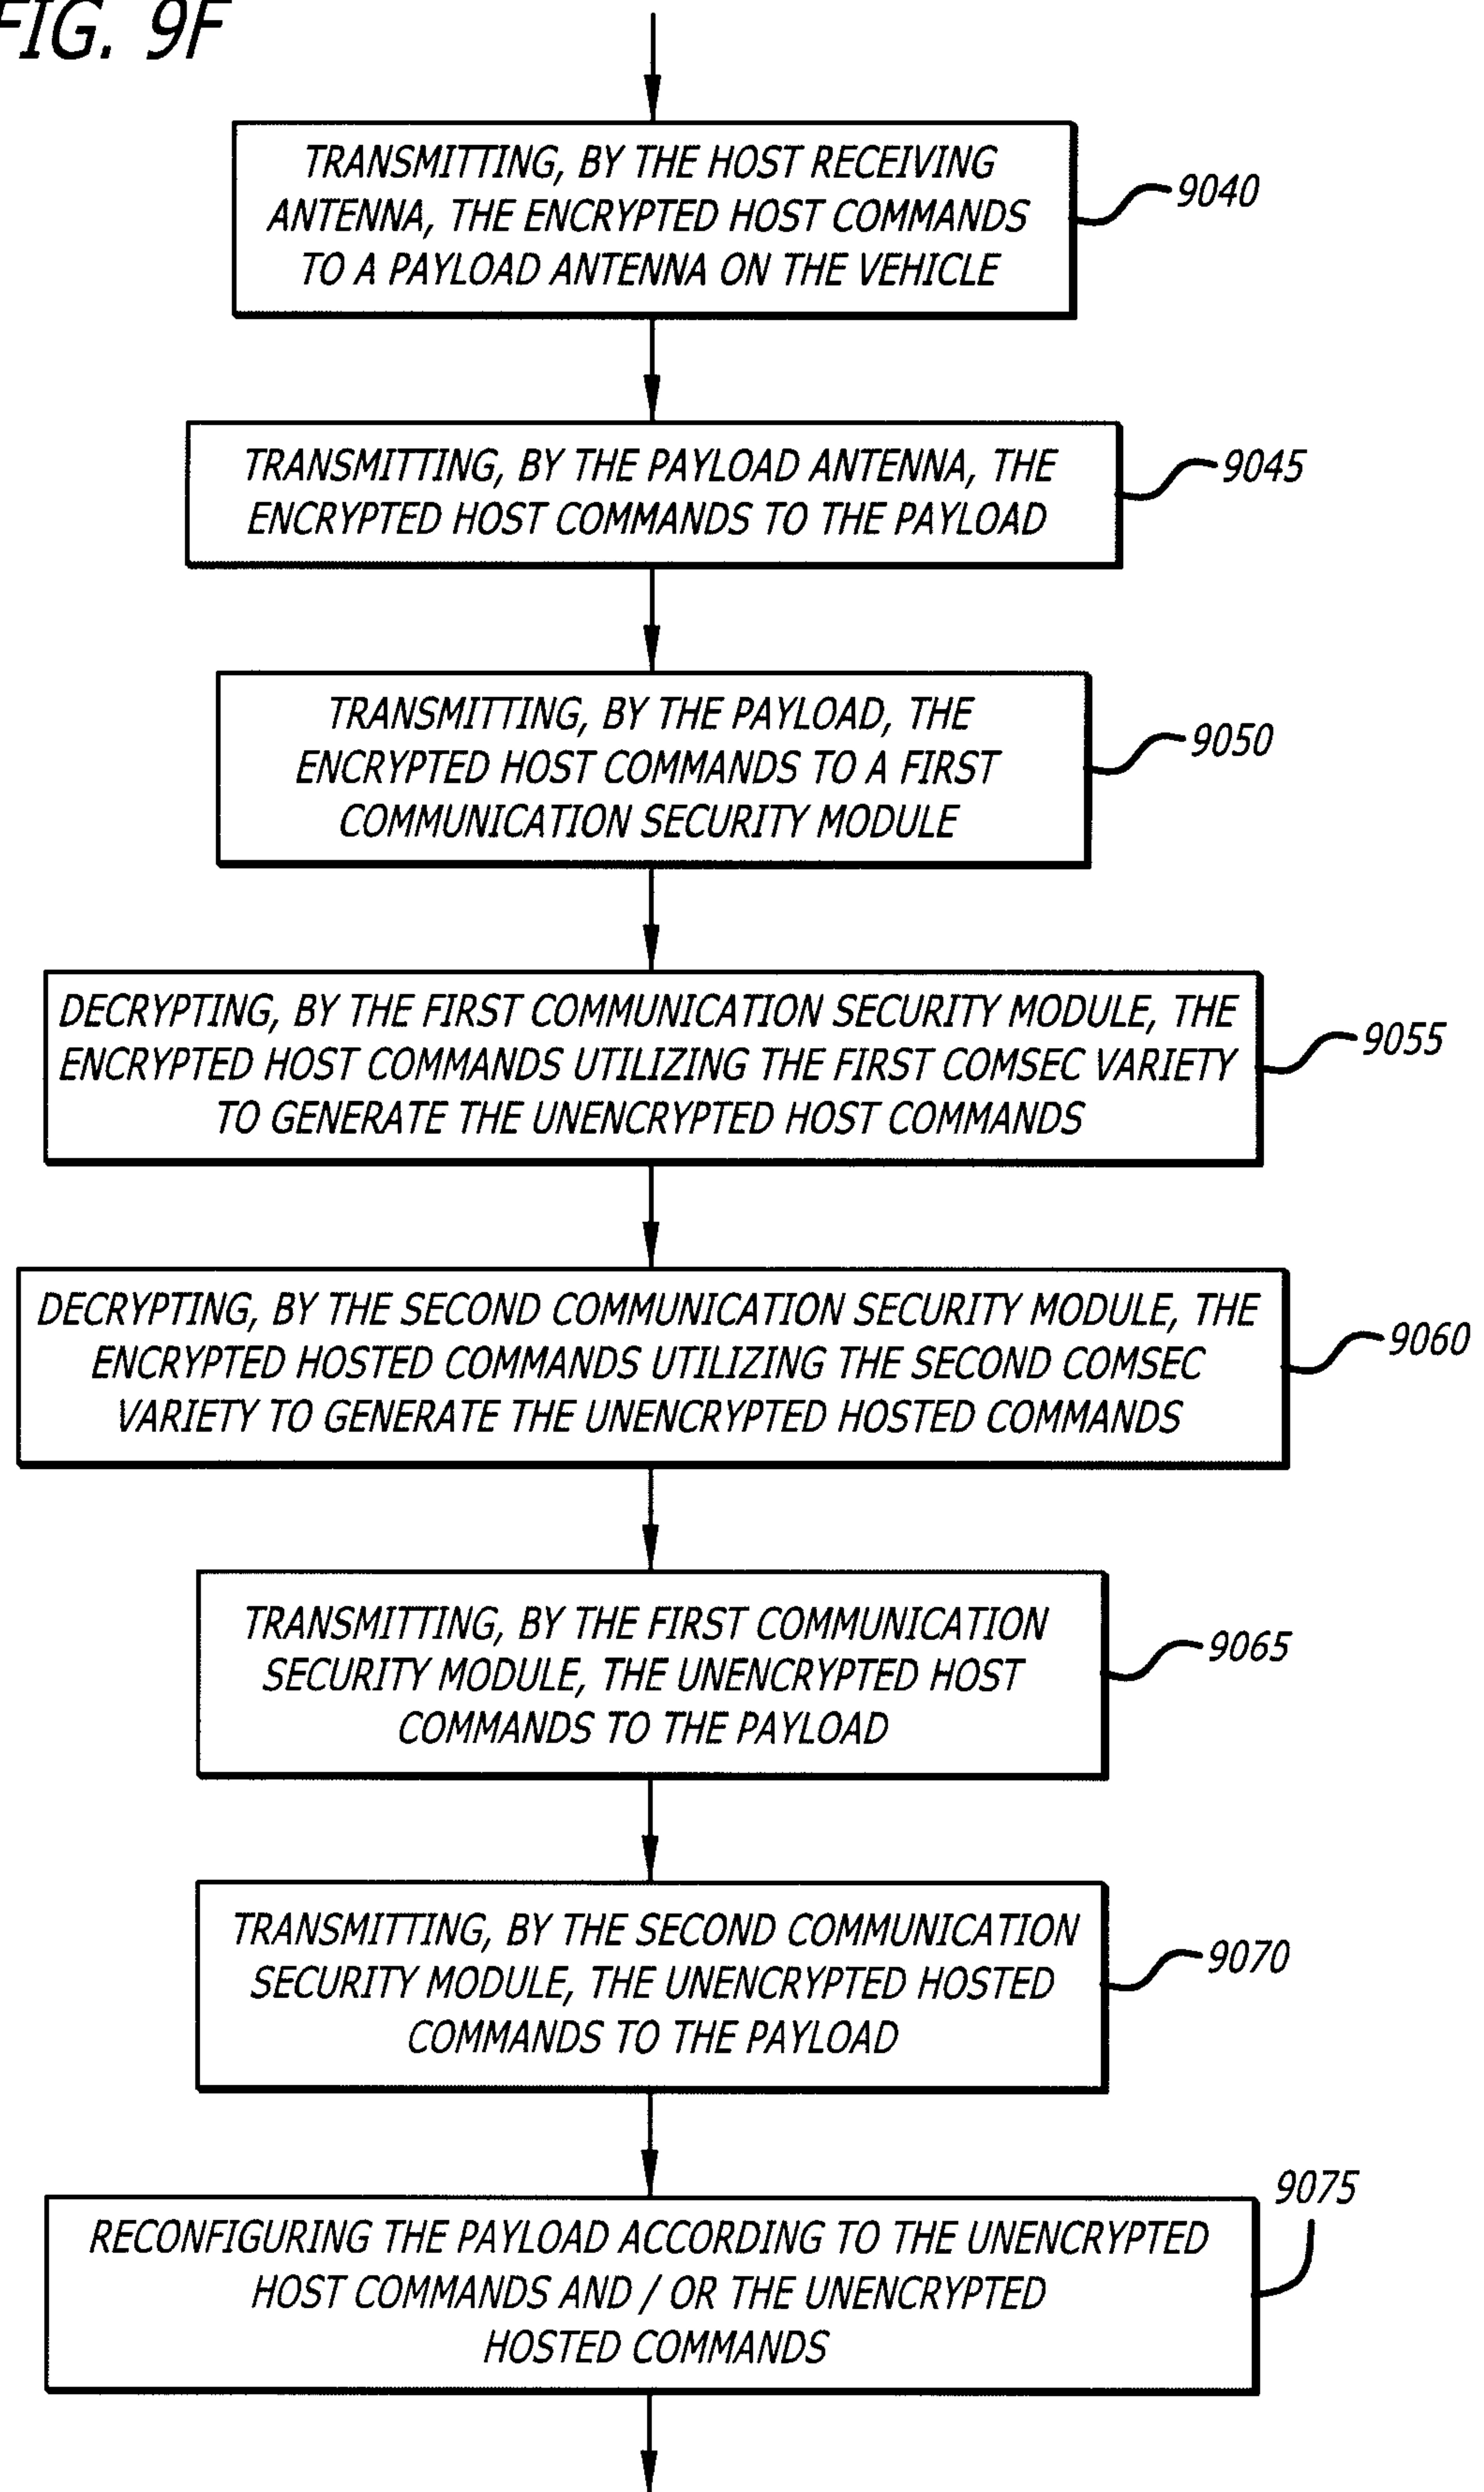
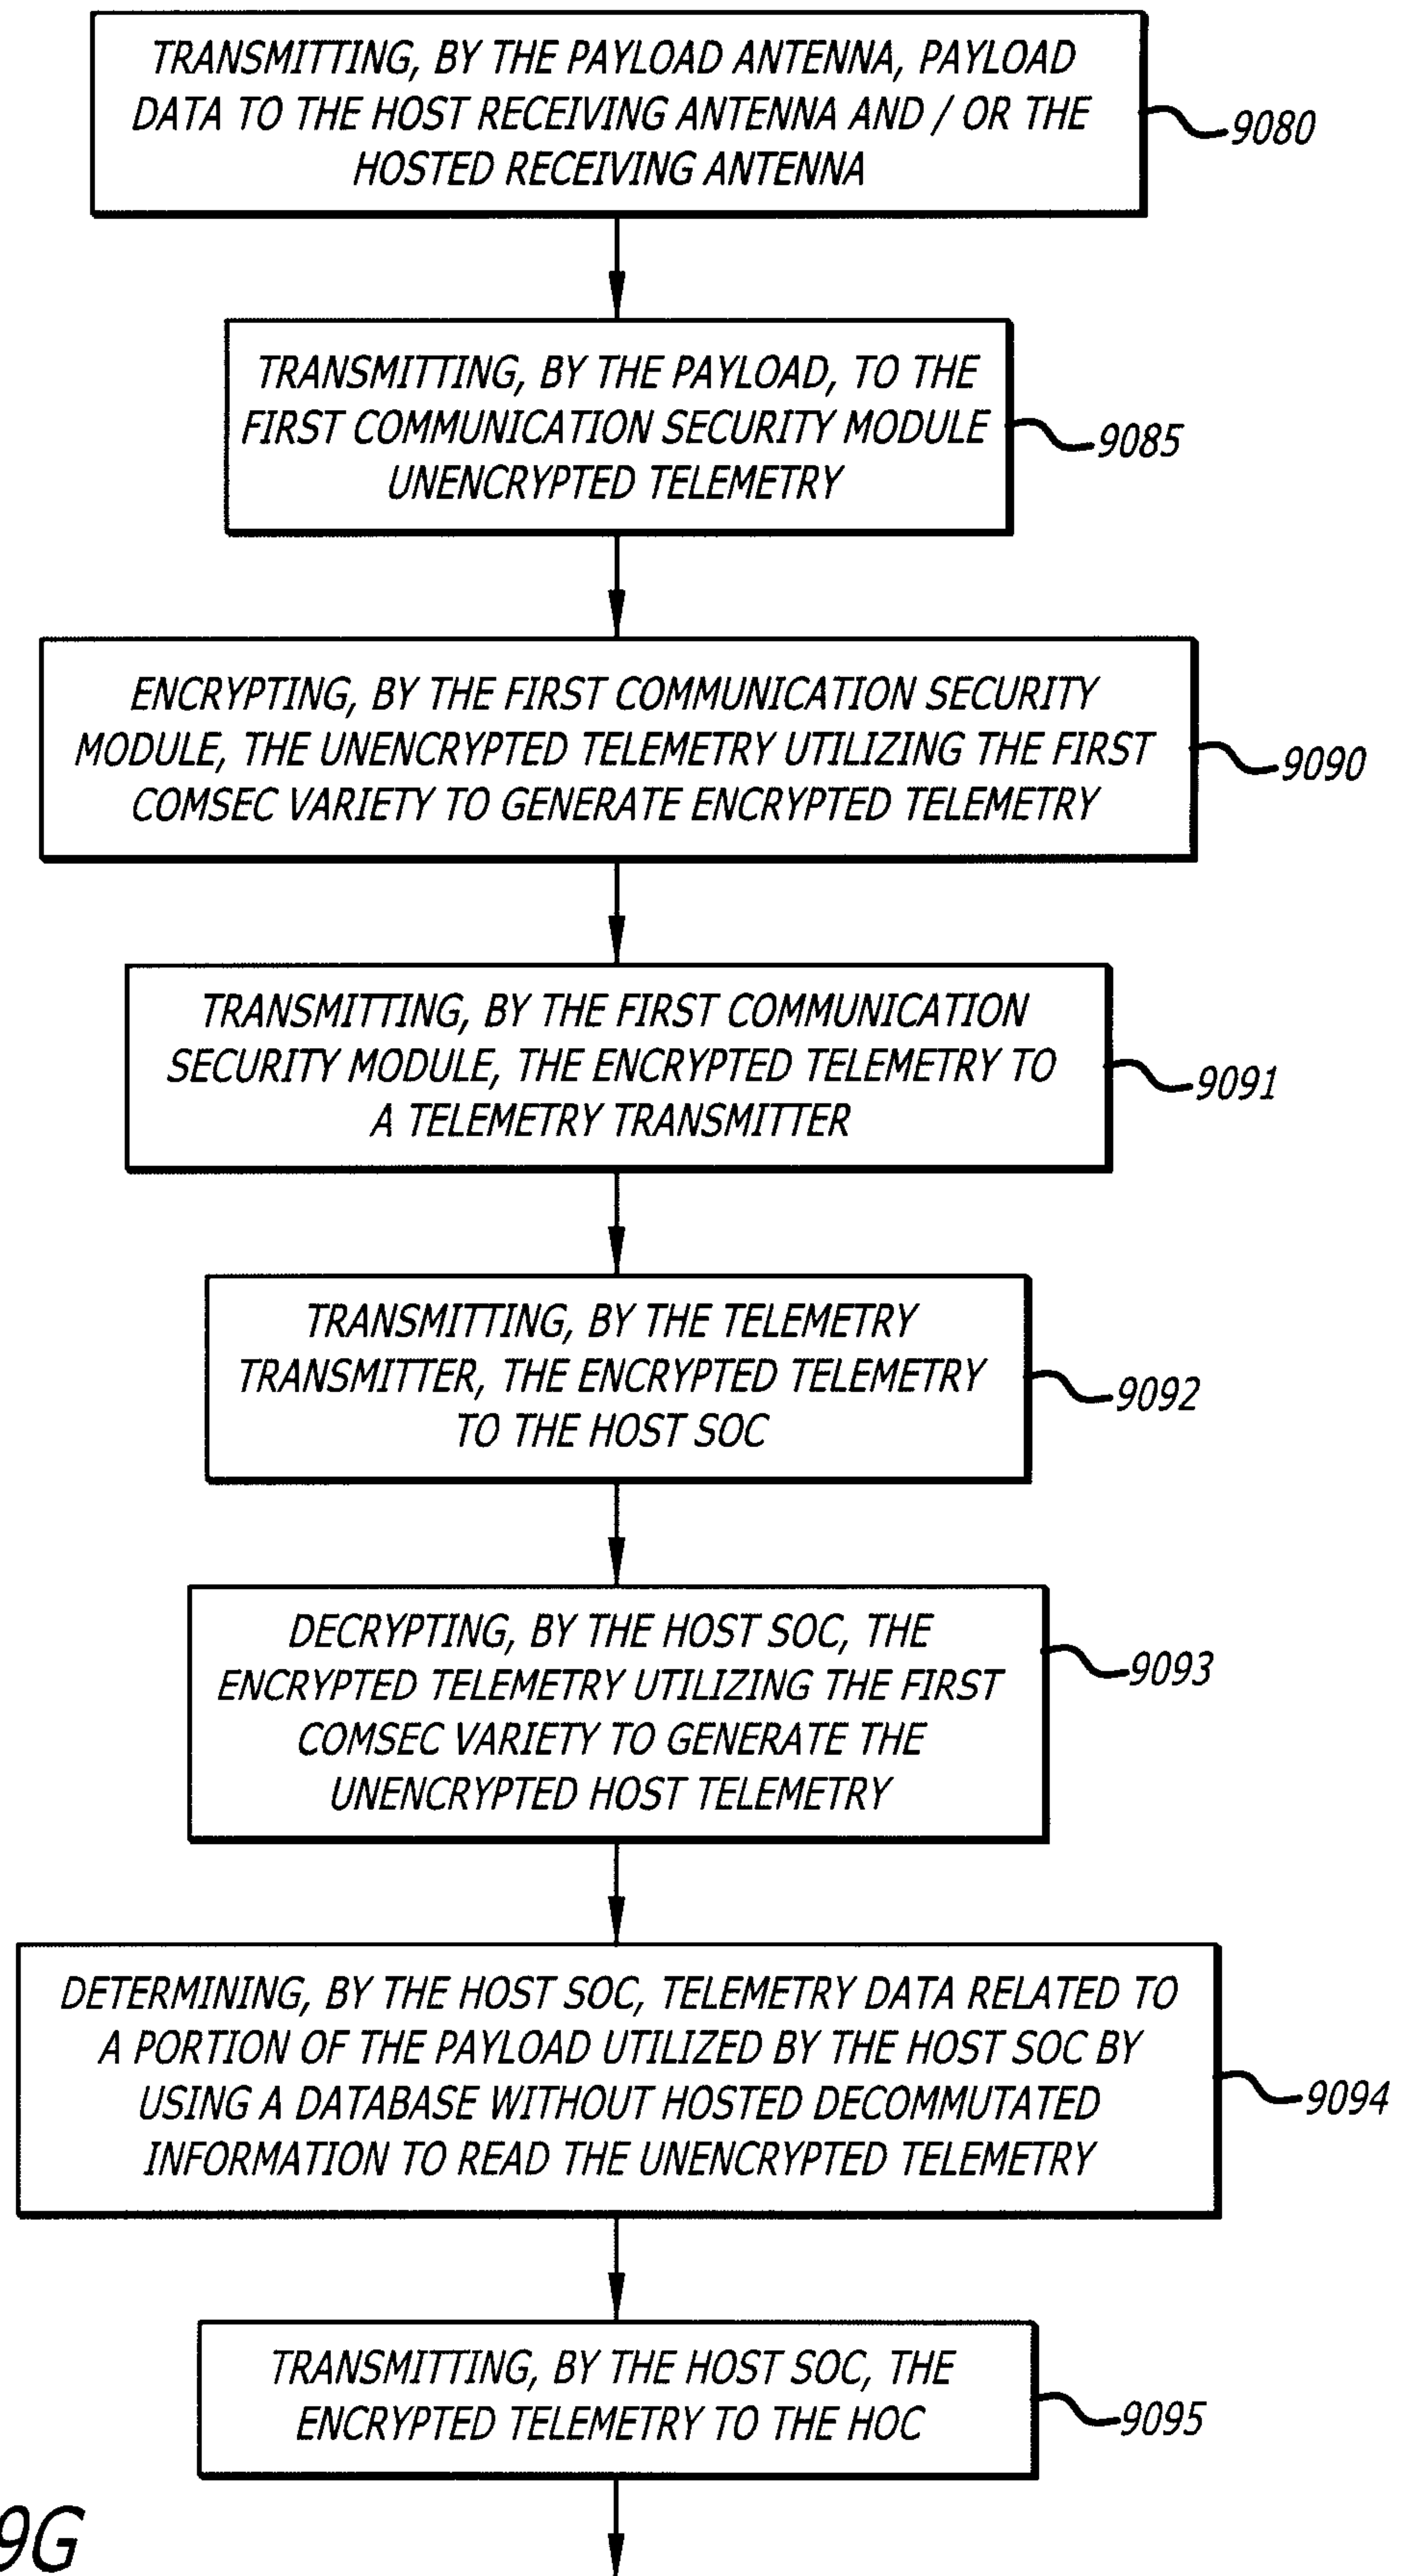
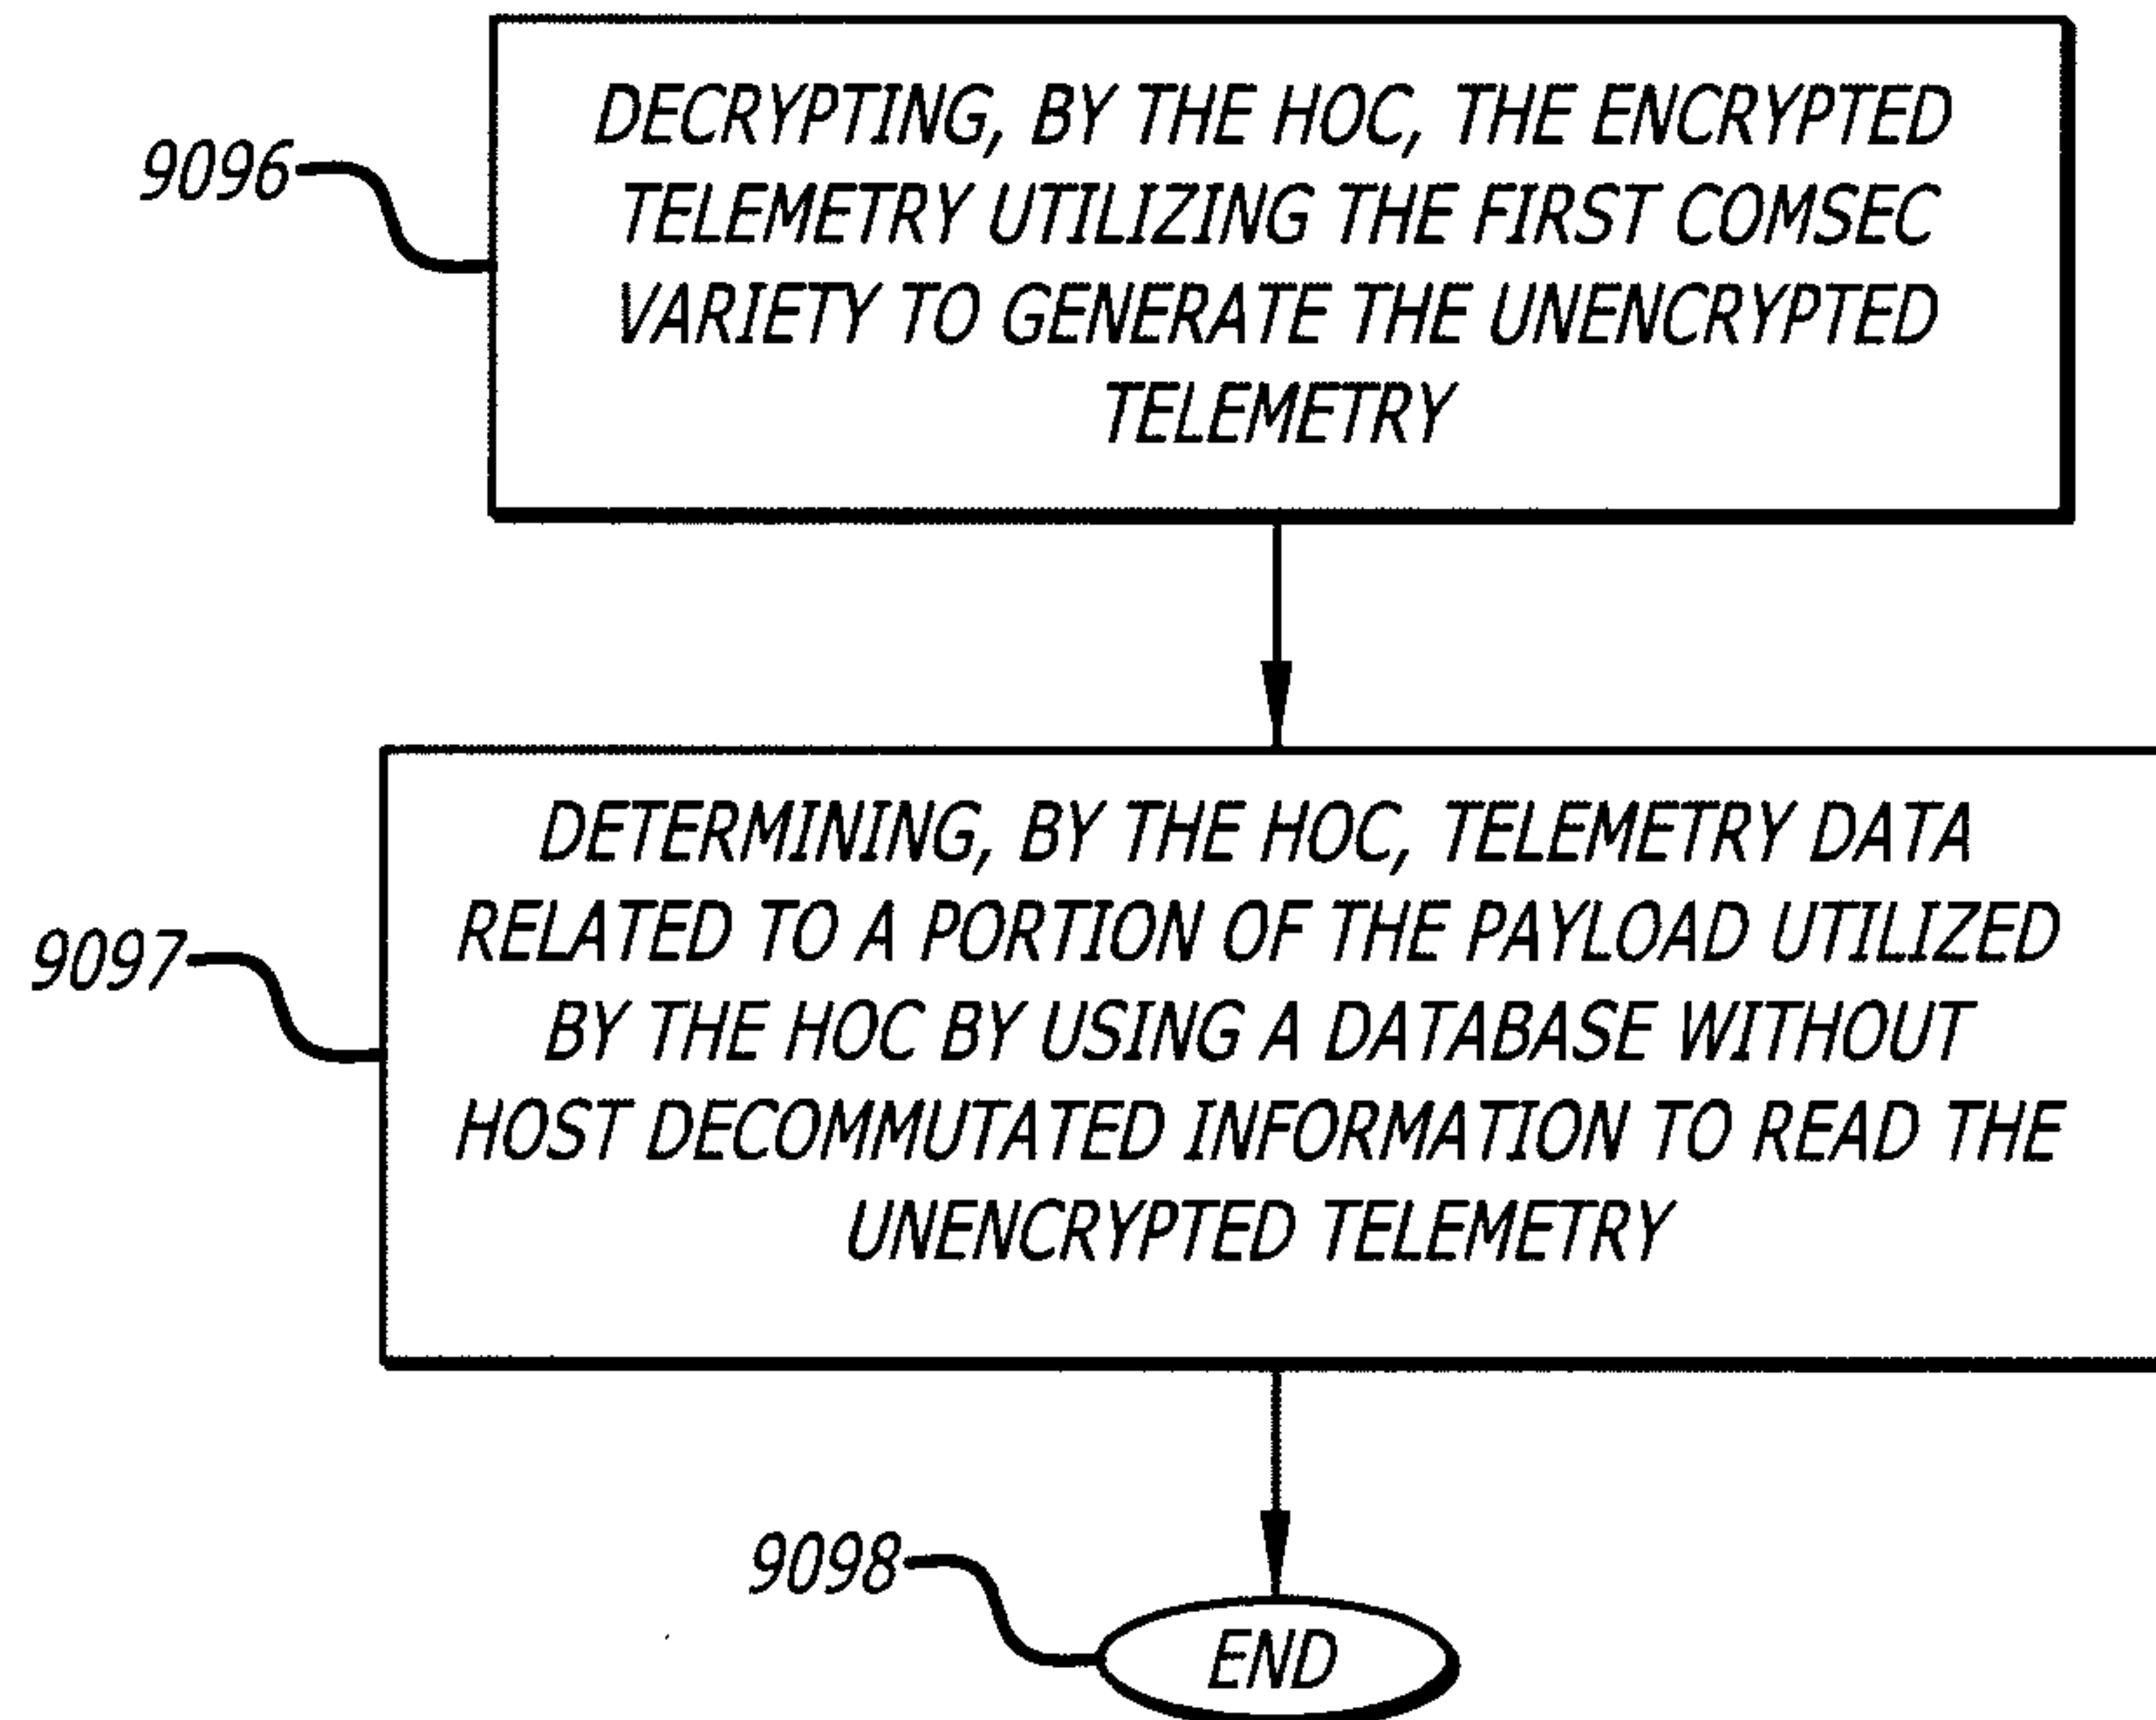
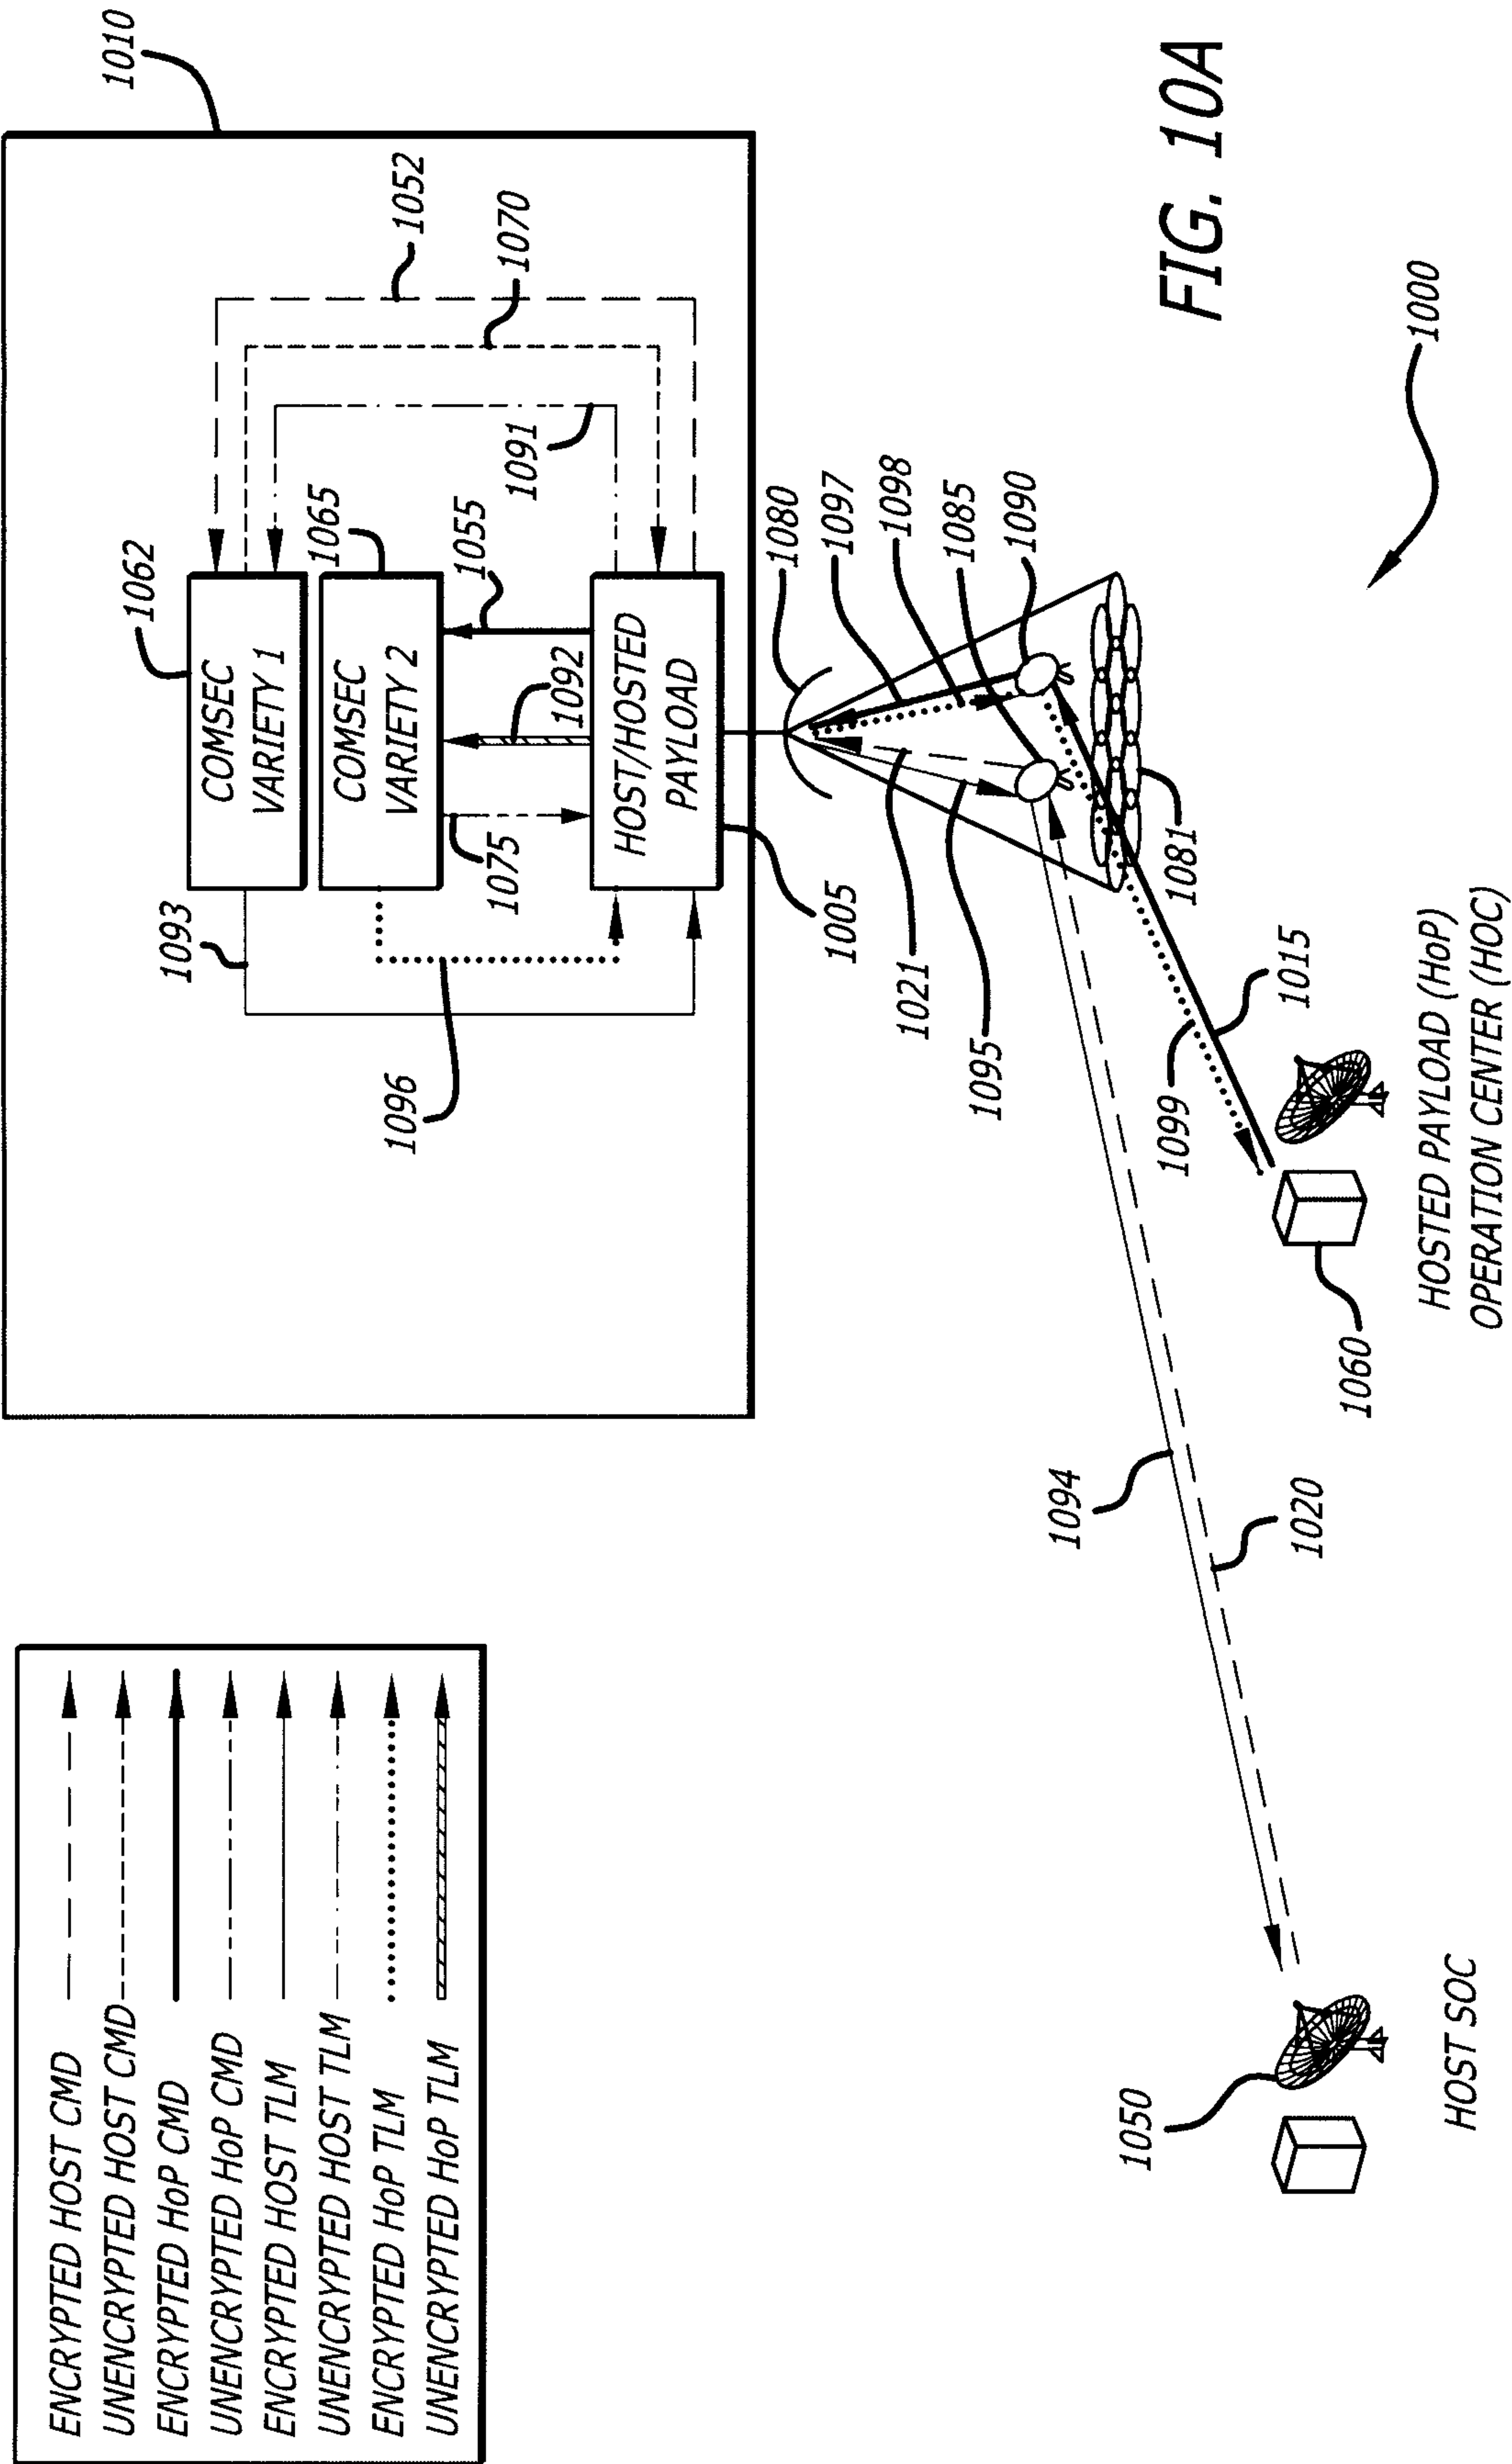


FIG. 9F





*FIG. 9H*



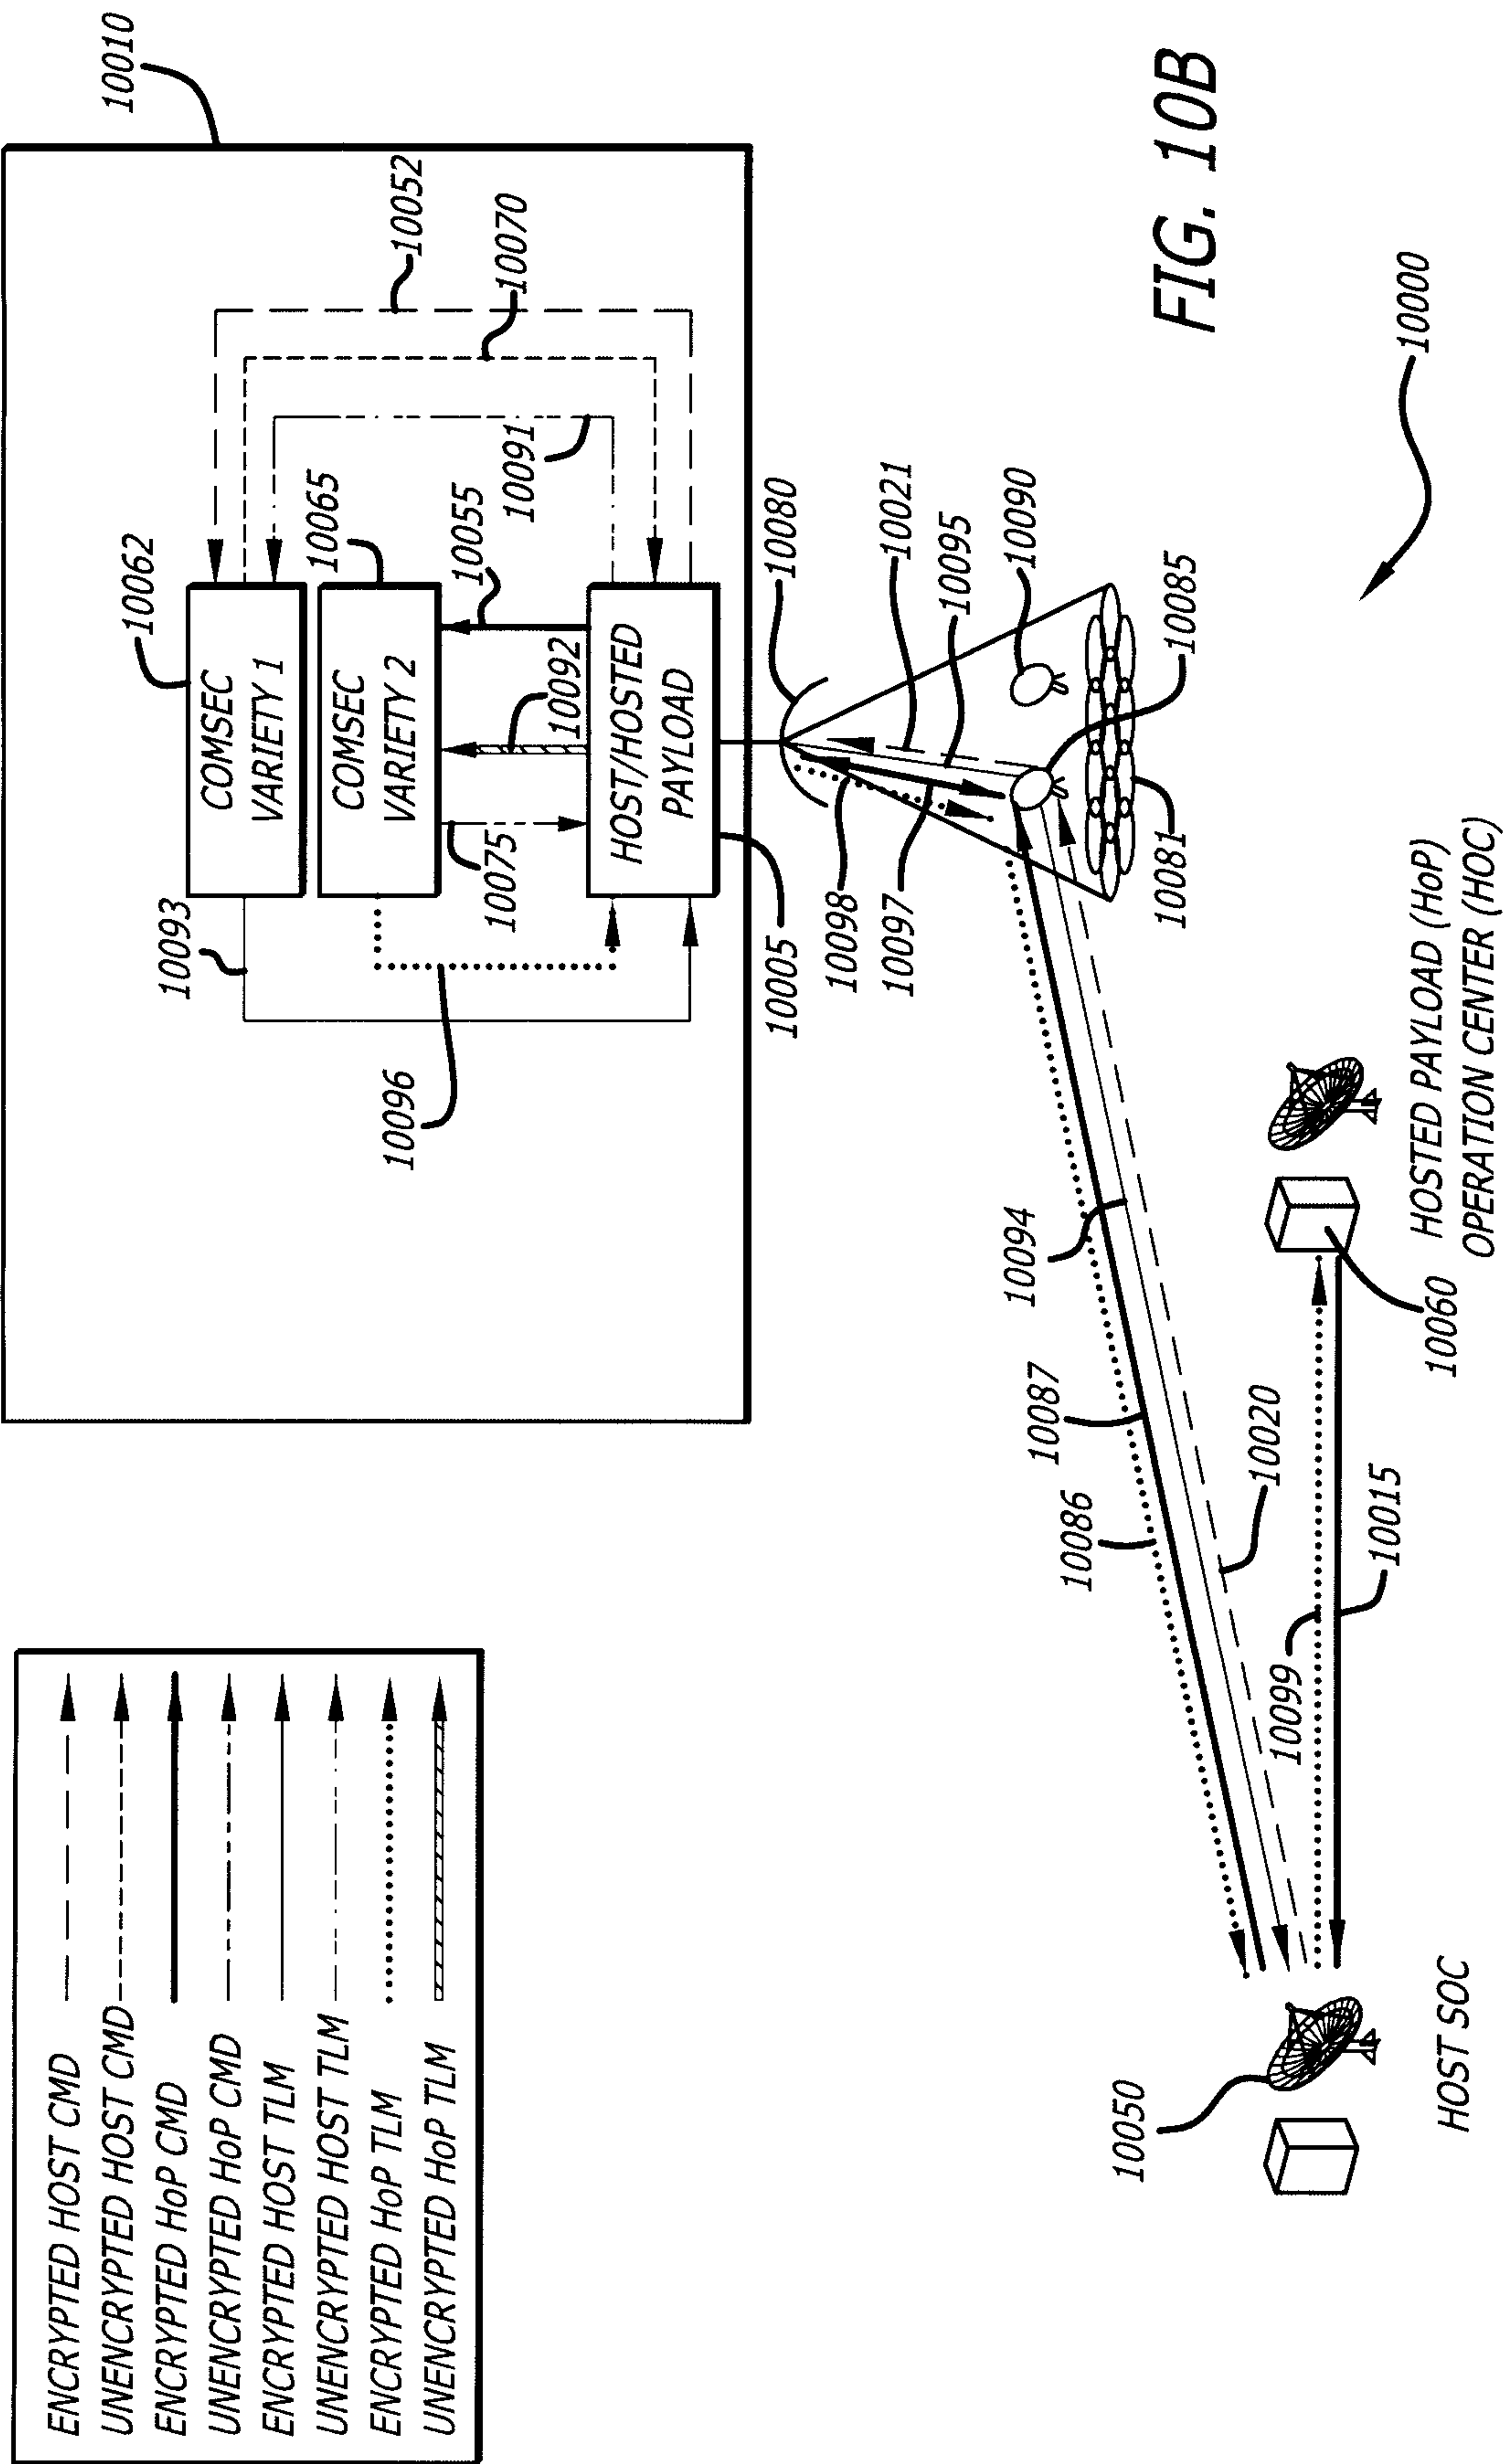


FIG. 11A

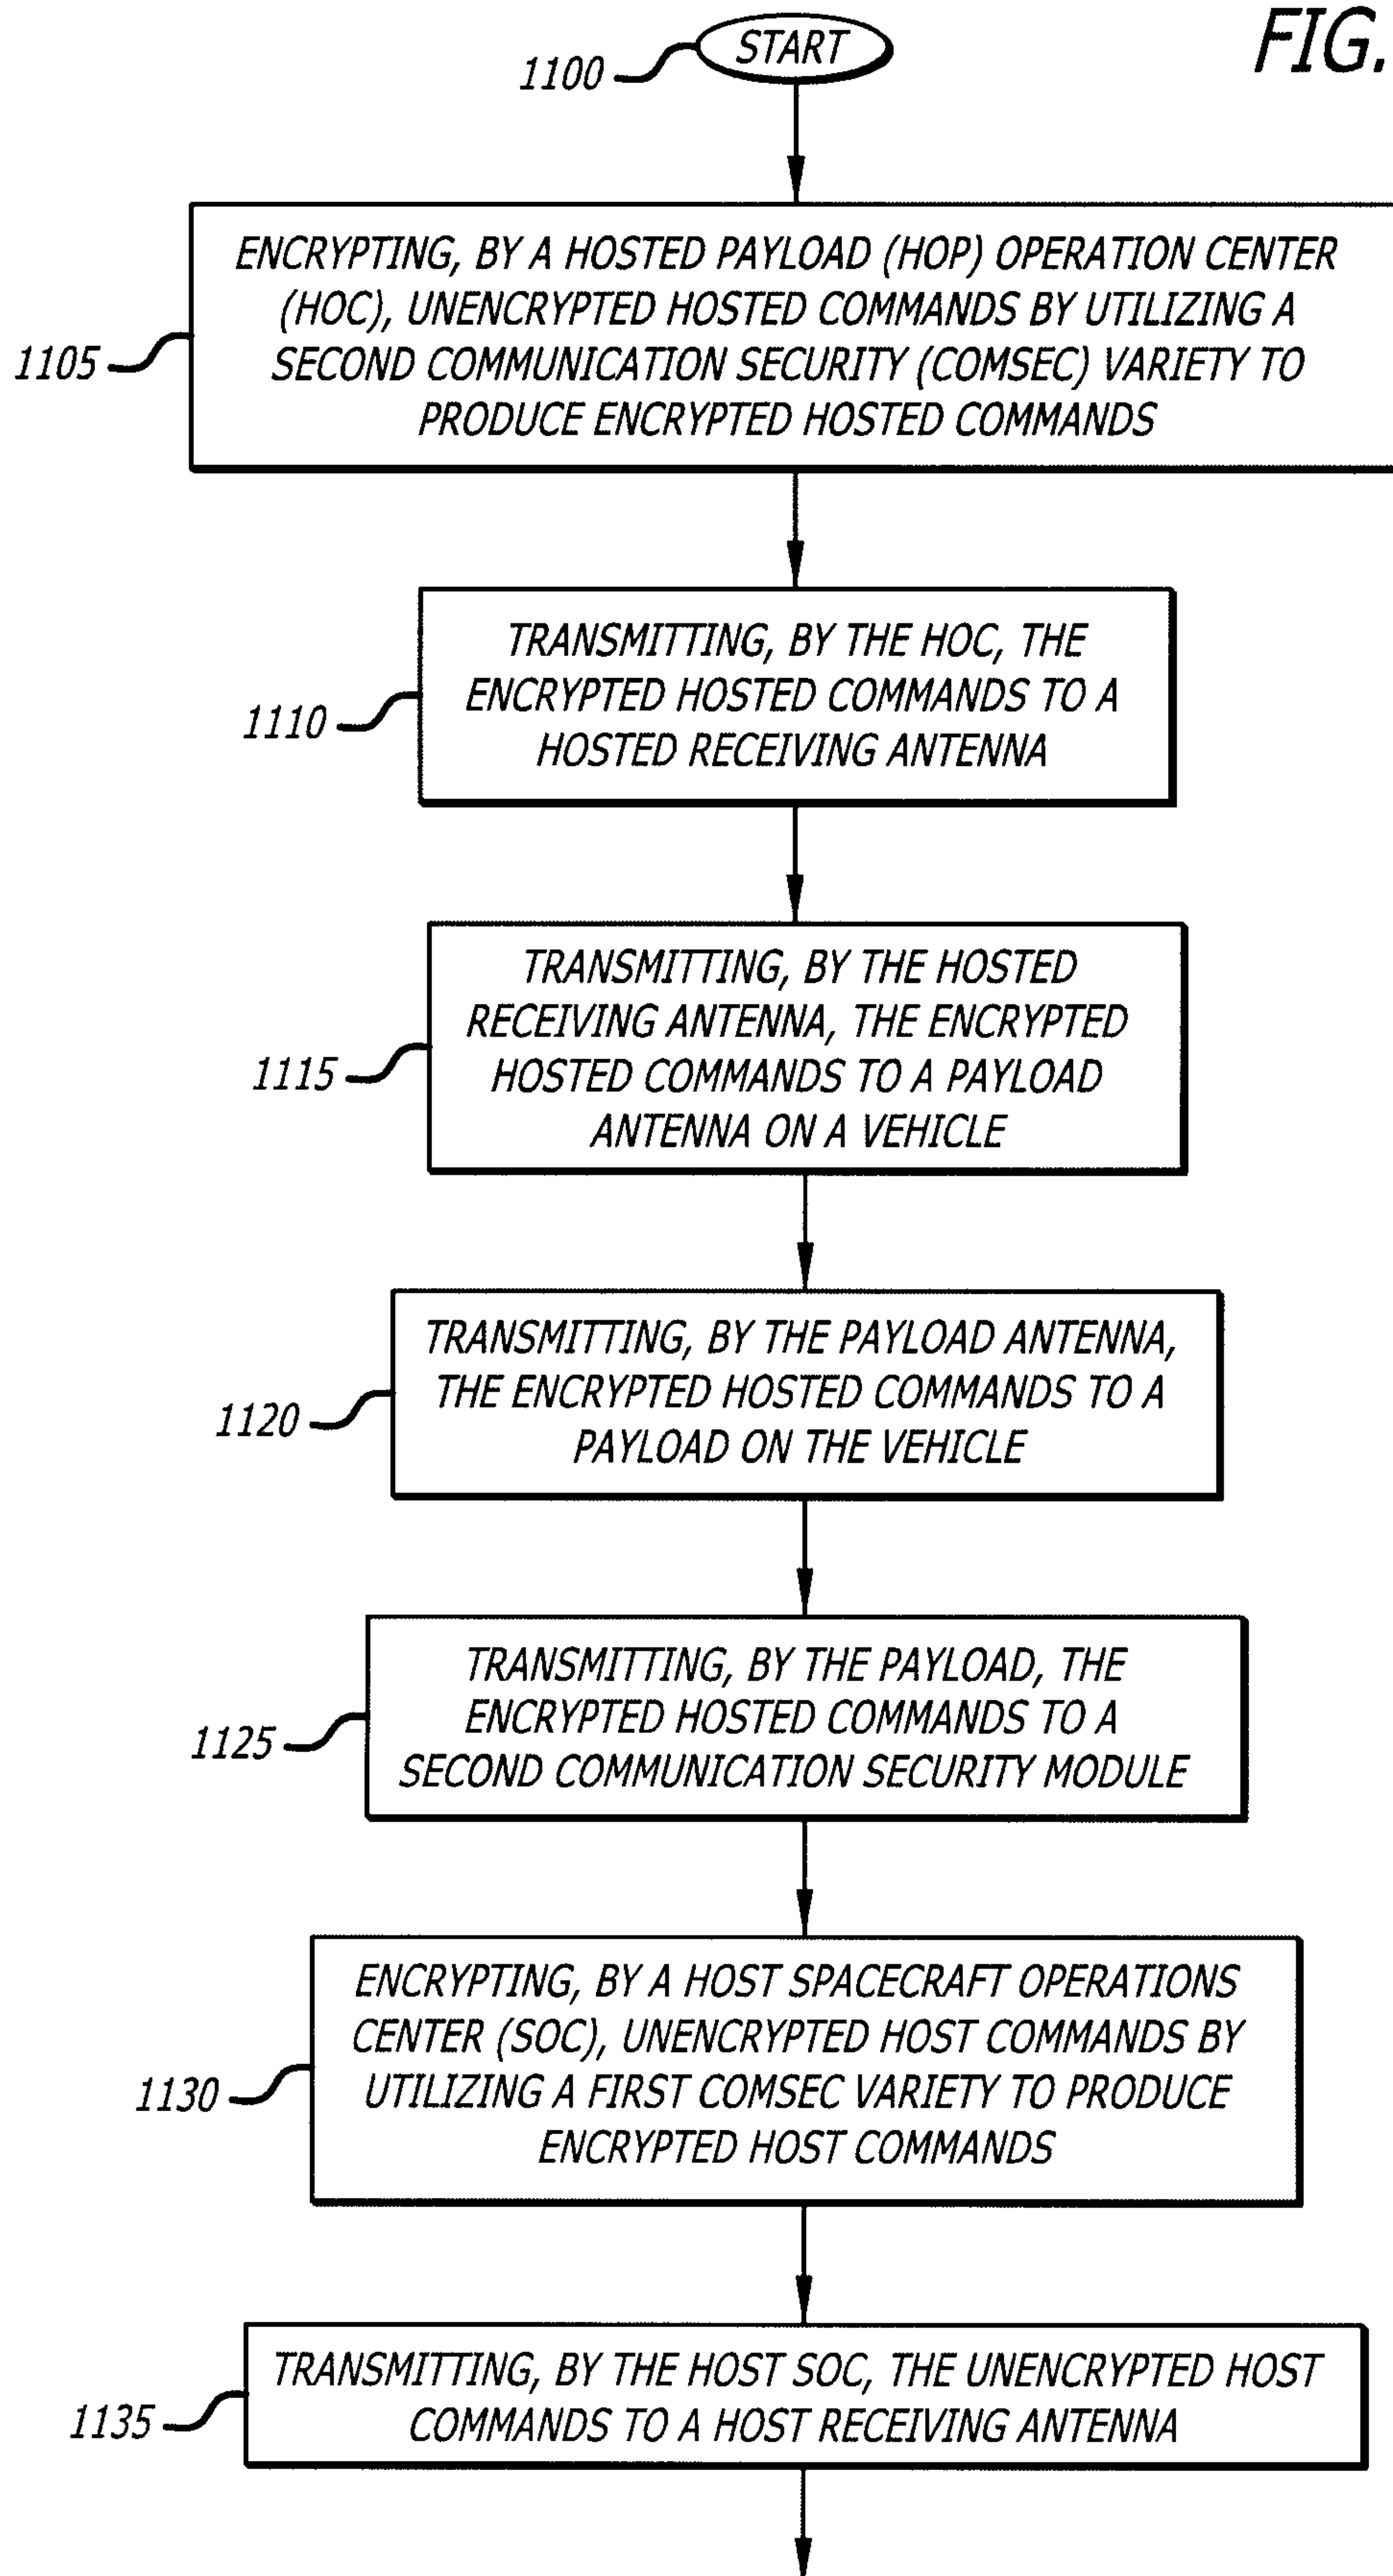


FIG. 11B

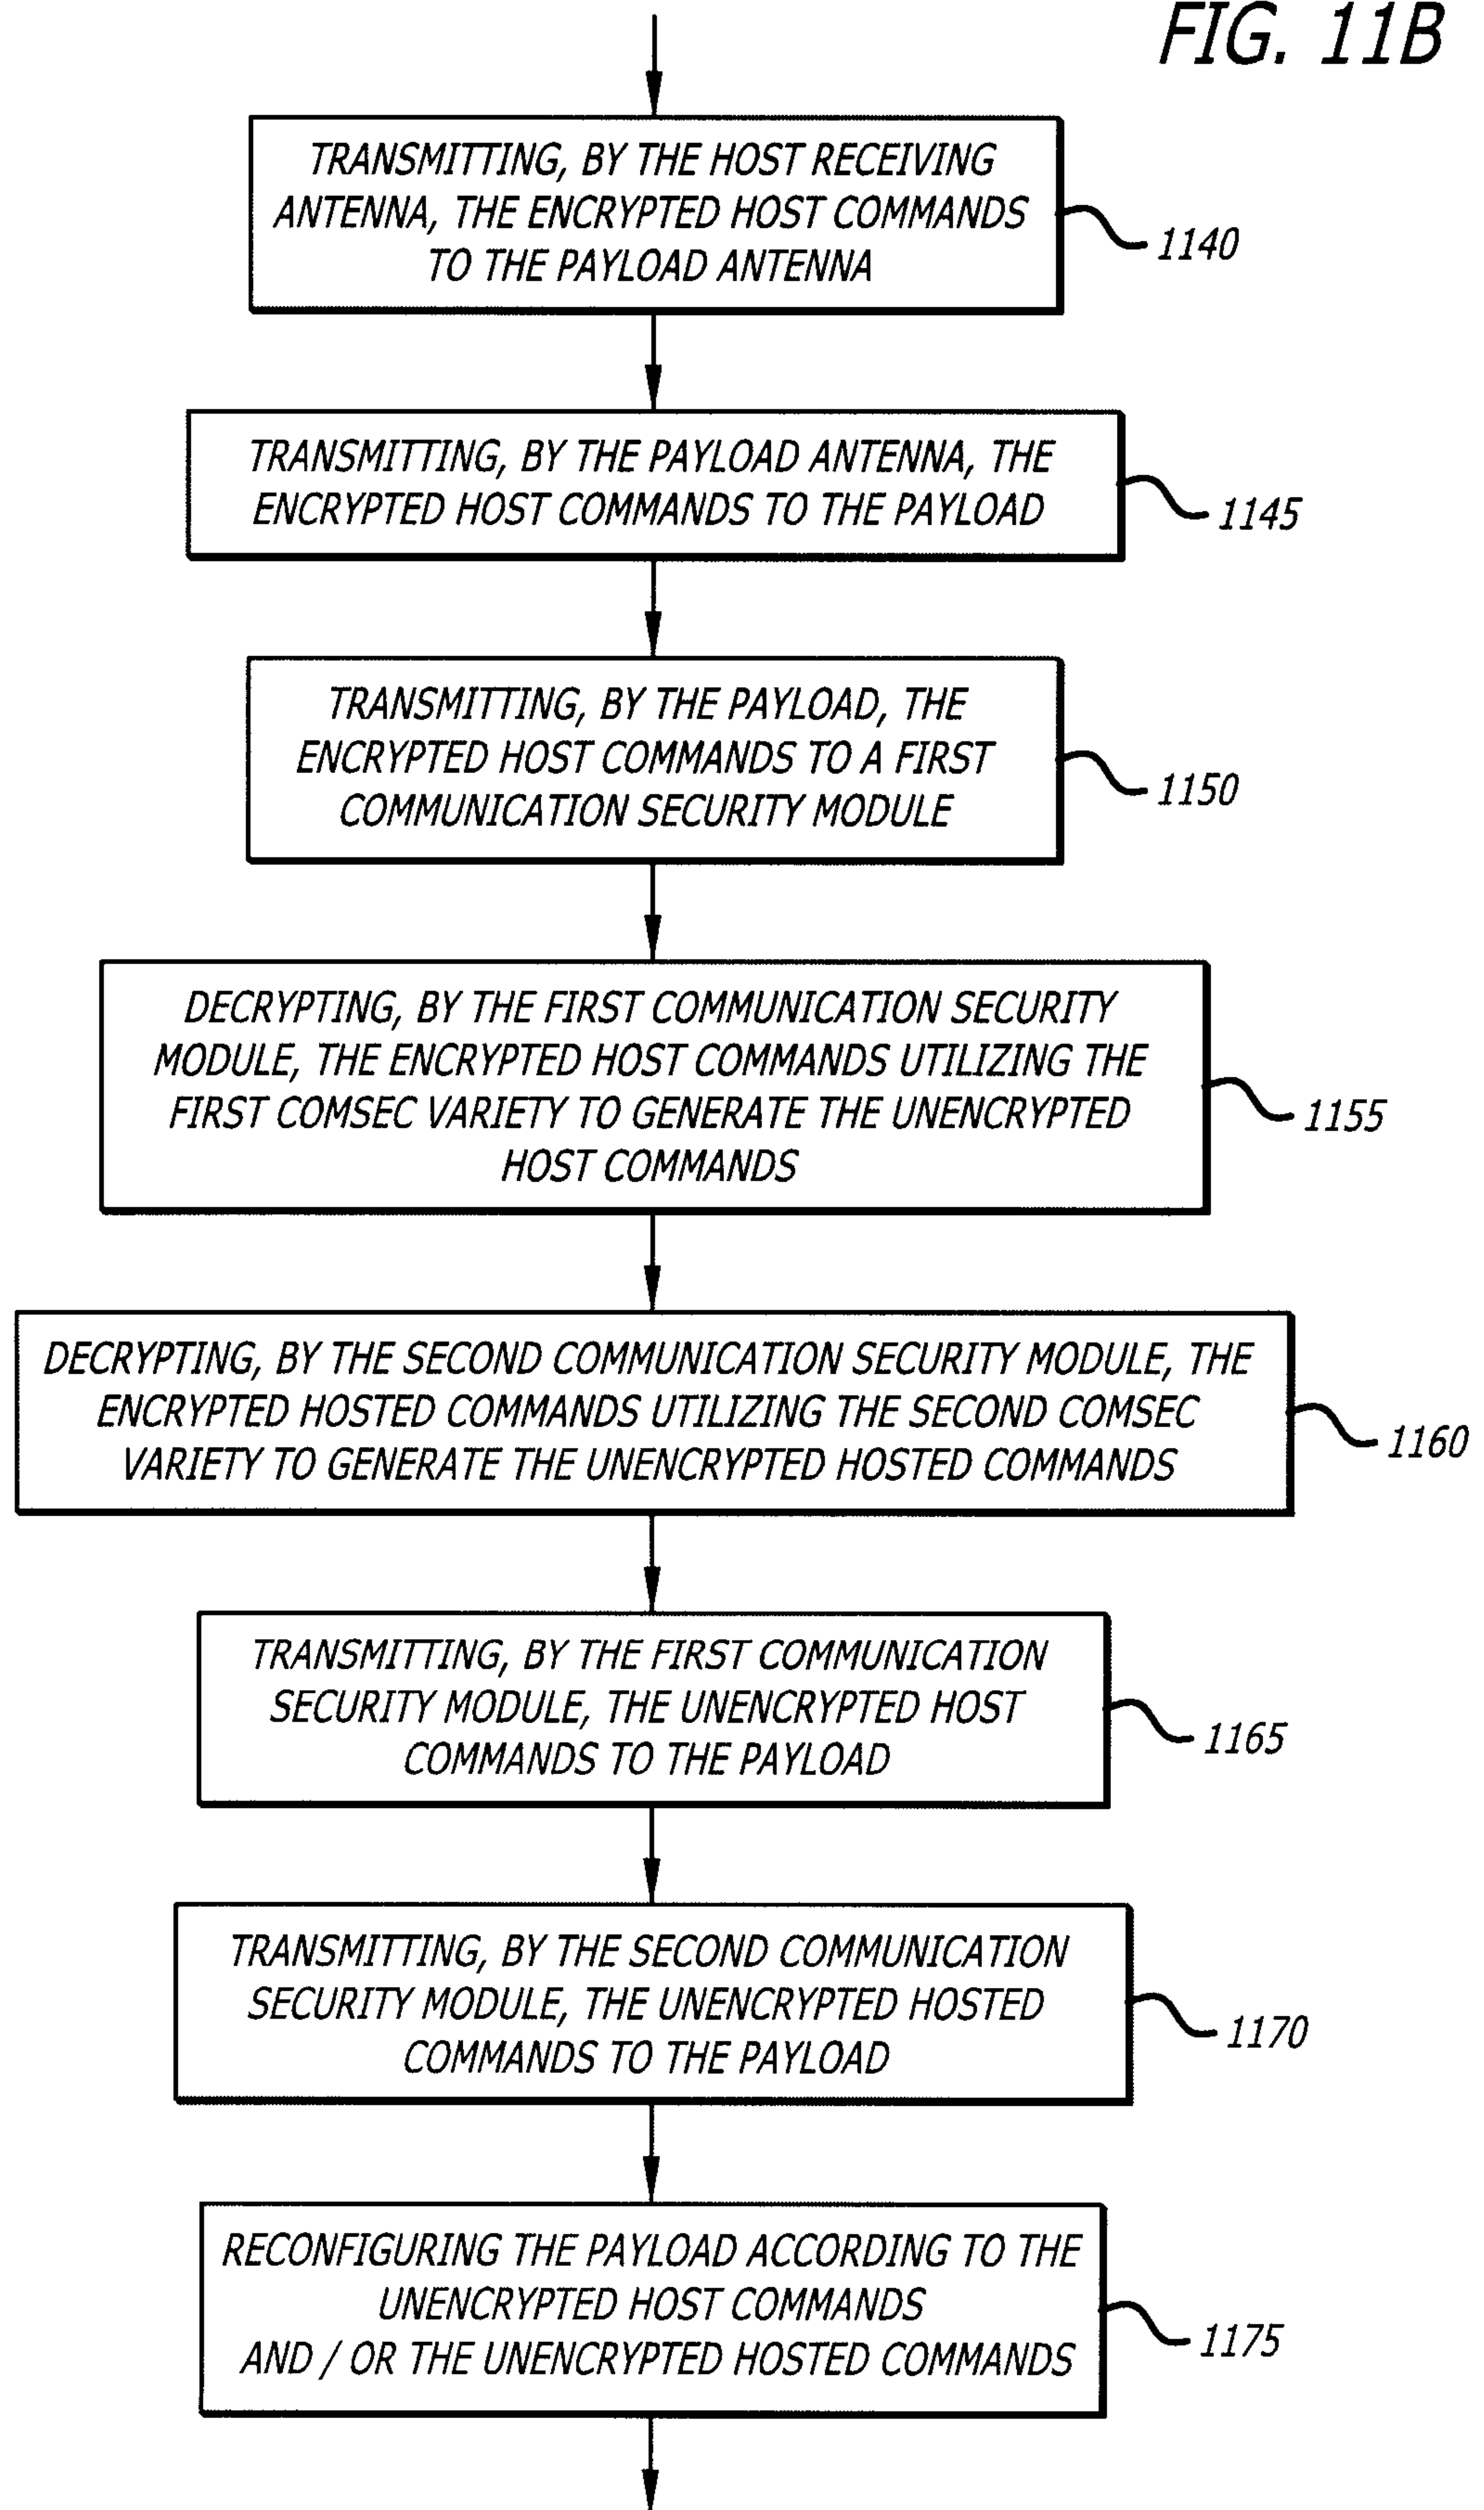


FIG. 11C

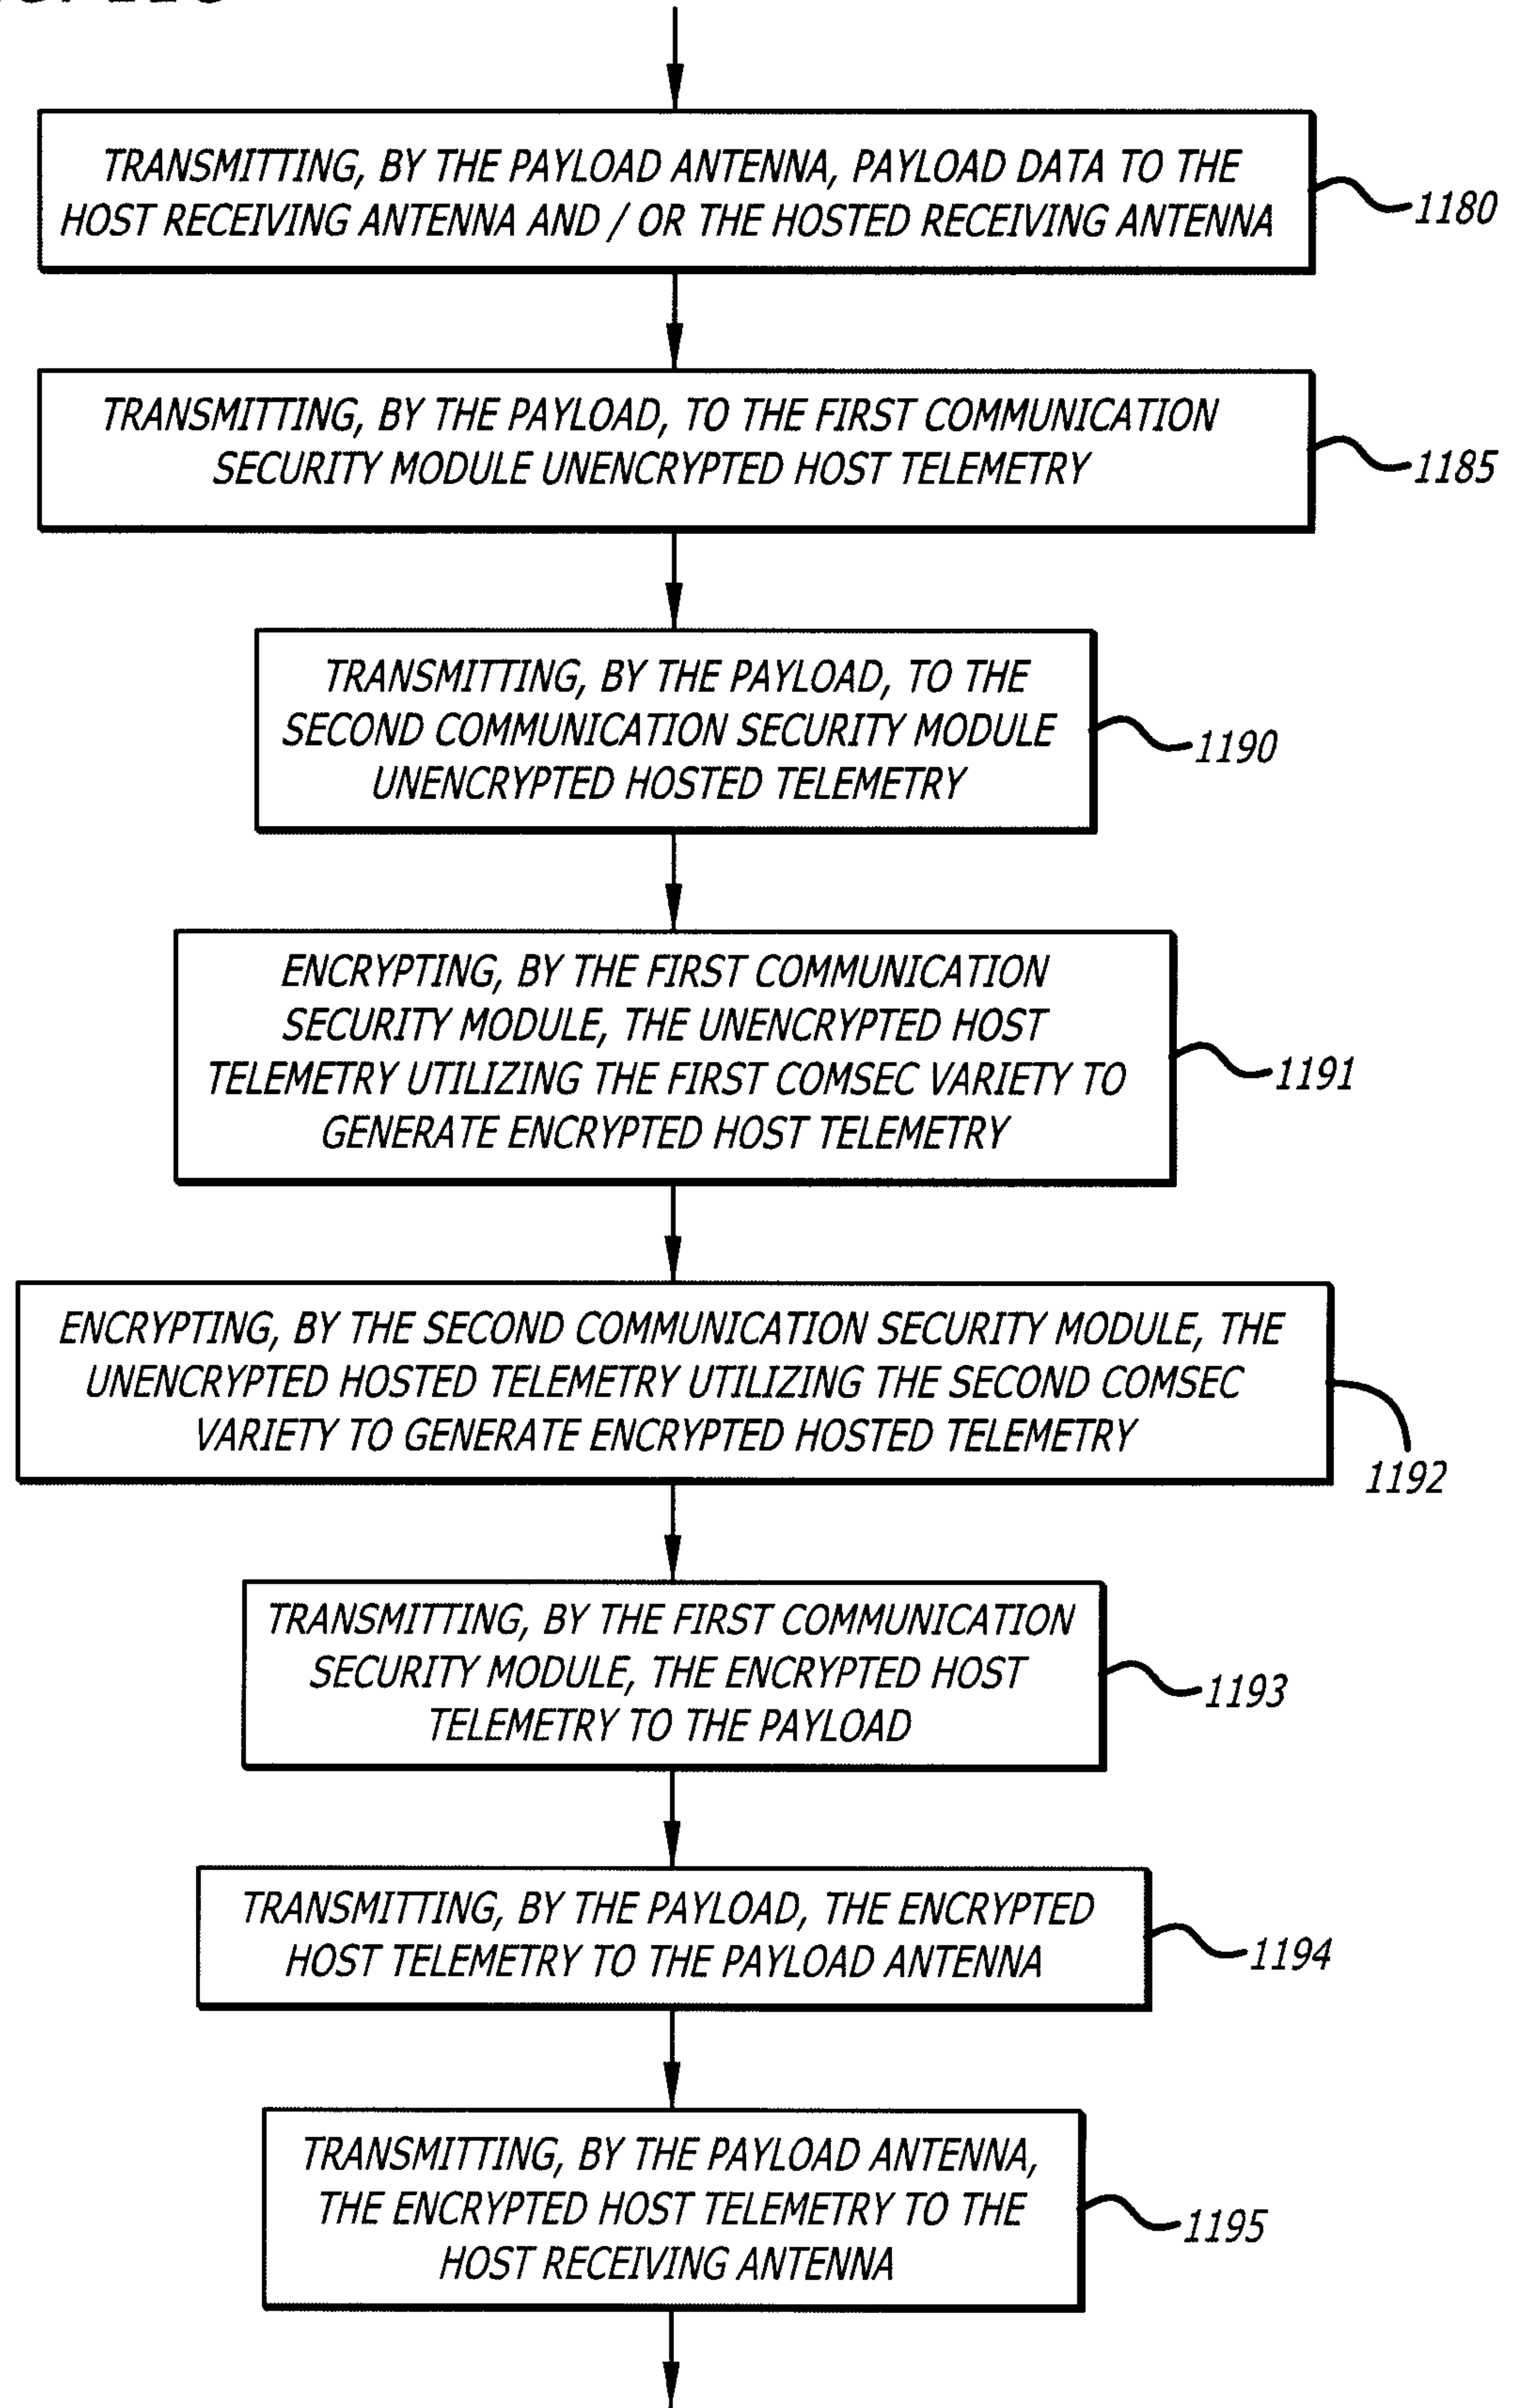


FIG. 11D

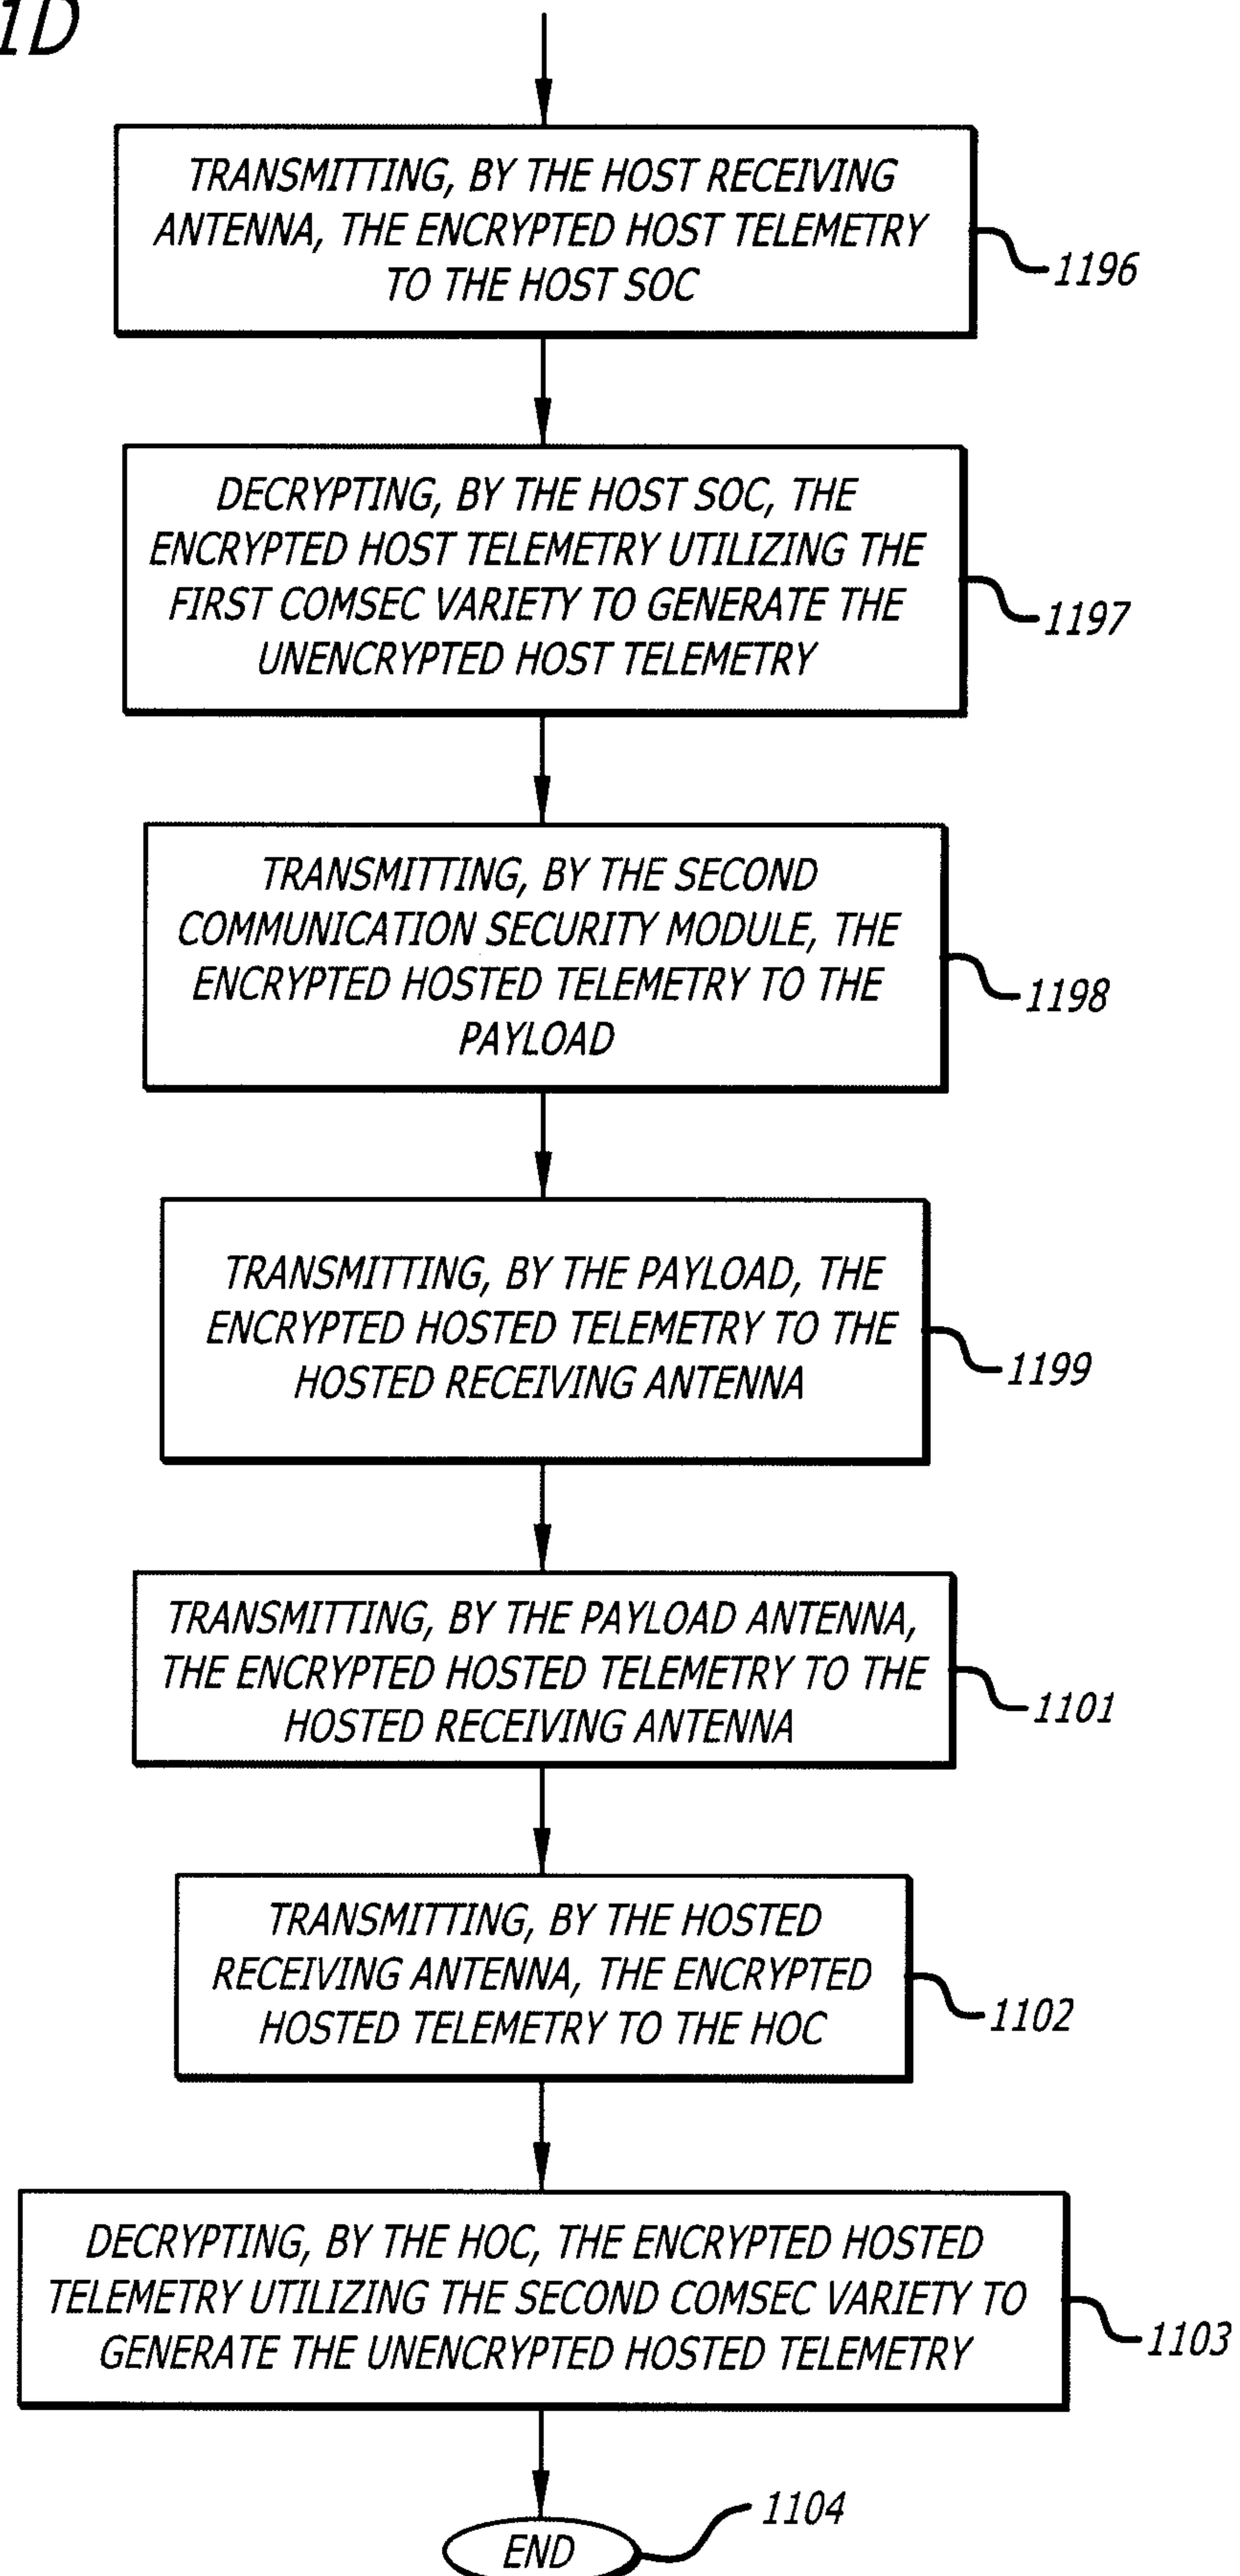


FIG. 11E

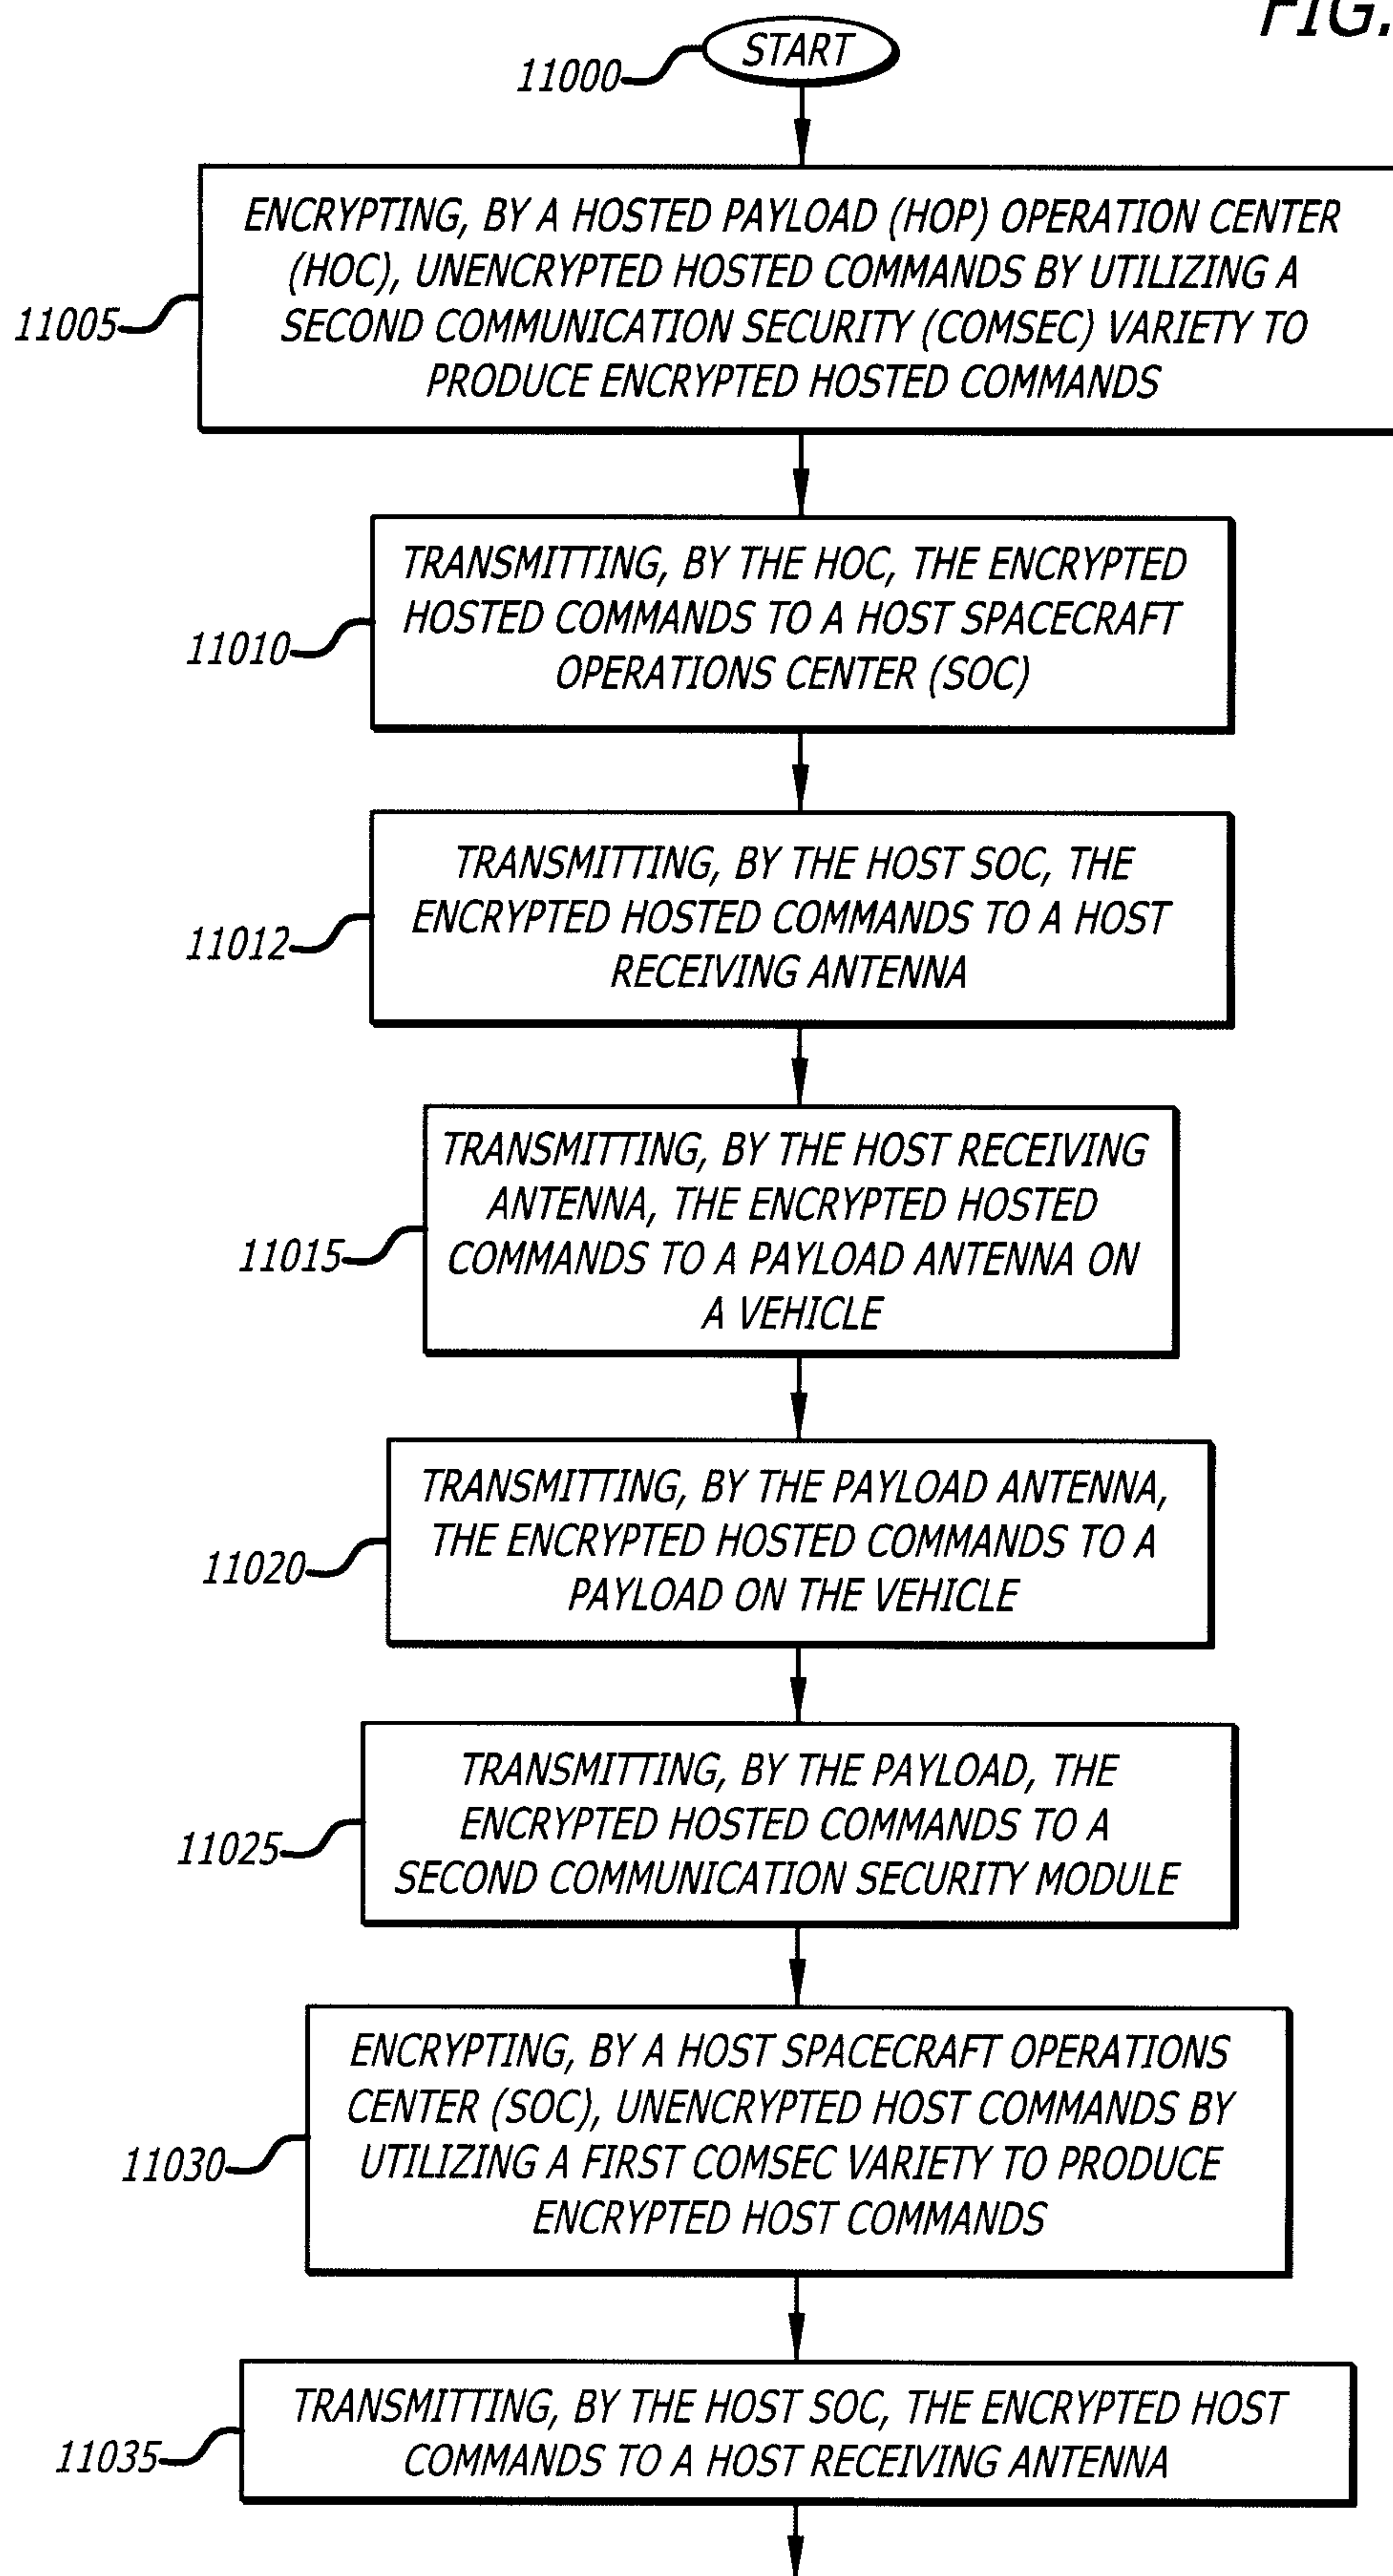


FIG. 11F

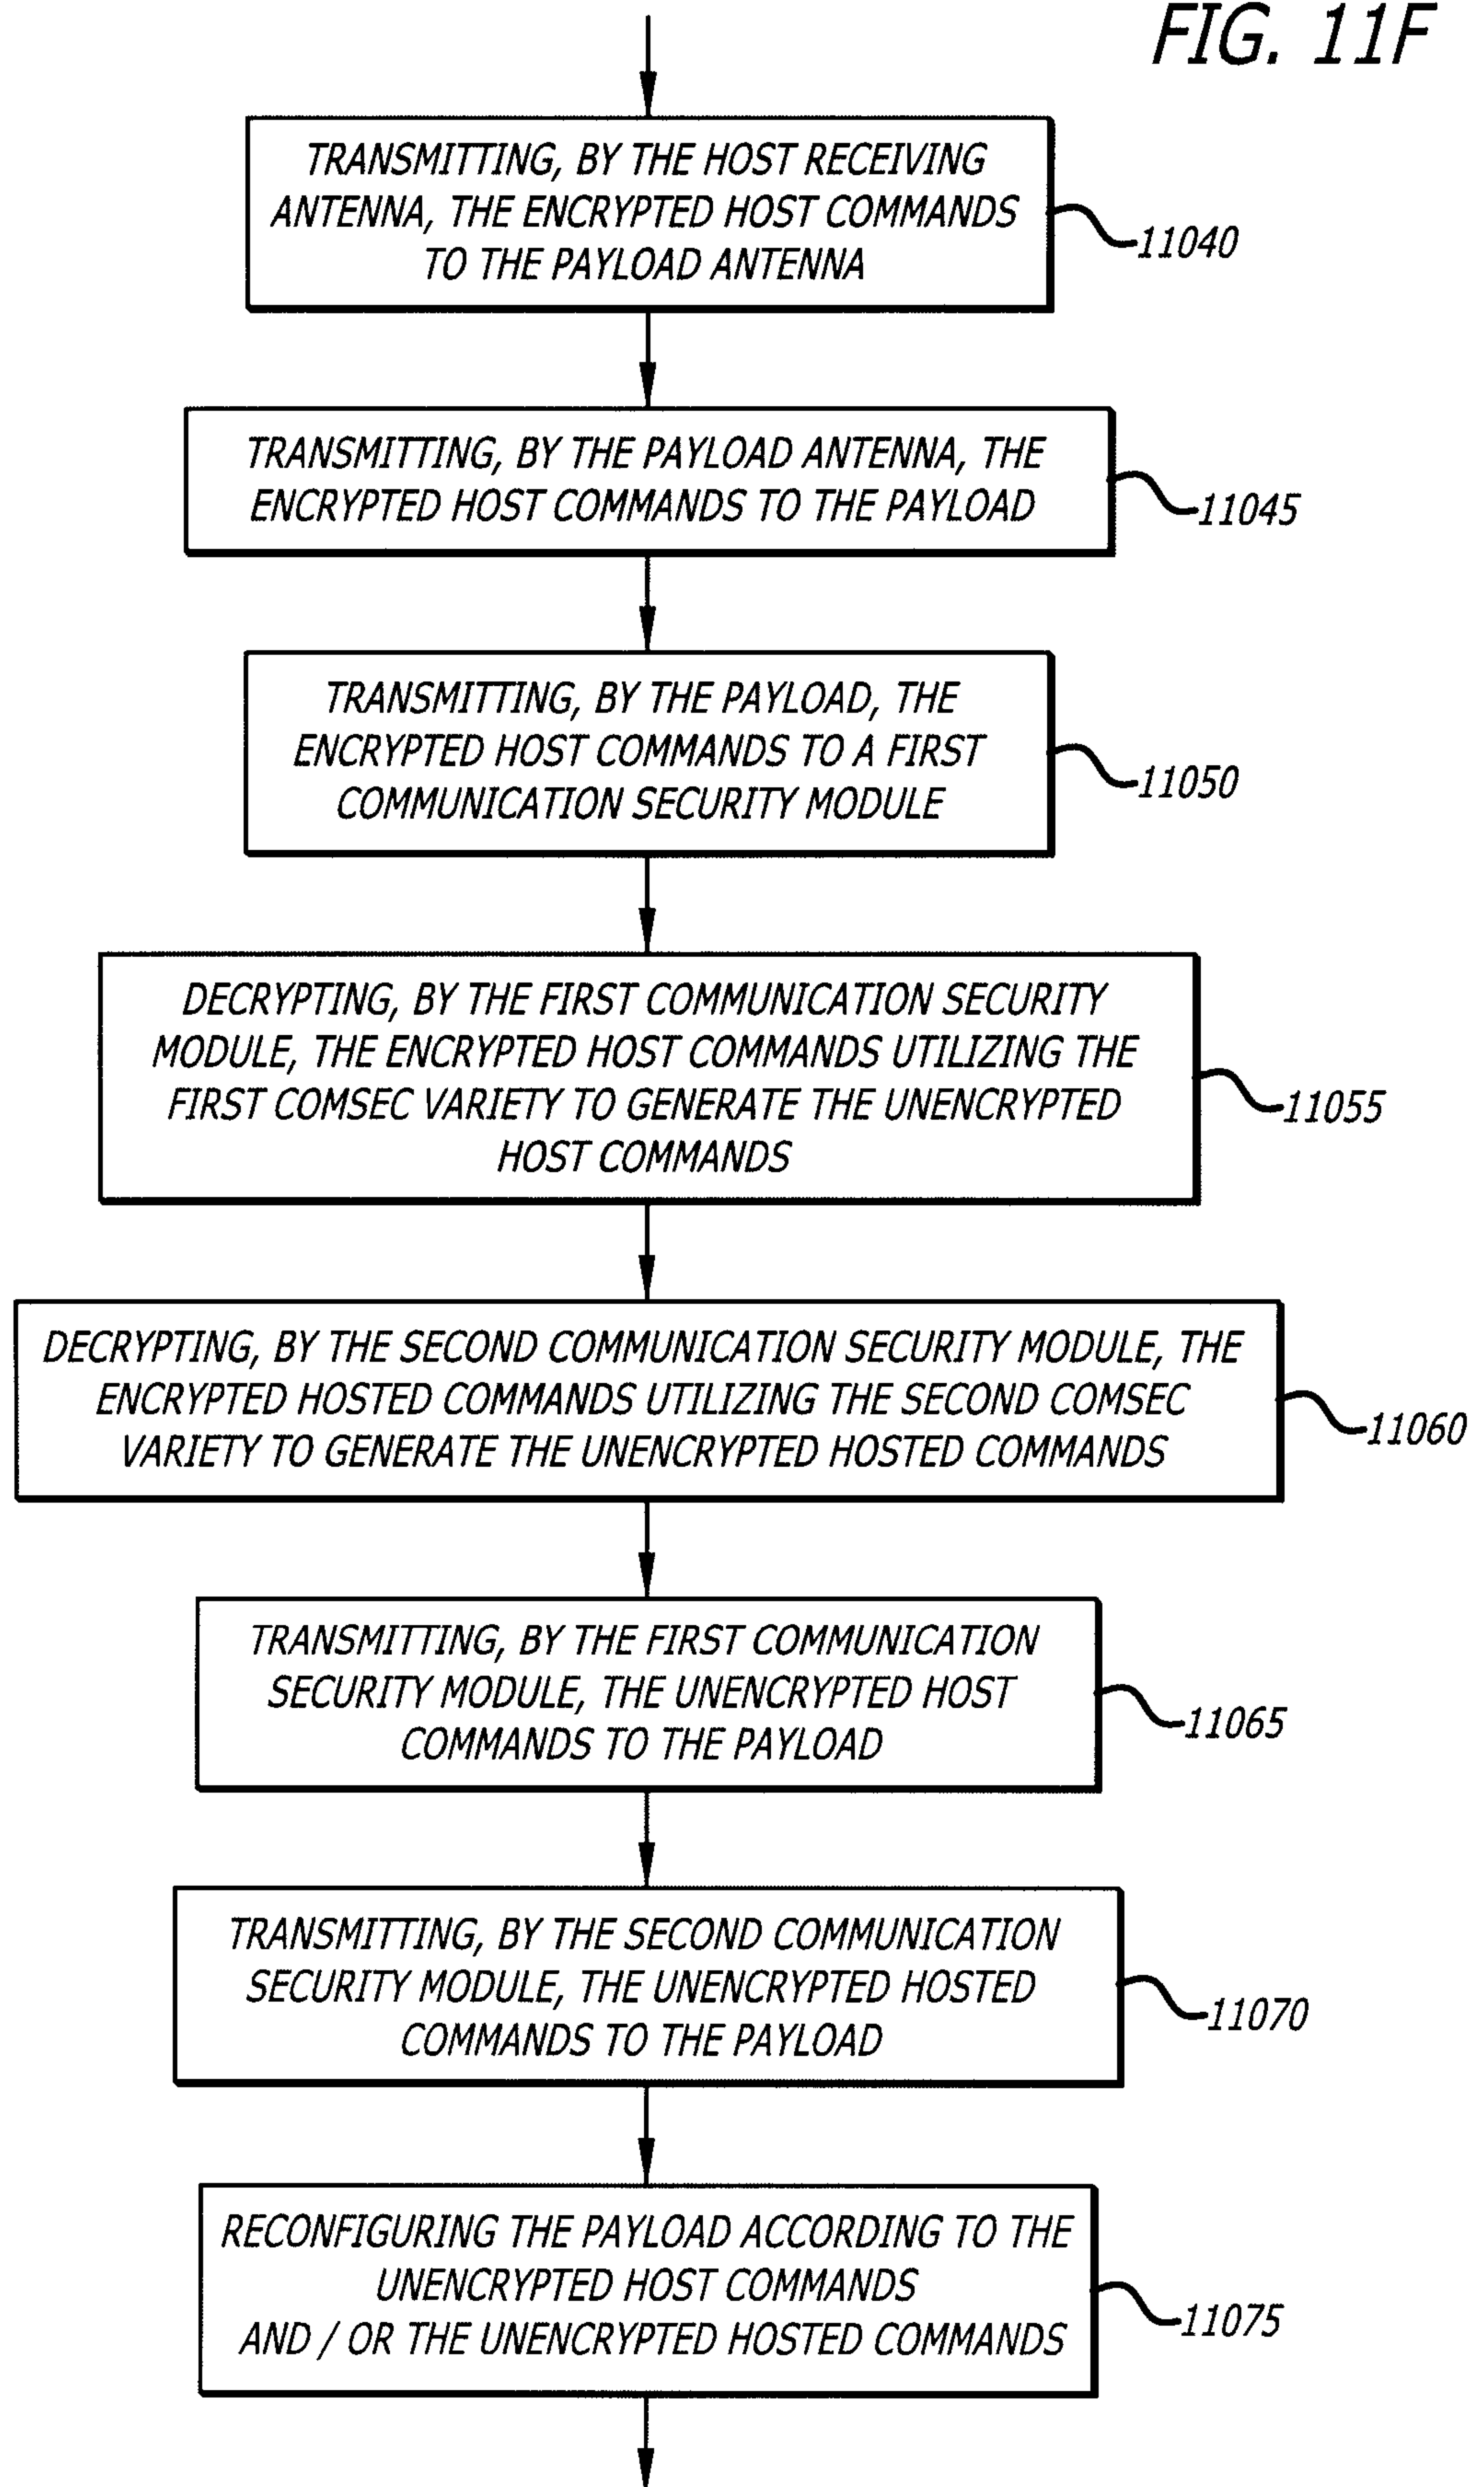


FIG. 11G

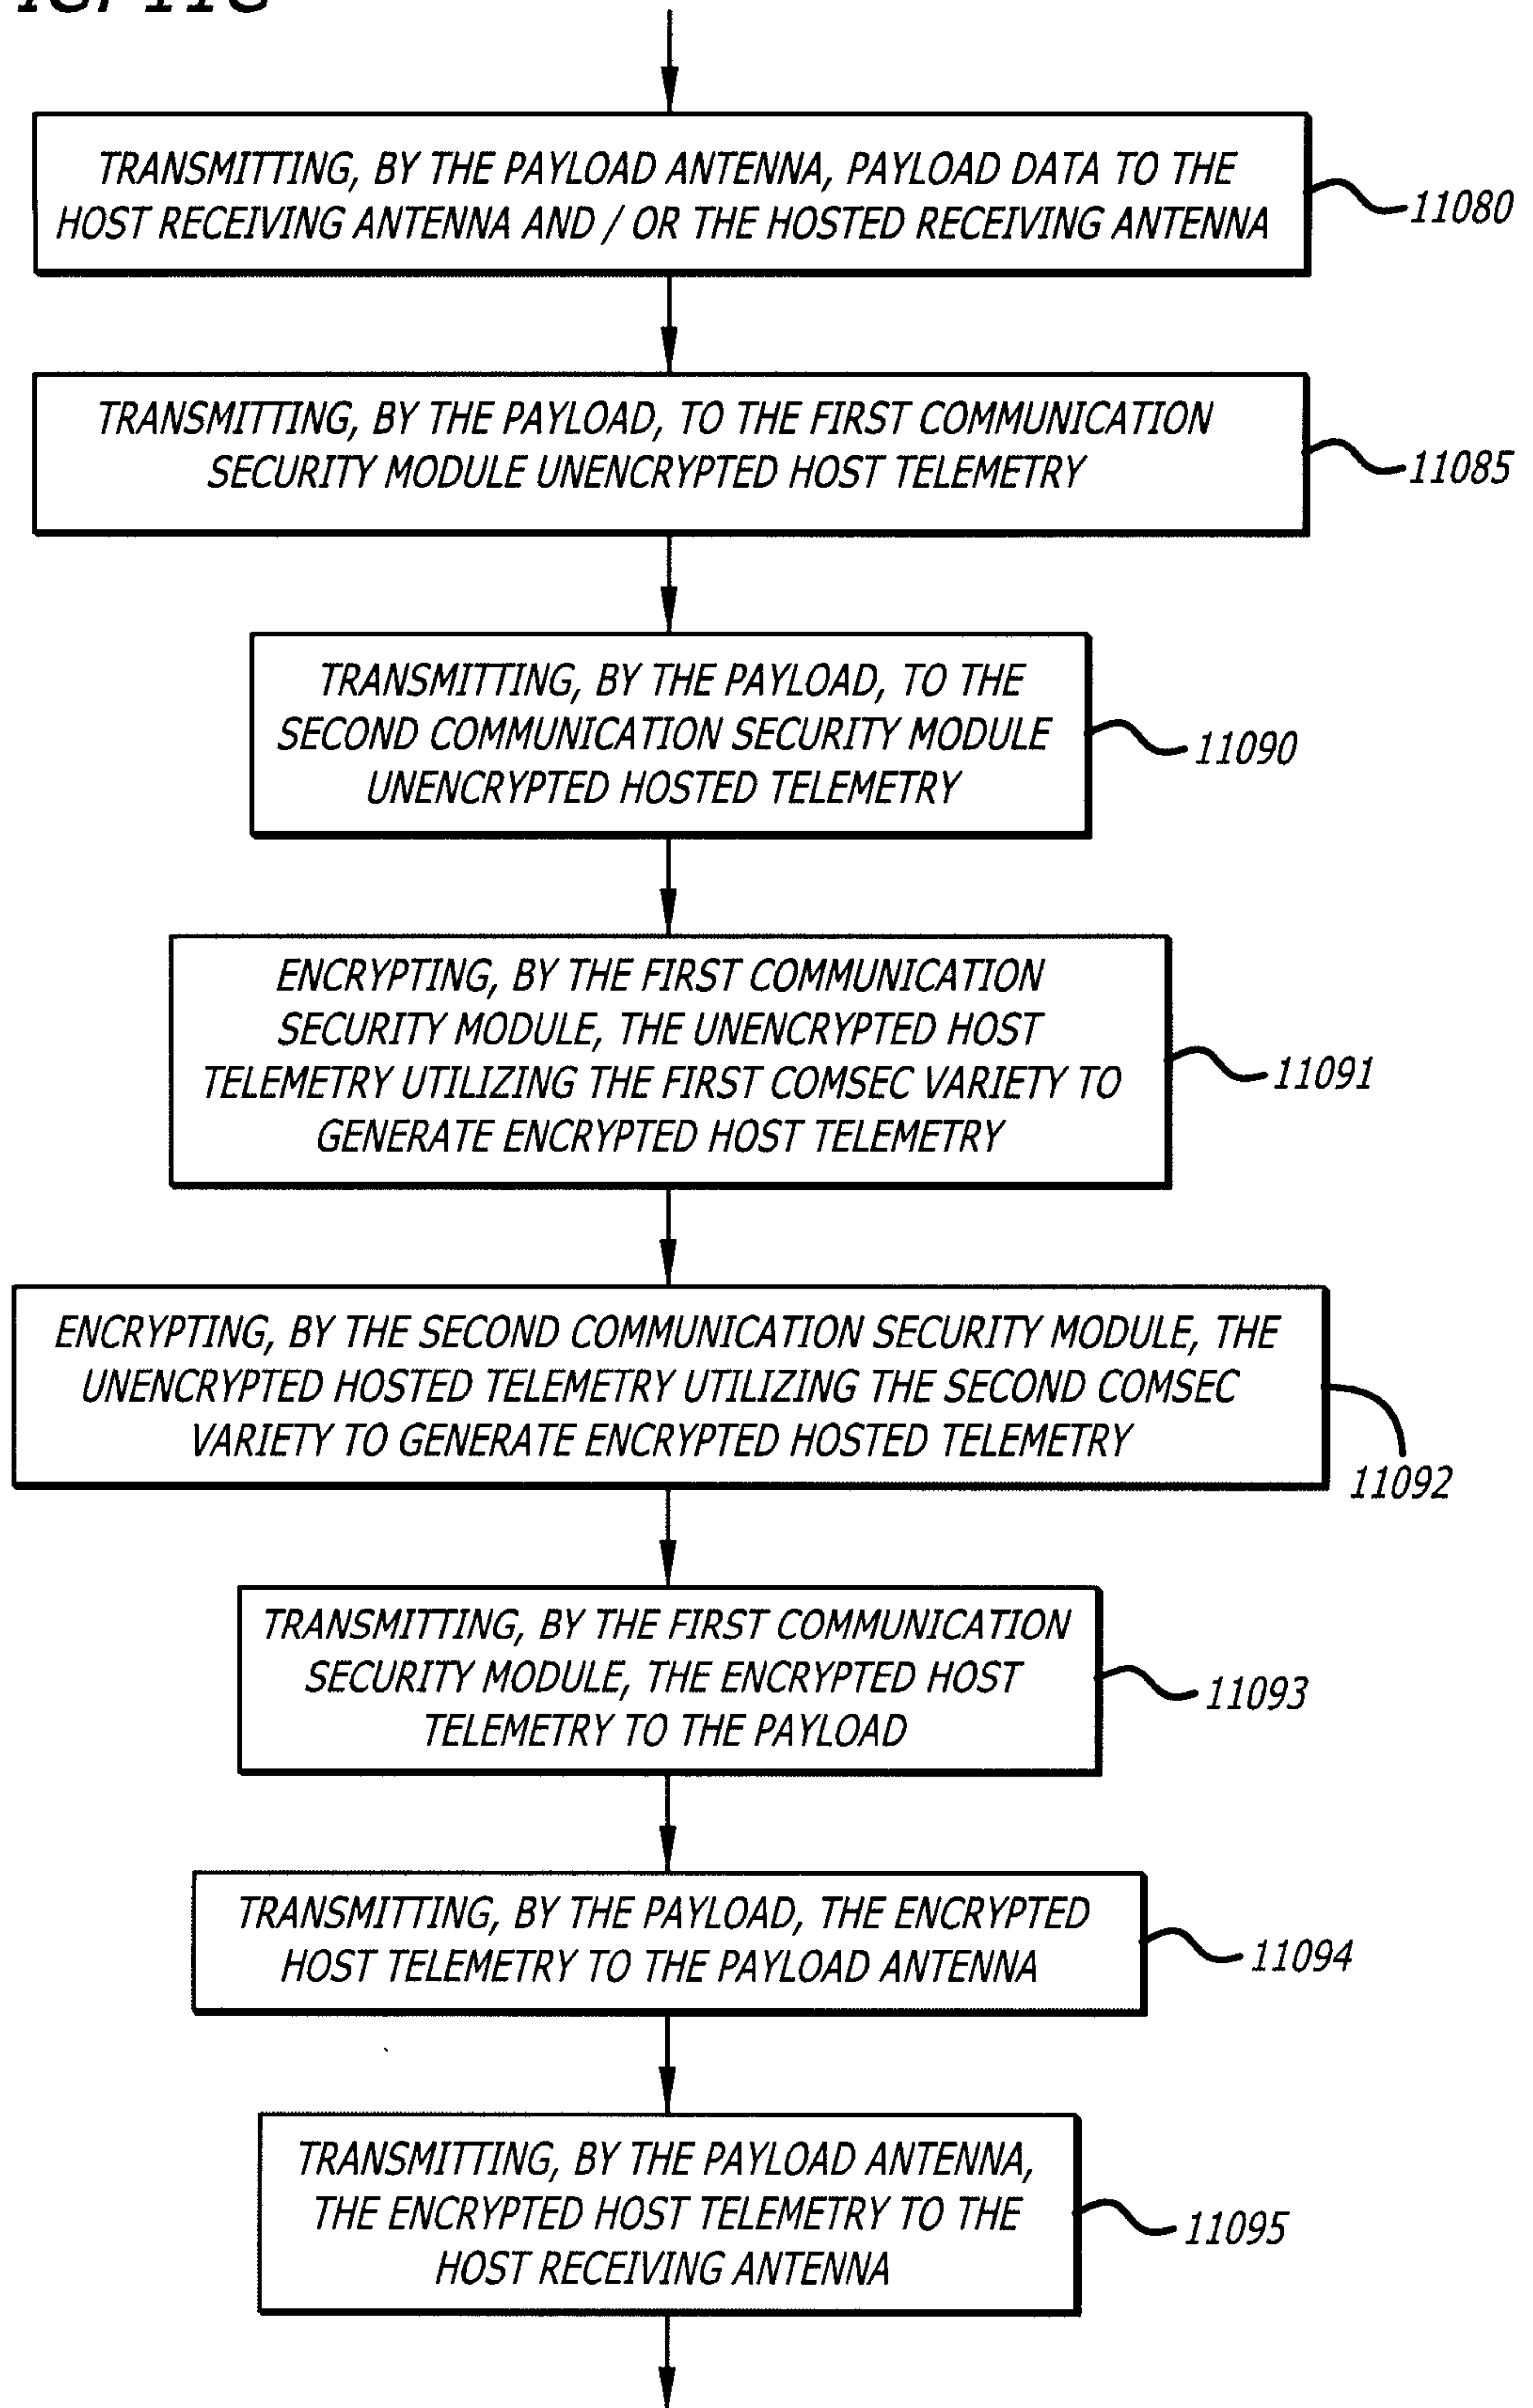
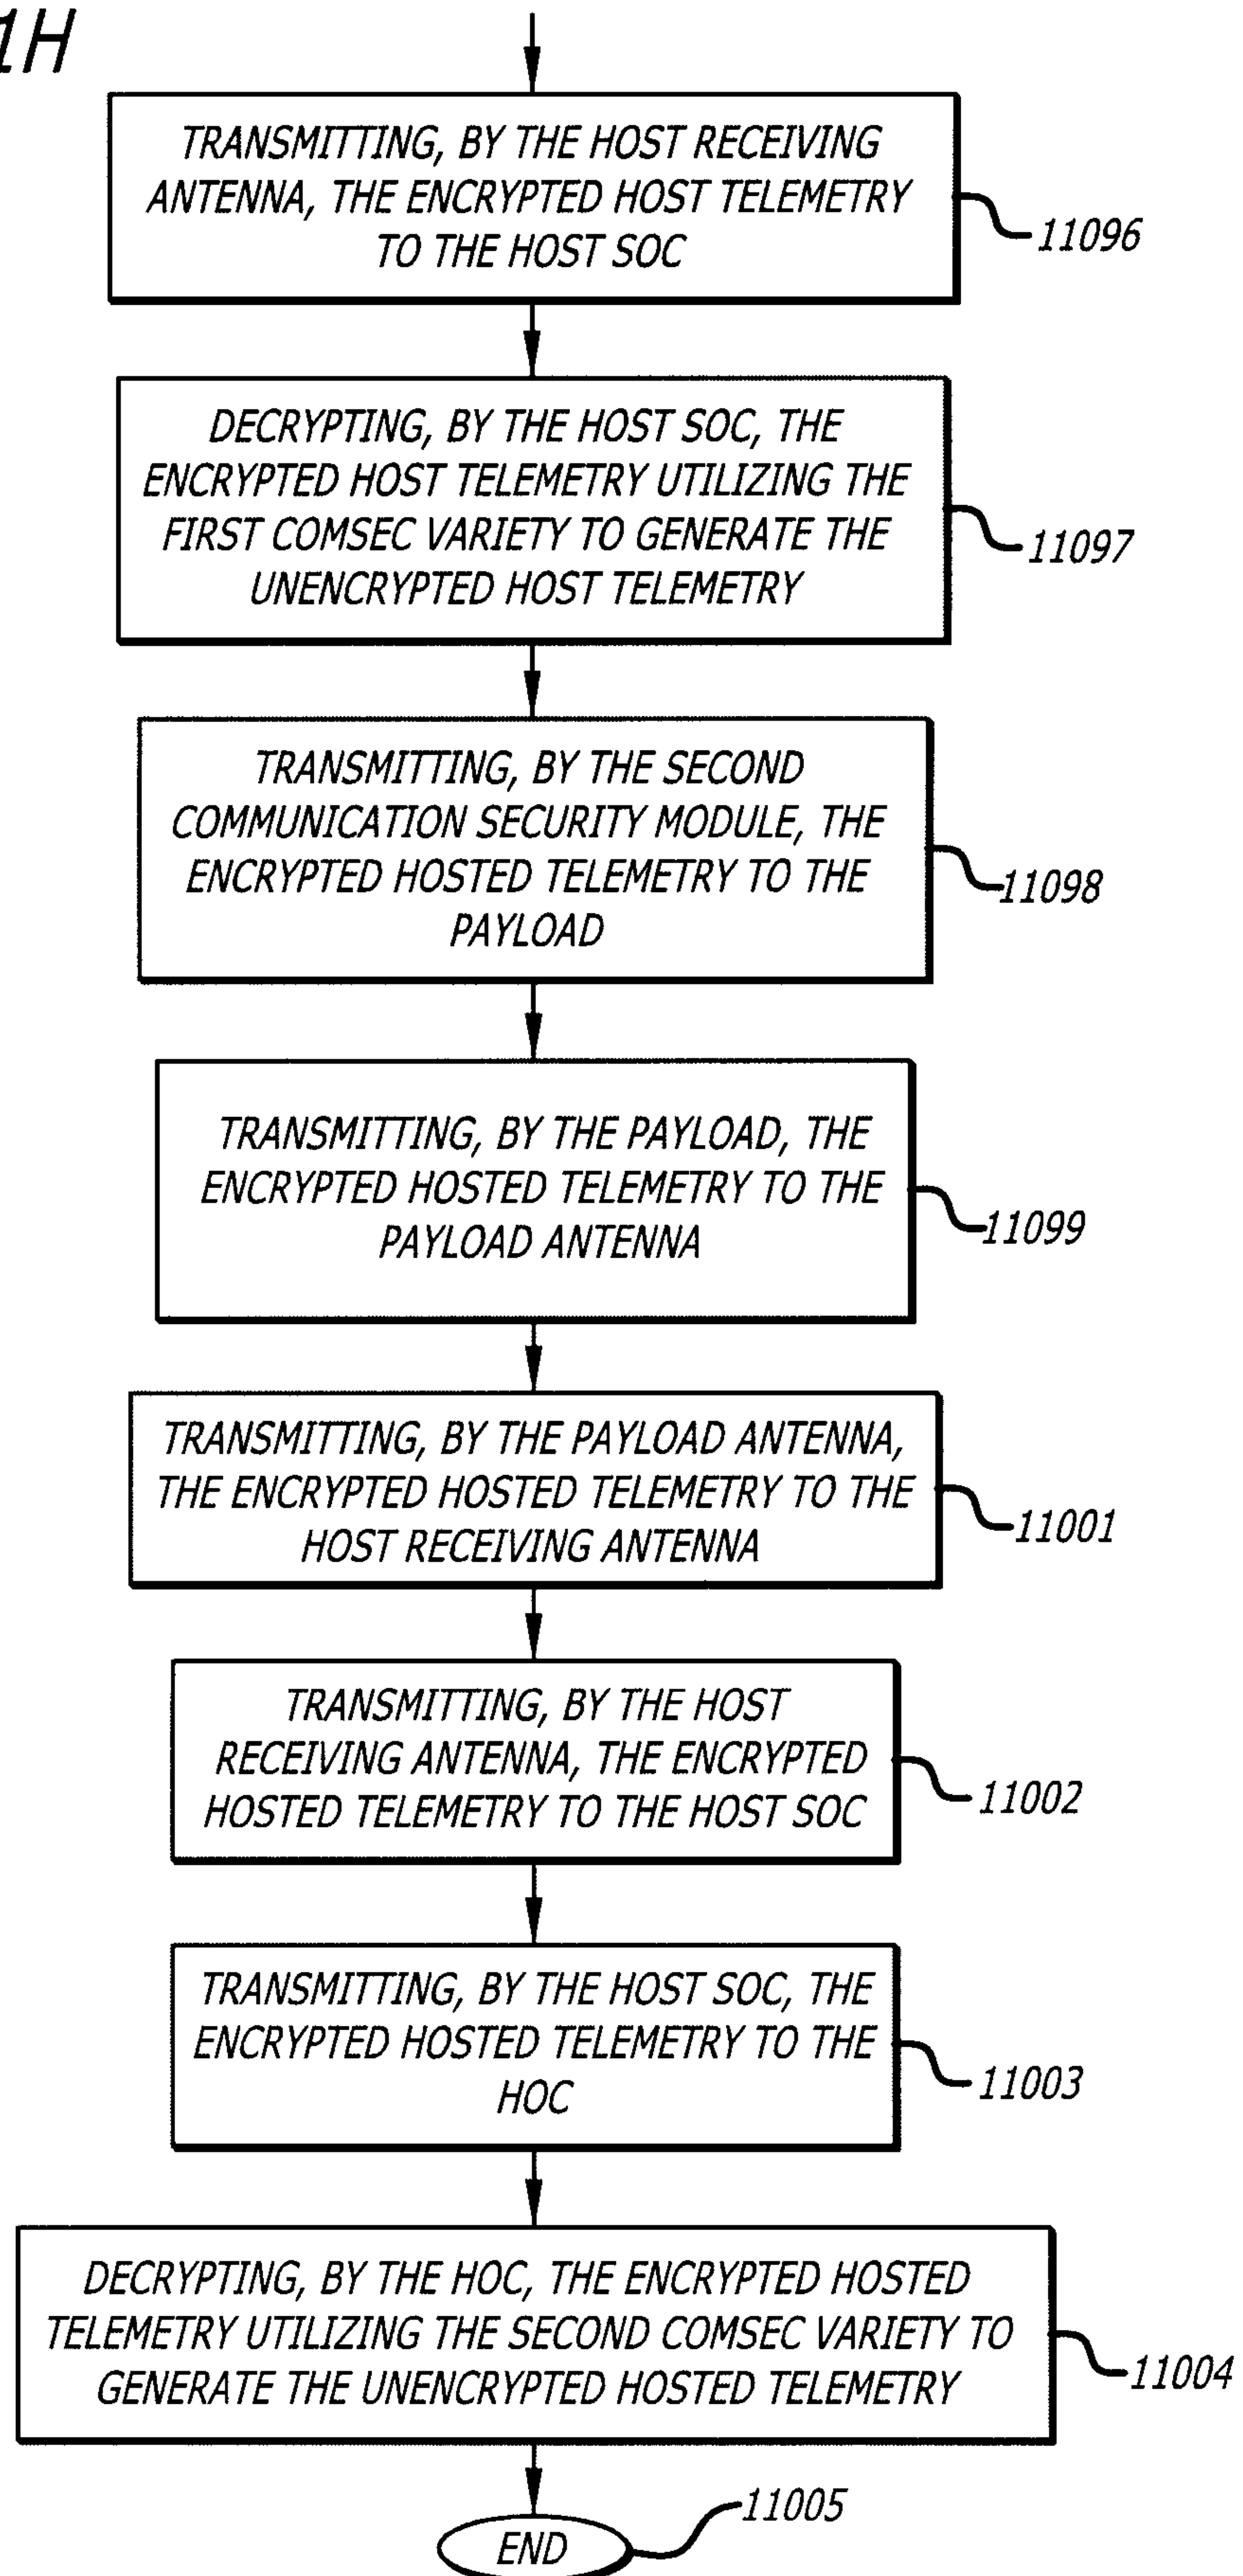
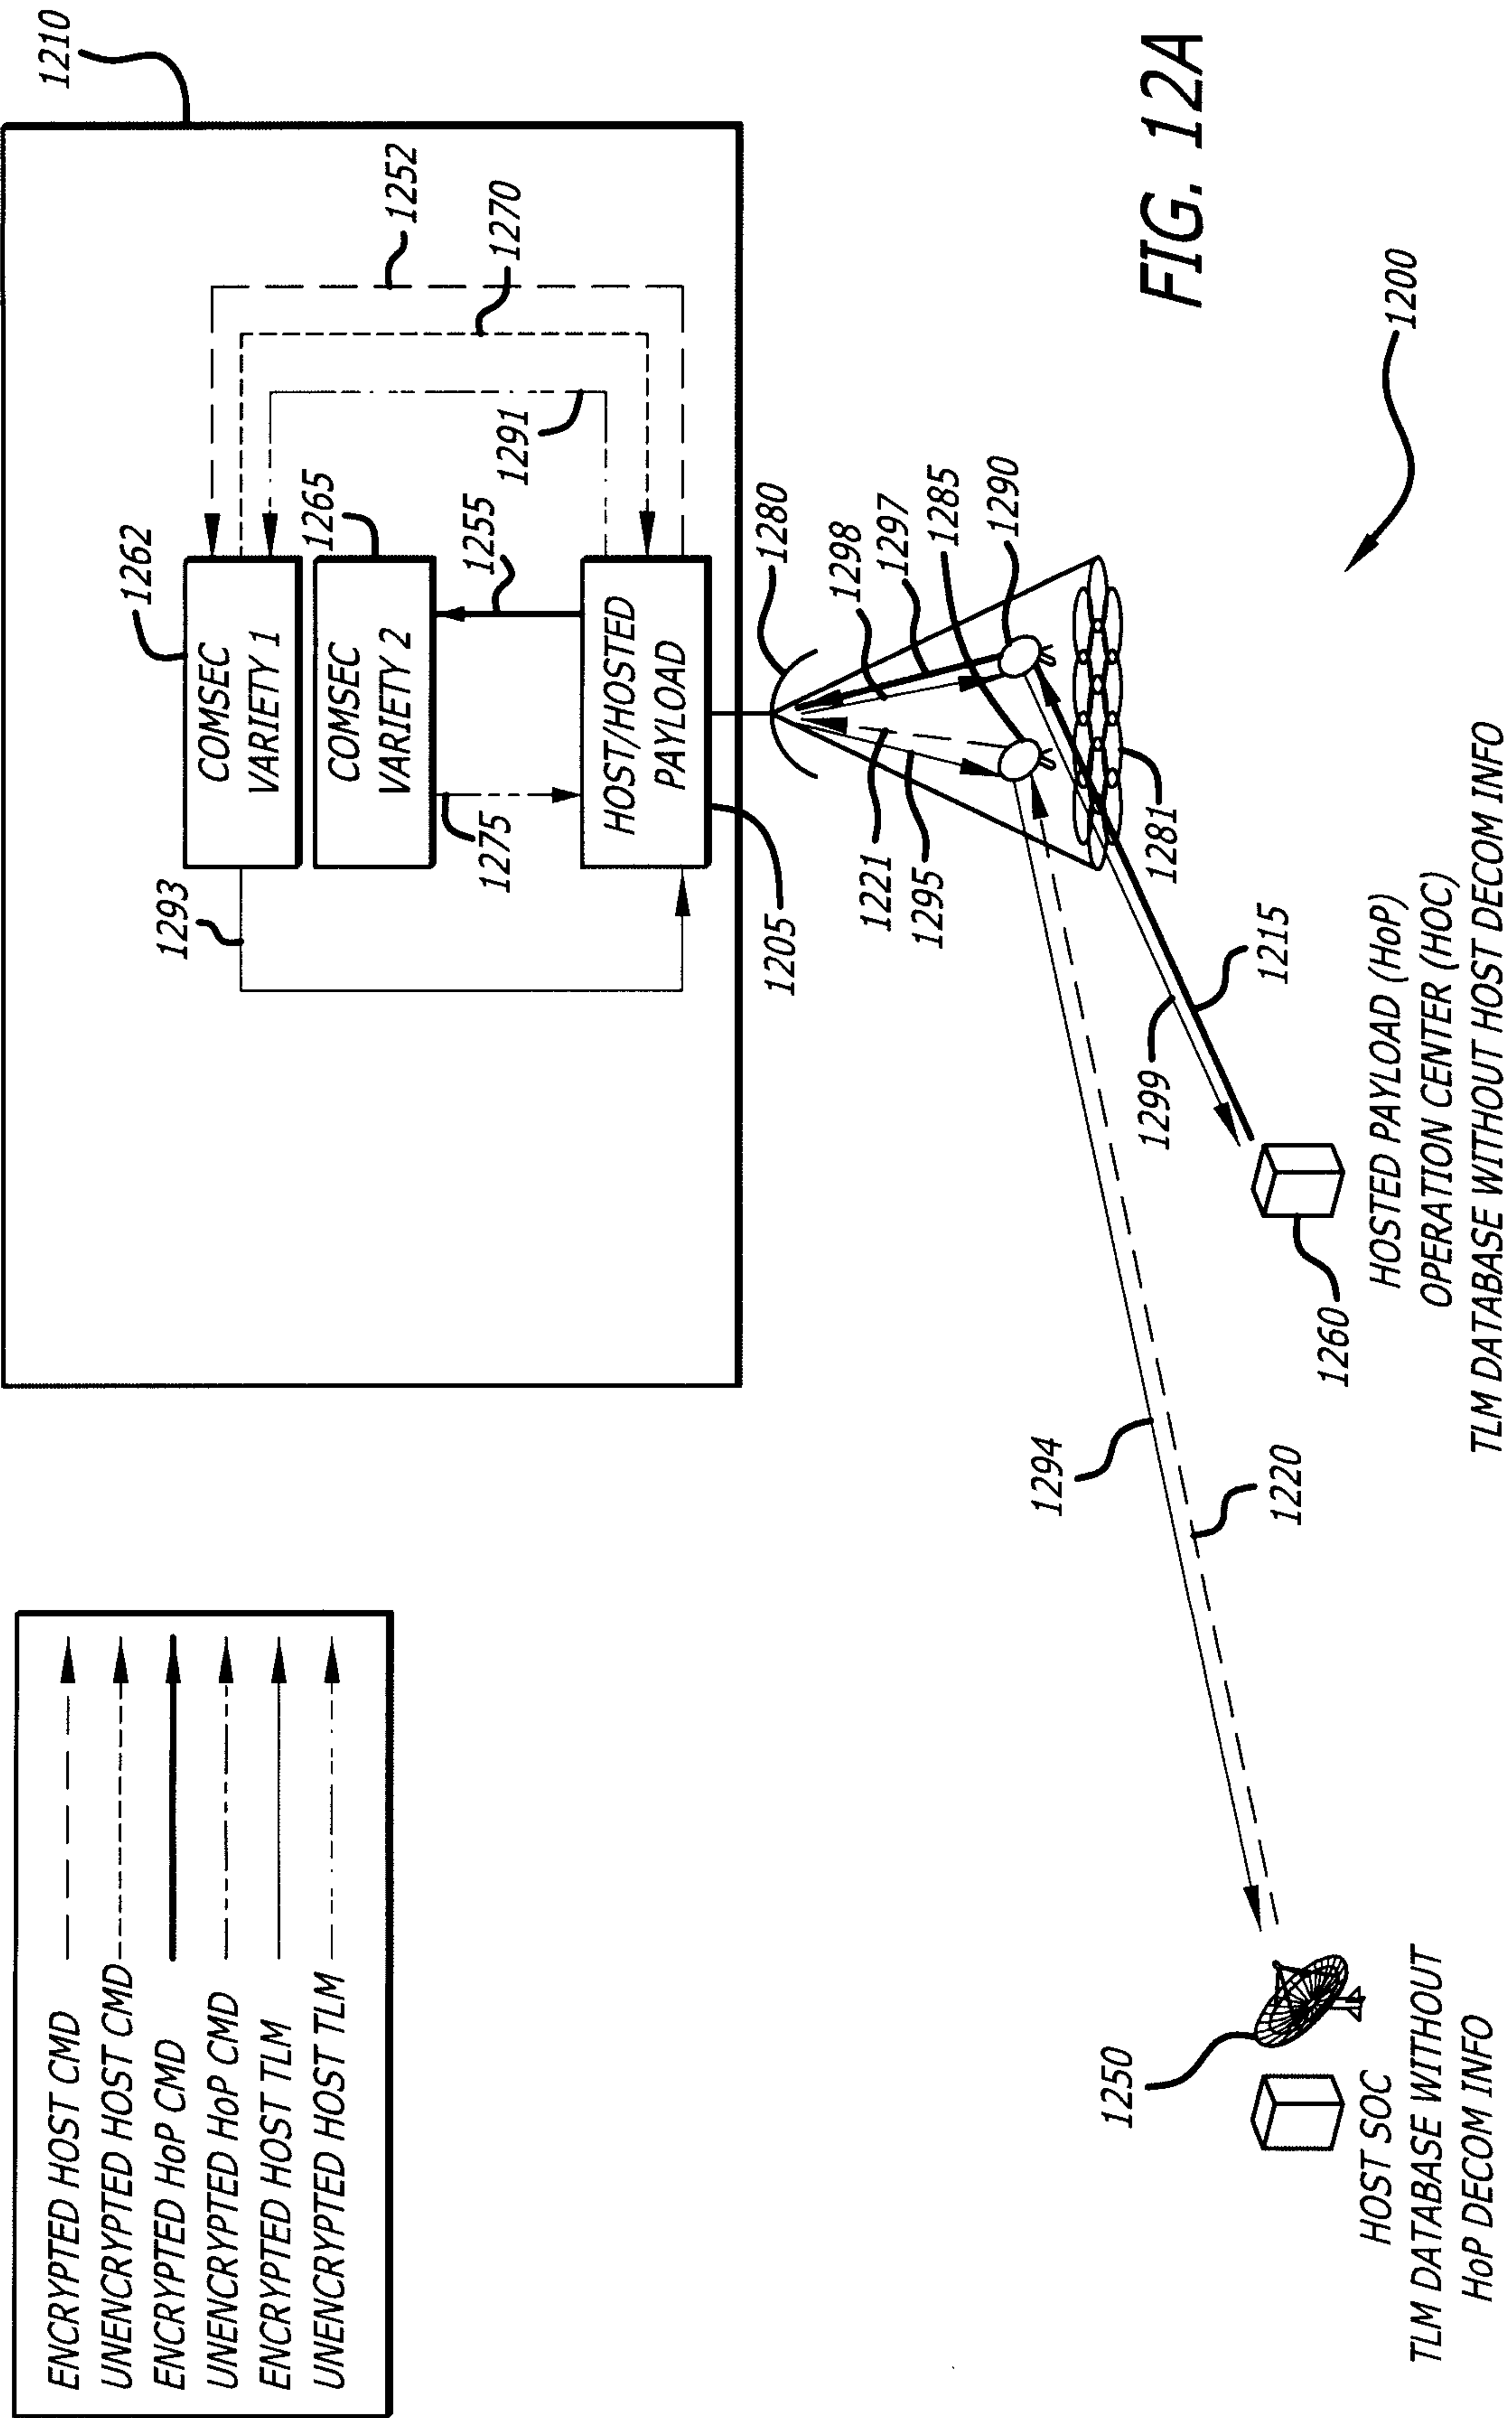


FIG. 11H





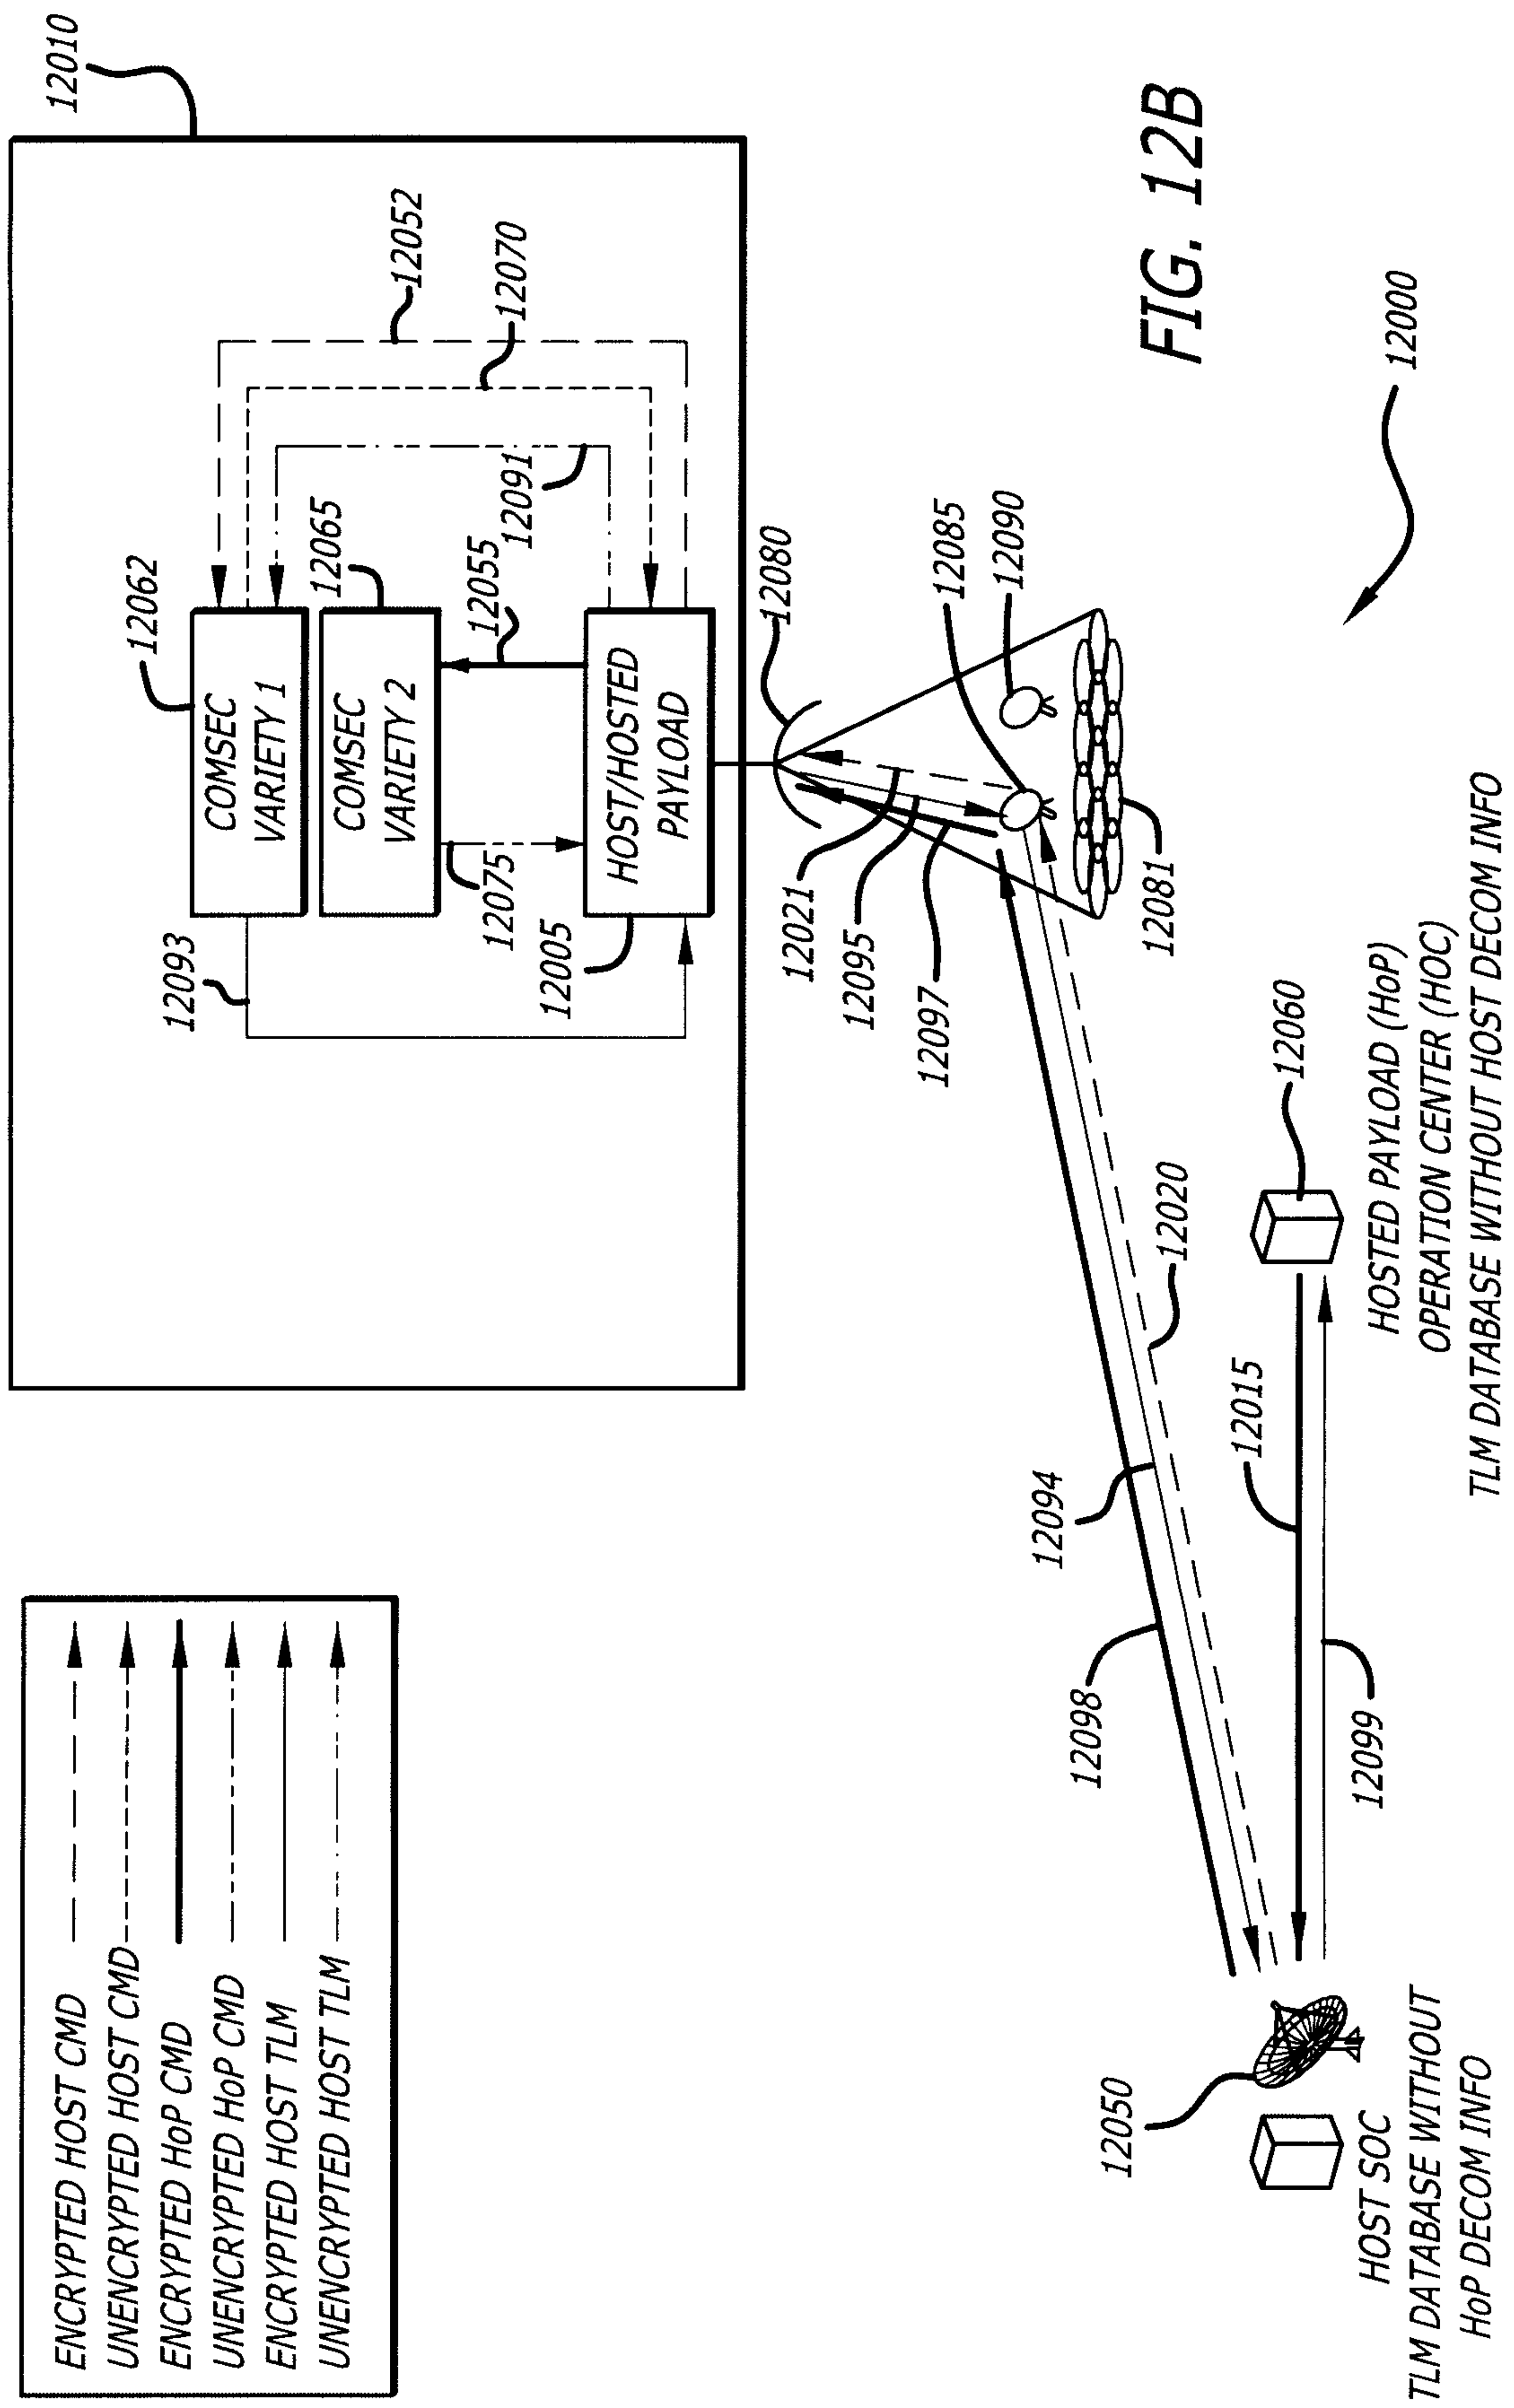


FIG. 13A

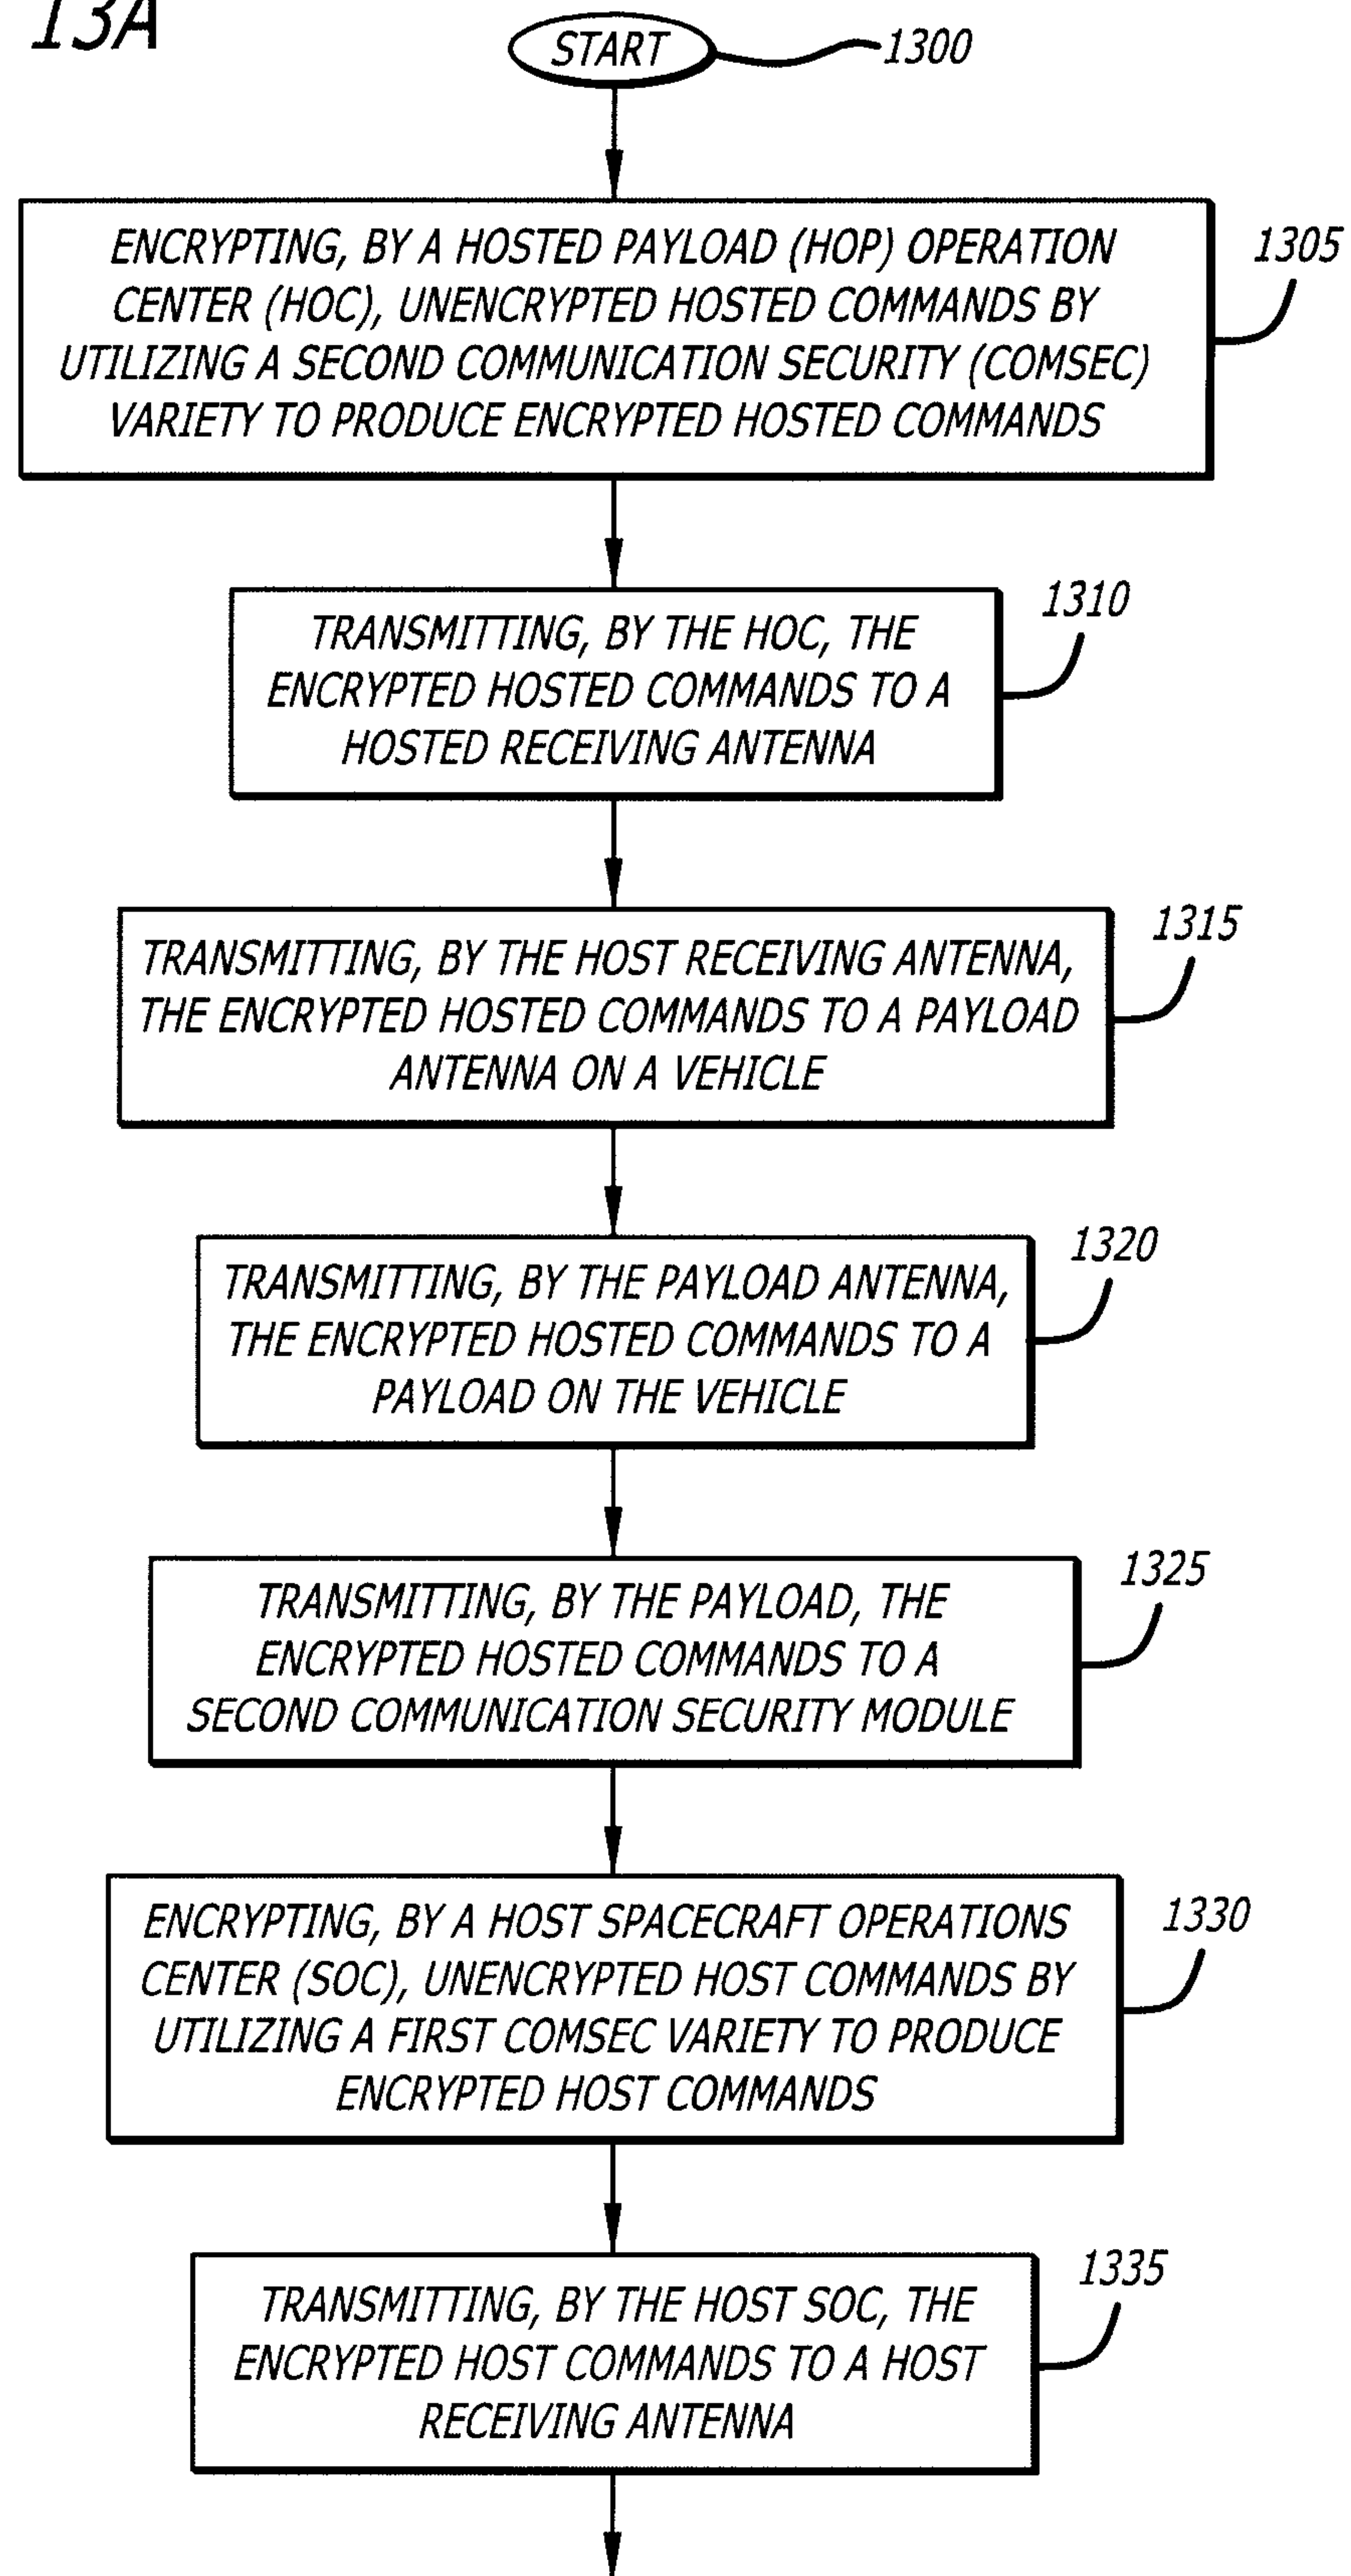


FIG. 13B

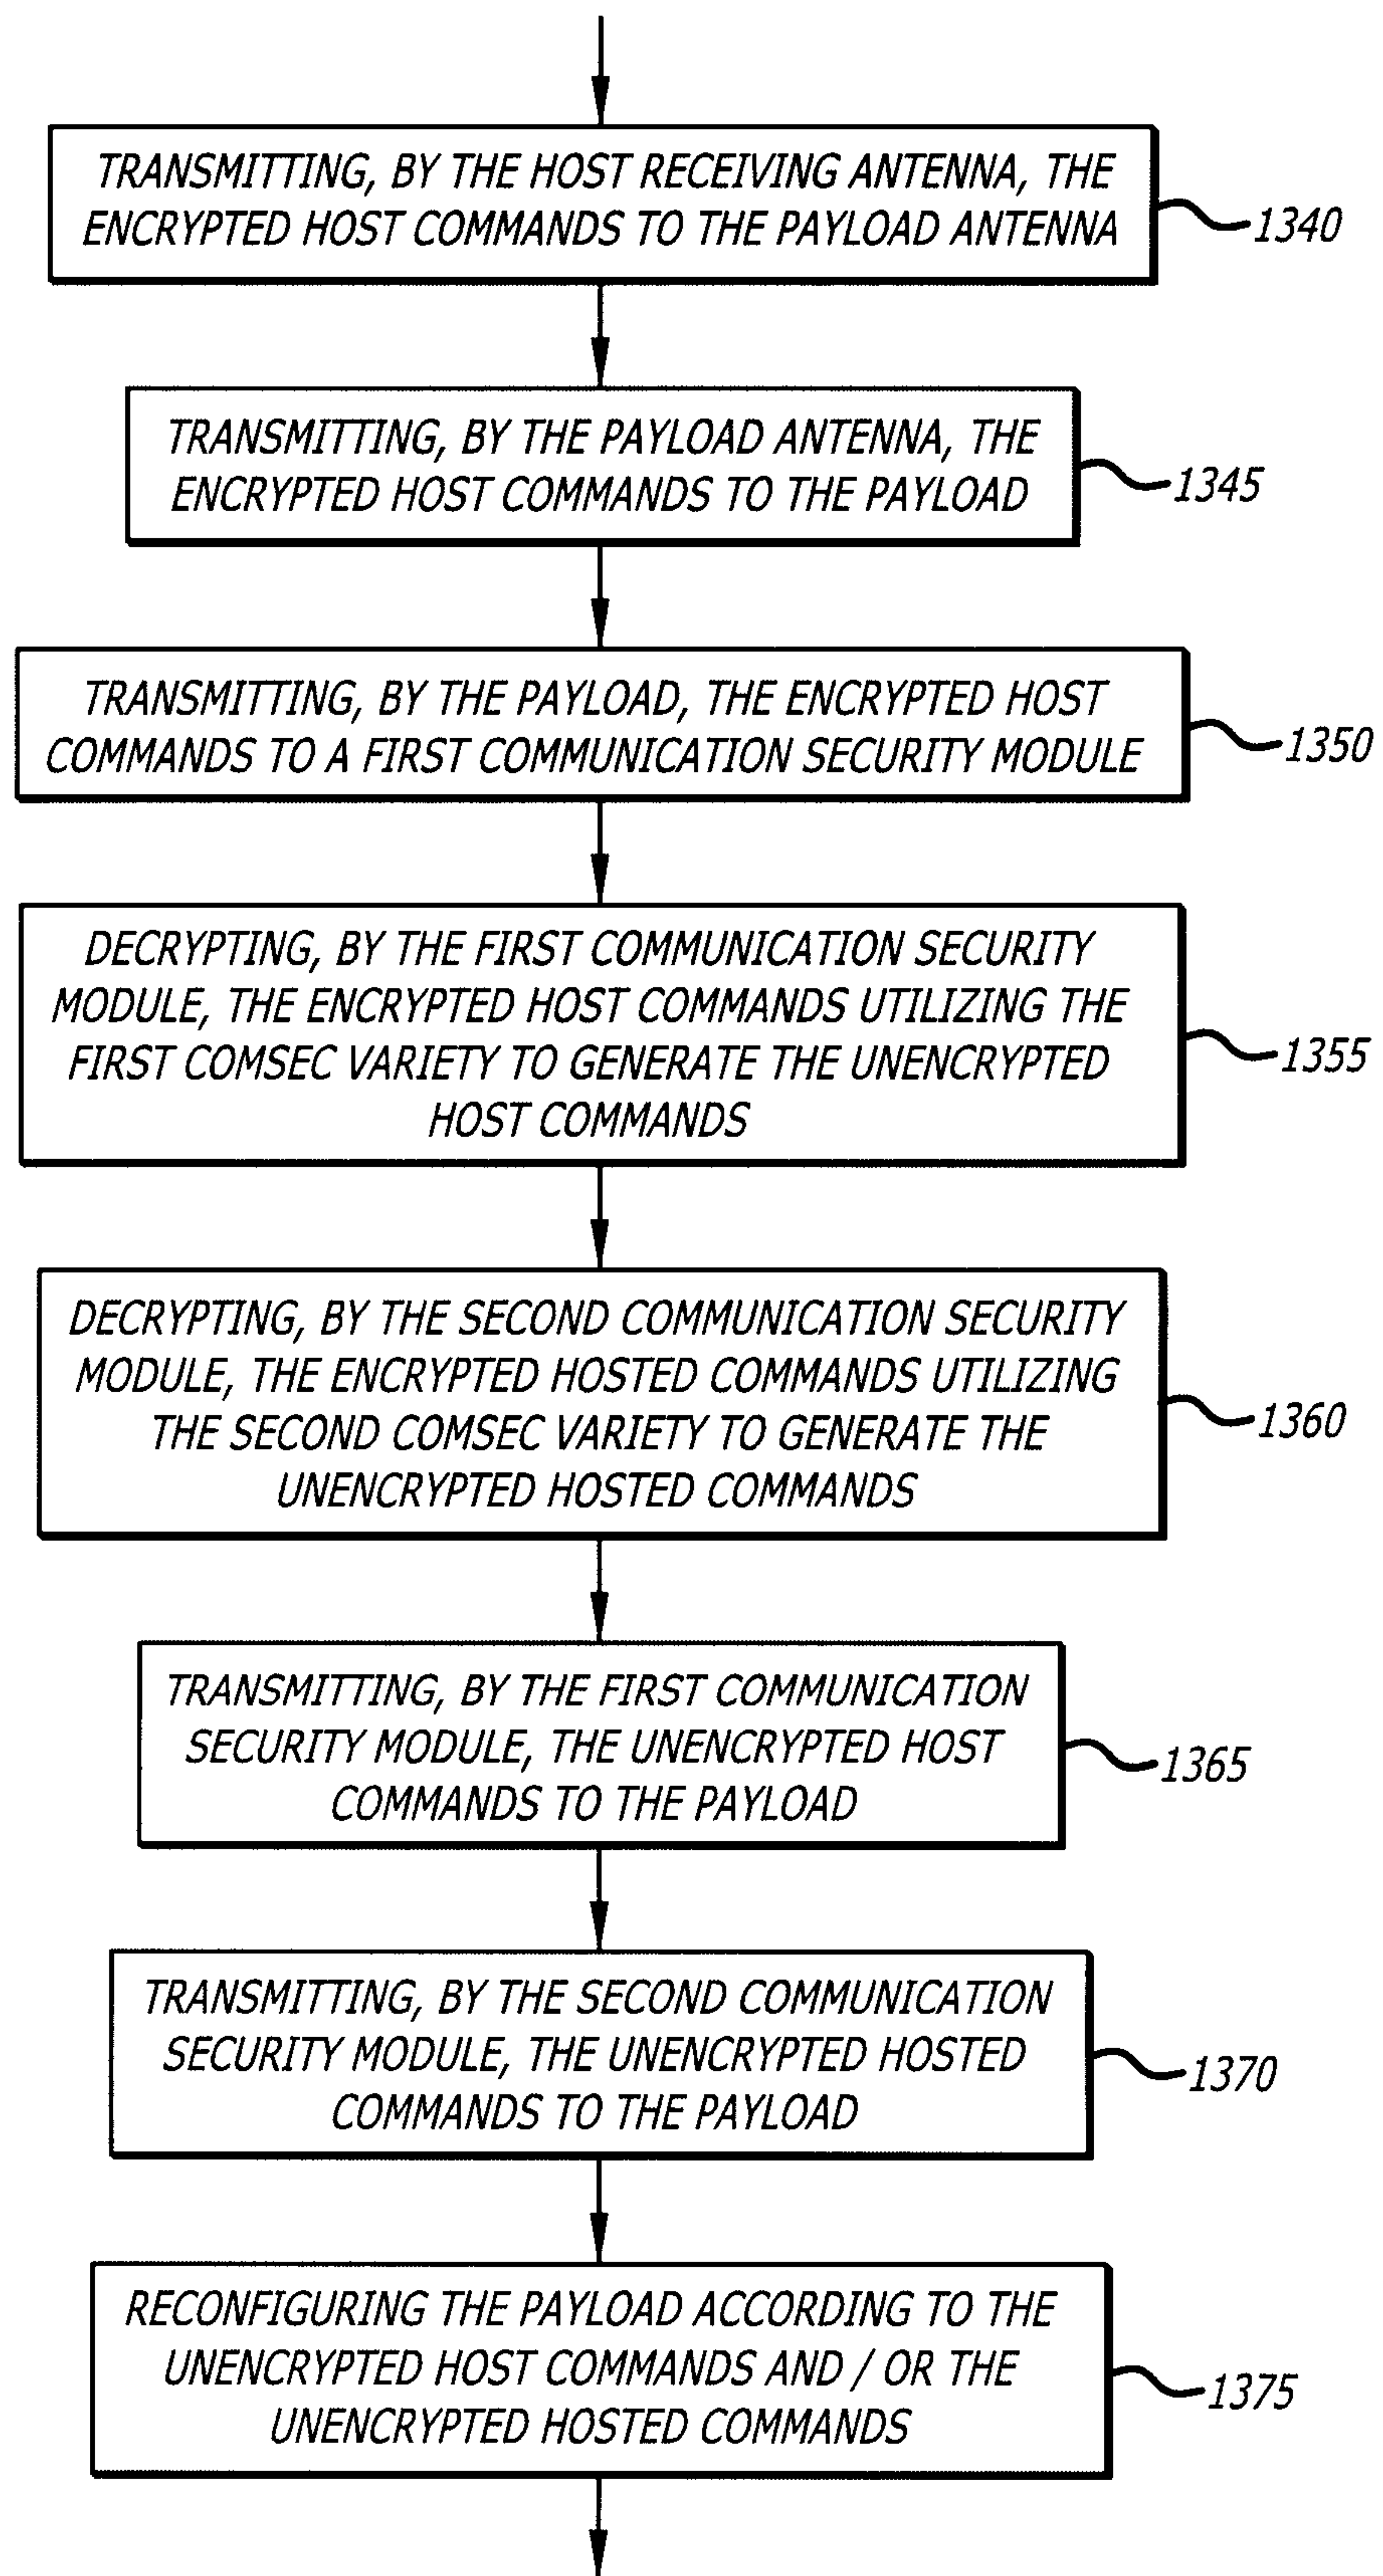
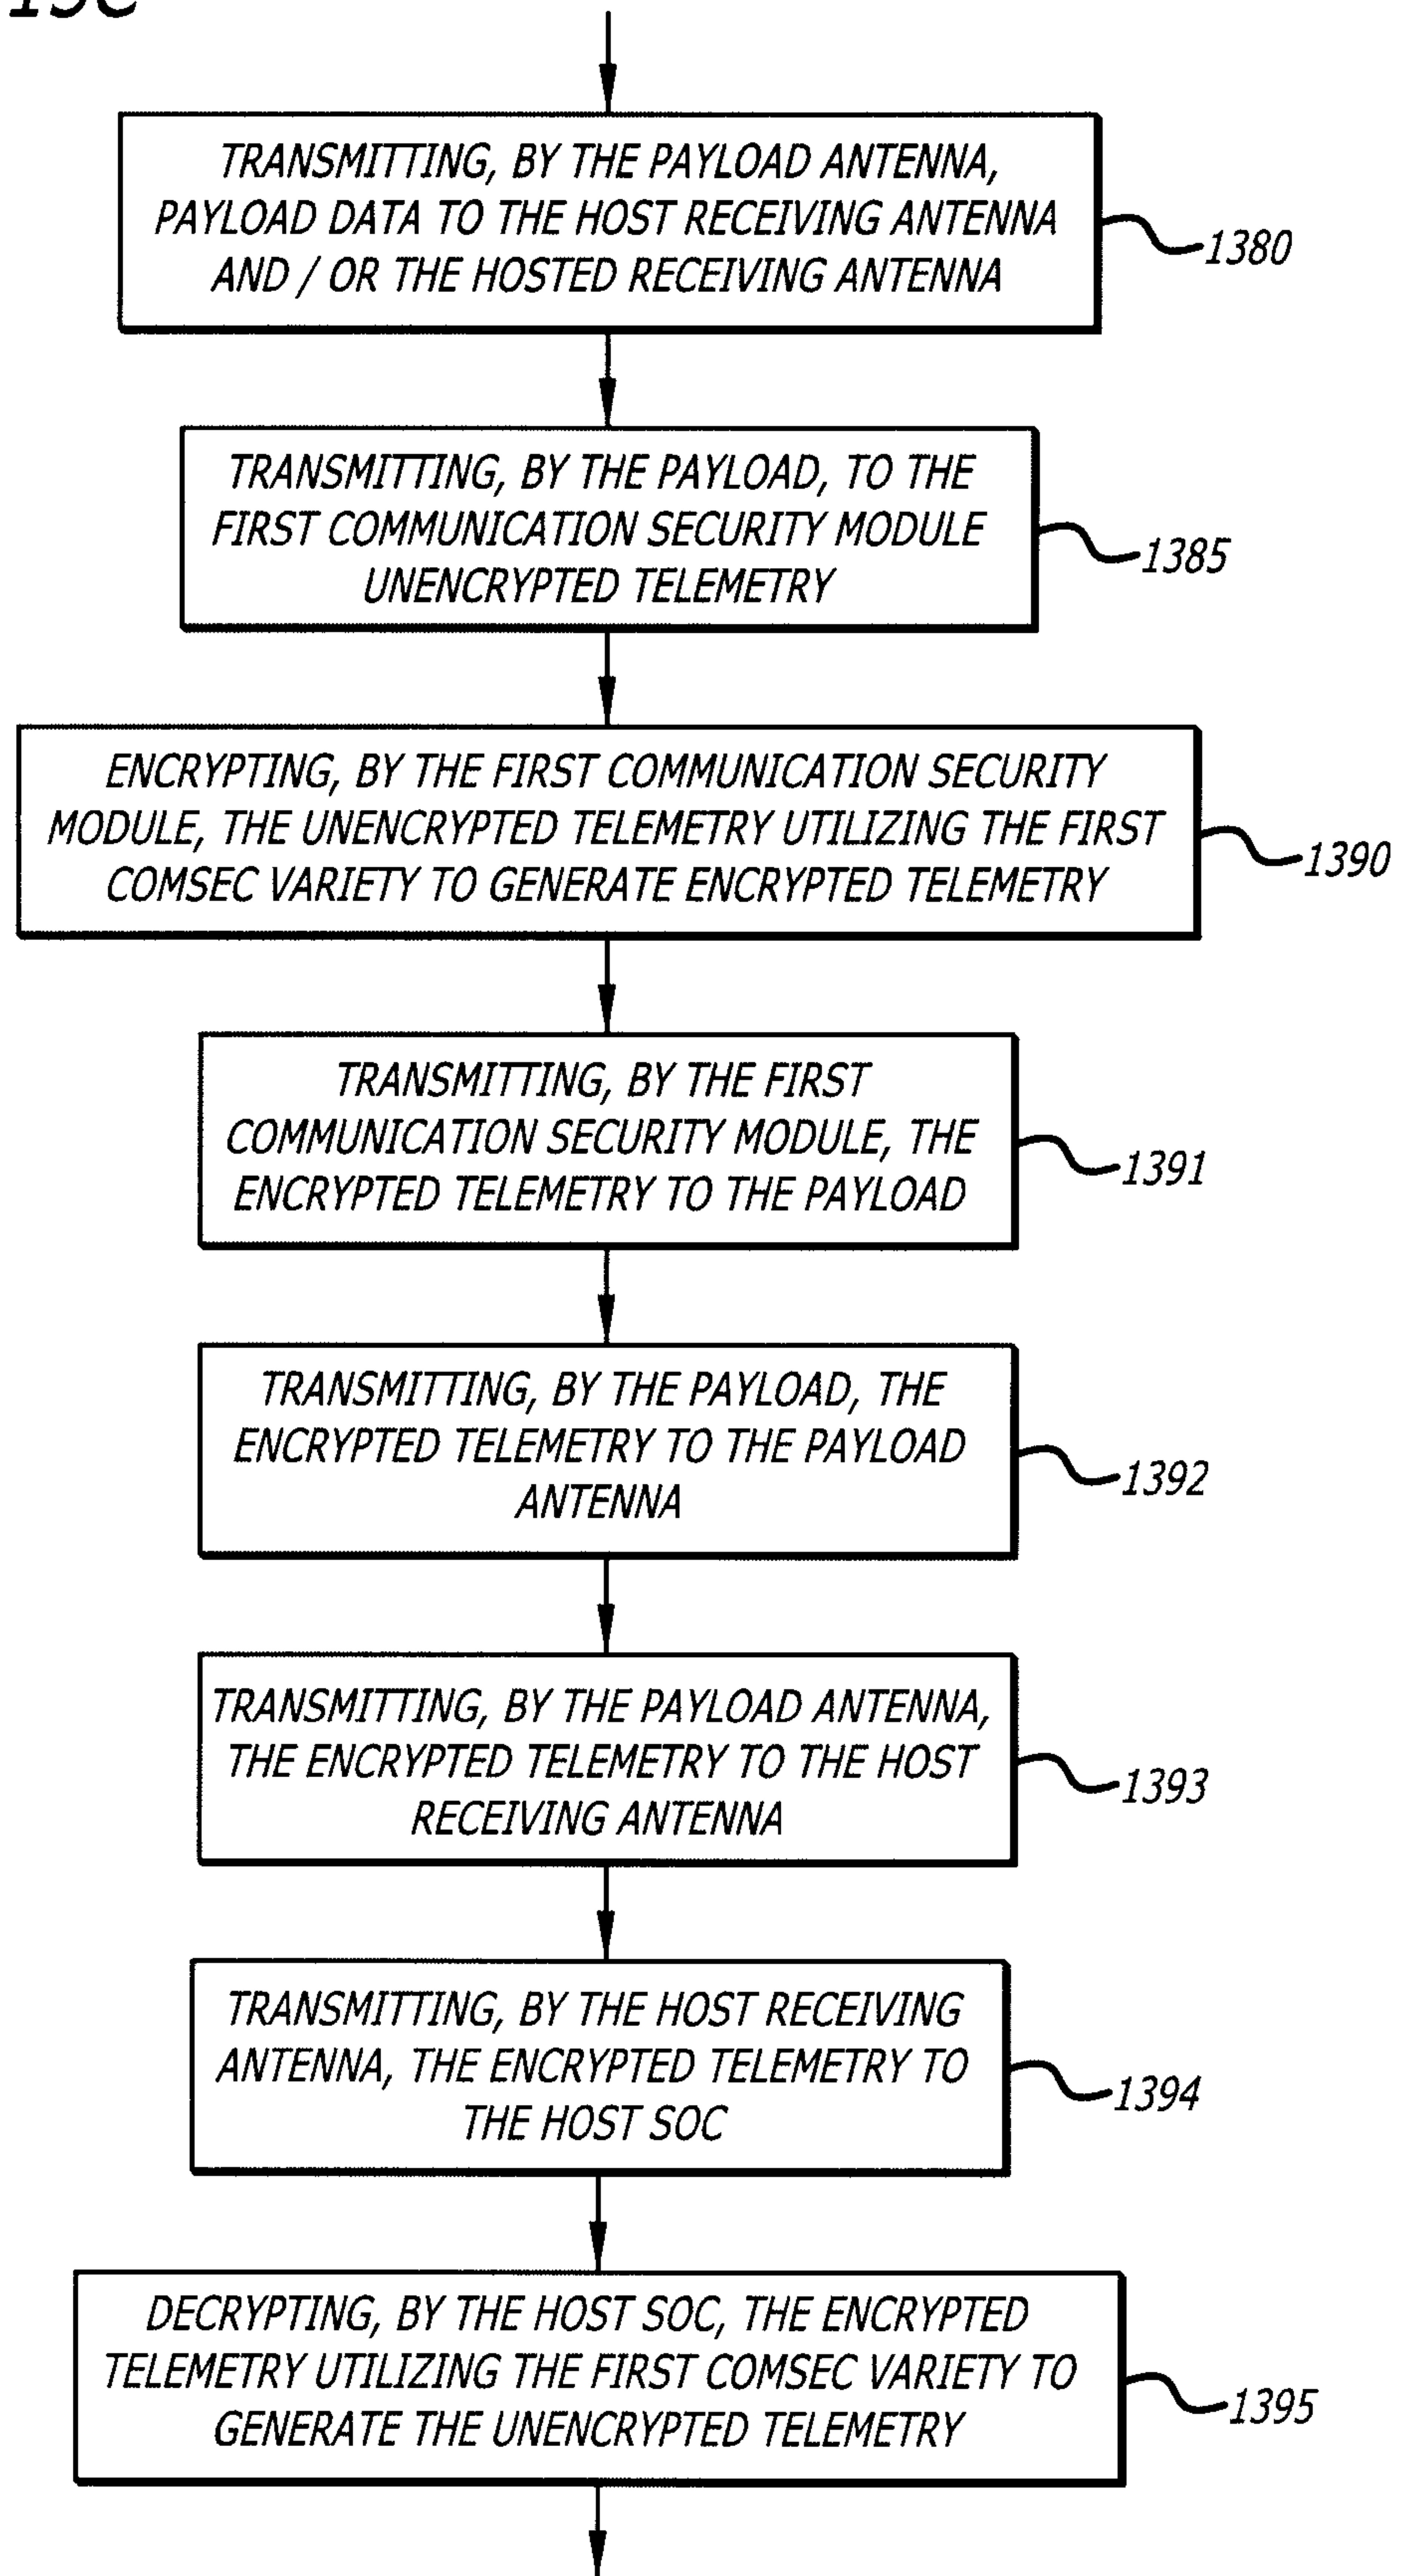


FIG. 13C



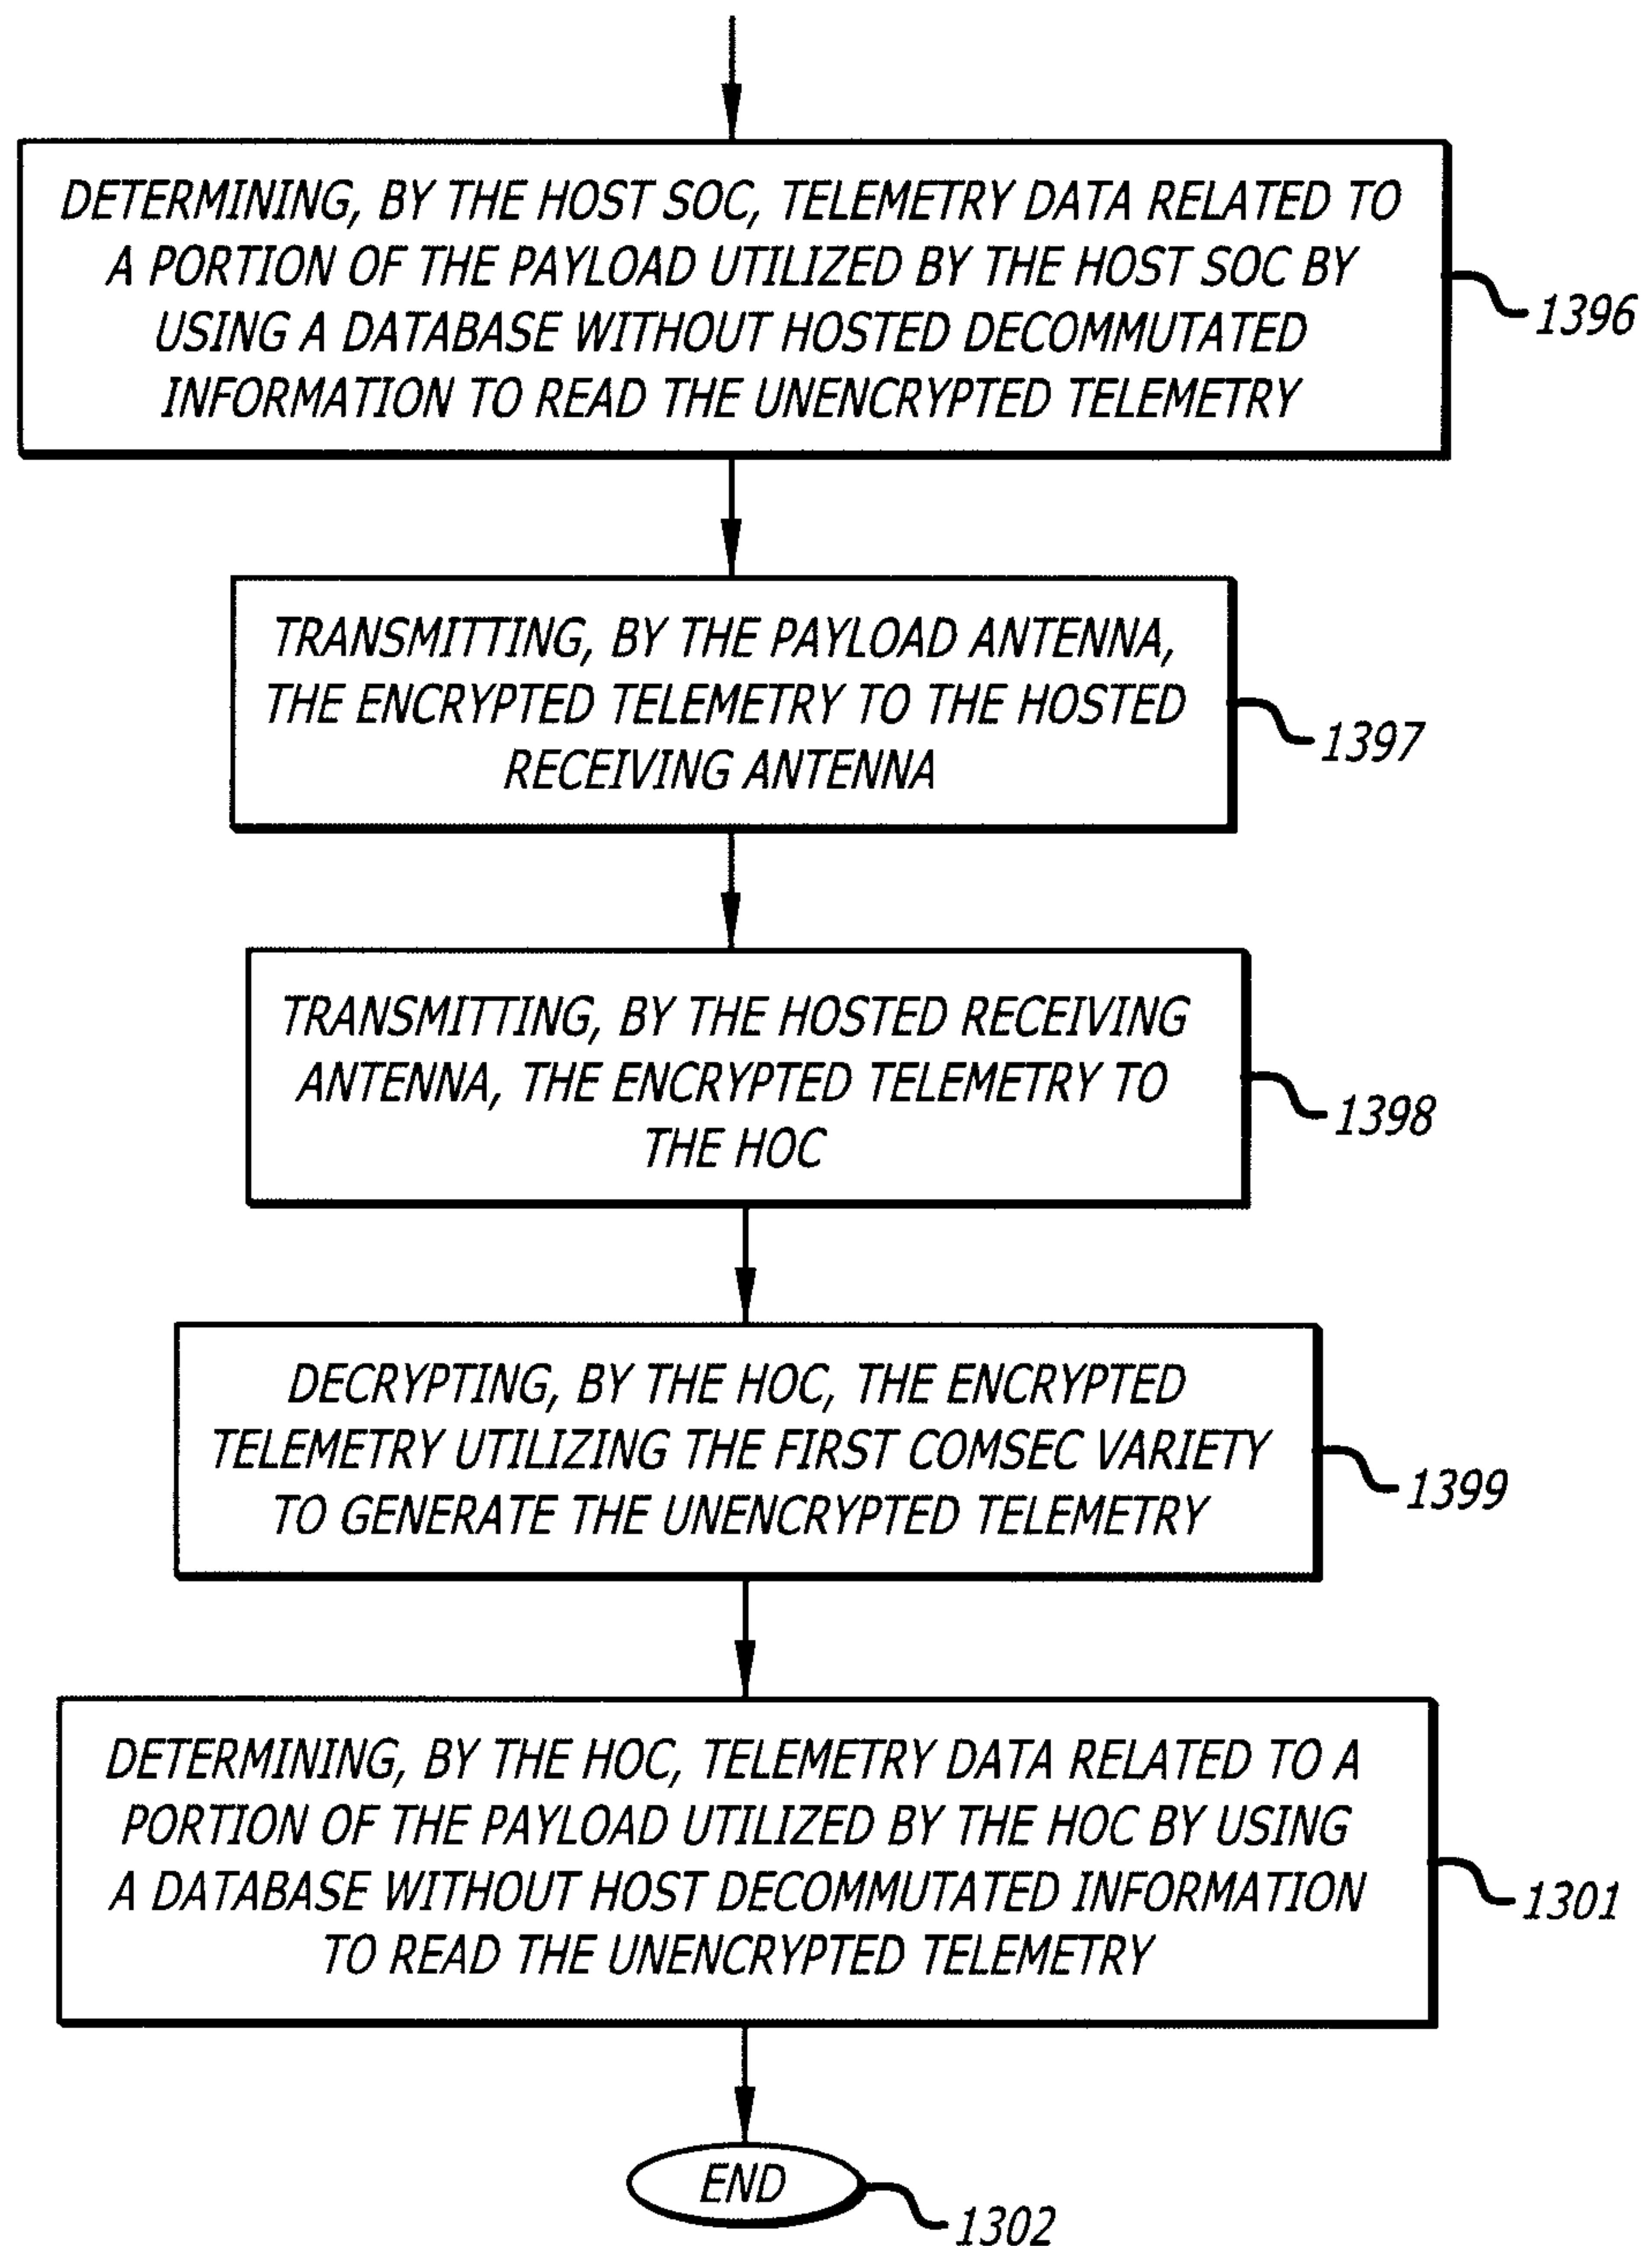


FIG. 13D

FIG. 13E

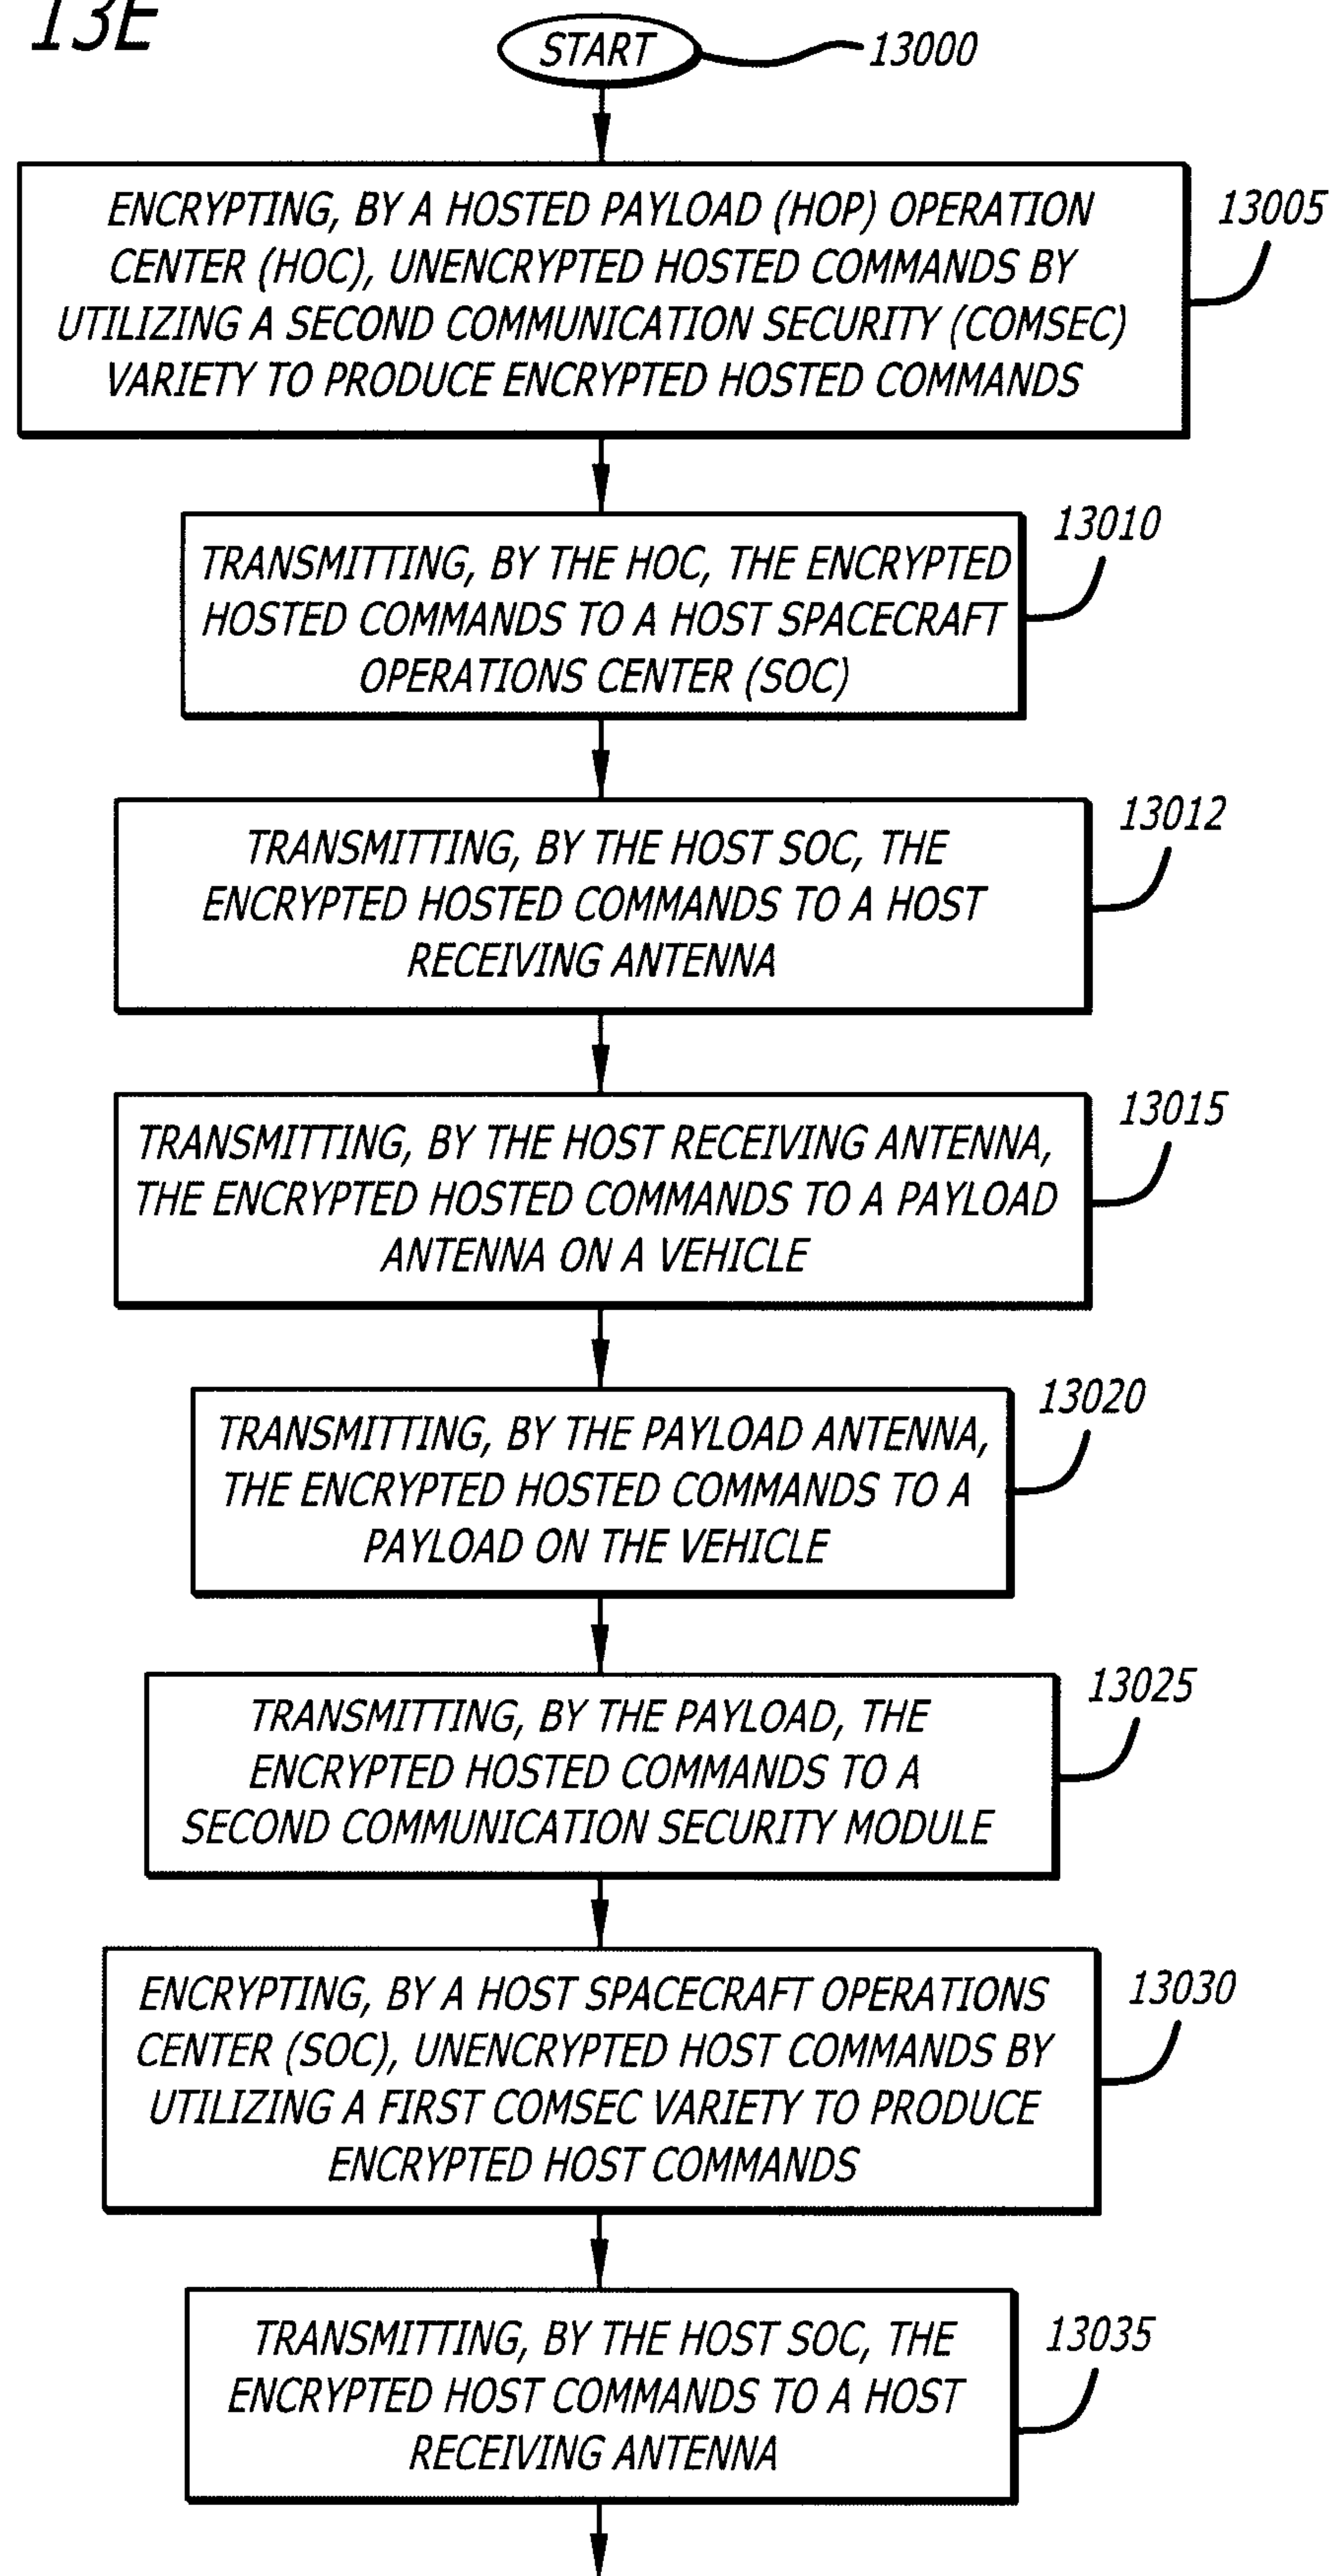


FIG. 13F

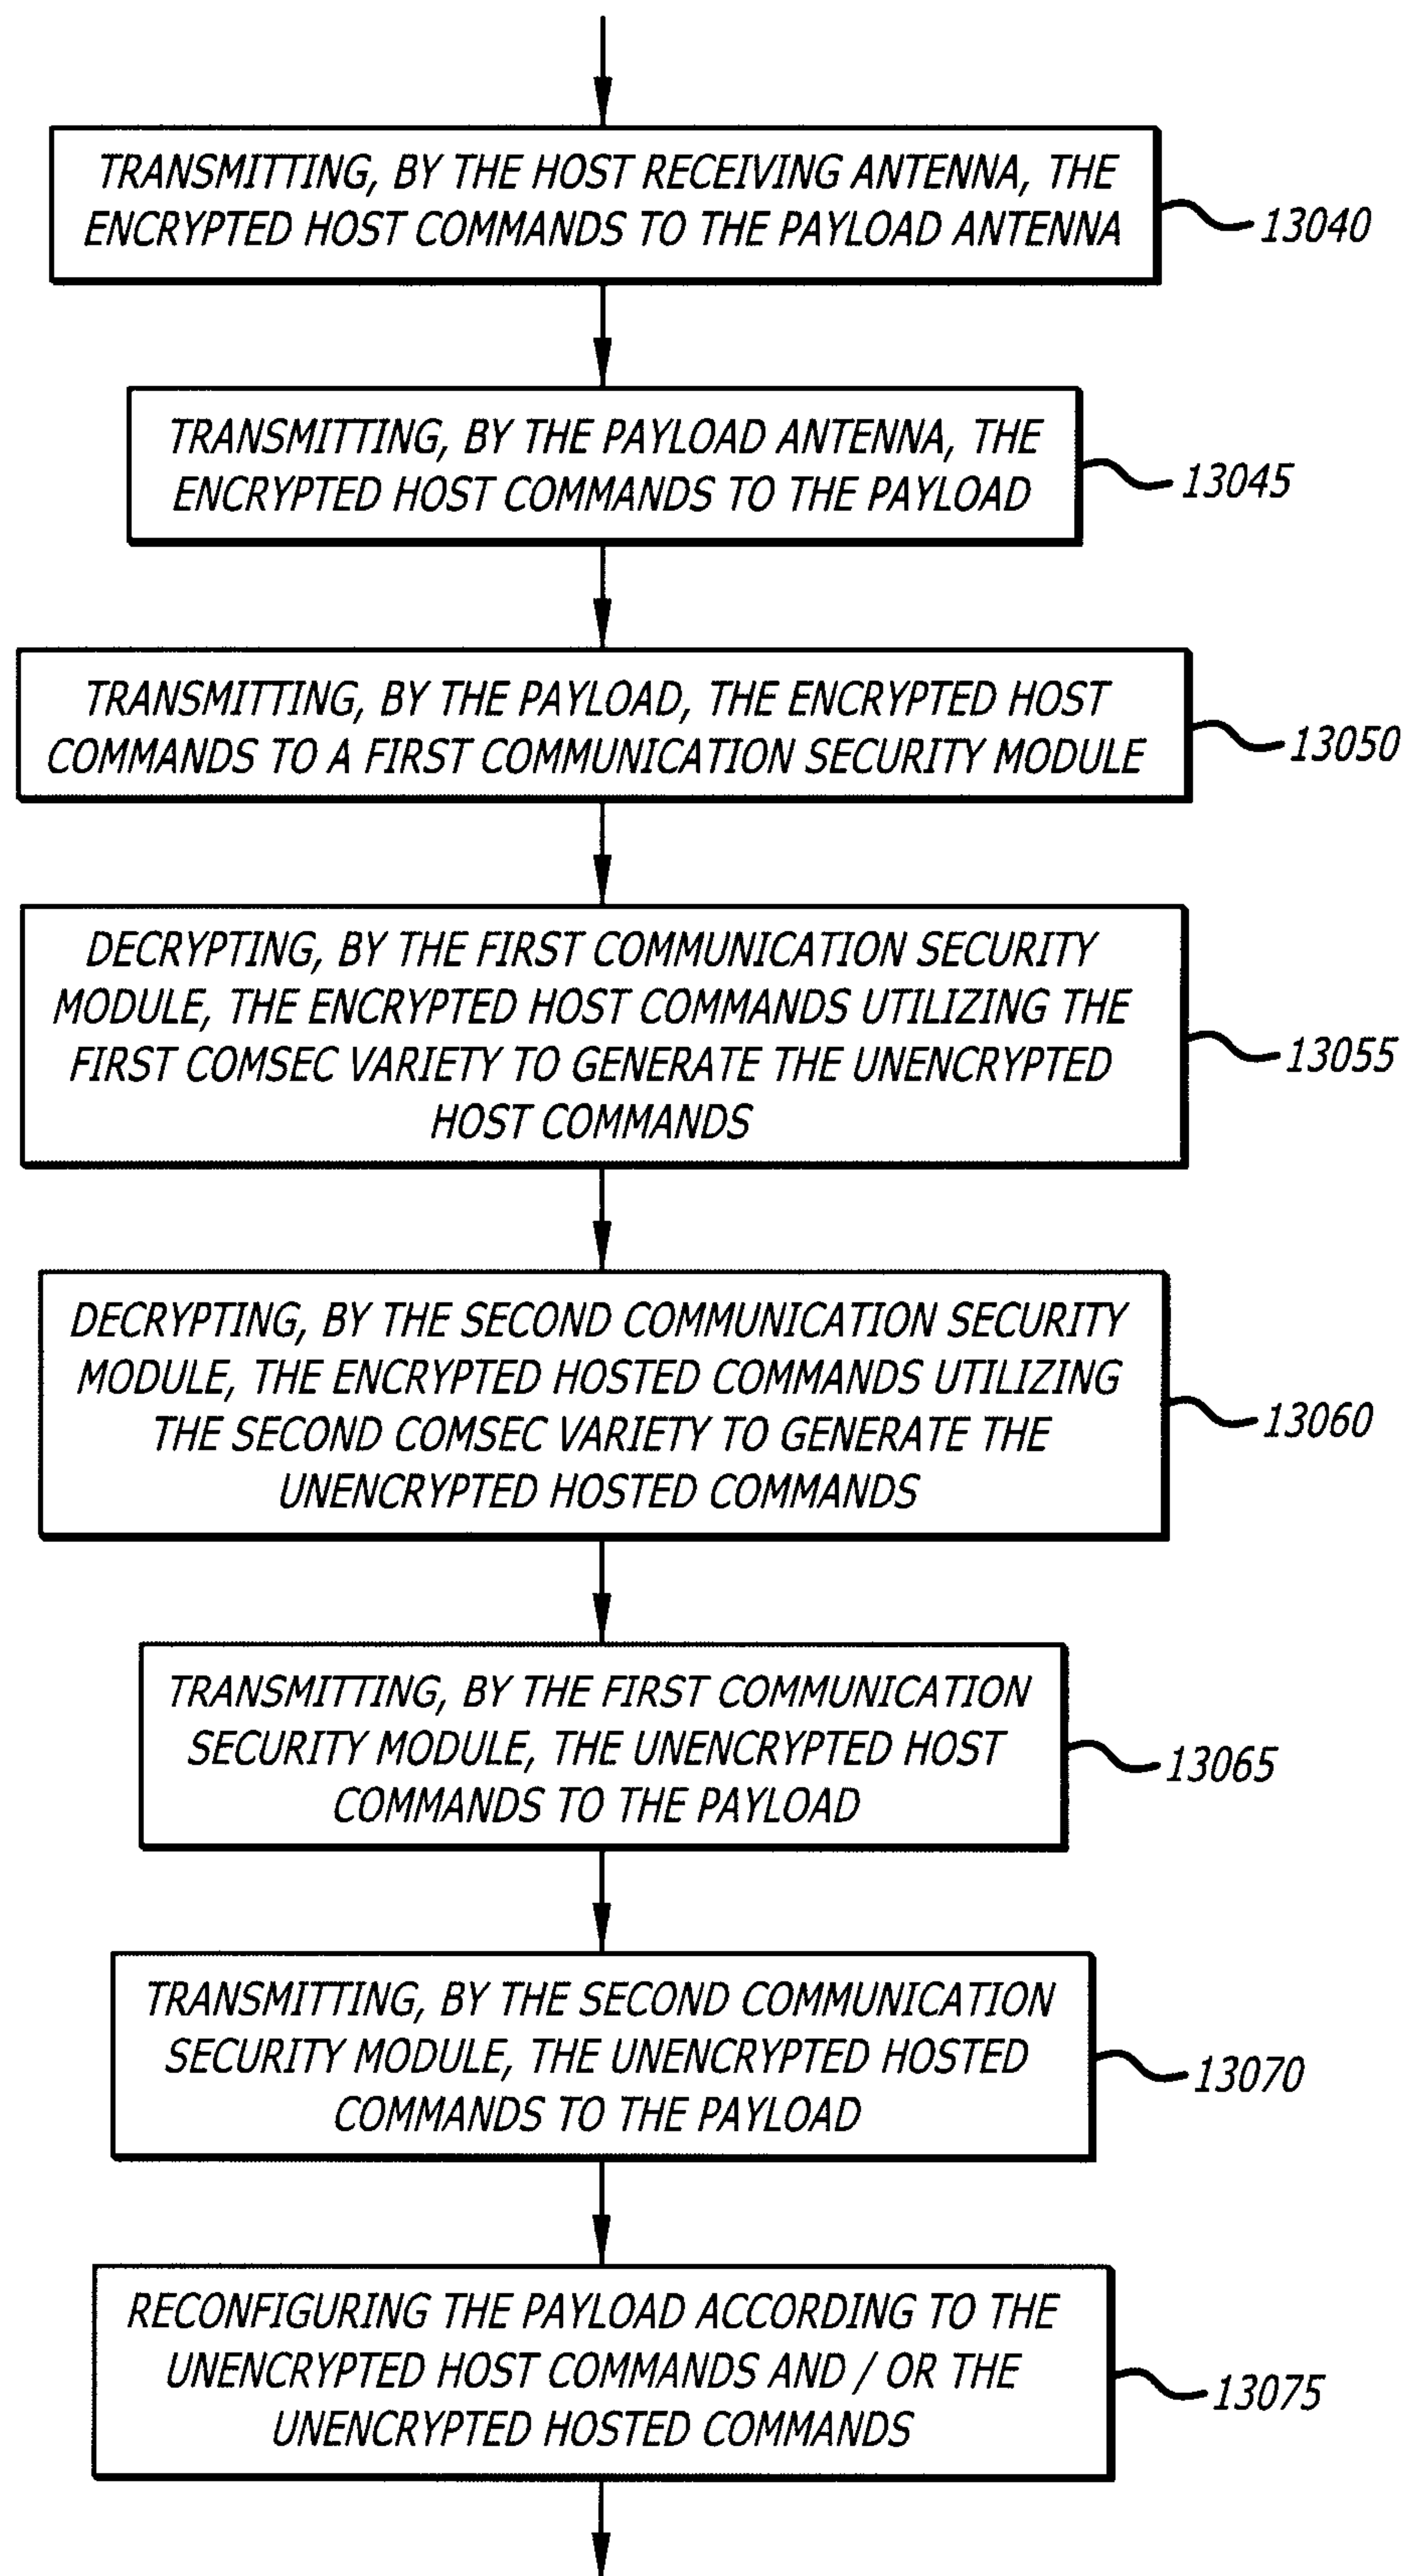
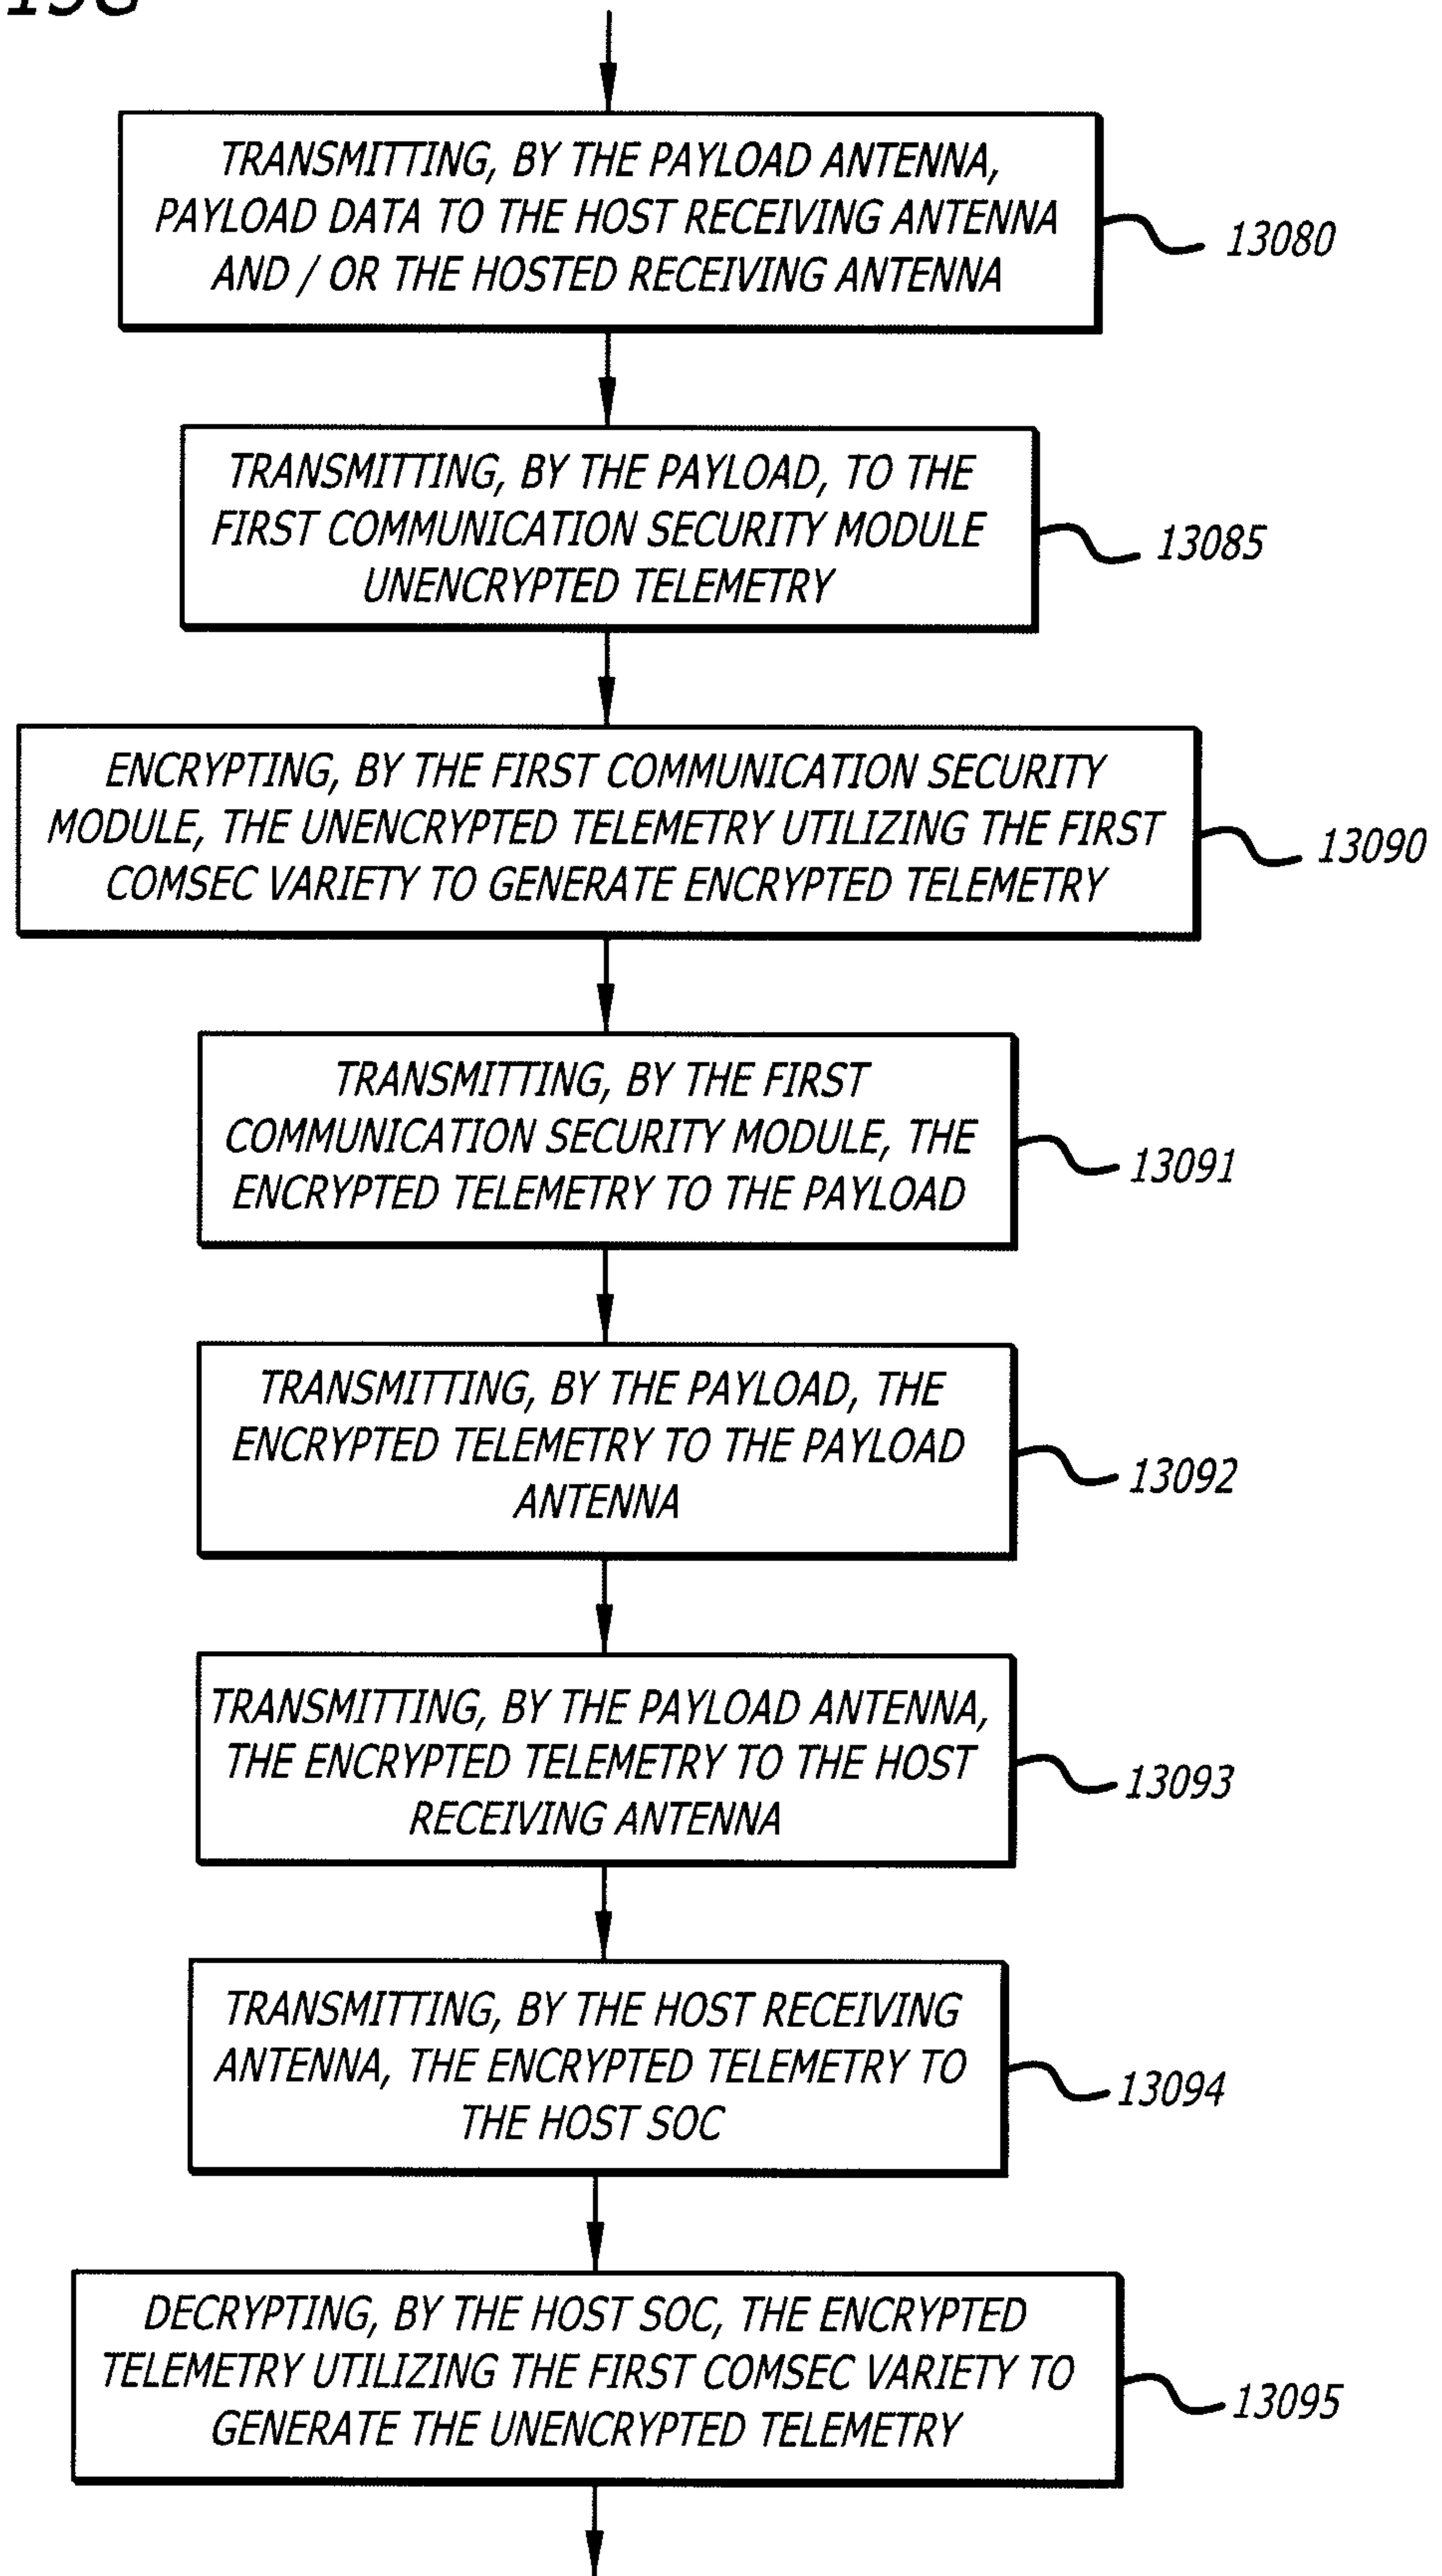


FIG. 13G



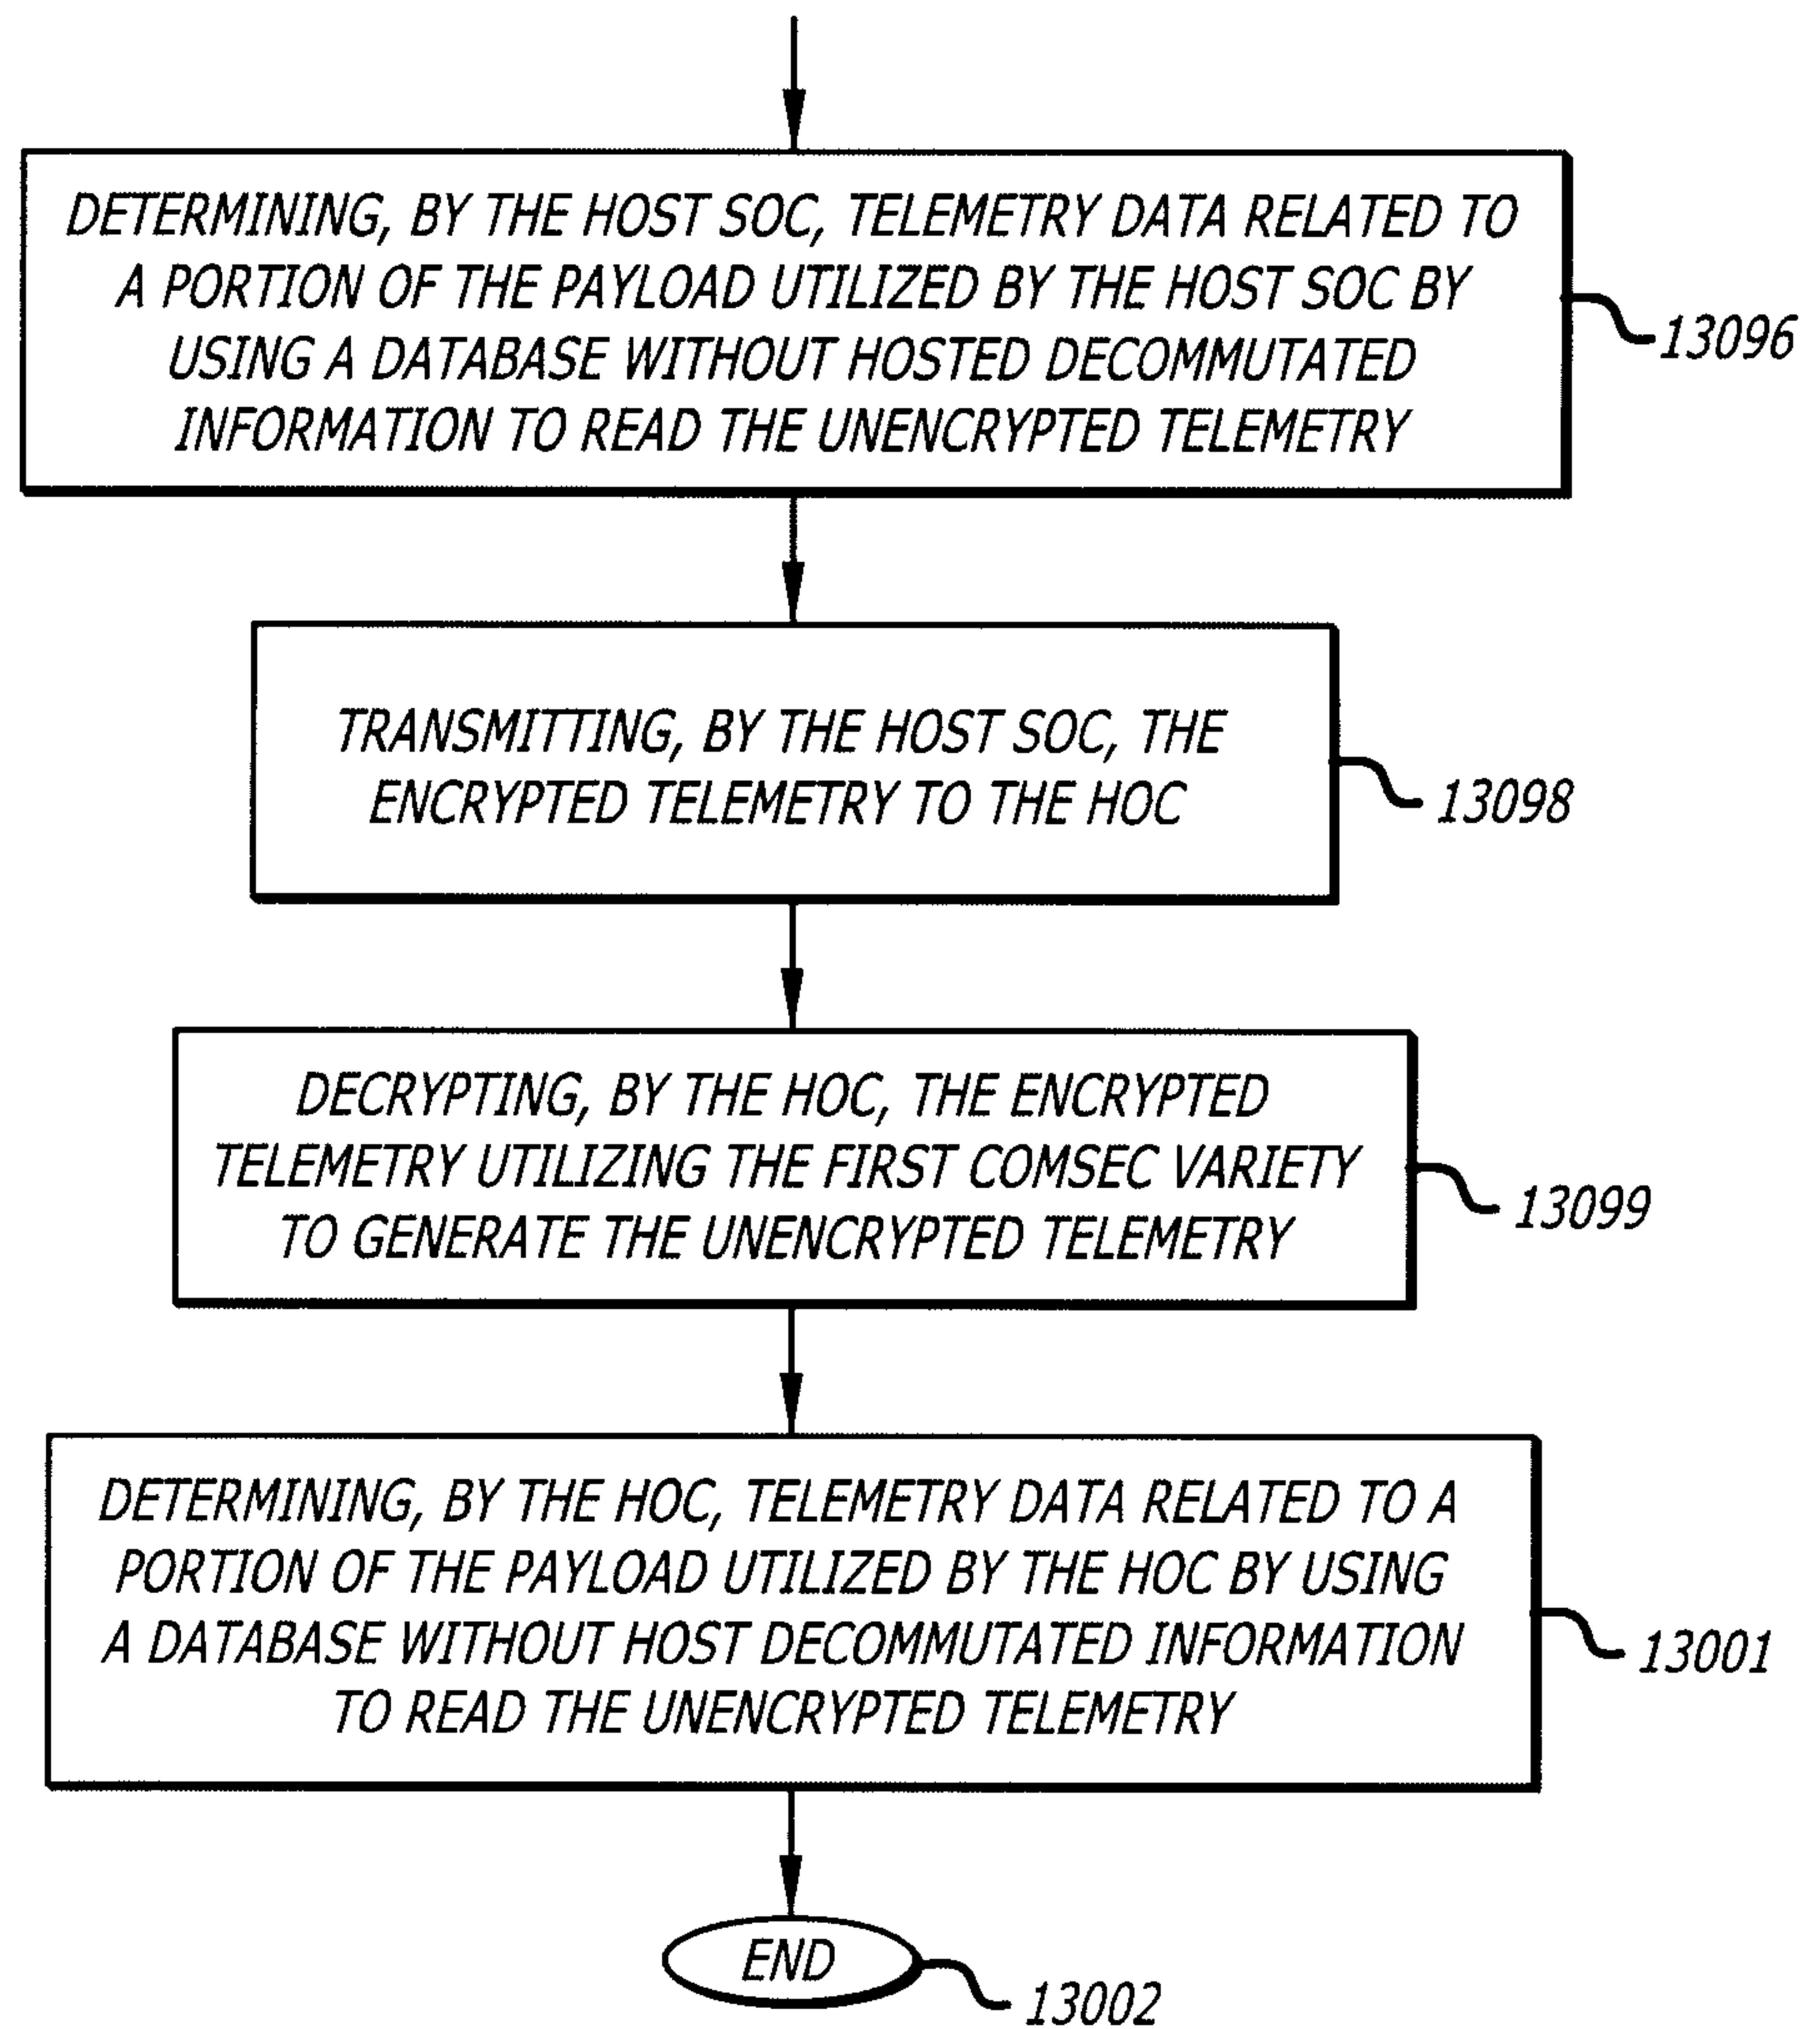
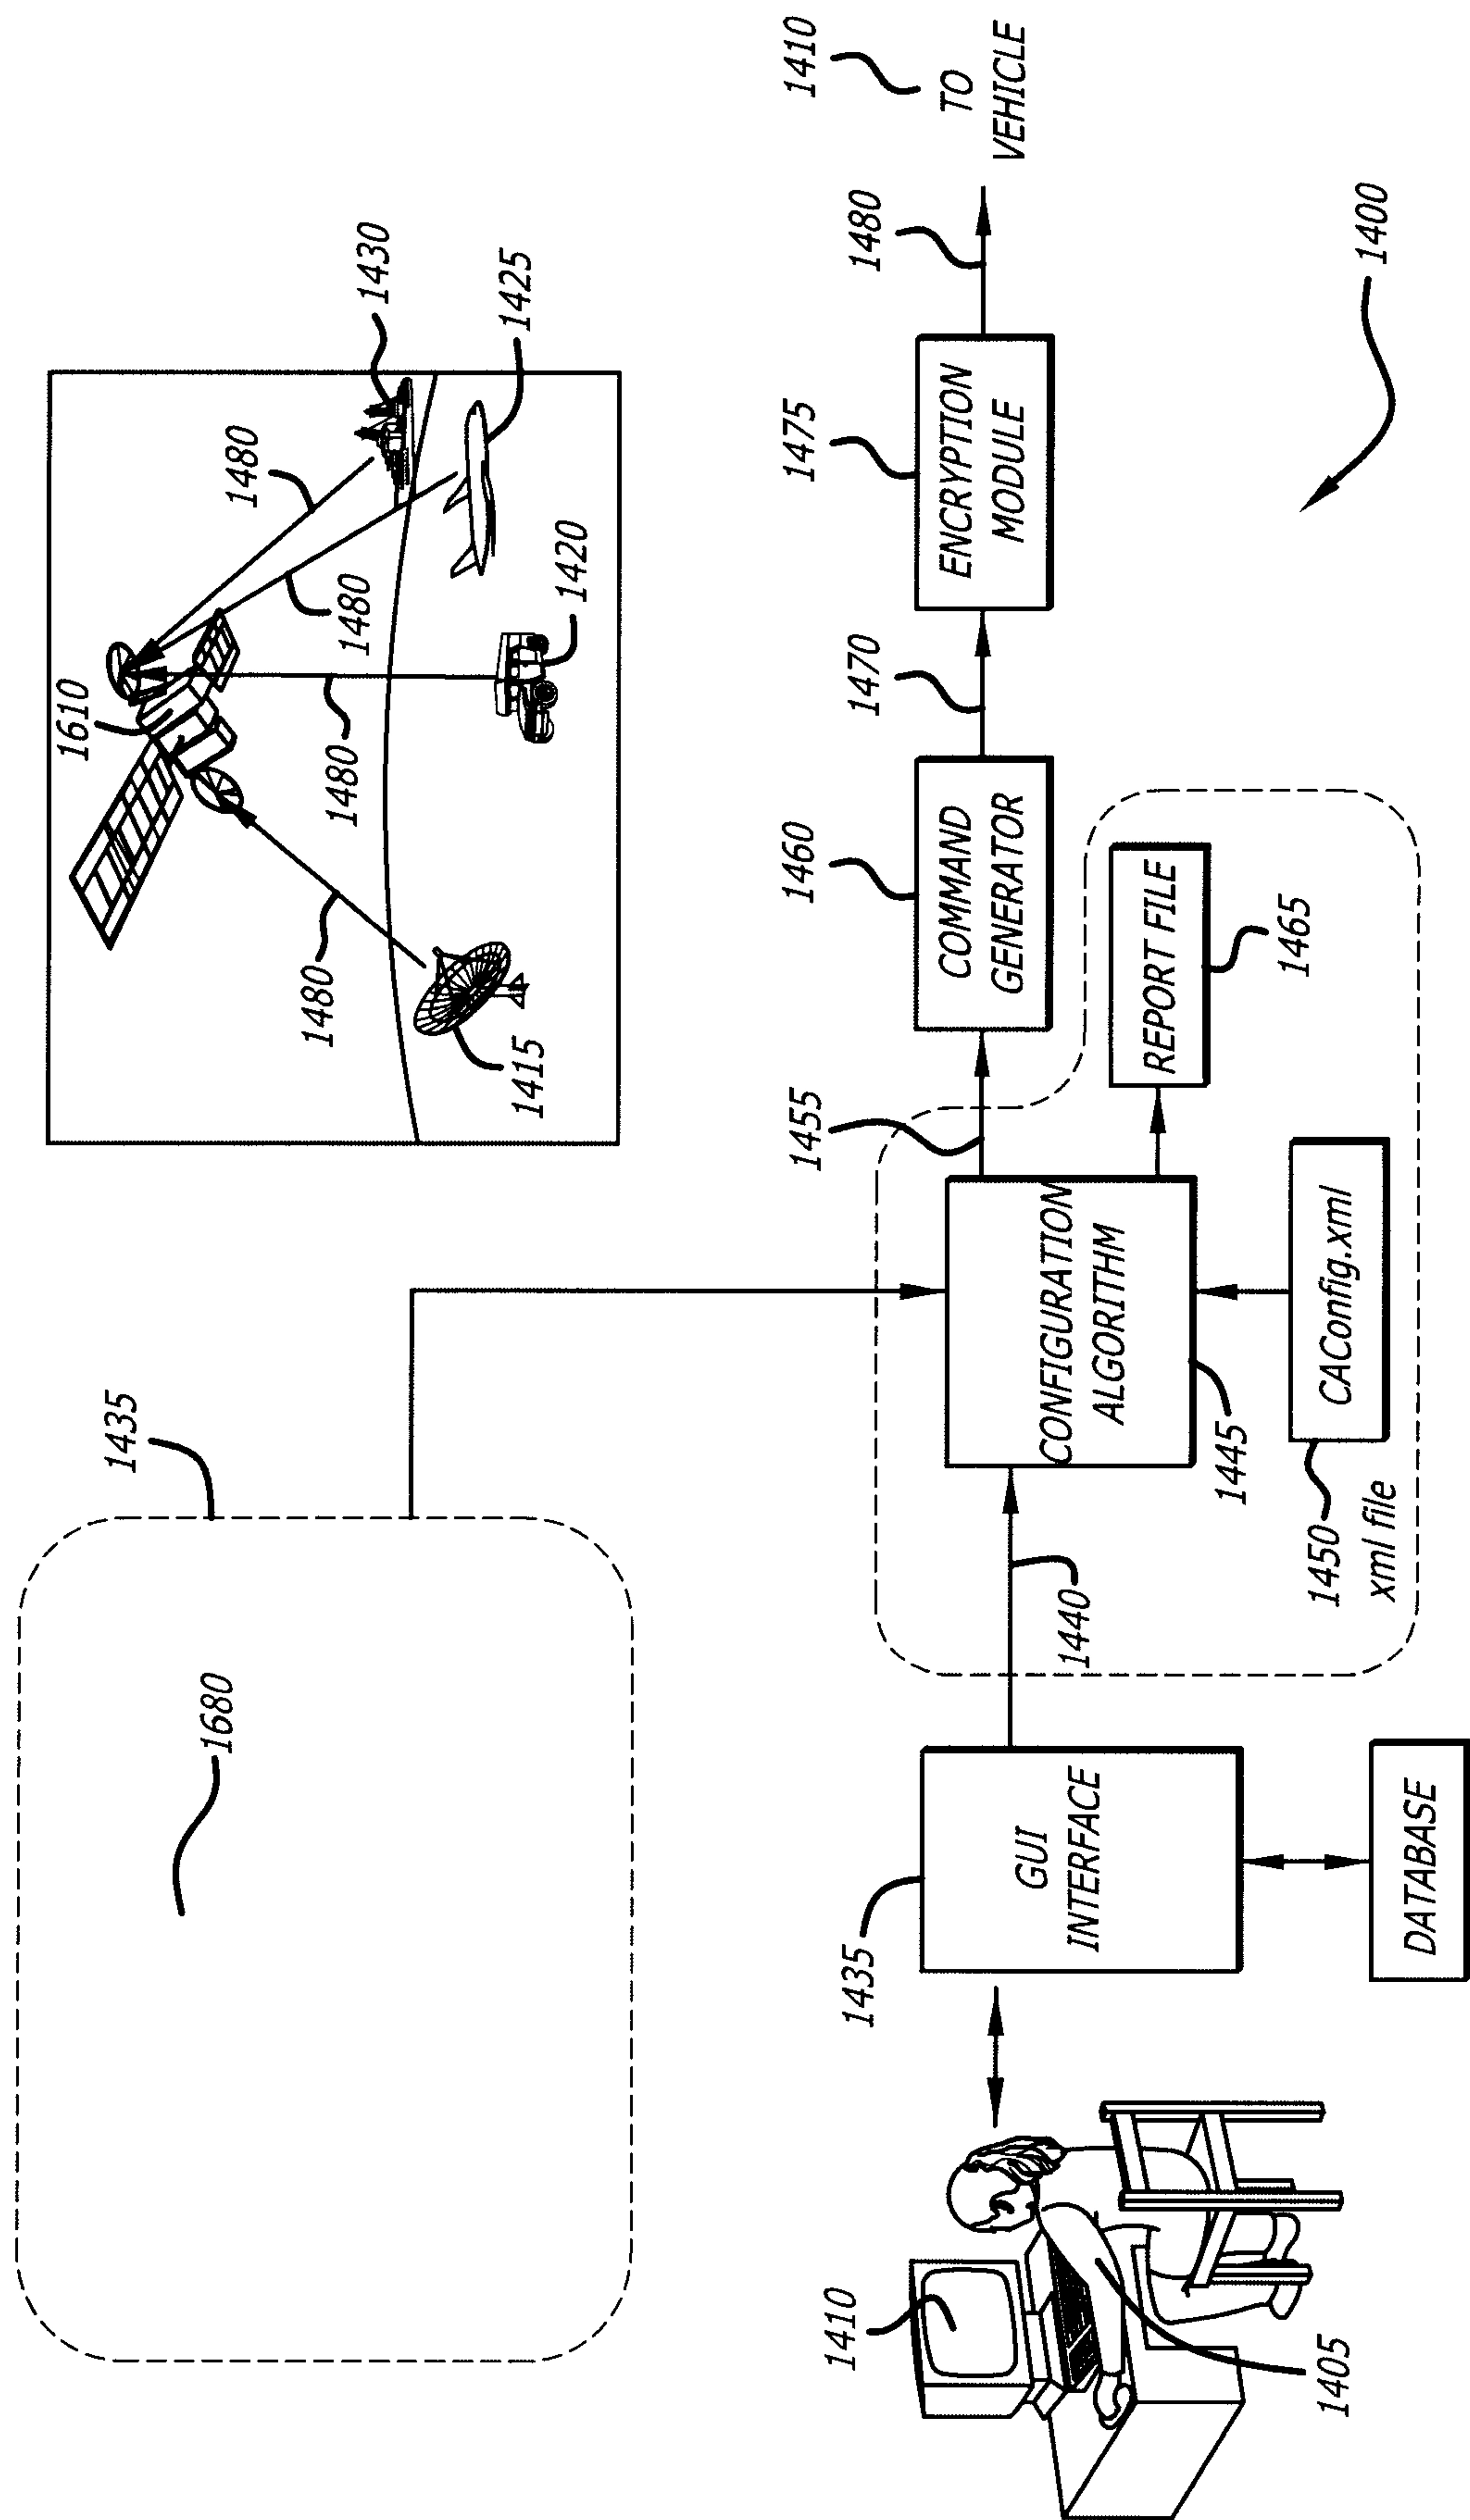
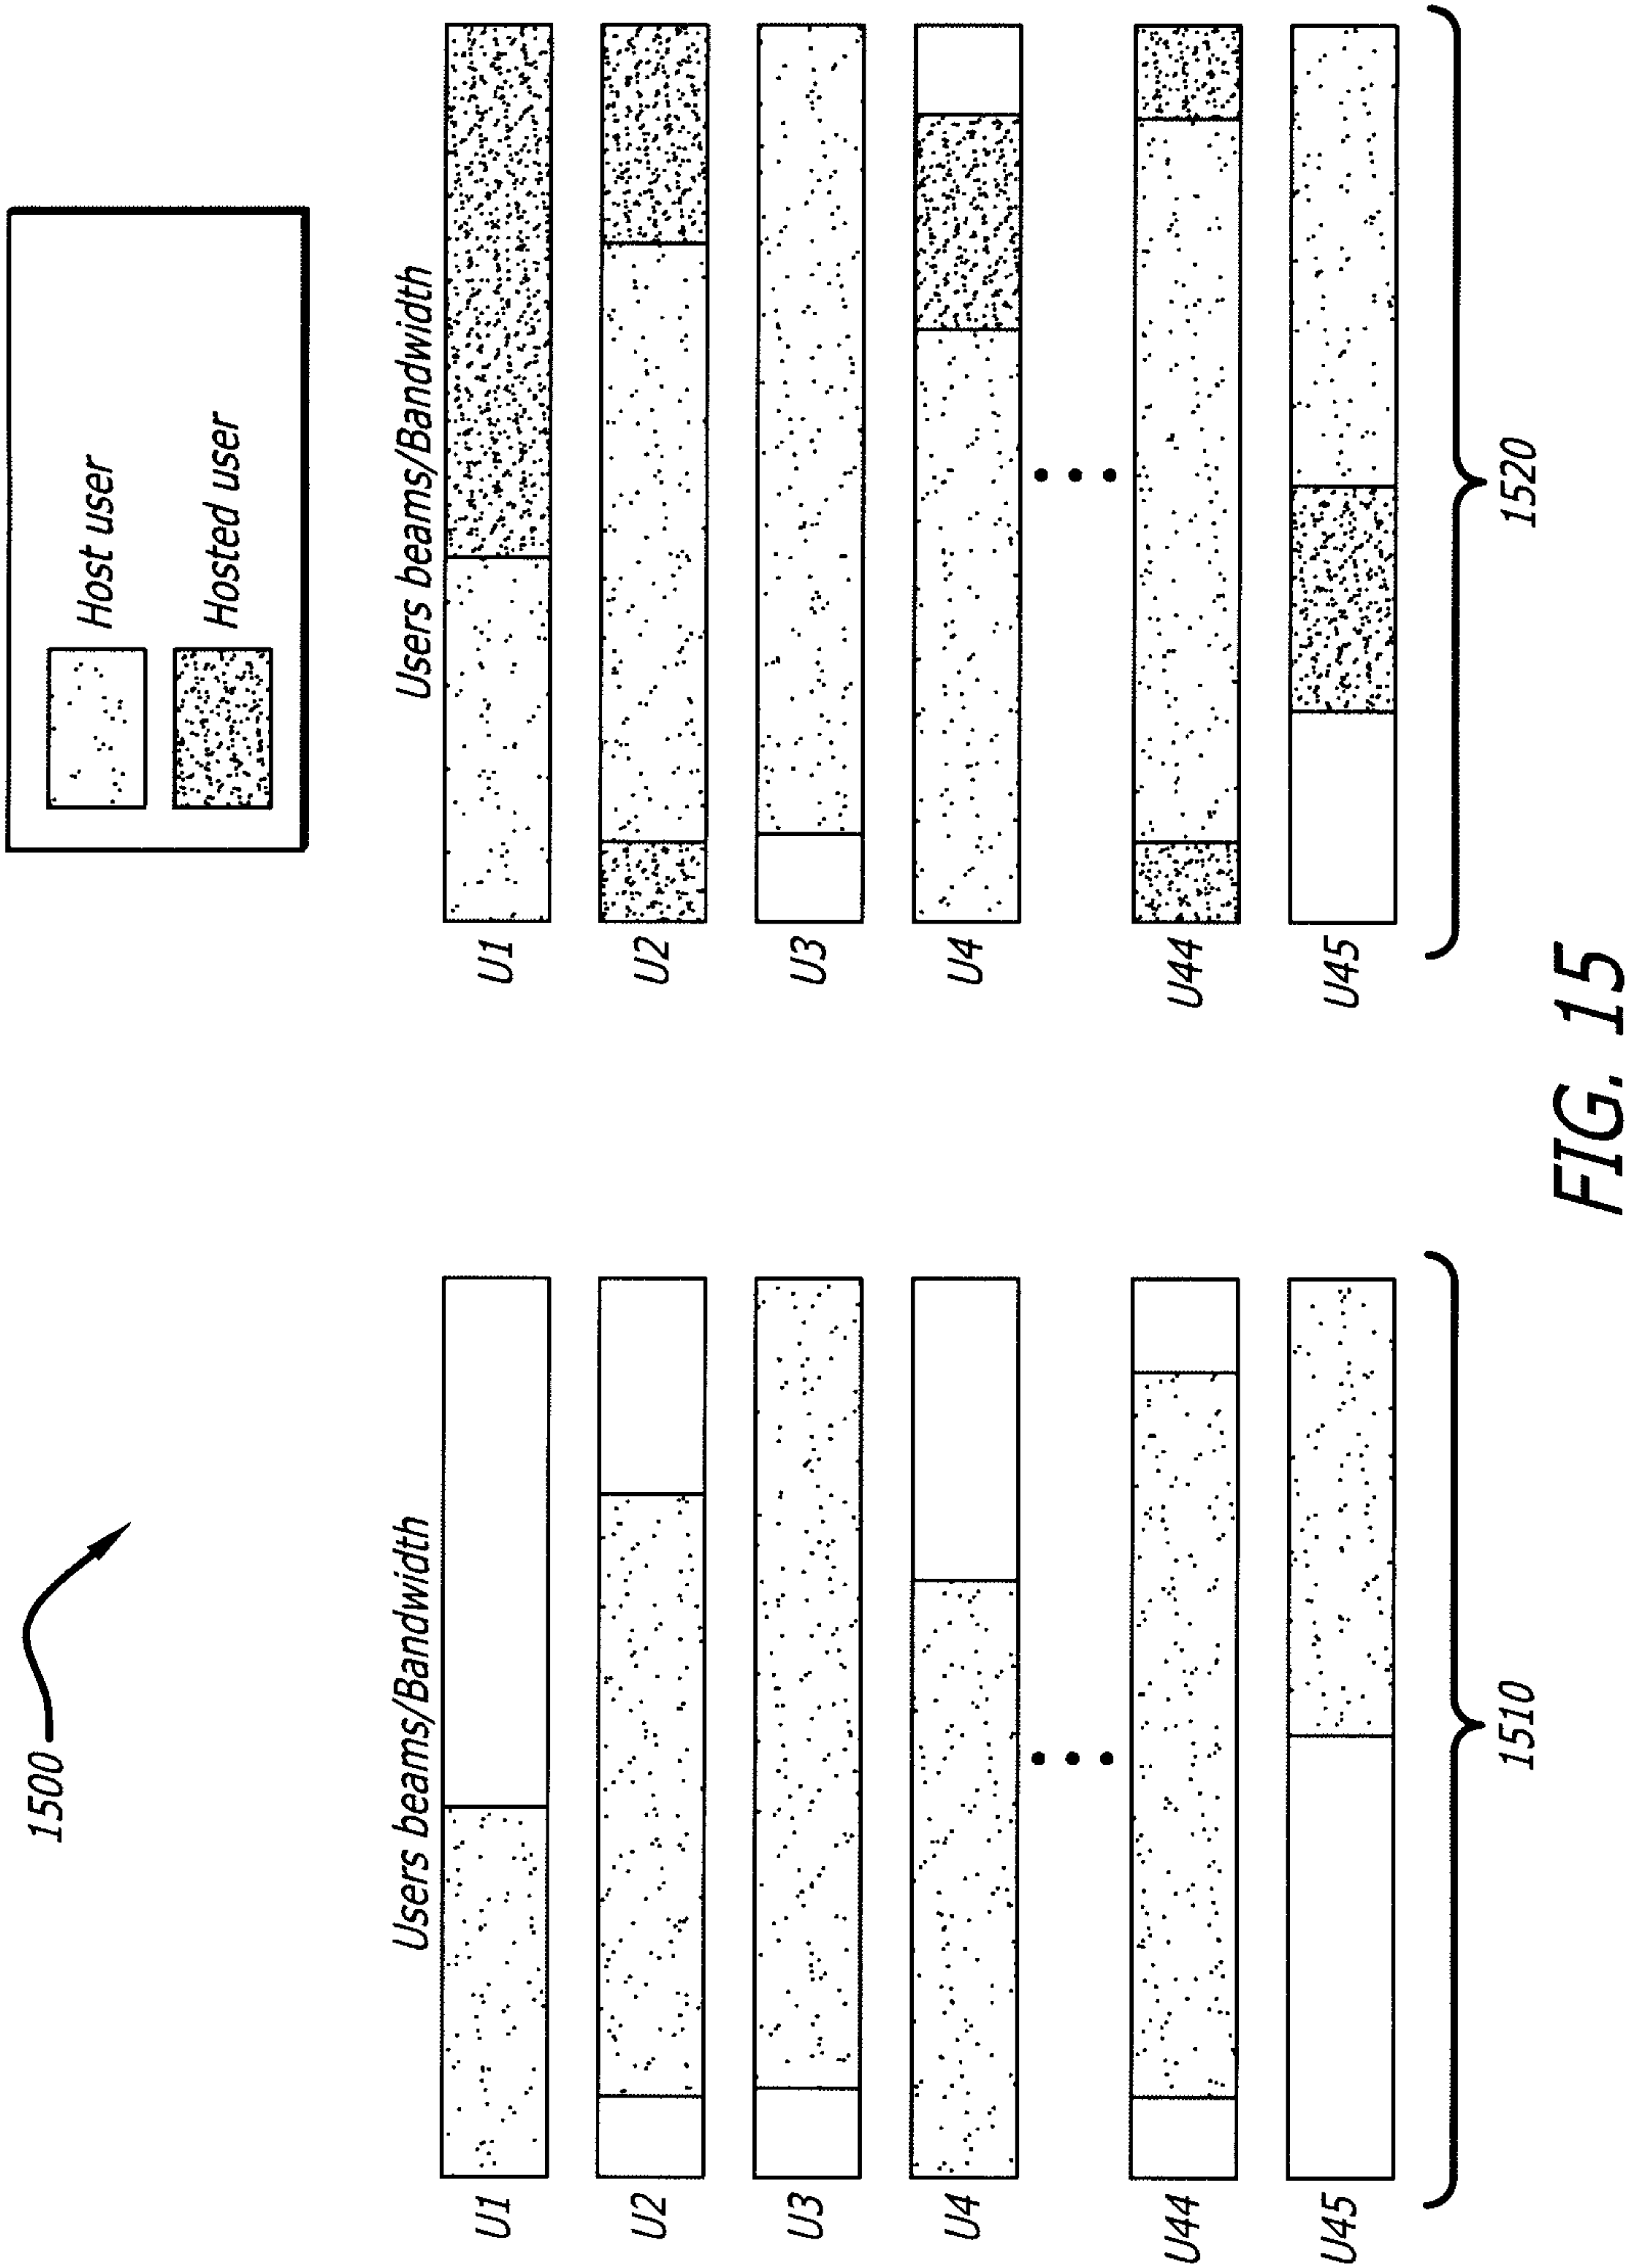


FIG. 13H

FIG. 14





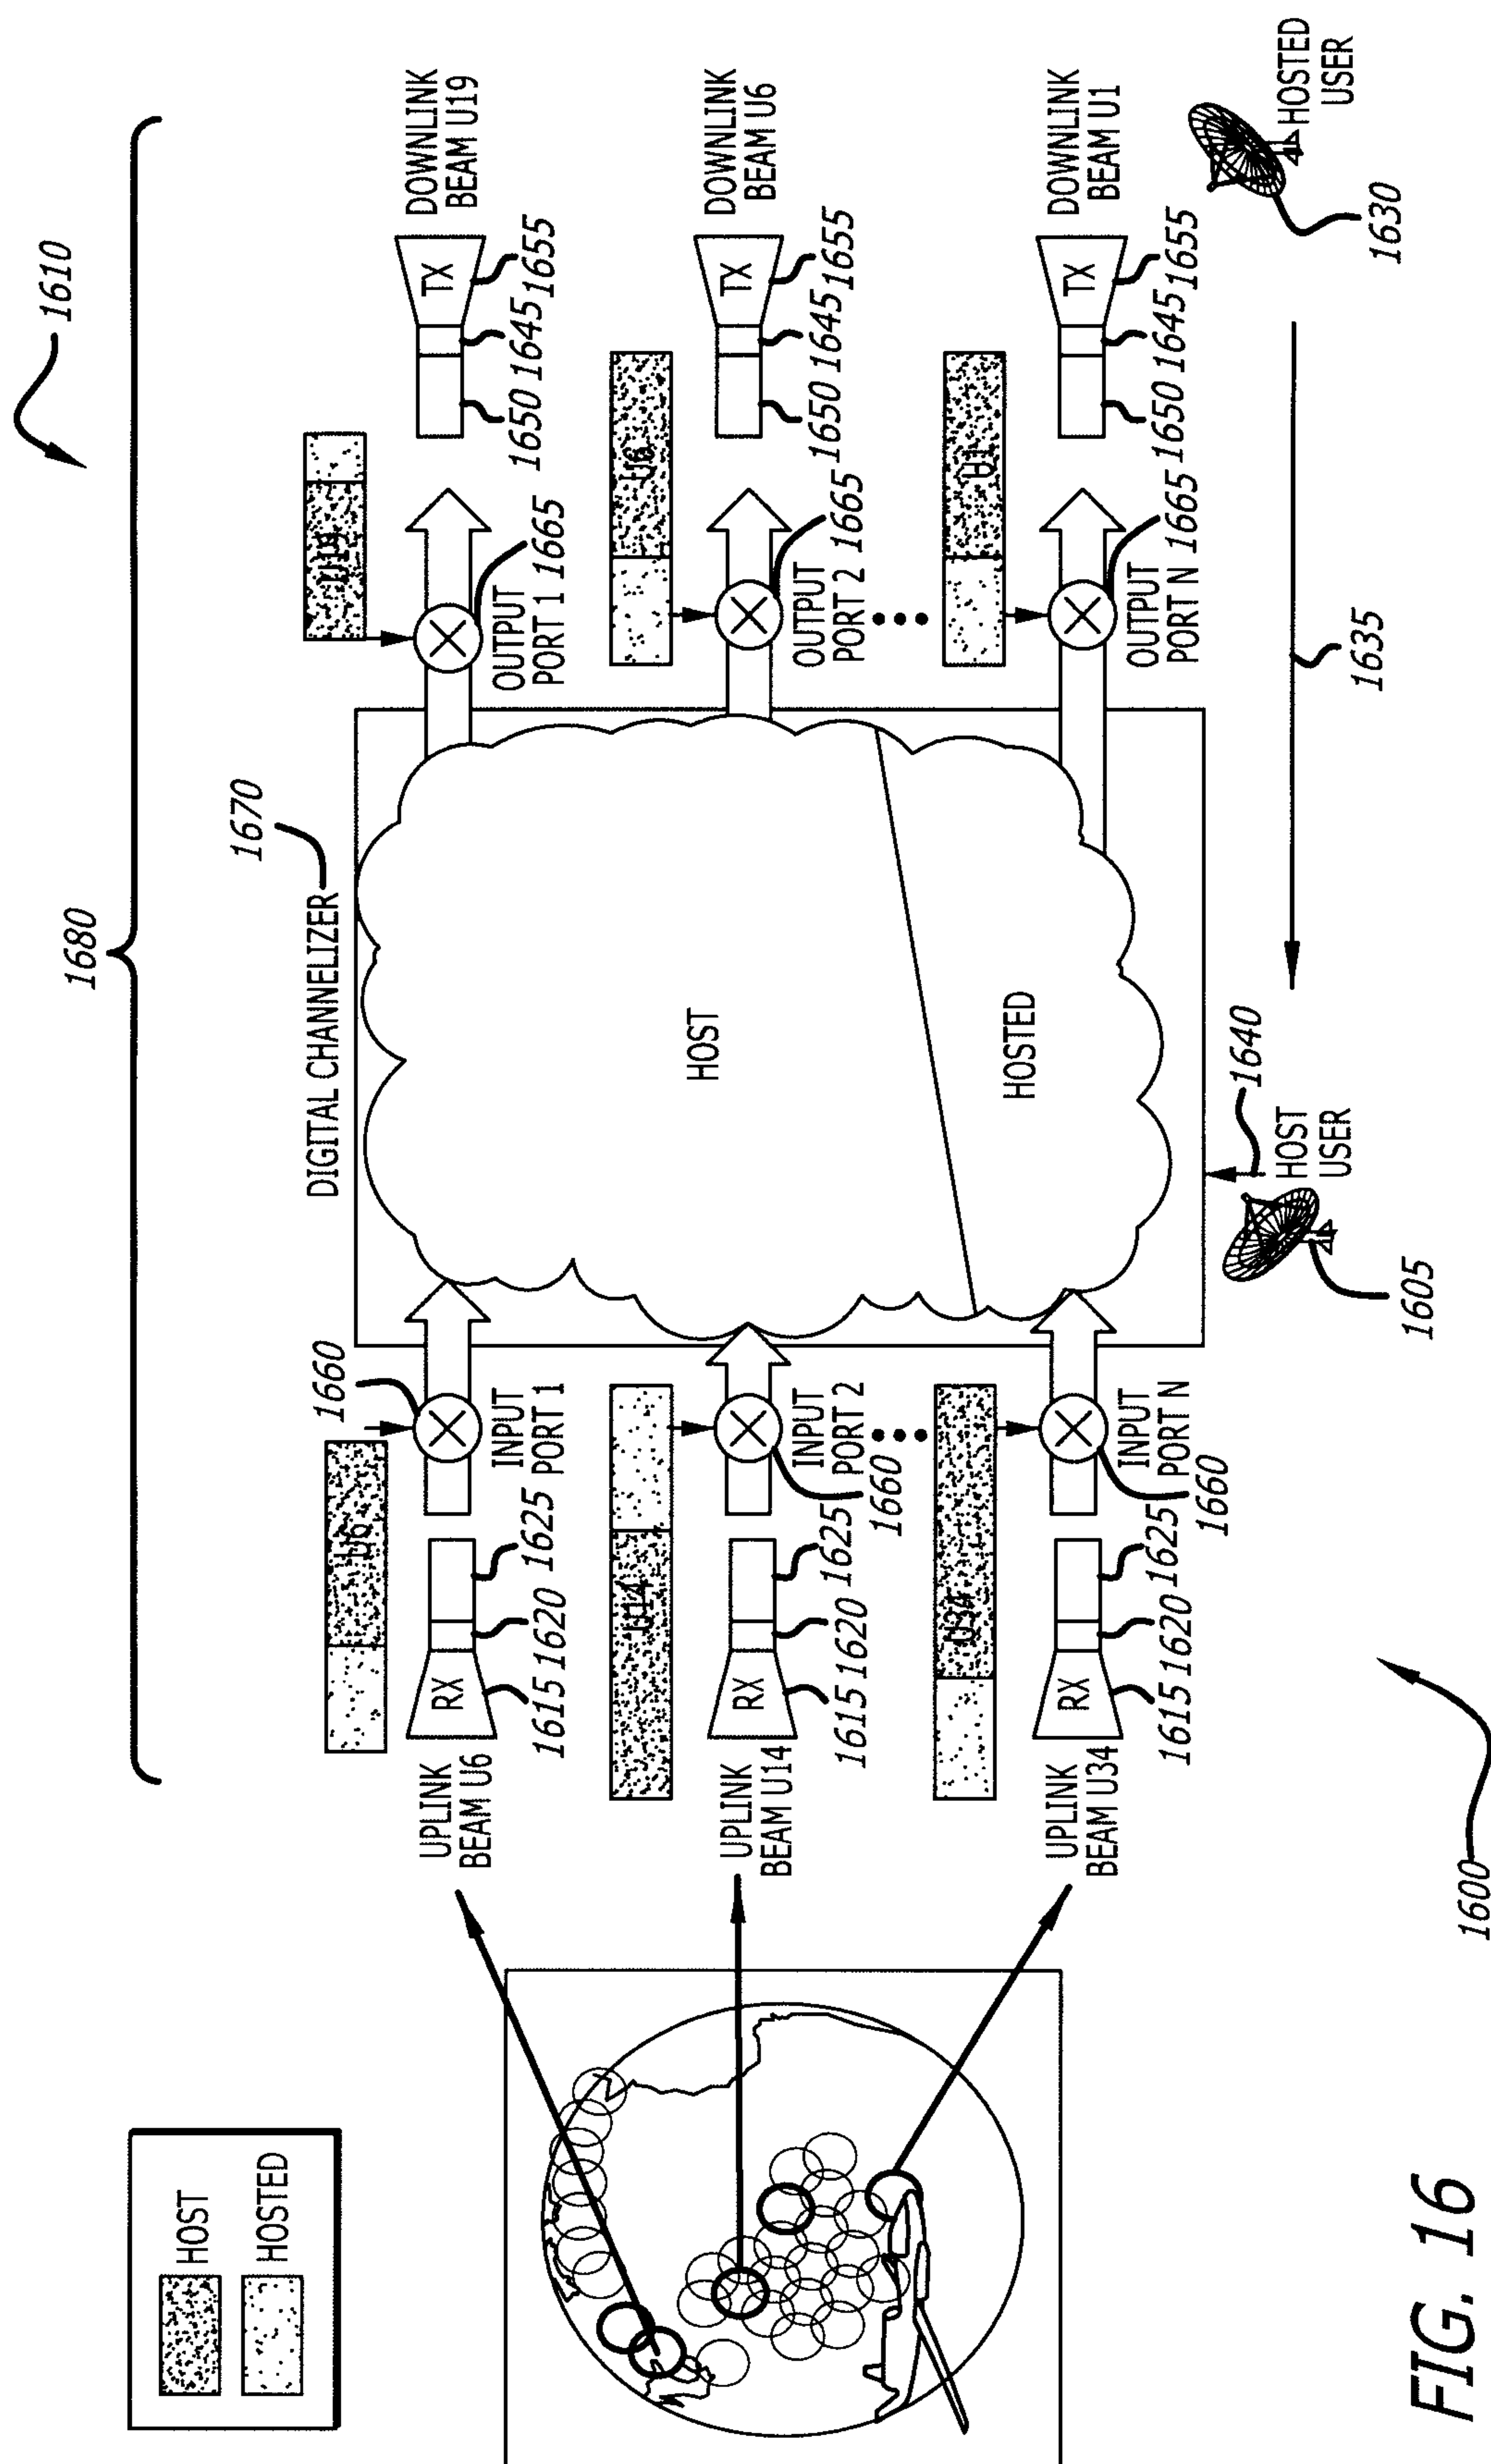


FIG. 16

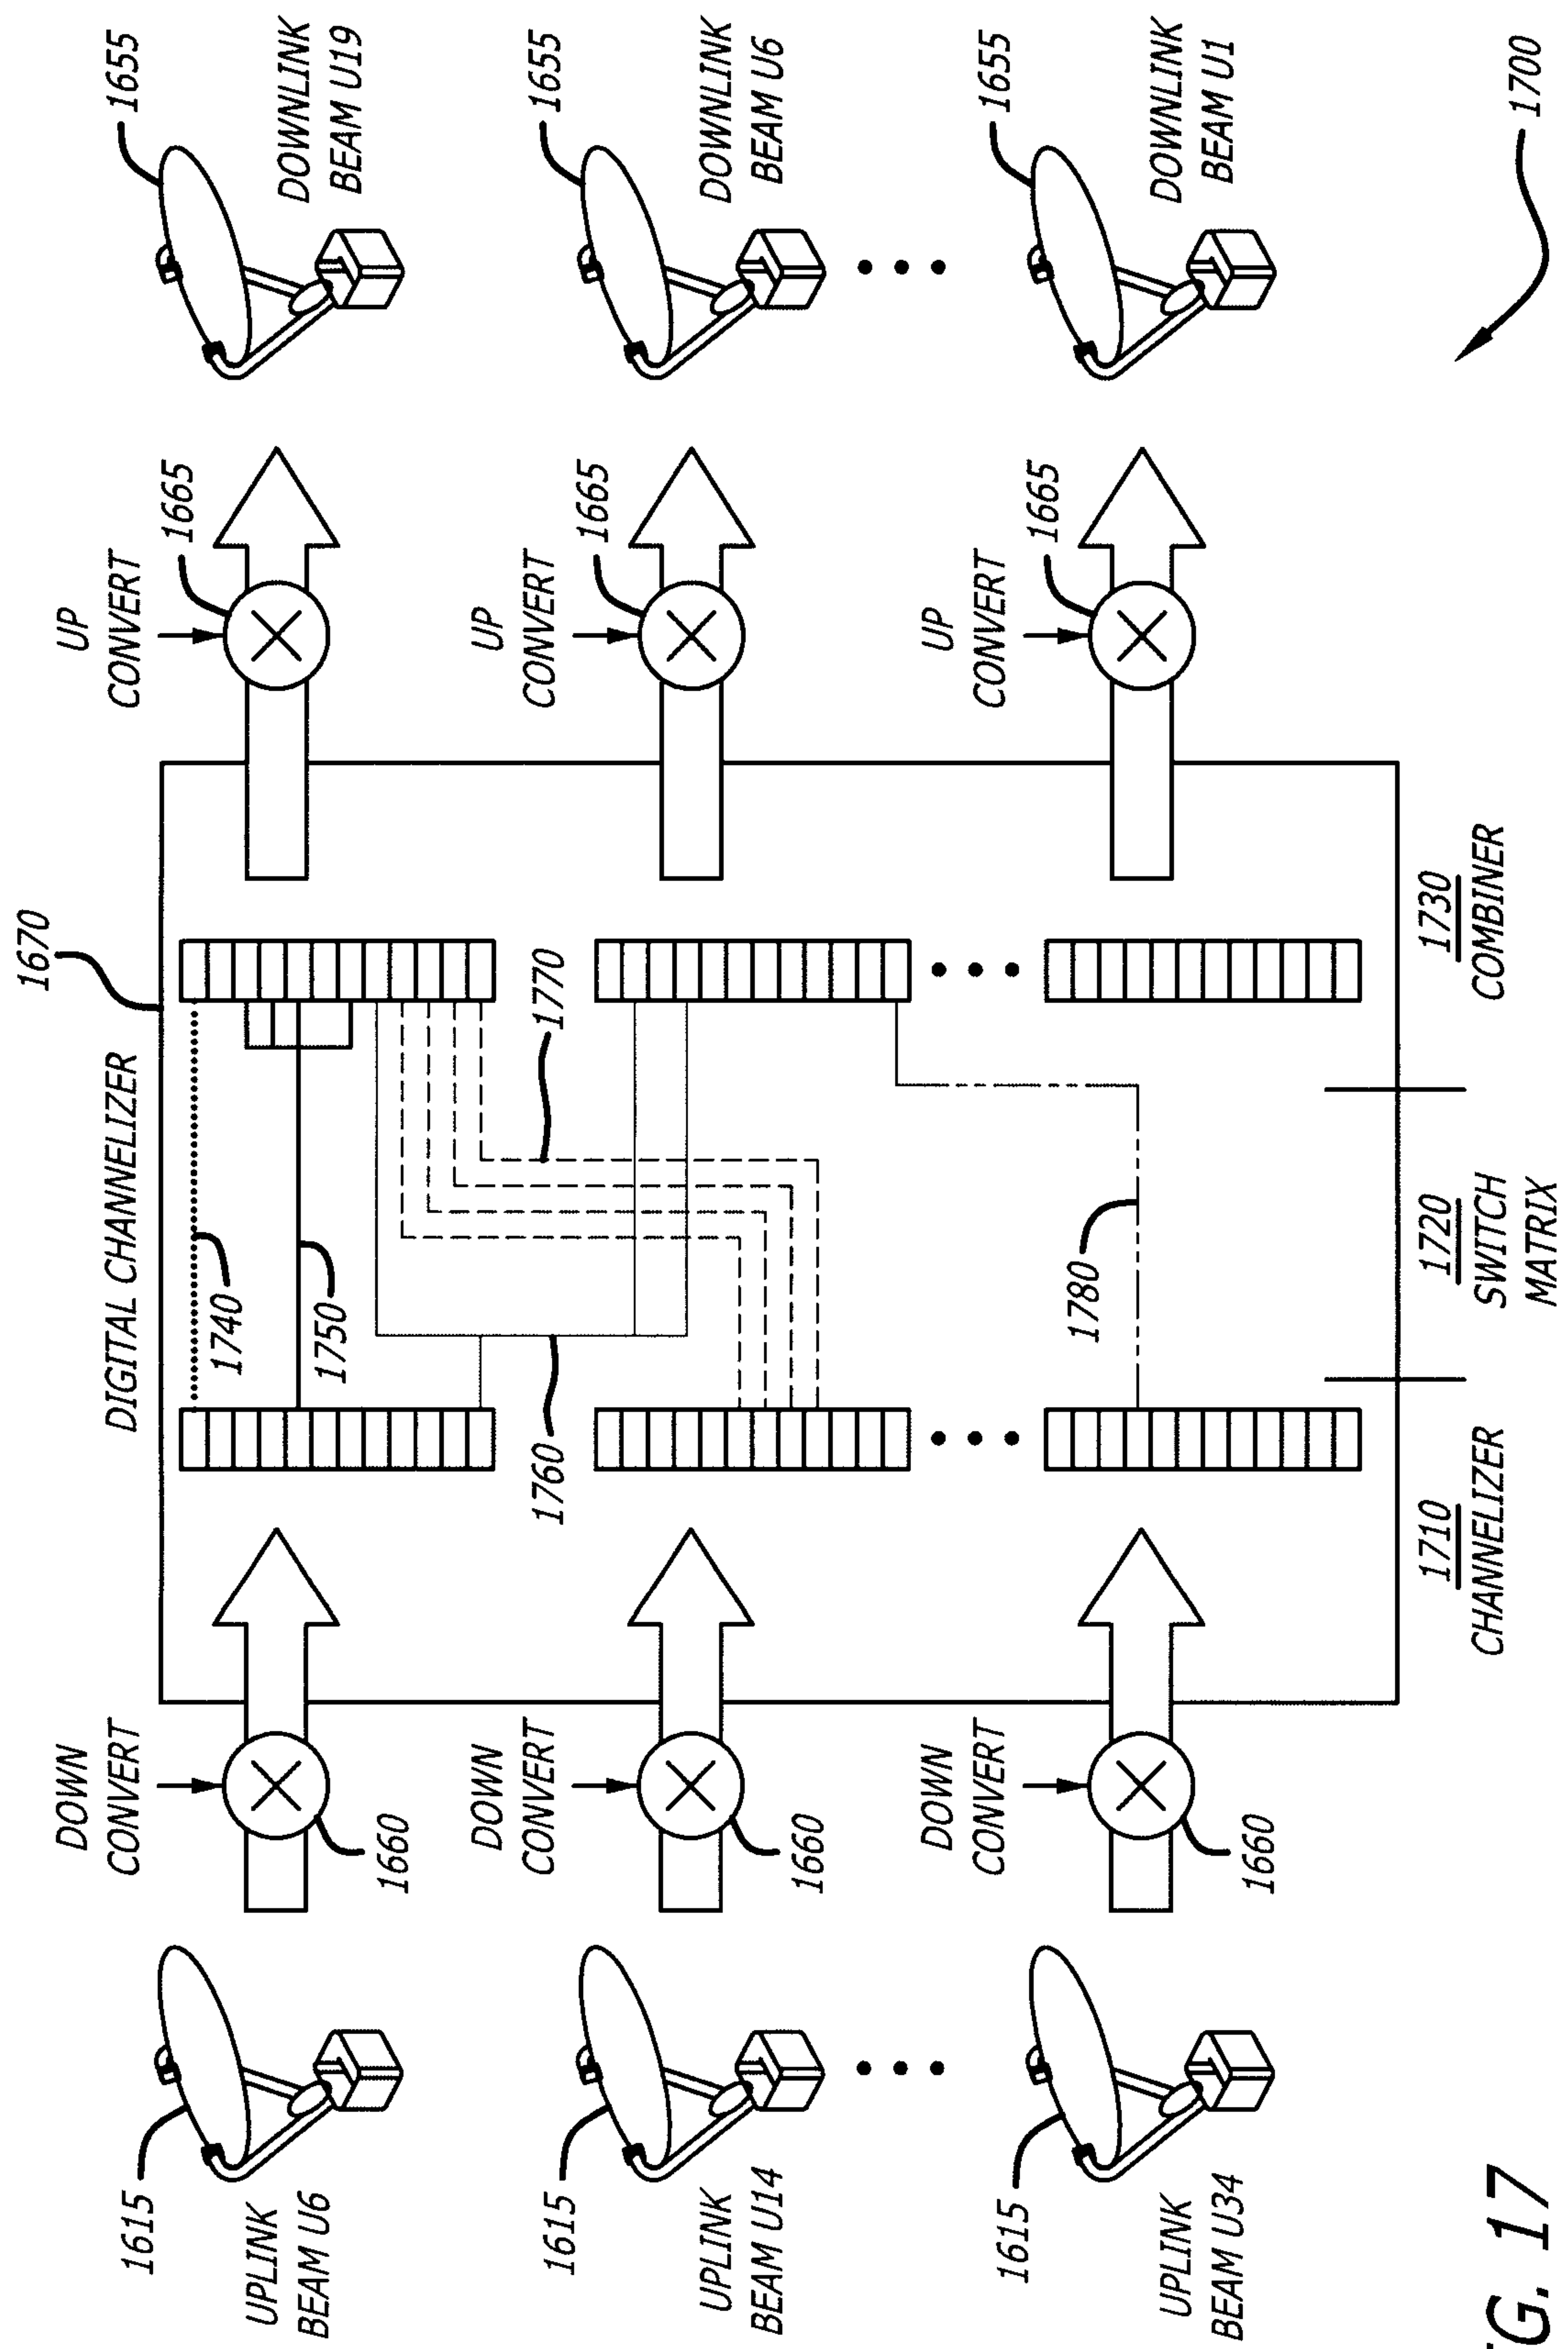


FIG. 17

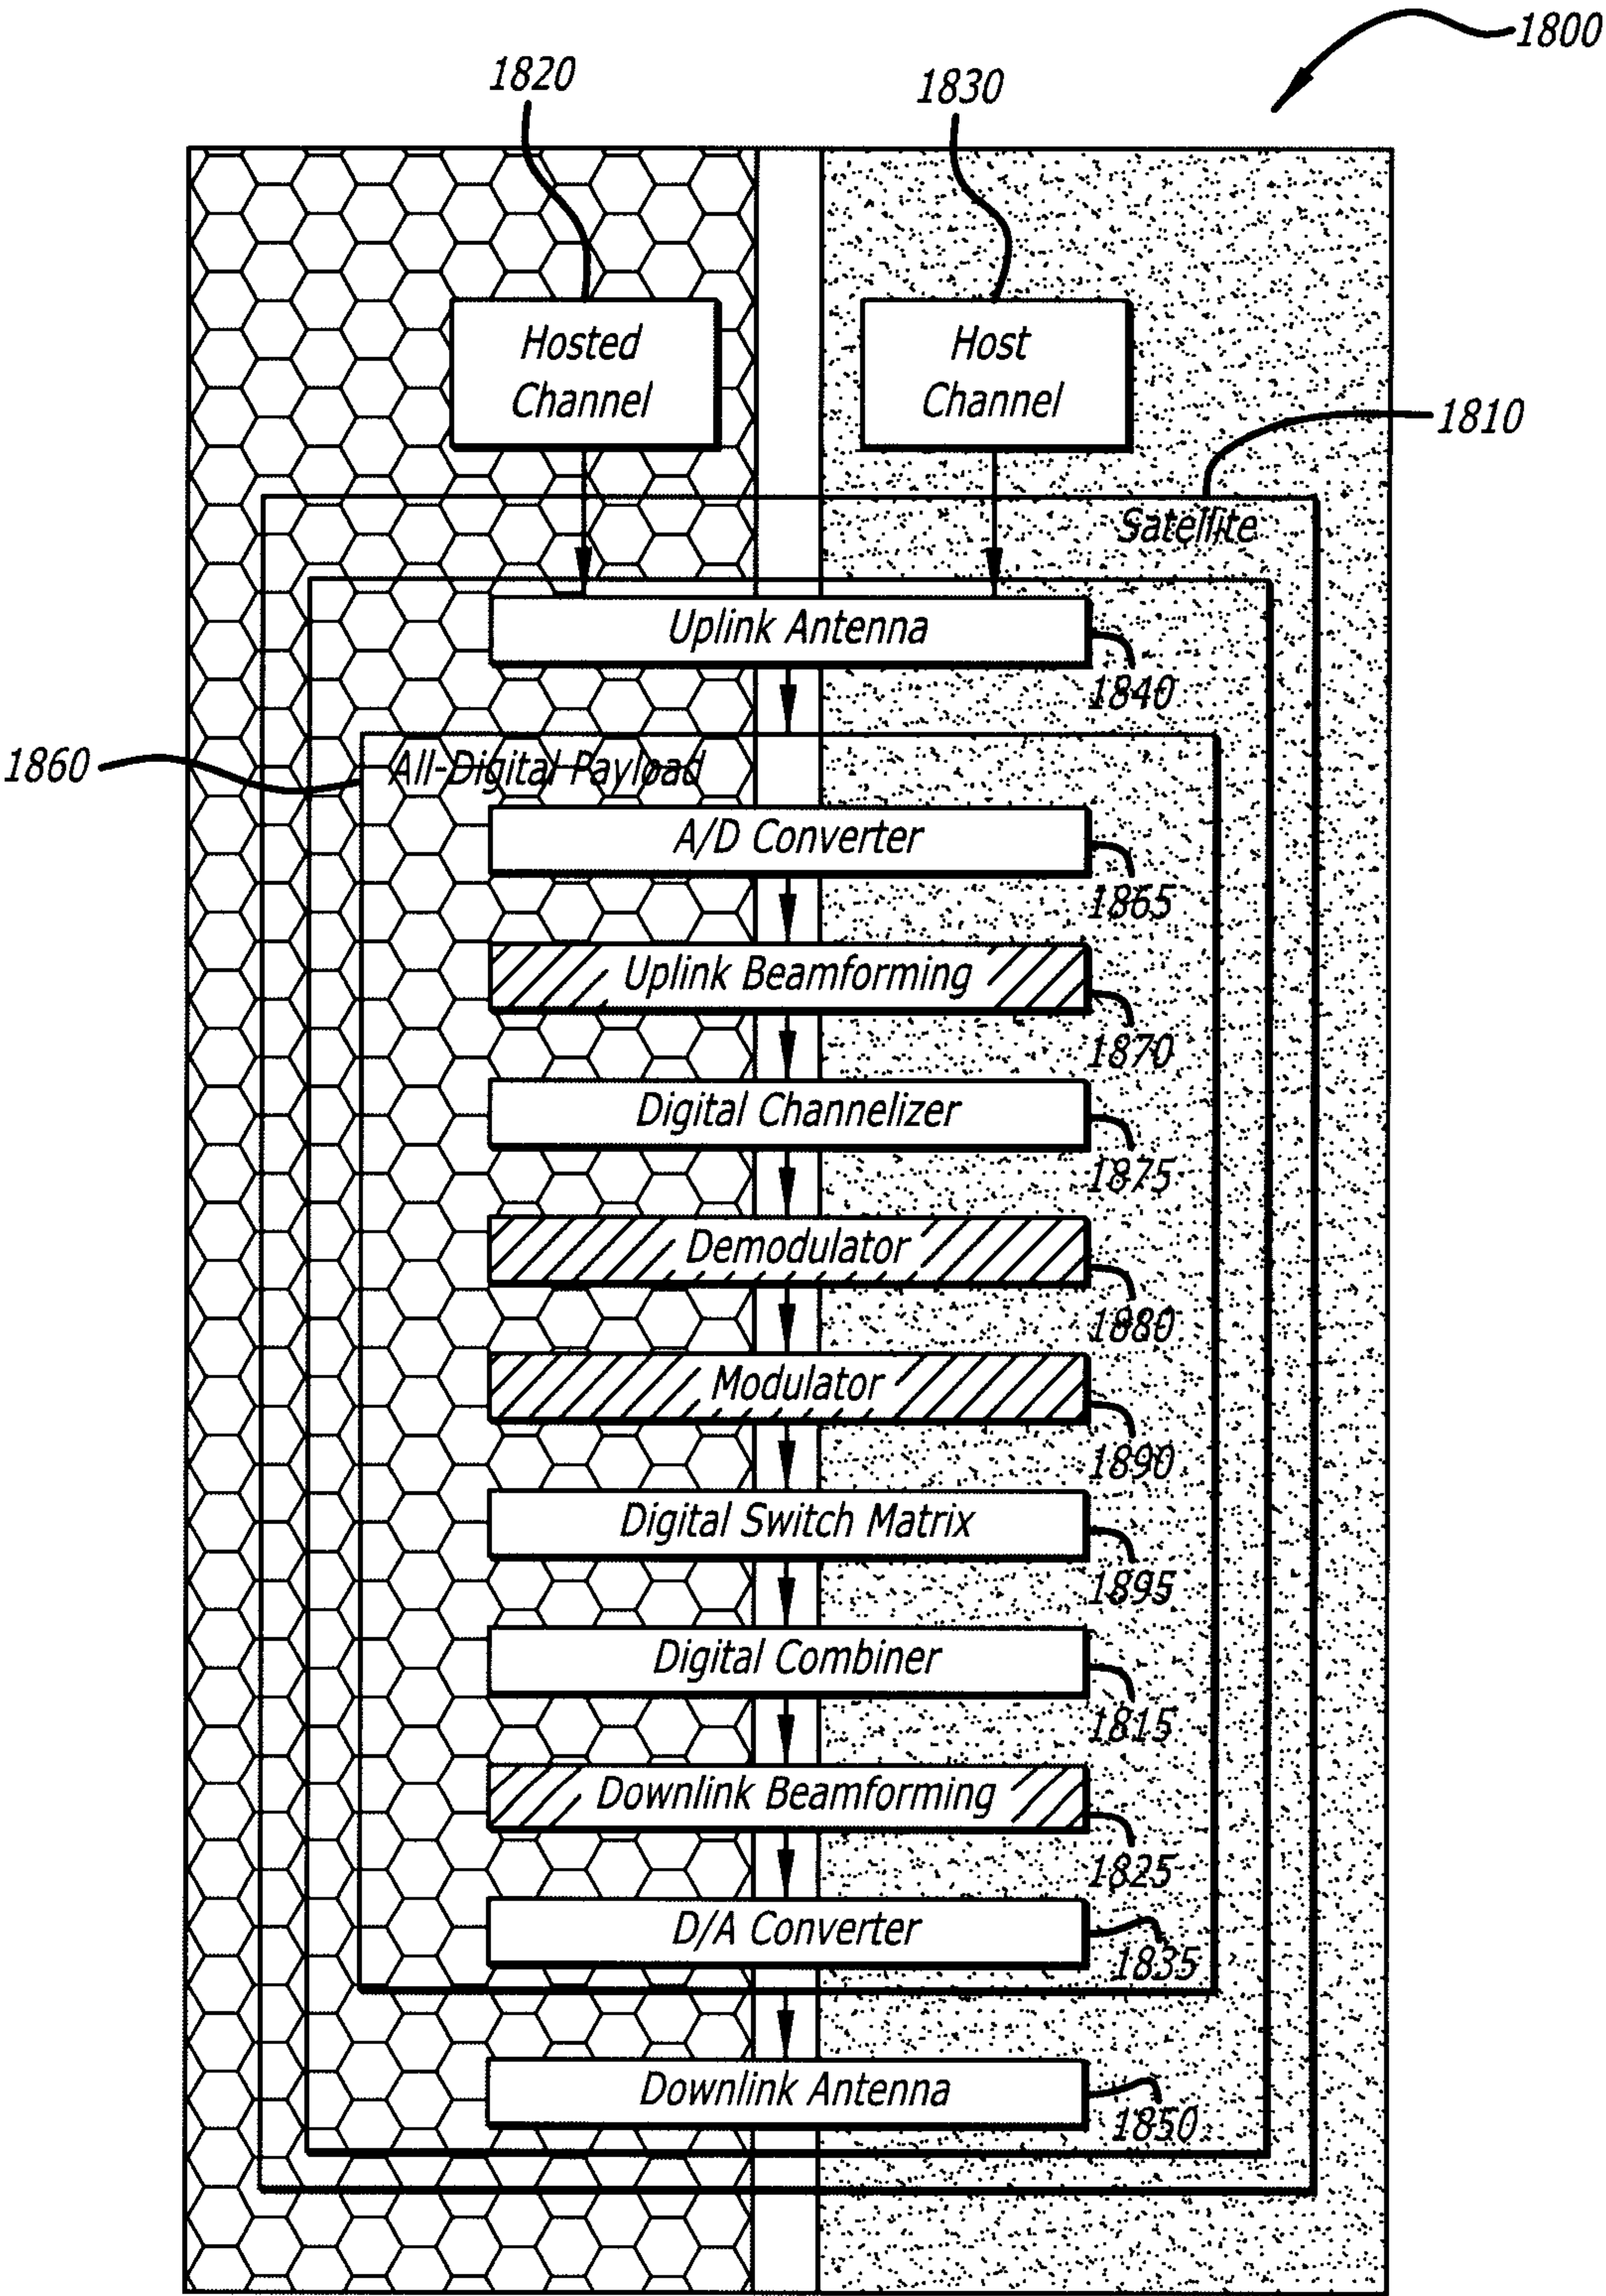


FIG. 18

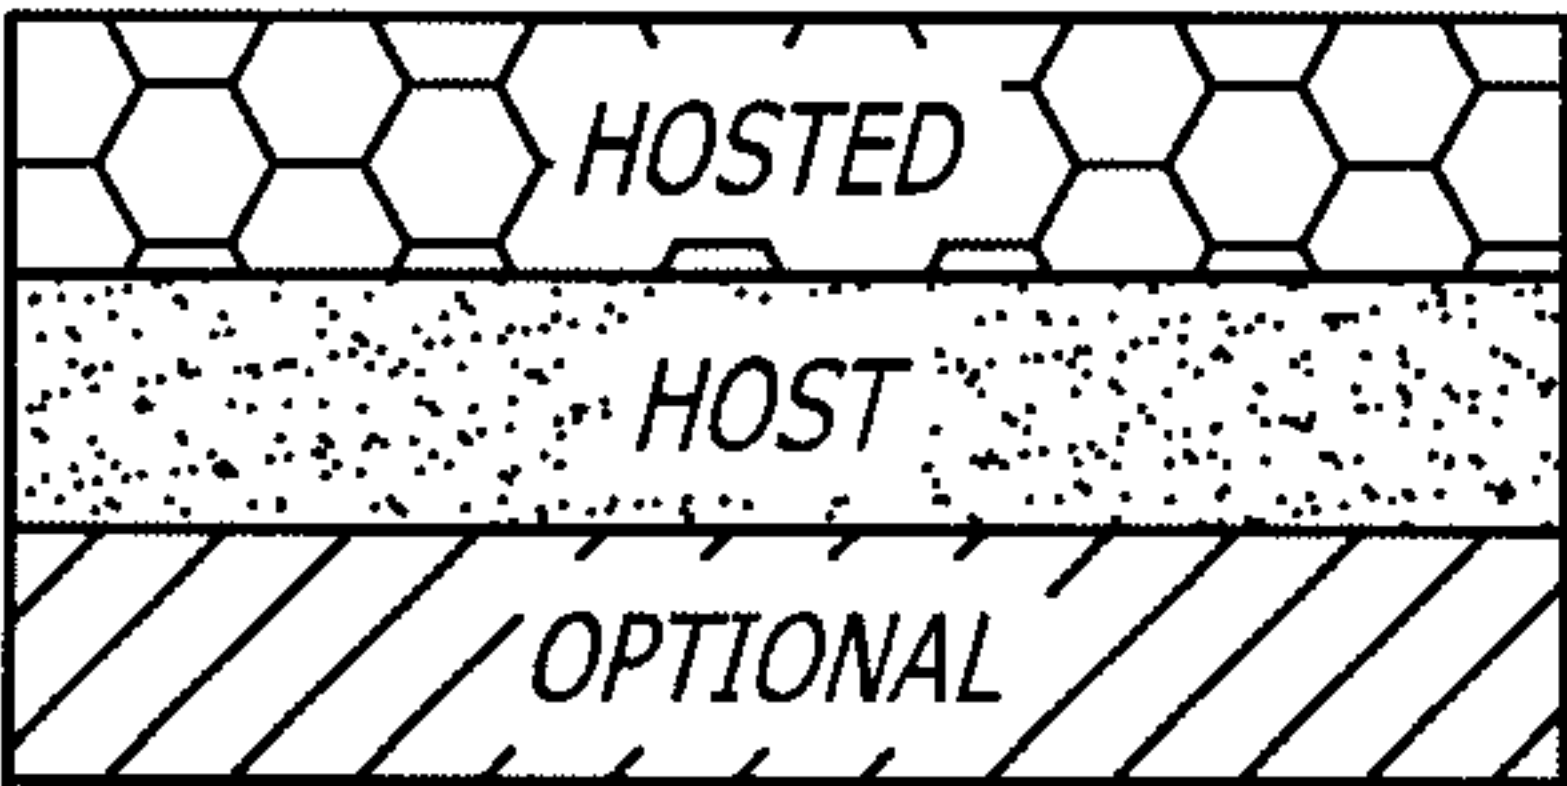


FIG. 19A

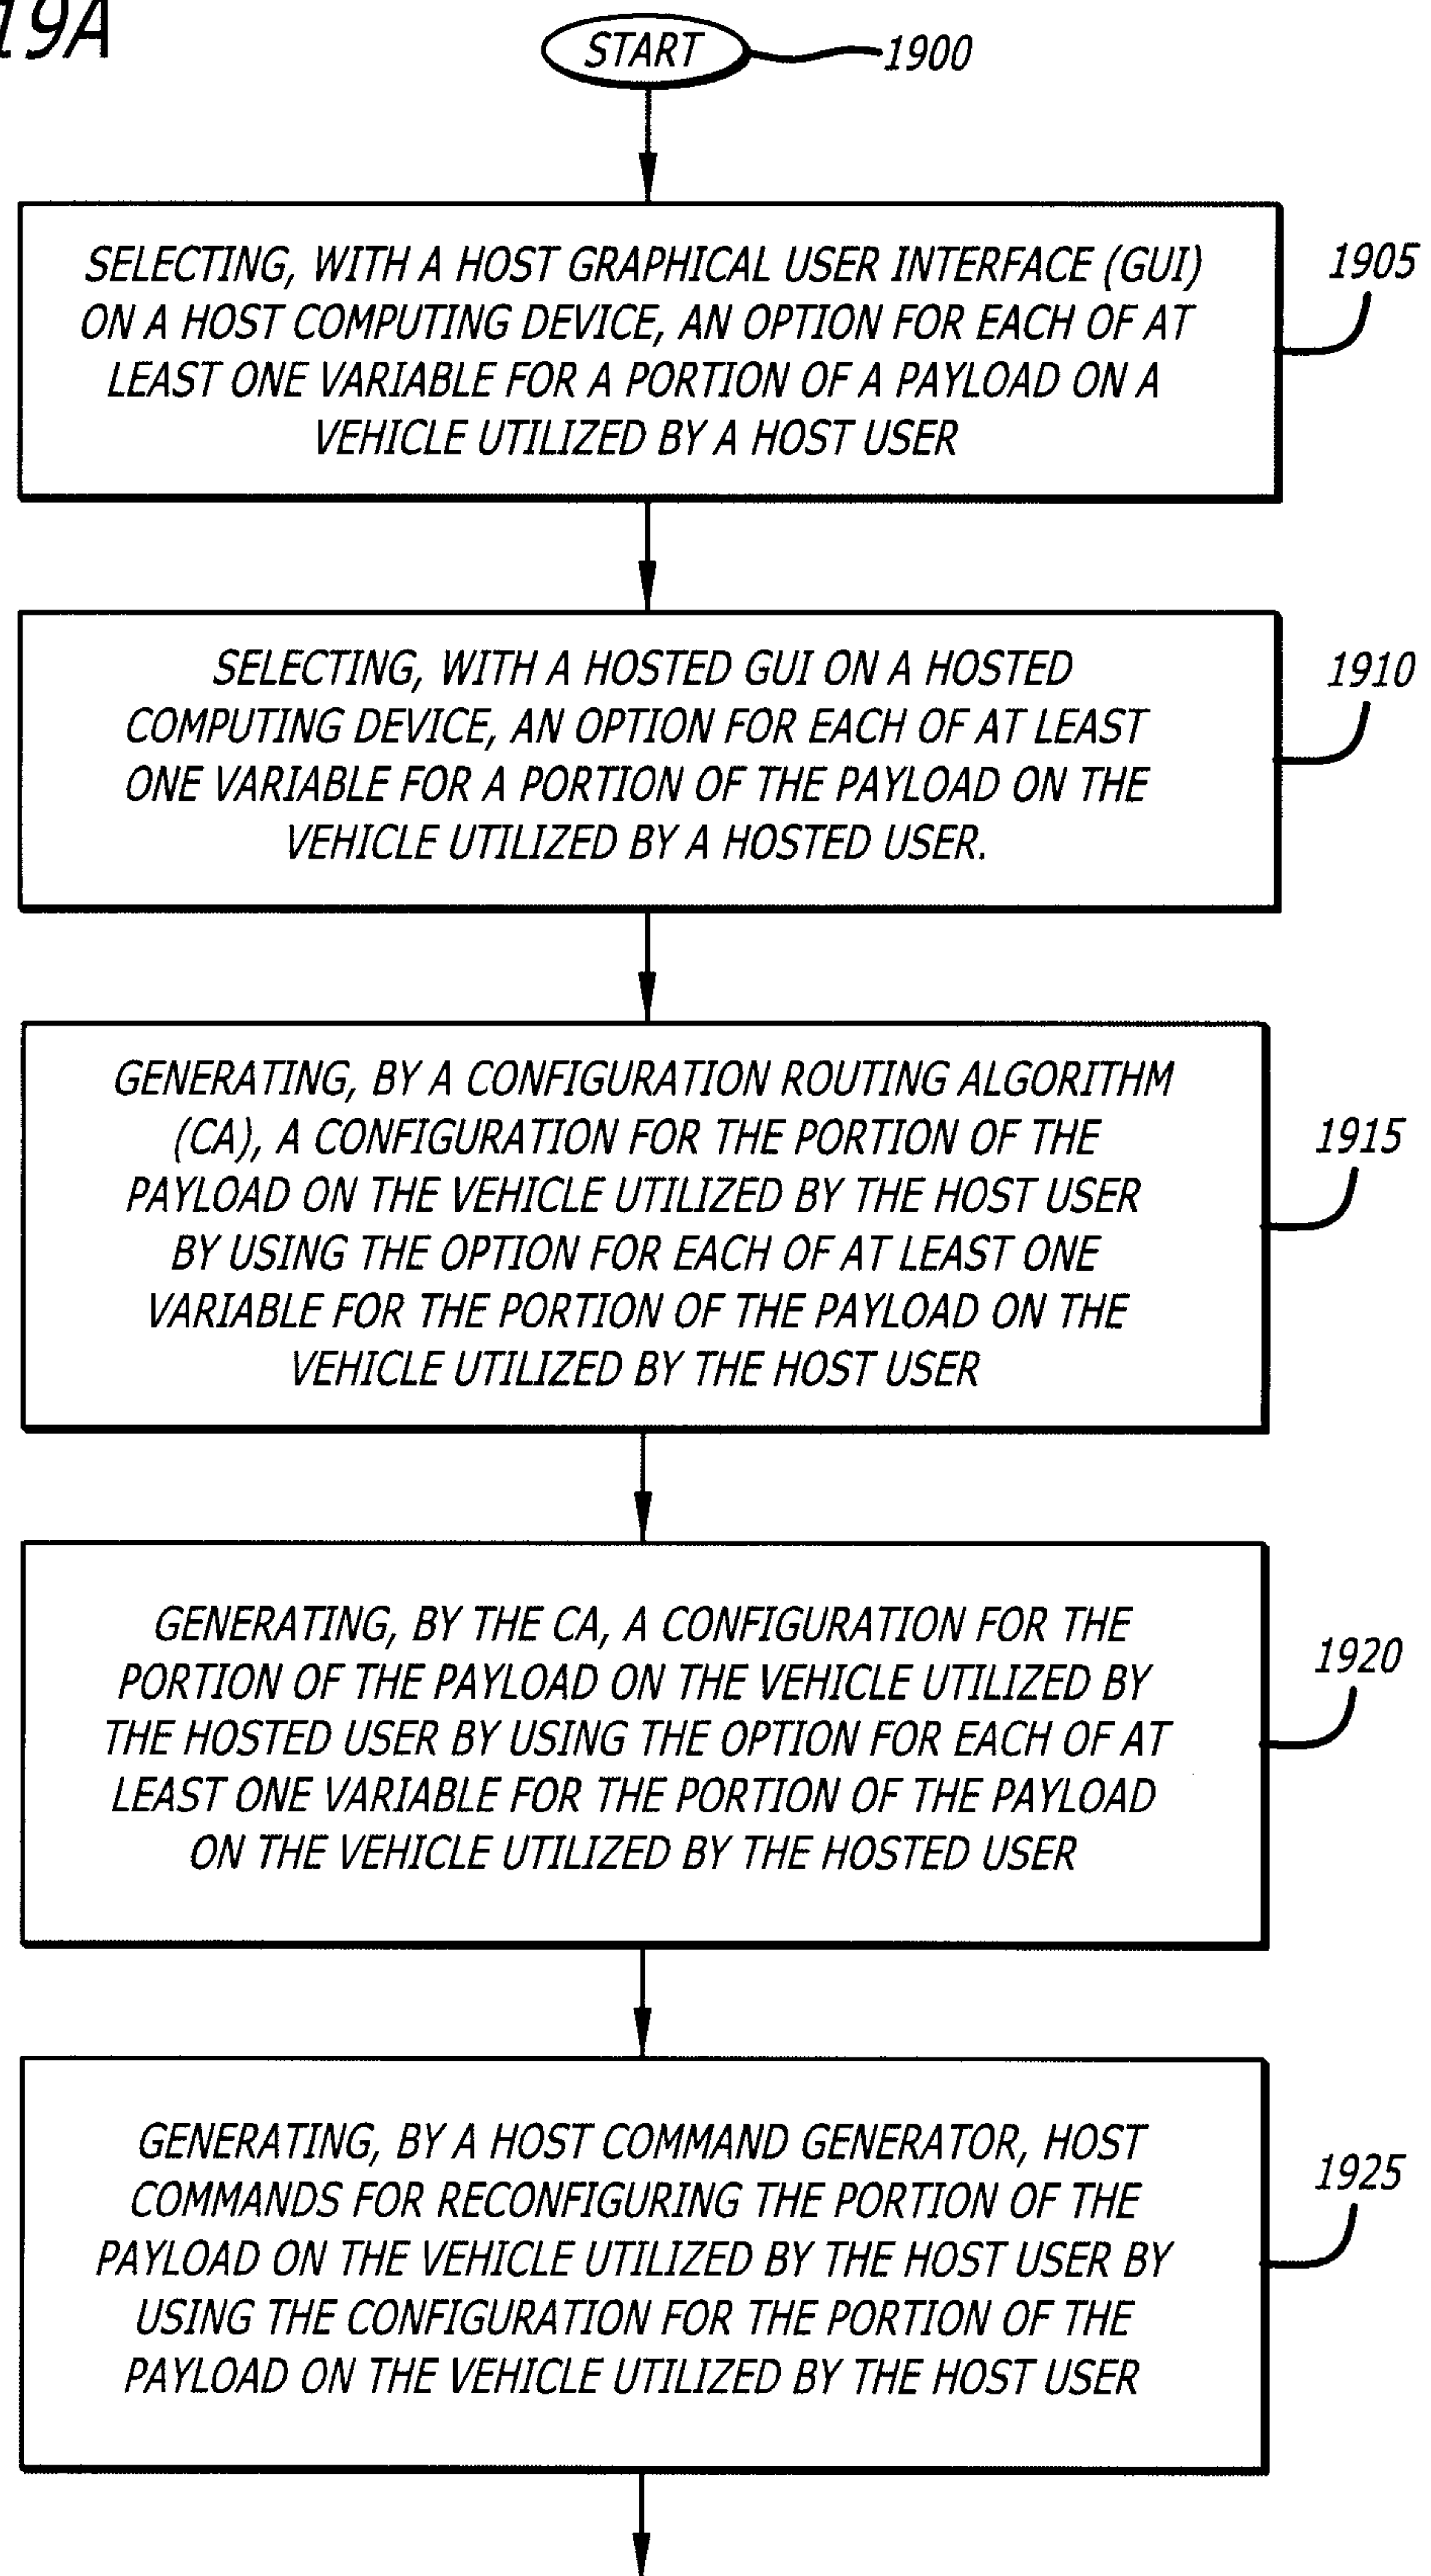
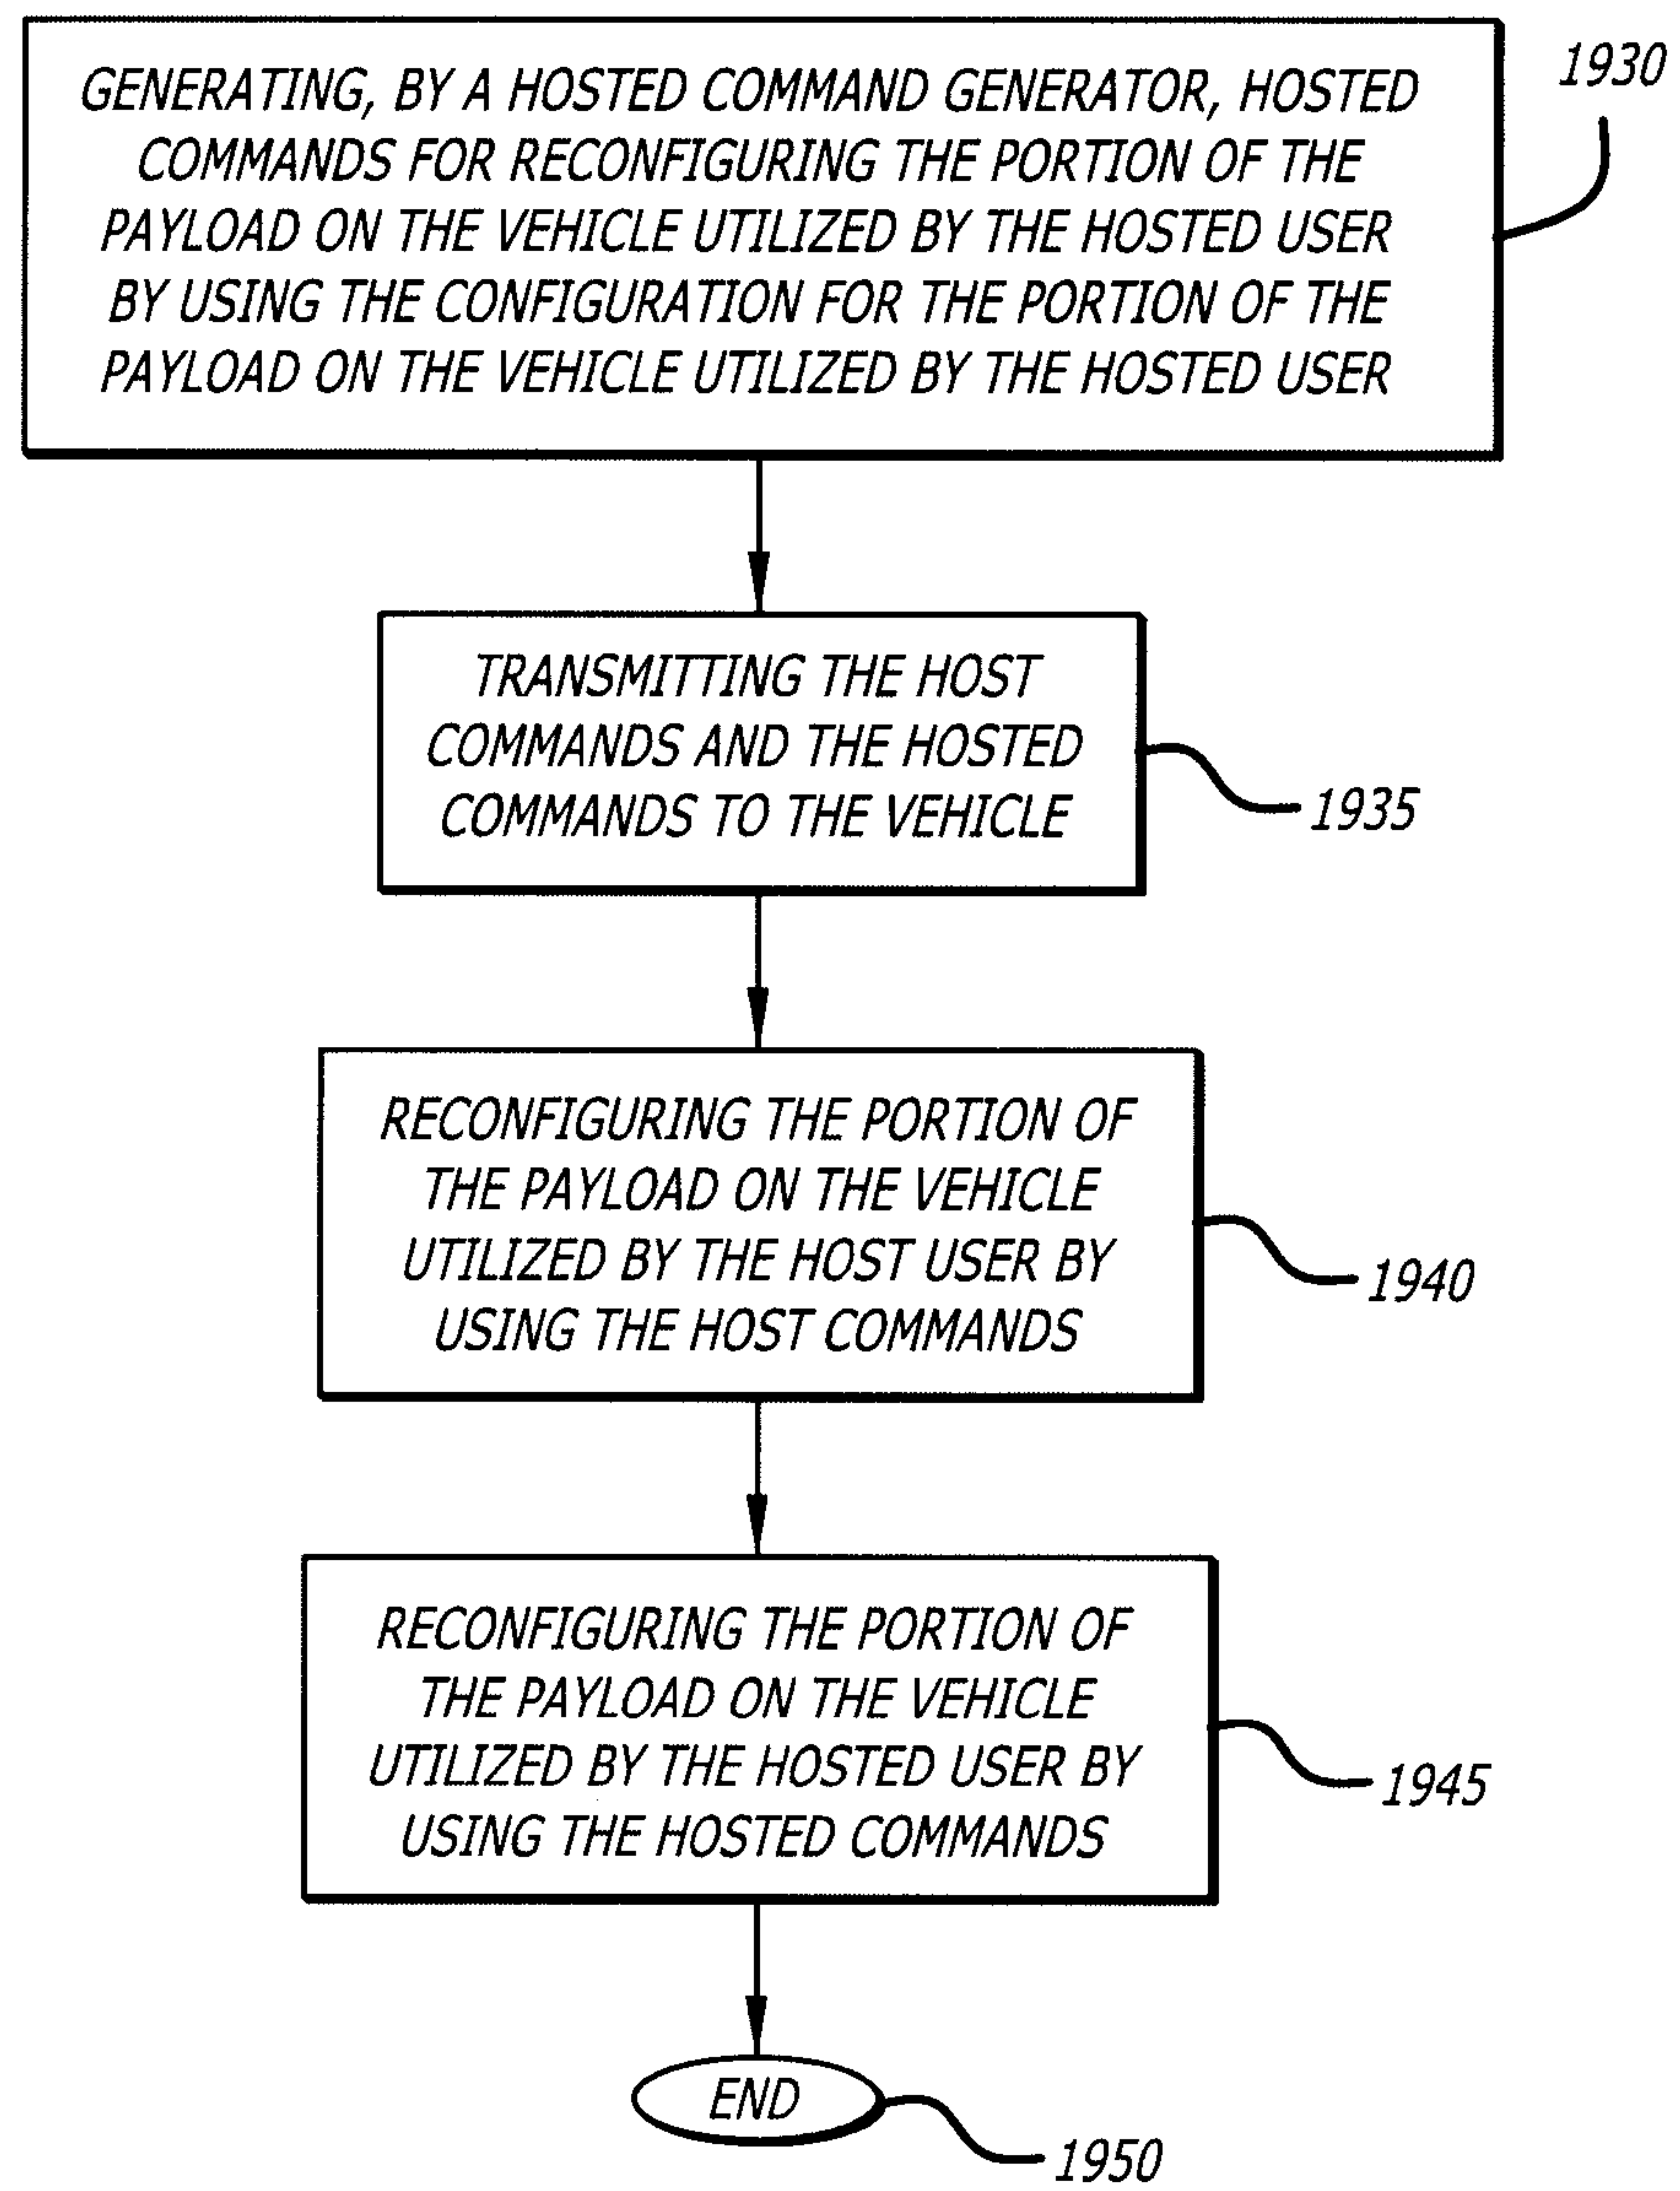
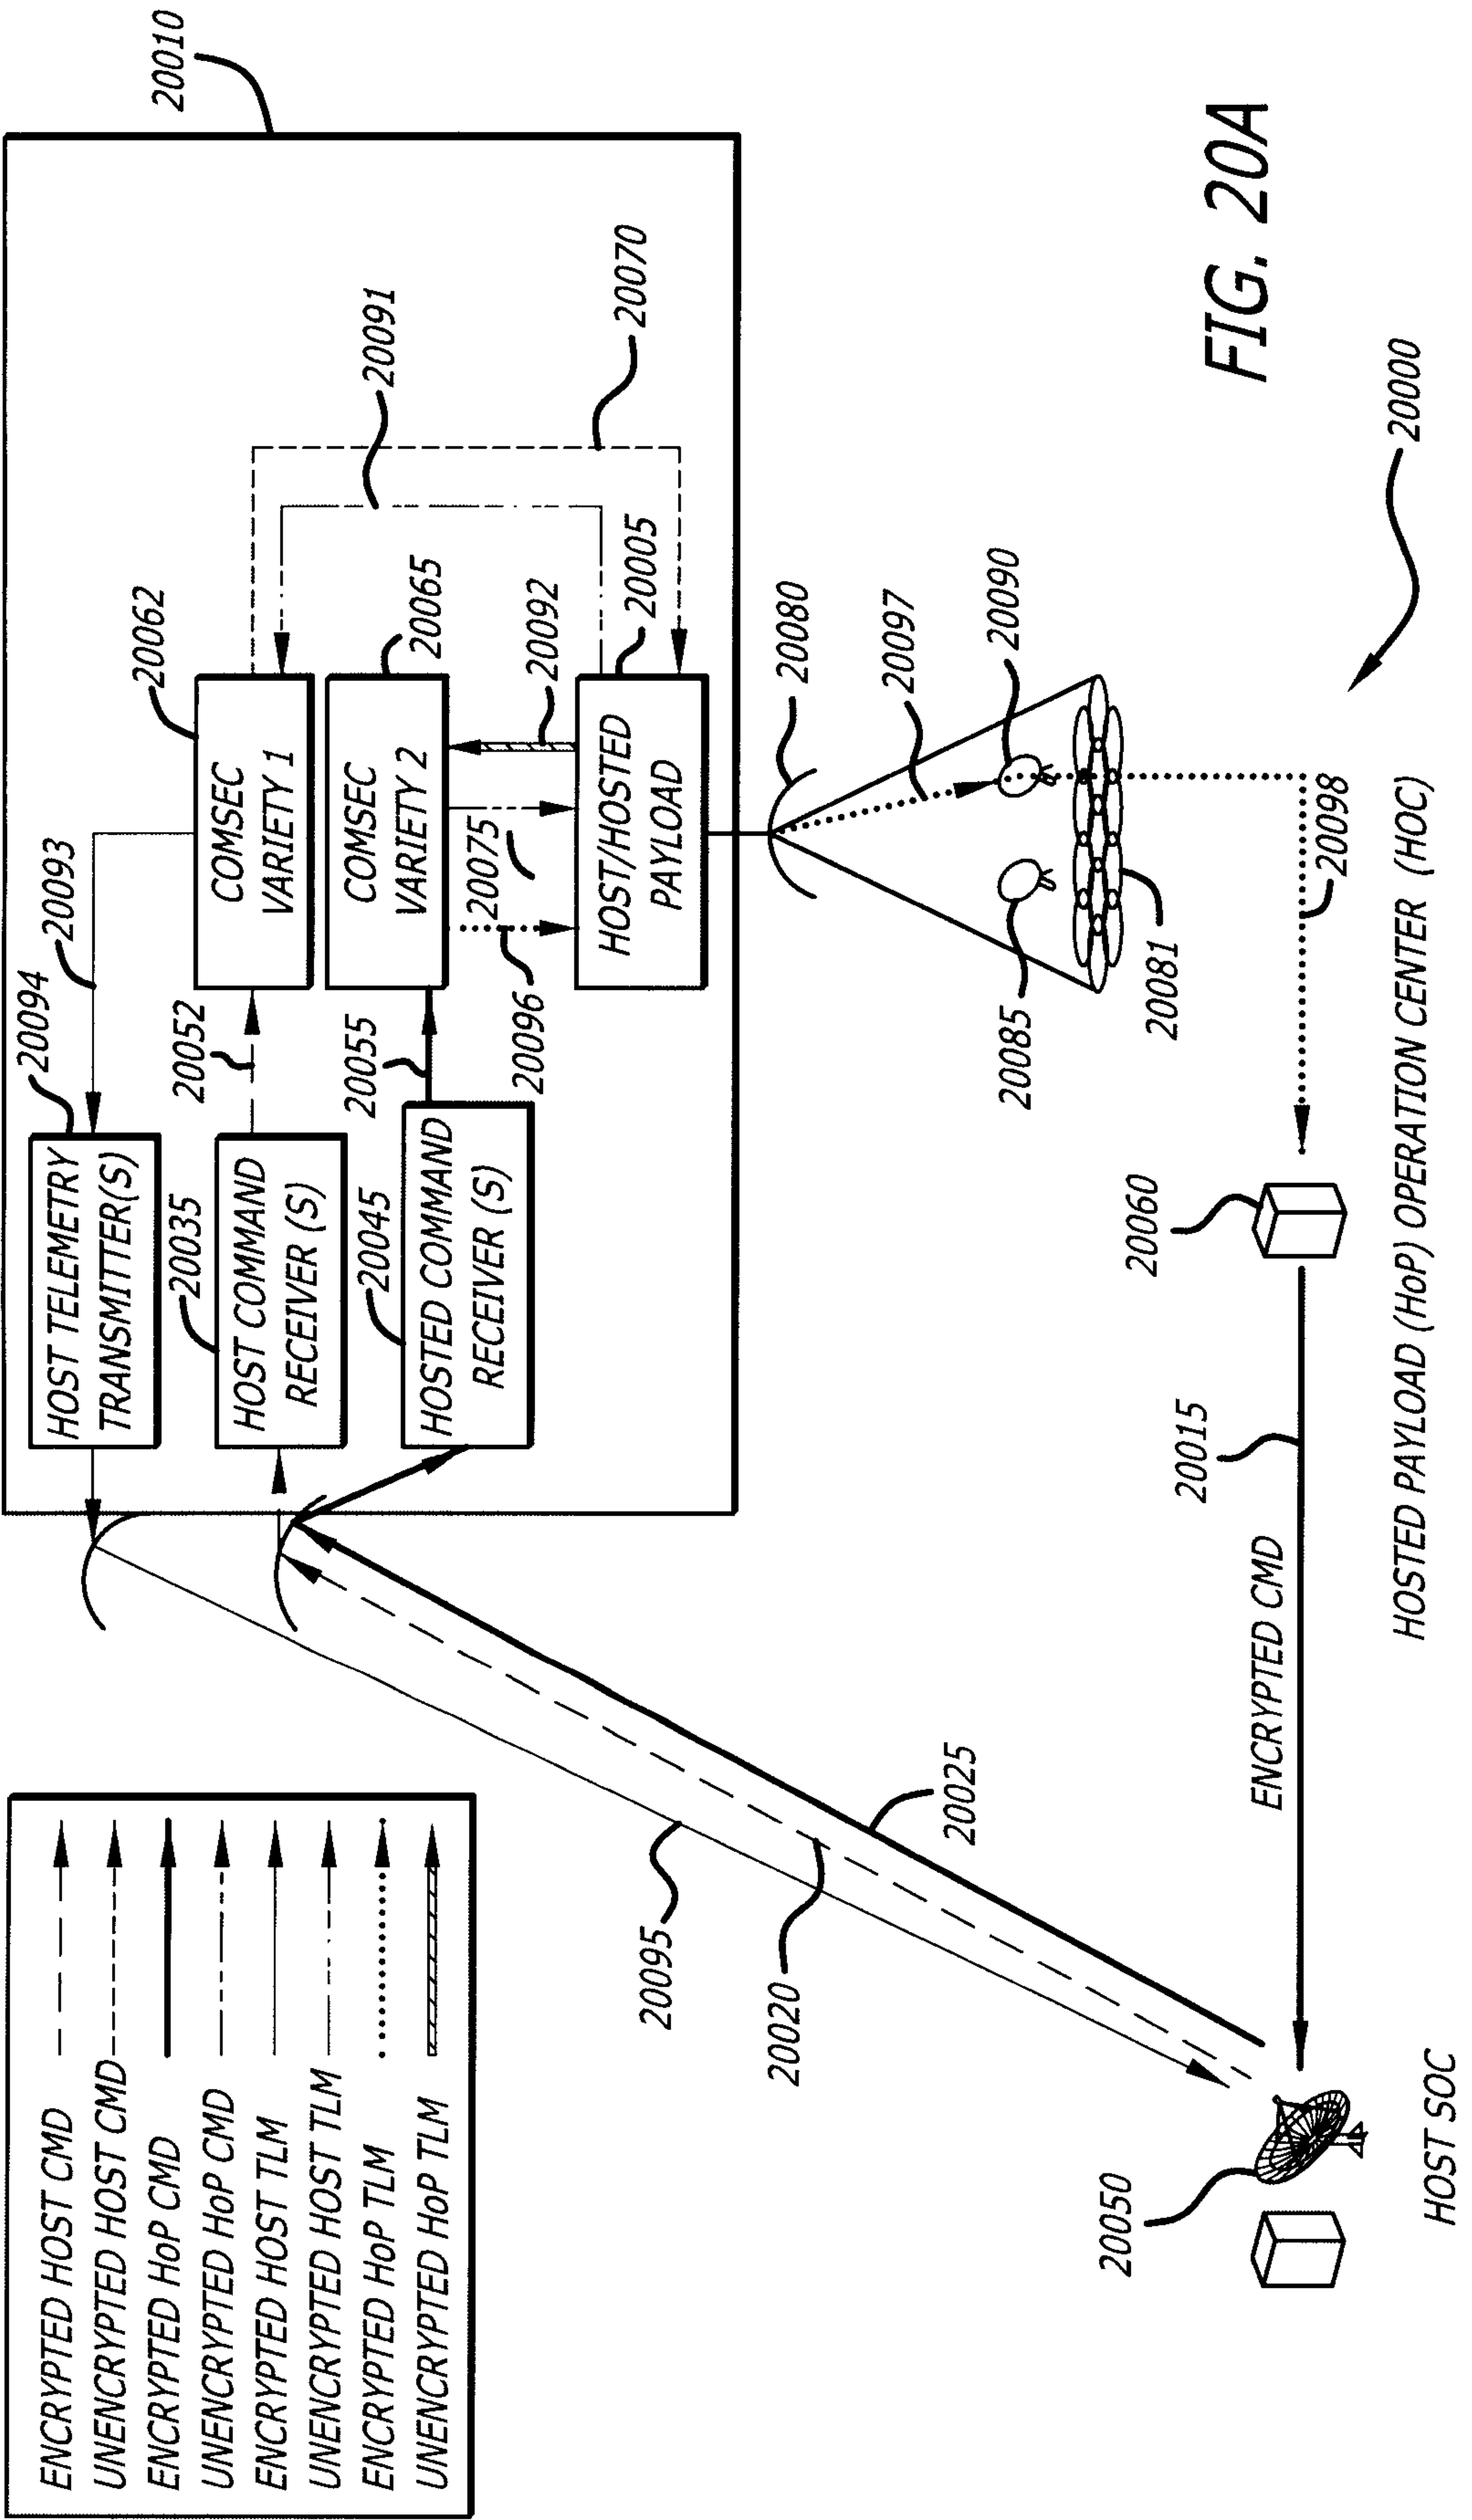


FIG. 19B



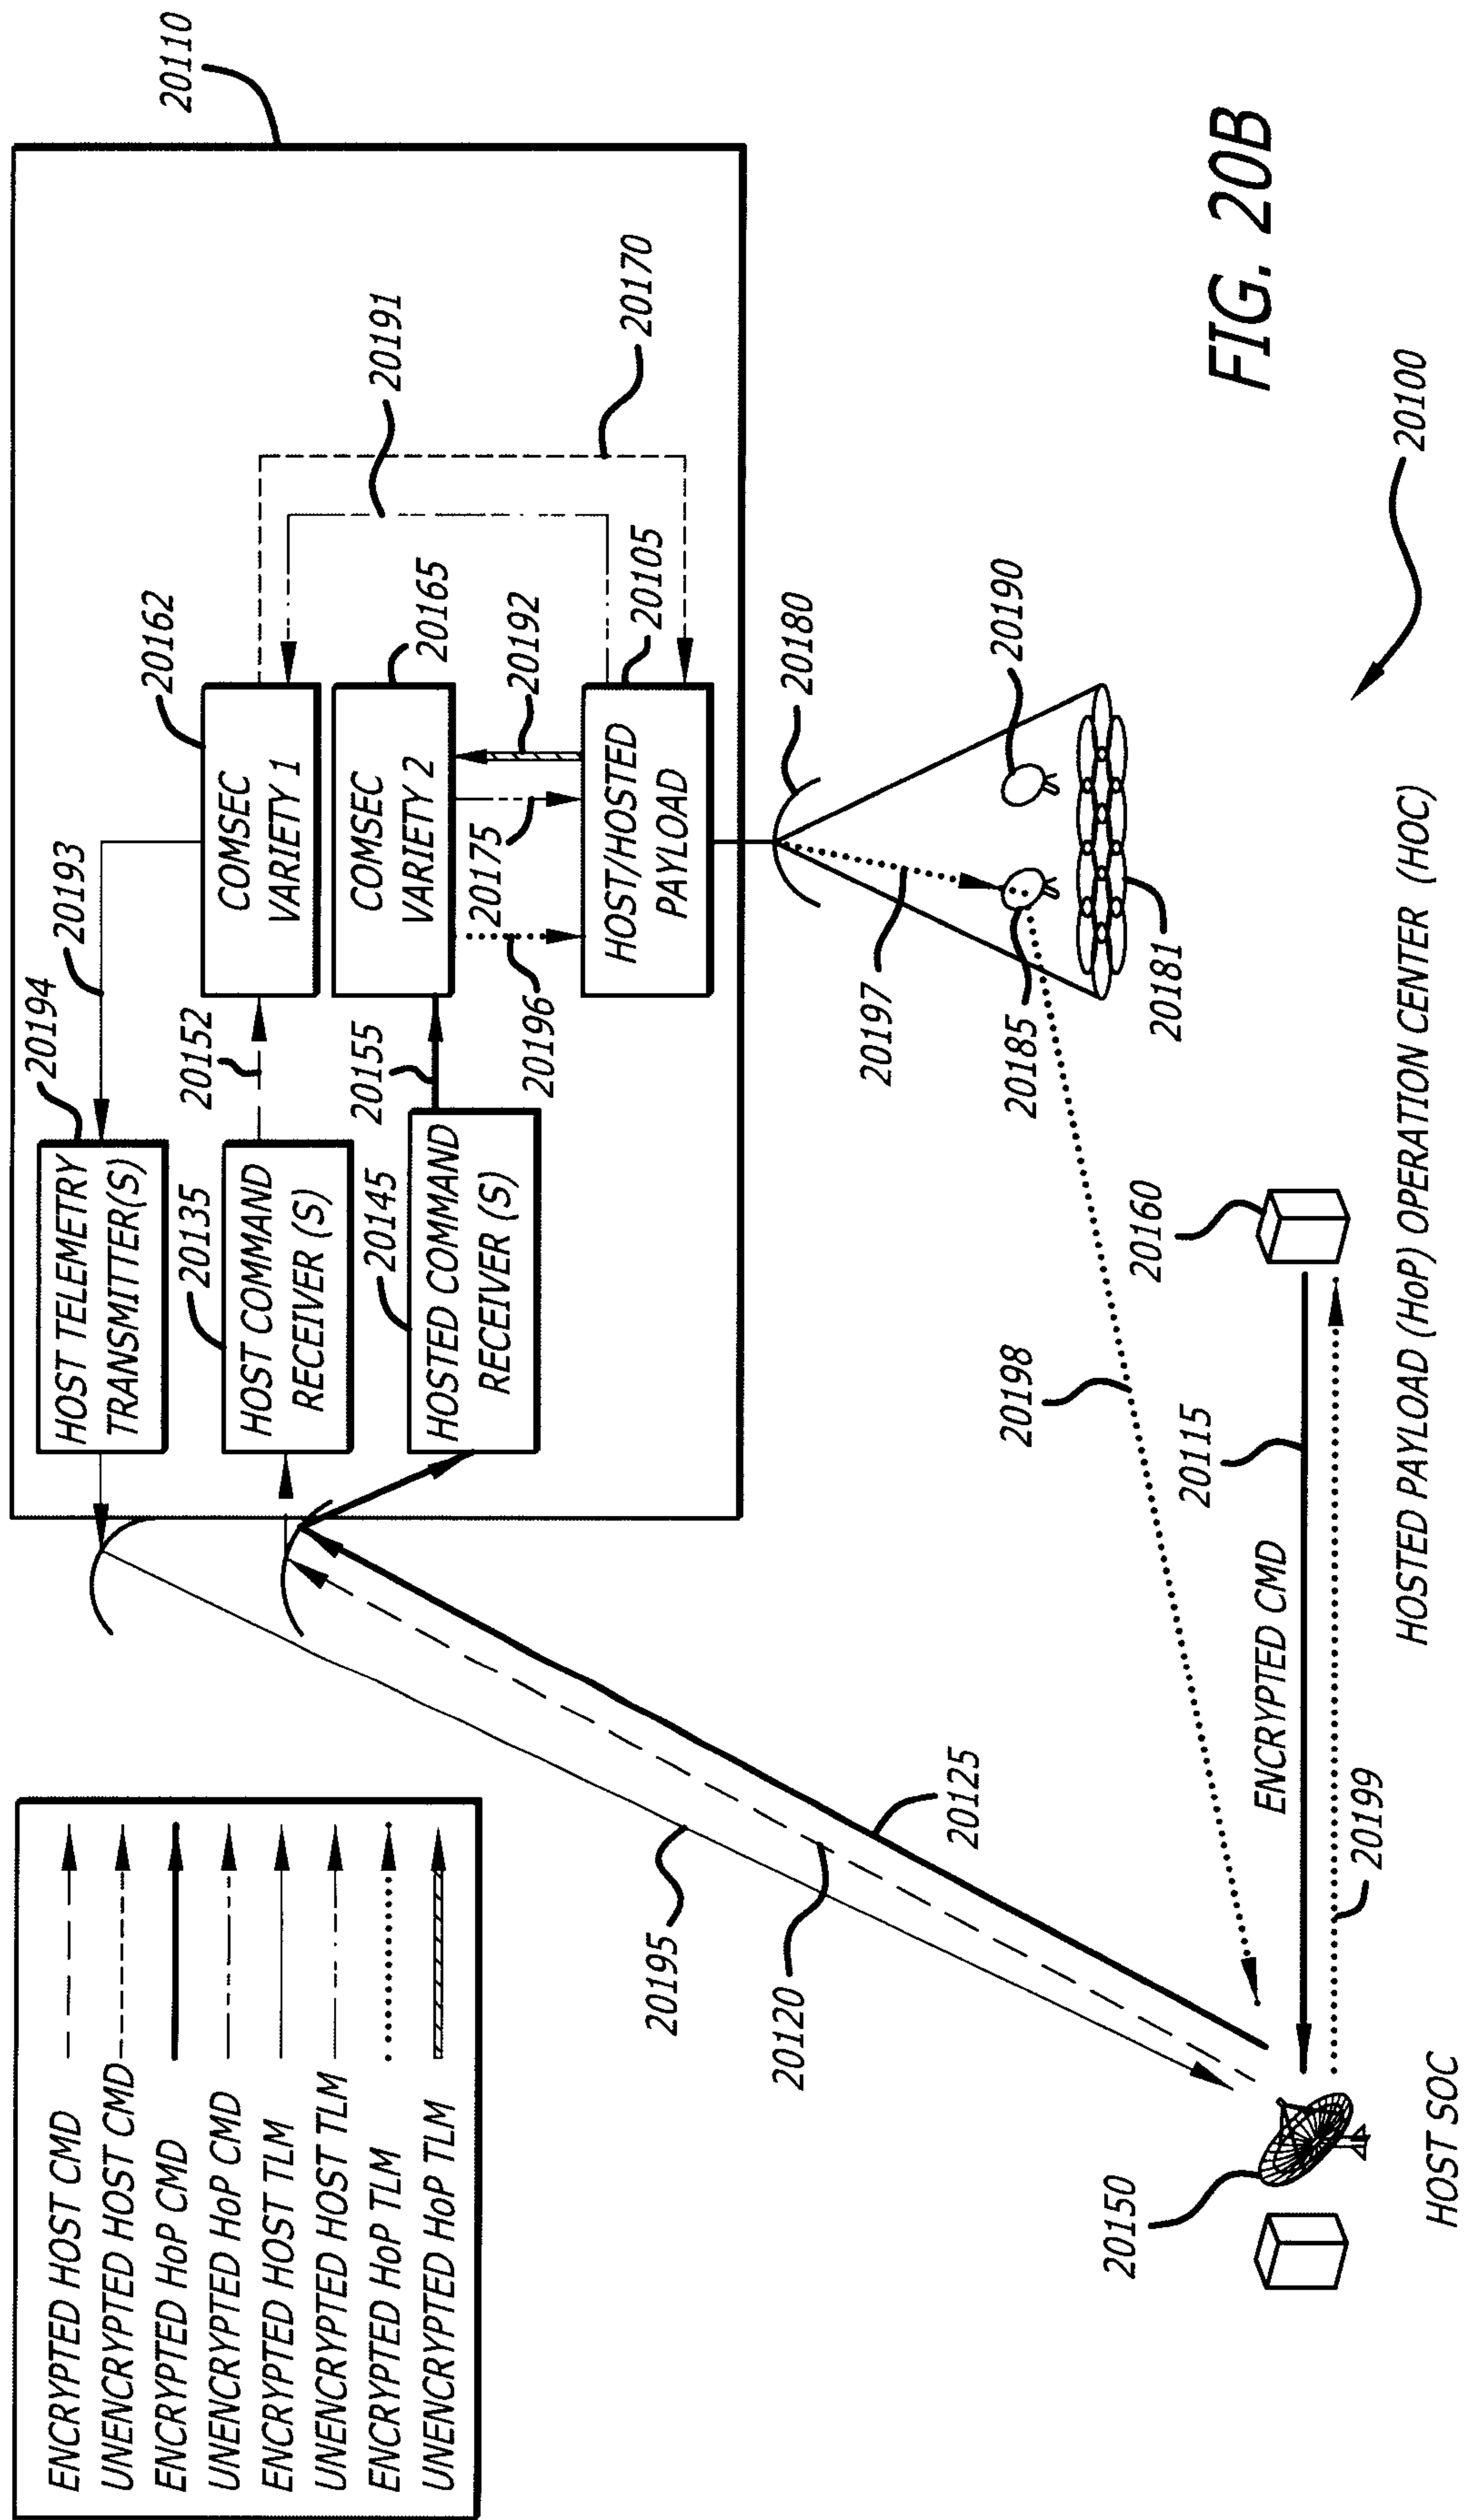


FIG. 21A

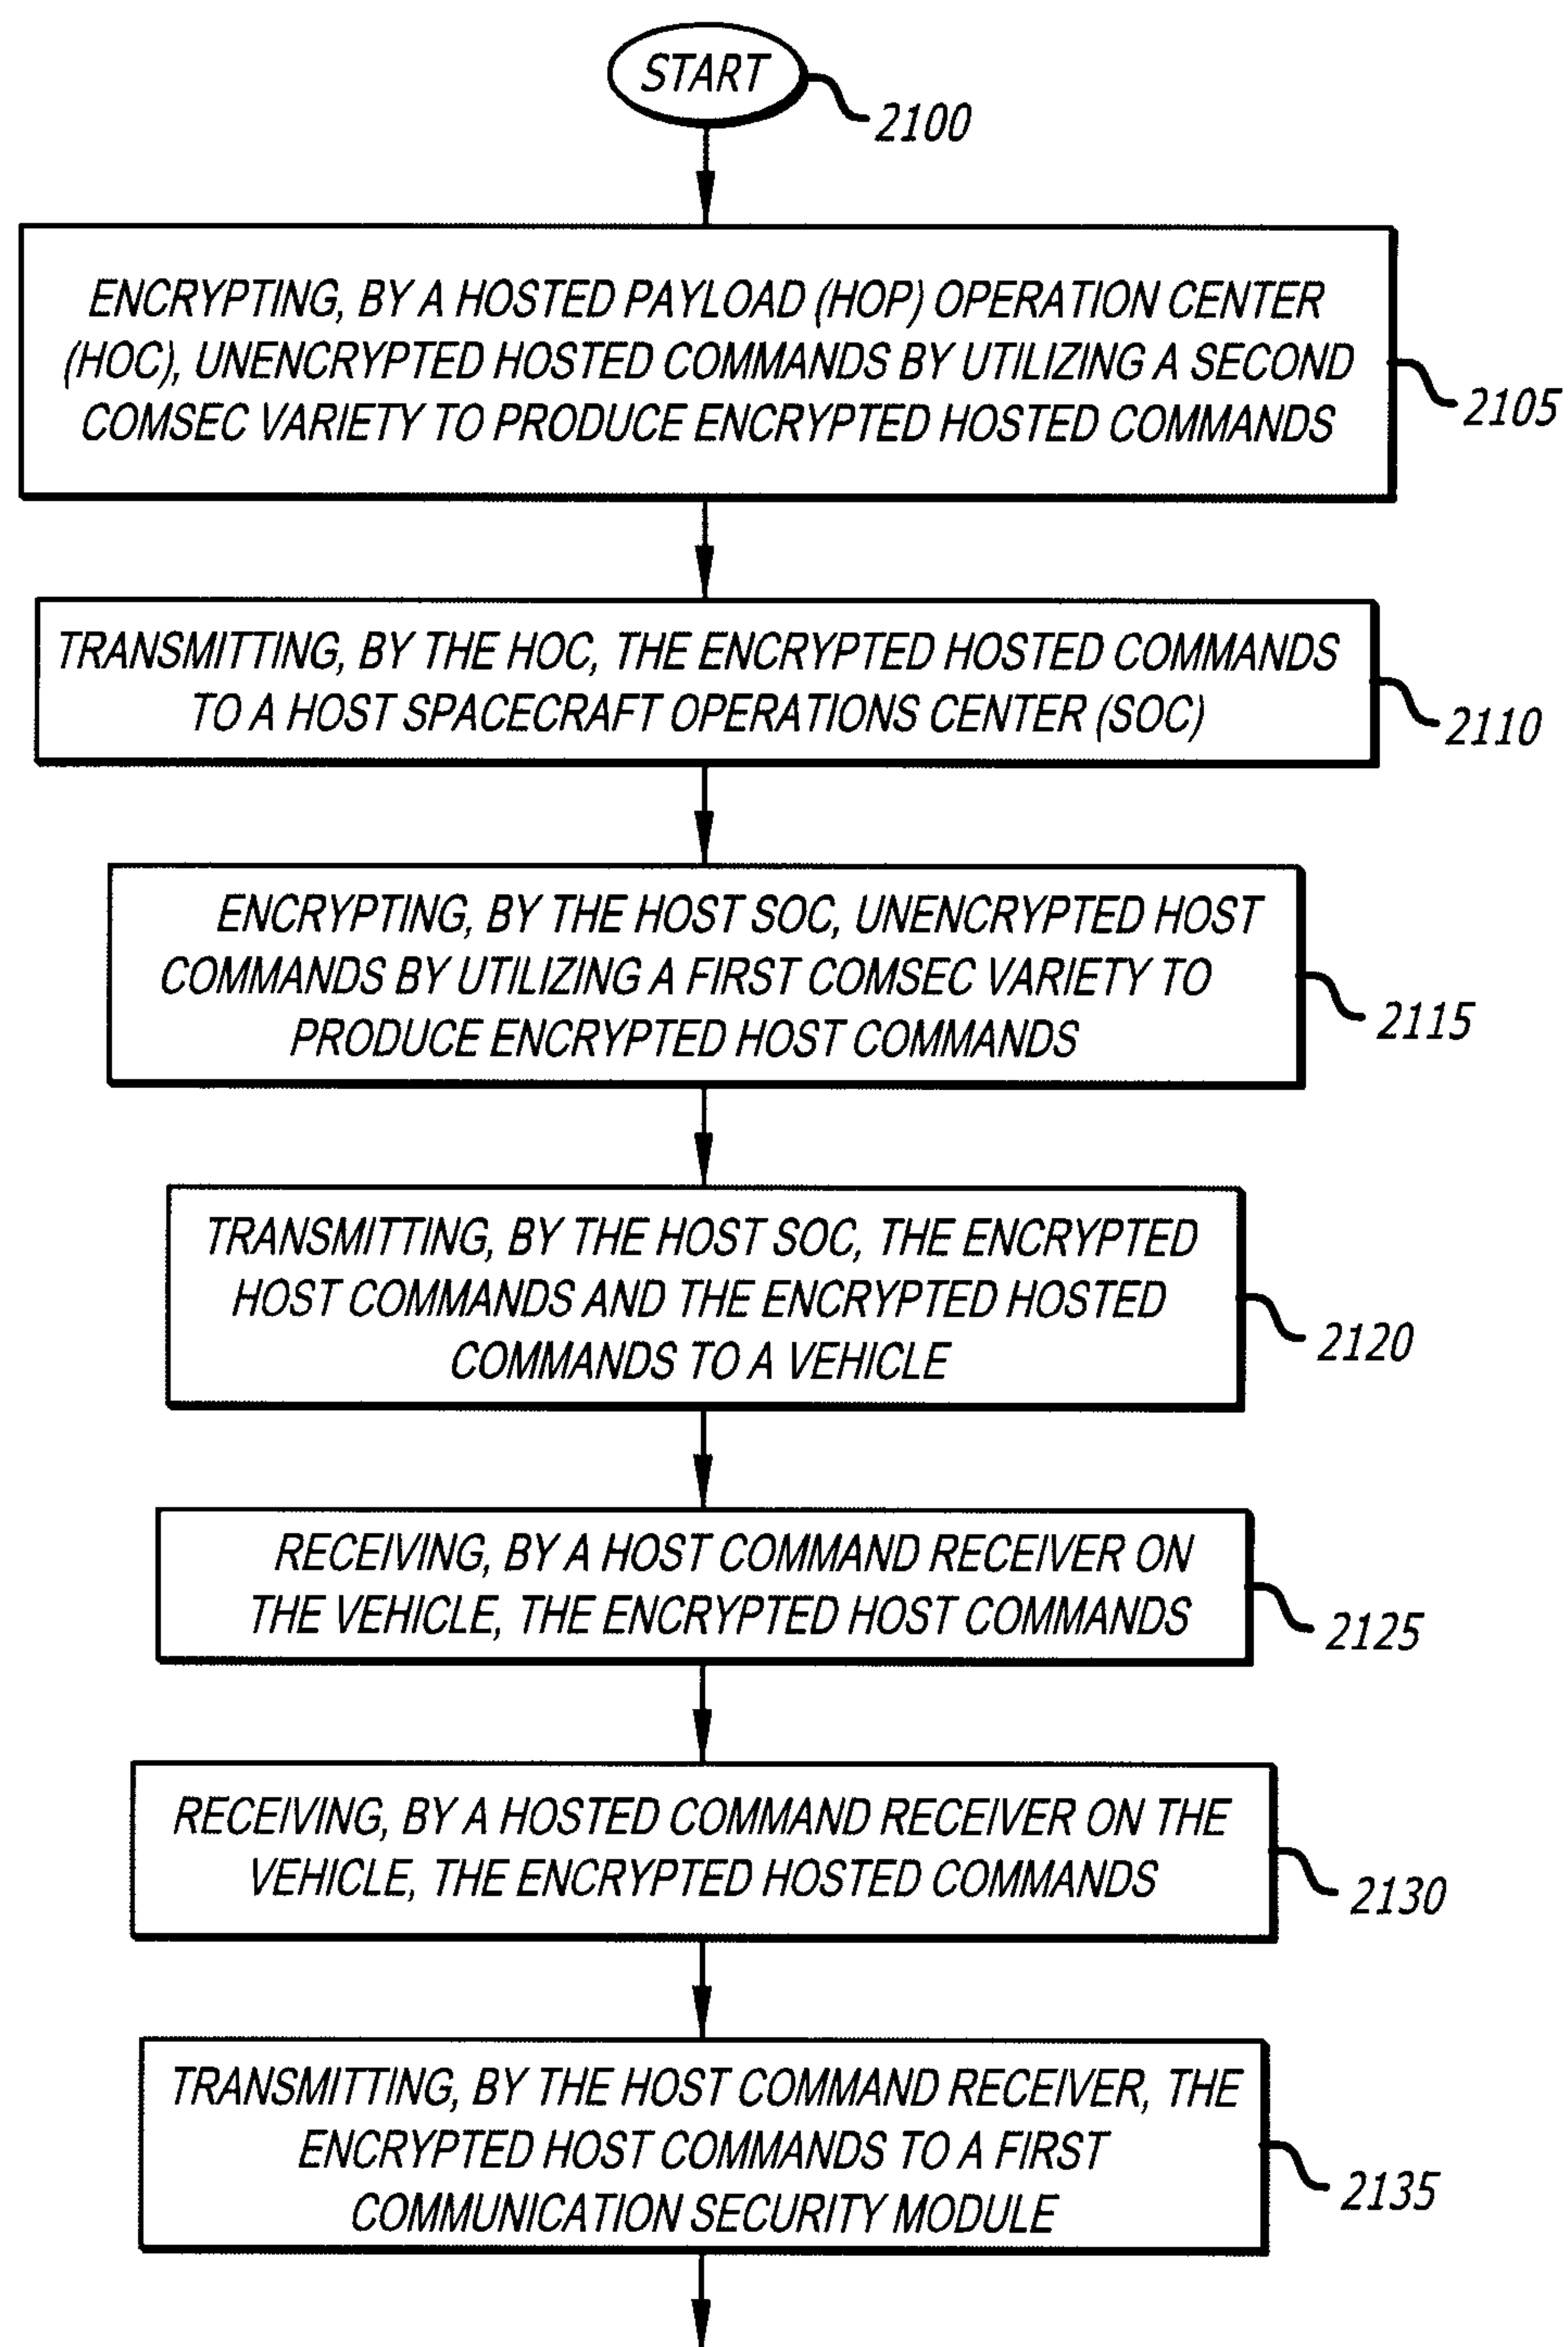


FIG. 21B

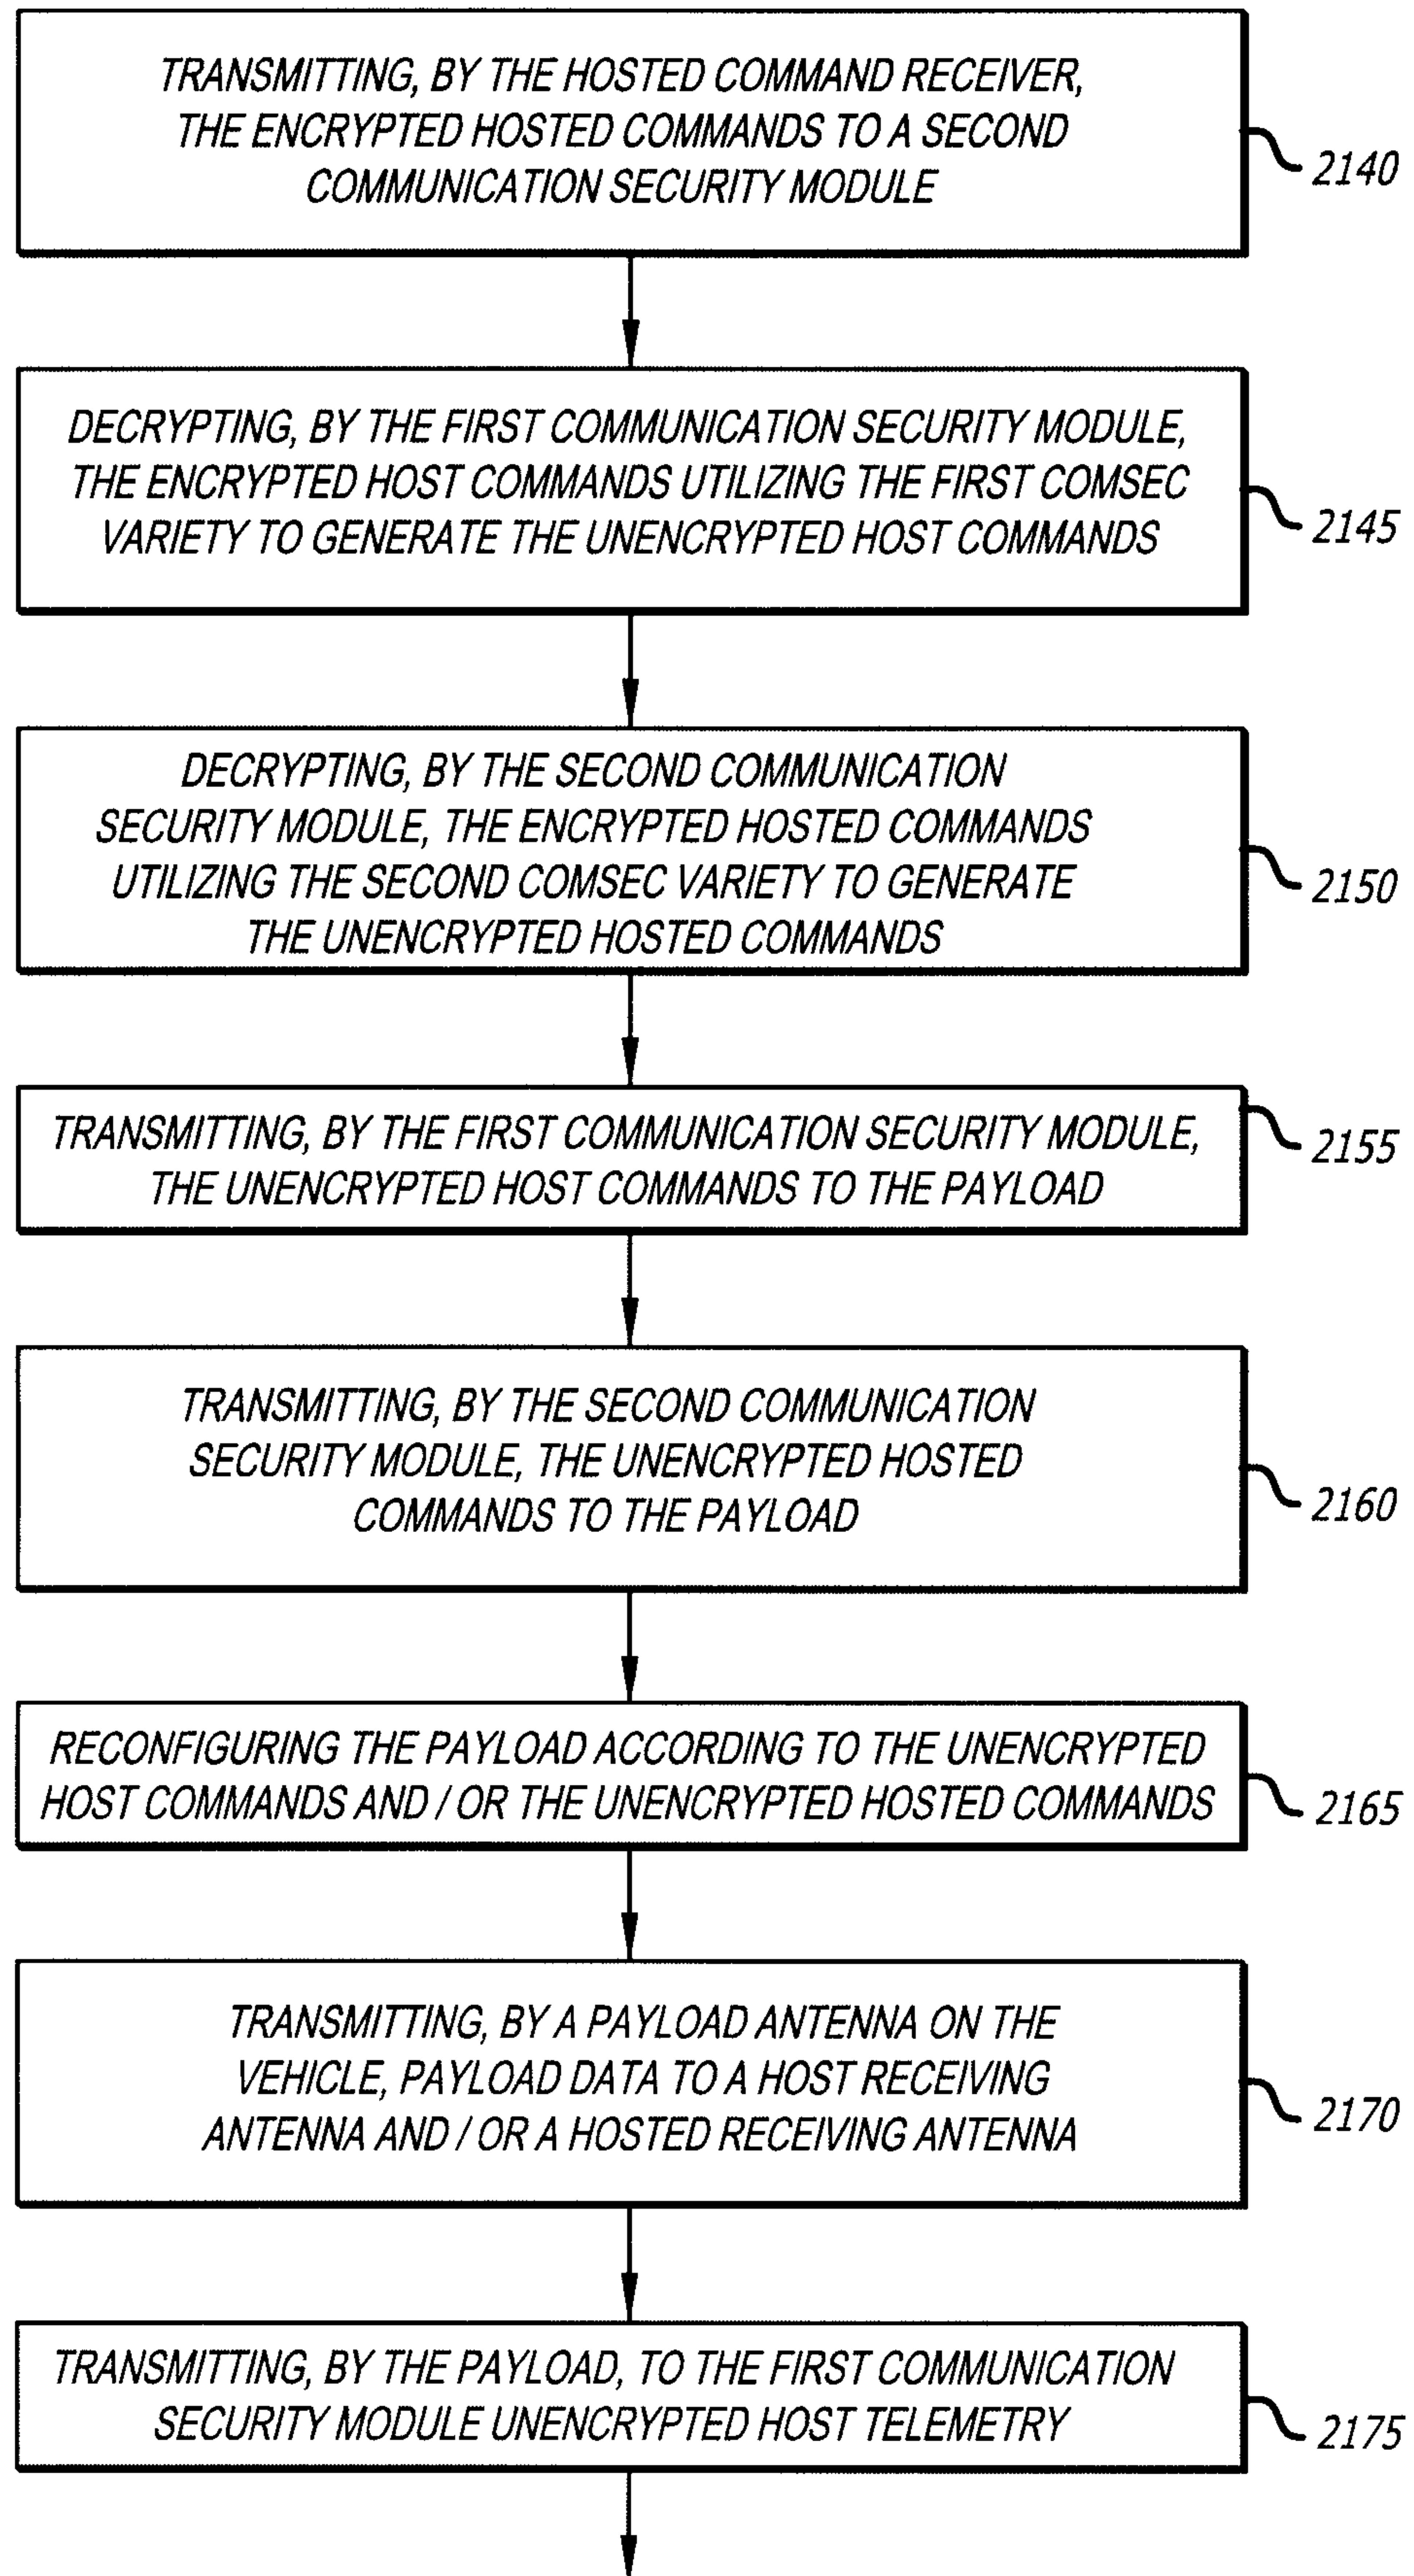


FIG. 21C

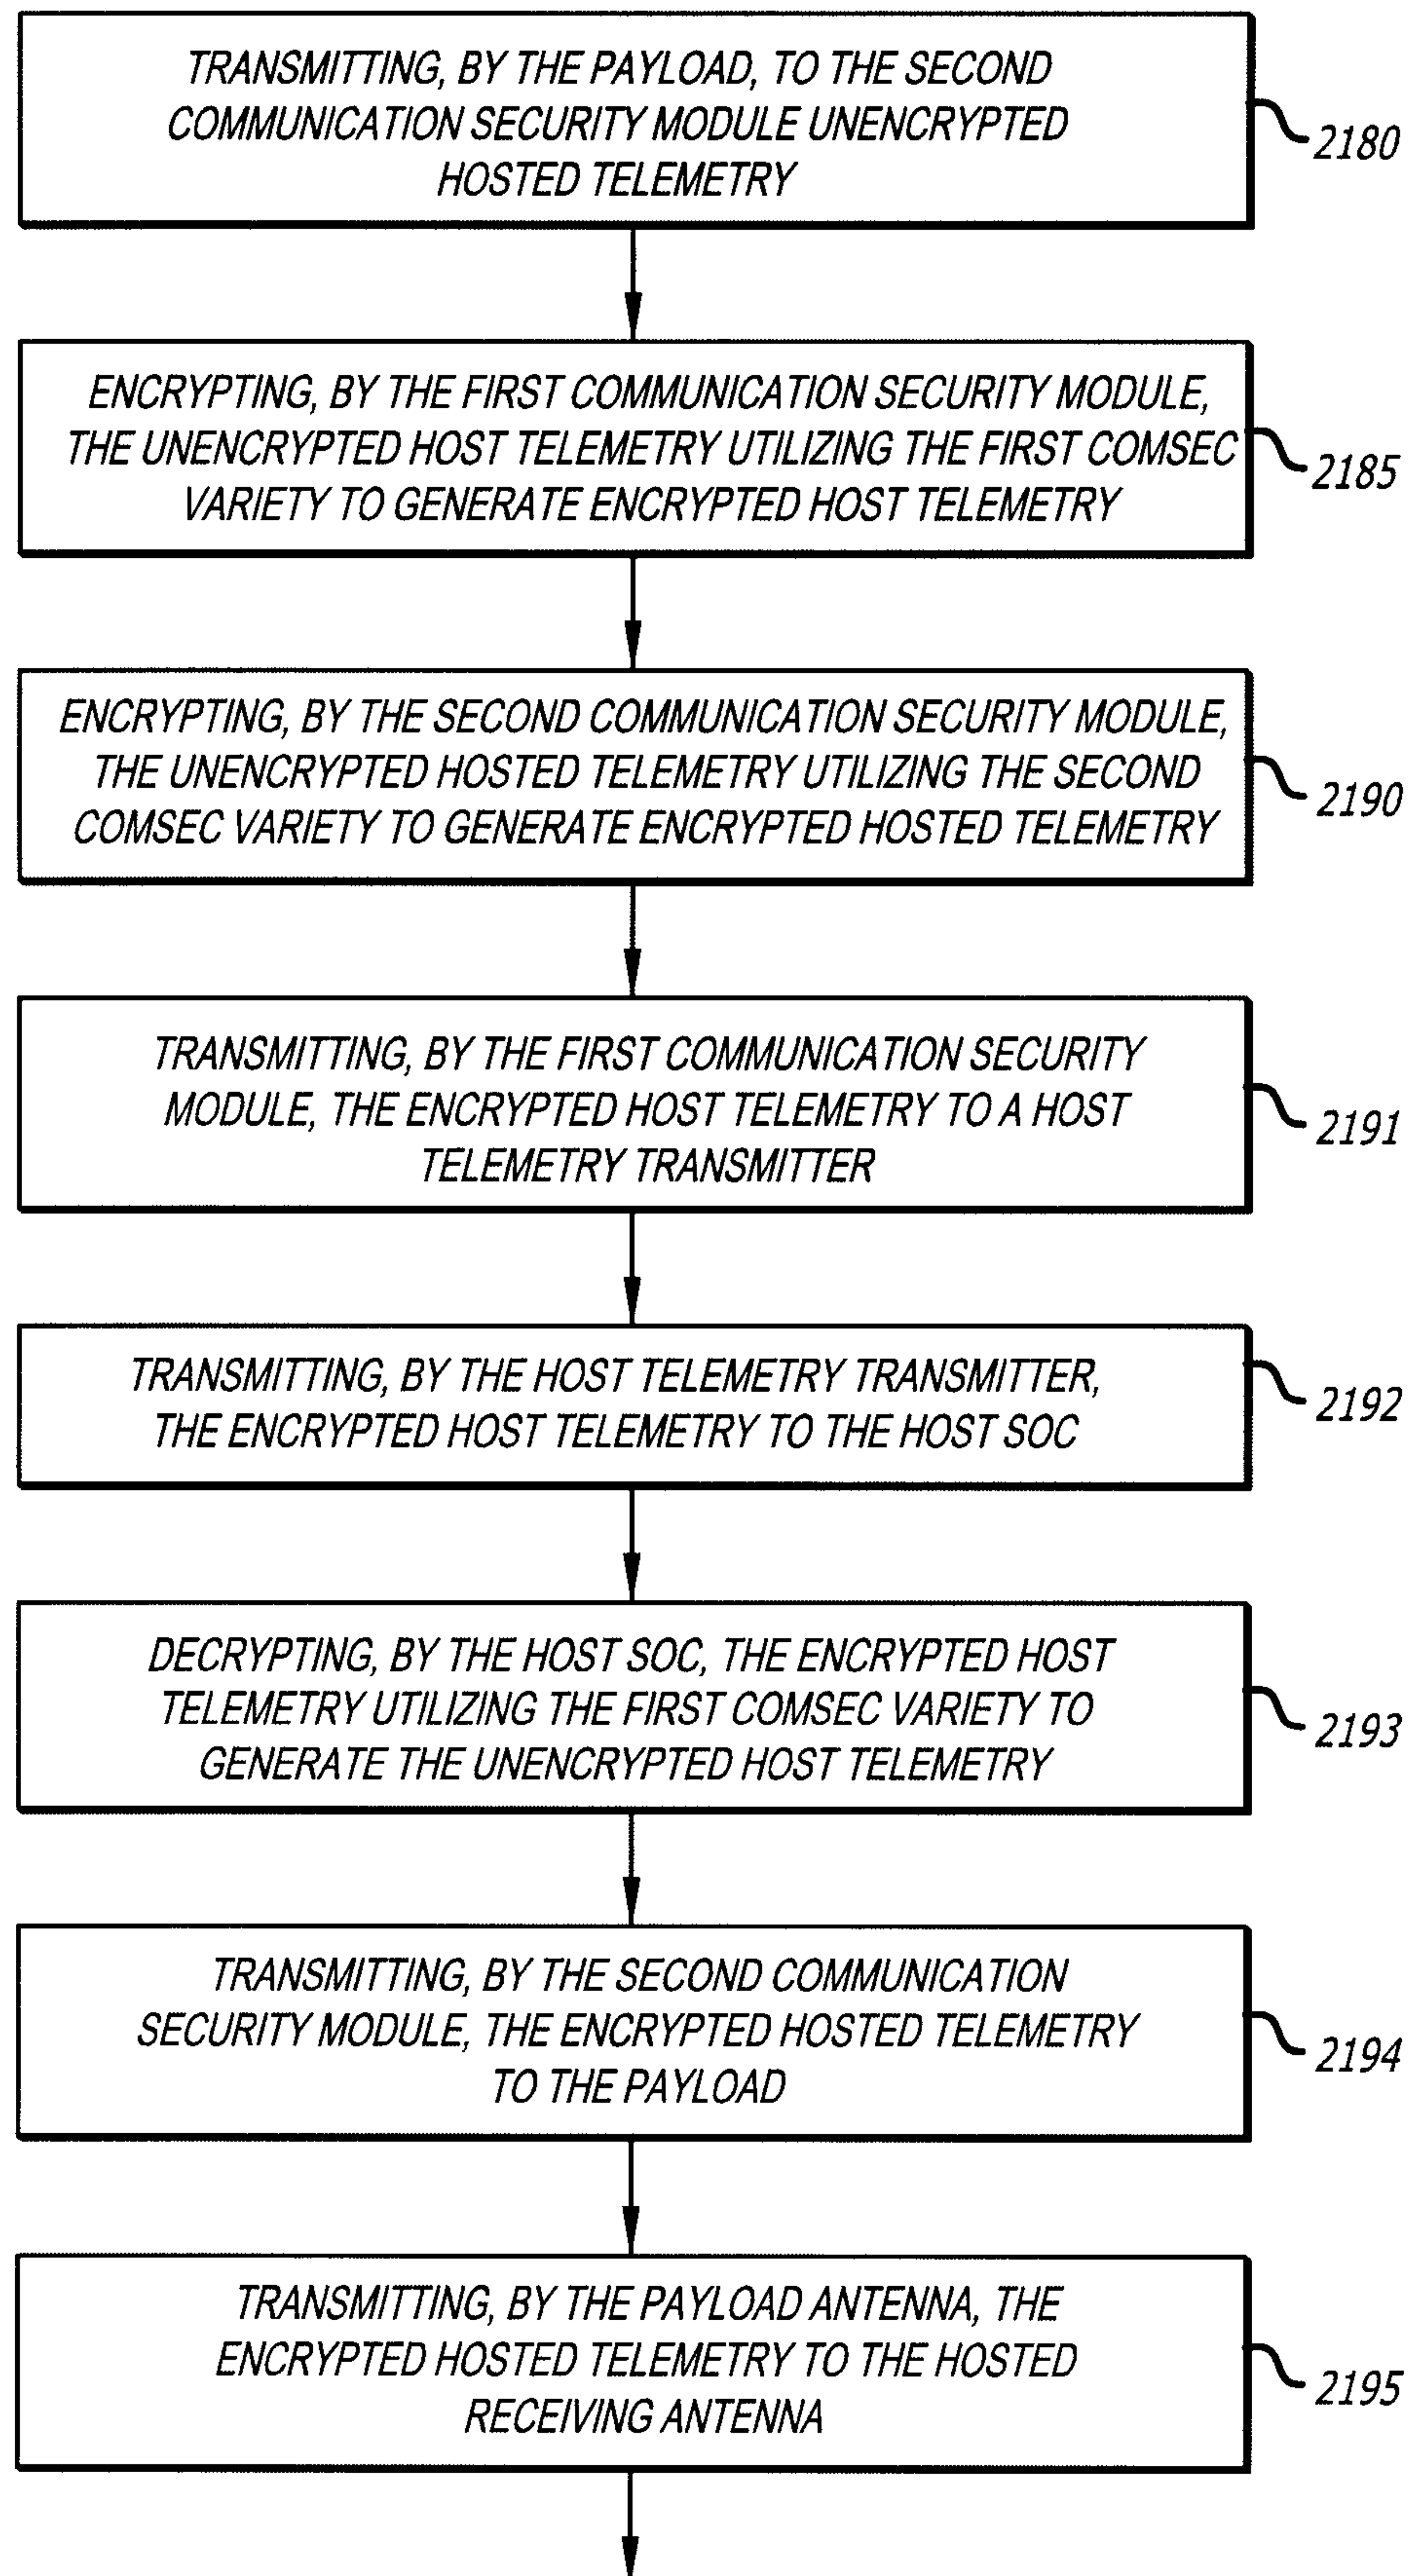


FIG. 21D

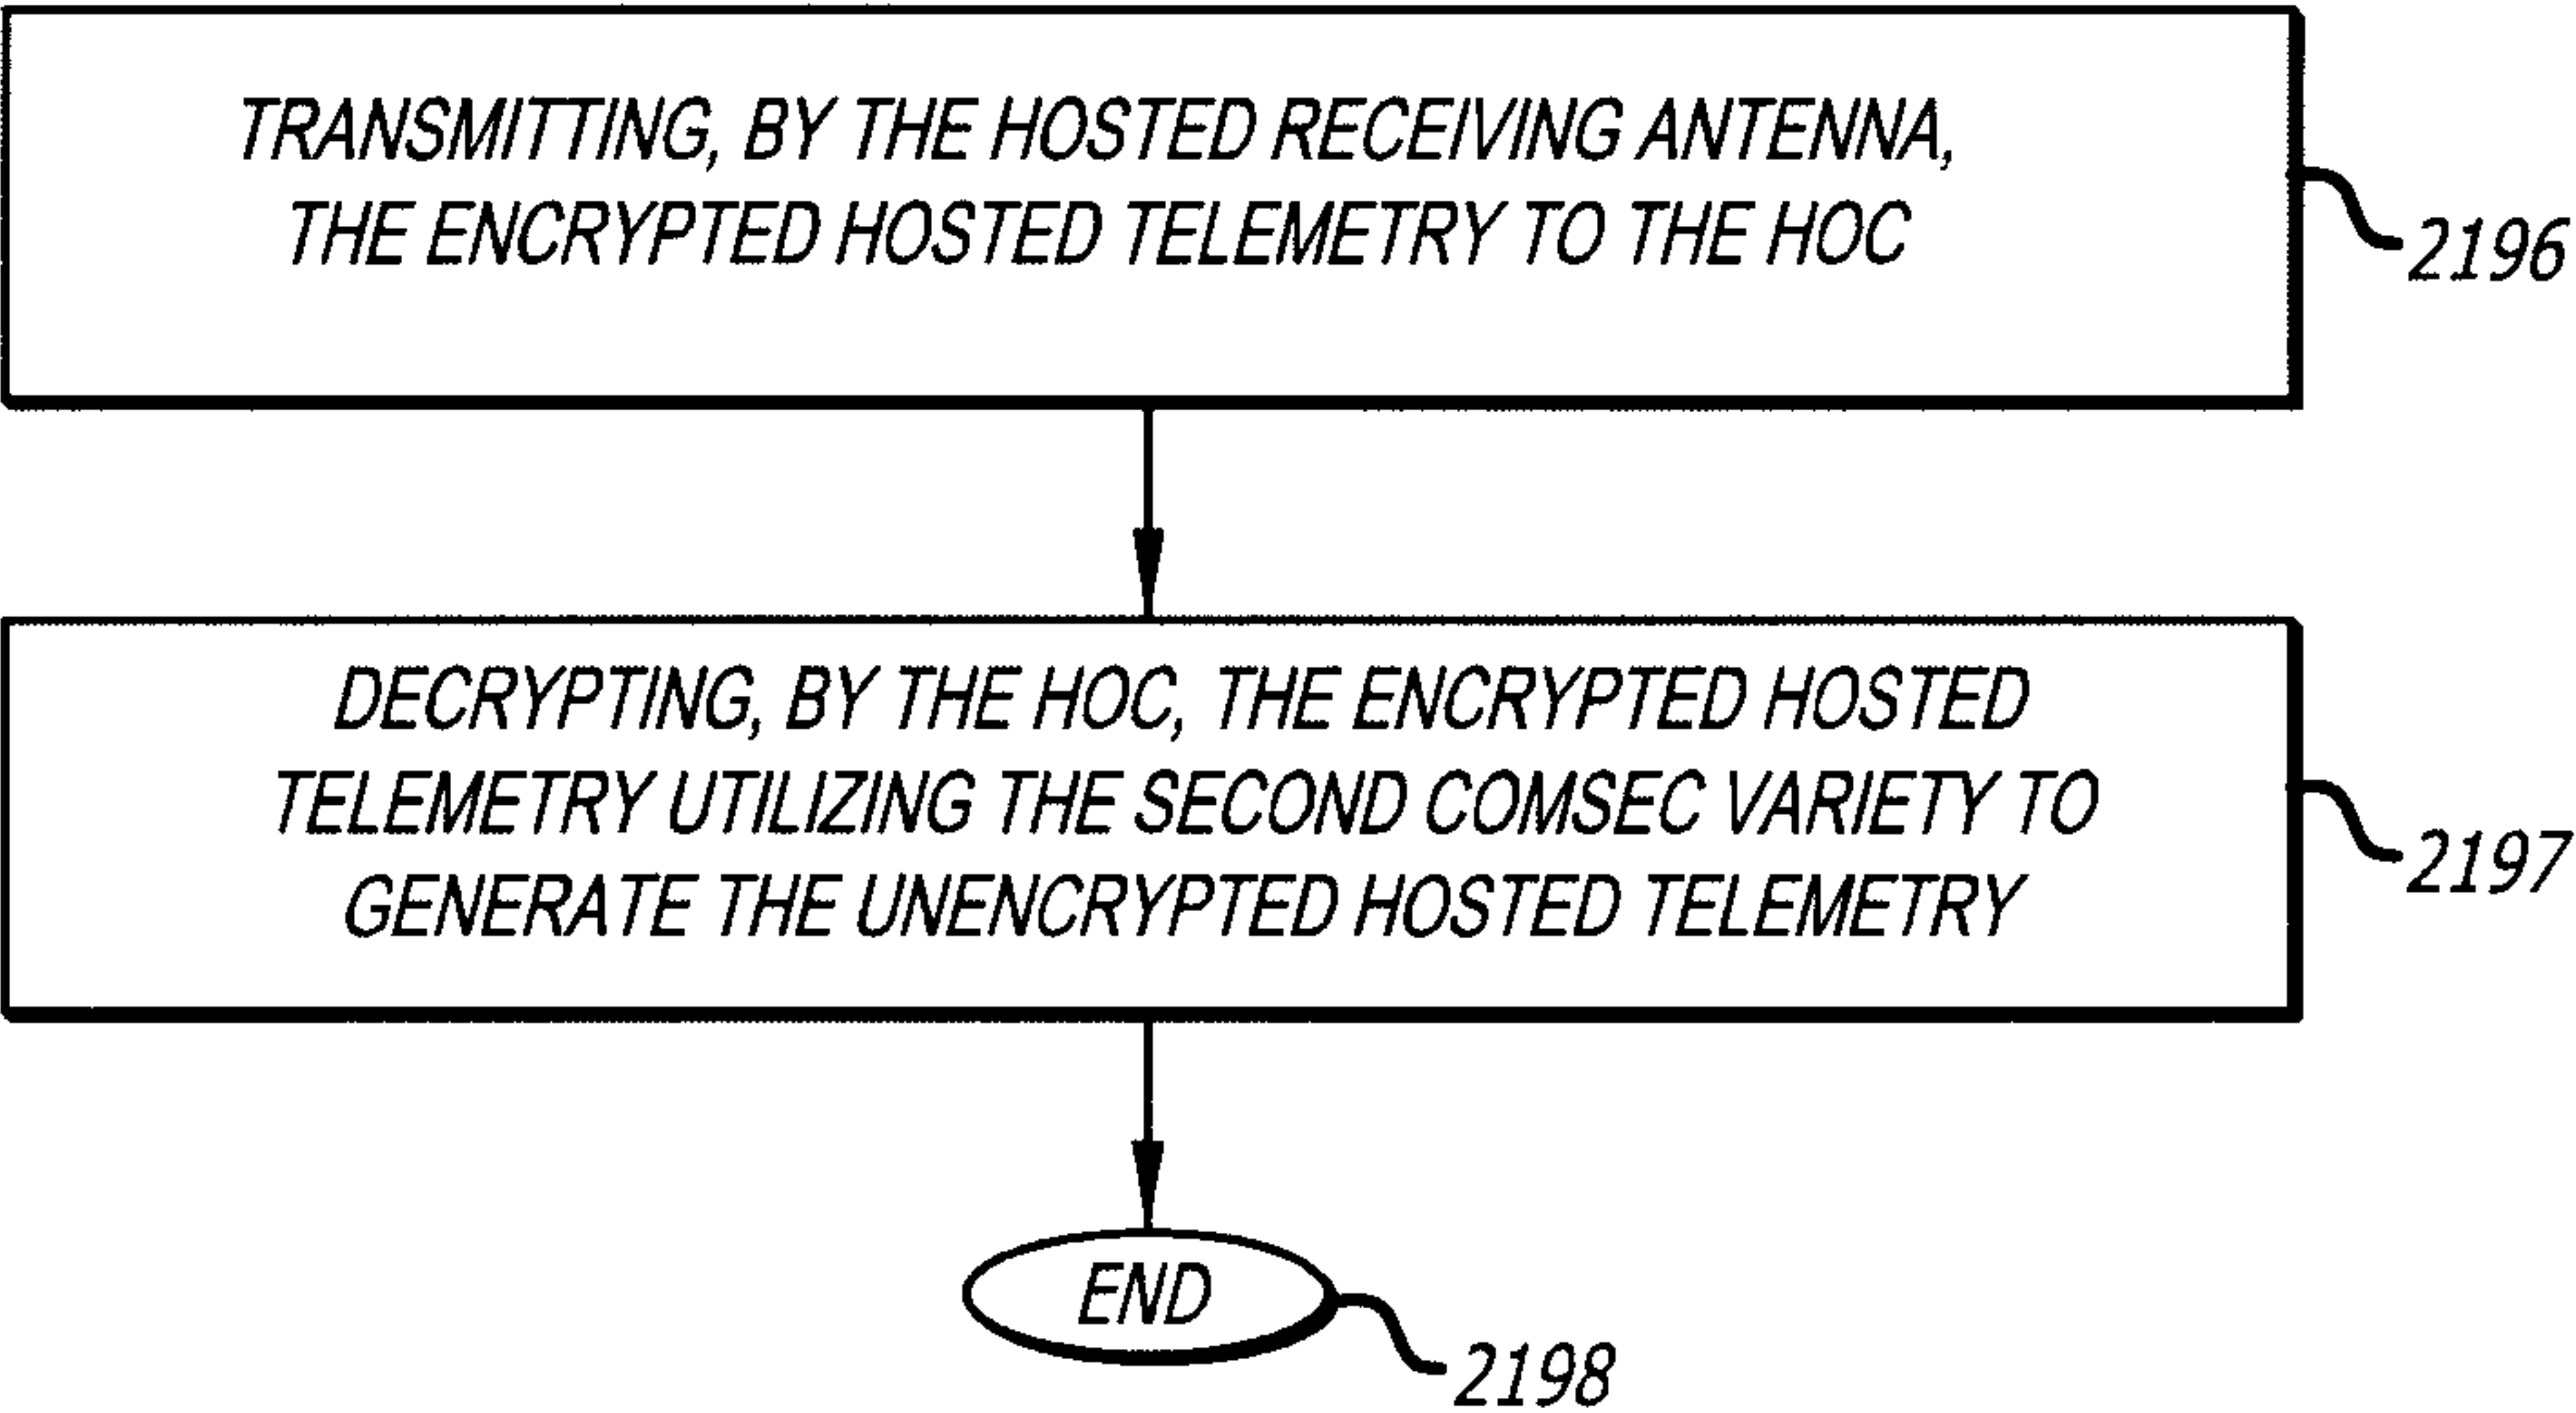


FIG. 21E

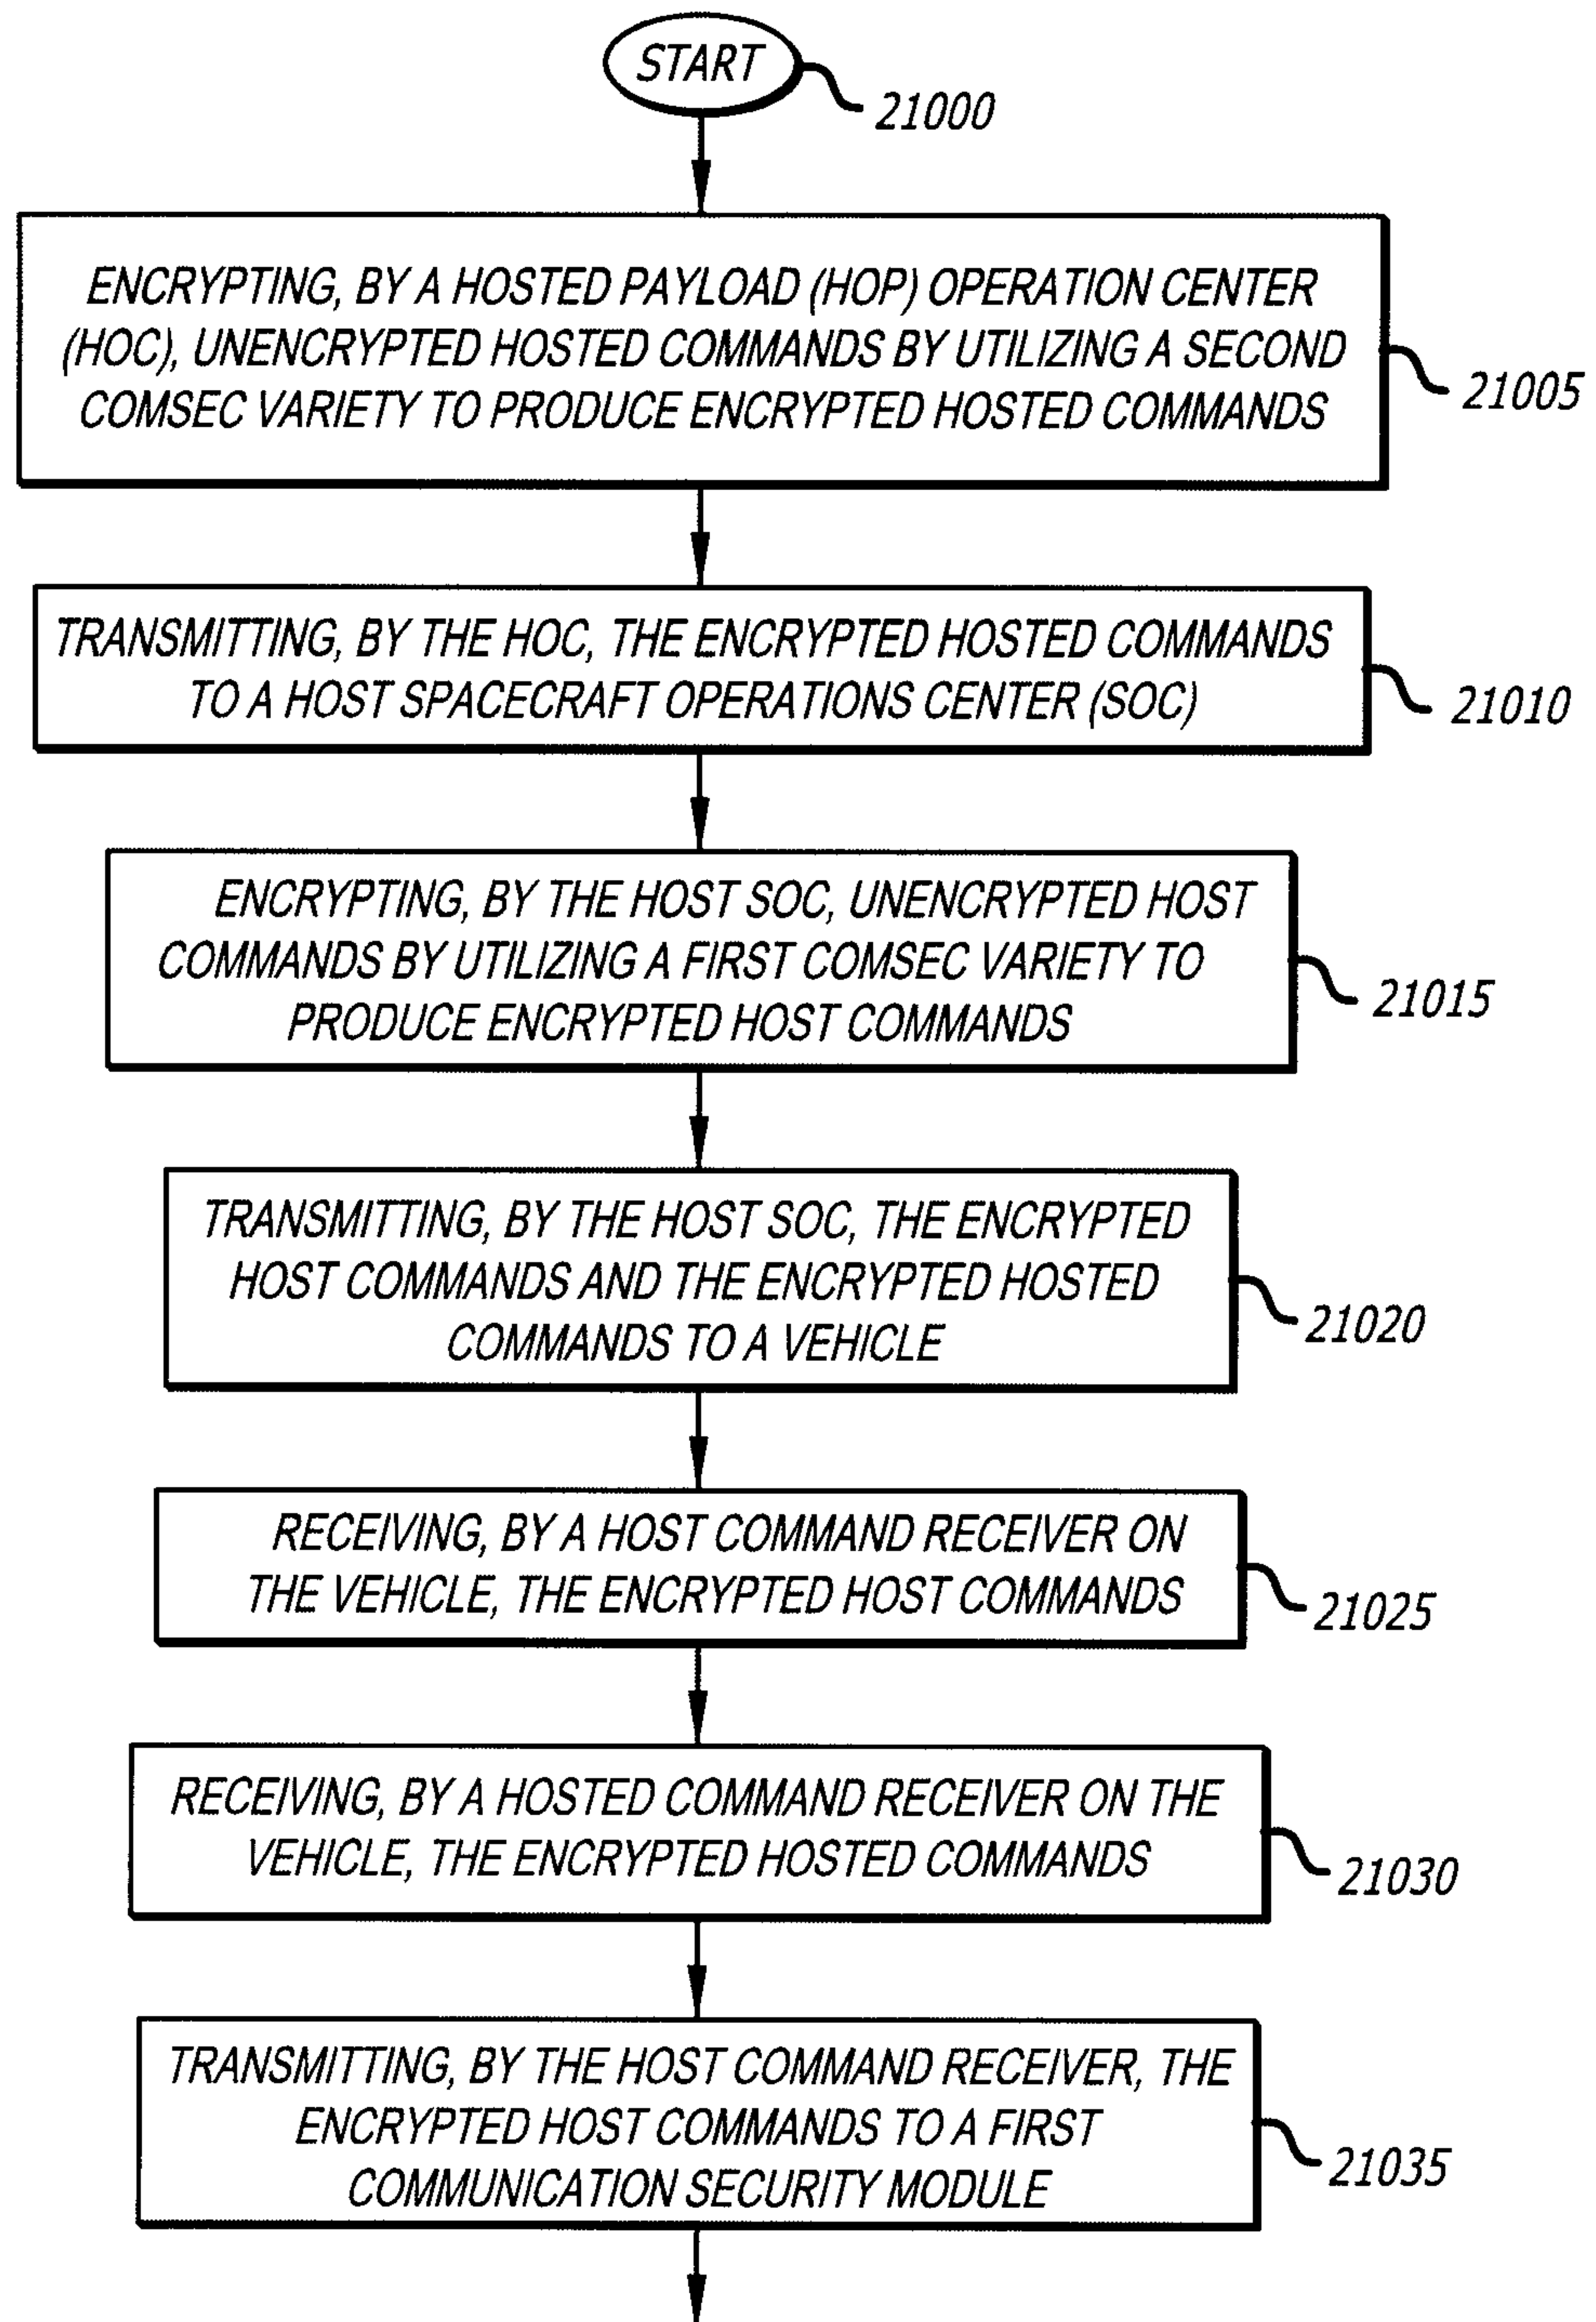


FIG. 21F

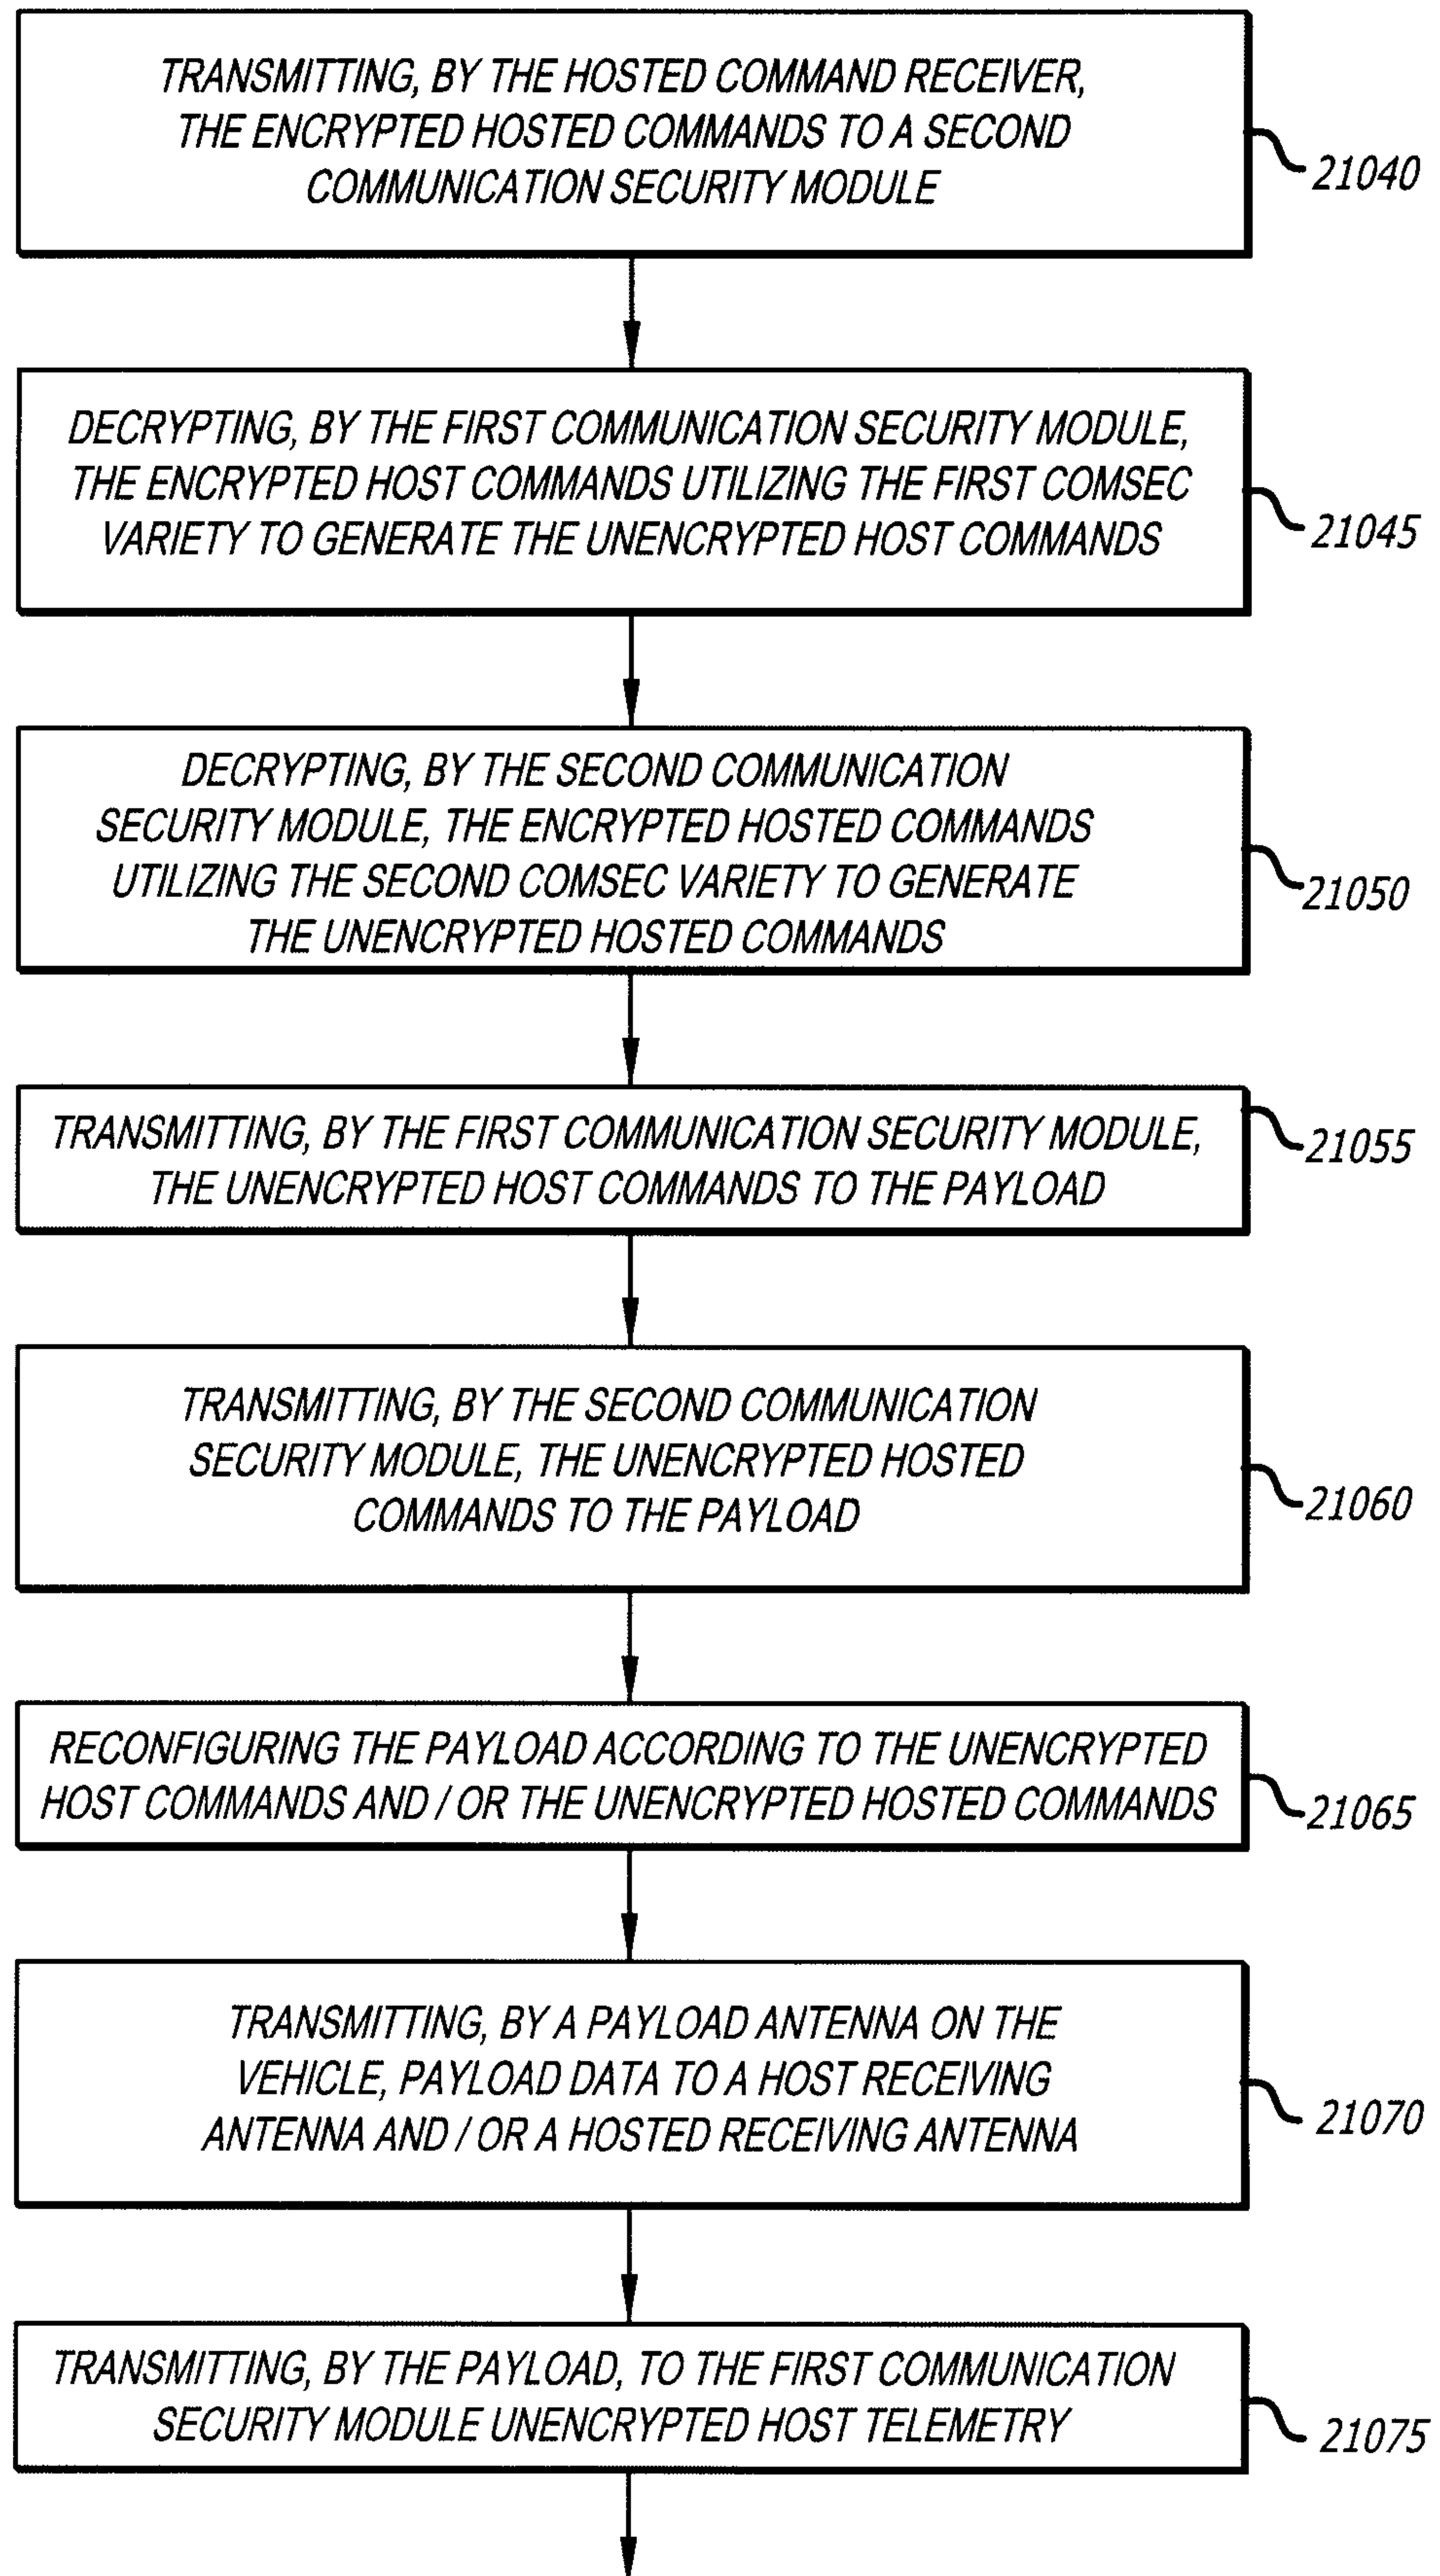


FIG. 21G

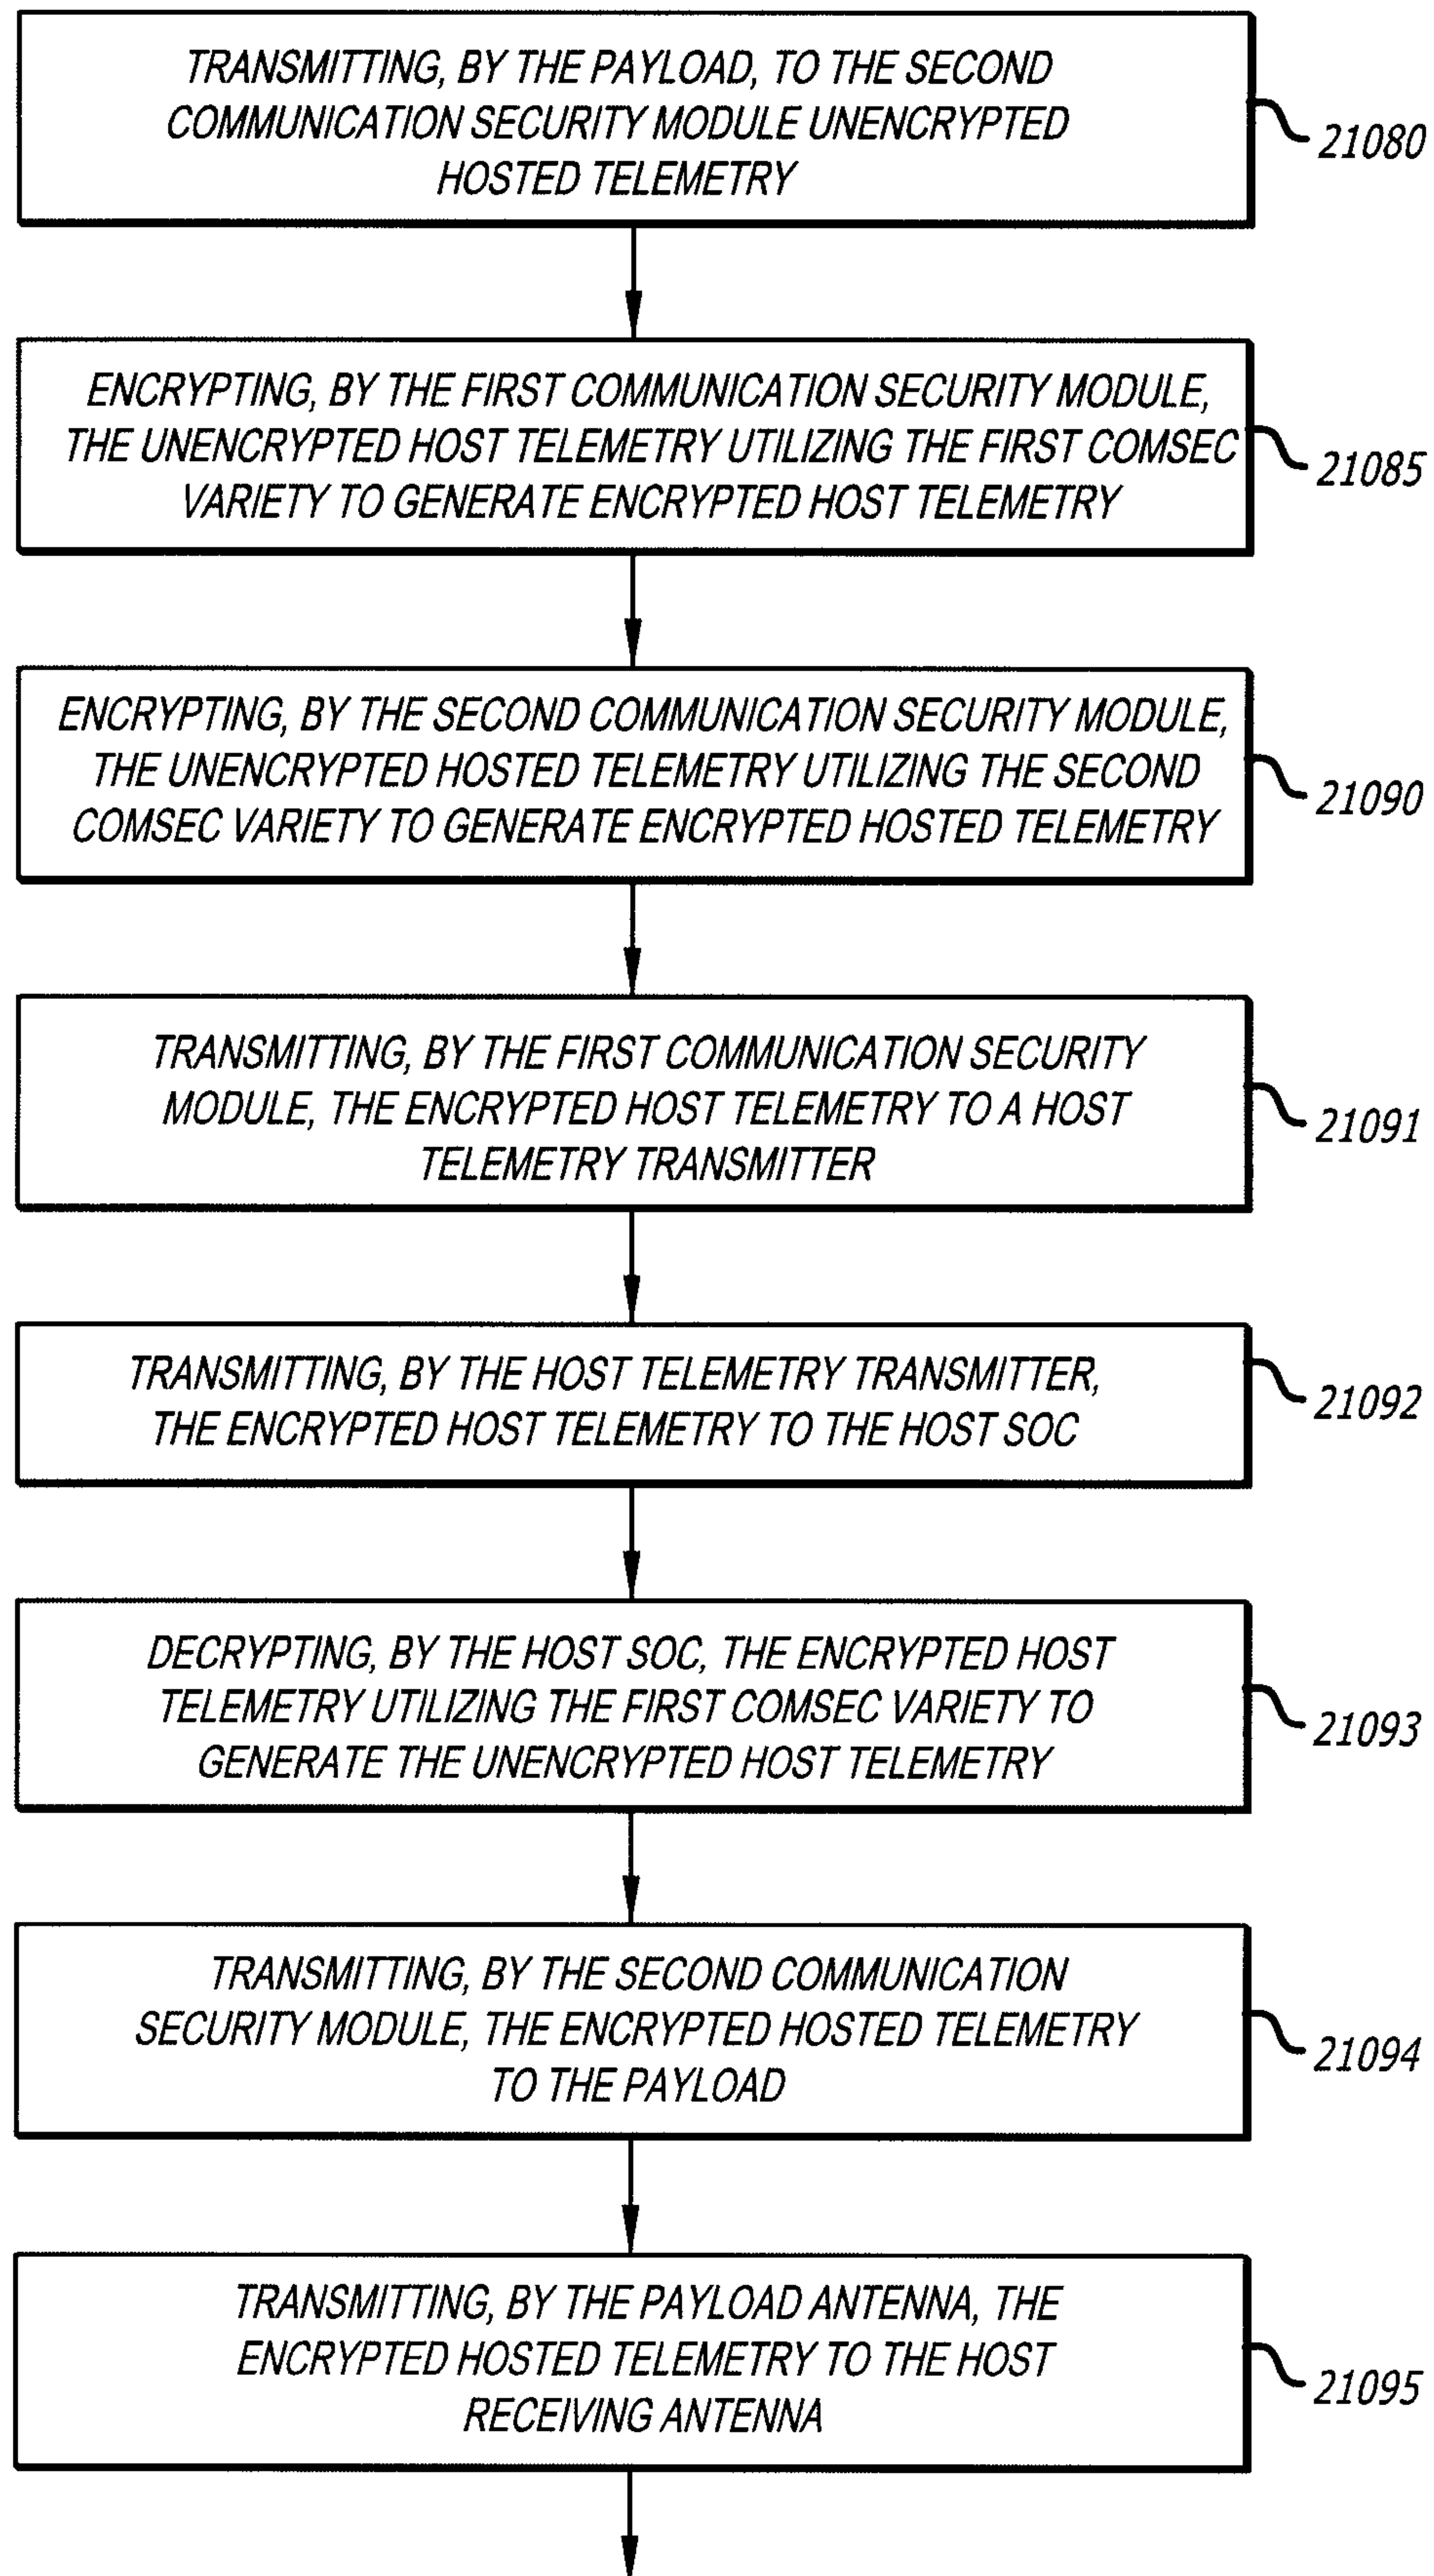


FIG. 21H

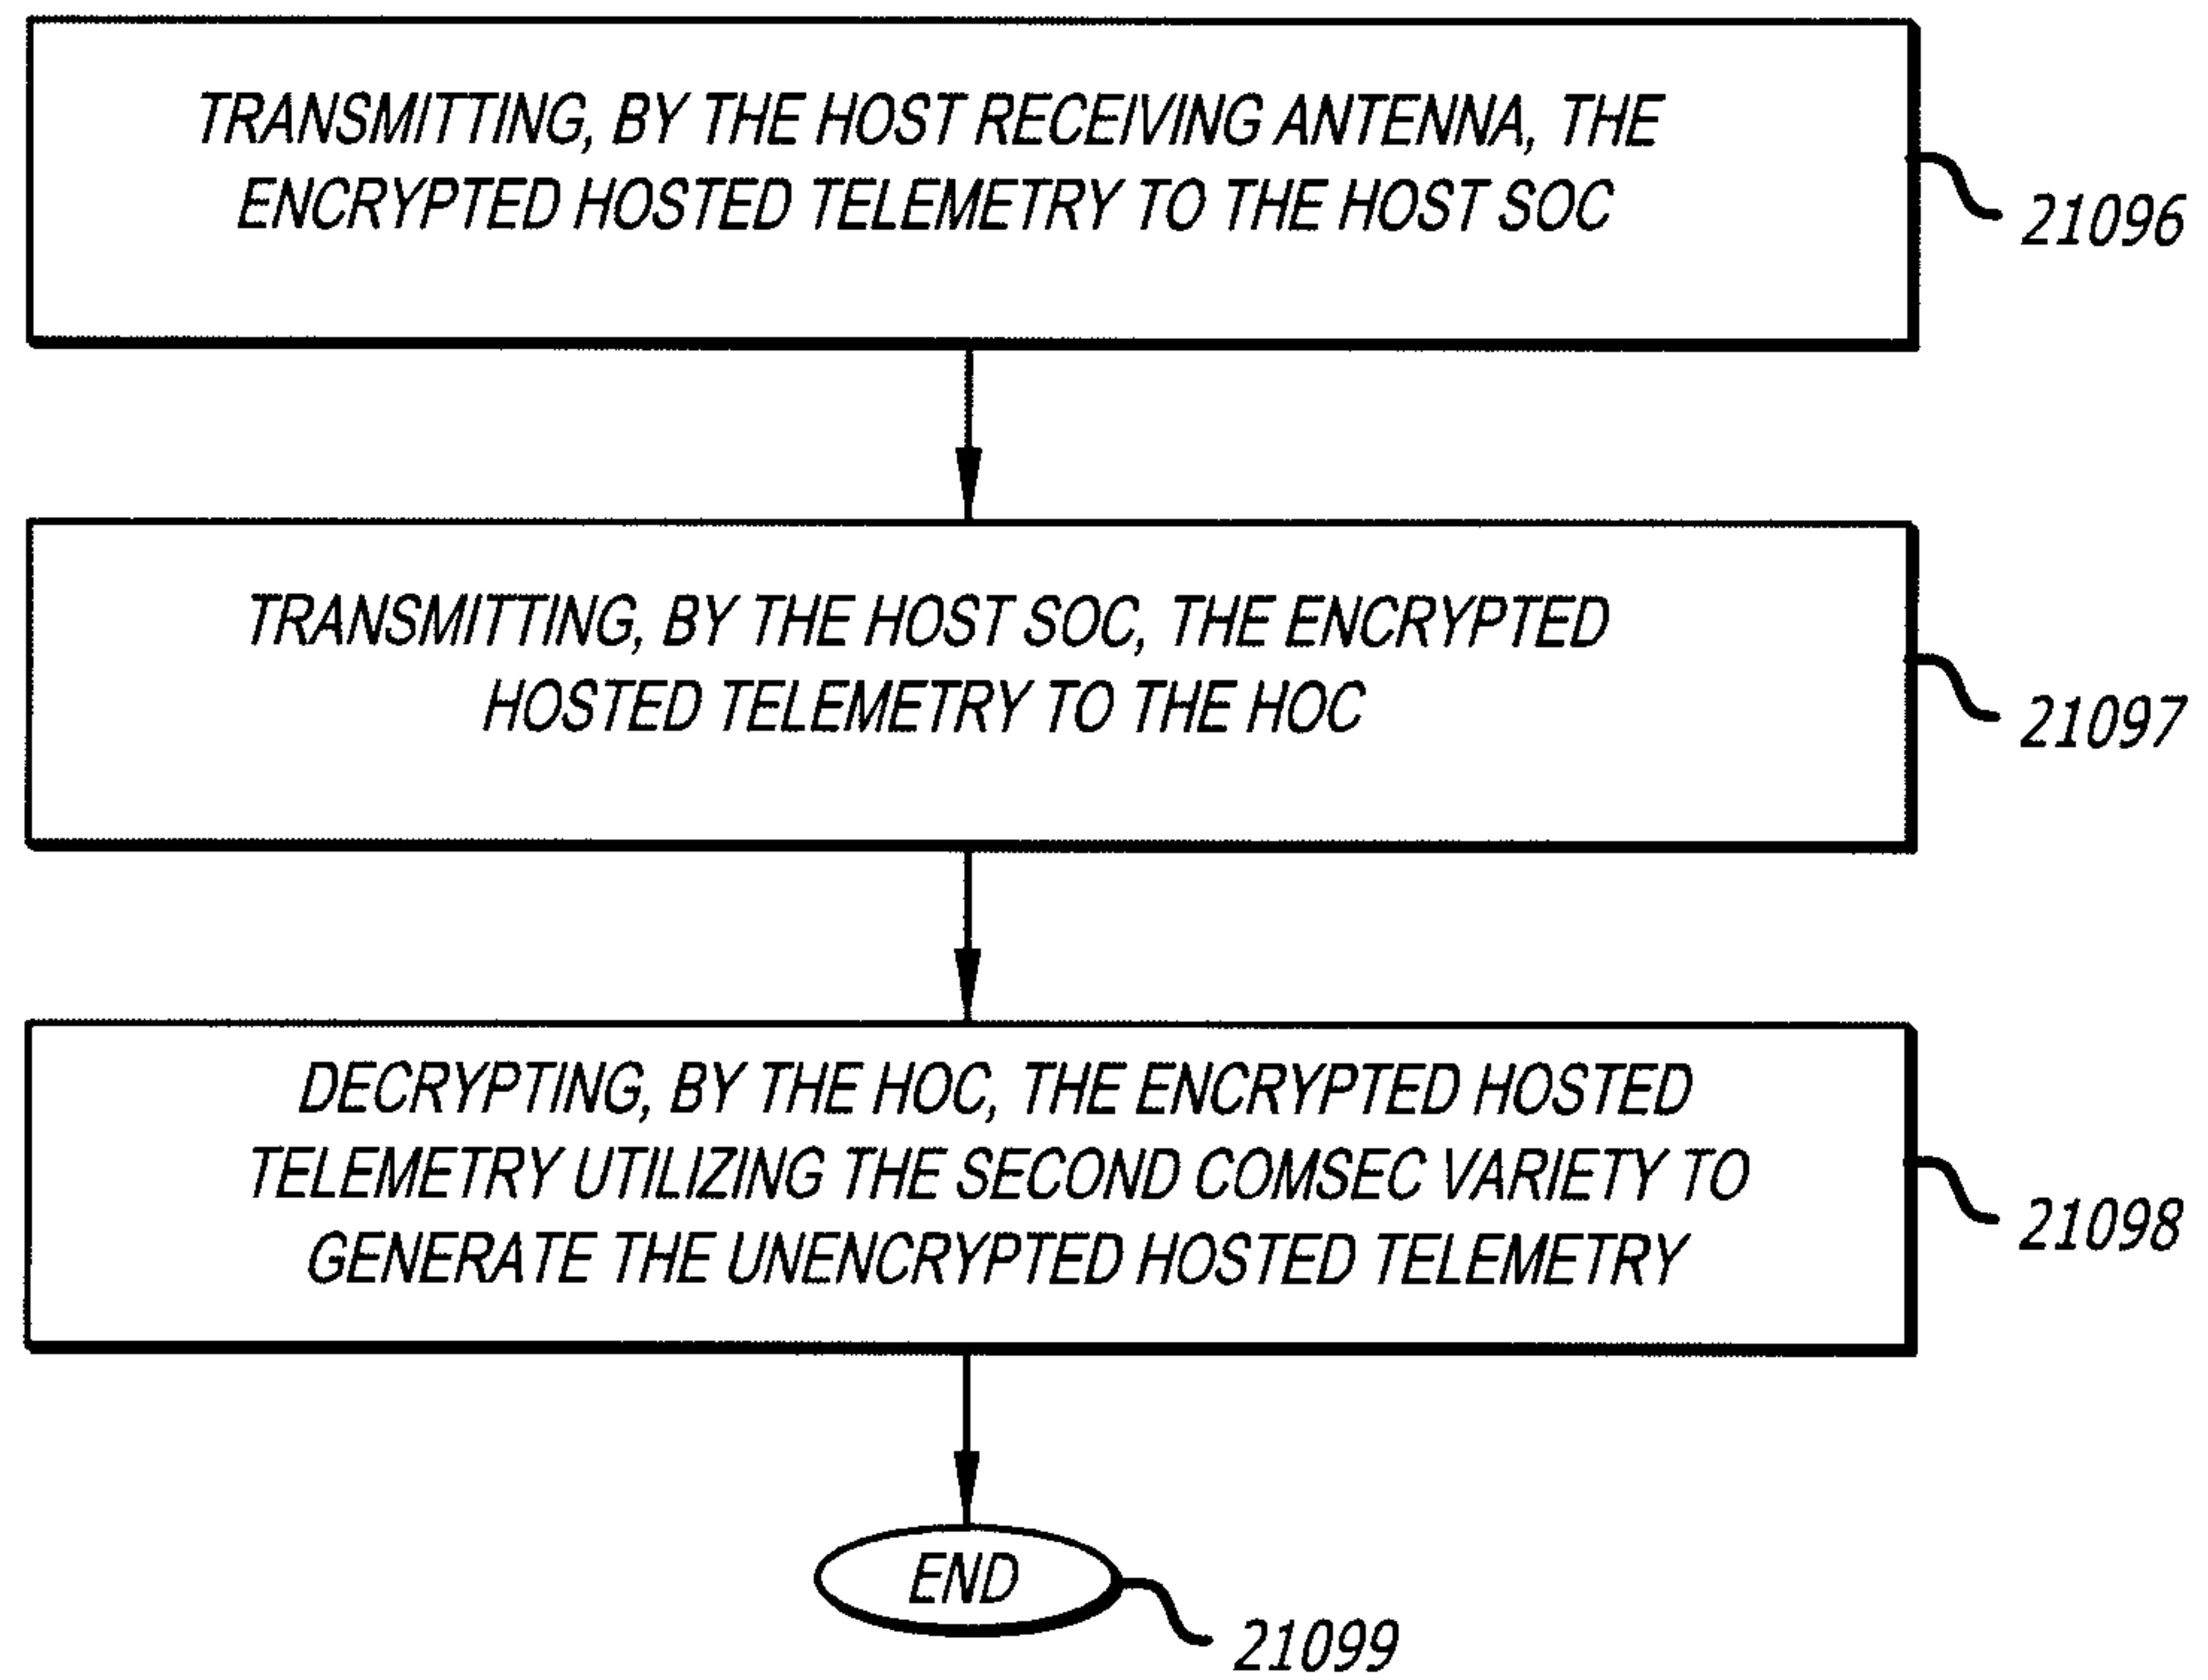


FIG. 23A

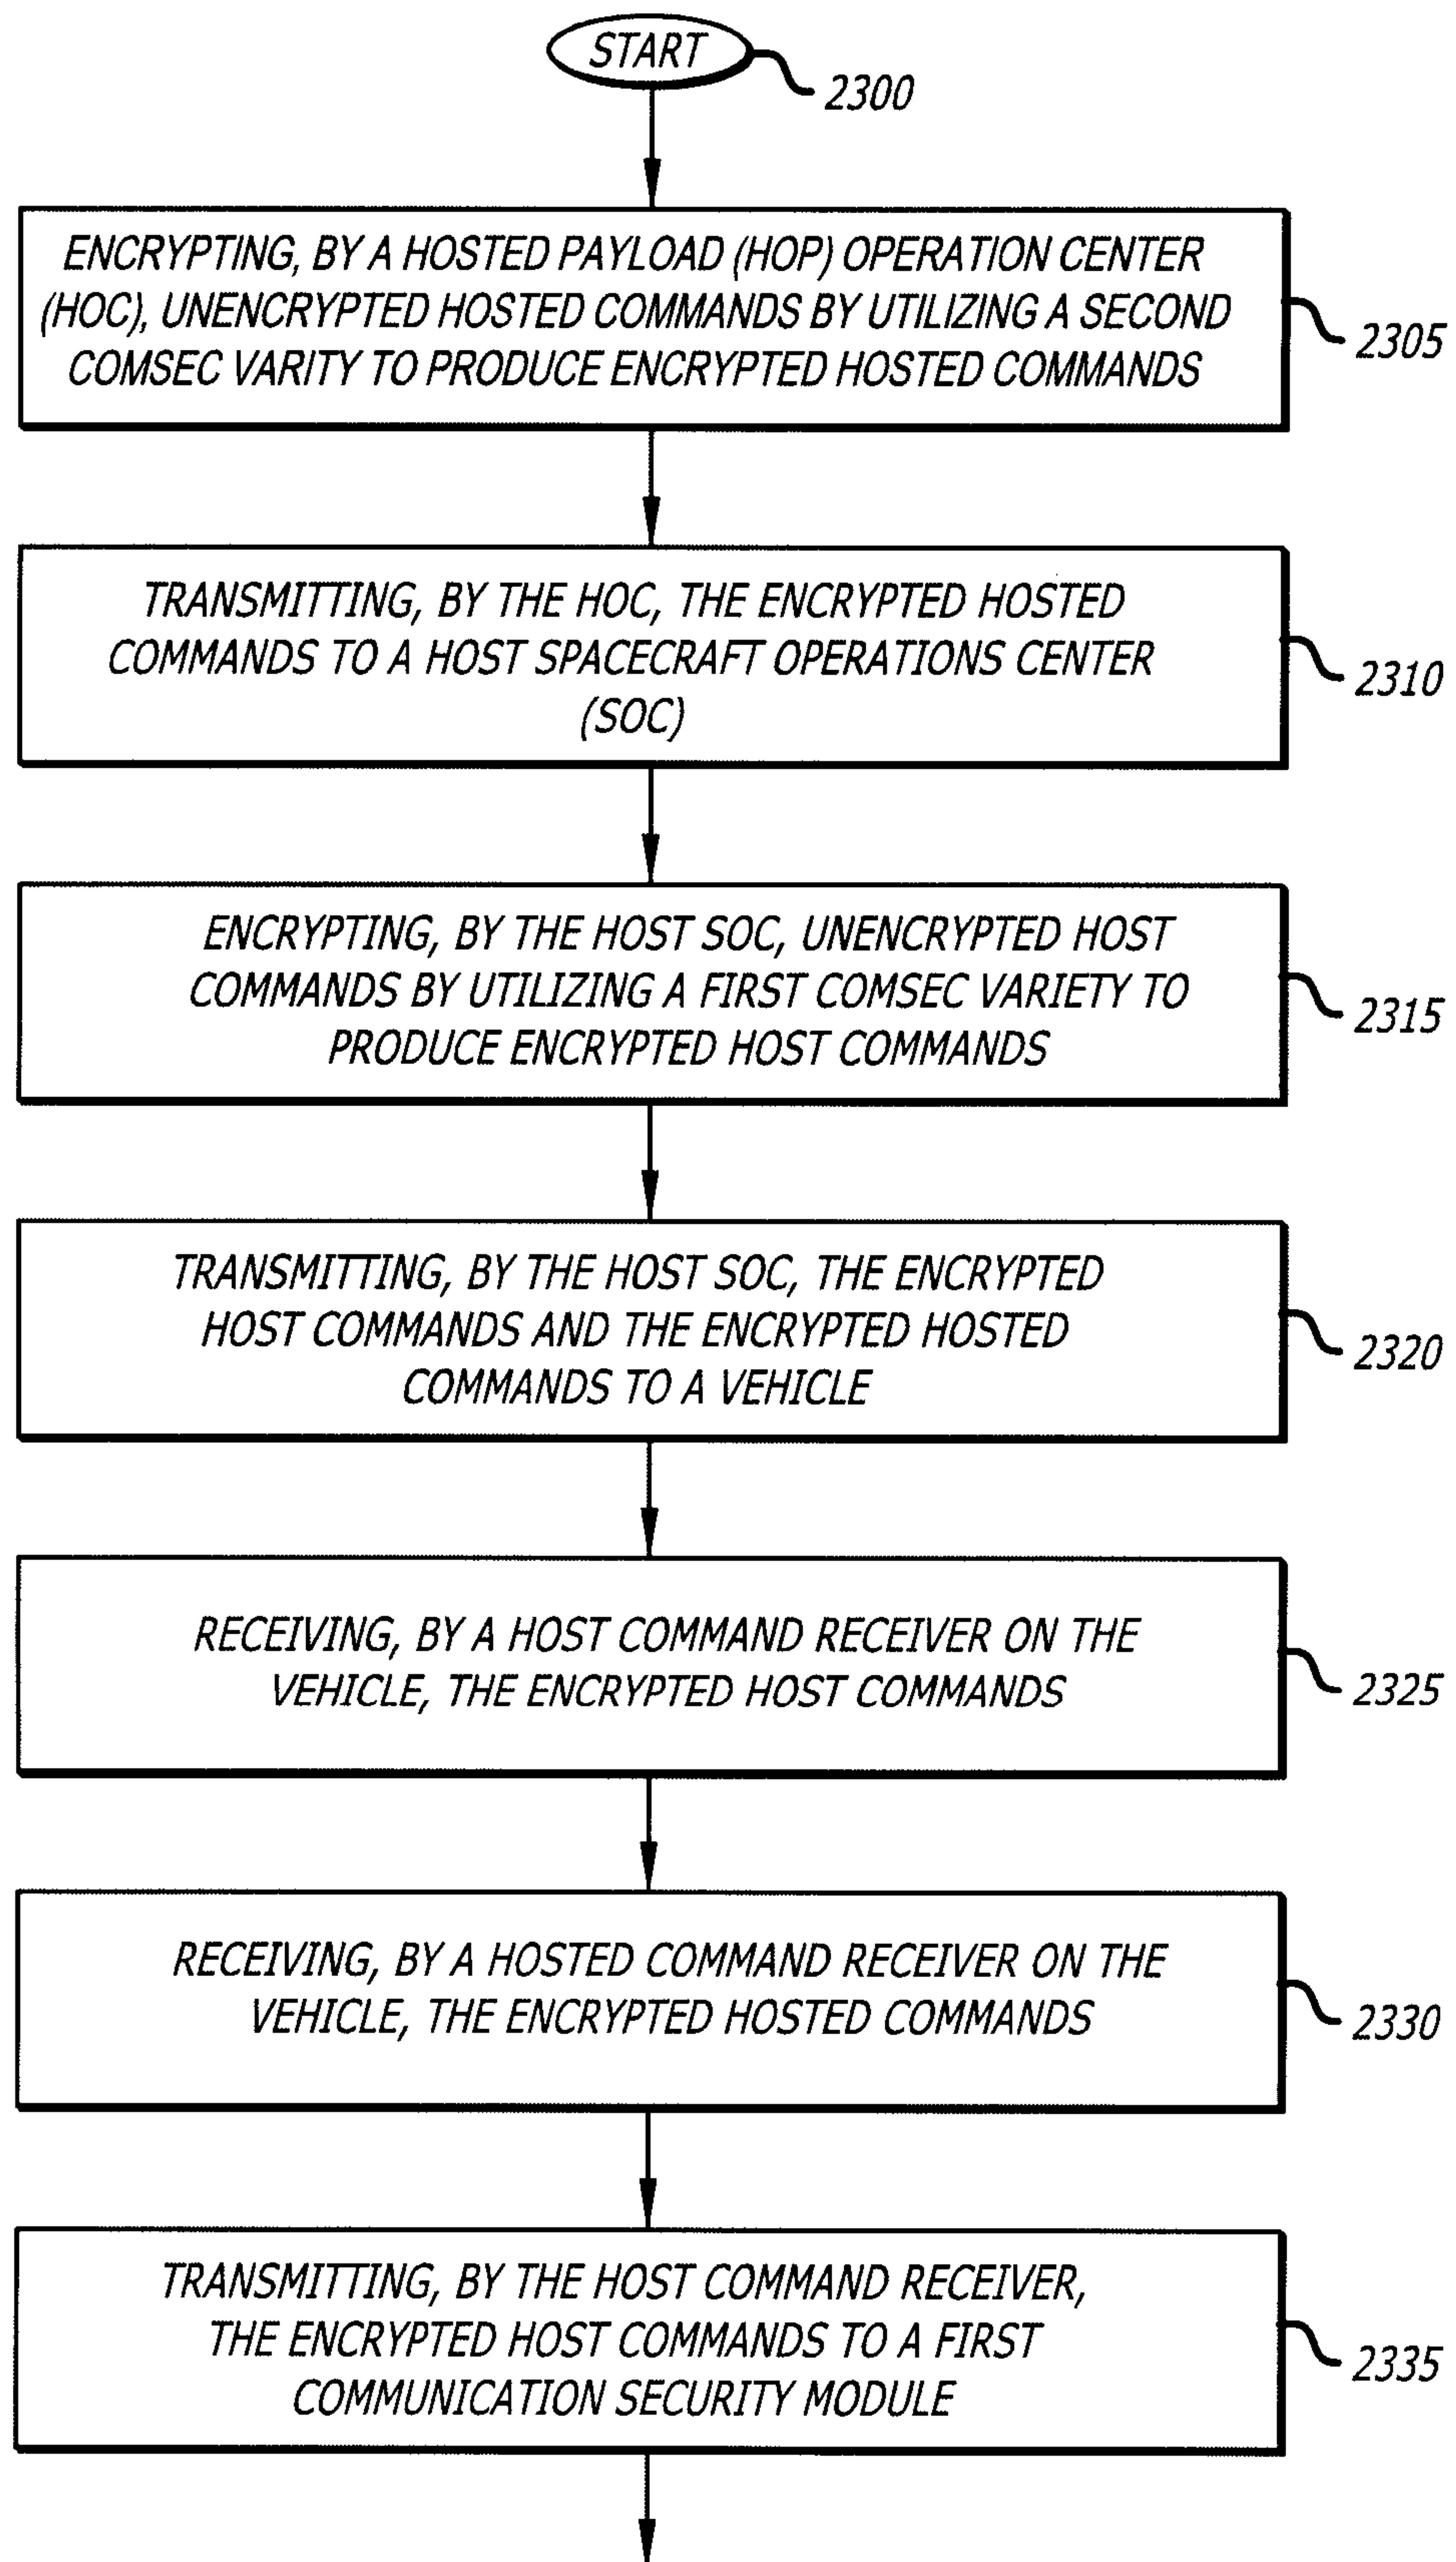


FIG. 23B

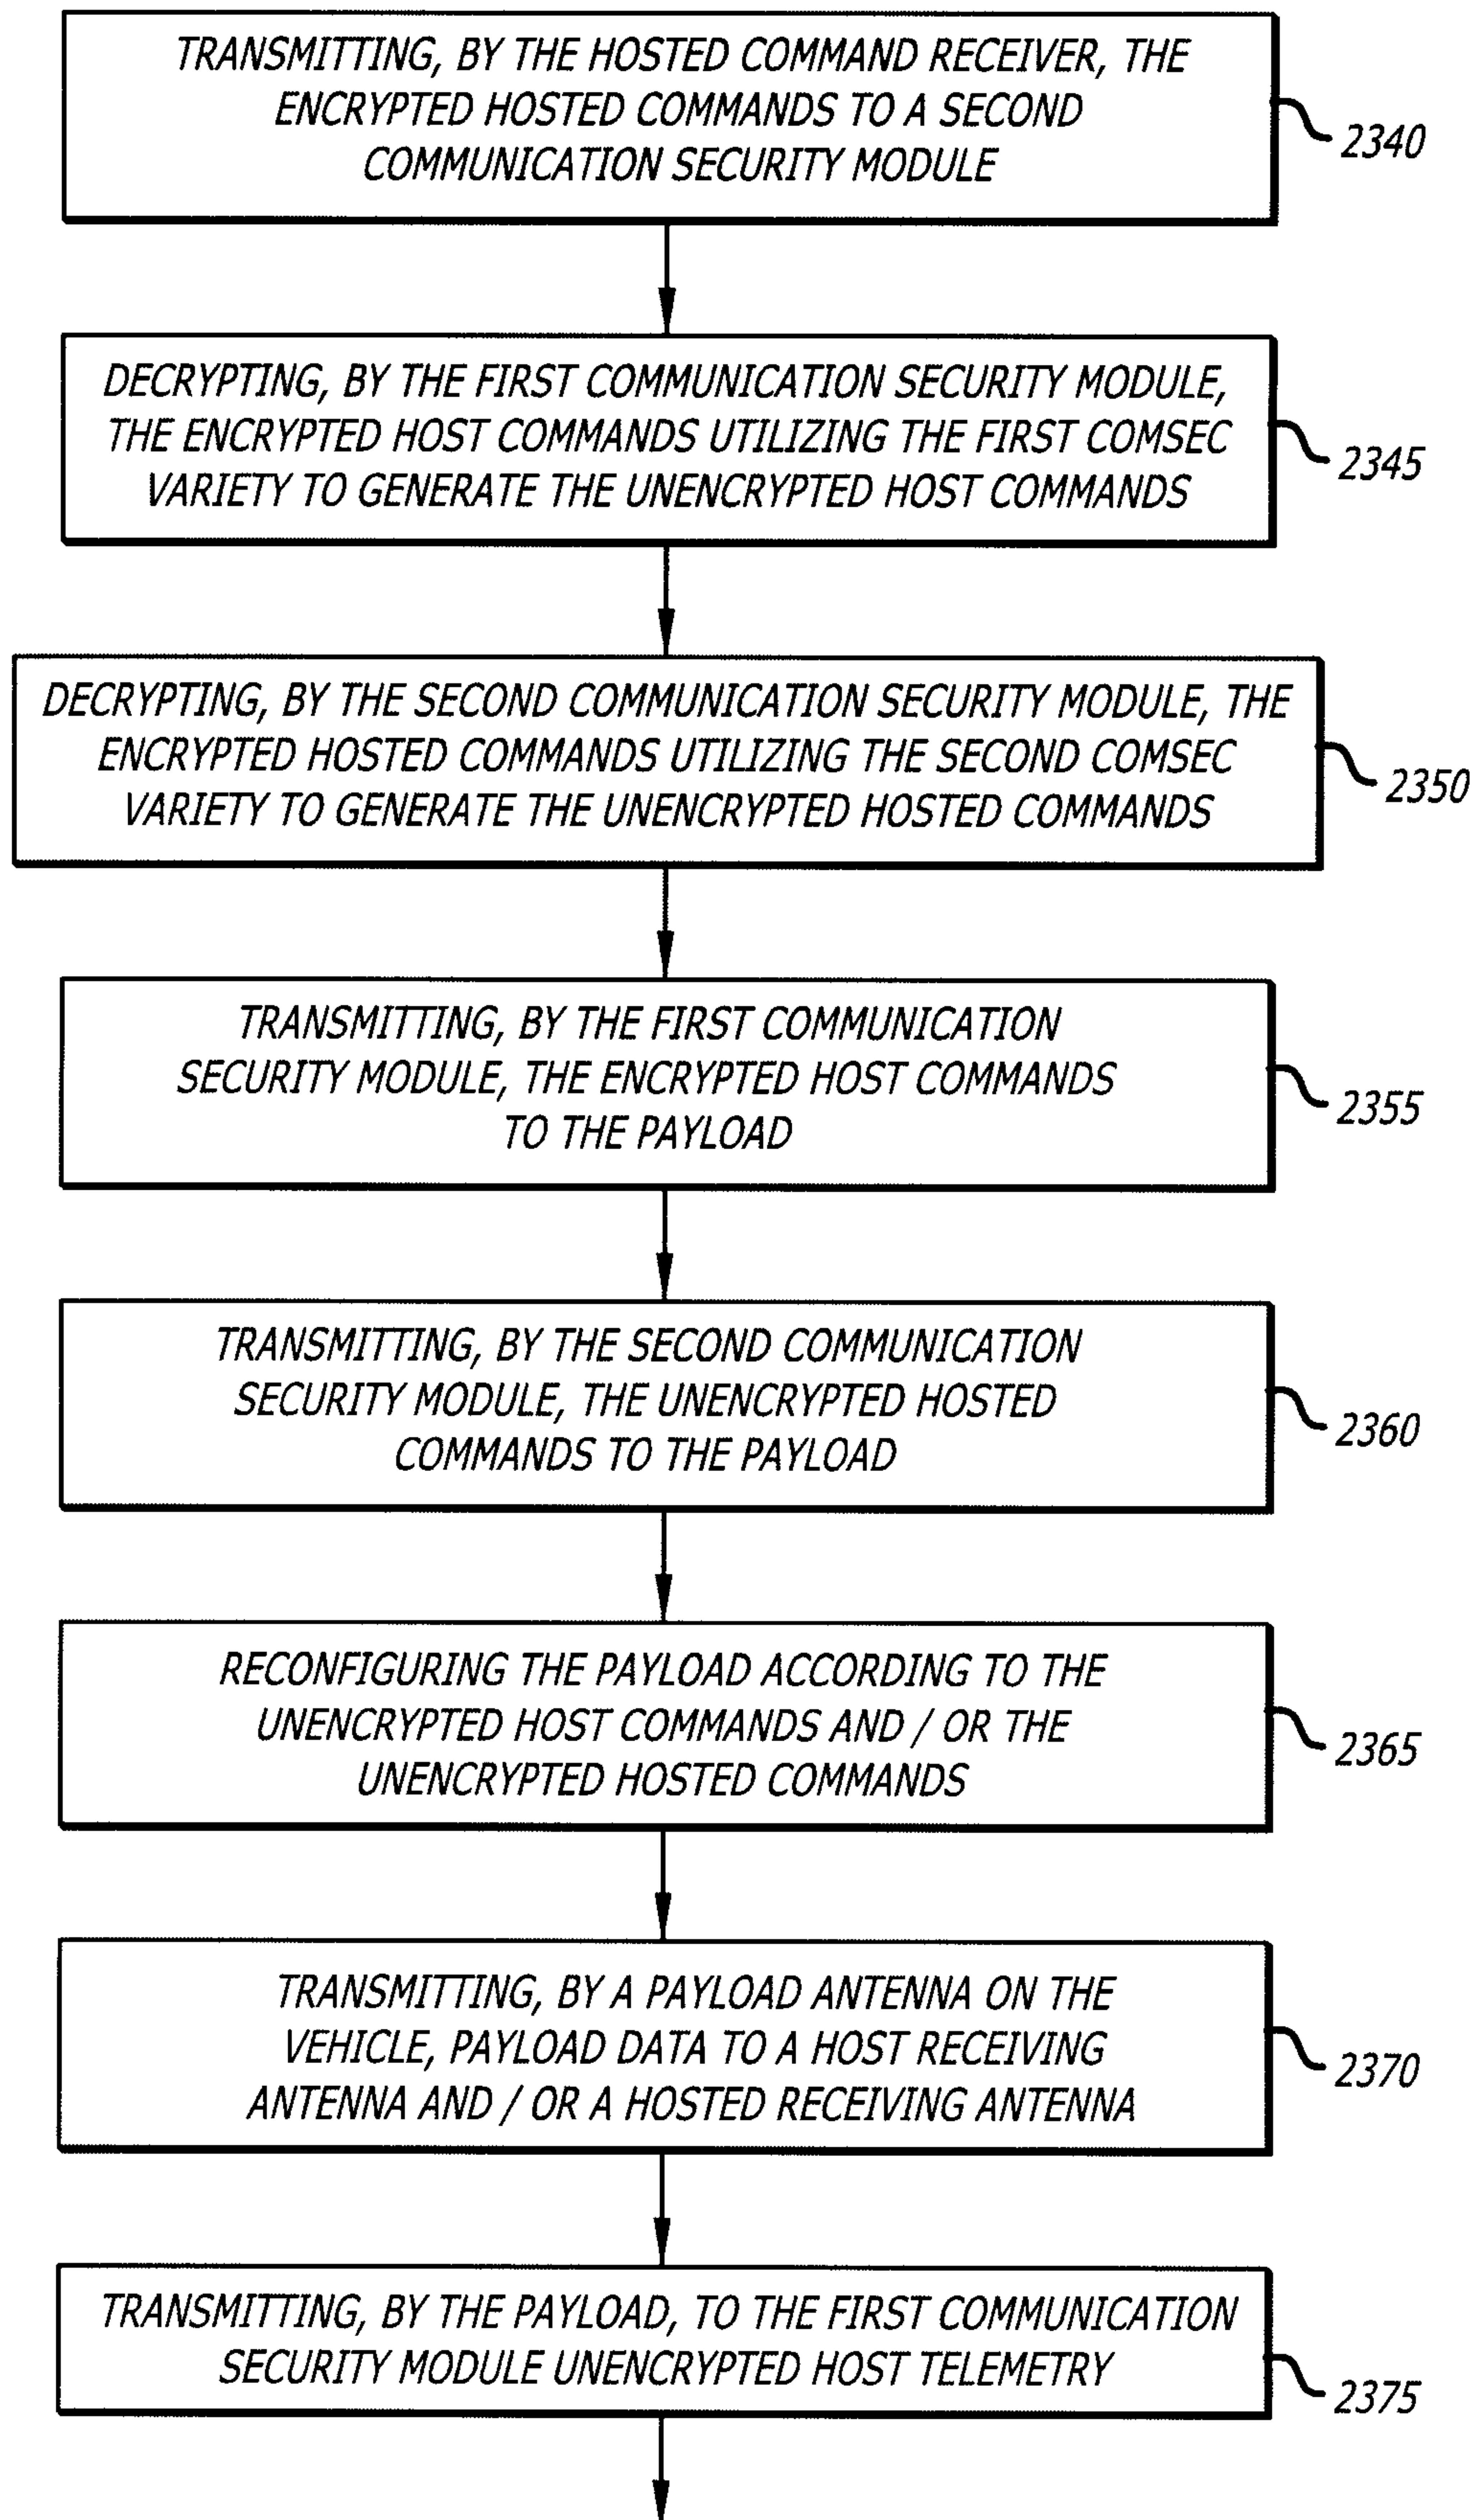


FIG. 23C

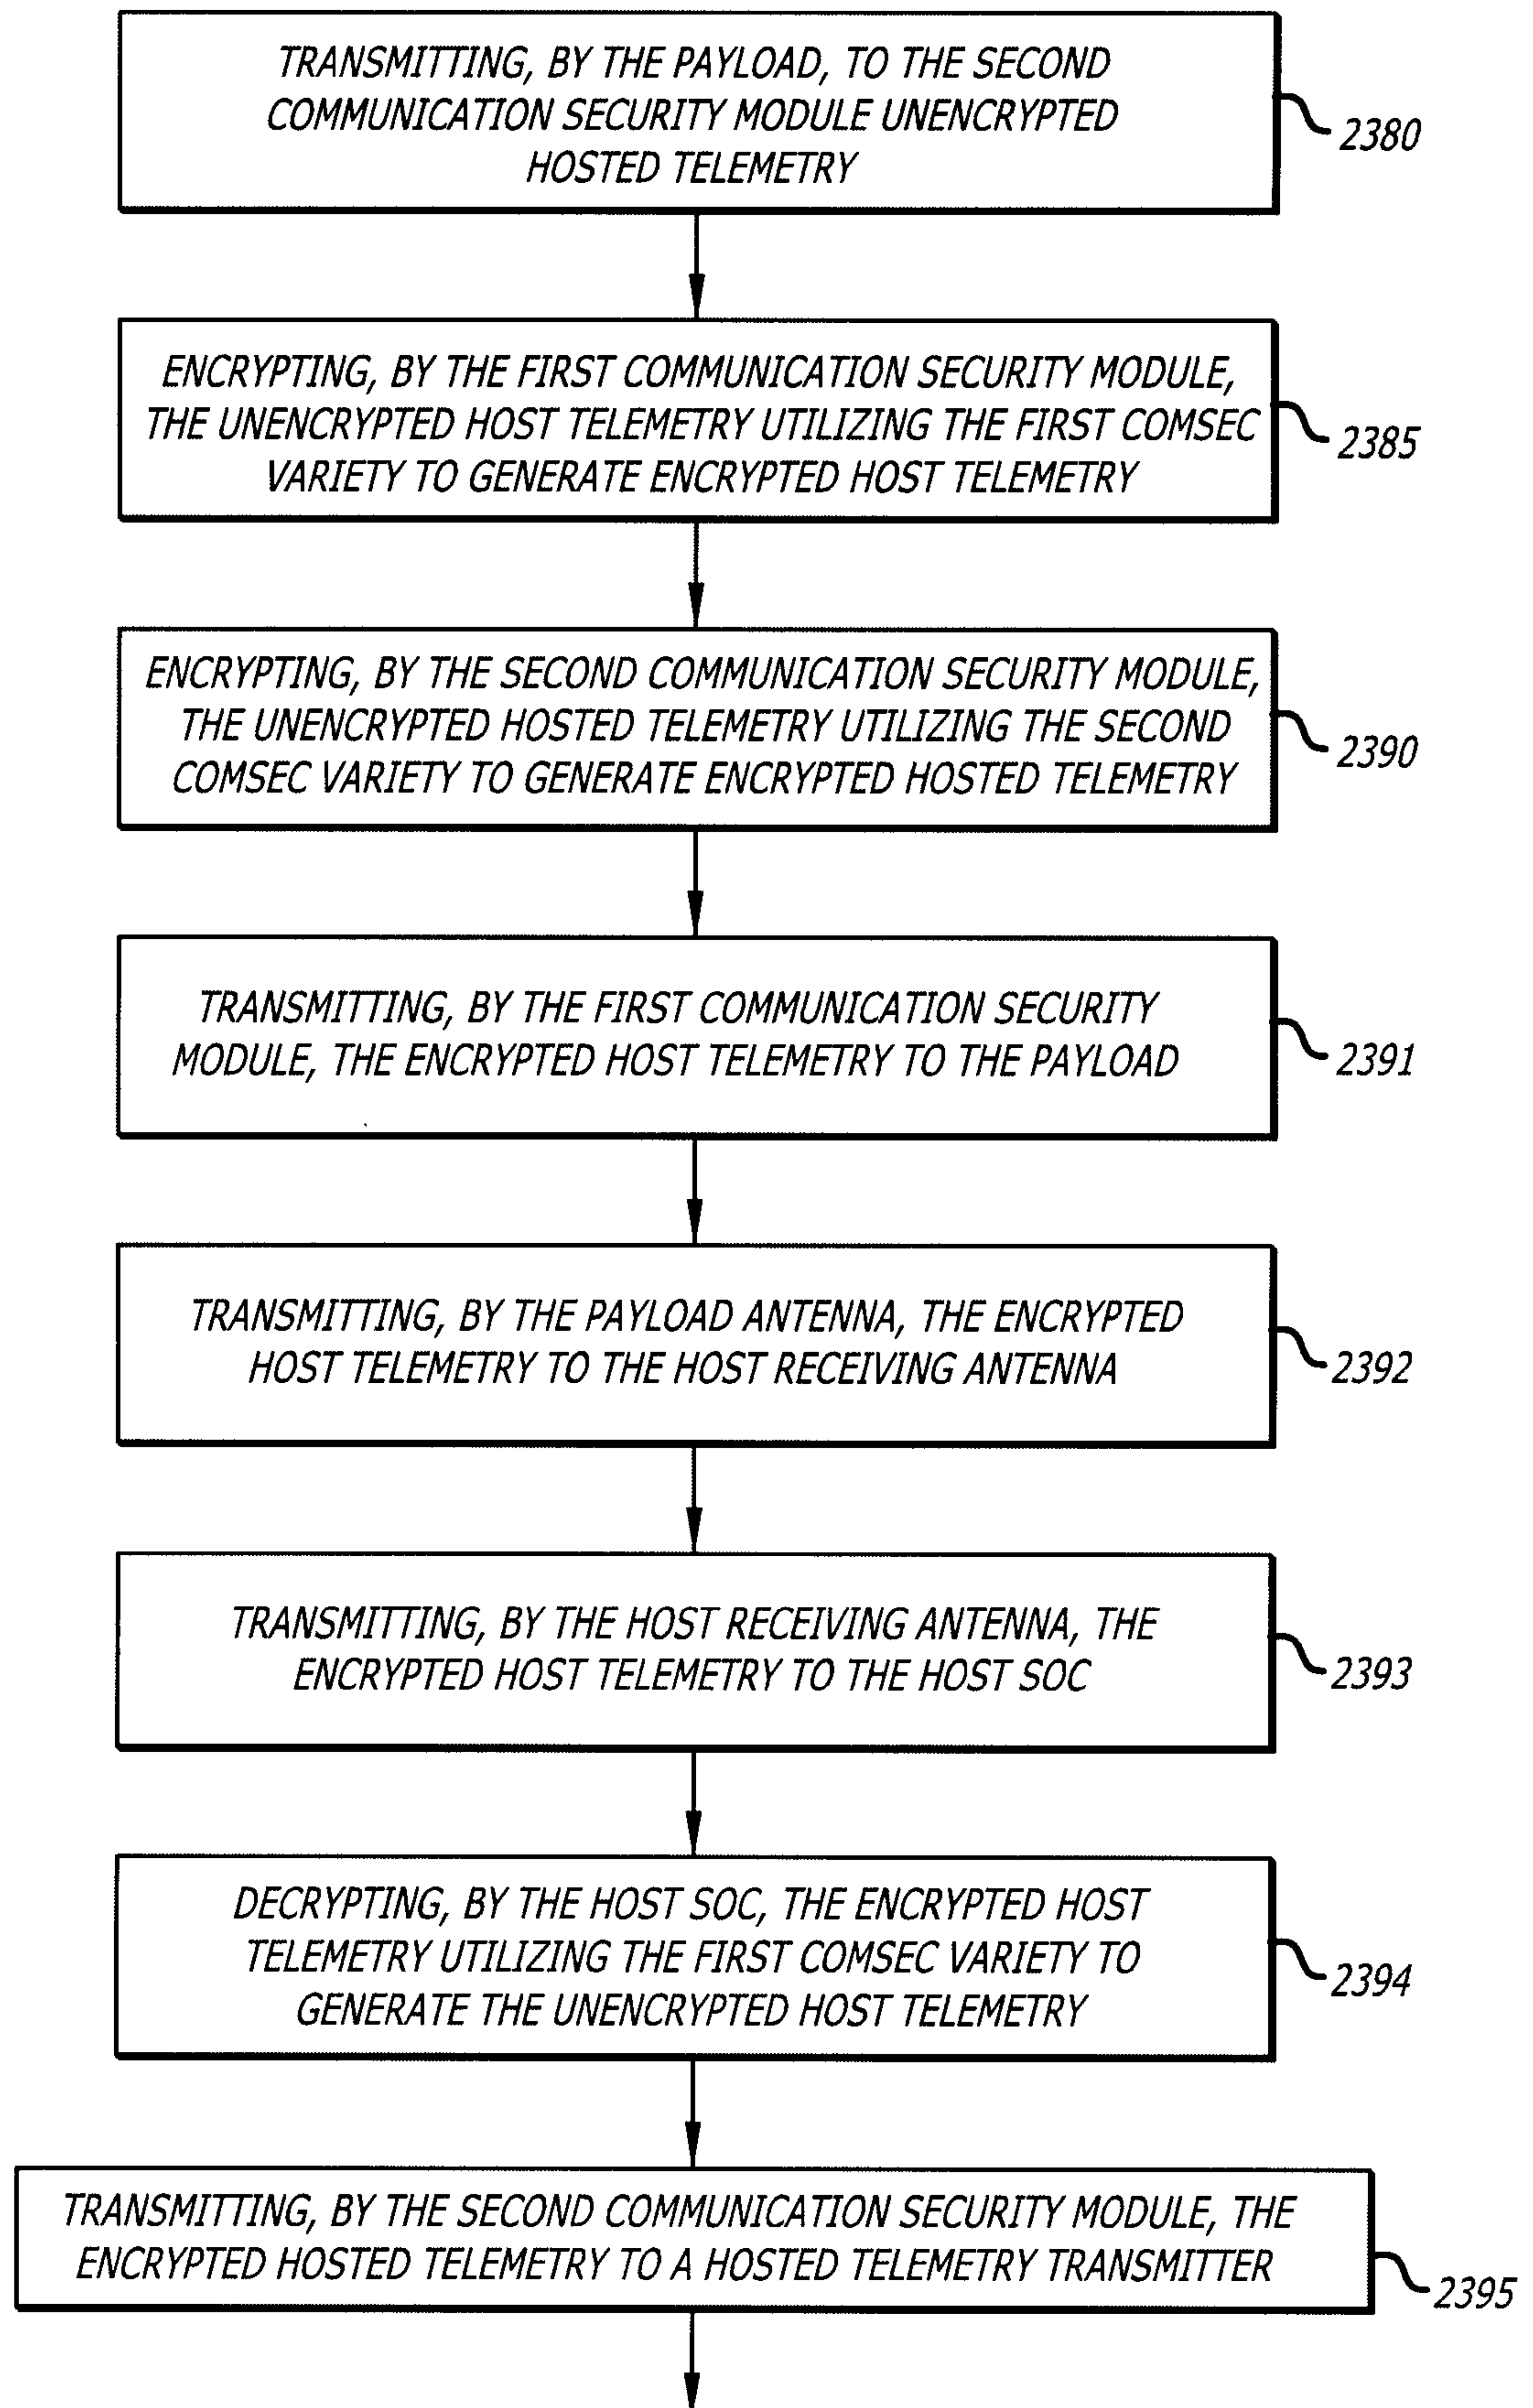
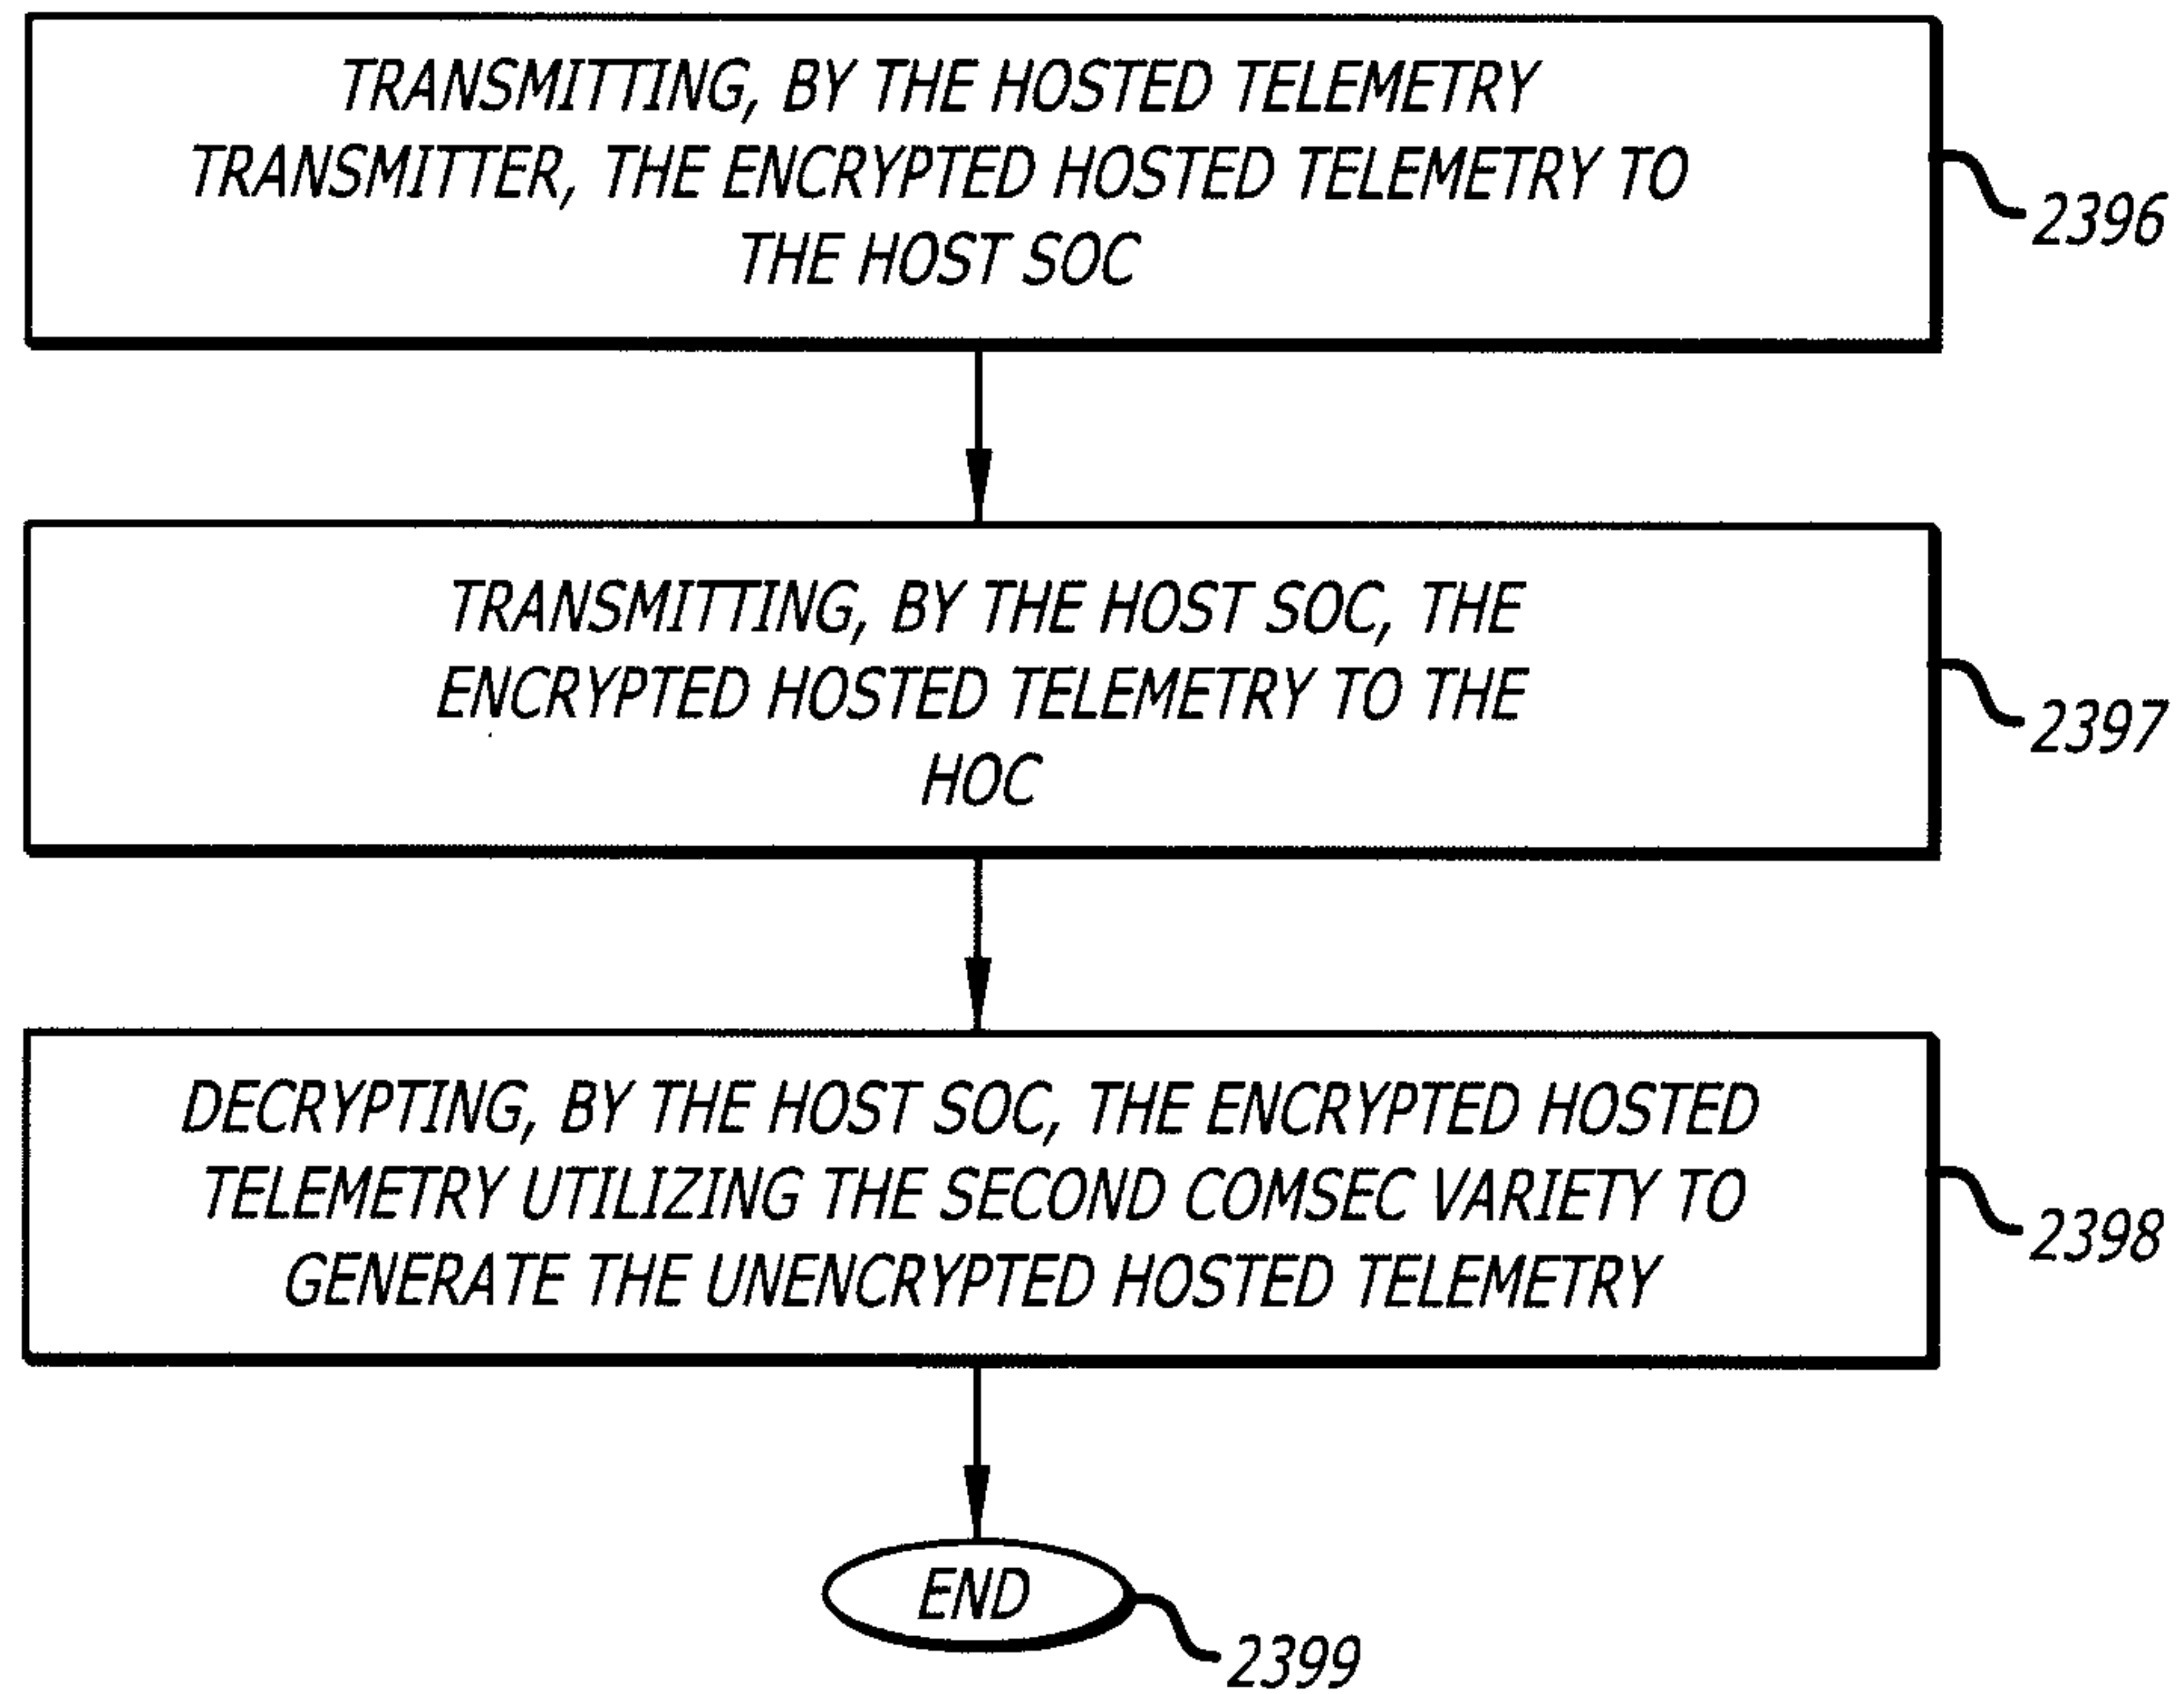
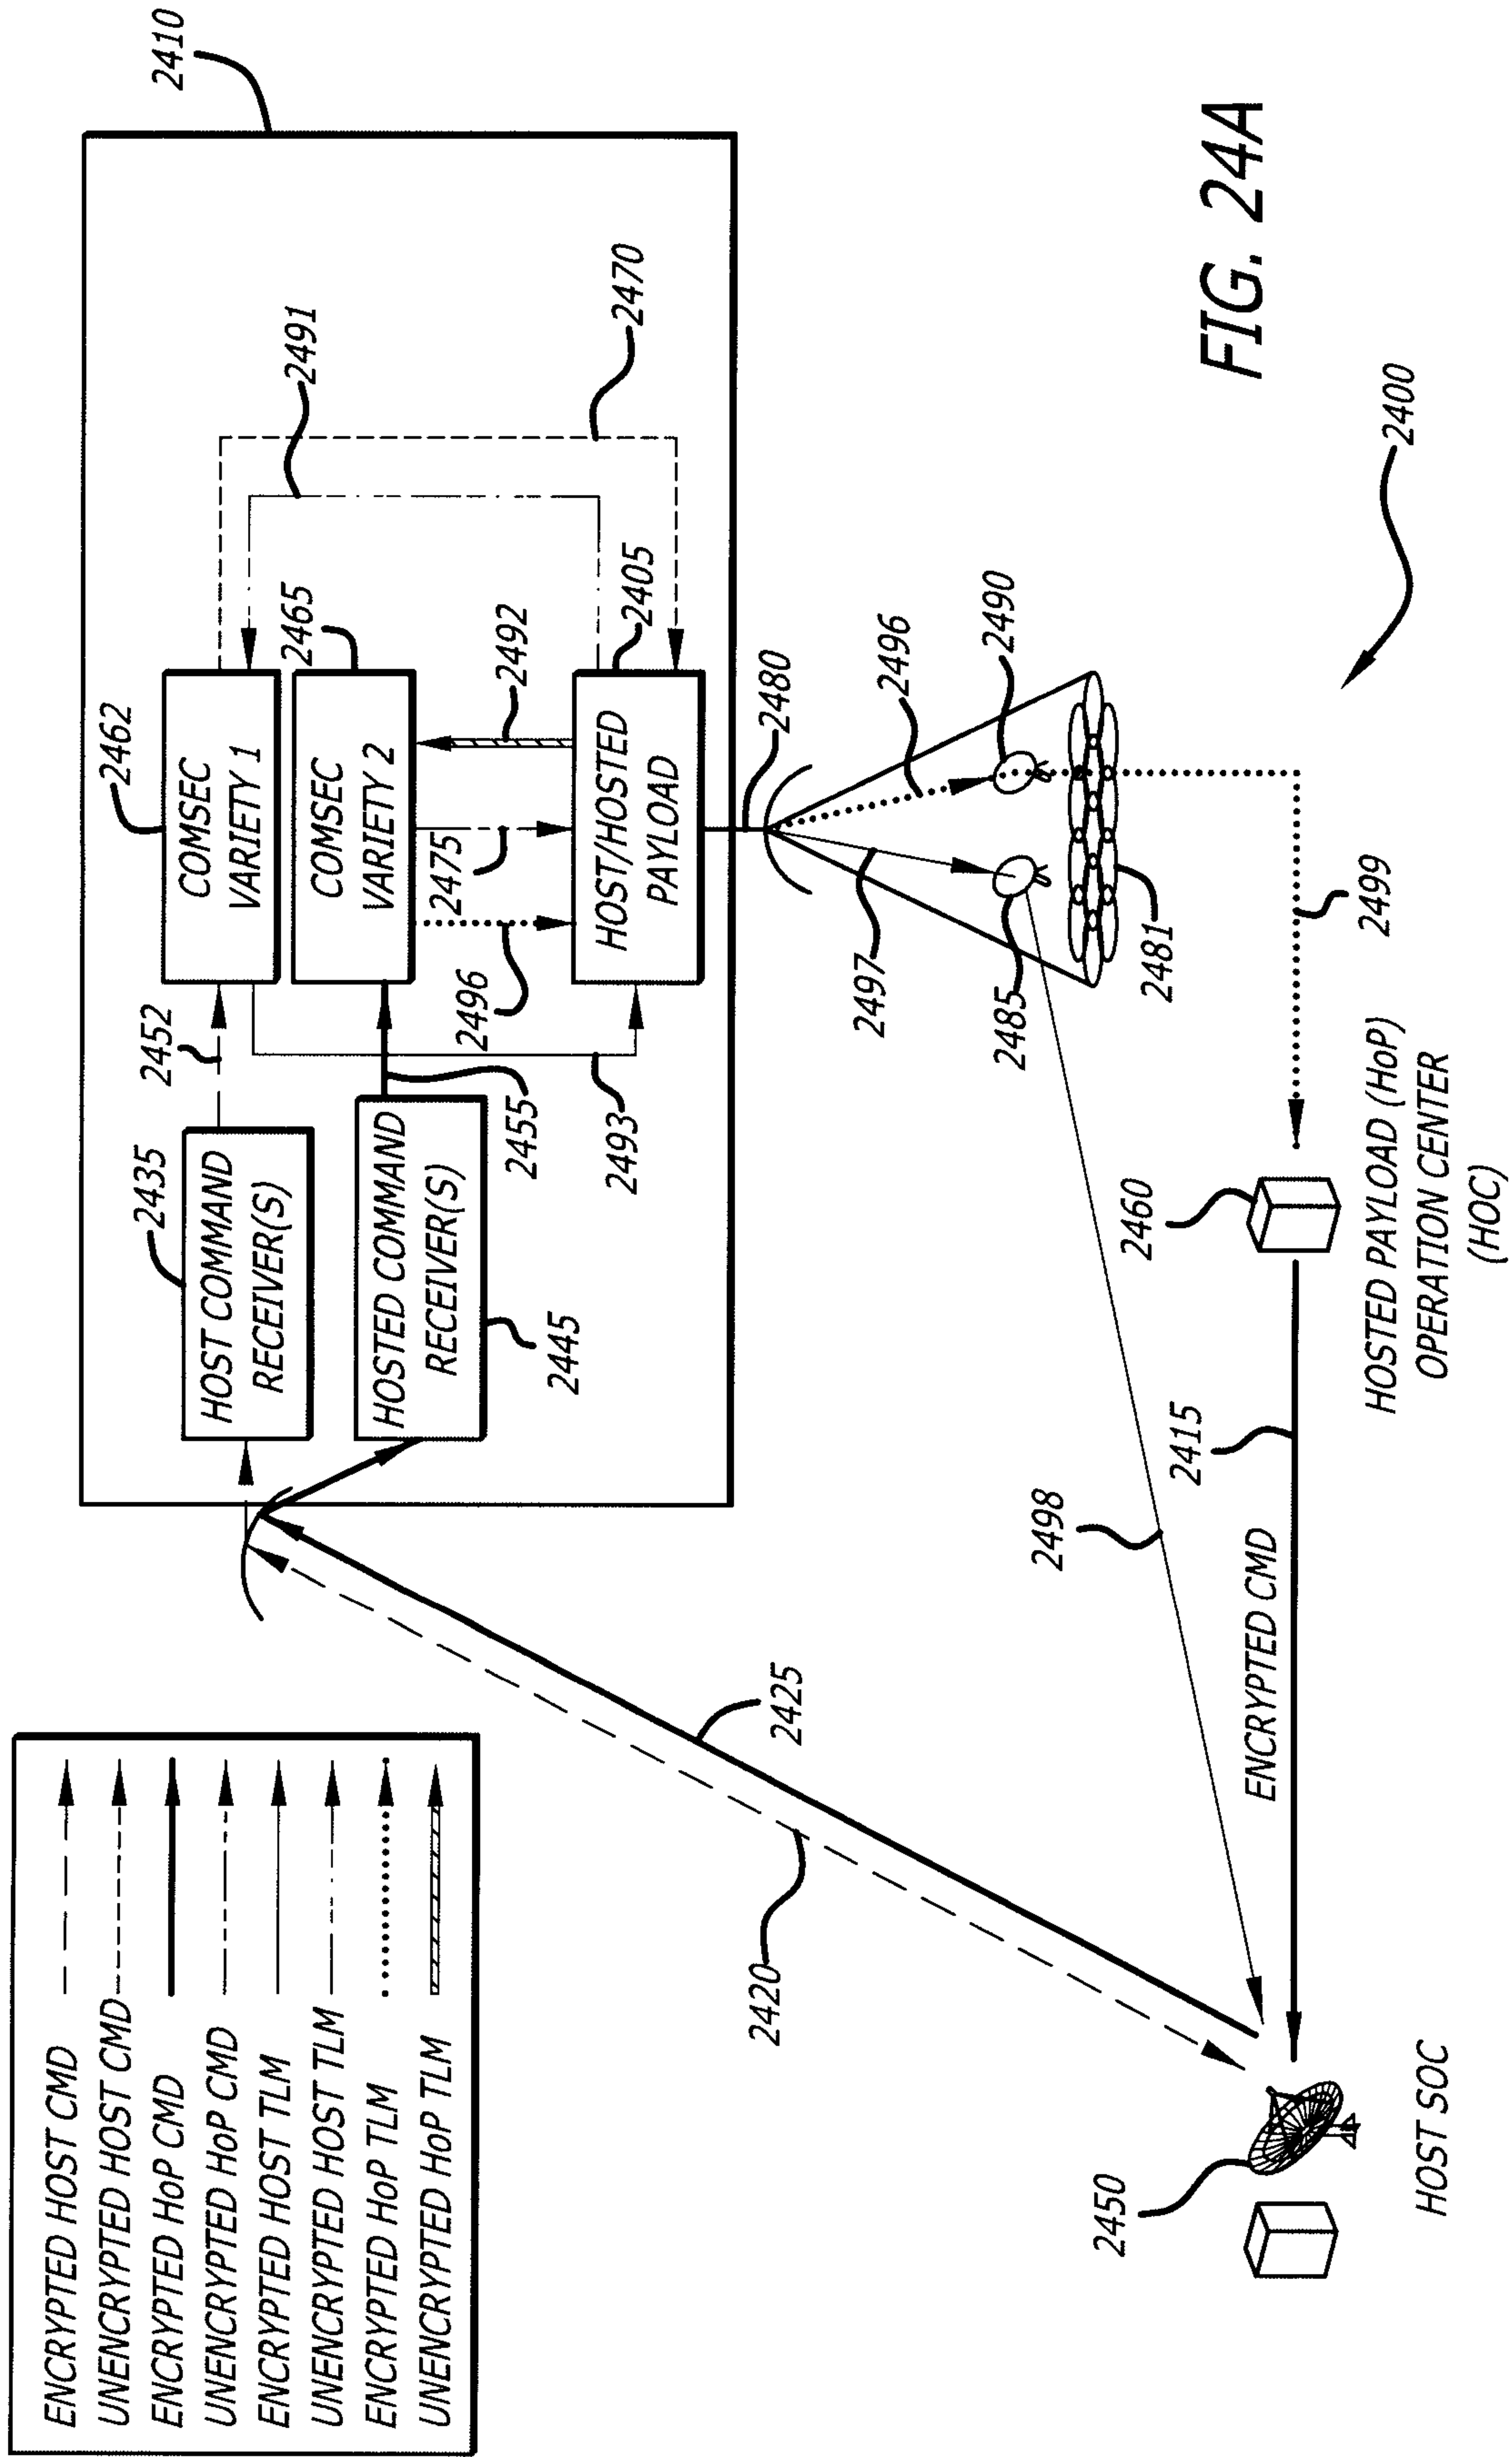


FIG. 23D





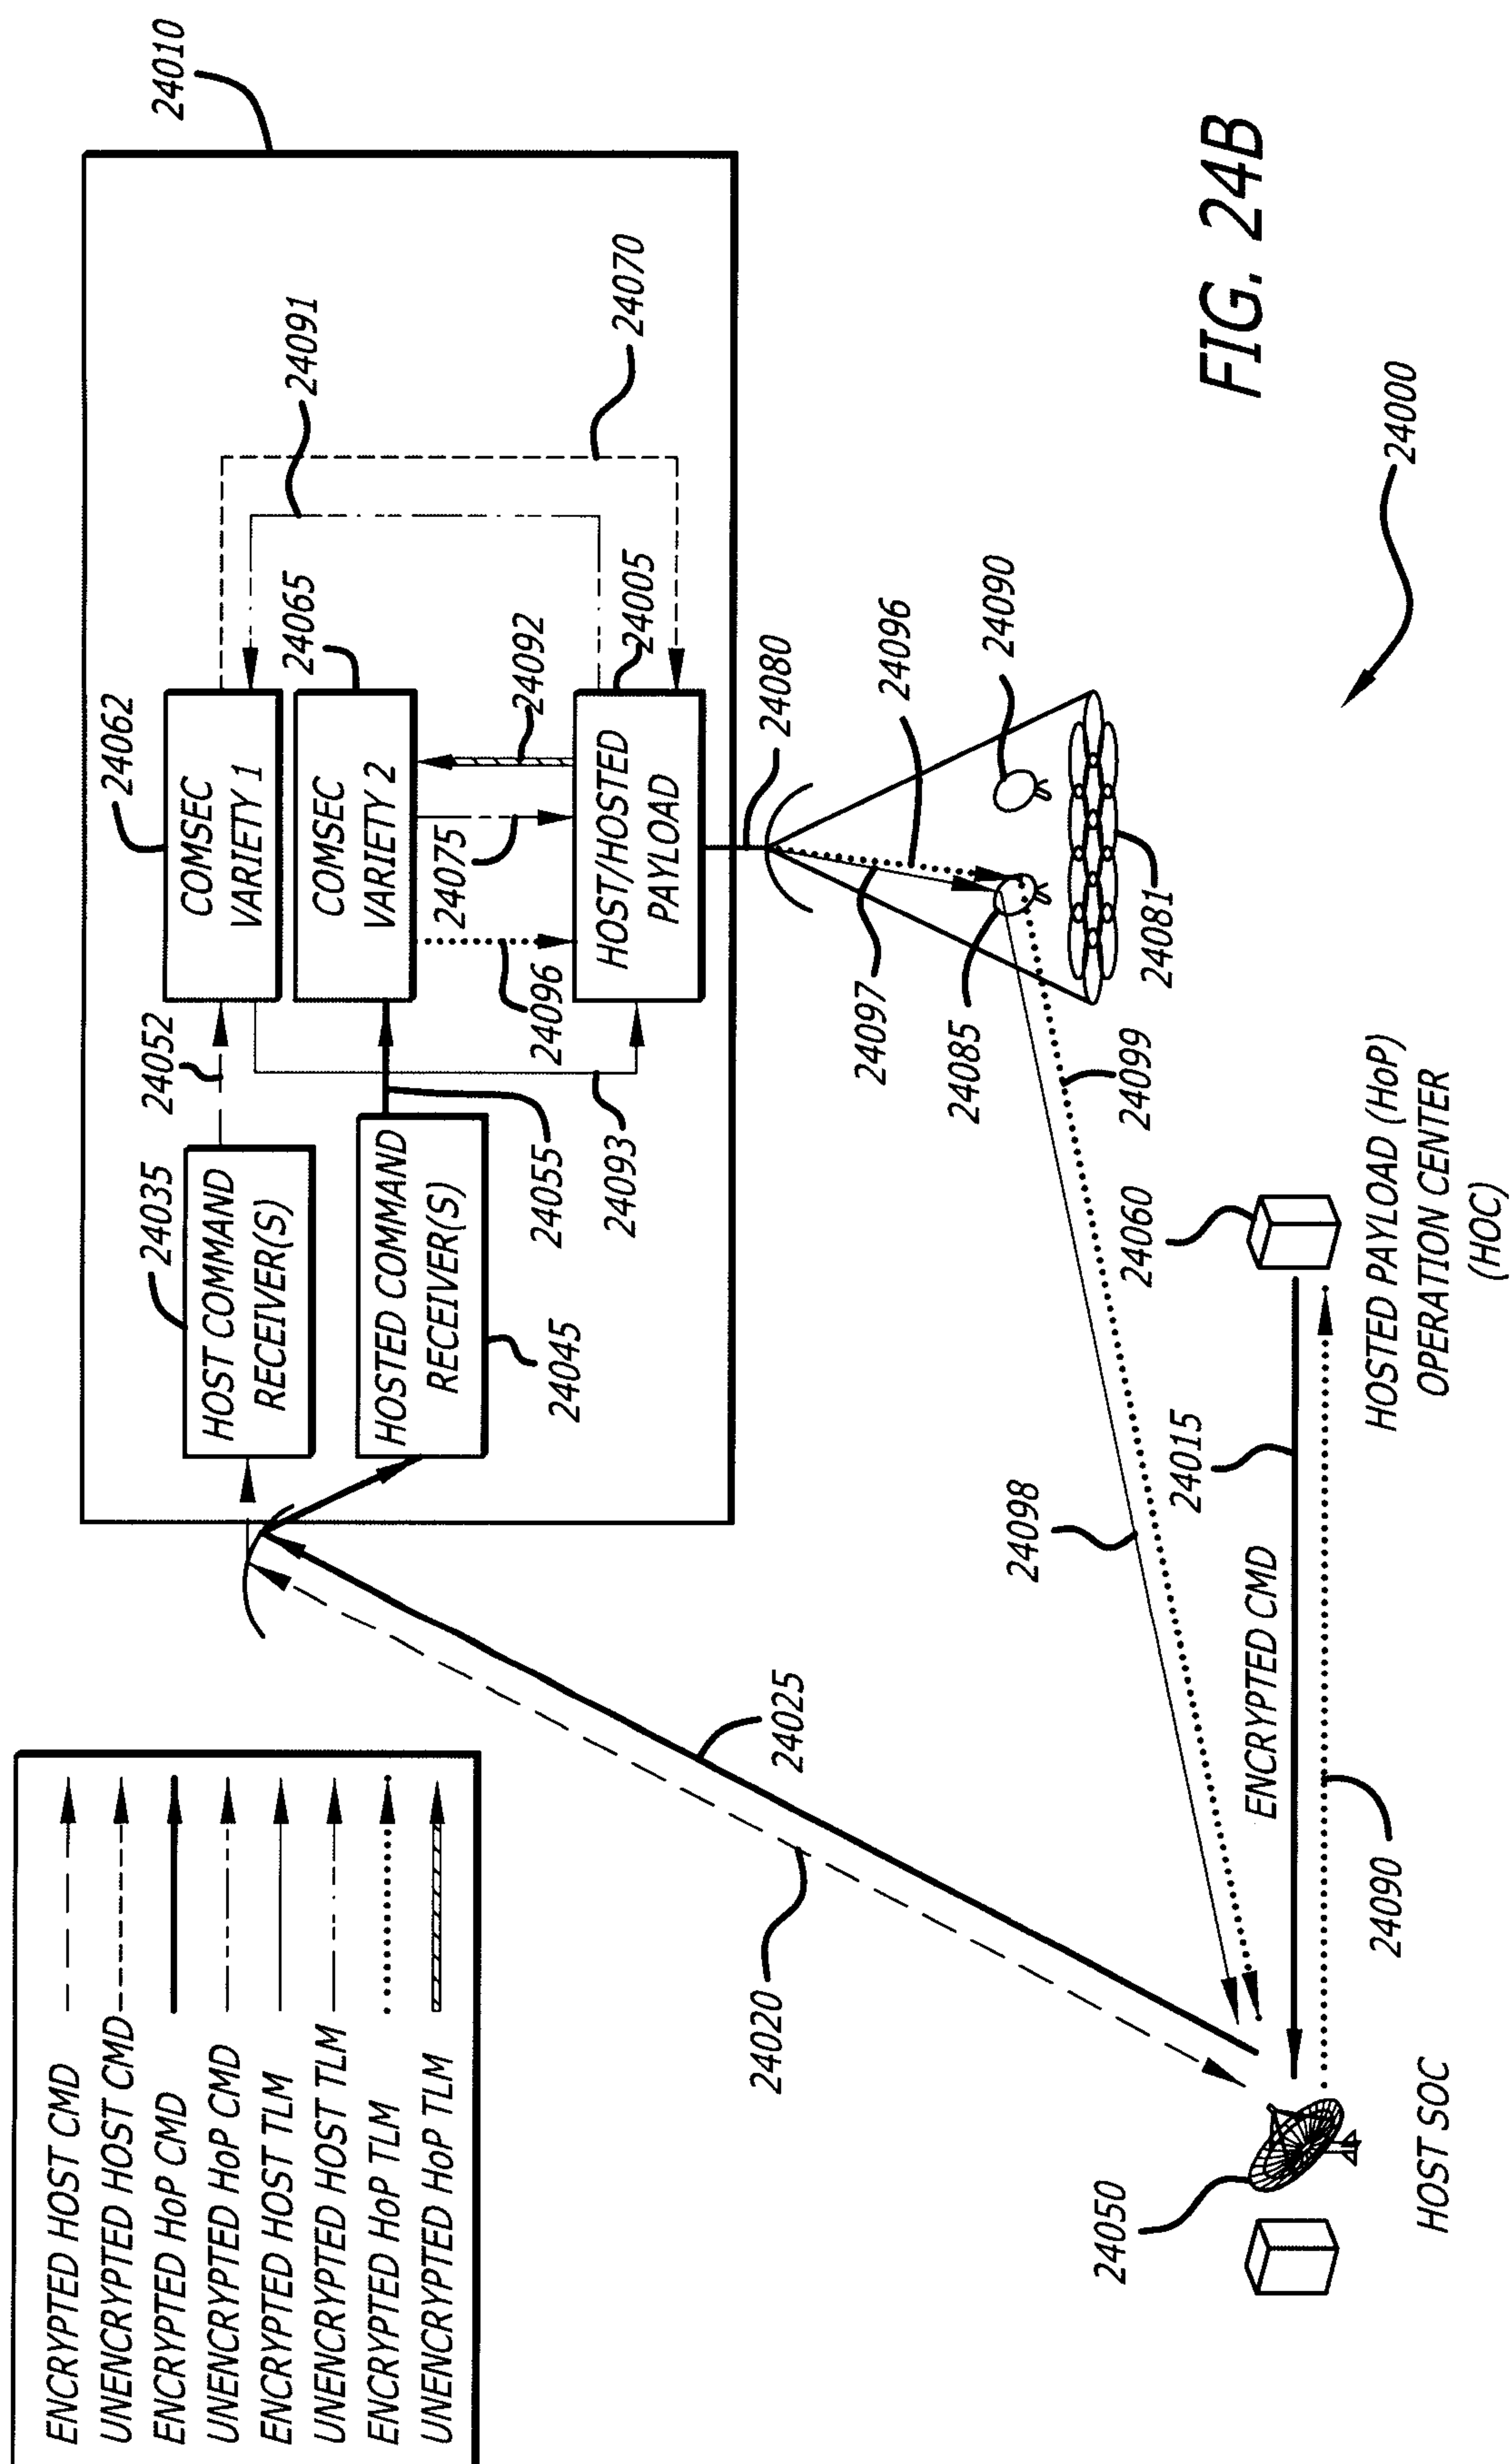


FIG. 25A

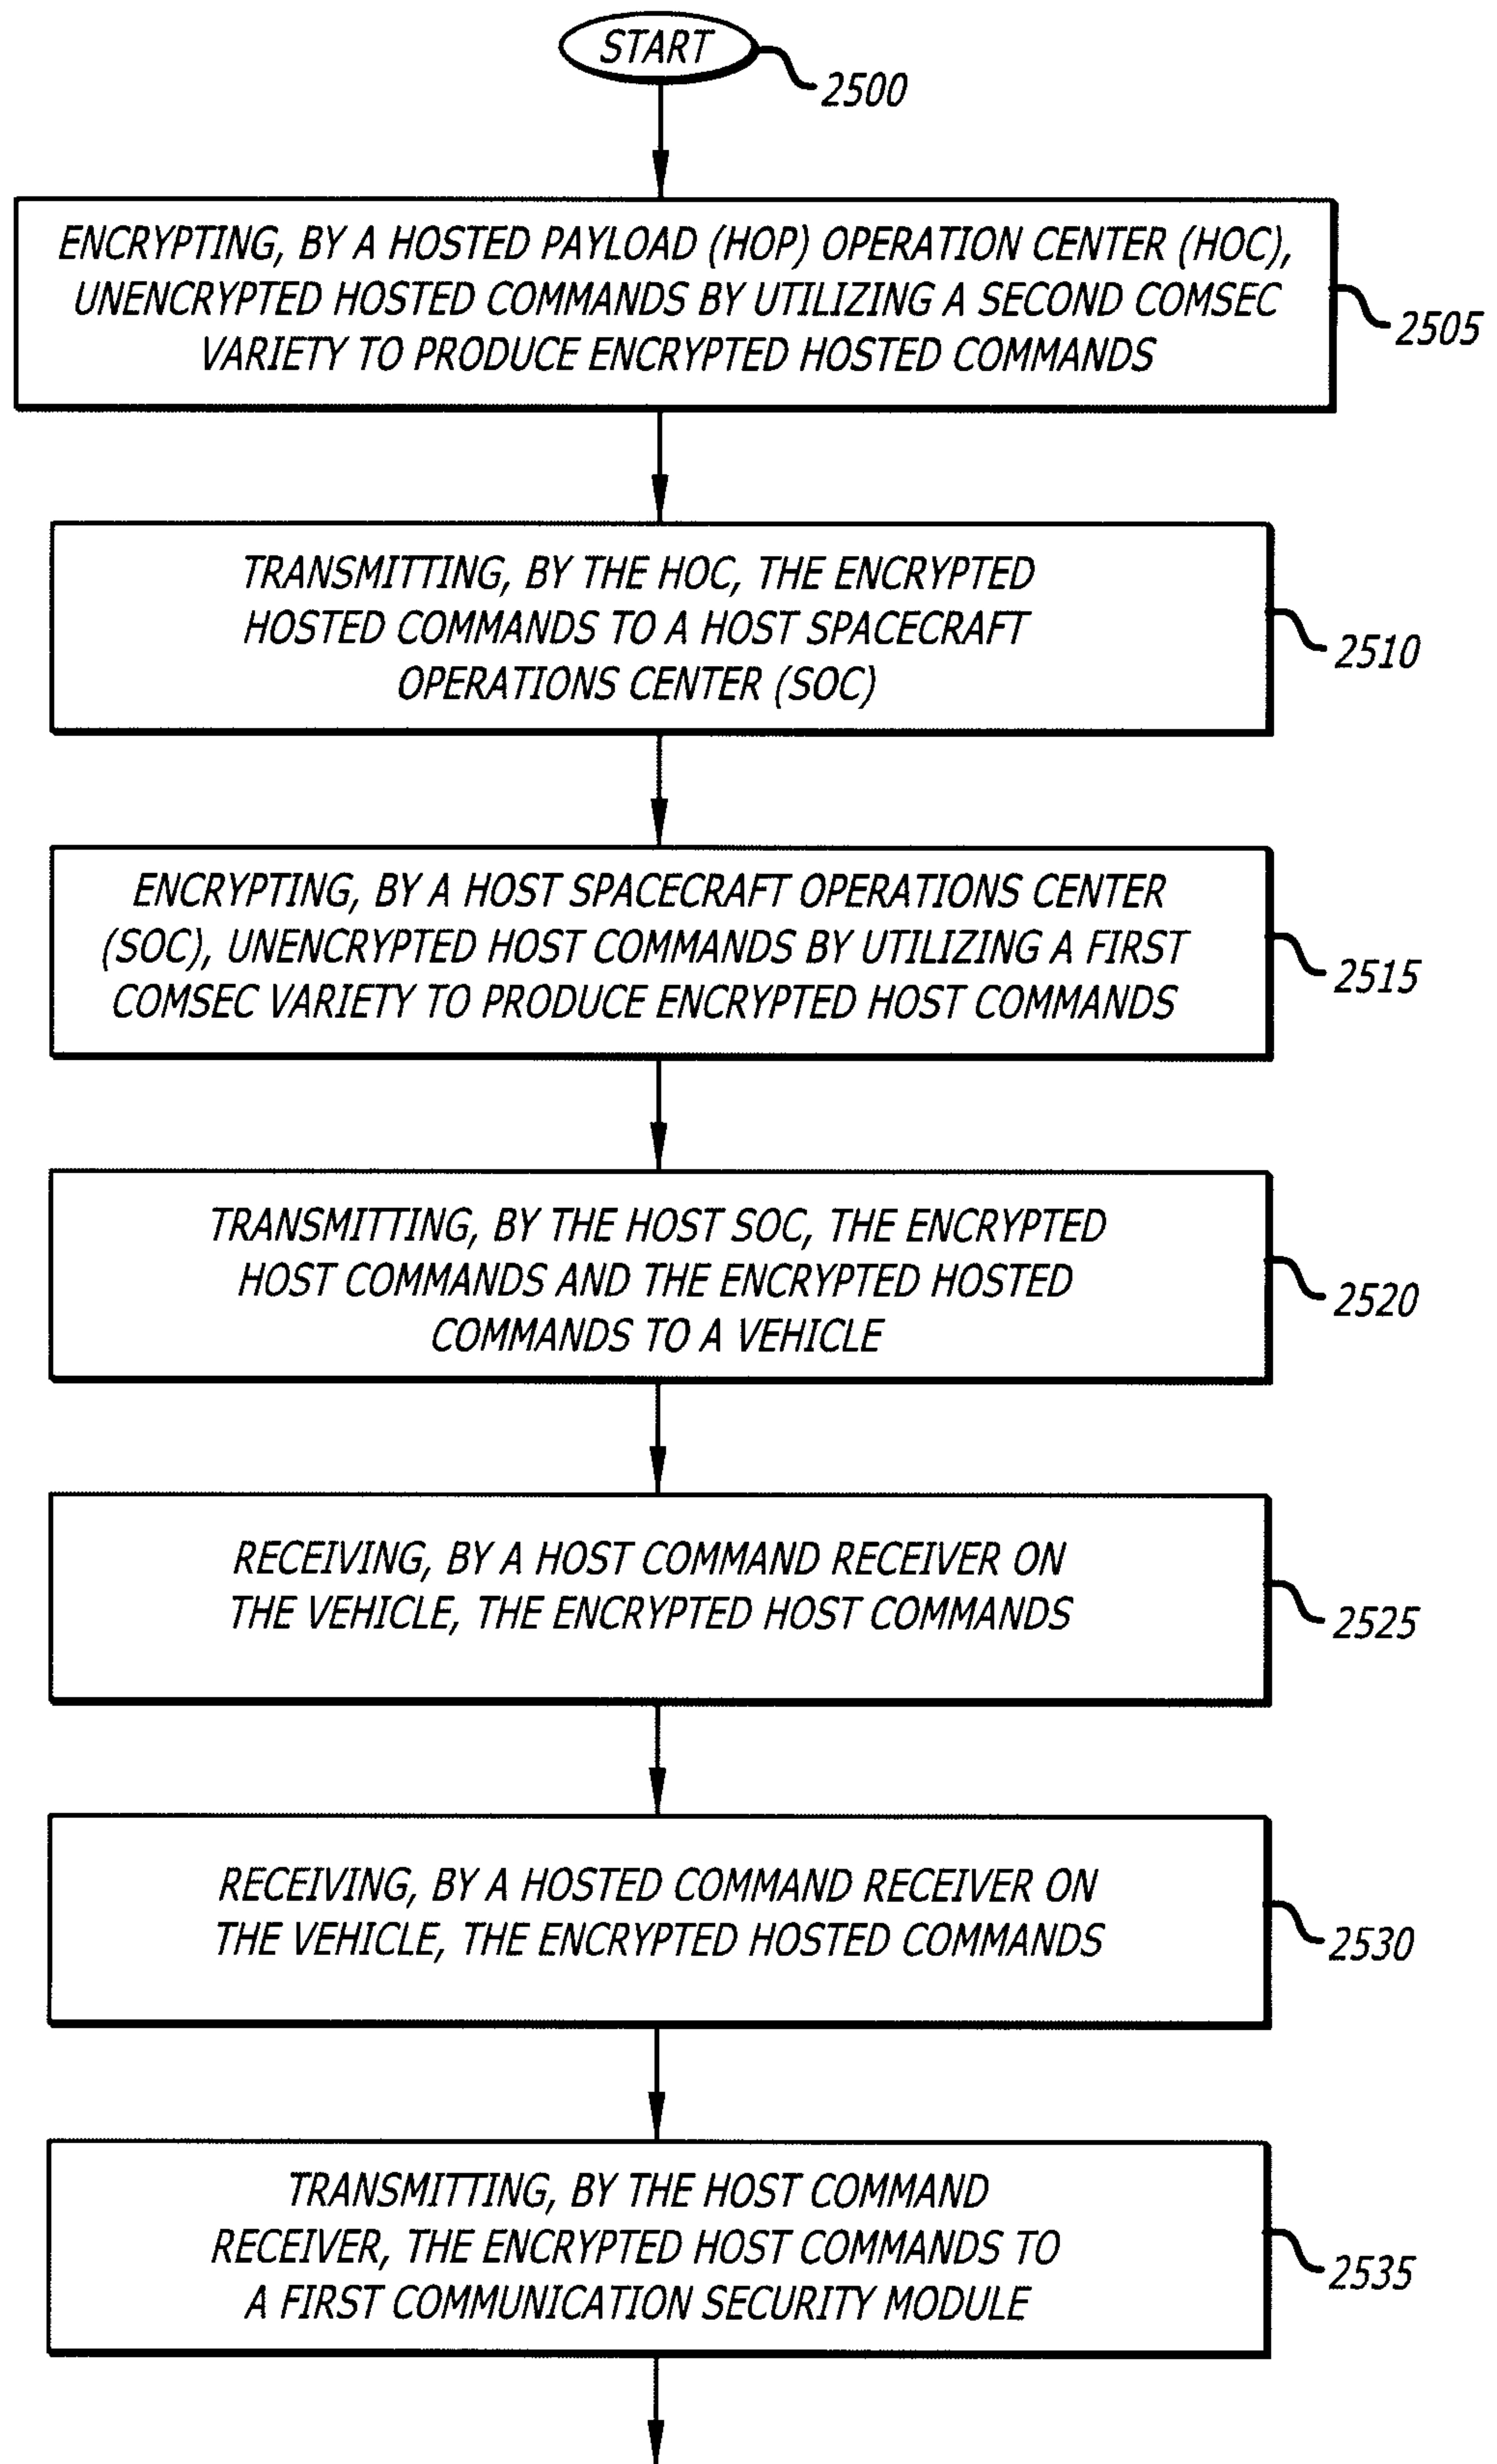


FIG. 25B

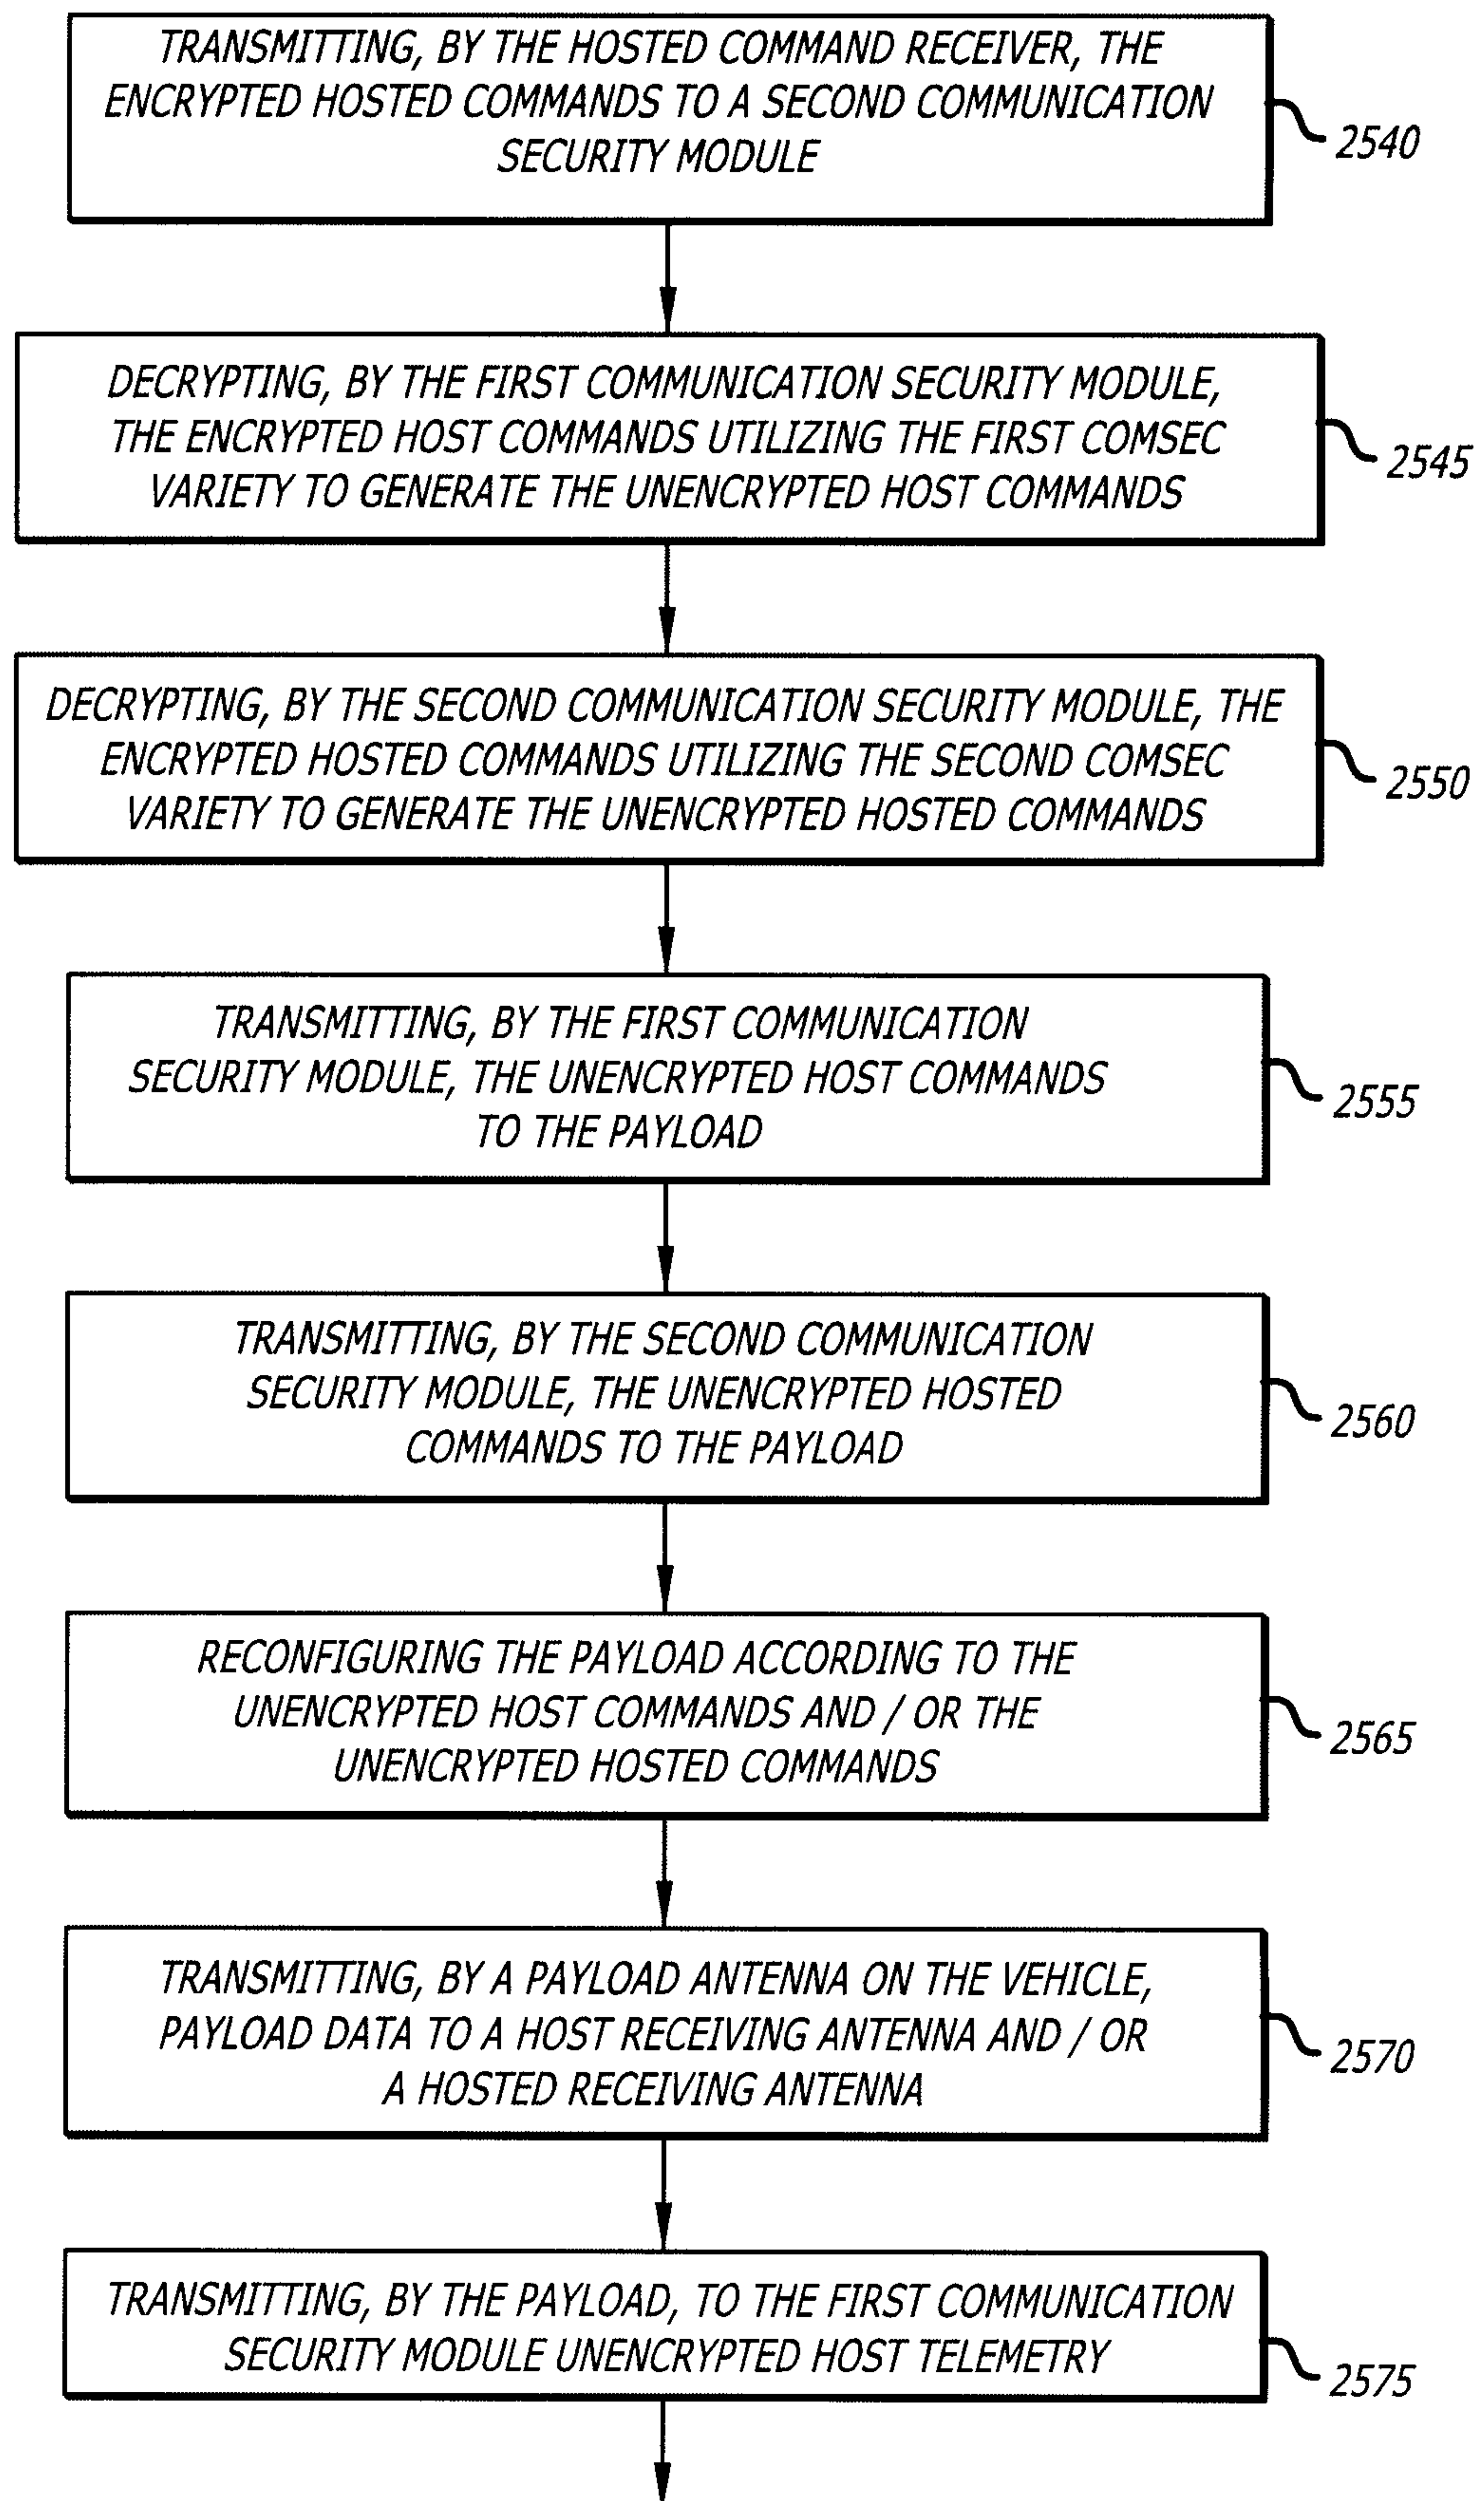


FIG. 25C

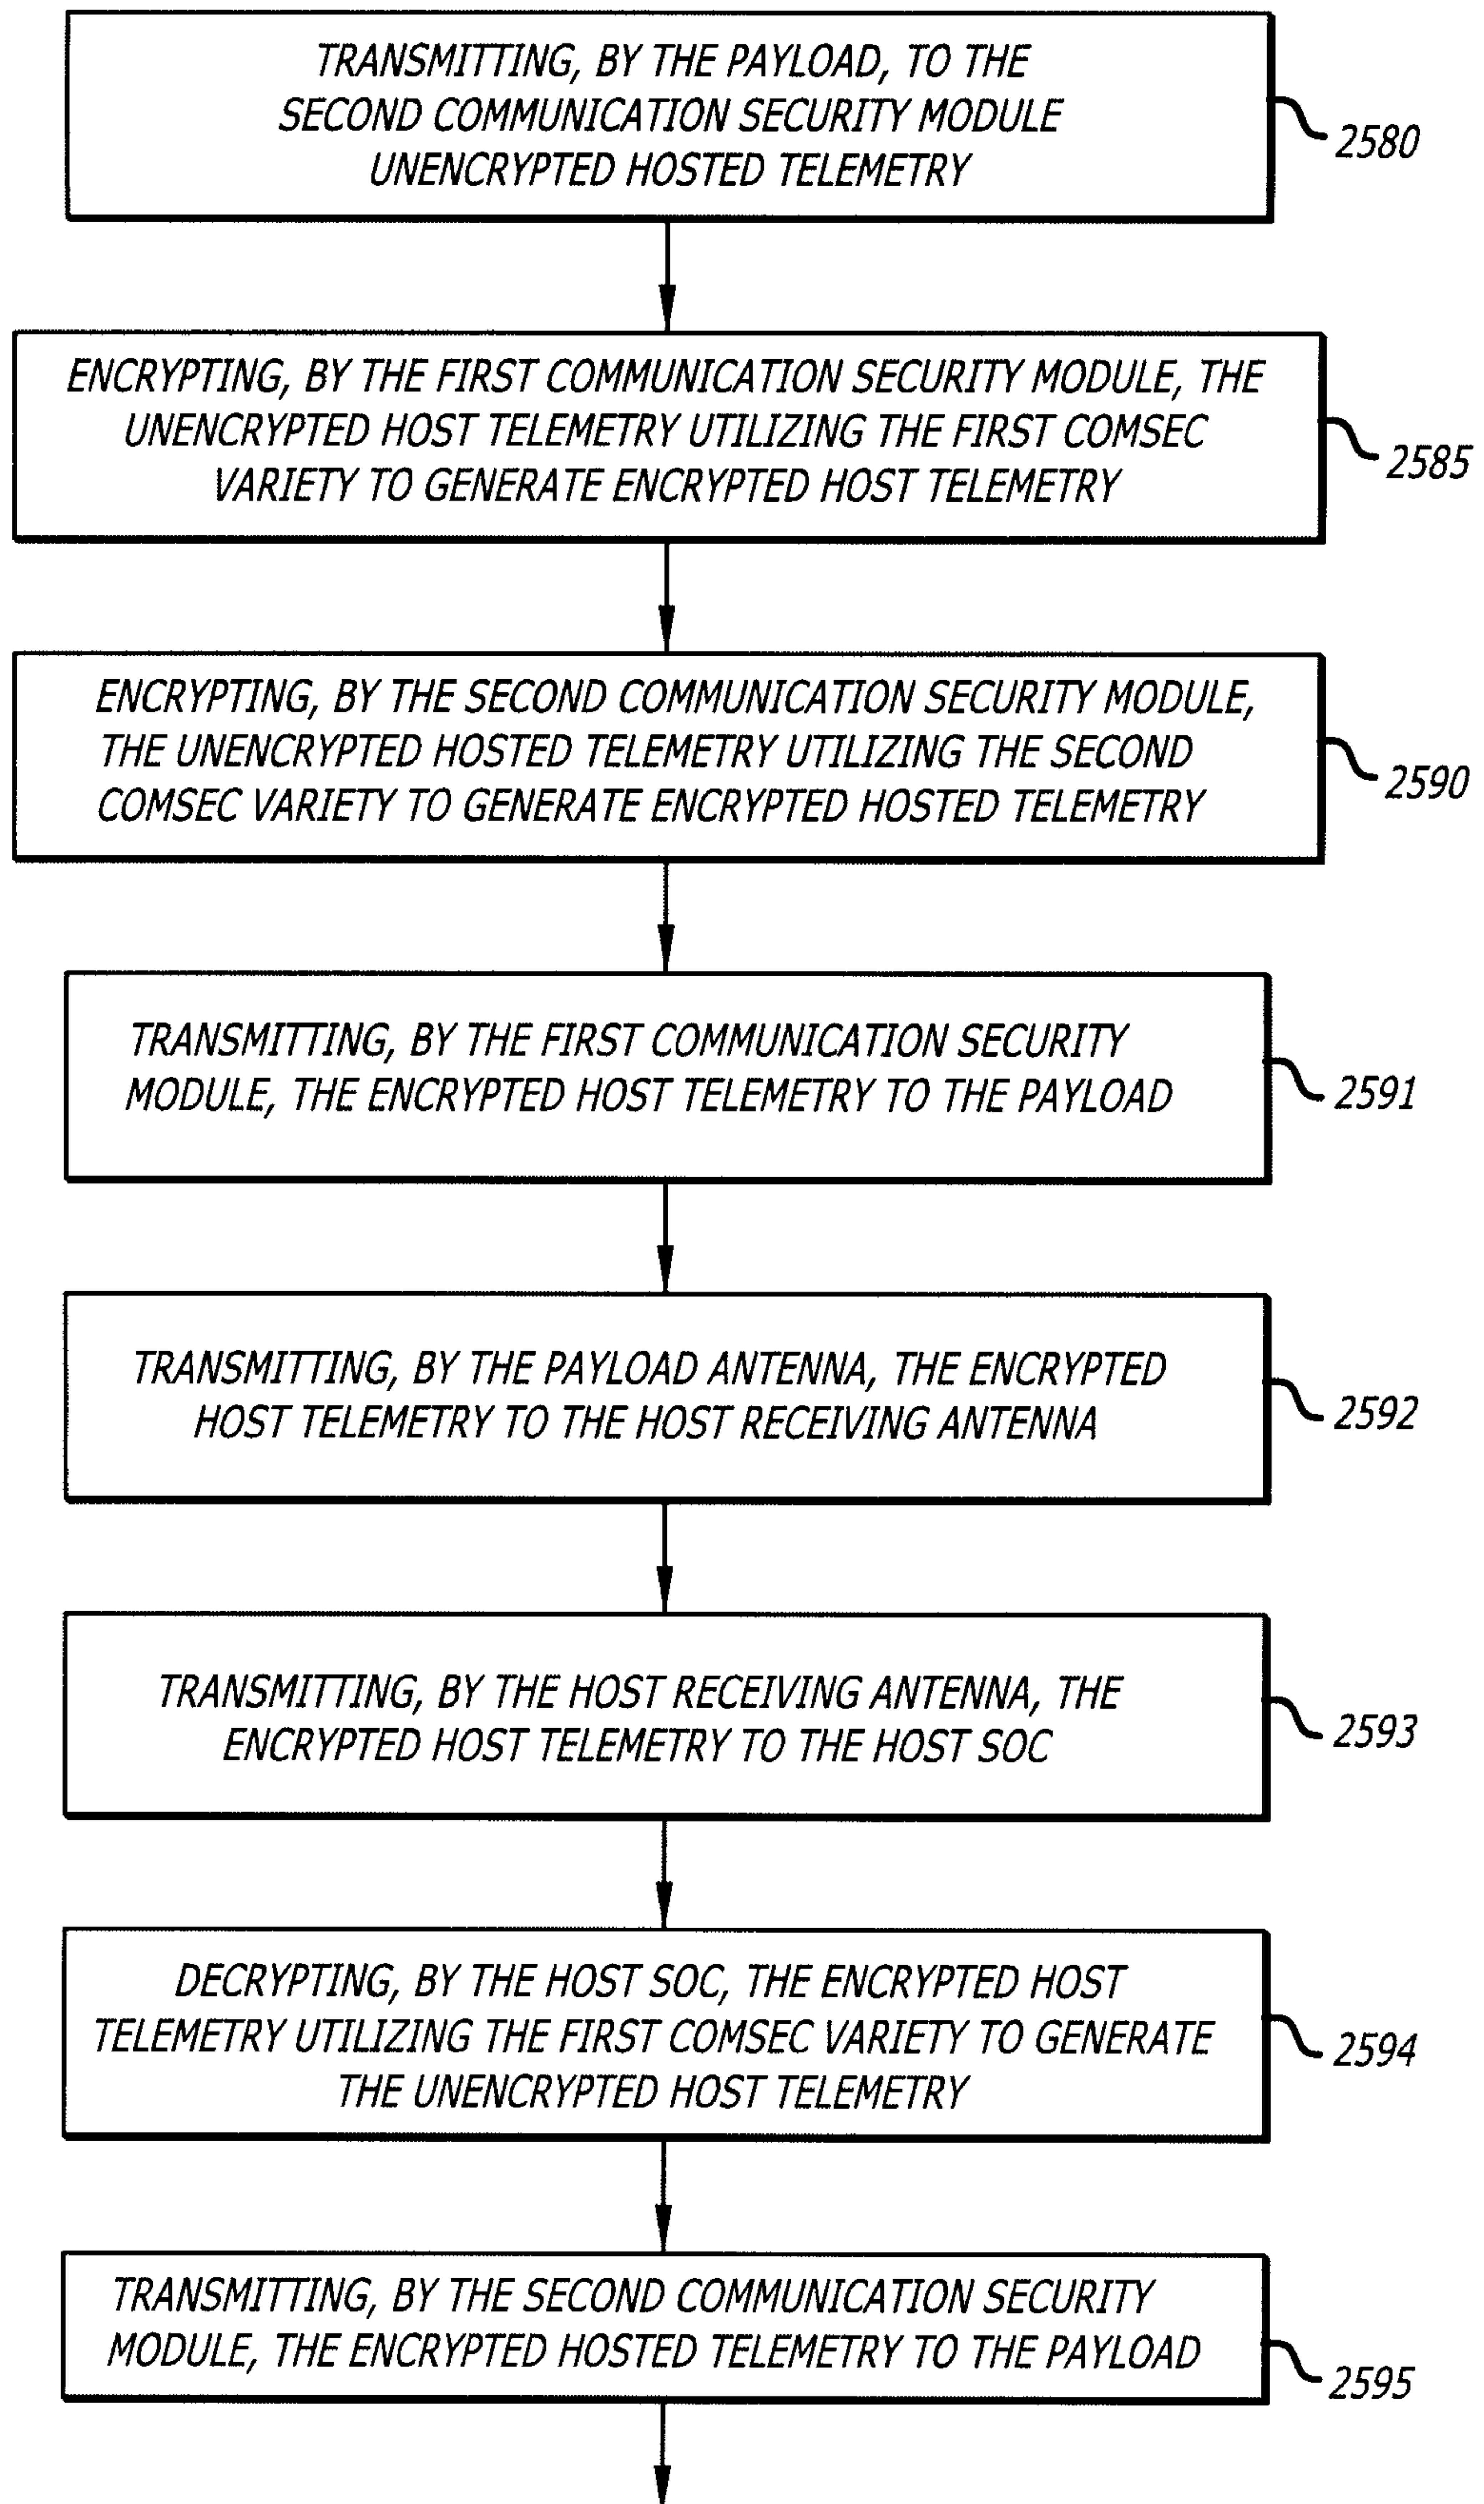


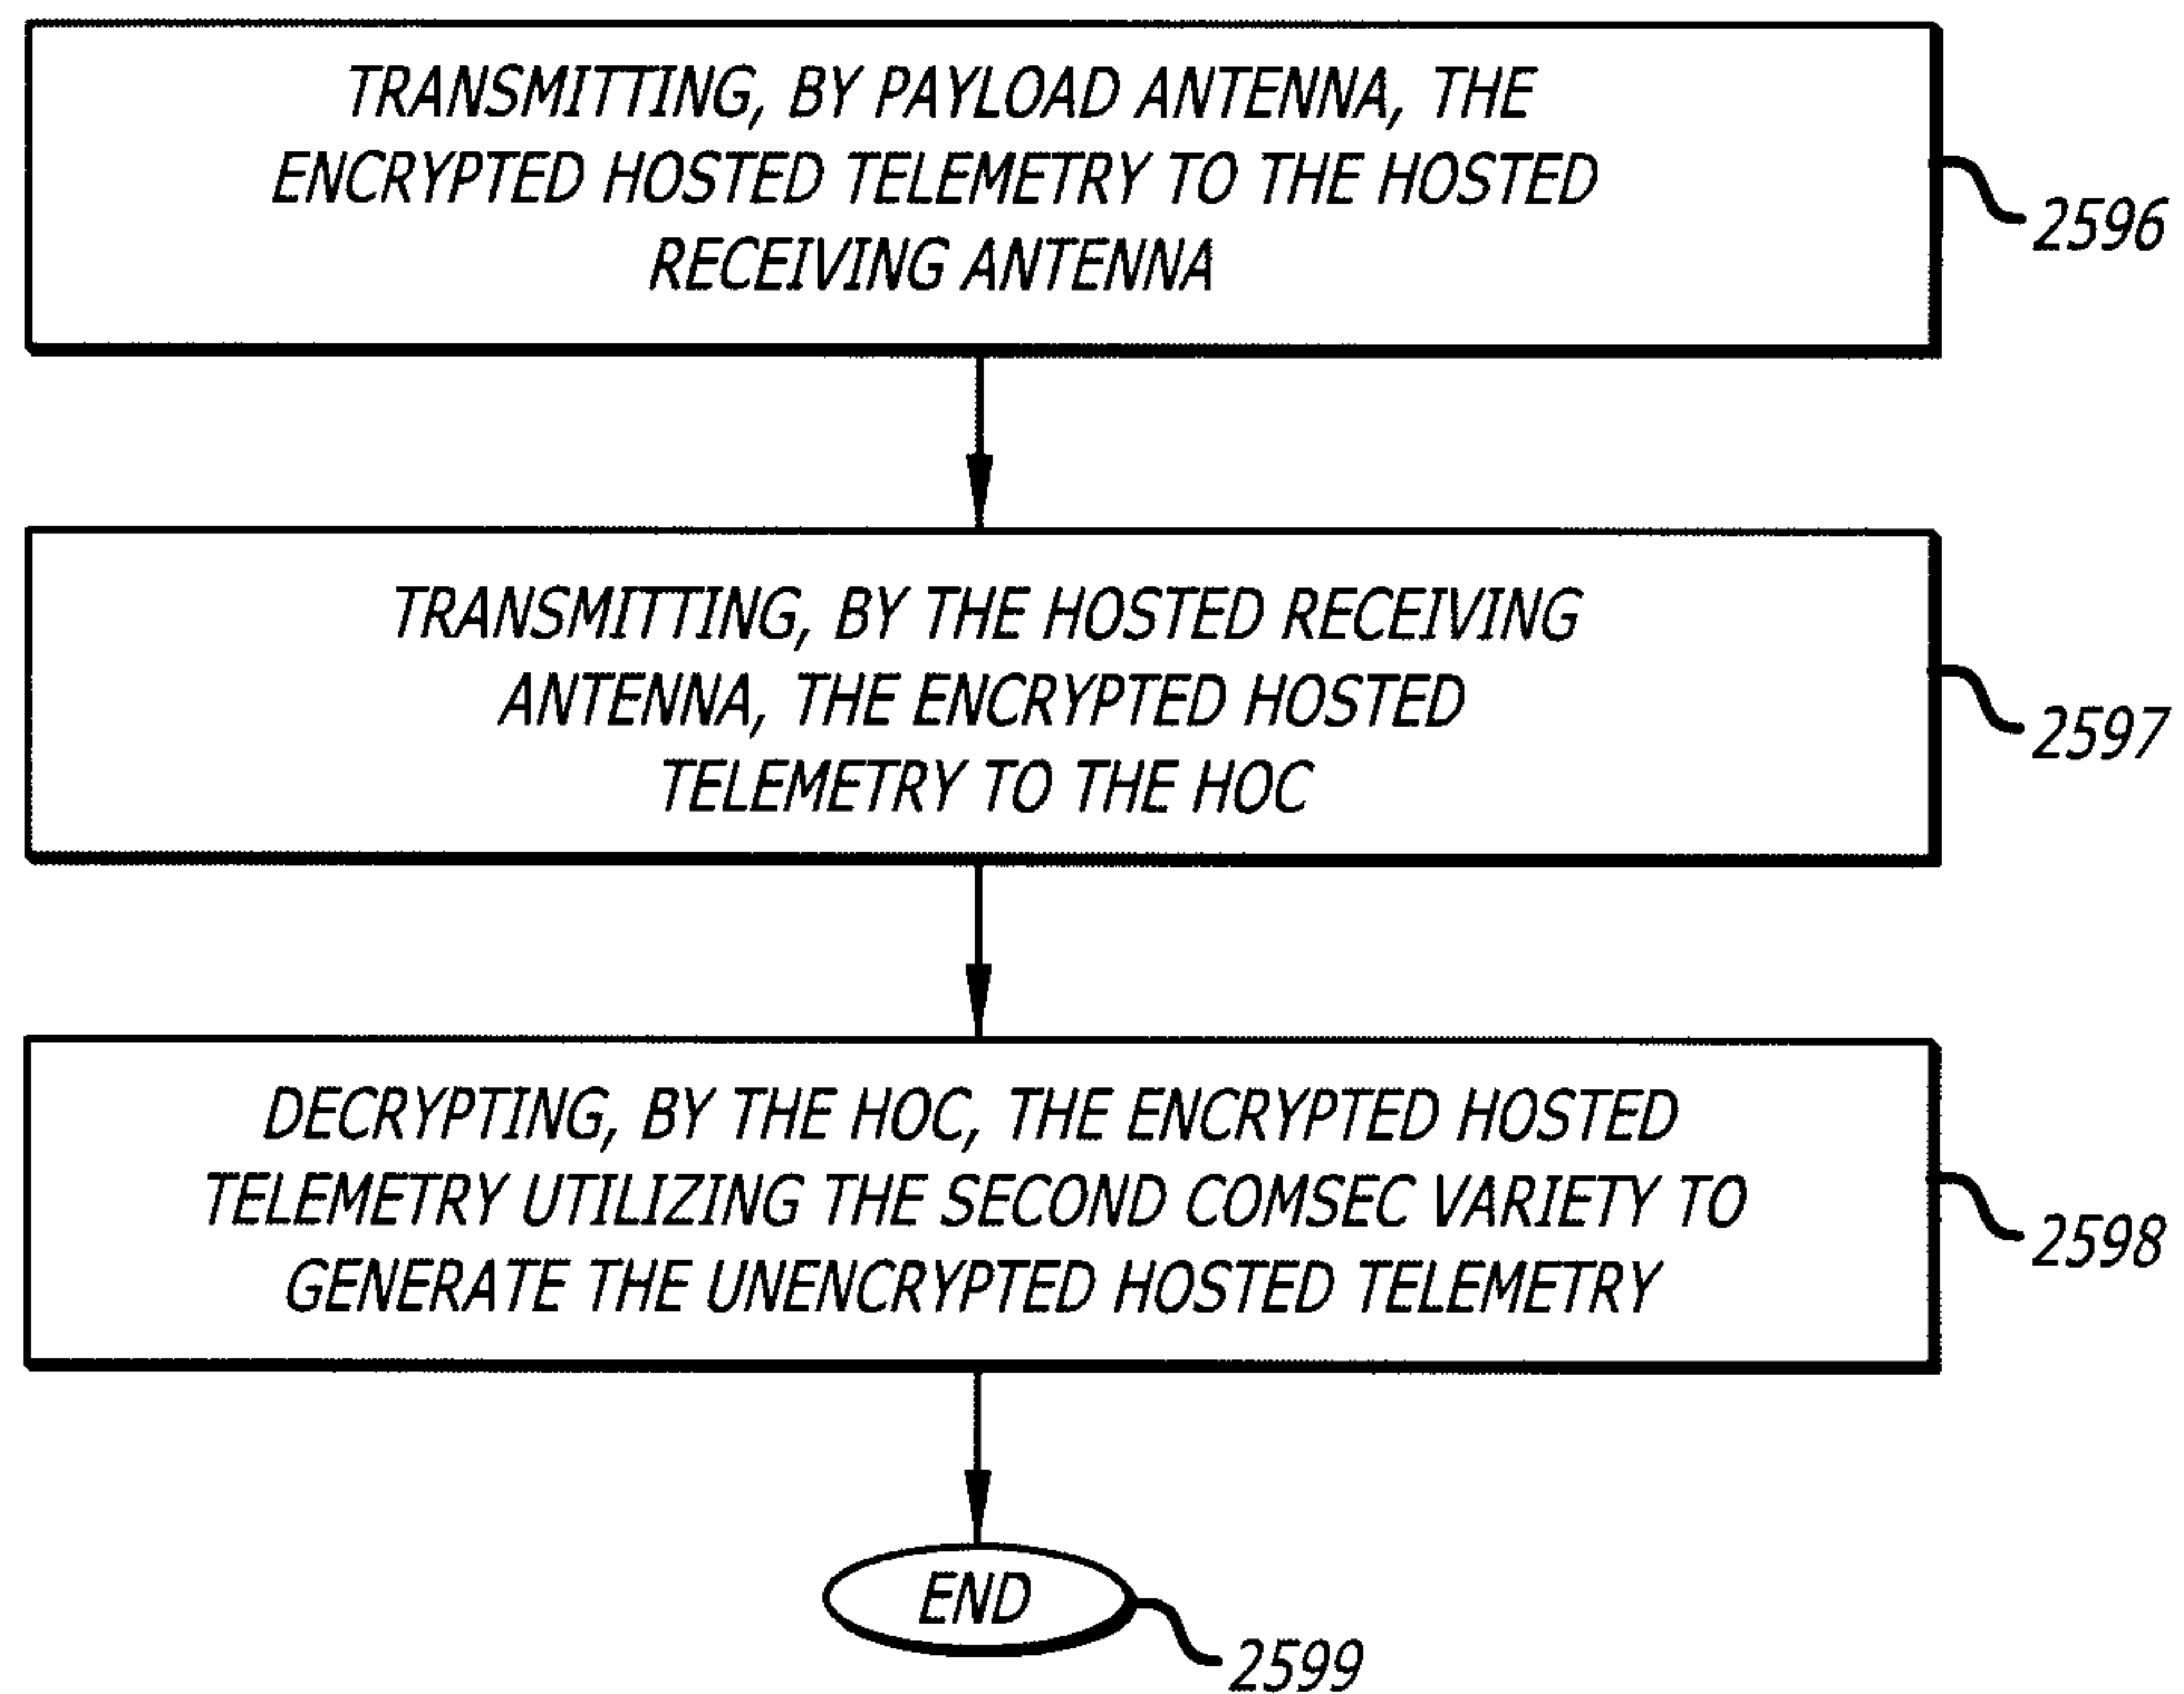
FIG. 25D

FIG. 25E

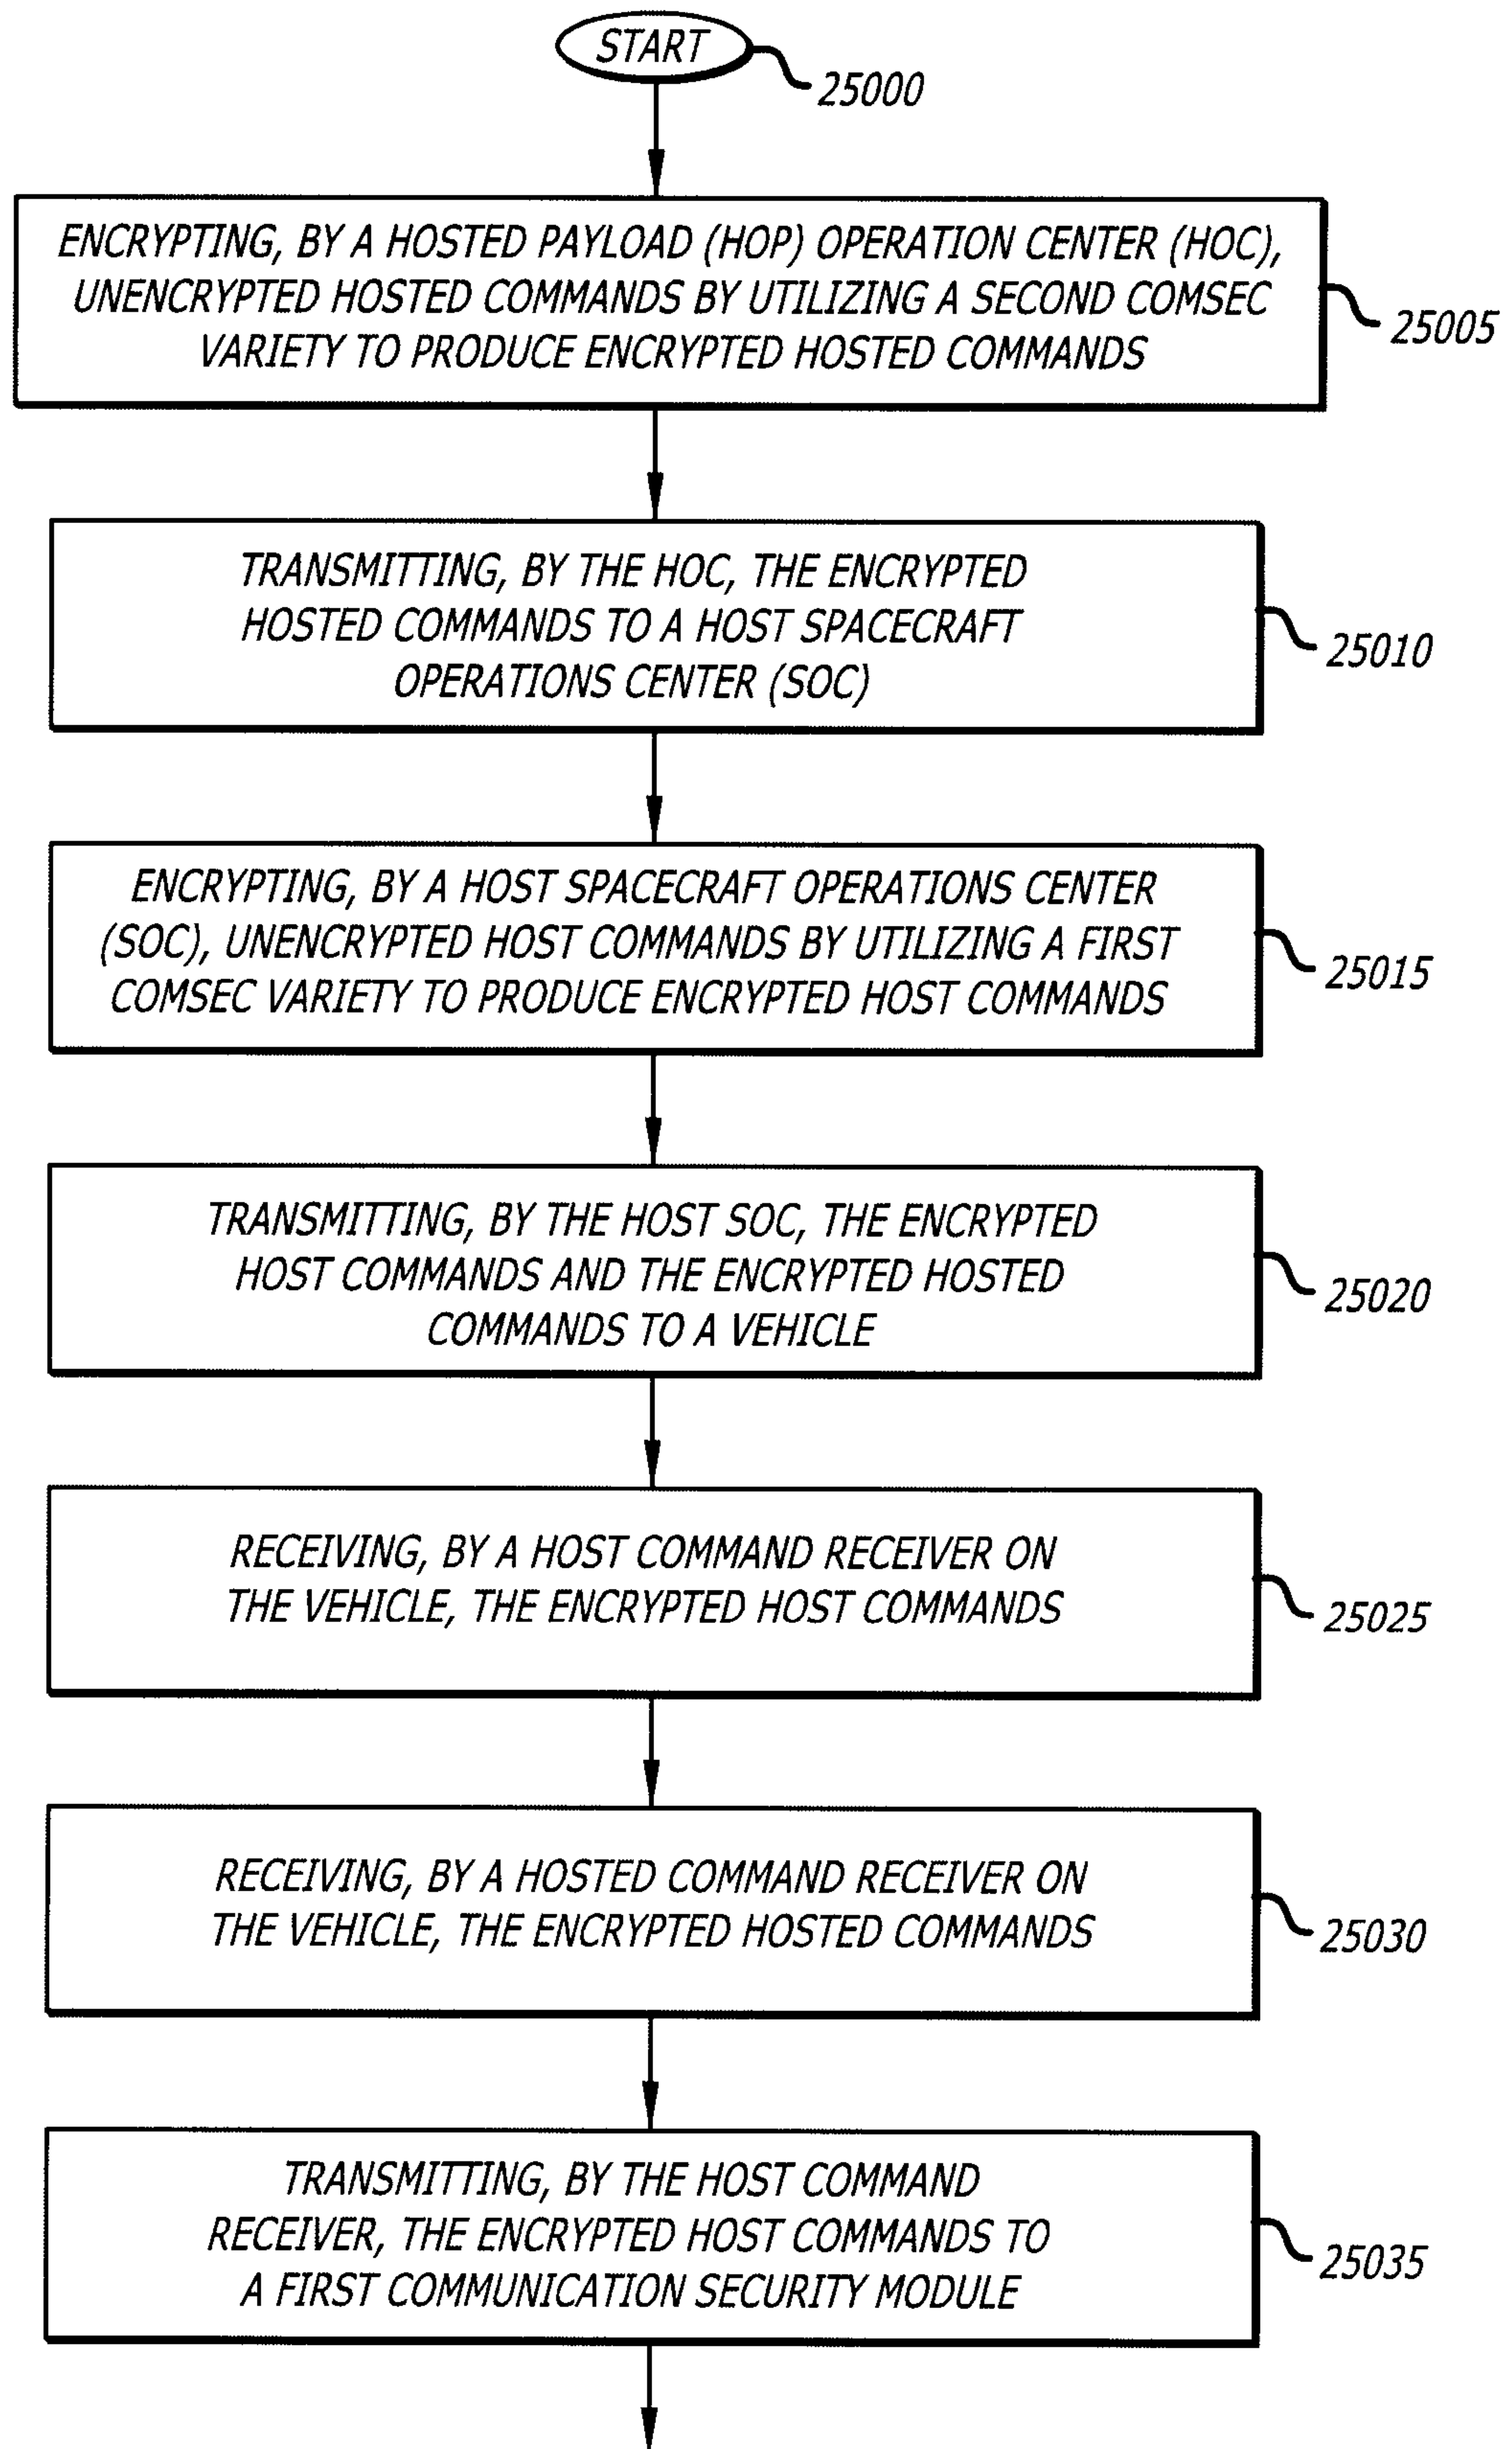


FIG. 25F

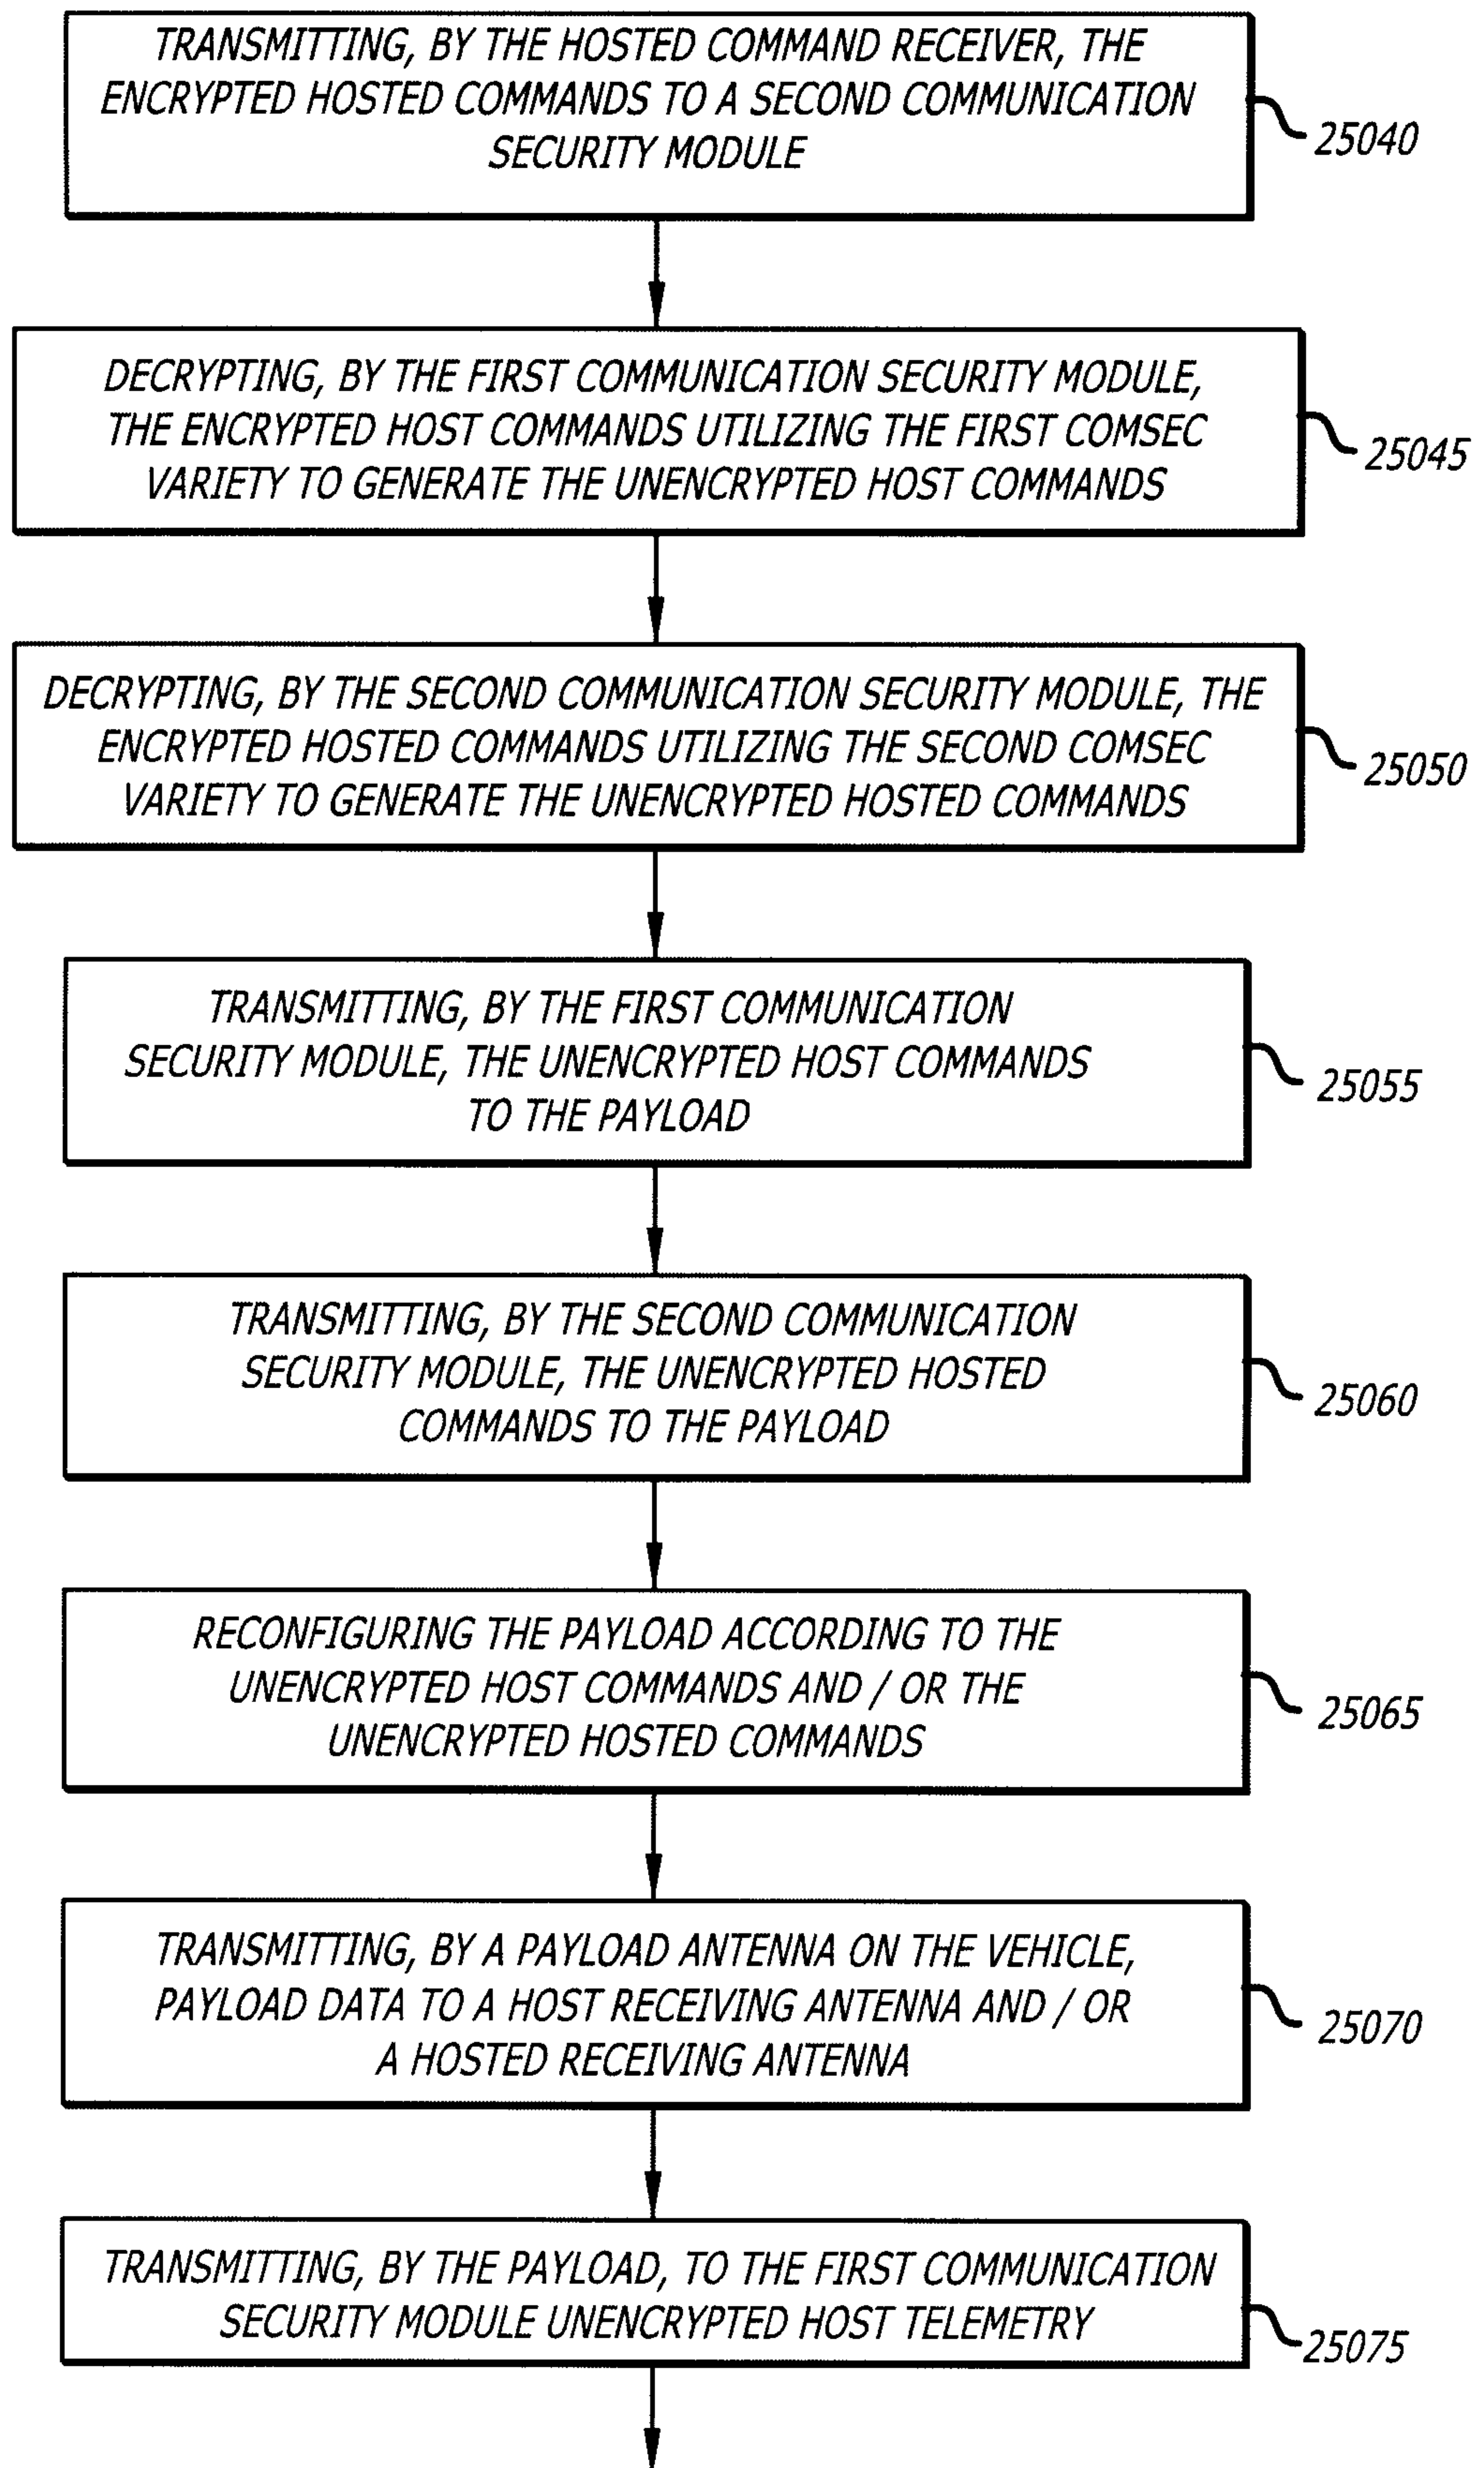


FIG. 25G

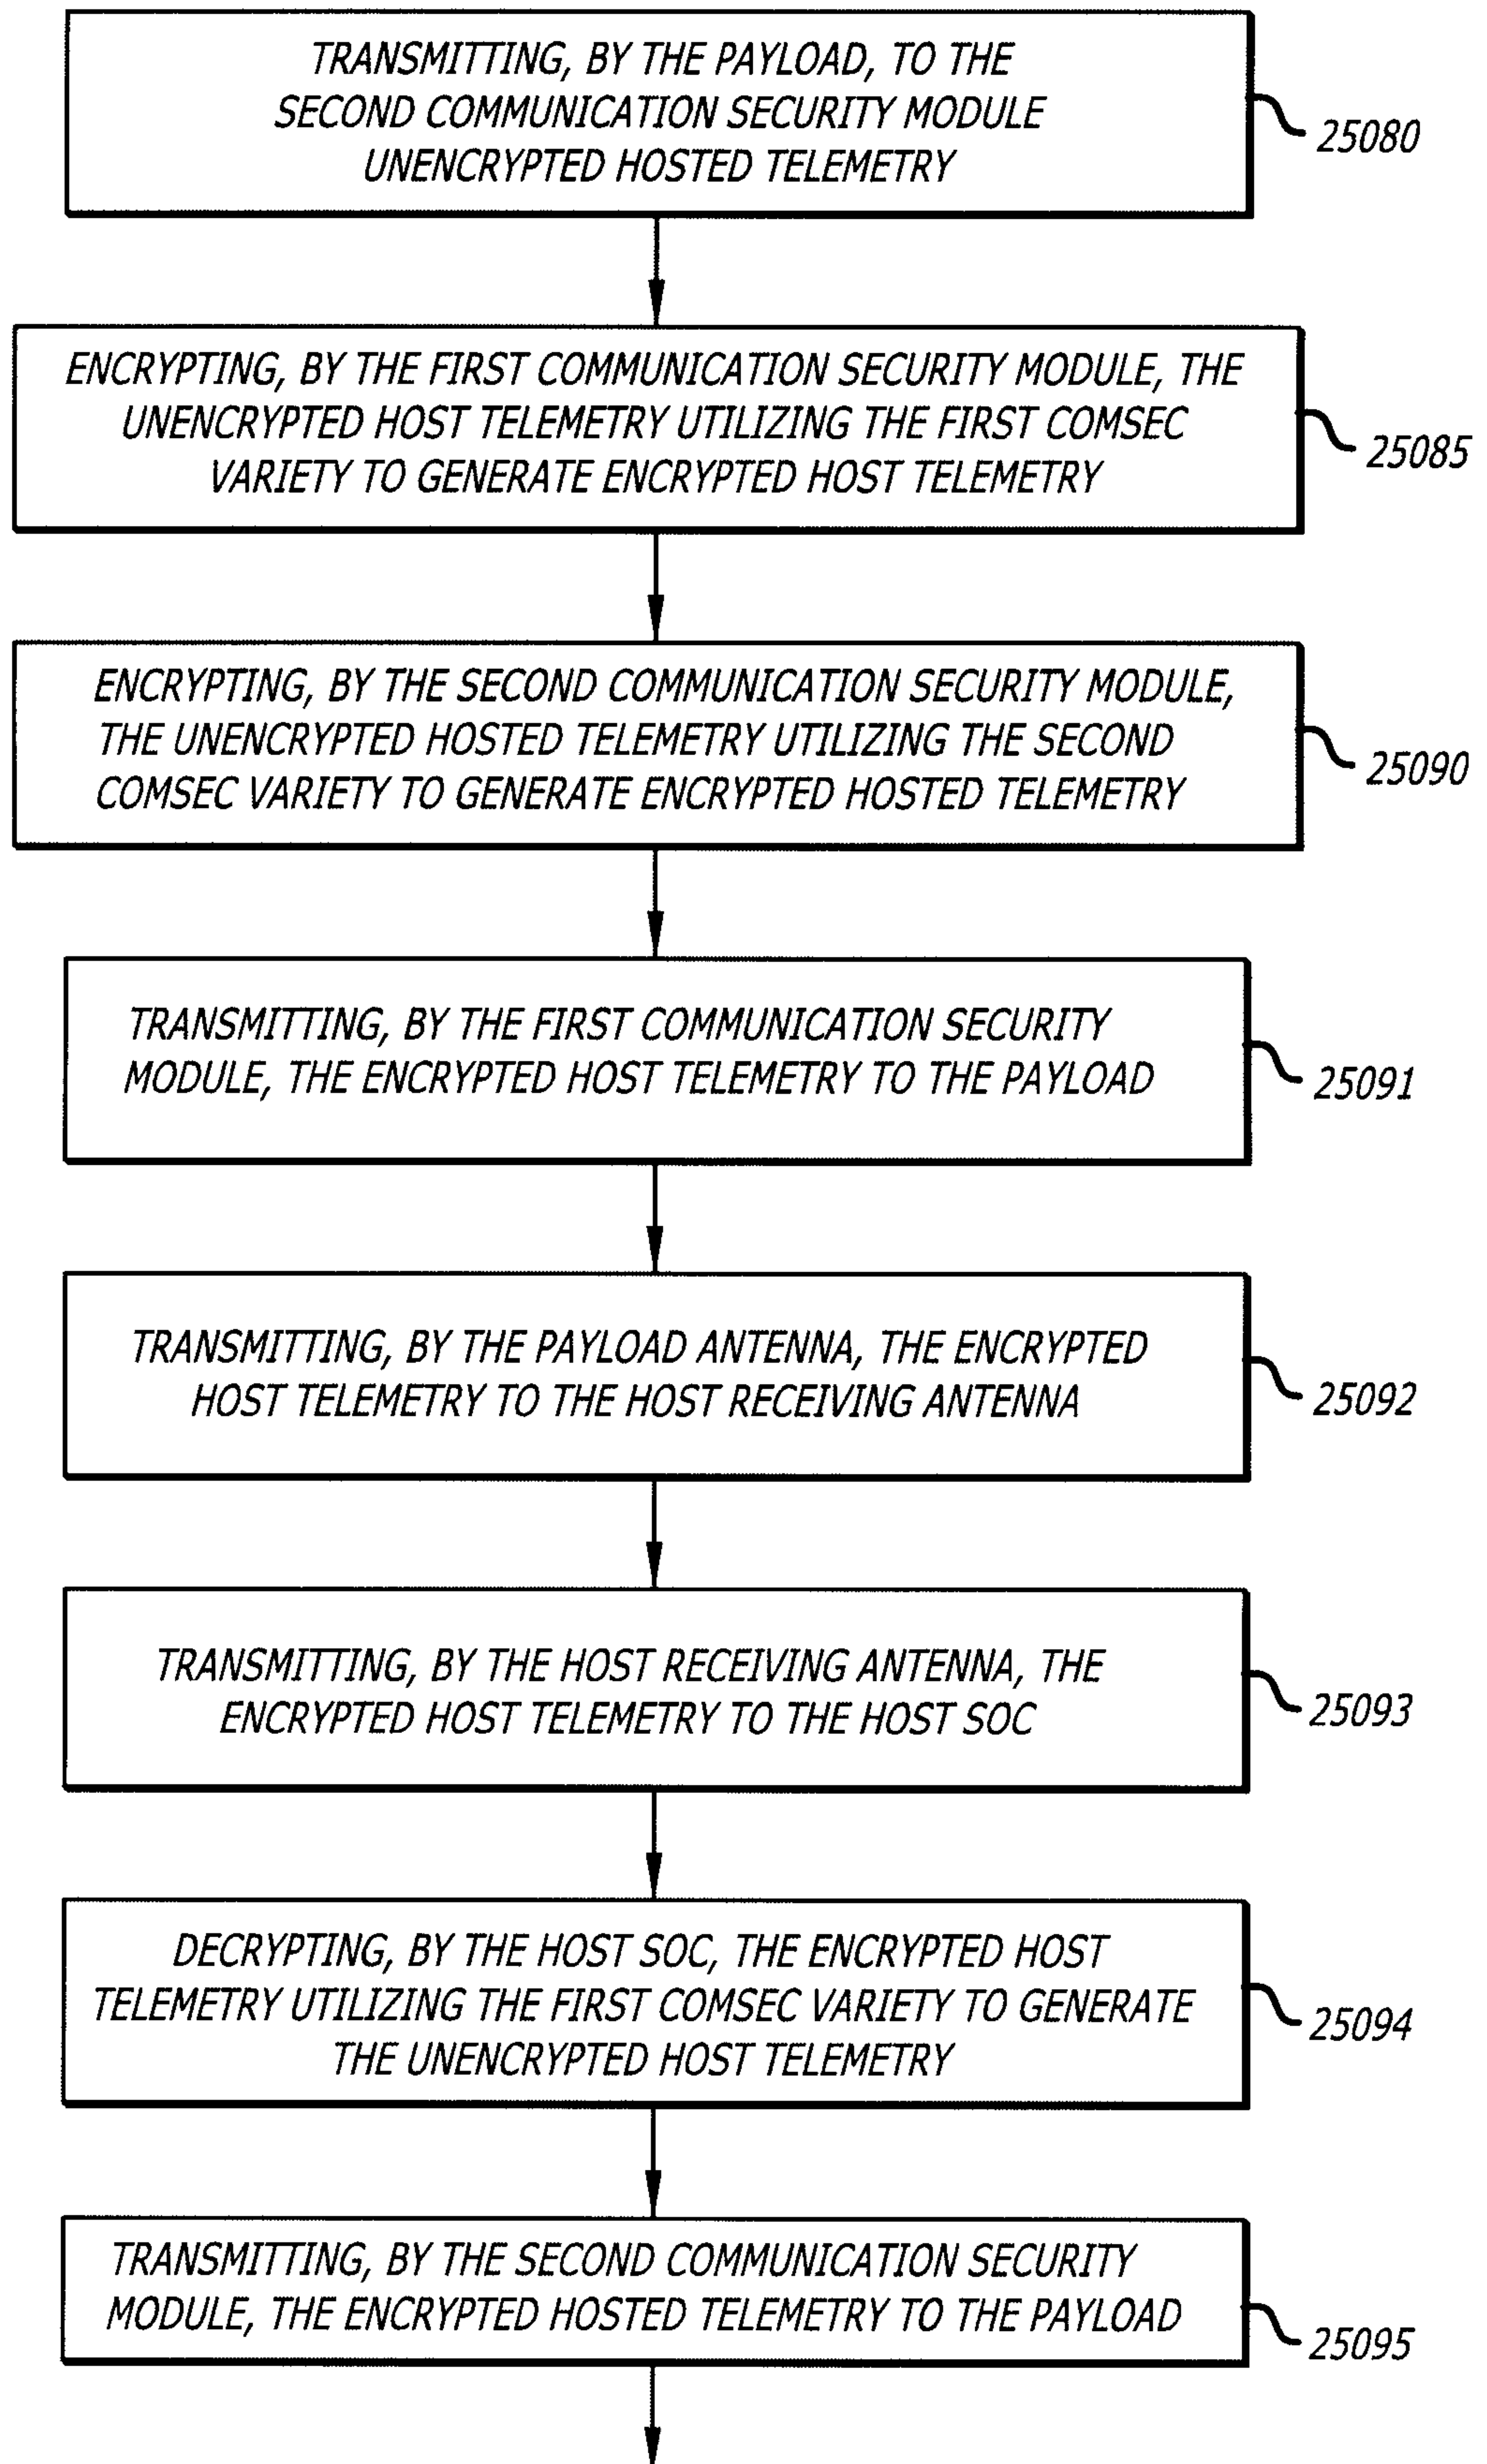
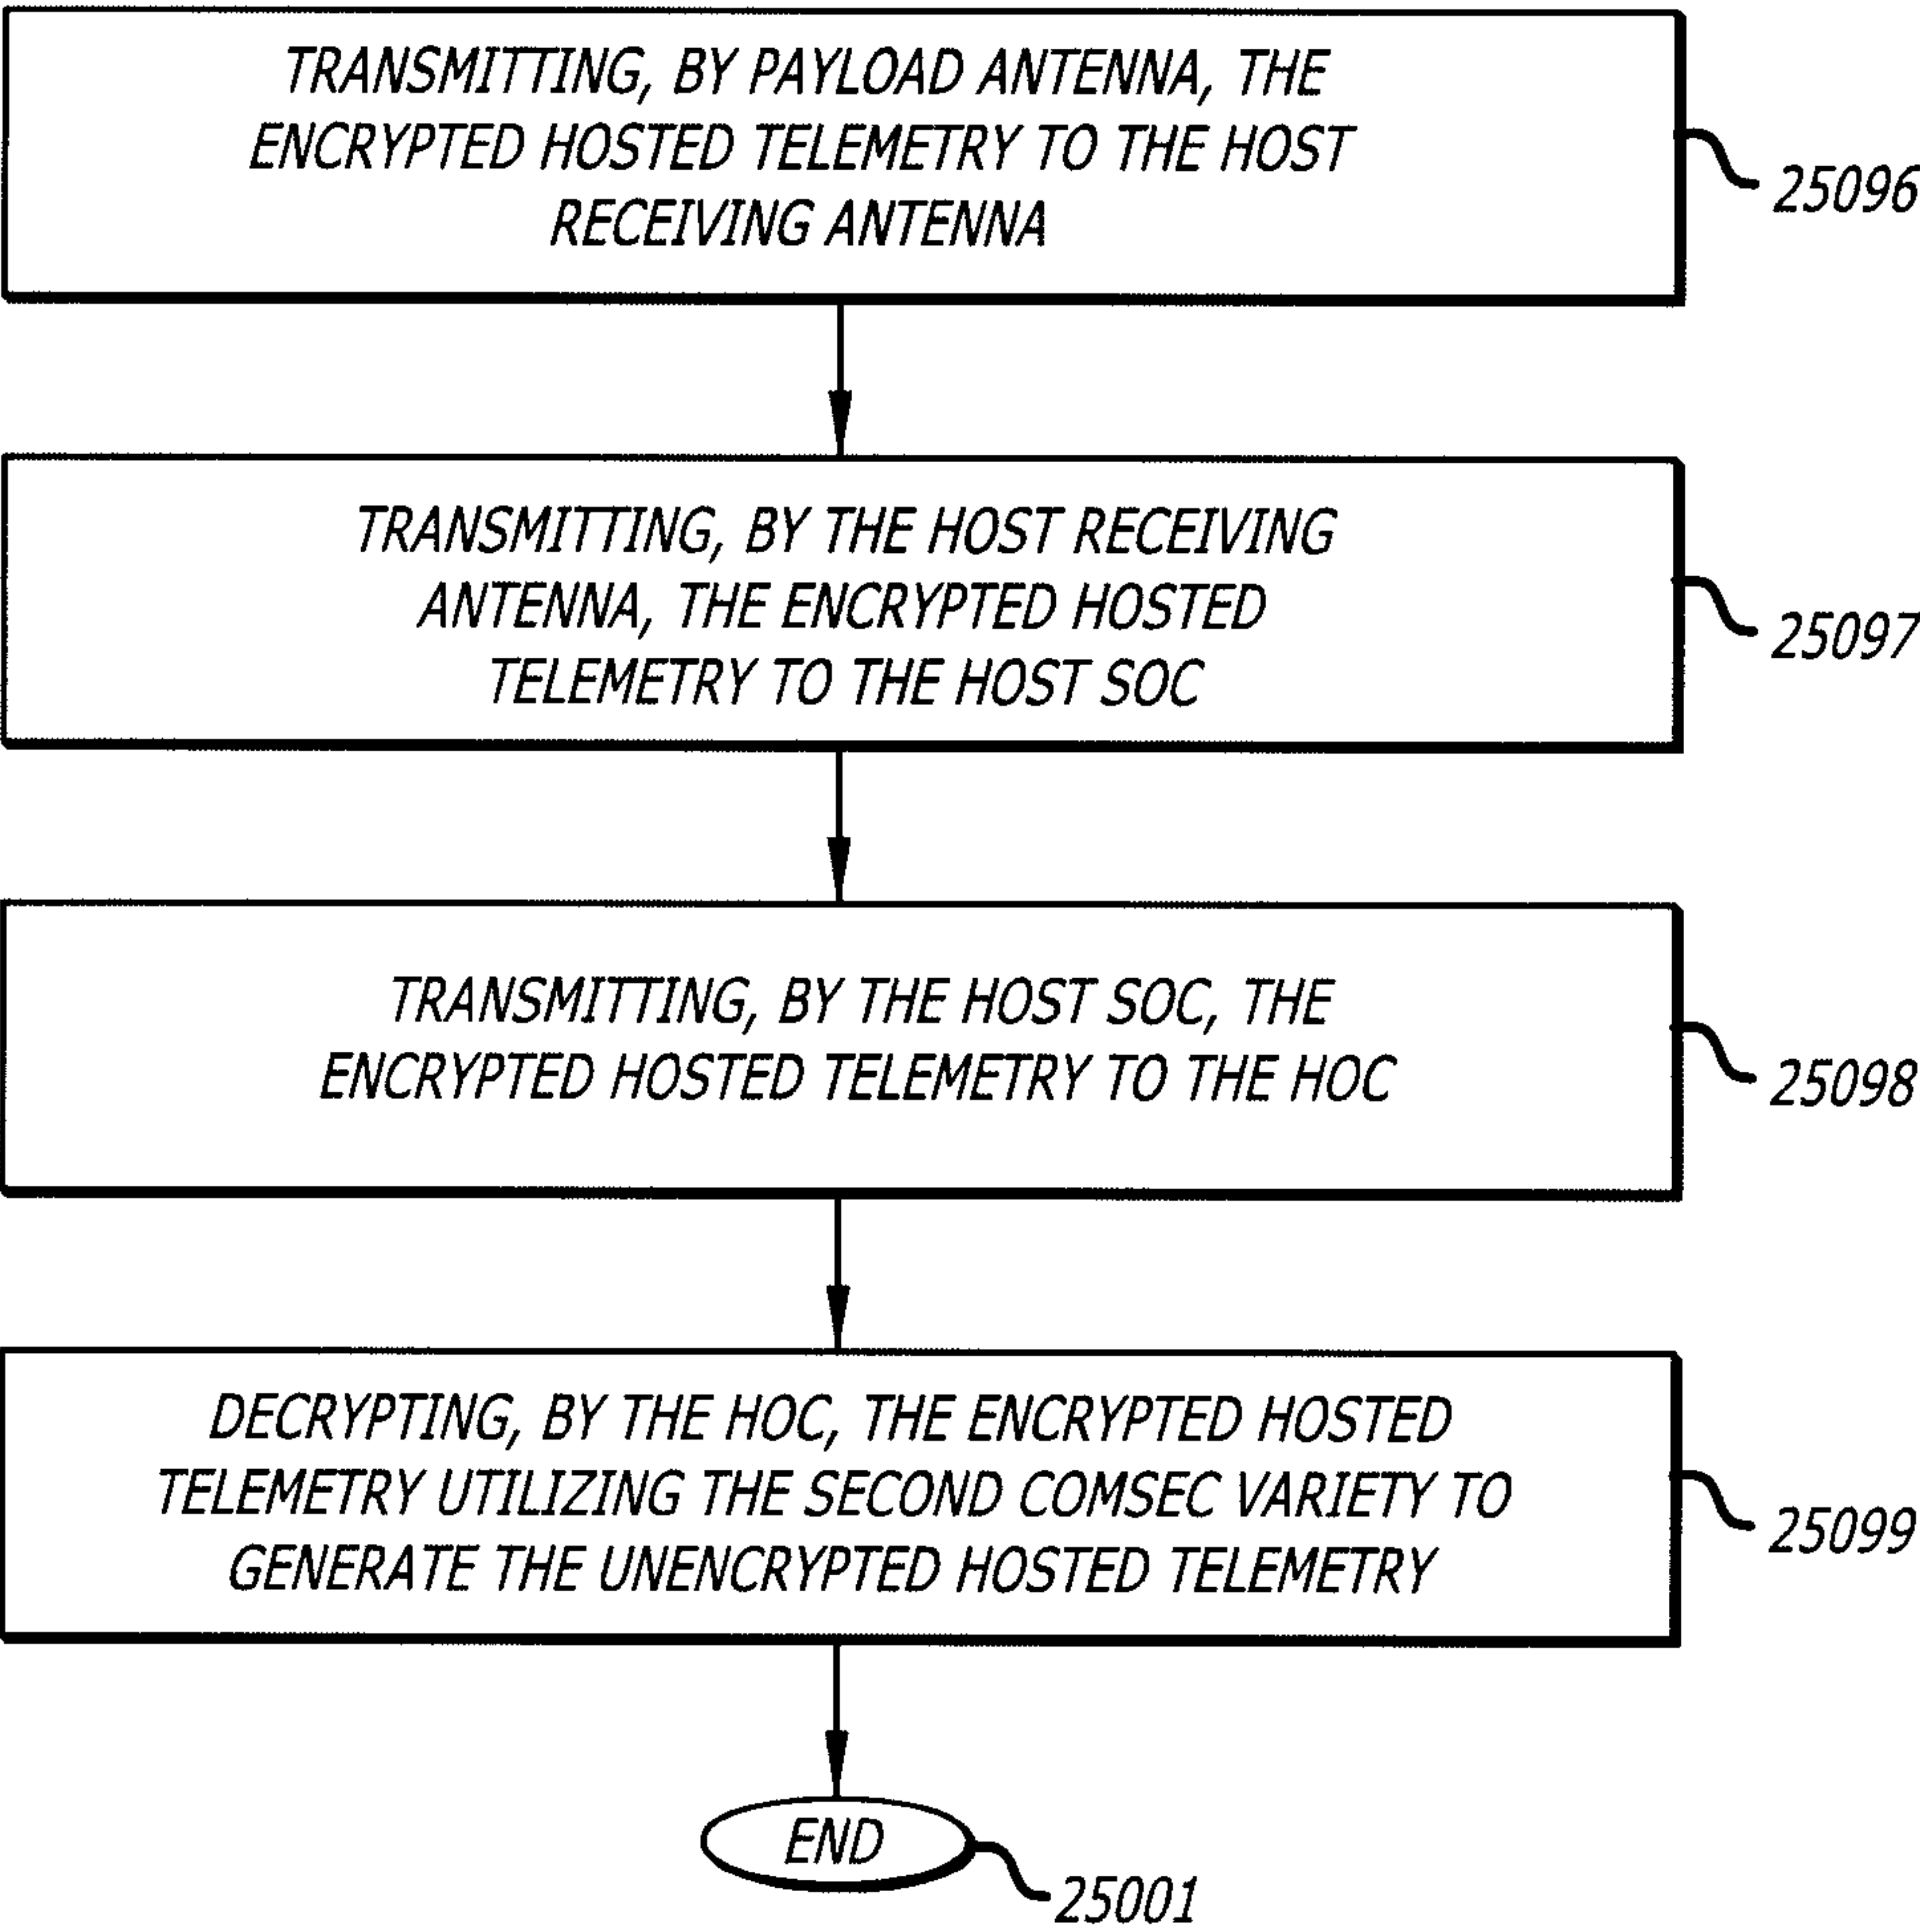
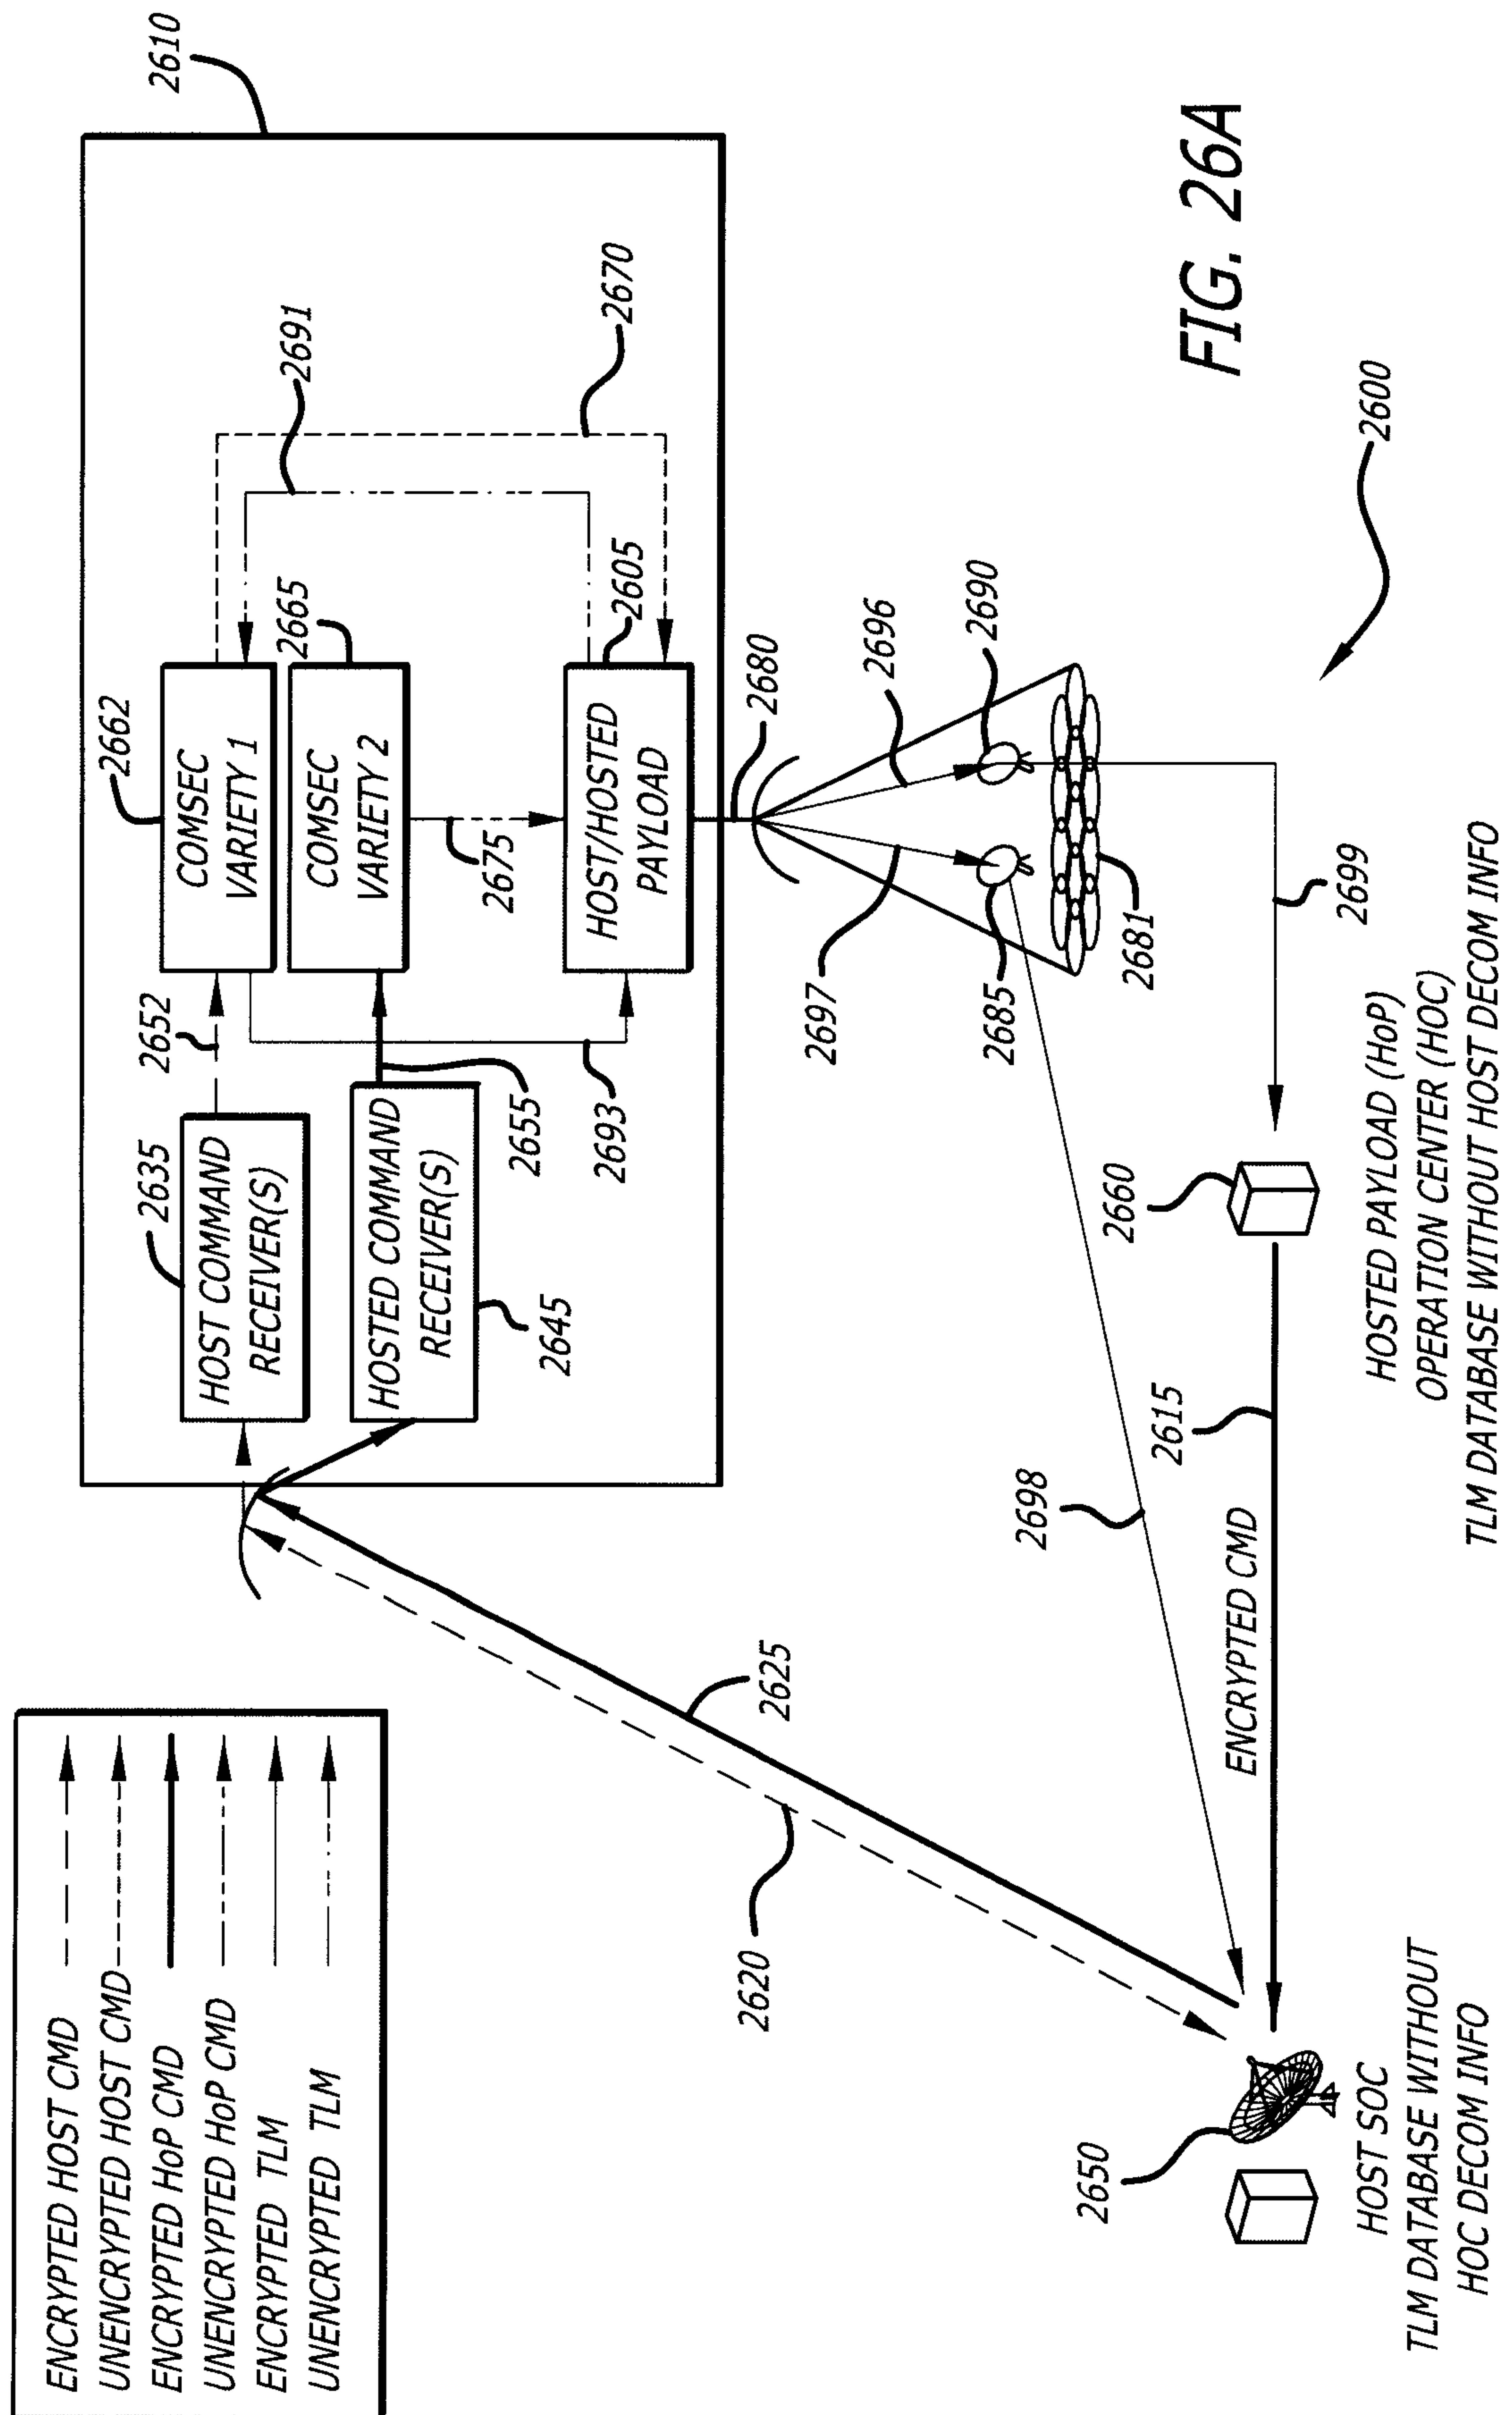


FIG. 25H





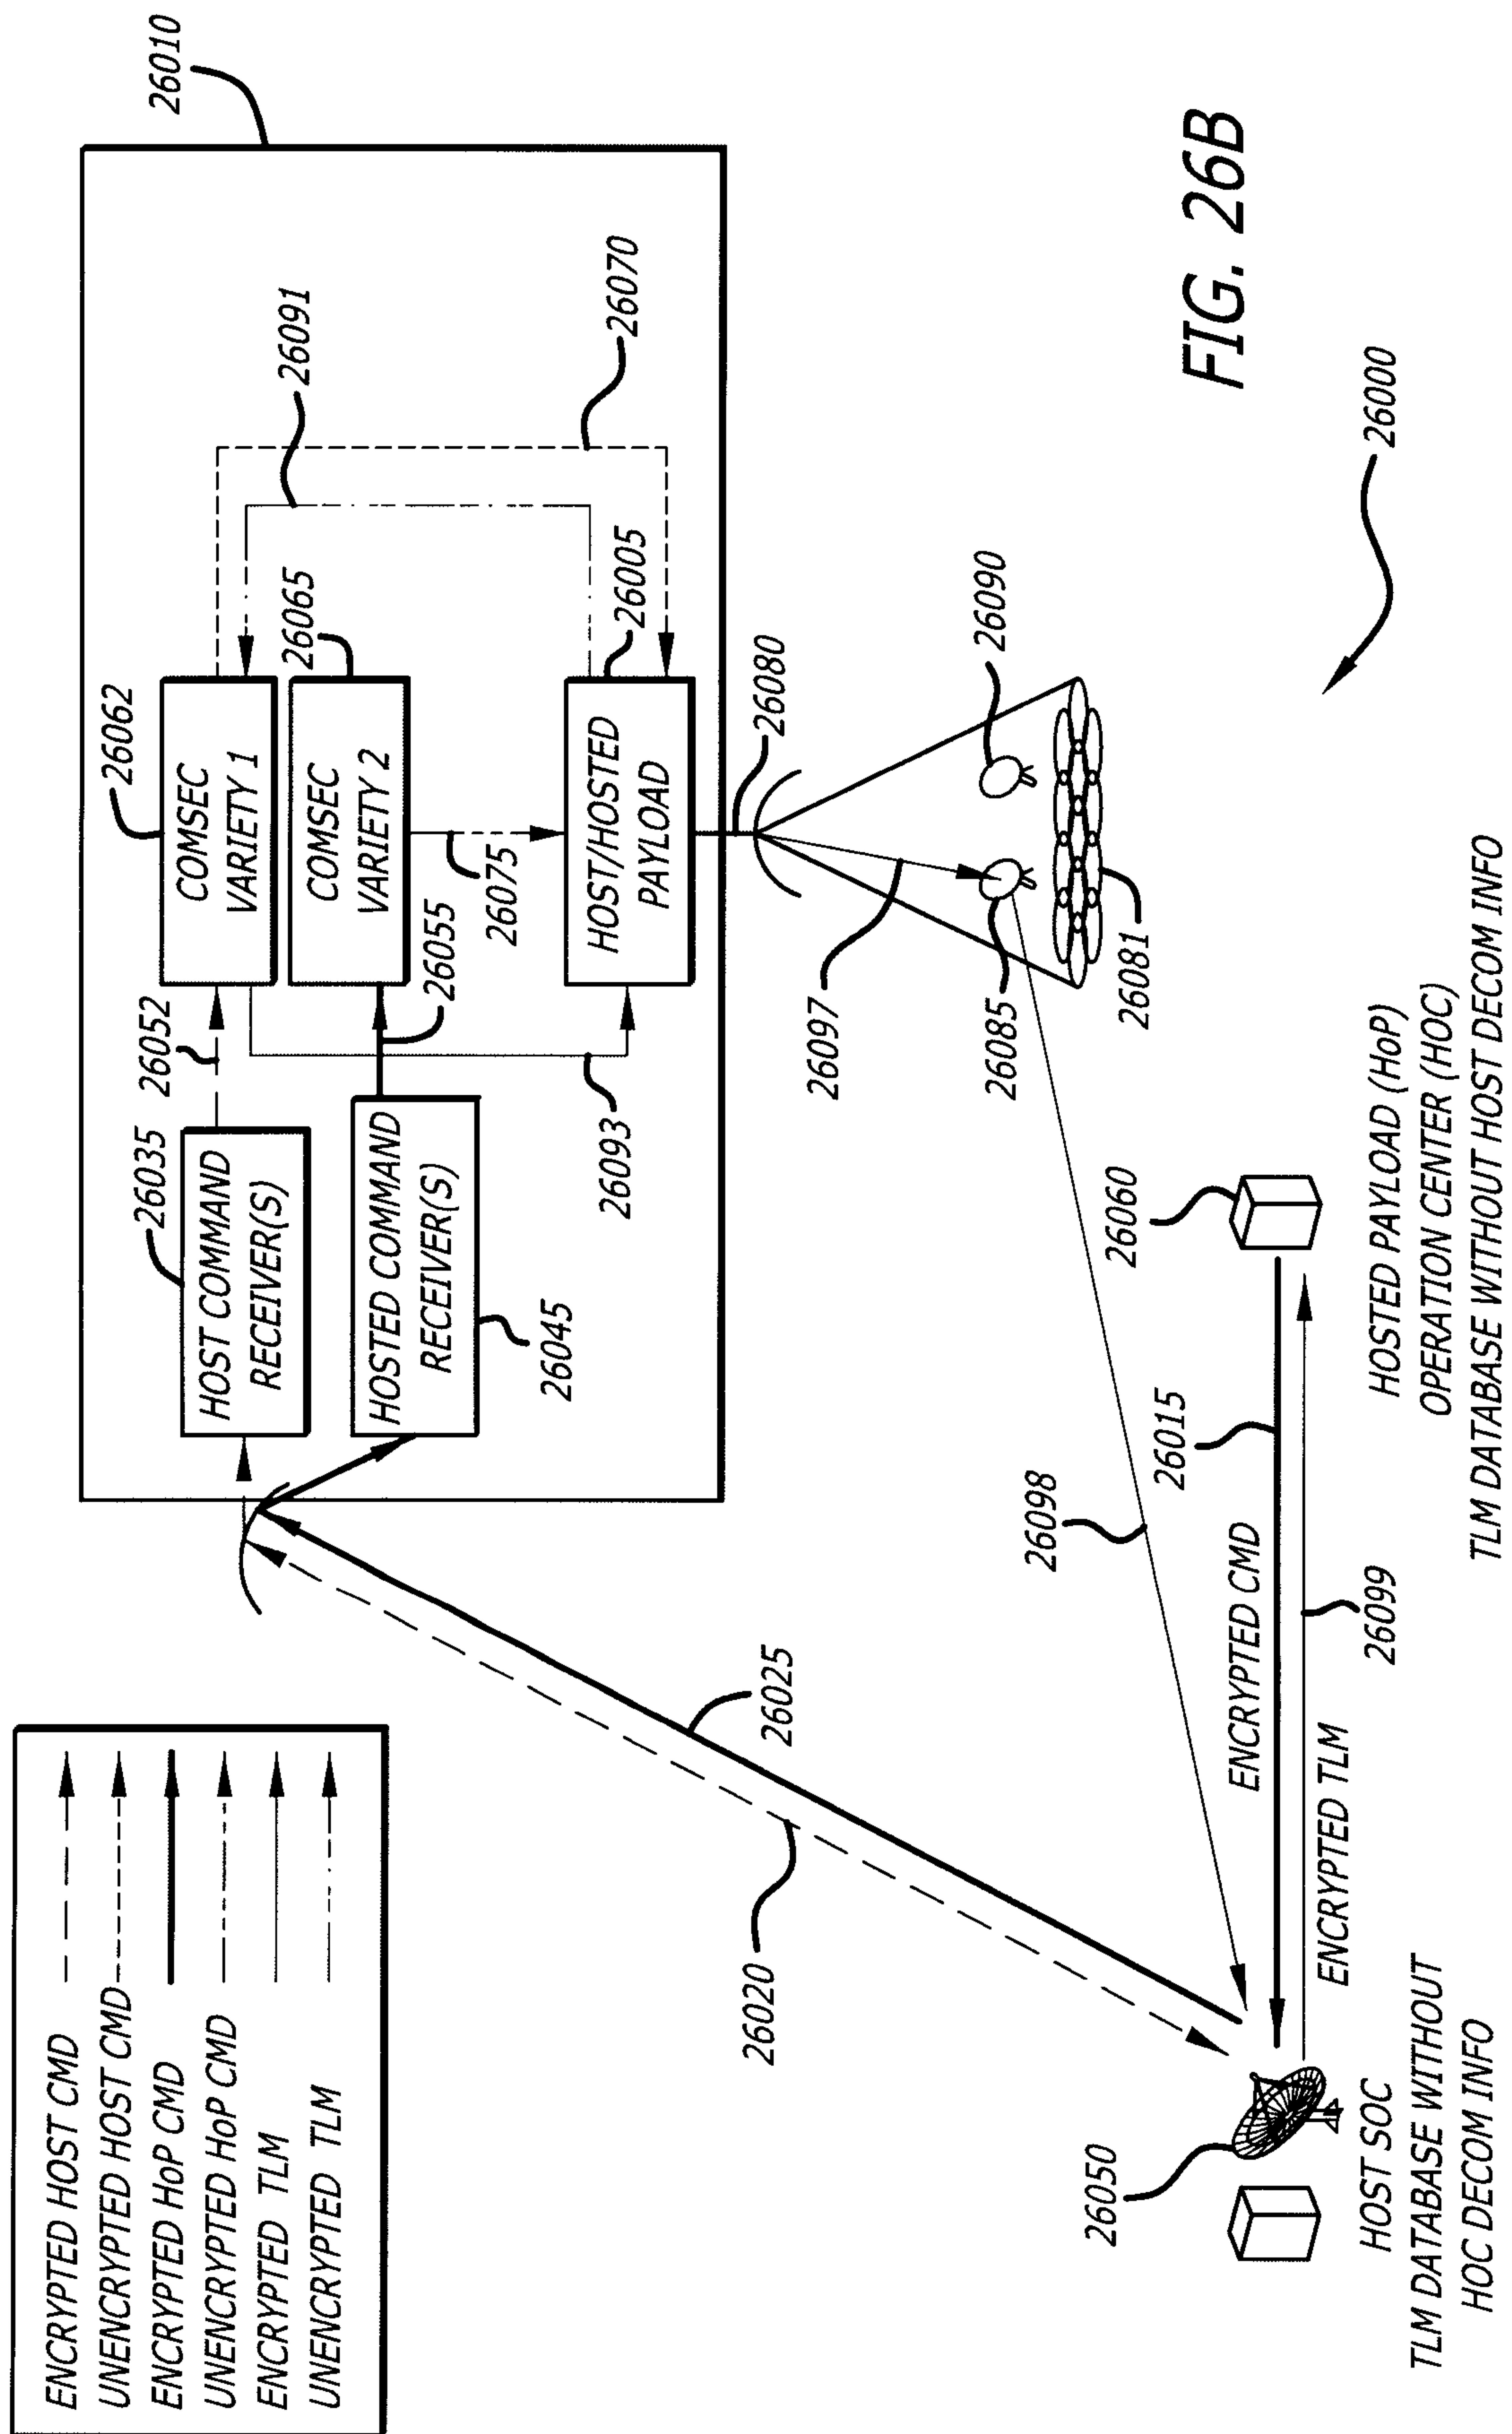


FIG. 27A

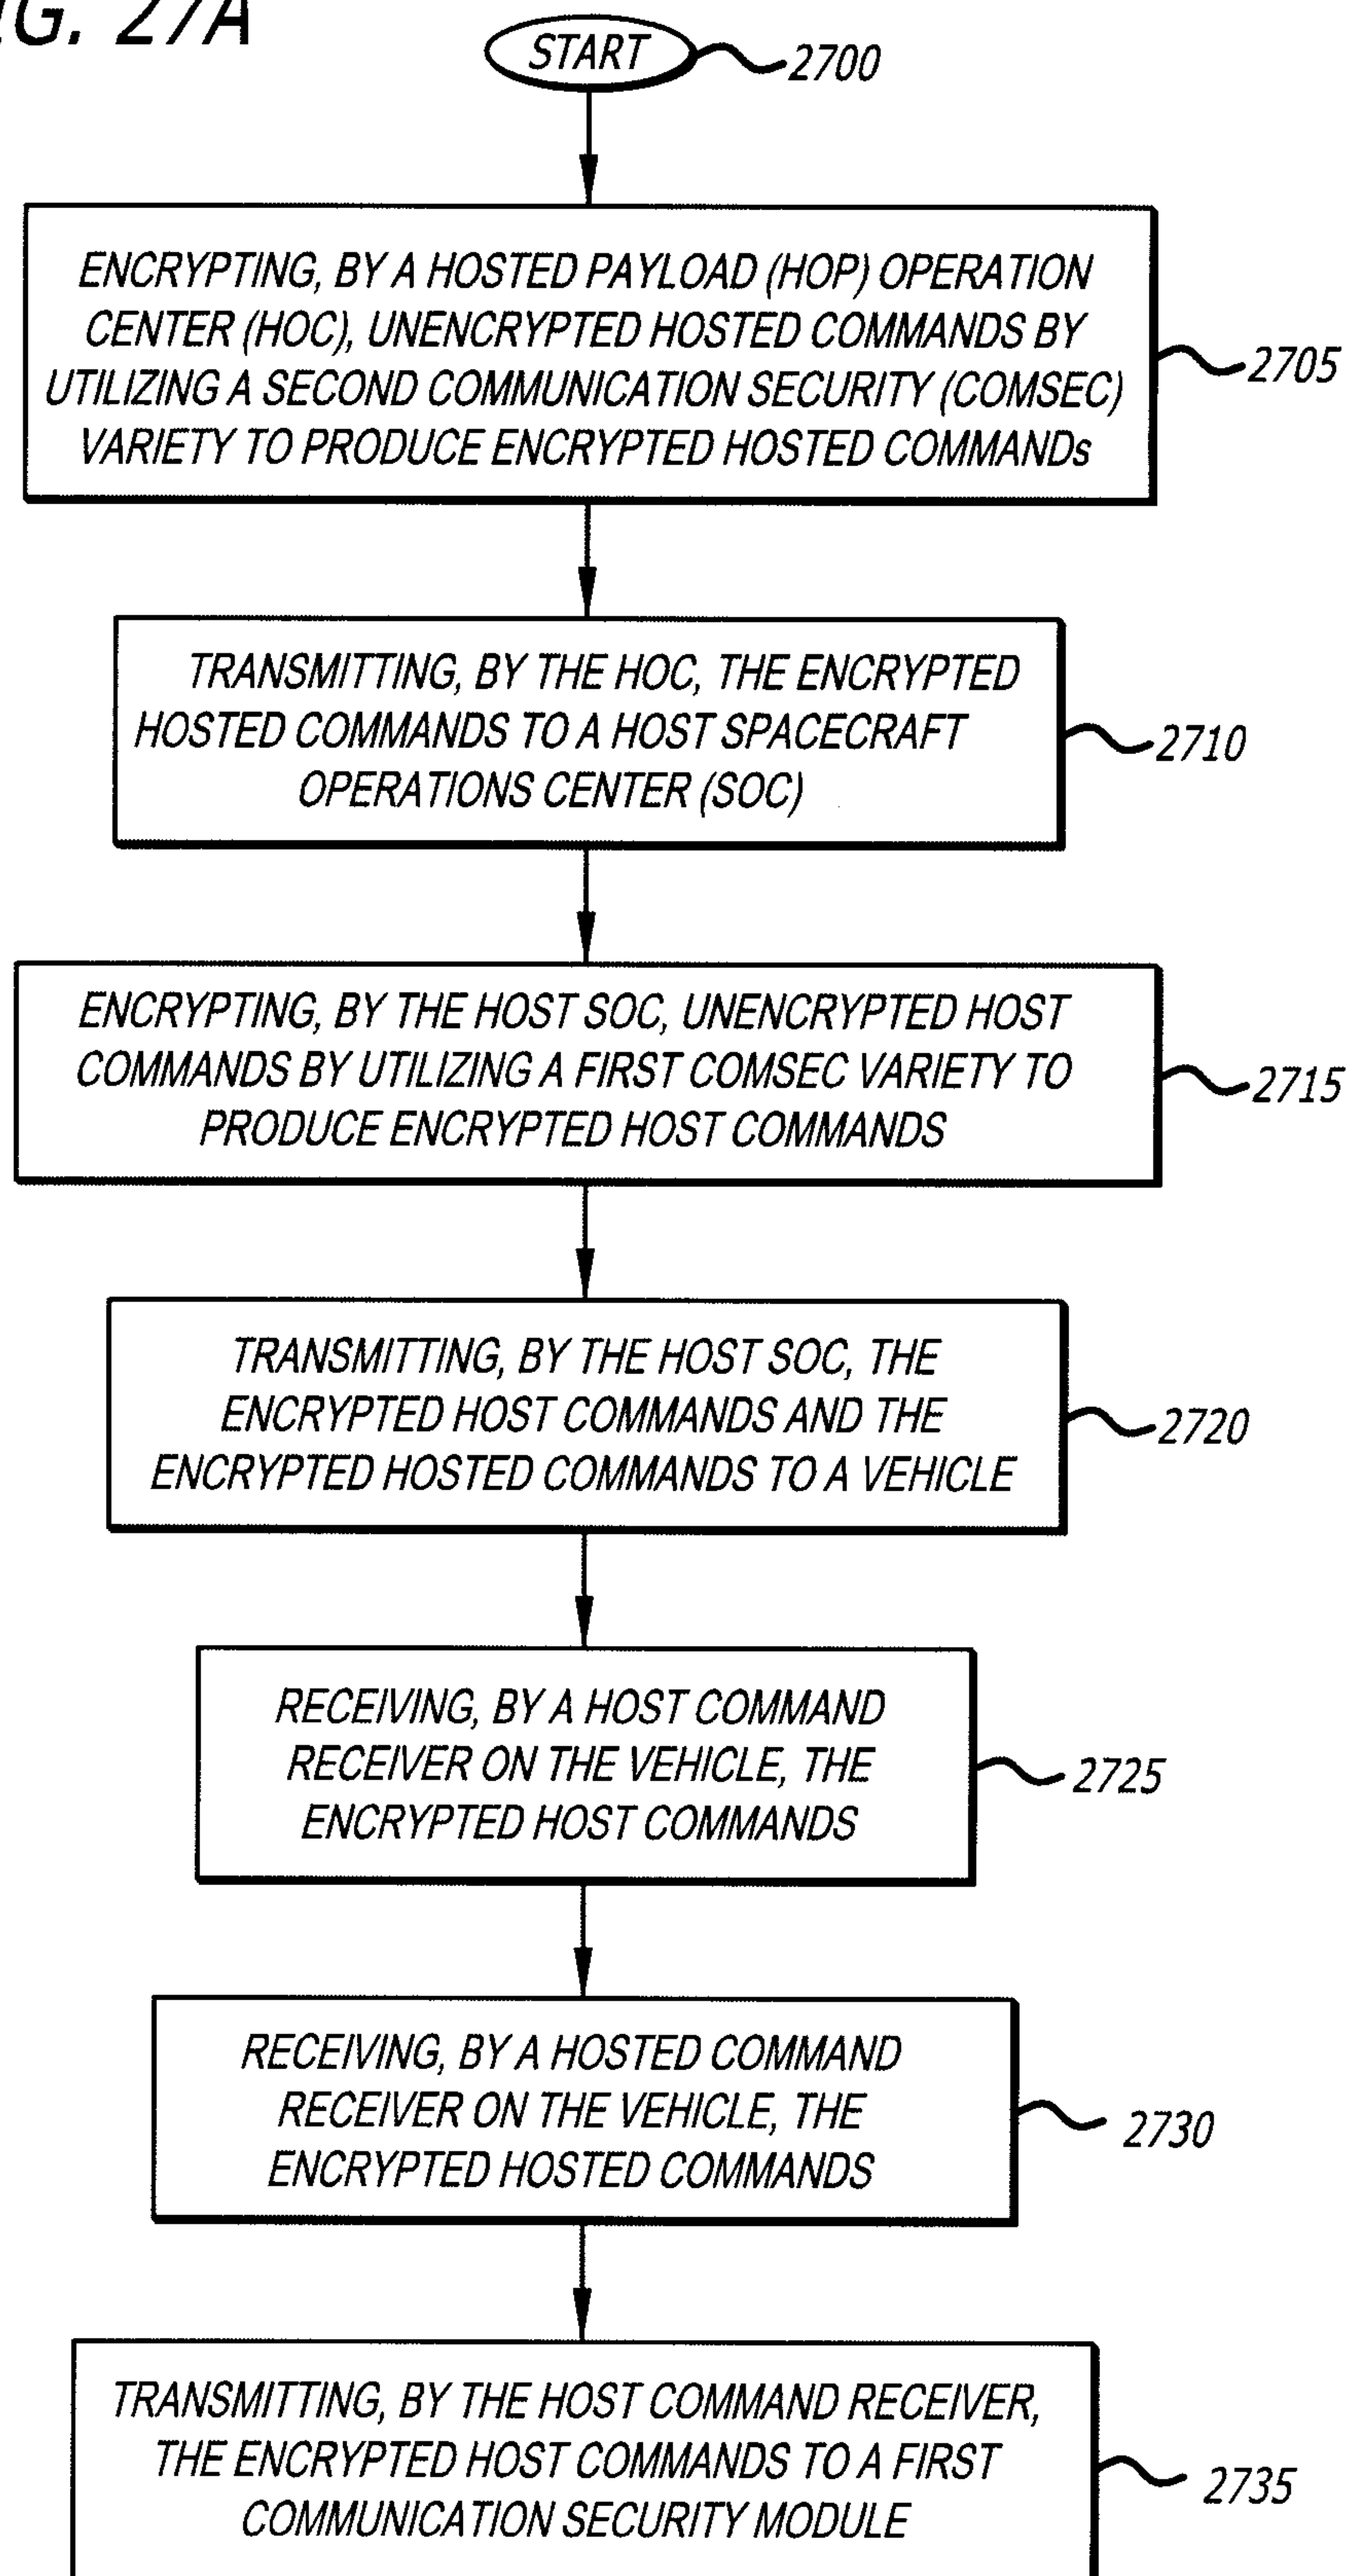


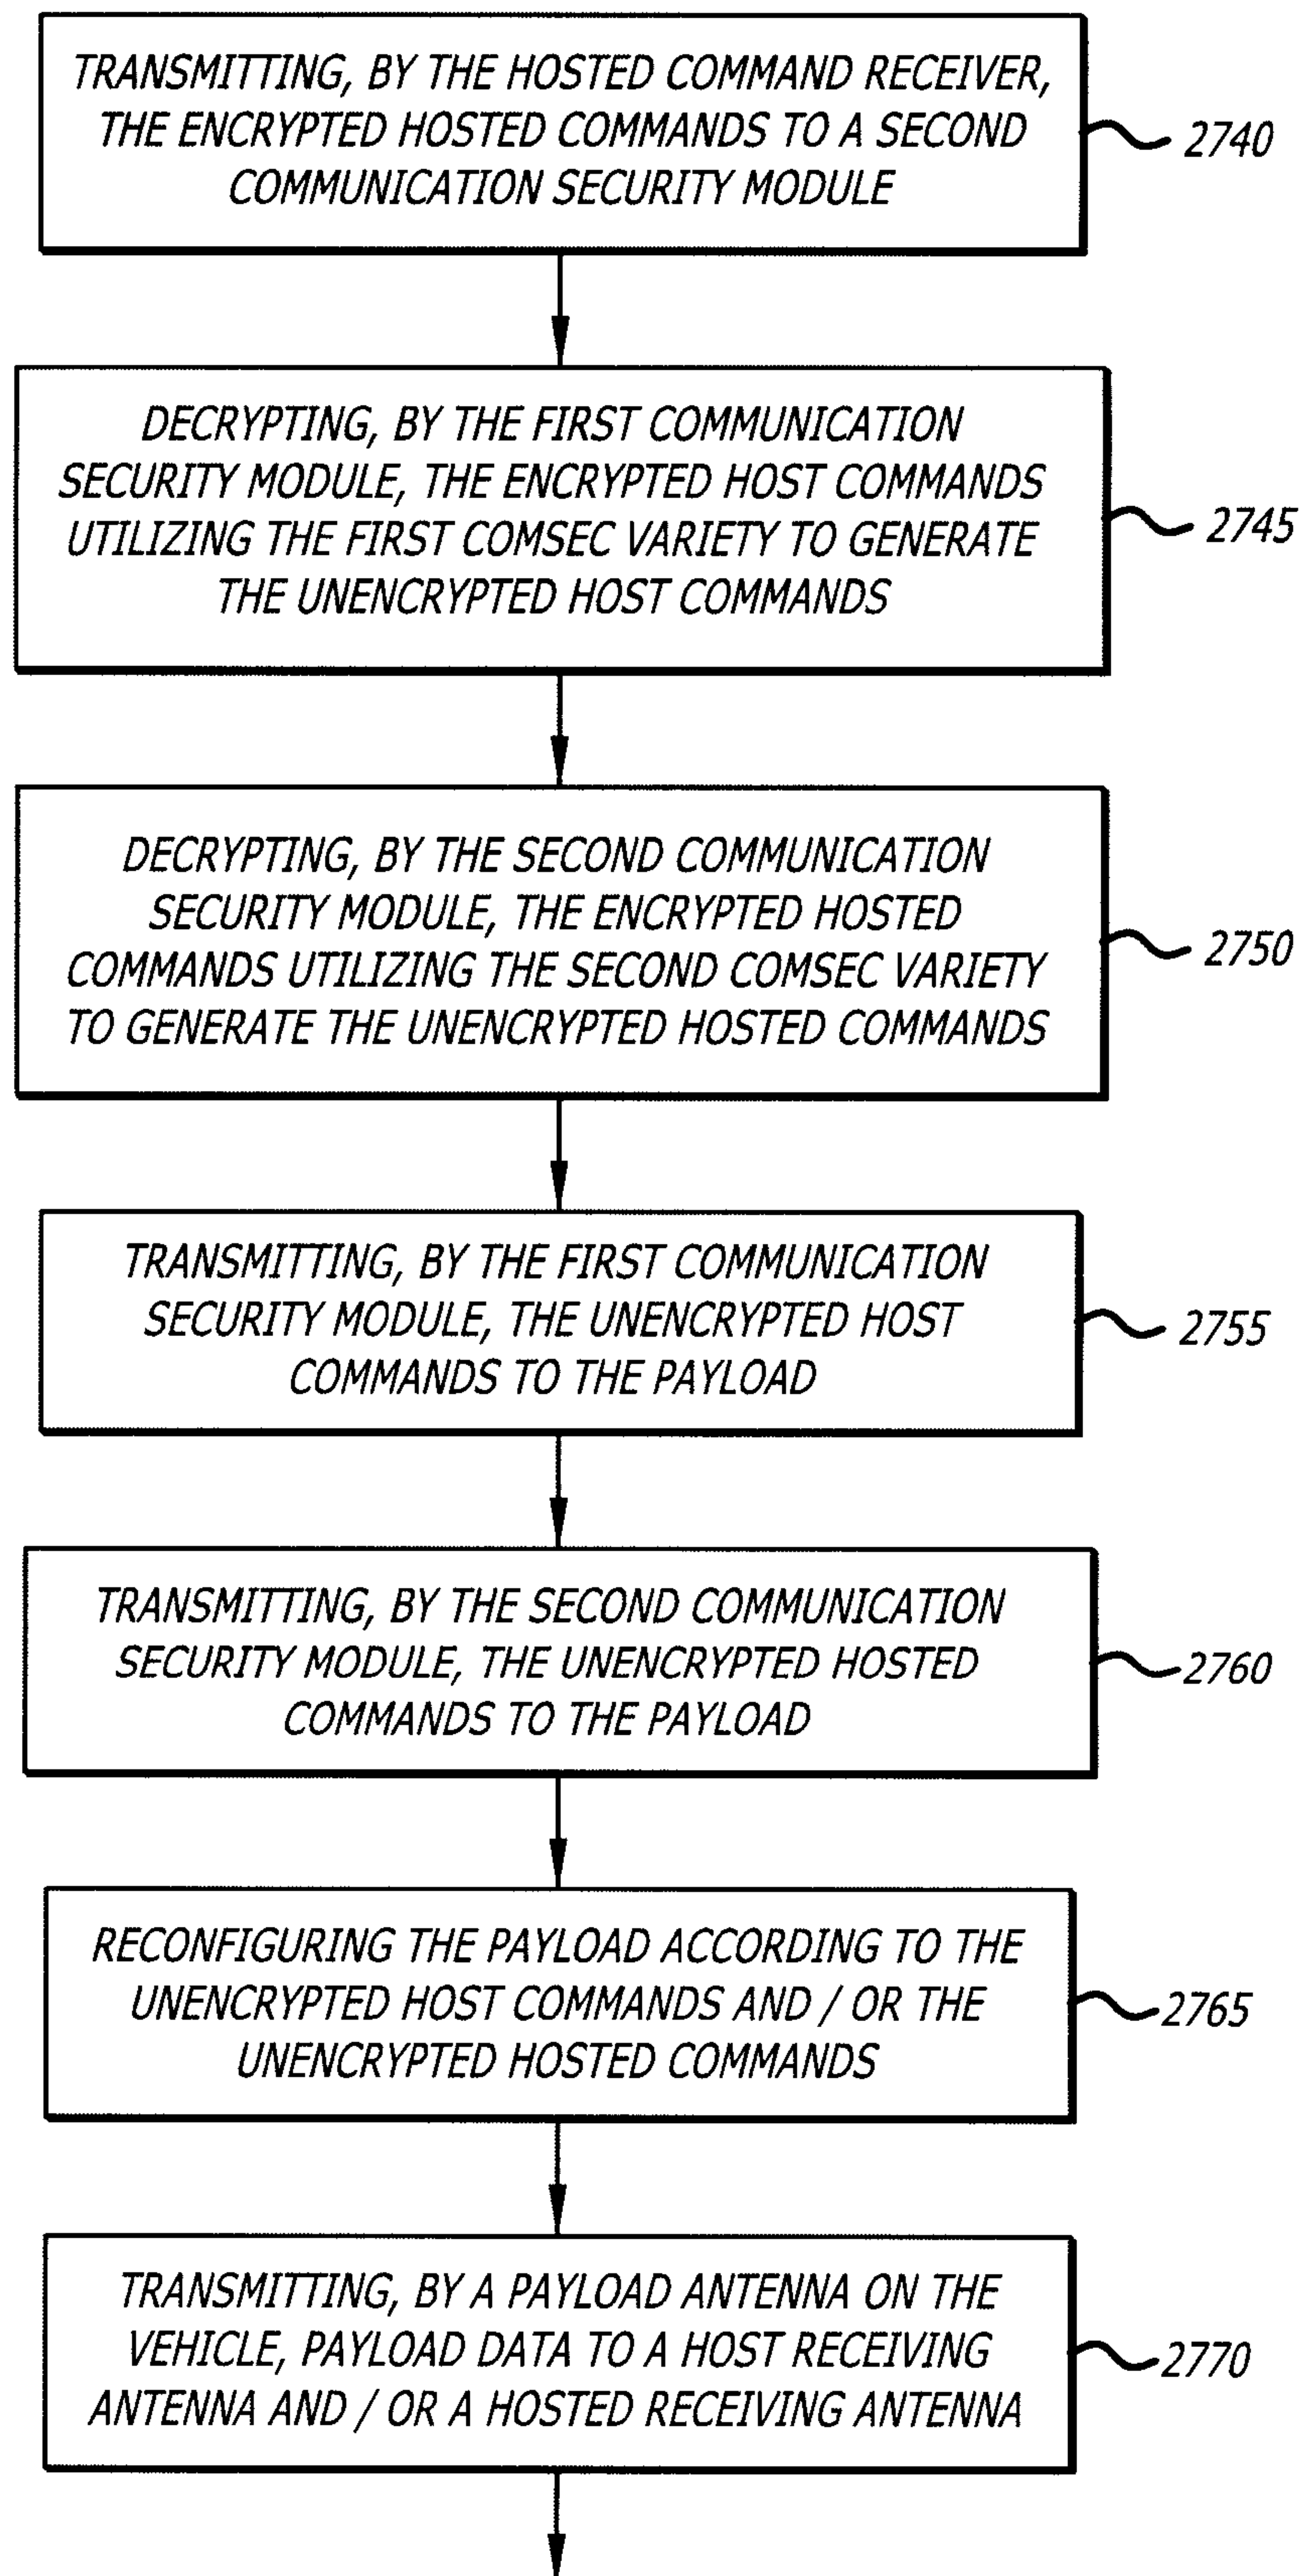
FIG. 27B

FIG. 27C

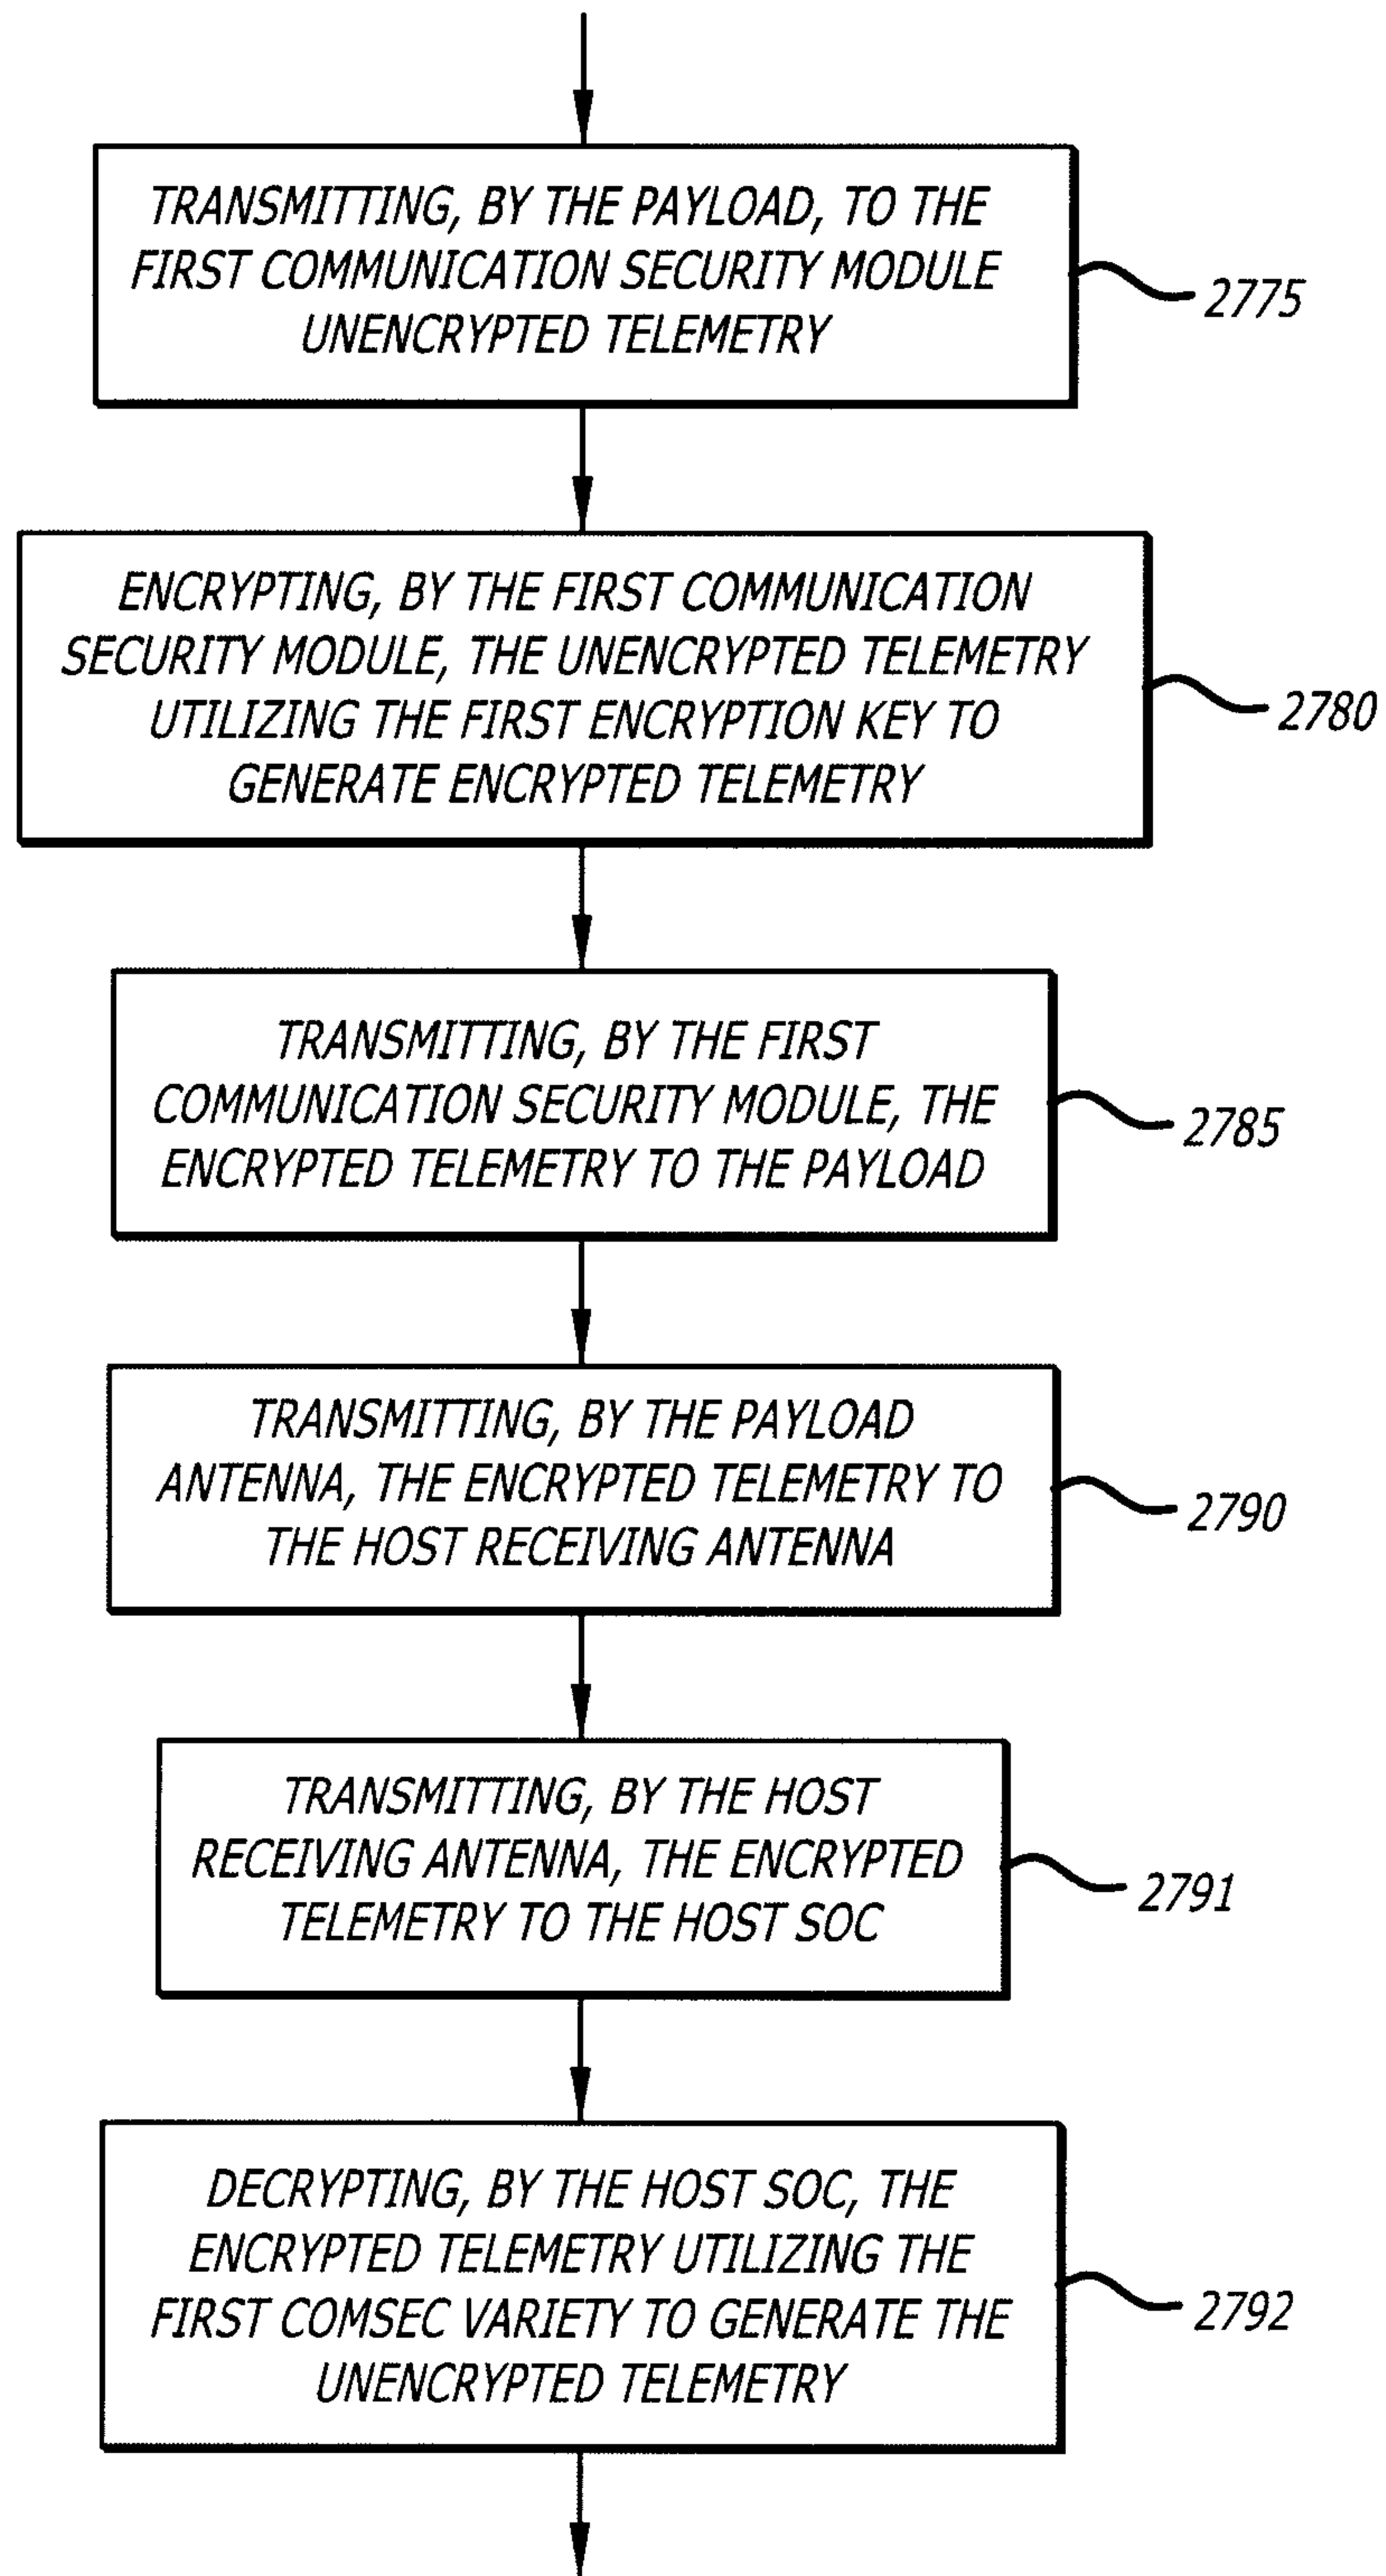


FIG. 27D

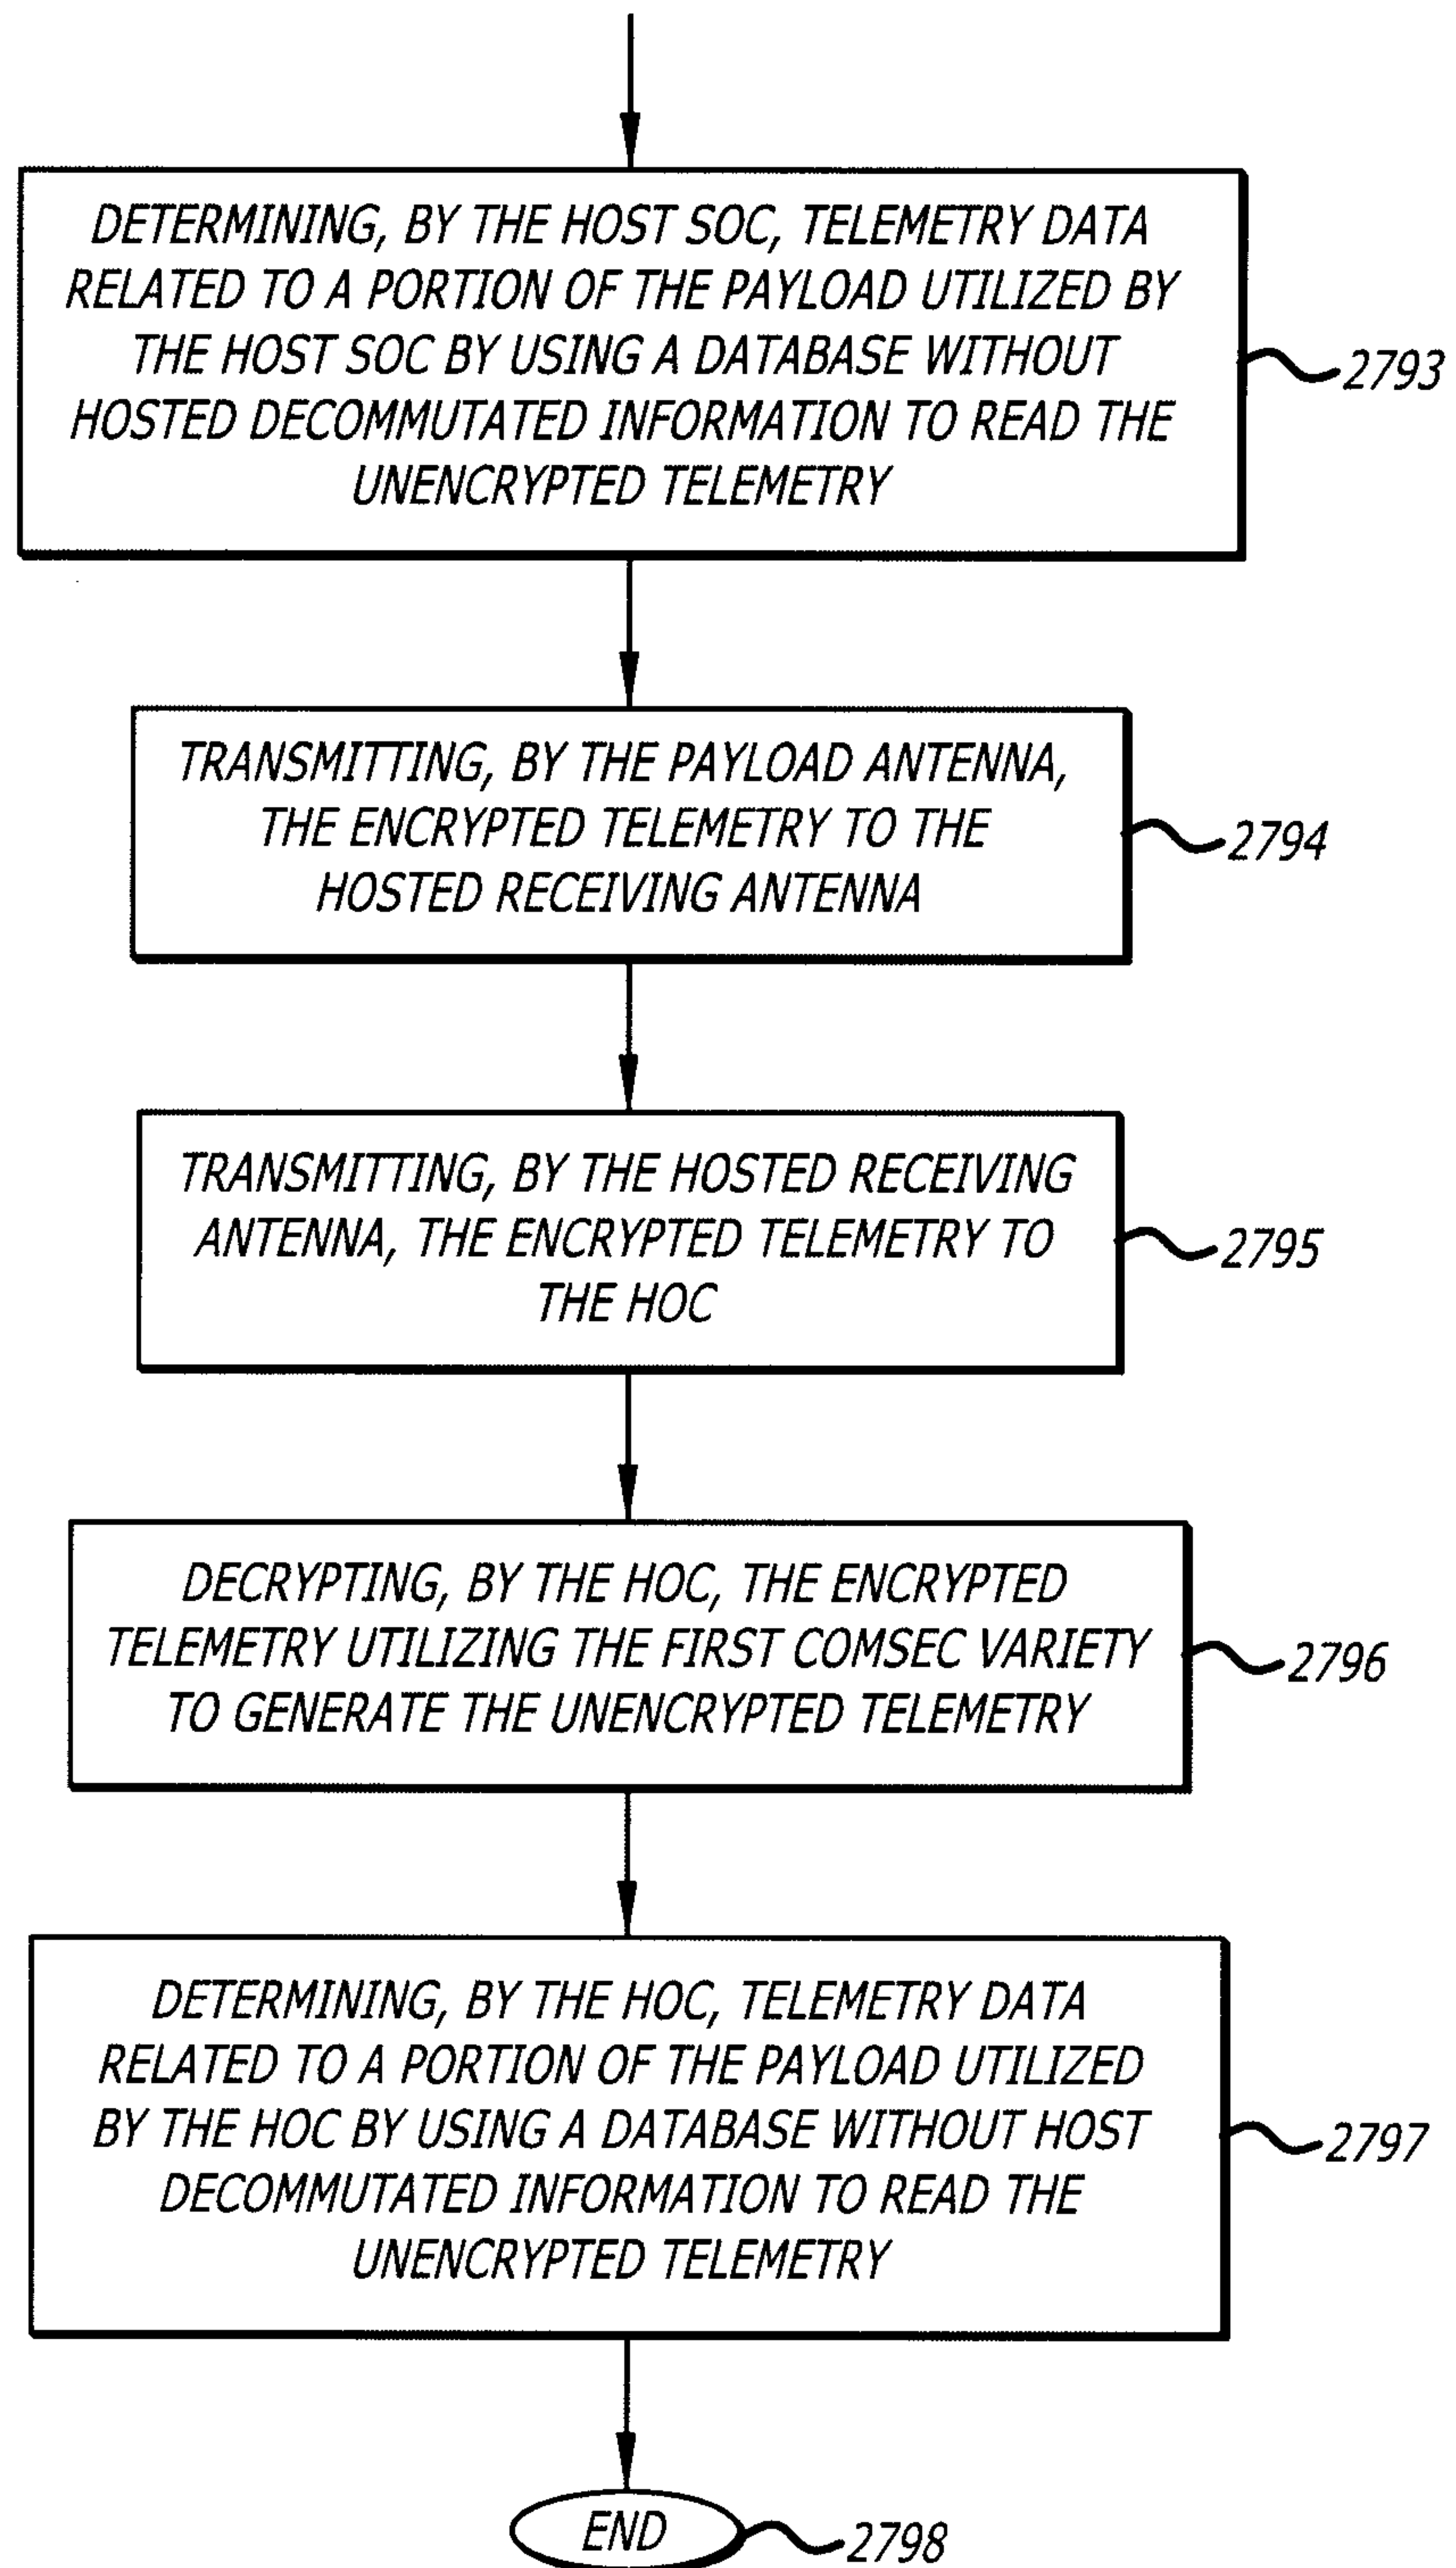


FIG. 27E

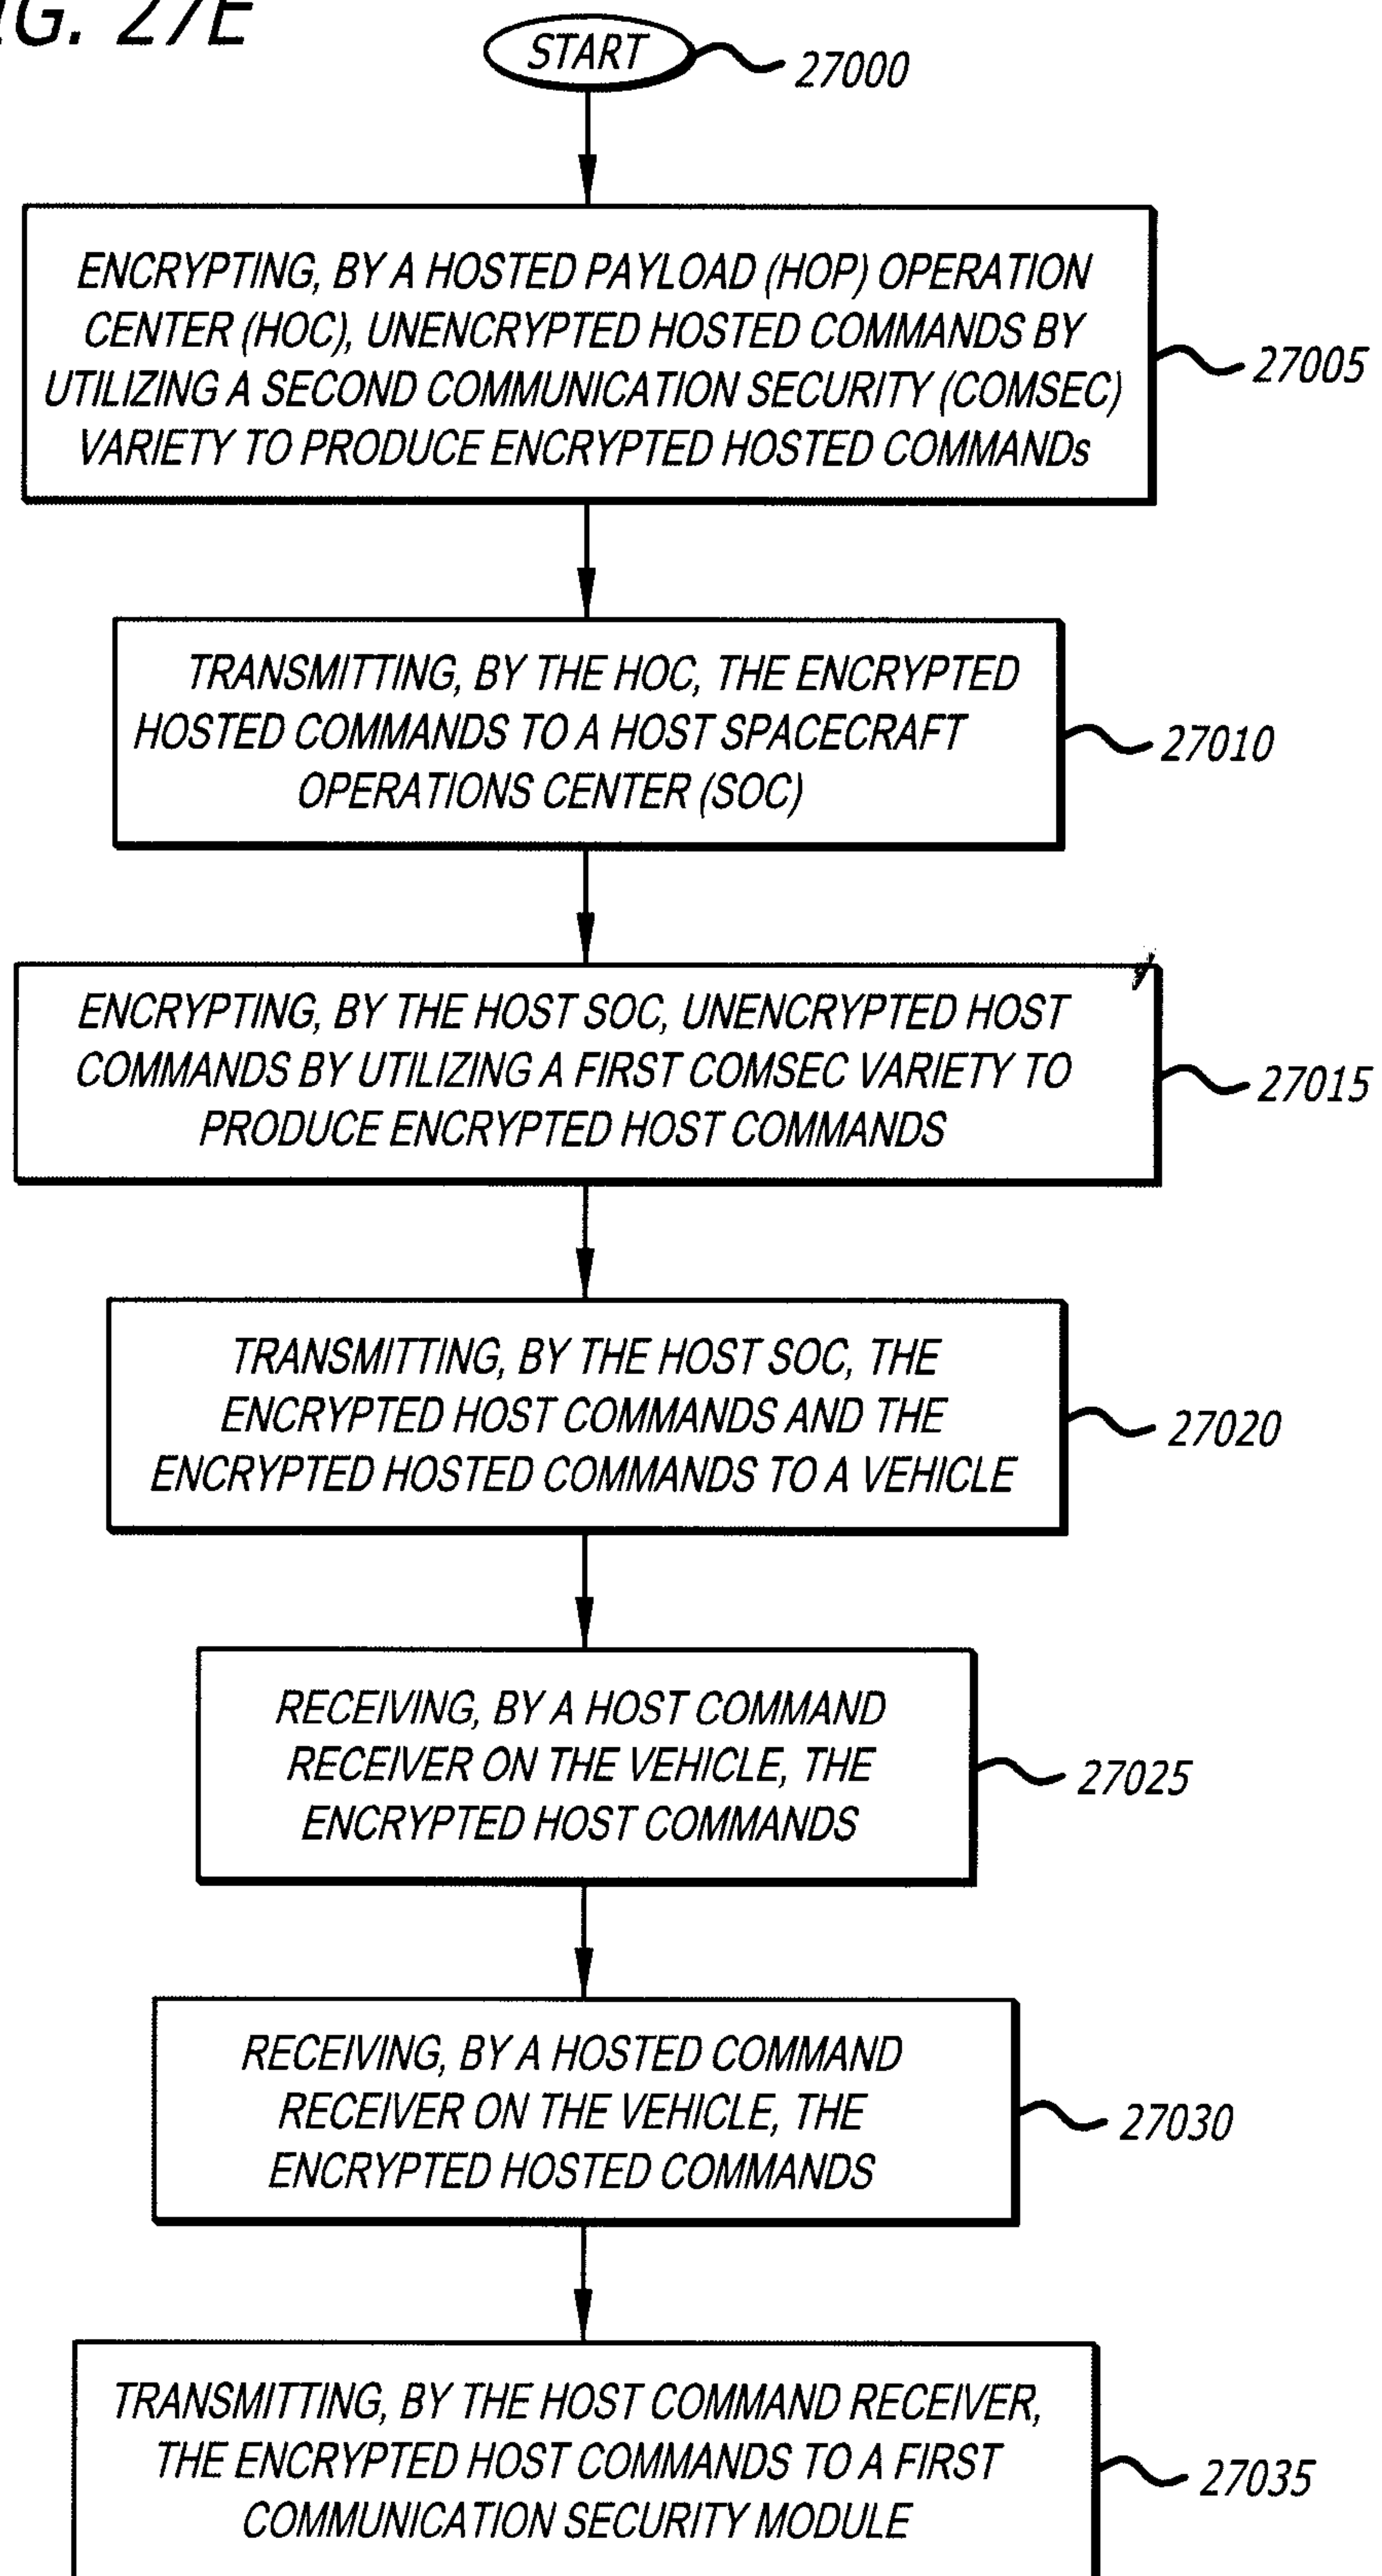


FIG. 27F

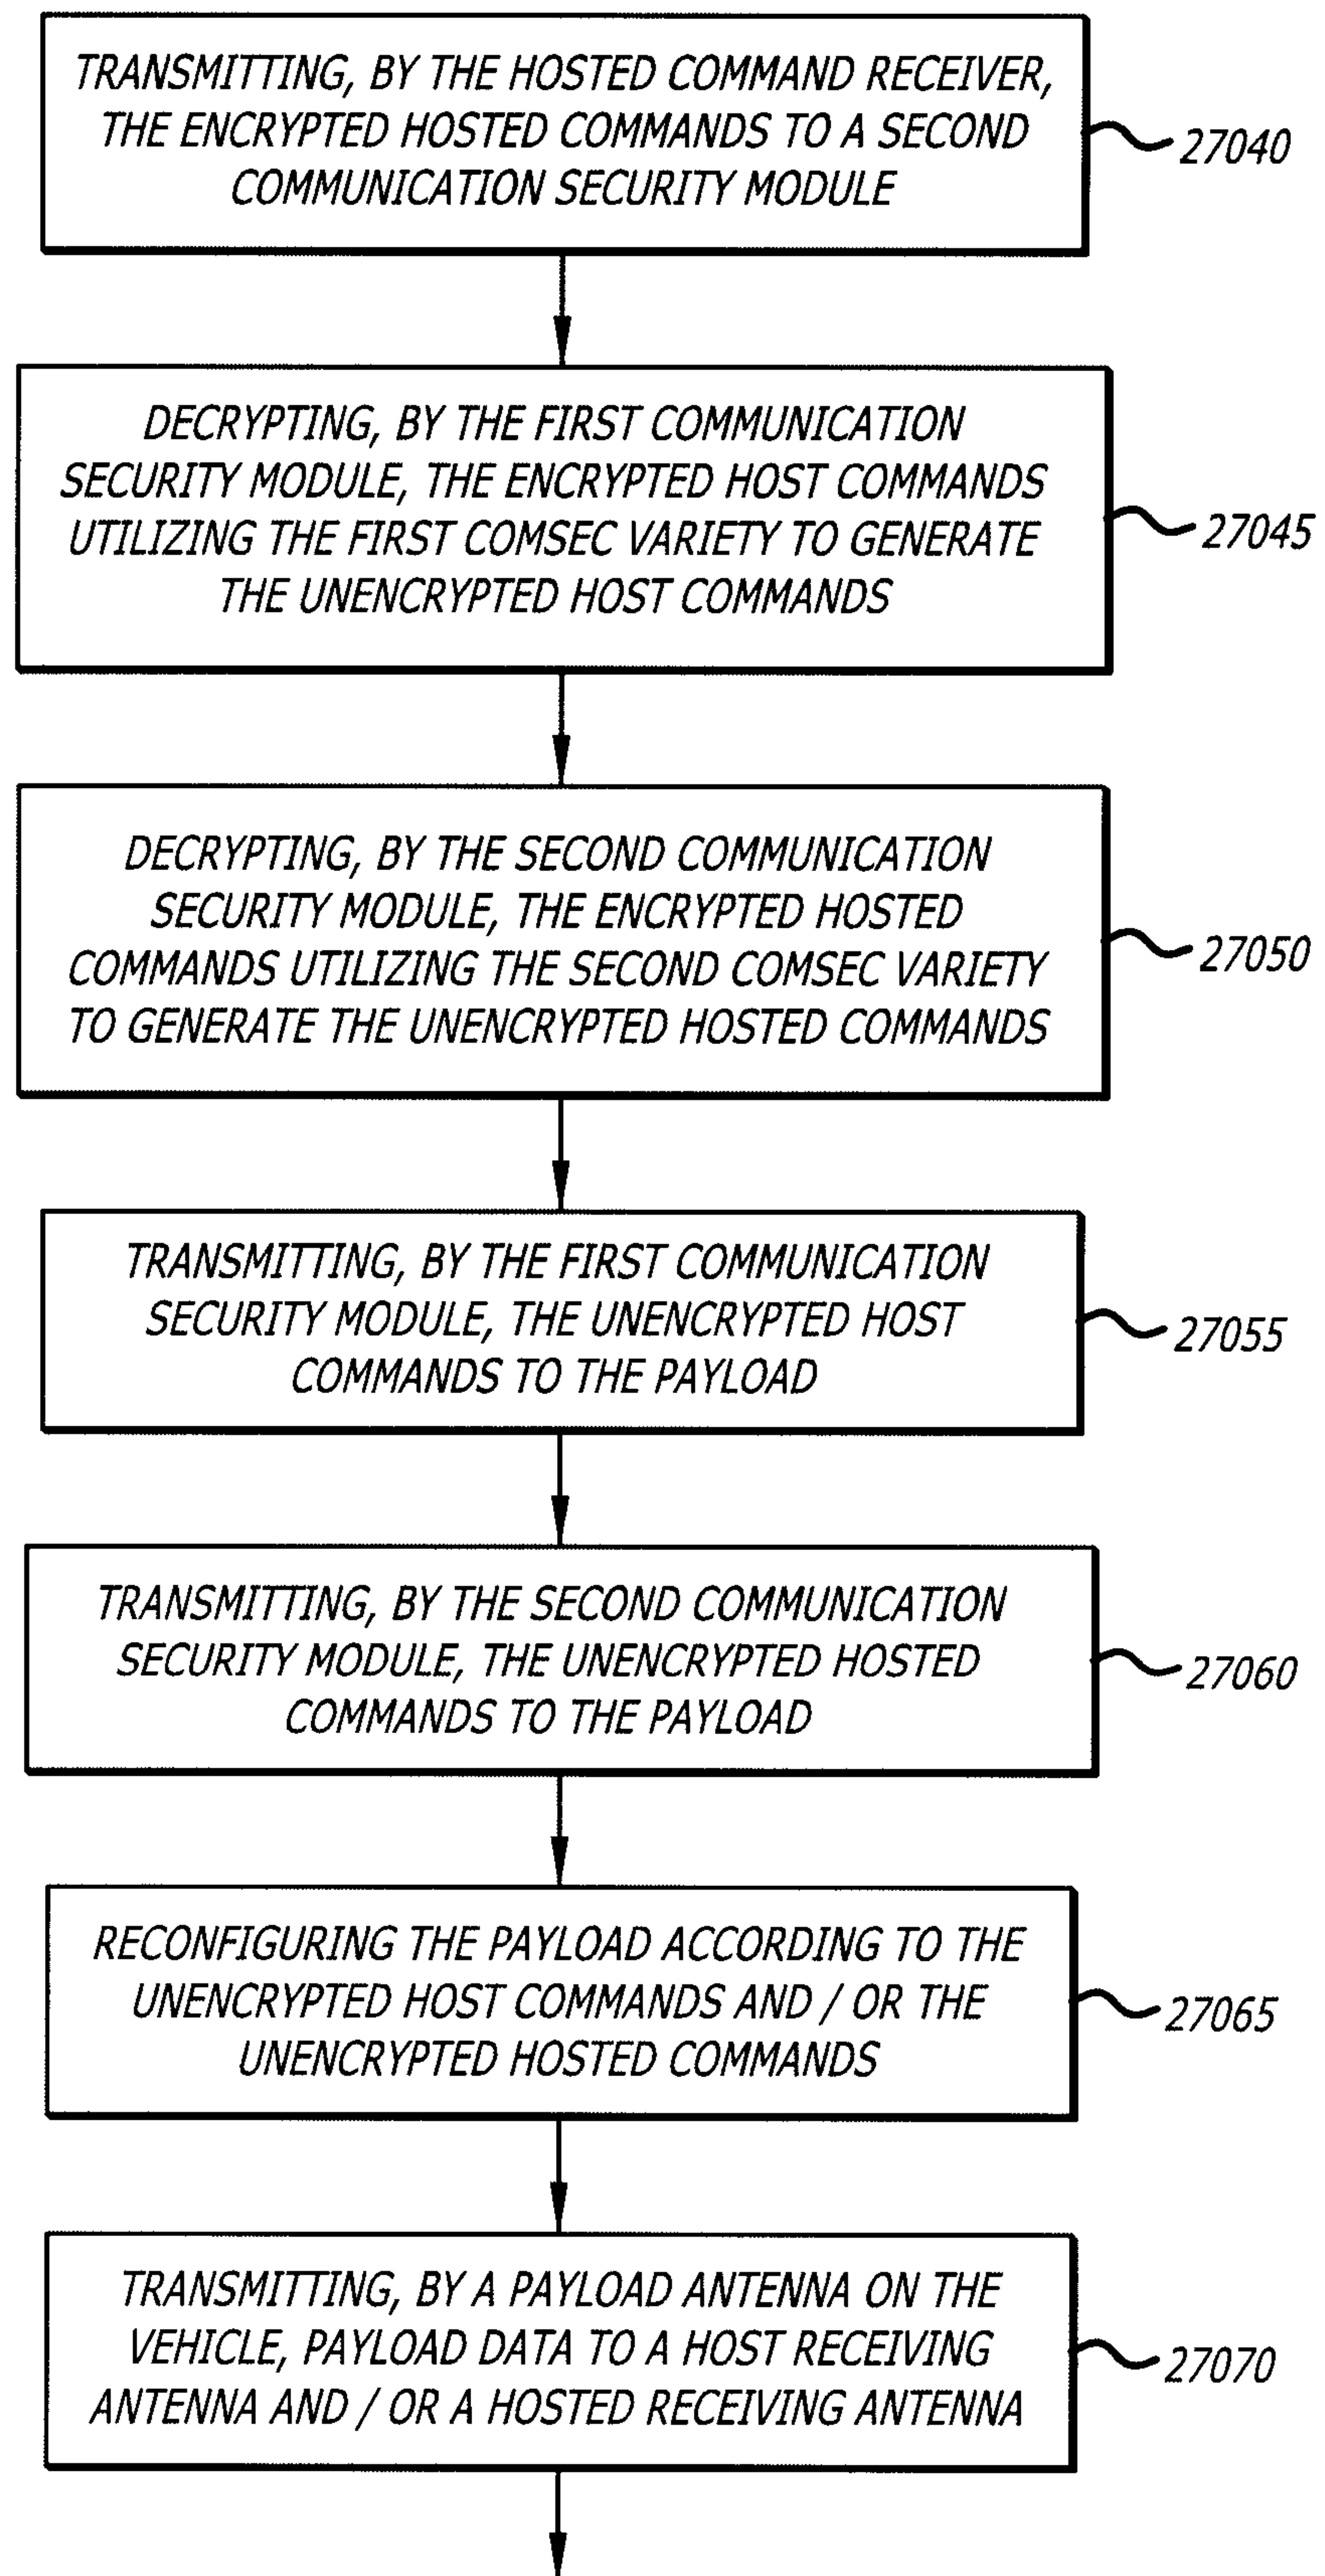


FIG. 27G

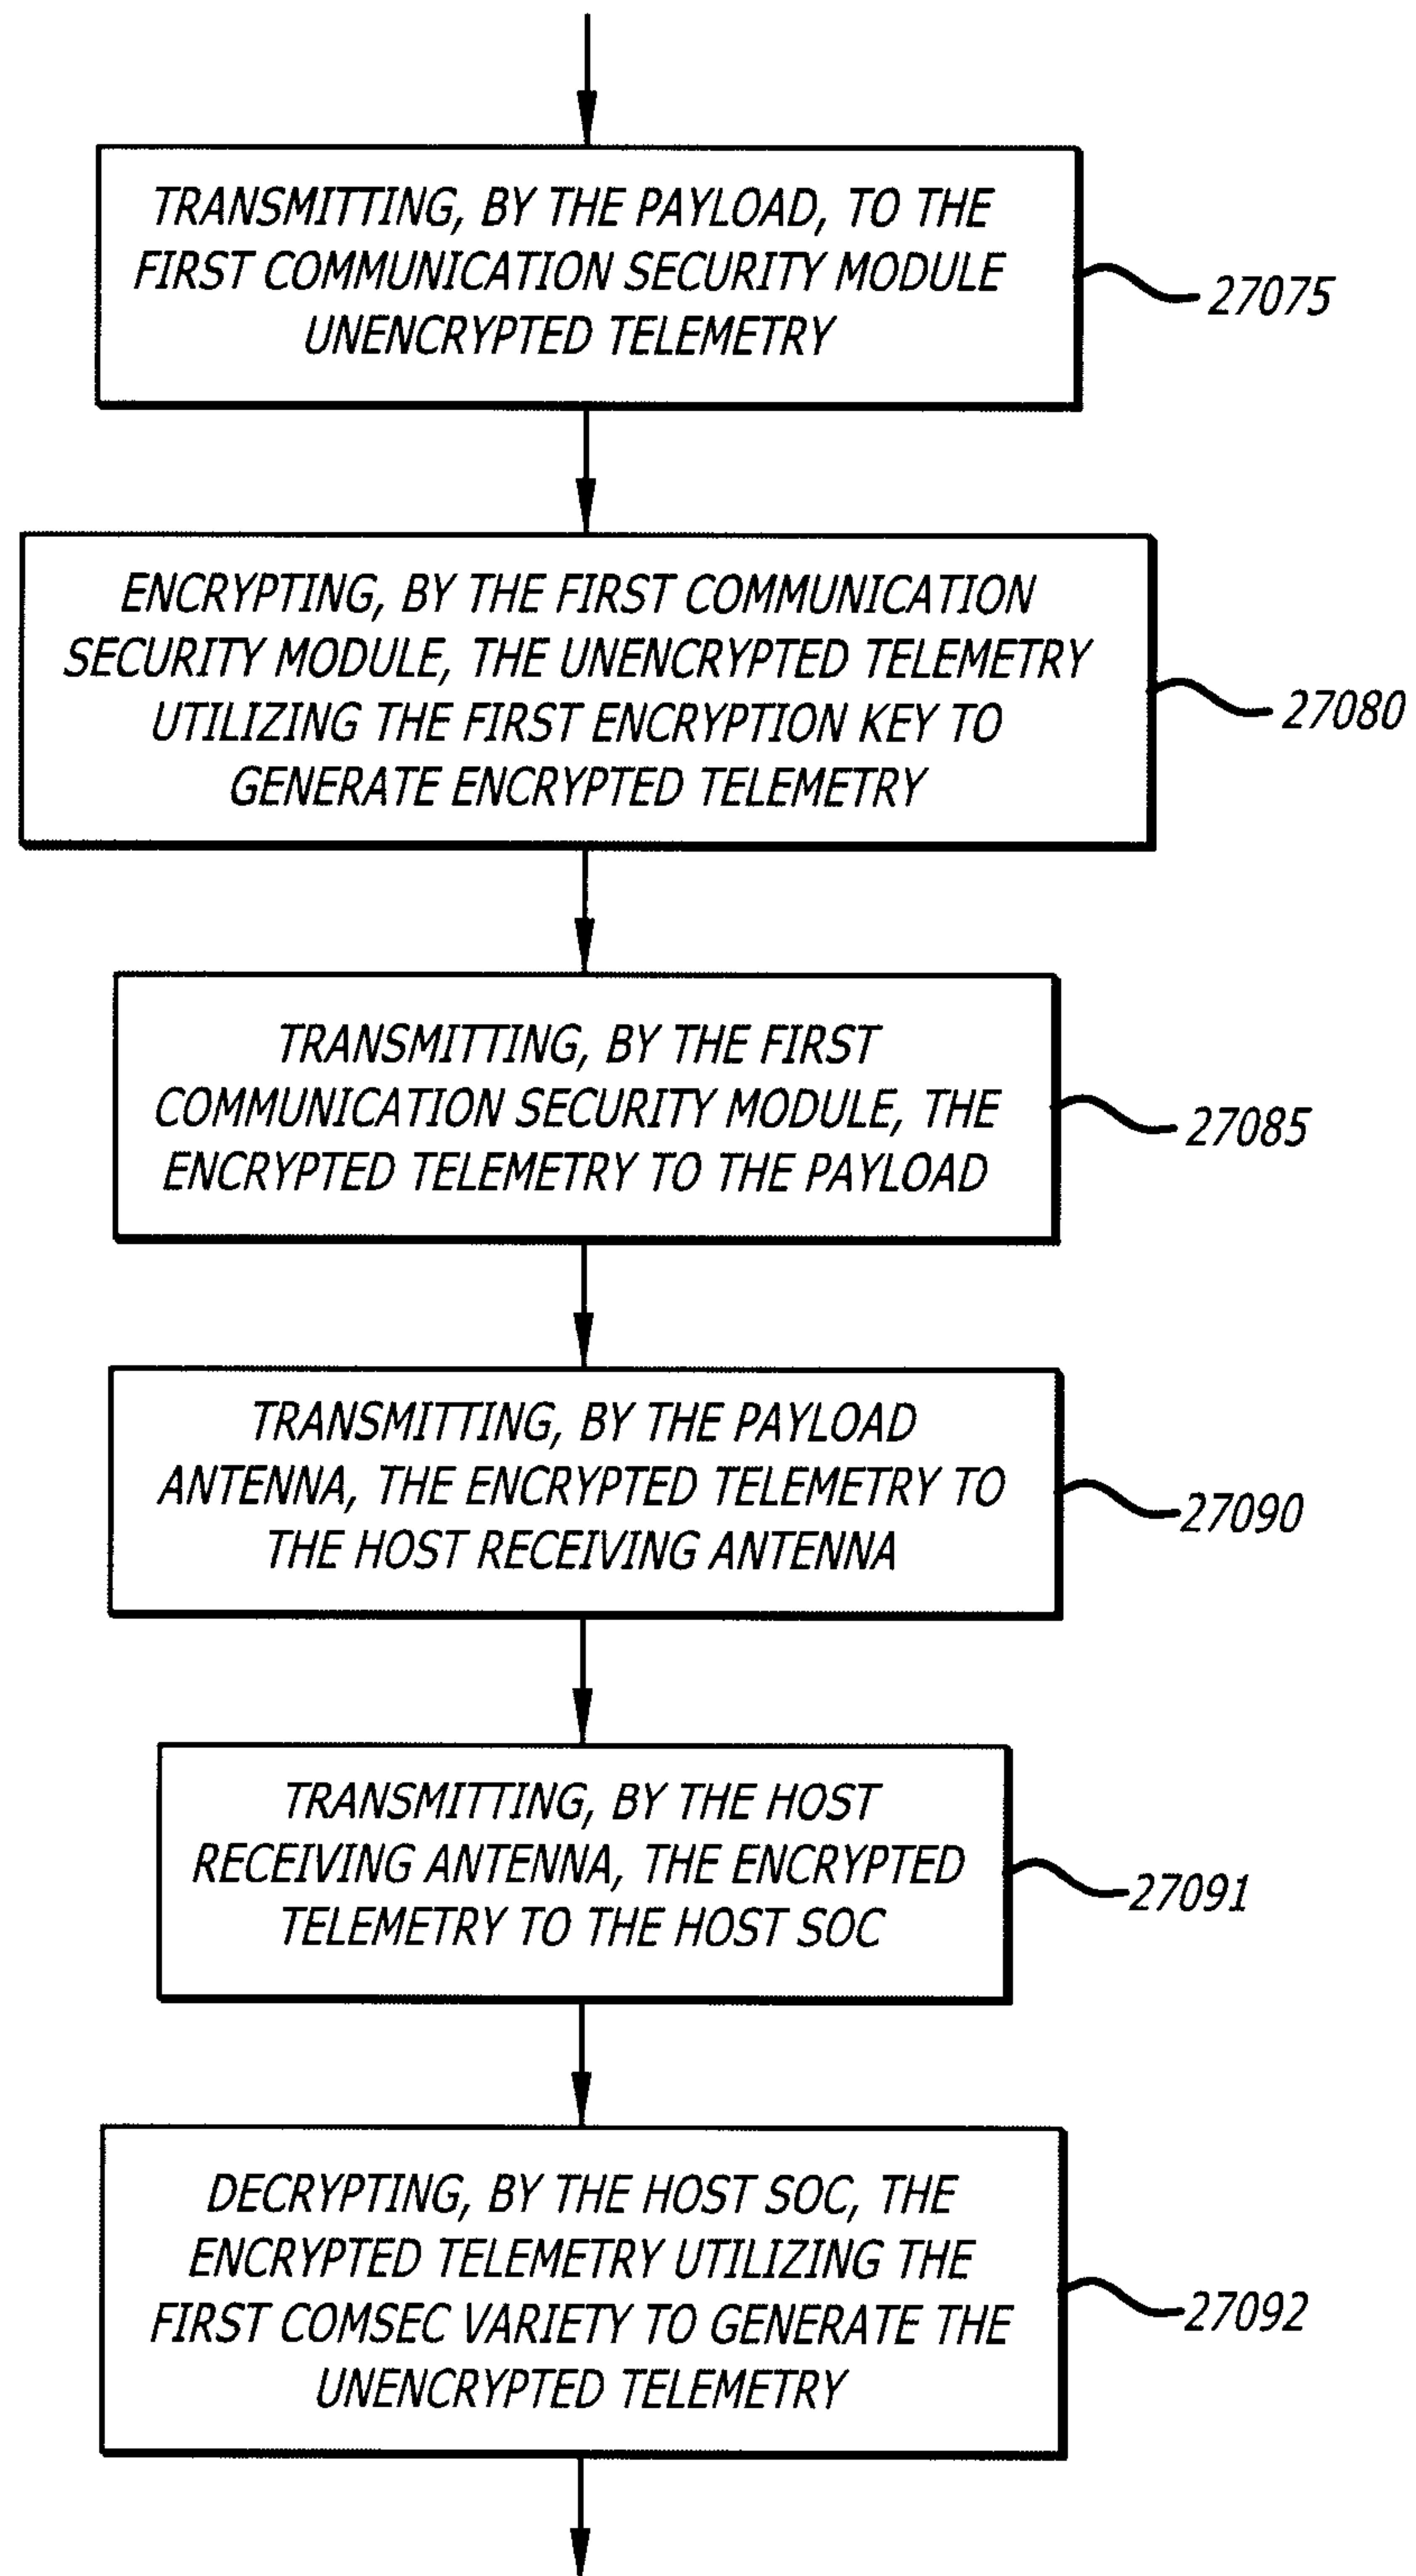
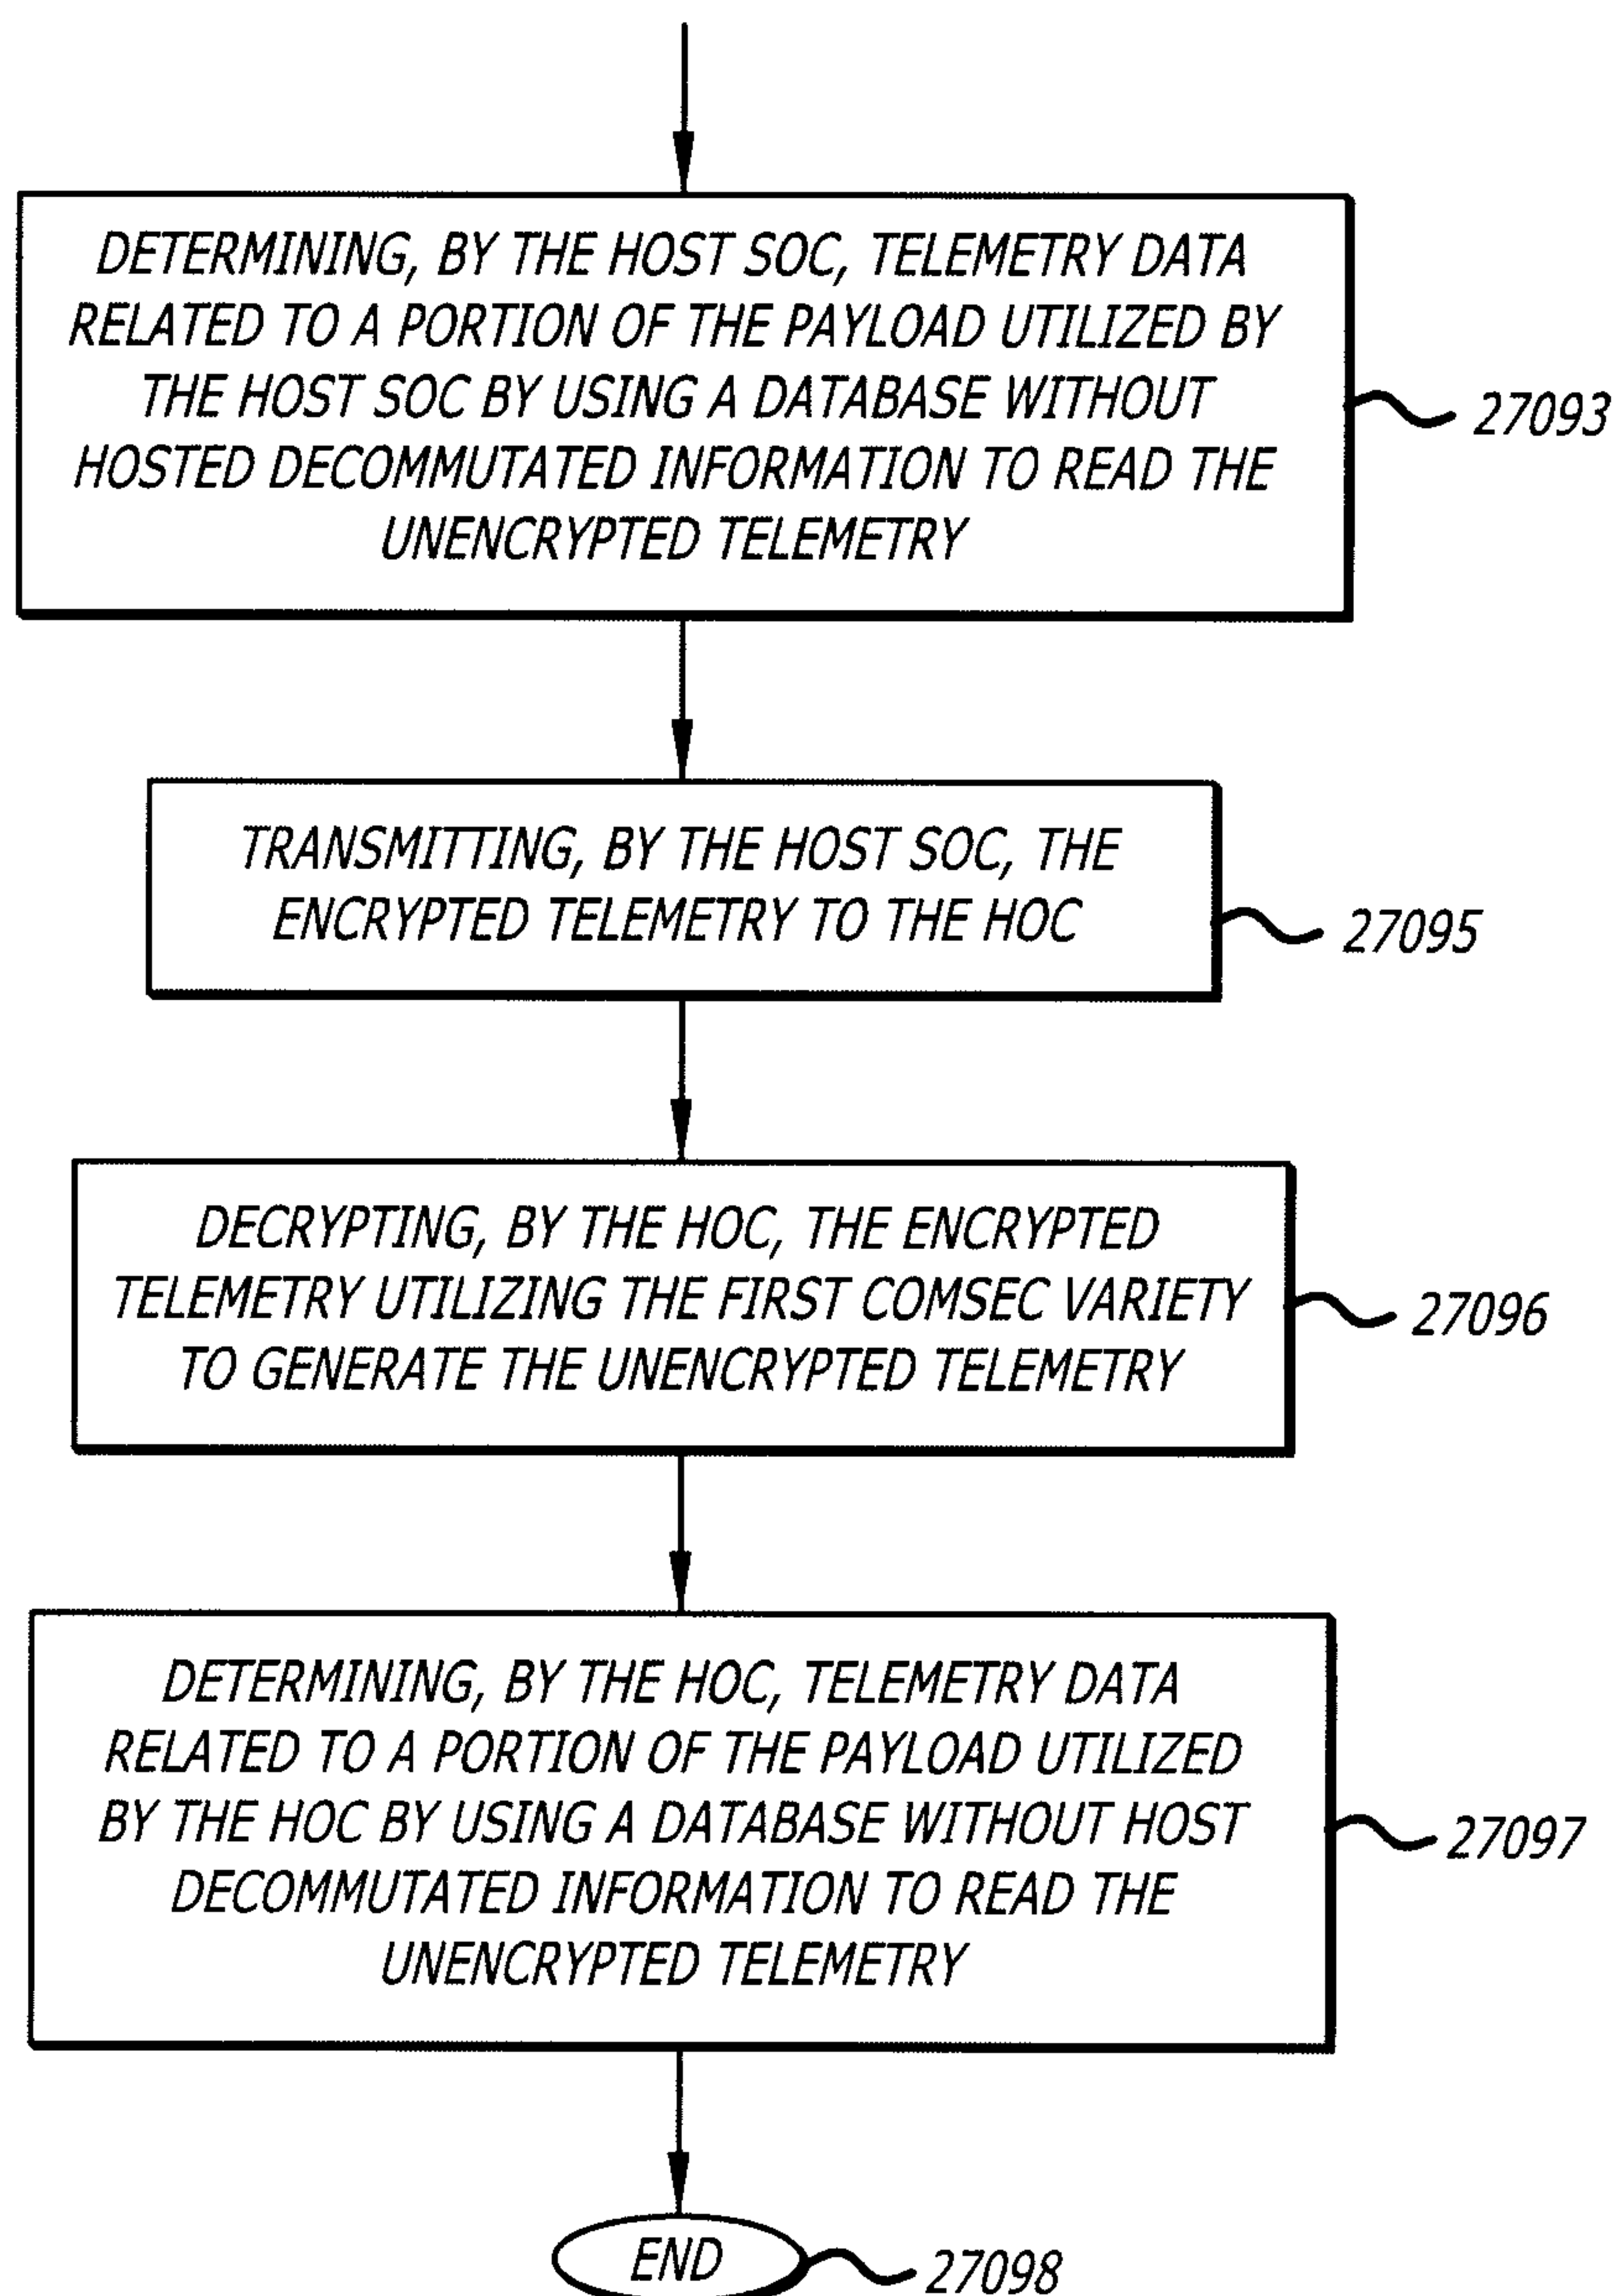
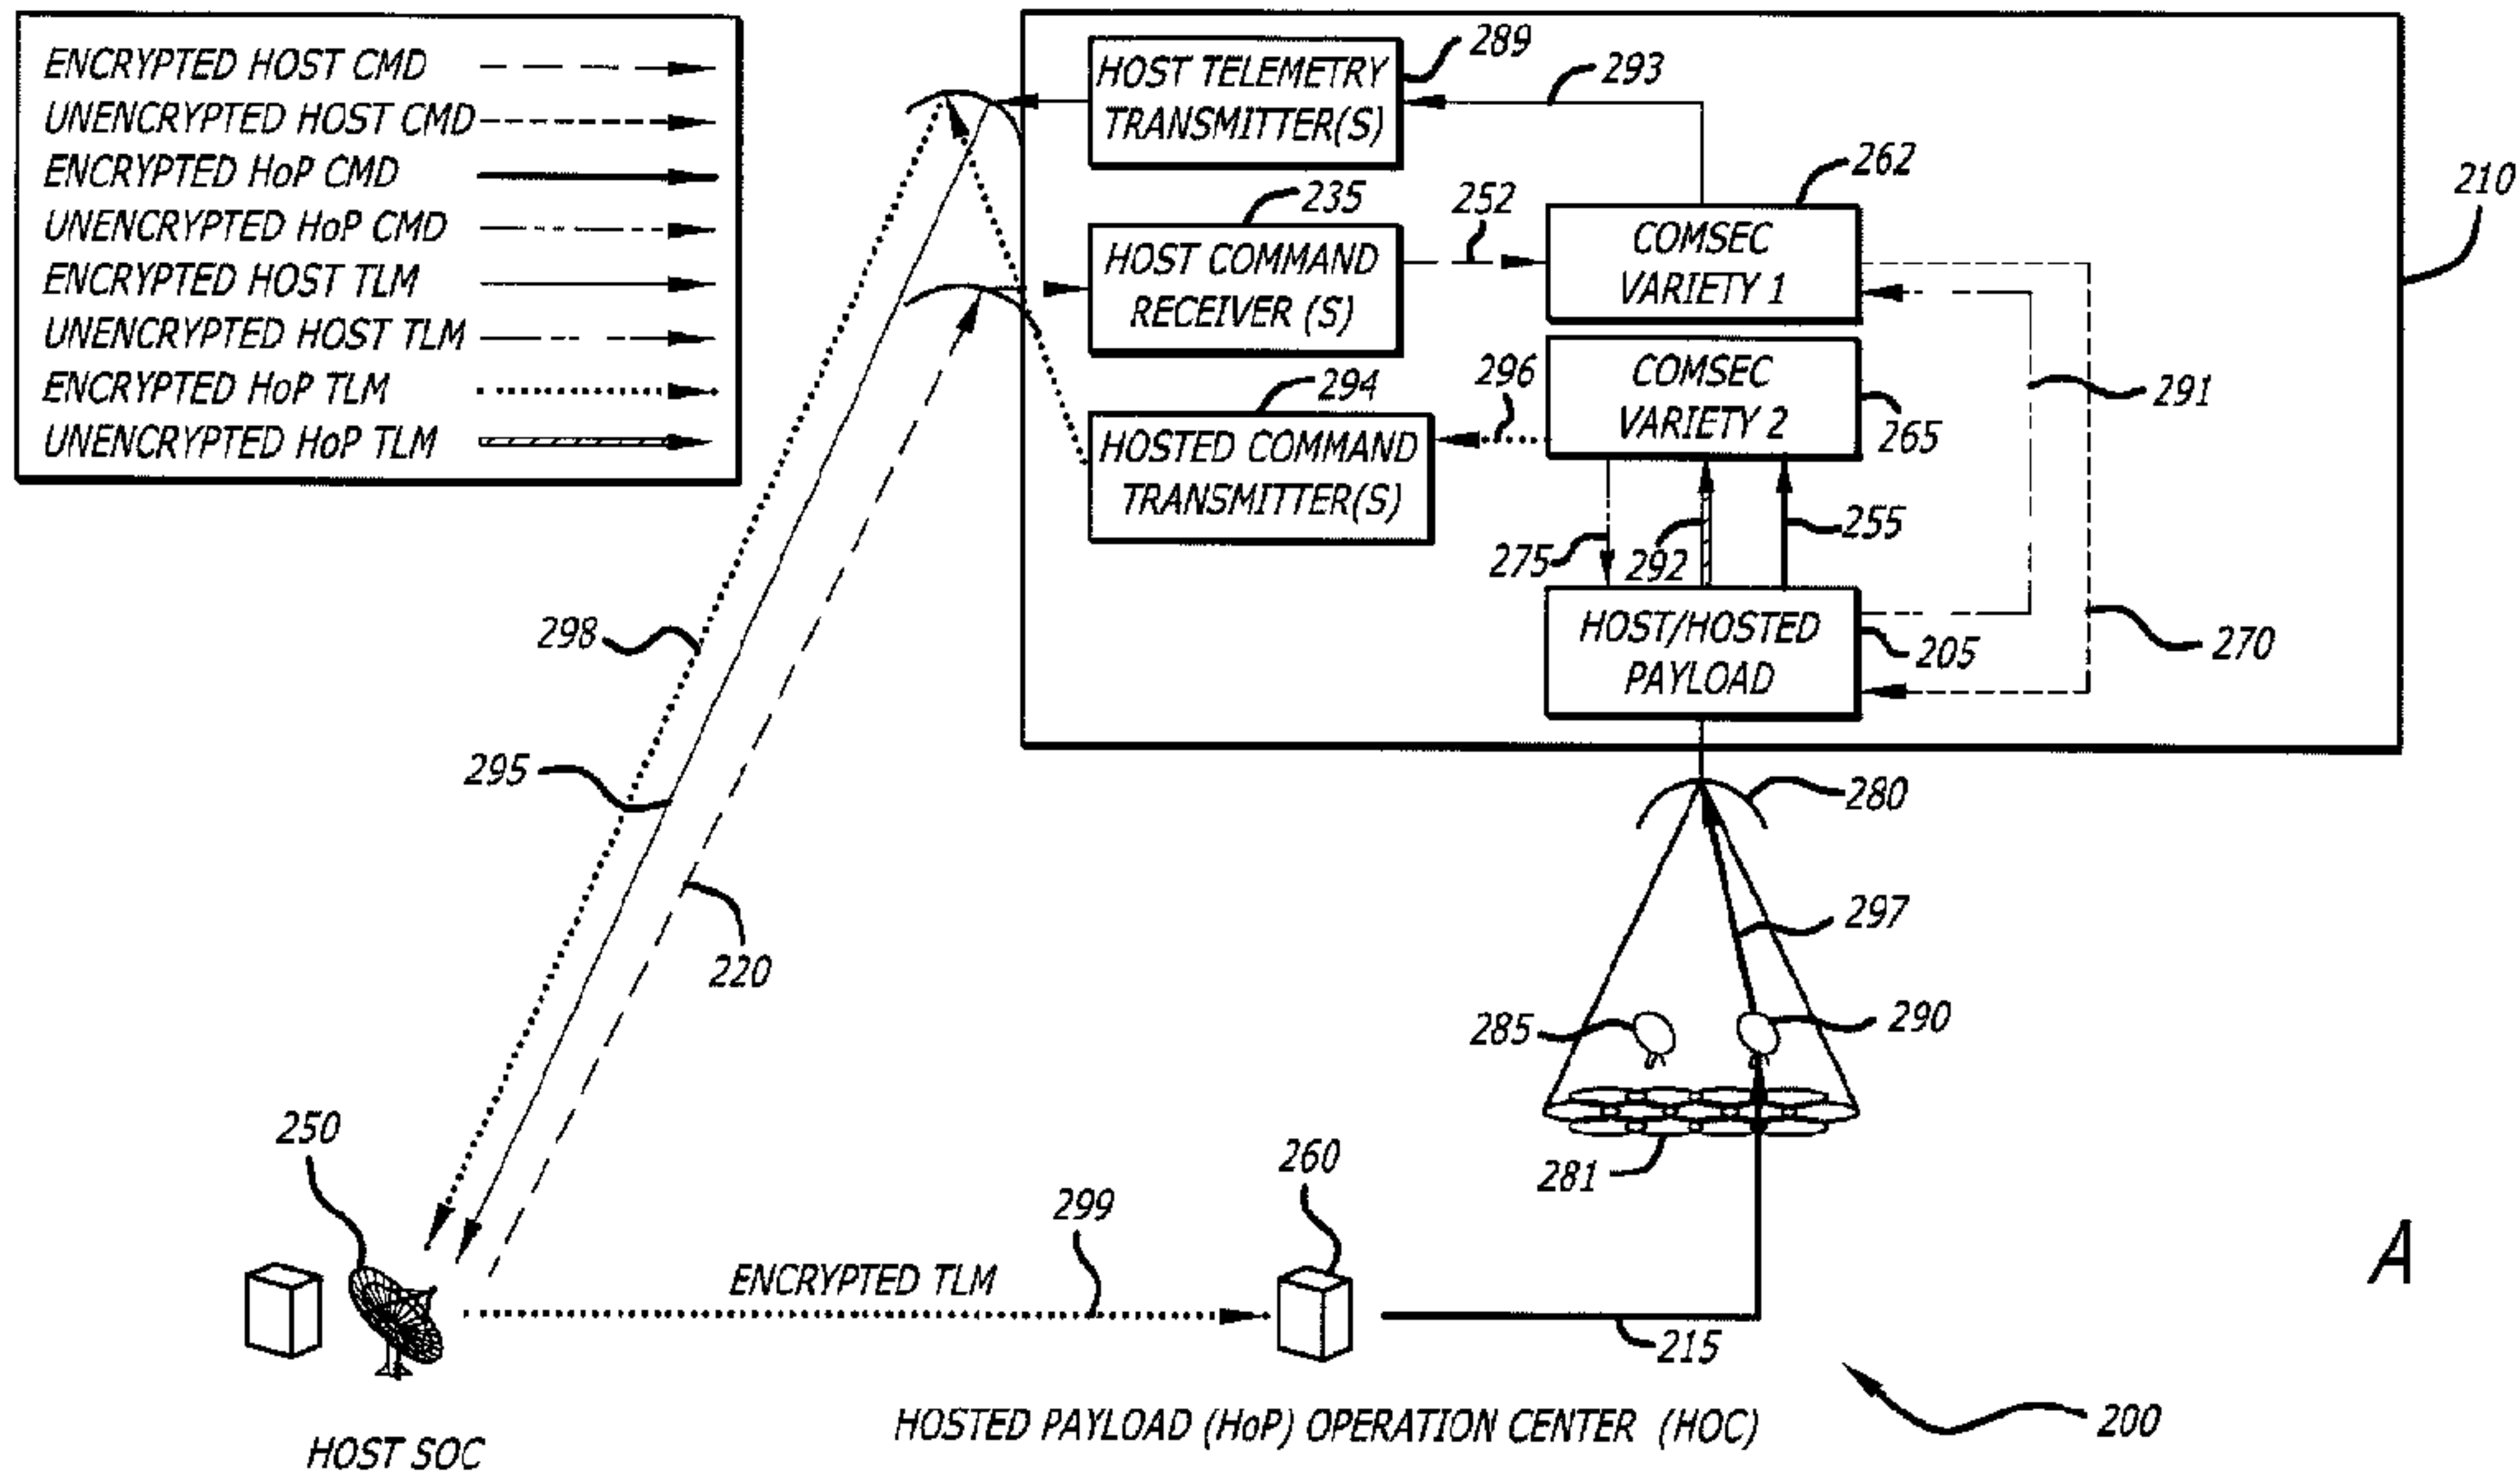


FIG. 27H





A