



(11)

EP 2 963 738 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
13.09.2017 Bulletin 2017/37

(51) Int Cl.:
H01R 9/05 (2006.01)

(21) Application number: **14306050.7**

(22) Date of filing: **30.06.2014**

(54) **Co-axial cable connector**

Koaxialer Kabelverbinder

Connecteur de câble coaxial

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
06.01.2016 Bulletin 2016/01

(73) Proprietor: **Alcatel- Lucent Shanghai Bell Co., Ltd
Shanghai 201206 (CN)**

(72) Inventors:
• **Harel, Jean-Pierre
22305 Lannion (FR)**

- **Callec, Eric
22305 Lannion (FR)**
- **Cornec, David
22305 Lannion (FR)**
- **Julien, Thomas
22305 Lannion (FR)**

(74) Representative: **Berthier, Karine et al
Alcatel-Lucent International
148/152, route de la Reine
92100 Boulogne-Billancourt (FR)**

(56) References cited:
**WO-A2-2011/127864 GB-A- 2 319 675
US-A- 3 151 211 US-A1- 2009 151 993**

EP 2 963 738 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**TECHNICAL FIELD**

[0001] The present invention relates to cable connectors.

BACKGROUND OF INVENTION

[0002] This section introduces aspects that may be helpful in facilitating a better understanding of the invention. Accordingly, the statements of this section are to be read in this light and are not to be understood as admissions about what is in the prior art or what is not in the prior art.

[0003] Co-axial cables of all types are often connected or joined together coaxially. Such connections may for example be using a matching set of male and female SMA connectors. Such connectors may not be appropriate for all situations as they may be over-engineered, too expensive, and/or difficult to assemble together.

[0004] For example, feeding networks, such as used in mobile network base station antennas, typically apply coaxial cables as electromagnetic feedline and distribution systems. With the current trend for higher order multi-band antennas (triple-, quadruple-, penta-, hexa-band, and more) the complexity of these feeding networks gets higher and the total number of feed lines is increasing. Standard connectors are typically applied at connection points between these coaxial cables. While these provide high performance their key disadvantage is their financial and labour cost - especially if in modern multiband antennas up to ~100 of these connections are required.

[0005] Many such connectors are also over engineered for the task, as base station antennas are typically required to handle 650-2700MHz vs 0-18GHz possible in SMA connectors. Furthermore, such situations require as few assembly parts as possible and as few specialized tools as possible, whereas SMA connectors require specialty assembly tools and up to 5 separate parts for the connecting pieces. Furthermore, few (dis)connection cycles are required, vs 500+ cycles engineered for SMA.

[0006] Though SMA connectors are highlighted here-above, such problems are also common with other standard connector devices, such as N, 7/16, and other connector types depending on the power level transiting into the cables, the frequency band targeted, the loss at the junction, and the PIM level (passive intermodulation distortion) required. The document WO 2011 /127864 A2 discloses a connecting device according to the preamble of claim 1. A simpler and cheaper connector is sought, in particular one suitable for use in RF applications.

SUMMARY

[0007] In view of the foregoing, an embodiment herein provides a connector as claimed in claim 1.

[0008] Other embodiments also comprise a method as

claims in claim 11.

[0009] These embodiment allow for a cost reduced connecting device :

- having good RF + PIM behaviour within a large but appropriate frequency bandwidth;
- limiting the number of necessary parts to perform the global connection. Having large number of parts to assemble means related several assembling and soldering operations which are RF + PIM risky and costly;
- integrating fixing means permitting a practical and easy fixture of the cables onto a support. Existing solutions require additional parts to fix the cables and he connector onto a mechanical support.

BRIEF DESCRIPTION OF THE FIGURES

[0010] These and other aspects of the embodiments herein will be better appreciated and understood when considered in conjunction with the following description and the accompanying drawings, in which:

FIG. 1 illustrates a typical co-axial cable;

FIG. 2 illustrates a connecting device according to a first embodiment;

FIG.3 illustrates a detailed view of the device of FIG 2;

FIG.4 illustrates assembled coaxial cables a device according to FIG 2;

FIG.5 illustrates a pair of assembled coaxial cables according to another embodiment;

FIG. 6 illustrates a three cable connector according yet another embodiment;

FIG. 7 illustrates a cable connector connecting different gauge cables according yet another embodiment;

FIGS 8A-8D illustrate parts for manufacturing steps for a connector according to yet another embodiment.

[0011] It is to be noted that the figures are not drawn to scale.

DETAILED DESCRIPTION OF EMBODIMENTS

[0012] The embodiments herein and the various features and advantageous details thereof are explained more fully with reference to the non-limiting embodiments

that are illustrated in the accompanying drawings and detailed in the following description. Descriptions of well known components and processing techniques are omitted so as to not unnecessarily obscure the embodiments herein. The examples used herein are intended merely to facilitate an understanding of ways in which the embodiments herein may be practiced and to further enable those of skill in the art to practice the embodiments herein. Accordingly, the examples should not be construed as limiting the scope of the embodiments herein.

[0013] It should be noted that the term 'antenna', though illustrative of only one application amongst many, ought to be understood as the final complete Base Station Antenna in mobile communication networks, comprising, if any, several arrays of several frequency bands, polarizations, tilt ranges etc.

[0014] Furthermore, the term 'cable' ought to be understood as a coaxial cable of any type, eg. SM141, SM250, etc. Such a cable 10 is illustrated at figure 1, and comprises a central conductor 12 (usually a solid copper, stranded copper or copper plated steel wire), surrounded by a dielectric 14. The dielectric is then surrounded by a metallic, conductive braid and/or foil known as a shield 16. Finally, the shield 16 is enclosed and protected by an isolating jacket 18. Each component of the cable 10 may be selectively exposed depending on the design need, though in a typical installation case the cable 10 will be stripped as illustrated on figure 1.

[0015] Figure 2 illustrates a connector 100 according to a first embodiment, adapted for connecting axially two co-axial cables along the axial direction A-A.

[0016] The connector 100 comprises a support structure 110 onto which are positioned two cable clip structures 120, and a connection section 130 disposed between said pair of cable clip structures 120. The cable clips 120 and the connection section 130 are longitudinally aligned along the axis A.

[0017] The connector 100 is preferably manufactured in one piece using non-conducting material, such as a plastic, for example as a result of a molding operation.

[0018] The support structure 110 may comprise fixing means 115 adapted for securing onto an antenna frame or other support element of an external device. Fixing means 105 may comprise mounting holes, unitary mounting brackets, unitary mounting clips, or other mounting fixtures, as appropriate for the mounting needs.

[0019] The cable clip structure 120 are sized at an appropriate dimension to receive and secure against the outer jacket 18 of an appropriate cable 10, in such a way as to relieve stress off the cable 10 and to stabilize the cable 10 before the joining operation.

[0020] The connection section 130 is adapted for:

- receiving and electrically connecting the conductor 12 of a first cable (not shown) to the conductor 12 of a second cable (not shown), and for
- receiving and electrically connecting the shield 16 of

said first cable to the shield 16 of said second cable (not shown).

[0021] As shown in greater detail at figure 3, the connection section 130 comprises :

- a first shield receiving area 116A and a second shield receiving area 116B disposed along the central axis A on both extremity regions of the connection section 130; and
- a first conductor receiving area 112A and a second conductor receiving area 112B disposed along the central axis A in a central region of the connection section 130 between said first and second shield receiving areas 116A,B.

[0022] The first shield receiving area 116A and the second shield receiving area 116B are electrically connected to one another. The first conductor receiving area 112A and the second conductor receiving area 112B are also electrically connected to one another. The shield receiving areas 116A, B do not communicate electrically with the conductor receiving areas 112A, B.

[0023] As shown at figure 3 and highlighted with dots and hachures, the mating surfaces of the receiving areas 112A, 112B, 116A, 116B are coated in an electrical conducting surface layer, e.g. a metallic layer. The metallization and respect of non-metallized areas can for example be achieved using classical plastic or polymer metallization processes, or other processes as for instance "Laser Direct Structuring", patented by LPKF Laser & Electronics AG and as perfected by Molex®. The metallization specification i.e. the process used, the metallization depth of conductive materials used are function of global performances and costs targeted. For example and without limitations, copper, tin, silver, gold, brass etc. may be used, within a thickness of some microns or tens of microns depending on frequency bands targeted (i.e. some hundreds of MHz to some GHz).

[0024] Each of the receiving areas 112A, 112B, 116A, 116B are formed as semi cylindrical concave hollows adapted for receiving the respective part of the cable 10 of the appropriate gauge. In particular,

- the first and second shield receiving areas 116A, 116B are adapted to espouse the shield portion 16 of a first and second cable 10A, 10B respectively, and are sized for the appropriate cable gauge;
- the first and second conductor receiving areas 112A, 112B are adapted to espouse the conductor portion 12 of a first and second cable 10A, 10B respectively, and are sized for the appropriate cable gauge.

[0025] The cables 10 are fixed in place by soldering the shield 16 and the conductor 12 portions of the cable 10 into place onto the metallized conducting surface layer.

In a particularly advantageous embodiment, the receiving sections 112A, 112B, 116A, 116B may comprise semi-annular gutters 118 adapted for easing the flow of solder around the cable 10 portions.

[0026] Figure 4 illustrates the above embodiments with the first and second cables 10A,B securely soldered into place. The cable joining operation may be performed as followed:

- clamping the jackets 18 of the cables 10A, 10B into the clip structure 120 of the connector 100. This integrated clamping allows for a stability of the cable ends enabling to safely and quickly do the cable soldering operation.
- once the cables 10 stabilized, the conductor 12 and the shield 16 may be positioned appropriately into their respective receiving areas 112, 116, and soldered into place using conventional techniques and tools.
- advantageously, though not illustrated, the soldering operation can be followed by steps to protect the soldered area. Such protection may be performed by covered the exposed metallic areas with protection glue, gel, or foam, or by placing a heat shrink jacket around the area and the cable braid, or placing a rigid cover over the connecting device 100.

[0027] In a variant, illustrated at figure 5, it is of course possible for the support structure 110 of the connector 100 to support a plurality of pairs of clip structures 120 and connection sections 130, thereby connecting a plurality of pairs of cables on a single connector 100.

[0028] Similarly, as illustrated at figure 6, it is possible to modify the features to provide connections between three or more cables 10A,B,C. More generally, the support structure 110 may feature:

- as many clip structures 120 as there are cables 10 to be joined,
- each clip structure to be aligned with conductor receiving areas 112 and shield receiving areas 116, and
- all shield receiving areas 116 to be connected to each other electrically, and all conductor receiving areas 112 to be connected to each other electrically.

[0029] In yet another variant illustrated at figure 7, these same features can be modified to fit cables of different gauges, here SM141 and SM250 cable types. In particular, the conductor receiving area 112 and the shield receiving area 116 of the connection section can be made appropriately larger to be compatible with different gauge cables.

[0030] Nevertheless, the invention isn't limited to a

specific manufacturing process, such as metalized plastics. In yet another variant, the support structure 110 of the connector 100 may be entirely molded of non conducting material (figure 8A), and metalized surfaces can be replaced by separate thin copper (or brass or other metal) foils as shown in figure 8B and figure 8C:

- a shield receiving foil 1160 (figure 8B)
- a conductor receiving foil 1120 (figure 8C).

[0031] More particularly, the metallic foils 1160, 1120 are adapted to be fitted inside the shield receiving areas 116 (figure 8B) and conductor receiving areas 112 (figure 8C), respectively, which may be positioned into place mechanically (figures 8D), for example via glue or mechanical fixation (eg. melting the four pins present at figure 8A or any other fixing device or method). Then, the inner core foil 1120 destined for the conductor receiving area 112 is placed on top of the central post, and, two cables are plugged onto the device via the clips, and soldered to the foils.

[0032] The embodiment of figure 8A-8D has the advantage of creating elements in separate processes which may be advantageous for mass manufacturing. Another advantage of this embodiment is that of providing better conductivity for high power application when metallic layer deposition onto the non-metallic surface of the connector support structure 110 may provide insufficient thickness capabilities.

[0033] In yet another embodiment, non illustrated, the metalized surface of the shield receiving area 116, corresponding to the ground potential, can also be partially extended to the support structure 110, and even underneath the support structure 110, to allow for either a capacitive coupling from the cable ground potential up to the antenna frame to be performed, as even a direct DC electrical contact if needed. This effect may be interesting for instance if the cables need to be grounded to the antenna frame, as for lightning protection or EMC cancellation effects.

[0034] Of course, it is possible to combine features from the different embodiments described hereabove.

[0035] The preceding embodiments demonstrate excellent RF performance characteristics. Typically, considering cables lengths of 50mm connected across a connector 100 such as that illustrated at figure 5 achieves:

- an insertion loss better than 0.03dB @ 3 GHz (cables losses subtracted) ;
- an impedance matching better than 40 dB in the 500 MHz - 3 GHz band (50 Ohms) ;
- an insulation between adjacent cables better than 60 dB in the 500 MHz - 3 GHz band.

Claims

1. Connecting device (100) adapted for electrically connecting two or more coaxial cables together, each coaxial cable (10) comprising a central conductor and a metallic shield around said conductor, said device being a unitary piece of non-conducting structure (110) presenting:

- an equal number of conductor receiving areas (112A, 112B) as there are cables to be connected, said conductor receiving areas (112A, 112B) being connected electrically with one another,
- an equal number of shield receiving areas (116A, 116B) as there are cables to be connected, said shield receiving areas (116A, 116B) being connected electrically with one another,

wherein the conductor receiving areas (112A, 112B) are electrically isolated from said shield receiving areas (116A, 116B),

characterized in that

- said device further comprises at least two cable clip structures (120) longitudinally aligned along an axis A-A, said cable clip structures (120) being sized at an appropriate dimension to receive and secure said cables,
- said conductor receiving areas (112A, 112B) and said shield receiving areas (116A, 116B) are disposed along an axis A-A between said cable clip structures (120),
- each of said conductor receiving areas (112A, 112B) and said shield receiving areas (116A, 116B) are formed as semi-cylindrical concave hollows adapted for receiving the respective part of said cables of the appropriate gauge,
- the mating surfaces of the conductor receiving areas (112A, 112B) and the shield receiving areas (116A, 116B) are coated in an electrical conducting surface layer, and each of the conductor receiving areas (112A, 112B) and the shield receiving areas (116A, 116B) are adapted for mating with the corresponding portion of the cable.

2. A connecting device according to claim 1, wherein said conductor and shield receiving areas have metallic coating deposited on non-conductive structure and adapted for making electrical contact with said conductor portion and said shield portion of the cable respectively.

3. A connecting device according to claim 2, wherein there is:

- a single connected metallic coating cover all of said conductor portions of said cables, and
- a single connected metallic coating cover all

of said shield portions of said cables

4. A connecting device according to claim 1, wherein said conductor and shield receiving areas have metallic piece fixed to said non-conductive structure and adapted for making electrical contact with said conductor portion and said shield portion of the cable respectively.

5. A connecting device according to claim 4, wherein there is :

- a single connecting metallic piece providing electrical connection between all of said conductor portions of said cables, and
- a single connecting metallic piece providing electrical connection between all of said shield portions of said cables.

6. A connecting device according to any one of the preceding claims, further comprising a cable stabilizing structure adapted for stabilizing the cable in a position aligned axially with the shield receiving portion.

7. A connecting device according to any one of the preceding claims, wherein the metallic portion of the shield receiving area extends to the underside of the connecting device adapted for being fixed to an external structure.

8. A connecting device according to claim 7, wherein the external structure is a grounded structure.

9. A connecting device according to any of the preceding claims, wherein the conductor receiving section and/or the shield receiving sections comprise annular hollows adapted for facilitating soldering of the cable portions to the respective receiving sections.

10. A method of connecting two or more coaxial cables together, each coaxial cable comprising a central conductor and a metallic shield around said conductor, comprising the steps of:

- providing a unitary piece of non-conducting structure (110) presenting
- at least two cable clip structures (120) longitudinally aligned along an axis A-A, said cable clip structures (120) being sized at an appropriate dimension to receive and secure said cables,
- an equal number of conductor receiving areas (112A, 112B) as there are cables to be connected, each conductor receiving areas being formed as semi-cylindrical concave hollows and adapted for mating with the conductor portion of the cable, and
- an equal number of shield receiving areas (116A, 116B) as there are cables to be connect-

ed, each shield receiving areas being formed as semi-cylindrical concave hollows and adapted for mating with the shield portion of the cable, said conductor receiving areas (112A, 112B) and said shield receiving areas (116A, 116B) being disposed along an axis A-A between said cable clip structures (120),

- coating in an electrical conducting surface layer said conductor receiving areas (112A, 112B), so that said conductor receiving areas (112A, 112B) are connected electrically with one another, and

- coating in an electrical conducting surface layer said shield receiving areas (116A, 116B), so that said shield receiving areas (116A, 116B) are connected electrically with one another, the conductor receiving areas (112A, 112B) being electrically isolated from the shield receiving areas (116A, 116B),

- inserting cables to said cable clip structures such that each conductor portion of said cable mates with a conductor receiving area (112A, 112B), and such that each shield portion of said cable mates with a shield receiving area (116A, 116B),

- soldering metallic portions of cable into place.

11. A method according to claim 10, wherein said electrical conducting surface layers are metallic portions applied by metallic deposition onto the plastic.

12. A method according to claim 10, wherein said electrical conducting surface layers are metallic portions applied by providing a metal foil and fixing it in the appropriate receiving areas.

13. A method according to any one of claims 10 to 12, wherein the non-conducting structure is one piece molded of non conducting material.

Patentansprüche

1. Verbindungsvorrichtung (100), ausgelegt für die elektrische Verbindung von zwei oder mehreren Koaxialkabeln miteinander, wobei jedes Koaxialkabel (10) einen zentralen Leiter und eine Metallabschirmung rund um besagten Leiter aufweist, wobei besagte Vorrichtung ein einheitliches Stück nichtleitender Struktur (110) ist, bietend:

- eine gleiche Anzahl von Leiter aufnehmenden Bereichen (112A, 112B) wie es zu verbindende Kabel gibt, wobei besagte Leiter aufnehmenden Bereiche (112A, 112B) elektrisch miteinander verbunden sind,

- eine gleiche Anzahl von Abschirmung aufnehmenden Bereichen (116A, 116B) wie es zu ver-

bindende Kabel gibt, wobei besagte Abschirmung aufnehmenden Bereiche (116A, 116B) elektrisch miteinander verbunden sind,

wobei die Leiter aufnehmenden Bereiche (112A, 112B) elektrisch von besagten Abschirmung aufnehmenden Bereichen (116A, 116B) isoliert sind, **dadurch gekennzeichnet, dass**

- besagte Vorrichtung weiterhin umfasst mindestens zwei Kabelschellenstrukturen (120), die längs entlang einer Achse A-A ausgerichtet sind, wobei besagte Kabelschellenstrukturen (120) angemessen dimensioniert sind, um besagte Kabel aufzunehmen und zu sichern,

- besagte Leiter aufnehmenden Bereiche (112A, 112B) und besagte Abschirmung aufnehmenden Bereiche (116A, 116B) entlang einer Achse A-A zwischen besagten Kabelschellenstrukturen (120) angeordnet sind,

- jeder der besagten Leiter aufnehmenden Bereiche (112A, 112B) und der besagten Abschirmung aufnehmenden Bereiche (116A, 116B) als halbzyklindrische konkave Wölbungen geformt und ausgelegt ist zum Aufnehmen des entsprechenden Teils von besagten Kabeln der geeigneten Dicke,

- die Passflächen der Leiter aufnehmenden Bereiche (112A, 112B) und der Abschirmung aufnehmenden Bereiche (116A, 116B) mit einer elektrisch leitenden Oberflächenschicht bedeckt sind und jeder der Leiter aufnehmenden Bereiche (112A, 112B) und der Abschirmung aufnehmenden Bereiche (116A, 116B) ausgelegt ist zum Verbinden mit dem entsprechenden Anteil des Kabels.

2. Verbindungsvorrichtung nach Anspruch 1, wobei besagter Leiter und Abschirmung Bereiche aufnehmen mit Metallbeschichtung, die auf der nichtleitenden Struktur abgeschieden ist, und ausgelegt sind zum Herstellen eines elektrischen Kontakts jeweils mit besagtem Leiteranteil und besagtem abschirmenden Anteil des Kabels.

3. Verbindungsvorrichtung nach Anspruch 2, wobei:

- eine einzelne verbundene metallische Beschichtung alle besagten leitenden Anteile von besagten Kabeln bedeckt, und

- eine einzelne verbundene metallische Beschichtung alle besagten abschirmenden Anteile von besagten Kabeln bedeckt

4. Verbindungsvorrichtung nach Anspruch 1, wobei besagte Leiter und Abschirmung aufnehmenden Bereiche ein metallisches Stück aufweisen, das an besagter nichtleitenden Struktur befestigt ist, ausgelegt

zum Herstellen eines elektrischen Kontakts jeweils mit besagtem Leiteranteil und besagtem abschirmenden Anteil des Kabels.

5. Verbindungsvorrichtung nach Anspruch 4, wobei es
 - ein einzelnes verbindendes metallisches Stück gibt, das eine elektrische Verbindung zwischen allen besagten leitenden Anteilen von besagten Kabeln bietet, und
 - ein einzelnes verbindendes metallisches Stück gibt, das eine elektrische Verbindung zwischen allen besagten abschirmenden Anteilen von besagten Kabeln bietet.
6. Verbindungsvorrichtung nach einem beliebigen der vorhergehenden Ansprüche, weiterhin umfassend eine kabelstabilisierende Struktur, die ausgelegt ist zum Stabilisieren des Kabels in einer Position, die axial zum die Abschirmung aufnehmenden Anteil ausgerichtet ist.
7. Verbindungsvorrichtung nach einem beliebigen der vorhergehenden Ansprüche, wobei der metallische Anteil des die Abschirmung aufnehmenden Bereichs sich bis zur Unterseite der Verbindungsvorrichtung erstreckt, ausgelegt zum Befestigtwerden an einer externen Struktur.
8. Verbindungsvorrichtung nach Anspruch 7, wobei die externe Struktur eine geerdete Struktur ist.
9. Verbindungsvorrichtung nach einem beliebigen der vorhergehenden Ansprüche, wobei der den Leiter aufnehmende Abschnitt und/oder die die Abschirmung aufnehmenden Abschnitte ringförmige Wölbungen aufweisen, die ausgelegt sind zum Erleichtern des Lötens der Kabelanteile an die entsprechenden aufnehmenden Abschnitte.
10. Verfahren zum Verbinden von zwei oder mehreren Koaxialkabeln miteinander, wobei jedes Koaxialkabel einen zentralen Leiter und eine metallische Abschirmung um besagten Leiter umfasst, die folgenden Schritte umfassend:
 - Bereitstellen eines einheitlichen Stücks mit nichtleitender Struktur (110), bietend
 - mindestens zwei Kabelschellenstrukturen (120), die längs entlang einer Achse A-A ausgerichtet sind, wobei besagte Kabelschellenstrukturen (120) angemessen dimensioniert sind, um besagte Kabel aufzunehmen und zu sichern,
 - eine gleiche Anzahl von Leiter aufnehmenden Bereichen (112A, 112B) wie es zu verbindende Kabel gibt, wobei jeder der Leiter aufnehmenden Bereiche als halbzyklindrischer konkave

Wölbung geformt und ausgelegt ist zum Verbinden mit dem leitenden Anteil des Kabels, und
 - eine gleiche Anzahl von Abschirmung aufnehmenden Bereichen (116A, 116B) wie es zu verbindende Kabel gibt, wobei jeder der Abschirmung aufnehmenden Bereiche als halbzyklindrischer konkave Wölbung geformt und ausgelegt ist zum Verbinden mit dem abschirmenden Anteil des Kabels, wobei besagte Leiter aufnehmenden Bereiche (112A, 112B) und besagte Abschirmung aufnehmenden Bereiche (116A, 116B) entlang einer Achse A-A zwischen besagten Kabelschellenstrukturen (120) angeordnet sind,

- Beschichten mit einer elektrisch leitenden Oberflächenschicht von besagten Leiter aufnehmenden Bereichen (112A, 112B), sodass besagte Leiter aufnehmenden Bereiche (112A, 112B) elektrisch miteinander verbunden sind, und

- Beschichten mit einer elektrisch leitenden Oberflächenschicht besagter Abschirmung aufnehmenden Bereiche (116A, 116B), sodass die besagten Abschirmung aufnehmenden Bereiche (116A, 116B) elektrisch miteinander verbunden sind, wobei die Leiter aufnehmenden Bereiche (112A, 112B) elektrisch von den Abschirmung aufnehmenden Bereichen (116A, 116B) isoliert sind,

- Einführen von Kabeln in besagte Kabelschellenstrukturen, sodass jeder leitende Anteil besagten Kabels zu einem Leiter aufnehmenden Bereich (112A, 112B) passt, und sodass jeder abgeschirmte Anteil von besagtem Kabel zu einem Abschirmung aufnehmenden Bereich (116A, 116B) passt,

- Anlöten der metallischen Anteile des Kabels.

11. Verfahren nach Anspruch 10, wobei besagte elektrisch leitenden Oberflächenschichten metallische Anteile sind, die mittels Metallabscheidung auf Kunststoff aufgebracht werden.

12. Verfahren nach Anspruch 10, wobei besagte elektrisch leitenden Oberflächenschichten metallische Anteile sind, die durch Bereitstellen einer Metallfolie aufgebracht werden und an den geeigneten Aufnahmebereichen fixiert werden.

13. Verfahren nach einem beliebigen der Ansprüche 10 bis 12, wobei die nichtleitende Struktur ein Stück ist, das aus nichtleitendem Material geformt ist.

Revendications

1. Dispositif de connexion (100) adapté pour connecter électriquement ensemble au moins deux câbles

coaxiaux, chaque câble coaxial (10) comprenant un conducteur central et un blindage métallique autour dudit conducteur, ledit dispositif étant une pièce unitaire de structure non conductrice (110) présentant :

- un même nombre de zones de réception de conducteur (112A, 112B) que de câbles à connecter, lesdites zones de réception de conducteur (112A, 112B) étant connectées électriquement l'une à l'autre,
- un même nombre de zones de réception de blindage (116A, 116B) que de câbles à connecter, lesdites zones de réception de blindage (116A, 116B) étant connectées électriquement l'une à l'autre,

dans lequel les zones de réception de conducteur (112A, 112B) sont électriquement isolées desdites zones de réception de blindage (116A, 116B),
caractérisé en ce que

- ledit dispositif comprend en outre au moins deux structures d'attache pour câble (120) alignées longitudinalement le long d'un axe A-A, lesdites structures d'attache pour câble (120) étant dimensionnées à une dimension appropriée pour recevoir et fixer lesdits câbles,
- lesdites zones de réception de conducteur (112A, 112B) et lesdites zones de réception de blindage (116A, 116B) sont disposées le long d'un axe A-A entre lesdites structures d'attache pour câble (120),
- chacune desdites zones de réception de conducteur (112A, 112B) et desdites zones de réception de blindage (116A, 116B) a une forme de creux concave semi-cylindrique adaptée pour recevoir la partie respective desdits câbles de calibre approprié,
- les surfaces d'accouplement des zones de réception de conducteur (112A, 112B) et des zones de réception de blindage (116A, 116B) sont recouvertes d'une couche de surface électriquement conductrice, et chacune des zones de réception de conducteur (112A, 112B) et des zones de réception de blindage (116A, 116B) est adaptée pour s'accoupler à la partie correspondante du câble.

2. Dispositif de connexion selon la revendication 1, dans lequel lesdites zones de réception de conducteur et de blindage ont un revêtement métallique déposé sur une structure non conductrice et adapté pour venir en contact électrique respectivement avec ladite partie de conducteur et ladite partie de blindage du câble.
3. Dispositif de connexion selon la revendication 2, présentant :

- un revêtement métallique connecté unique couvrant l'ensemble desdites parties de conducteur desdits câbles, et
- un revêtement métallique connecté unique couvrant l'ensemble desdites parties de blindage desdits câbles

4. Dispositif de connexion selon la revendication 1, dans lequel lesdites zones de réception de conducteur et de blindage ont une pièce métallique fixée à ladite structure non conductrice et adaptée pour venir en contact électrique respectivement avec ladite partie de conducteur et ladite partie de blindage du câble.

5. Dispositif de connexion selon la revendication 4, présentant :

- une pièce métallique de connexion unique permettant une connexion électrique entre toutes lesdites parties de conducteur desdits câbles, et
- une pièce métallique de connexion unique permettant une connexion électrique entre toutes lesdites parties de blindage desdits câbles.

6. Dispositif de connexion selon l'une quelconque des revendications précédentes, comprenant en outre une structure de stabilisation de câble adaptée pour stabiliser le câble dans une position alignée axialement avec la partie de réception de blindage.

7. Dispositif de connexion selon l'une quelconque des revendications précédentes, dans lequel la partie métallique de la zone de réception de blindage s'étend en dessous du dispositif de connexion adapté pour être fixé à une structure externe.

8. Dispositif de connexion selon la revendication 7, dans lequel la structure externe est une structure mise à la terre.

9. Dispositif de connexion selon l'une quelconque des revendications précédentes, dans lequel la section de réception de conducteur et/ou les sections de réception de blindage comprennent des creux annulaires adaptés pour faciliter la soudure des parties de câble aux sections de réception respectives.

10. Procédé de connexion d'au moins deux câbles coaxiaux ensemble, chaque câble coaxial comprenant un conducteur central et un blindage métallique autour dudit conducteur, comprenant les étapes suivantes :

- fournir une pièce unitaire de structure non conductrice (110) présentant
- au moins deux structures d'attache pour câble (120) alignées longitudinalement le long d'un

axe A-A, lesdites structures d'attache pour câble (120) étant dimensionnées à une dimension appropriée pour recevoir et fixer lesdits câbles,

- un même nombre de zones de réception de conducteur (112A, 112B) que de câbles à connecter, chaque zone de réception de conducteur ayant une forme de creux concave semi-cylindrique et étant adaptée pour s'accoupler à la partie de conducteur du câble, et
- un même nombre de zones de réception de blindage (116A, 116B) que de câbles à connecter, chaque zone de réception de blindage ayant une forme de creux concave semi-cylindrique et étant adaptée pour s'accoupler à la partie de blindage du câble, lesdites zones de réception de conducteur (112A, 112B) et lesdites zones de réception de blindage (116A, 116B) sont disposées le long d'un axe A-A entre lesdites structures d'attache pour câble (120),
- recouvrir d'une couche de surface électriquement conductrice lesdites zones de réception de conducteur (112A, 112B), de sorte que lesdites zones de réception de conducteur (112A, 112B) soient connectées électriquement l'une à l'autre, et
- recouvrir d'une couche de surface électriquement conductrice lesdites zones de réception de blindage (116A, 116B), de sorte que lesdites zones de réception de blindage (116A, 116B) soient connectées électriquement l'une à l'autre, les zones de réception de conducteur (112A, 112B) étant isolées électriquement des zones de réception de blindage (116A, 116B),
- insérer des câbles dans lesdites structures d'attache pour câble de sorte que chaque partie de conducteur dudit câble s'accouple à une zone de réception de conducteur (112A, 112B), et de sorte que chaque partie de blindage dudit câble s'accouple à une zone de réception de blindage (116A, 116B),
- souder des parties métalliques du câble en place.

11. Procédé selon la revendication 10, dans lequel lesdites couches de surface électriquement conductrices sont des parties métalliques appliquées par dépôt métallique sur le plastique.
12. Procédé selon la revendication 10, dans lequel lesdites couches de surface électriquement conductrices sont des parties métalliques appliquées en fournissant une feuille de métal et en la fixant dans les zones de réception appropriées.
13. Procédé selon l'une quelconque des revendications 10 à 12, dans lequel la structure non conductrice est une pièce moulée d'un matériau non conducteur.

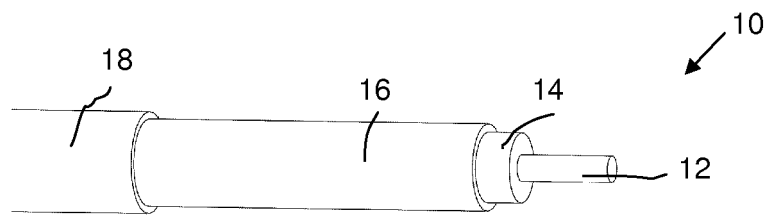


FIGURE 1

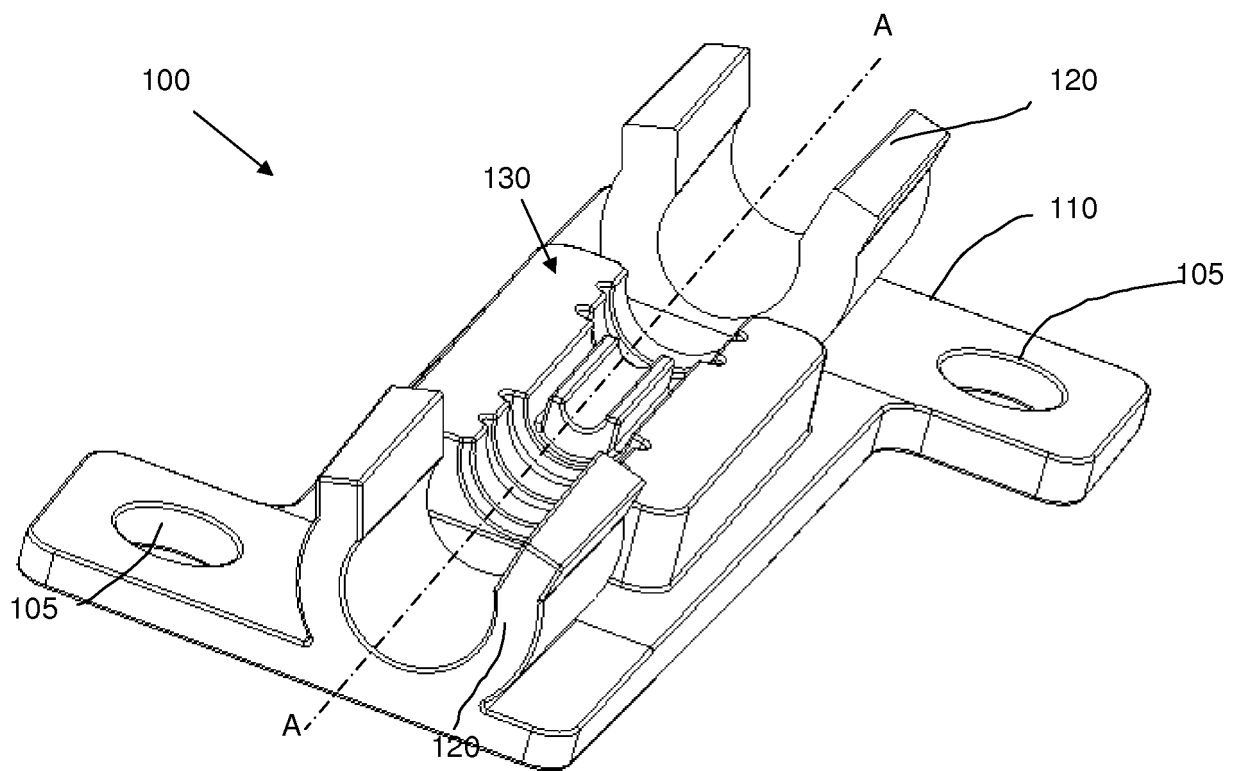


FIGURE 2

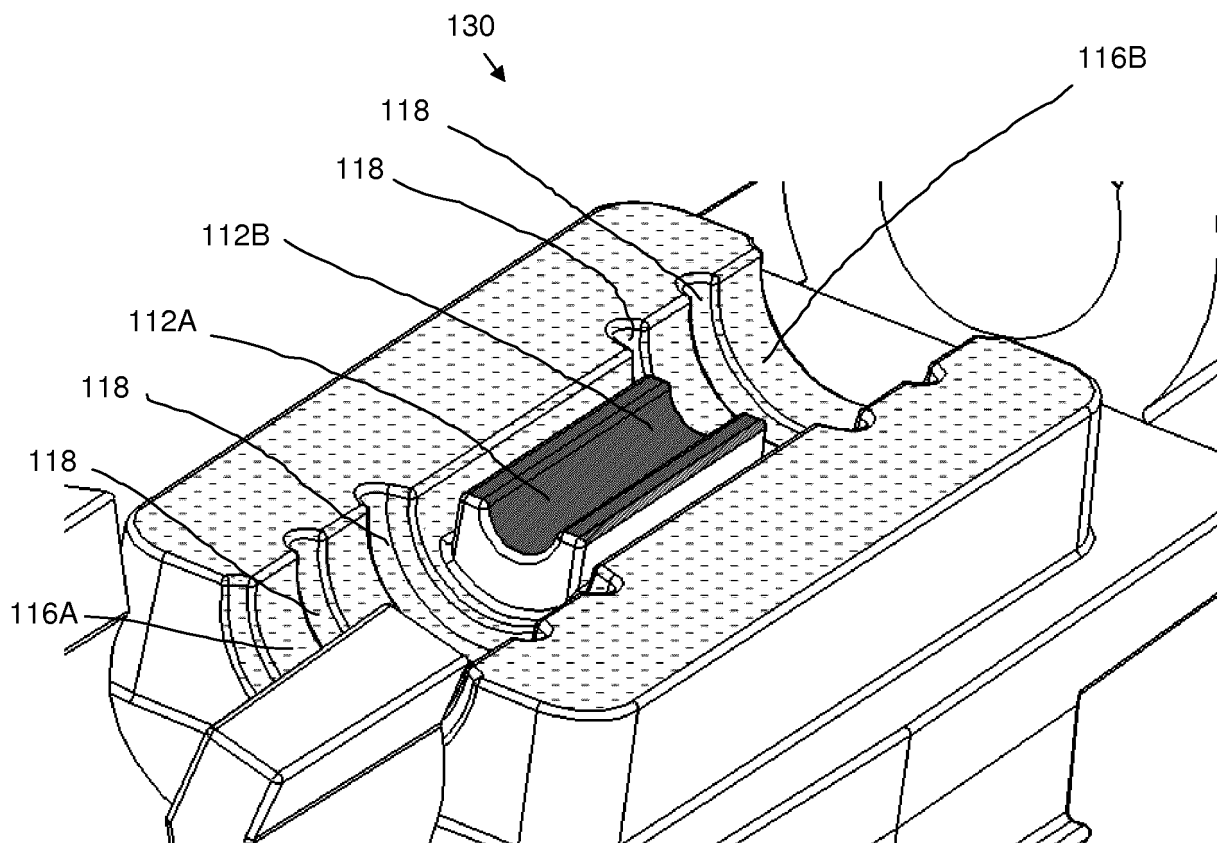


FIGURE 3

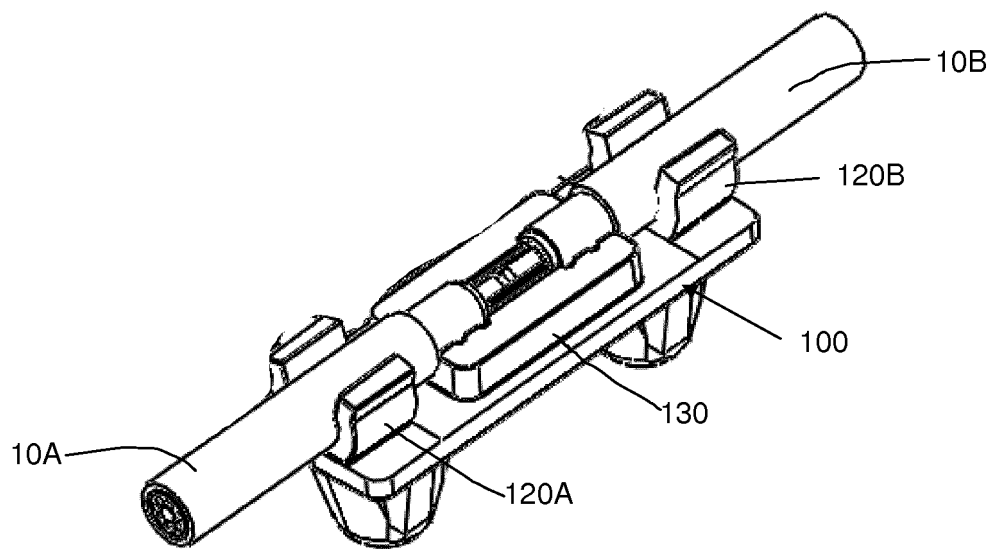


FIGURE 4

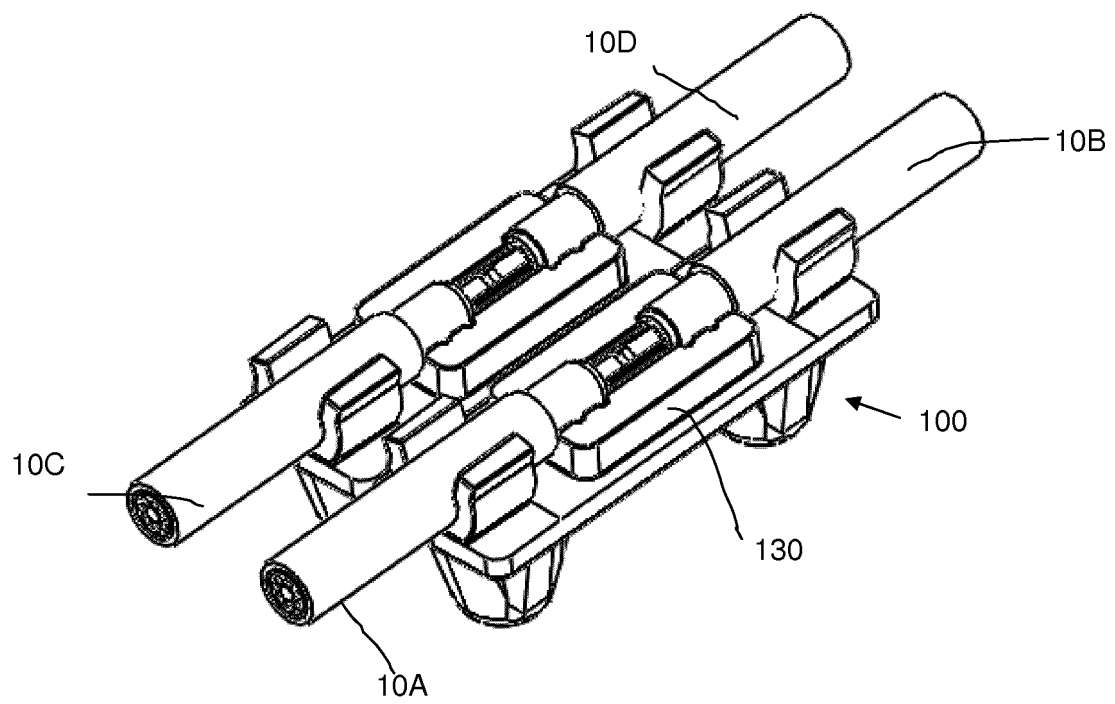


FIGURE 5

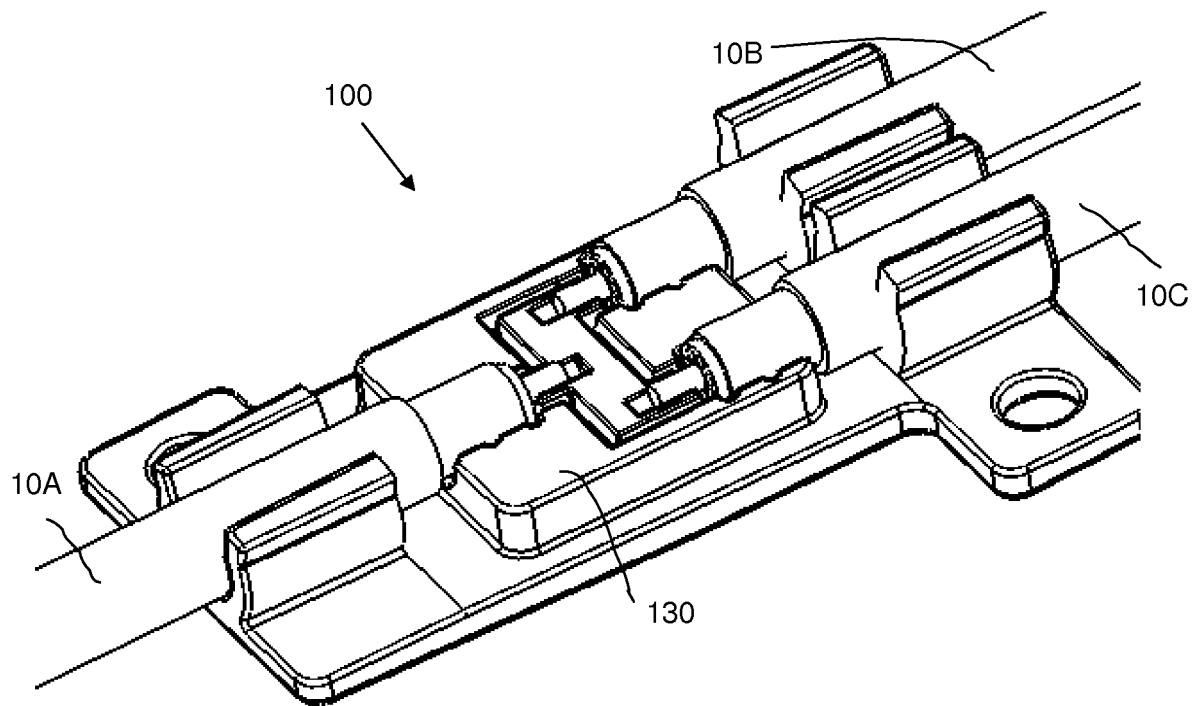


FIGURE 6

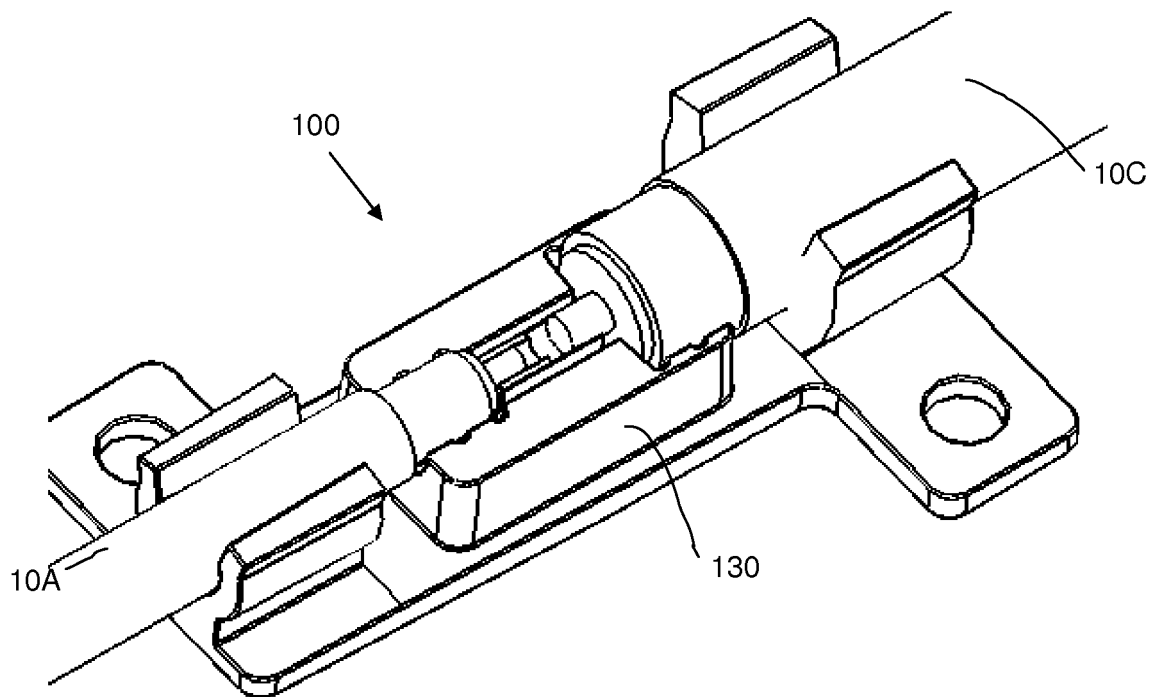


FIGURE 7

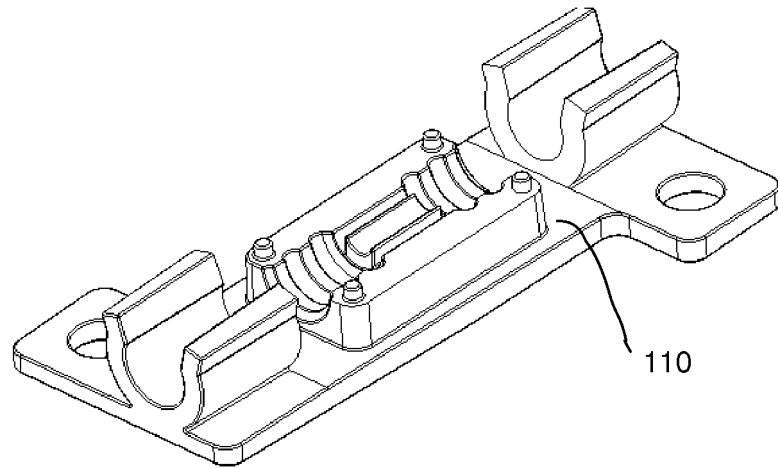


FIGURE 8A

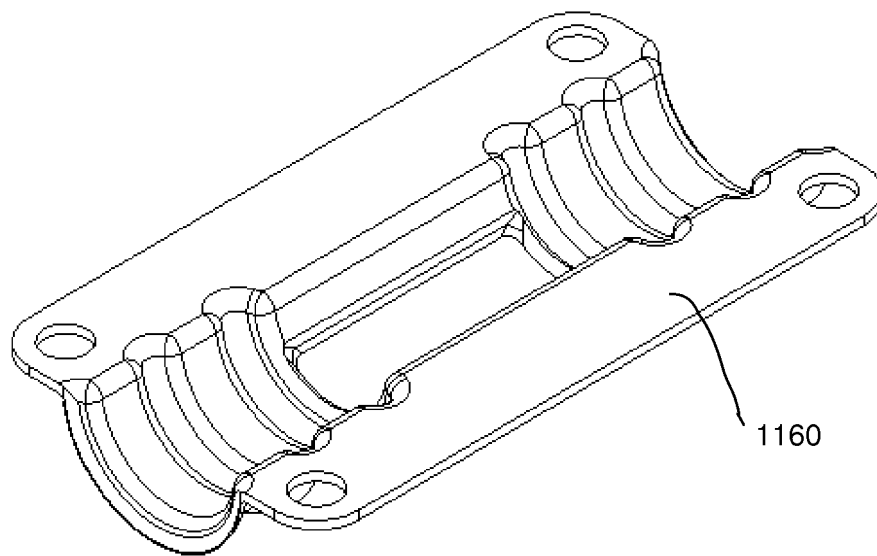


FIGURE 8B

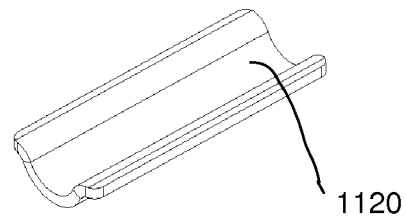


FIGURE 8C

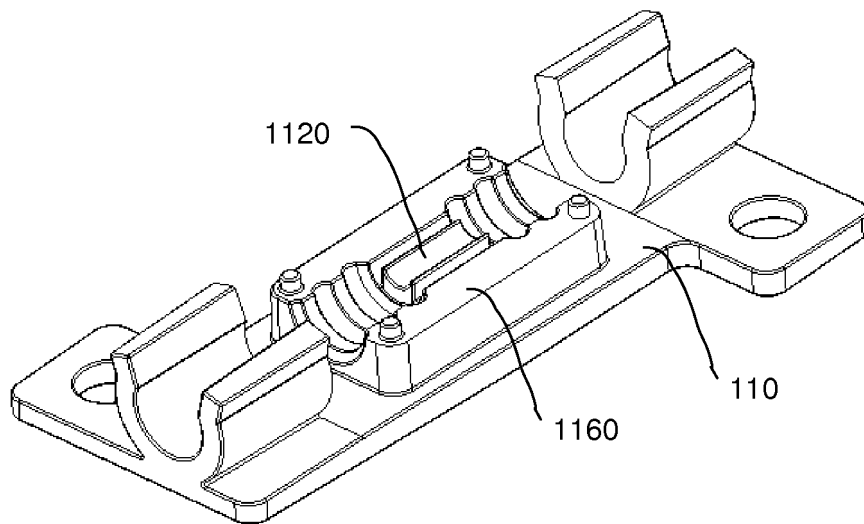


FIGURE 8D

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2011127864 A2 [0006]