(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/014427 A1

(51) International Patent Classification[7]: B65D 81/32

(21) International Application Number:
PCT/GB2004/002586

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0317720.1 29 July 2003 (29.07.2003) GB

(71) Applicant *(for all designated States except US)*: **RECKITT BENCKISER (UK) LIMITED** [GB/GB]; 103-105 Bath Road, Slough, Berkshire SL1 3UH (GB).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **RYMER, Shaun, Patrick** [GB/GB]; Reckitt Benckiser Corporate Services Limited, Dansom Lane, Hull HU8 7DS (GB). **VAN DIEPEN, Jacobus, Simon, Petrus** [NL/DE]; Reckitt Benckiser Produktions GmbH, Dr. Albert Reimann Str. 3, D-68526 Ladenburg (DE).


(74) Agents: **BOWERS, Craig, M.** et al.; Reckitt Benckiser plc, Group Patents Department, Dansom Lane, Hull HU8 7DS (GB).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH,

[Continued on next page]

(54) Title: BOTTLE FOR DISPENSING TWO LIQUIDS

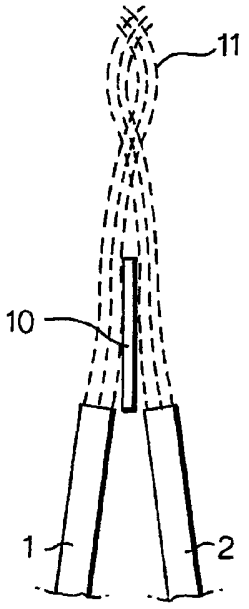

(57) Abstract: A bottle (13) for dispensing two liquids, the bottle (13) comprising two reservoirs, one for each liquid, a nozzle (12) through which the liquids are dispensed from the bottle (13), a passageway (1, 2) from each reservoir leading out of the nozzle, and a deflector plate (10) between the two passageways (1, 2) and projecting from the end of a nozzle (12) in a direction substantially parallel to the direction of flow from the nozzles (12) thereby causing the liquid leaving one passageway to be deflected towards the liquid leaving the other passageway so that the two liquids first mix once they have passed the deflector plate (10).

WO 2005/014427 A1

GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

BOTTLE FOR DISPENSING TWO LIQUIDS

The present invention relates to a bottle for dispensing two liquids which are mixed on dispensing.

The invention has a particular application to dispensing a liquid detergent for example underneath the rim of a toilet bowl. However, the invention can be applicable to any situation where two liquids are required to be stored separately and are then mixed on dispensing.

Currently, detergents for use under the rim of a toilet bowl are one part detergents. There is some benefit, however, in providing a two part detergent which is mixed on dispensing. For example, the two parts may be a bleach and an enzyme which, when combined, would lead to degradation of the enzyme before it could be used. Alternatively, the two parts may be combined to produce a foam effect. As a further alternative, the two parts may be of different colours and may be arranged to interact to provide a third colour. The difficulty with such an arrangement is to provide a combined flow of the two liquids which is both well mixed and stable in the sense that there is no downstream separation of the two flows, so that the mixed flow can be precisely directed.

One way in which we have attempted to overcome this problem is to provide a convergent nozzle as shown schematically in Figs 1 and 2. In these Figures, the nozzle is represented by a pair of passageways 1,2 and a pair of converging deflector plates 3,4 from which two jets 5,6 of liquid are ejected through an exit 7. For a wider exit 7 as shown in Fig 2 the two flows actually tended to diverge. However, when the exit was narrowed to the extent shown in Fig 1, the two jets 5,6 were caused to touch, but the flow was unstable and direction control was poor.

According to the present invention there is provided a bottle for dispensing two liquids, the bottle comprising two reservoirs, one for each liquid, a nozzle through which the liquids are dispensed from the bottle, a passageway from each reservoir leading out of the nozzle, and a deflector plate between the two passageways and projecting from the end of a nozzle in a direction substantially parallel to the direction of flow from the nozzles thereby causing the liquid leaving one passageway to be deflected towards liquid leaving the other passageway so that the two liquids first mix once they have passed the deflector plate.

Such an arrangement has been found to provide reliable mixing of the two jets resulting in a combined jet with very good directional flow.

The invention is based on the wall attachment or Coanda effect. As the deflector plate projects beyond the nozzle, the two liquids travel along this wall for a short time after they are free of the rest of the nozzle. The wall attachment or Coanda effect causes each jet to be deflected towards the other jet as it leaves the deflector plate thereby forming a mixed flow.

One or more further liquids may be dispensed from one or more additional reservoirs. These additional liquids may also be provided with a deflector plate.

The passageways may be concentric, in which case the wall defining the inner passageway projects beyond that of the outer passageway. The liquid from the outer passageway will therefore travel along the wall of the inner passageway after it has left the outer passageway and will hence tend to be deflected inwardly towards the liquid emerging from the inner passageway. However, preferably, the two passageways

are arranged in a side-by-side relationship. The passageways may either be adjacent to one another with a single deflector plate deflecting the liquid from both passageways. Alternatively, the passageways may be spaced apart with each passageway being provided with its own deflector plate or, indeed, only one of the two passageways being provided with a deflector plate. A spaced apart arrangement reduces the possibility of suck back of liquid from one reservoir into the other.

It has been found that the deflecting effect is enhanced if the free end of the deflector plate is inwardly tapered in the direction of flow.

The two passageways in the nozzle may themselves be convergent. However, preferably, the passageways are substantially parallel as this provides improved mixing.

As the bottle is primarily designed for use in a detergent, the nozzle is preferably angled with respect to a main axis of the bottle which will allow the jet to be directed underneath the rim of a toilet bowl.

The viscosity of the two liquids should preferably similar to ensure equal discharge of the liquid. However, if the viscosities are significantly different, it may possible to compensate for this by making one of the nozzles larger. Preferably, the viscosity of each liquid is less than 1000 Cps and more preferably less than 500 Cps. Suitable liquids include standard bleach (which has a viscosity of around 500 Cps) and Harpic (RTM) limescale which has a viscosity of around 380 Cps. Liquids having a viscosity similar to that of water (1 Cps) are suitable for use in this way.

The two liquids are preferably liquids which are mixed to form a detergent. Such a detergent may, for example, be used in fabric care, dishwashing, hard surface cleaning (including drain cleaning and lavatory cleaning) and bleaching/stain removing applications.

The invention also extends to a nozzle through which two liquids are dispensed, the nozzle being provided with two passageways and a deflector plate in the nozzle between the two passageways and projecting from the end of the nozzle thereby causing at least one of the liquids leaving the passageways to be deflected towards the other so that the two liquids first mix once they have passed the deflector plate. Such a nozzle is suitable for use within the bottle referred to above.

Examples of the present invention will now be described with reference to the accompanying drawings, in which:

Figs. 1 and 2 are schematic drawings showing prior art arrangements;

Fig. 3 is a schematic drawing similar to Figs. 1 and 2 showing the principle of the present invention;

Fig. 4 is a schematic view of the top of a bottle showing the nozzle partially in cross section;

Fig. 4A shows a detail from Fig. 4;

Fig. 5 is a plan view of the nozzle;

Fig. 6 is a perspective view of a bottle in accordance with the present invention;

Fig. 7 shows the top of the bottle of Figs. 6 with the cap removed;

Fig. 8 is a plan view of the top of the bottle as shown in Fig. 7; and

Fig. 9 is a perspective view showing the inside of the cap of the bottle of Fig. 6.

The principle behind the invention is illustrated in Fig. 3. Liquid flows from two passageways 1,2 as two jets 5,6. The two jets then flow along opposite sides of deflector plate 10. As the two flows pass the end of the deflector plate, the wall attachment or Coanda effect causes a slight deflection of each jet towards the deflector plate 10. As shown in Fig. 3, the two flows are generally parallel and are deflected gently towards one another readily forming a stable mixed flow 11. It has been found that the two jets tend to combine with a twisting motion as shown in Fig. 3. This promotes mixing of the two jets.

A more detailed view of the nozzle is shown in Figs 4, 4A and 5. A nozzle 12 is provided on the neck of a bottle 13. In practice, the nozzle will be offset at an angle to a main axis of the bottle to allow the dispensed jet to be directed underneath the rim of a toilet bowl. The nozzle comprises two parallel passageways 1,2 each linked with a separate reservoir compartment (not shown) within the bottle 13. Between the two nozzles 1,2 is a deflector plate 10. As shown in the Figs. 4, 4A and 5, the passageways 1,2 are recessed slightly into the deflector plate 10 itself. The plate extends in a plane parallel to the direction of flow from the passageways 1,2 and is perpendicular to a line joining the centres of the two passageways 1,2. The plate projects a short distance beyond the end of passageways 1,2. The top of the deflector plate 10 is chamfered on both sides to promote the deflection of the liquid.

Although not shown in the drawings, the nozzle will be closed by a flip up cap. The cap will be provided with a pair of depending pins to seal the two passageways 1,2.

A bottle in accordance with the present invention is shown in Figs. 6 to 9. The bottle 20 is split into two separate reservoirs 21, 22. The bottle is closed by a cap 23. Each of the reservoirs 21, 22 discharges through a respective nozzle 24, 25 as best shown in Figs. 7 and 8. Each nozzle, 24, 25 has a housing portion with an outer wall 26 which is inwardly tapered in the direction of flow to provide a gradually narrowing passage approaching a discharge outlet 27 at the end of each nozzle. Each outlet 27 is offset to the side of the nozzle closest to the other nozzle, and is surrounded by a boss 28 projecting from the end of the nozzle.

As best seen in Fig. 8, the outlet 27 is offset within the boss 28 such that it is adjacent to the wall of the boss which is closest to the opposite nozzle. As the liquid is discharged, it will be in contact with this wall of the boss which will produce the deflection effect referred to above.

For the stability of the structure, a web 29 links the two nozzles.

As shown in Fig. 9, the cap 23 which is a push fit into the bottle 20 is provided with a pair of bosses 30 which fit within bosses 28, so that both outlets 27 are sealed simply by pushing the cap into place.

Claims

1. A bottle for dispensing two liquids, the bottle comprising two reservoirs, one for each liquid, a nozzle through which the liquids are dispensed from the bottle, a passageway from each reservoir leading out of the nozzle, and a deflector plate between the two passageways and projecting from the end of a nozzle in a direction substantially parallel to the direction of flow from the nozzles thereby causing the liquid leaving one passageway to be deflected towards the liquid leaving the other passageway so that the two liquids first mix once they have passed the deflector plate.

2. A bottle according to claim 1, wherein the passageways are arranged in a side-by-side relationship.

3. A bottle according to claim 1 or claim 2, wherein a single deflector plate is arranged to deflect the liquid from both passageways.

4. A bottle according to claim 1 or claim 2, wherein only one passageway is provided with the deflector plate.

5. A bottle according to claim 1 or claim 2, wherein each passageway has its own deflector plate.

6. A bottle according to any preceding claim, wherein the free end of the deflector plate is tapered in the direction of flow.

7. A bottle according to any preceding claim, wherein the two passageways are substantially parallel in the nozzle.

8. A bottle according to any one of the preceding claims, wherein the nozzle is angled in respect to a main axis of the bottle.

9. A bottle according to any one of the preceding claims, containing two liquids having a viscosity of less than 1000 Cps, and preferably less than 500 Cps.

10. A bottle according to any one of the preceding claims containing two liquids which will mix to form a detergent.

11. A nozzle through which two liquids are dispensed, the nozzle being provided with two passageways and a deflector plate in the nozzle between the two passageways and projecting from the end of the nozzle thereby causing at least one of the liquids leaving the passageways to be deflected towards the other so that the two liquids first mix once they have passed the deflector plate.

Fig.3.

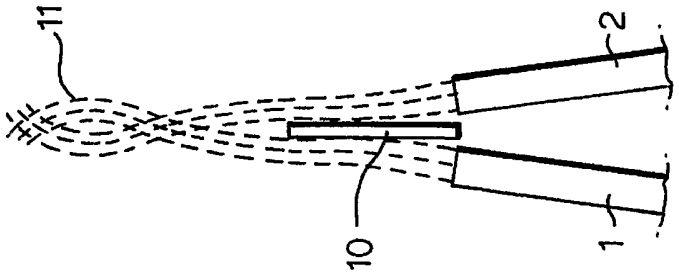


Fig.2.

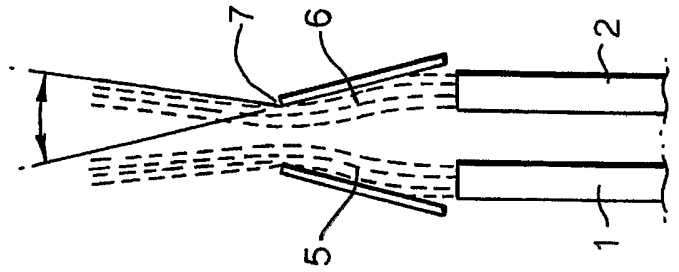


Fig.1.

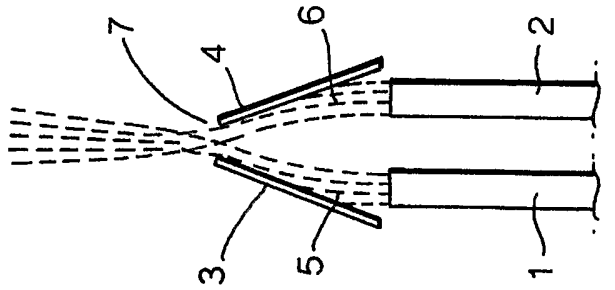


Fig.4.

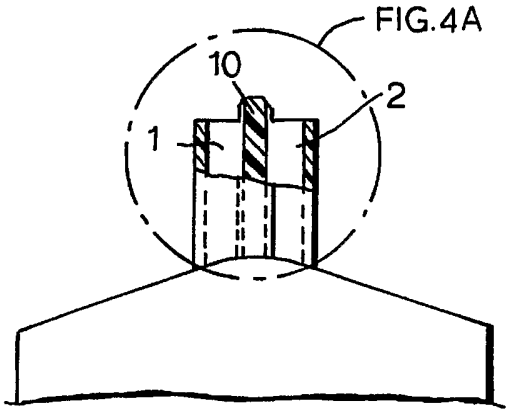


Fig.4A.

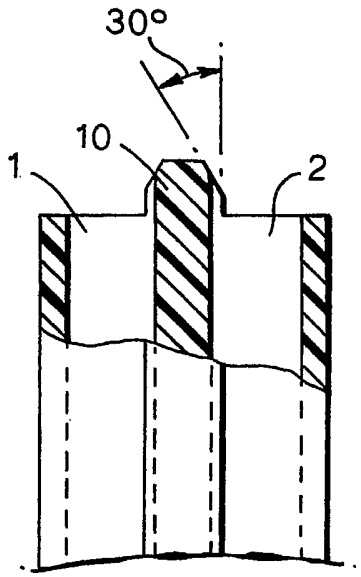


Fig.5.

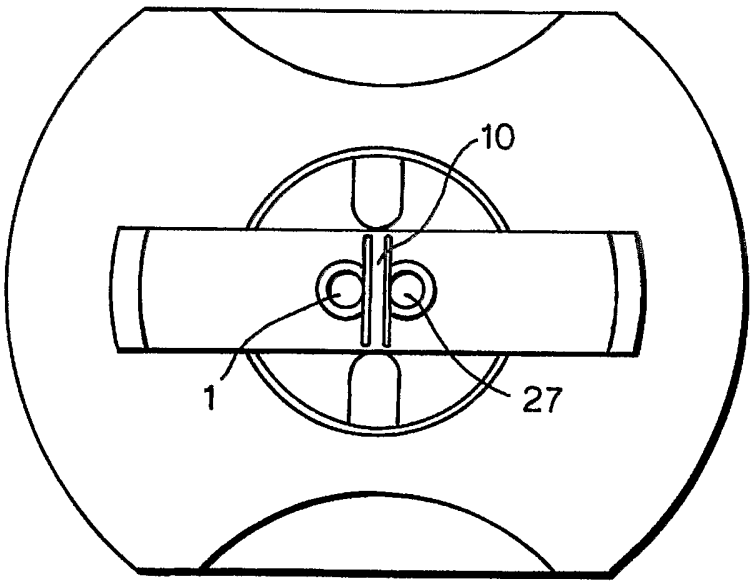


Fig.6.

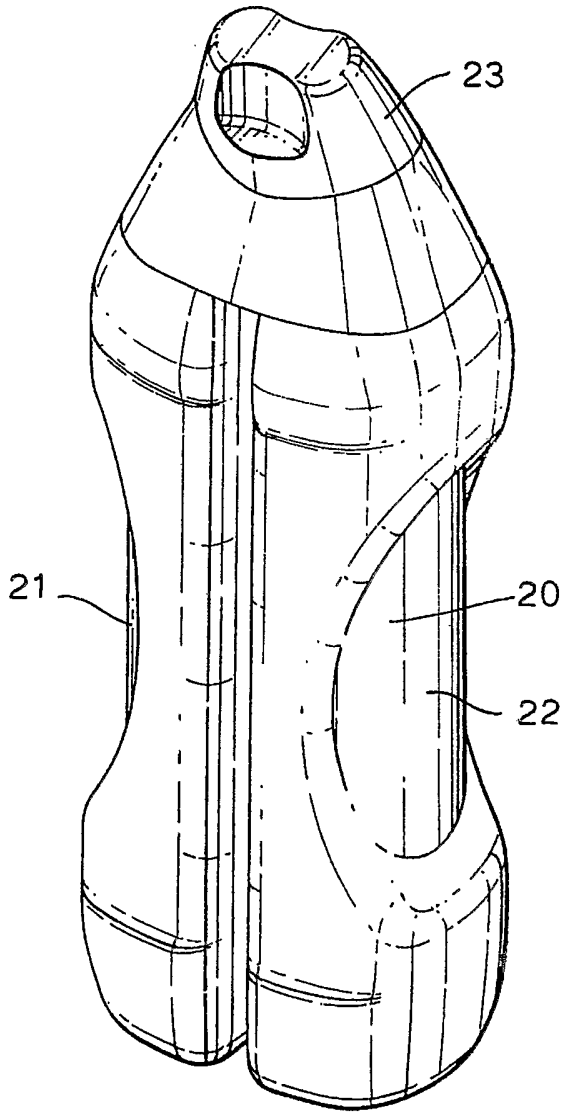


Fig.7.

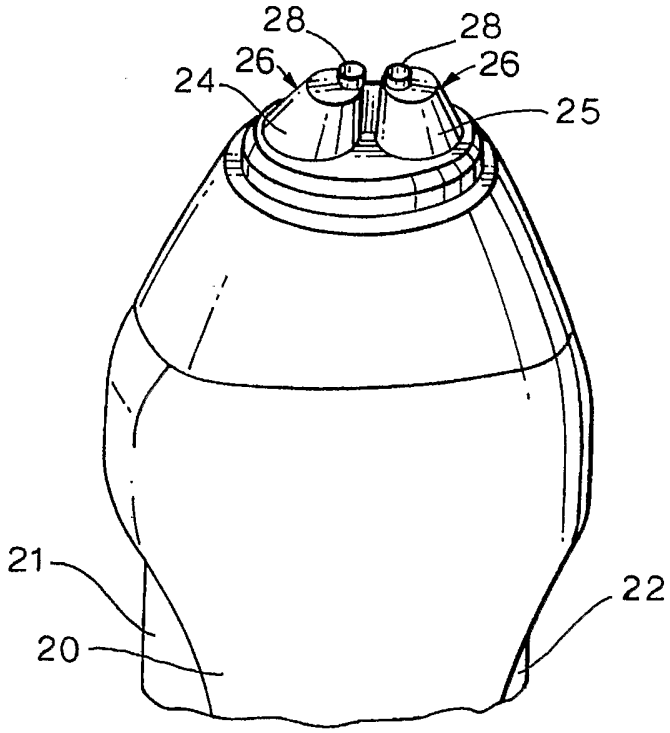


Fig.8.


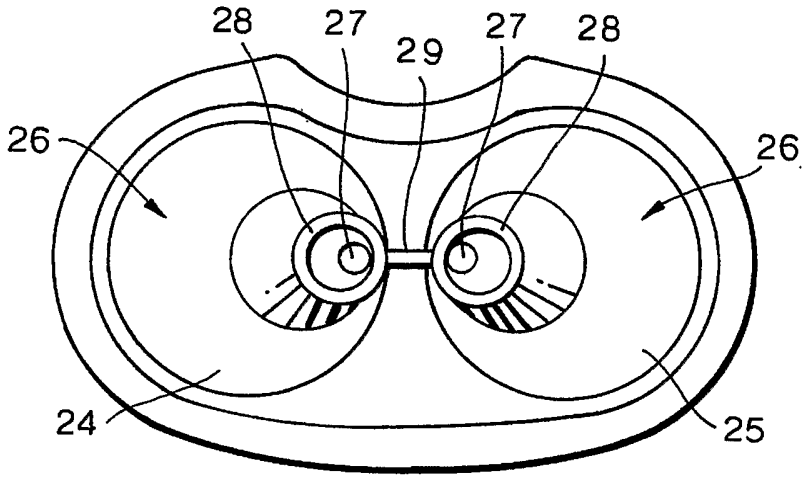


Fig.9.

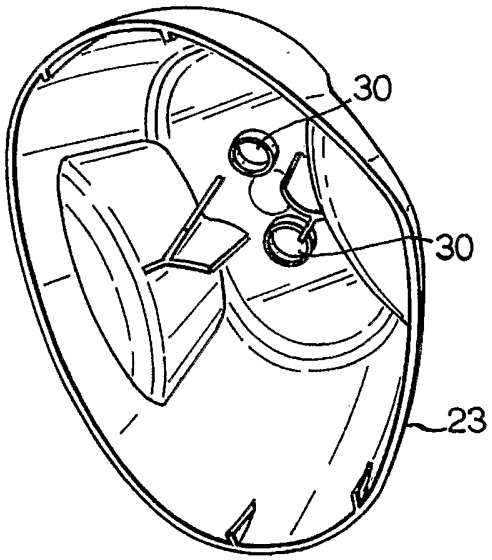

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB2004/002586

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B65D81/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 42 19 598 A (CREATECHNIC AG DIETLIKON) 23 December 1993 (1993-12-23) the whole document	1,2,5,7, 9-11
X	US 6 550 647 B1 (KUENZ HANS) 22 April 2003 (2003-04-22) the whole document	1-3,7, 9-11
P,X	EP 1 346 926 A (PZ CUSSONS INTERNATIONAL LTD) 24 September 2003 (2003-09-24) the whole document	1-11
X	US 6 065 643 A (HARVEY JOHN W ET AL) 23 May 2000 (2000-05-23) the whole document	11

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
1 October 2004	12/10/2004

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Fournier, J

Form PCT/ISA/210 (second sheet) (January 2004)

INTERNATIONAL SEARCH REPORT

Int onal Application No
PCT/GB2004/002586

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 989 758 A (KELLER WILHELM A) 5 February 1991 (1991-02-05) the whole document	1-3,6-11
A	US 6 439 433 B1 (DUBACH WERNER FRITZ ET AL) 27 August 2002 (2002-08-27) figures	8

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB2004/002586

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 4219598 A	23-12-1993	DE 4219598 A1	23-12-1993
US 6550647 B1	22-04-2003	EP 0979782 A1	16-02-2000
		AU 4893699 A	06-03-2000
		BR 9914305 A	19-06-2001
		CA 2339937 A1	24-02-2000
		HU 0102891 A2	28-11-2001
		PL 346133 A1	28-01-2002
		AT 202993 T	15-07-2001
		WO 0009413 A1	24-02-2000
		CN 1321134 T	07-11-2001
		DE 59801007 D1	16-08-2001
		ES 2161032 T3	16-11-2001
		PT 979782 T	30-11-2001
		TR 200100423 T2	21-09-2001
EP 1346926 A	24-09-2003	EP 1346926 A1	24-09-2003
		US 2004016773 A1	29-01-2004
US 6065643 A	23-05-2000	AT 209148 T	15-12-2001
		CA 2237860 A1	22-05-1997
		DE 69617260 D1	03-01-2002
		DE 69617260 T2	25-07-2002
		DK 861200 T3	13-05-2002
		EP 0861200 A2	02-09-1998
		WO 9718144 A2	22-05-1997
		GB 2322616 A ,B	02-09-1998
		JP 2000500105 T	11-01-2000
US 4989758 A	05-02-1991	DE 3763941 D1	30-08-1990
		EP 0261466 A1	30-03-1988
		JP 2529702 B2	04-09-1996
		JP 63082969 A	13-04-1988
US 6439433 B1	27-08-2002	CH 692021 A5	15-01-2002
		AU 6932898 A	11-11-1998
		EP 1028903 A1	23-08-2000
		IE 980277 A1	21-10-1998
		WO 9846500 A1	22-10-1998