



(51) International Patent Classification:

H04N 5/232 (2006.01) ***G05D 1/00*** (2006.01)
B64D 47/08 (2006.01)

(21) International Application Number:

PCT/CN2016/102190

(22) International Filing Date:

14 October 2016 (14.10.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: SZ DJI TECHNOLOGY CO., LTD.
[CN/CN]; 6F, HKUST SZ IER Bldg., No. 9 Yuexing 1st Rd.
Hi-Tech Park (South), Nanshan District, Shenzhen, Guang-
dong 518057 (CN).

(72) Inventors: **ZHAO, Cong;** 6F, HKUST SZ IER Bldg., No. 9 Yuexing 1st Rd. Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN). **FENG, Xuyang;** 6F, HKUST SZ IER Bldg., No. 9 Yuexing 1st Rd. Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN). **QIAN, Jie;** 6F, HKUST SZ IER Bldg., No. 9 Yuex-

ing 1st Rd. Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN). **LI, Sijin**; 6F, HKUST SZ IER Bldg., No. 9 Yuexing 1st Rd. Hi-Tech Park (South), Nanshan District, Shenzhen, Guangdong 518057 (CN).

(74) Agent: SHENZHEN SCIENBIZIP INTELLECTUAL PROPERTY AGENCY CO., LTD.; 9F, Rongqun Building, No. 83 Longguan East Rd., Longhua new Dist., Shenzhen, Guangdong 518109 (CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(54) Title: SYSTEM AND METHOD FOR MOMENT CAPTURING

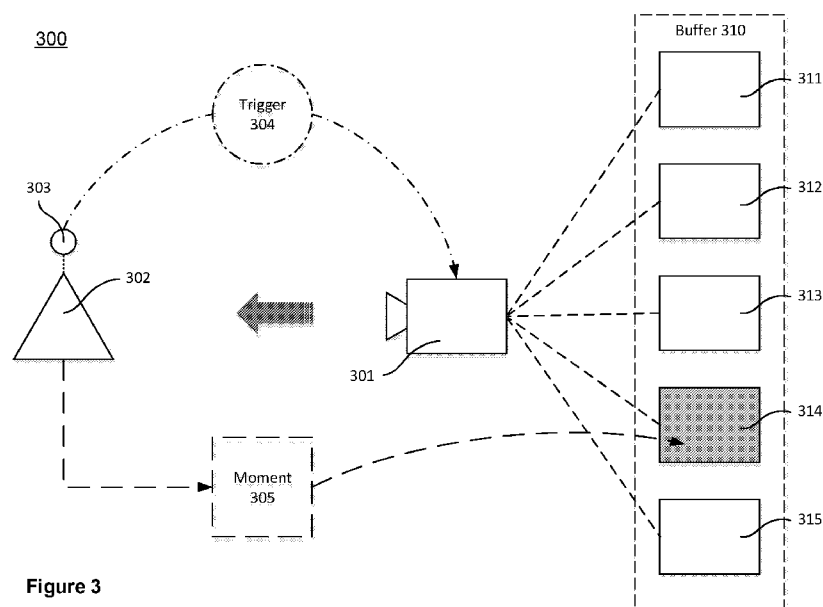


Figure 3

(S7) Abstract: System and method can support moment capturing in an imagery environment. The system can obtain a plurality of images of an object, wherein the plurality of images are captured using one or more imaging devices within a period of time while the object is being tracked. Furthermore, the system can perform motion and/or state estimation of the object for the period of time. Then, the system can select one or more images related to a moment from the plurality of images based on the motion and/or state estimation of the object.



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Copyright Notice

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by anyone of the patent document or the patent disclosure, as it appears in the Patent and Trademark Office patent file or records, but otherwise reserves all copyright rights whatsoever.

SYSTEM AND METHOD FOR MOMENT CAPTURING

Field of the Invention

[1] The disclosed embodiments relate generally to image capturing and more particularly, but not exclusively, to moment capturing.

Background

[2] All photographers, both amateur photographers and professional photographers, are constantly searching for the right moment. A universal challenge is how to anticipate the right timing for capturing the exciting and memorable moments that are impossible or difficult to reproduce. This is the general area that embodiments of the invention are intended to address.

Summary

[3] Described herein are systems and methods that provide a technical solution for moment capturing in an imagery environment. The system can obtain a plurality of images of an object, wherein the plurality of images are captured using one or more imaging devices within a period of time while the object is being tracked. Furthermore, the system can perform motion and/or state estimation of the object for the period of time. Then, the system can select one or more images related to a moment from the plurality of images based on the motion and/or state estimation of the object.

Brief Description of Drawings

[4] **Figure 1** illustrates a movable platform environment, in accordance with various embodiments of the present invention.

[5] **Figure 2** illustrates an exemplary carrier in a movable platform environment, in accordance with embodiments.

[6] **Figure 3** illustrates moment capturing in an imagery environment, in accordance with various embodiments of the present invention.

[7] **Figure 4** illustrates an exemplary imagery system for moment capturing in accordance with various embodiments of the present invention.

[8] **Figure 5** shows an exemplary illustration of moment capturing based on motion tracking in an imagery environment, in accordance with various embodiments of the present invention.

[9] **Figure 6** illustrates capturing a moment of an object based on tracking the motion of the object in an imagery environment, in accordance with various embodiments of the present invention.

[10] **Figure 7** shows an exemplary illustration of moment capturing based on state estimation in an imagery environment, in accordance with various embodiments of the present invention.

[11] **Figure 8** illustrates capturing a moment based on tracking an object with changing state in an imagery environment, in accordance with various embodiments of the present invention.

[12] **Figure 9** illustrates moment capturing based on object tracking using an unmanned aerial vehicle (UAV), in accordance with various embodiments of the present invention.

[13] **Figure 10** shows a flowchart of moment capturing in an imagery environment, in accordance with various embodiments of the present invention.

Detailed Description

[14] The invention is illustrated, by way of example and not by way of limitation, in the figures of the accompanying drawings in which like references indicate similar elements. It should be noted that references to “an” or “one” or “some” embodiment(s) in this disclosure are not necessarily to the same embodiment, and such references mean at least one.

[15] The description of the invention as following uses an unmanned aerial vehicle (UAV) as example for a movable platform. It will be apparent to those skilled in the art that other types of movable platform can be used without limitation.

[16] Traditionally, only the professionals may be able to capture the exciting and memorable moments. Using the conventional technologies, it is necessary for the photographer to be

equipped with a high level of skills, a lot of patience and abundant resources for capturing these precious moments. For example, in order to capture a perfect picture of a person in a simple jump motion, the jumper and the photographers may need to cooperate and repeat the process for many times until success.

[17] In accordance with various embodiments of the present invention, the system can provide a technical solution for supporting convenient moment capturing in an imagery environment. The system can obtain a plurality of images of an object, wherein the plurality of images are captured using one or more imaging devices (e.g. a camera carried by a movable platform such as a UAV) within a period of time while the object is being tracked. Furthermore, the system can perform motion and/or state estimation of the object for the period of time. Then, the system can select one or more images related to a moment from the plurality of images based on the motion and/or state estimation of the object. Thus, the technical solution can avoid the traditional trial-and-error approaches and allows a single user to conveniently perform the moment capturing task without a need for additional resource and time.

[18] **Figure 1** illustrates a movable platform environment, in accordance with various embodiments of the present invention. As shown in Figure 1, a movable platform 118 (also referred to as a movable object) in a movable platform environment 100 can include a carrier 102 and a payload 104. Although the movable platform 118 can be depicted as an aircraft, this depiction is not intended to be limiting, and any suitable type of movable platform can be used. One of skill in the art would appreciate that any of the embodiments described herein in the context of aircraft systems can be applied to any suitable movable platform (e.g., a UAV). In some instances, the payload 104 may be provided on the movable platform 118 without requiring the carrier 102.

[19] In accordance with various embodiments of the present invention, the movable platform 118 may include one or more movement mechanisms 106 (e.g. propulsion mechanisms), a sensing system 108, and a communication system 110.

[20] The movement mechanisms 106 can include one or more of rotors, propellers, blades, engines, motors, wheels, axles, magnets, nozzles, or any mechanism that can be used by animals, or human beings for effectuating movement. For example, the movable platform may have one or more propulsion mechanisms. The movement mechanisms 106 may all be of the

same type. Alternatively, the movement mechanisms 106 can be different types of movement mechanisms. The movement mechanisms 106 can be mounted on the movable platform 118 (or vice-versa), using any suitable means such as a support element (e.g., a drive shaft). The movement mechanisms 106 can be mounted on any suitable portion of the movable platform 118, such on the top, bottom, front, back, sides, or suitable combinations thereof.

[21] In some embodiments, the movement mechanisms 106 can enable the movable platform 118 to take off vertically from a surface or land vertically on a surface without requiring any horizontal movement of the movable platform 118 (e.g., without traveling down a runway). Optionally, the movement mechanisms 106 can be operable to permit the movable platform 118 to hover in the air at a specified position and/or orientation. One or more of the movement mechanisms 106 may be controlled independently of the other movement mechanisms. Alternatively, the movement mechanisms 106 can be configured to be controlled simultaneously. For example, the movable platform 118 can have multiple horizontally oriented rotors that can provide lift and/or thrust to the movable platform. The multiple horizontally oriented rotors can be actuated to provide vertical takeoff, vertical landing, and hovering capabilities to the movable platform 118. In some embodiments, one or more of the horizontally oriented rotors may spin in a clockwise direction, while one or more of the horizontally rotors may spin in a counterclockwise direction. For example, the number of clockwise rotors may be equal to the number of counterclockwise rotors. The rotation rate of each of the horizontally oriented rotors can be varied independently in order to control the lift and/or thrust produced by each rotor, and thereby adjust the spatial disposition, velocity, and/or acceleration of the movable platform 118 (e.g., with respect to up to three degrees of translation and up to three degrees of rotation).

[22] The sensing system 108 can include one or more sensors that may sense the spatial disposition, velocity, and/or acceleration of the movable platform 118 (e.g., with respect to various degrees of translation and various degrees of rotation). The one or more sensors can include any of the sensors, including GPS sensors, motion sensors, inertial sensors, proximity sensors, or image sensors. The sensing data provided by the sensing system 108 can be used to control the spatial disposition, velocity, and/or orientation of the movable platform 118 (e.g., using a suitable processing unit and/or control module). Alternatively, the sensing system 108 can be used to provide data regarding the environment surrounding the movable platform, such

as weather conditions, proximity to potential obstacles, location of geographical features, location of manmade structures, and the like.

[23] The communication system 110 enables communication with terminal 112 having a communication system 114 via wireless signals 116. The communication systems 110, 114 may include any number of transmitters, receivers, and/or transceivers suitable for wireless communication. The communication may be one-way communication, such that data can be transmitted in only one direction. For example, one-way communication may involve only the movable platform 118 transmitting data to the terminal 112, or vice-versa. The data may be transmitted from one or more transmitters of the communication system 110 to one or more receivers of the communication system 112, or vice-versa. Alternatively, the communication may be two-way communication, such that data can be transmitted in both directions between the movable platform 118 and the terminal 112. The two-way communication can involve transmitting data from one or more transmitters of the communication system 110 to one or more receivers of the communication system 114, and vice-versa.

[24] In some embodiments, the terminal 112 can provide control data to one or more of the movable platform 118, carrier 102, and payload 104 and receive information from one or more of the movable platform 118, carrier 102, and payload 104 (e.g., position and/or motion information of the movable platform, carrier or payload; data sensed by the payload such as image data captured by a payload camera; and data generated from image data captured by the payload camera). In some instances, control data from the terminal may include instructions for relative positions, movements, actuations, or controls of the movable platform, carrier, and/or payload. For example, the control data may result in a modification of the location and/or orientation of the movable platform (e.g., via control of the movement mechanisms 106), or a movement of the payload with respect to the movable platform (e.g., via control of the carrier 102). The control data from the terminal may result in control of the payload, such as control of the operation of a camera or other image capturing device (e.g., taking still or moving pictures, zooming in or out, turning on or off, switching imaging modes, change image resolution, changing focus, changing depth of field, changing exposure time, changing viewing angle or field of view).

[25] In some instances, the communications from the movable platform, carrier and/or payload may include information from one or more sensors (e.g., of the sensing system 108 or of the

payload 104) and/or data generated based on the sensing information. The communications may include sensed information from one or more different types of sensors (e.g., GPS sensors, motion sensors, inertial sensor, proximity sensors, or image sensors). Such information may pertain to the position (e.g., location, orientation), movement, or acceleration of the movable platform, carrier, and/or payload. Such information from a payload may include data captured by the payload or a sensed state of the payload. The control data transmitted by the terminal 112 can be configured to control a state of one or more of the movable platform 118, carrier 102, or payload 104. Alternatively or in combination, the carrier 102 and payload 104 can also each include a communication module configured to communicate with terminal 112, such that the terminal can communicate with and control each of the movable platform 118, carrier 102, and payload 104 independently.

[26] In some embodiments, the movable platform 118 can be configured to communicate with another remote device in addition to the terminal 112, or instead of the terminal 112. The terminal 112 may also be configured to communicate with another remote device as well as the movable platform 118. For example, the movable platform 118 and/or terminal 112 may communicate with another movable platform, or a carrier or payload of another movable platform. When desired, the remote device may be a second terminal or other computing device (e.g., computer, laptop, tablet, smartphone, or other mobile device). The remote device can be configured to transmit data to the movable platform 118, receive data from the movable platform 118, transmit data to the terminal 112, and/or receive data from the terminal 112. Optionally, the remote device can be connected to the Internet or other telecommunications network, such that data received from the movable platform 118 and/or terminal 112 can be uploaded to a website or server.

[27] Figure 2 illustrates an exemplary carrier in a movable platform environment, in accordance with embodiments. The carrier 200 can be used to couple a payload 202 such as an image capturing device to a movable platform such as a UAV.

[28] The carrier 200 can be configured to permit the payload 202 to rotate about one or more axes, such as three axes: X or pitch axis, Z or roll axis, and Y or yaw axis, relative to the movable platform. For instance, the carrier 200 may be configured to permit the payload 202 to rotate only around one, two, or three of the axes. The axes may or may not be orthogonal to each other. The

range of rotation around any of the axes may or may not be limited and may vary for each of the axes. The axes of rotation may or may not intersect with one another. For example, the orthogonal axes may intersect with one another. They may or may not intersect at a payload 202. Alternatively, they may not intersect.

[29] The carrier 200 can include a frame assembly 211 comprising one or more frame members. For example, a frame member can be configured to be coupled with and support the payload 202 (e.g., image capturing device).

[30] In some embodiments, the carrier 201 can comprise one or more carrier sensors 213 useful for determining a state of the carrier 201 or the payload 202 carried by the carrier 201. The state information may include a spatial disposition (e.g., position, orientation, or attitude), a velocity (e.g., linear or angular velocity), an acceleration (e.g., linear or angular acceleration), and/or other information about the carrier, a component thereof, and/or the payload 202. In some embodiments, the state information as acquired or calculated from the sensor data may be used as feedback data to control the rotation of the components (e.g., frame members) of the carrier. Examples of such carrier sensors may include motion sensors (e.g., accelerometers), rotation sensors (e.g., gyroscope), inertial sensors, and the like.

[31] The carrier sensors 213 may be coupled to any suitable portion or portions of the carrier (e.g., frame members and/or actuator members) and may or may not be movable relative to the UAV. Additionally or alternatively, at least some of the carrier sensors may be coupled directly to the payload 202 carried by the carrier 201.

[32] The carrier sensors 213 may be coupled with some or all of the actuator members of the carrier. For example, three carrier sensors can be respectively coupled to the actuator members 212 for a three-axis carrier and configured to measure the driving of the respective actuator members 212 for the three-axis carrier. Such sensors can include potentiometers or other similar sensors. In an embodiment, a sensor (e.g., potentiometer) can be inserted on a motor shaft of a motor so as to measure the relative position of a motor rotor and motor stator, thereby measuring the relative position of the rotor and stator and generating a position signal representative thereof. In an embodiment, each actuator-coupled sensor is configured to provide a positional signal for the corresponding actuator member that it measures. For example, a first potentiometer can be used to generate a first position signal for the first actuator member, a second potentiometer can

be used to generate a second position signal for the second actuator member, and a third potentiometer can be used to generate a third position signal for the third actuator member. In some embodiments, carrier sensors 213 may also be coupled to some or all of the frame members of the carrier. The sensors may be able to convey information about the position and/or orientation of one or more frame members of the carrier and/or the image capturing device. The sensor data may be used to determine position and/or orientation of the image capturing device relative to the movable platform and/or a reference frame.

[33] The carrier sensors 213 can provide position and/or orientation data that may be transmitted to one or more controllers (not shown) on the carrier or movable platform. The sensor data can be used in a feedback-based control scheme. The control scheme can be used to control the driving of one or more actuator members such as one or more motors. One or more controllers, which may be situated on a carrier or on a movable platform carrying the carrier, can generate control signals for driving the actuator members. In some instances, the control signals can be generated based on data received from carrier sensors indicative of the spatial disposition of the carrier or the payload 202 carried by the carrier 201. The carrier sensors may be situated on the carrier or the payload 202, as previously described herein. The control signals produced by the controllers can be received by the different actuator drivers. Based on the control signals, the different actuator drivers may control the driving of the different actuator members, for example, to effect a rotation of one or more components of the carrier. An actuator driver can include hardware and/or software components suitable for controlling the driving of a corresponding actuator member and receiving position signals from a corresponding sensor (e.g., potentiometer). The control signals can be transmitted simultaneously to the actuator drivers to produce simultaneous driving of the actuator members. Alternatively, the control signals can be transmitted sequentially, or to only one of the actuator drivers. Advantageously, the control scheme can be used to provide feedback control for driving actuator members of a carrier, thereby enabling more precise and accurate rotation of the carrier components.

[34] In some instances, the carrier 201 can be coupled indirectly to the UAV via one or more damping elements. The damping elements can be configured to reduce or eliminate movement of the load (e.g., payload, carrier, or both) caused by the movement of the movable platform (e.g., UAV). The damping elements can include any element suitable for damping motion of the

coupled load, such as an active damping element, a passive damping element, or a hybrid damping element having both active and passive damping characteristics. The motion damped by the damping elements provided herein can include one or more of vibrations, oscillations, shaking, or impacts. Such motions may originate from motions of the movable platform that are transmitted to the load. For example, the motion may include vibrations caused by the operation of a propulsion system and/or other components of a UAV.

[35] The damping elements may provide motion damping by isolating the load from the source of unwanted motion by dissipating or reducing the amount of motion transmitted to the load (e.g., vibration isolation). The damping elements may reduce the magnitude (e.g., amplitude) of the motion that would otherwise be experienced by the load. The motion damping applied by the damping elements may be used to stabilize the load, thereby improving the quality of images captured by the load (e.g., image capturing device), as well as reducing the computational complexity of image stitching steps required to generate a panoramic image based on the captured images.

[36] The damping elements described herein can be formed from any suitable material or combination of materials, including solid, liquid, or gaseous materials. The materials used for the damping elements may be compressible and/or deformable. For example, the damping elements can be made of sponge, foam, rubber, gel, and the like. For example, damping elements can include rubber balls that are substantially spherical in shape. The damping elements can be of any suitable shape such as substantially spherical, rectangular, cylindrical, and the like. Alternatively or in addition, the damping elements can include piezoelectric materials or shape memory materials. The damping elements can include one or more mechanical elements, such as springs, pistons, hydraulics, pneumatics, dashpots, shock absorbers, isolators, and the like. The properties of the damping elements can be selected so as to provide a predetermined amount of motion damping. In some instances, the damping elements may have viscoelastic properties. The properties of the damping elements may be isotropic or anisotropic. For instance, the damping elements may provide motion damping equally along all directions of motion. Conversely, the damping element may provide motion damping only along a subset of the directions of motion (e.g., along a single direction of motion). For example, the damping

elements may provide damping primarily along the Y (yaw) axis. As such, the illustrated damping elements can be configured to reduce vertical motions.

[37] Although various embodiments may be depicted as utilizing a single type of damping elements (e.g., rubber balls), it shall be understood that any suitable combination of types of damping elements can be used. For example, the carrier may be coupled to the movable platform using one or more damping elements of any suitable type or types. The damping elements may have the same or different characteristics or properties such as stiffness, viscoelasticity, and the like. Each damping element can be coupled to a different portion of the load or only to a certain portion of the load. For instance, the damping elements may be located near contact or coupling points or surfaces of between the load and the movable platforms. In some instances, the load can be embedded within or enclosed by one or more damping elements.

[38] **Figure 3** illustrates moment capturing in an imagery environment, in accordance with various embodiments of the present invention. As shown in Figure 3, an imaging device 301 (e.g., a camera) in an imagery environment 300 can be used for capturing a moment 305 associated with an object 302. For example, the imagery environment 300 can include an unmanned aerial vehicle (UAV) that carries an imaging device, such as a camera, for capturing images of the object 302. Alternatively, the imaging device 301 in the imagery environment 300 can be any other types of imaging devices, such as the imaging devices that are installed at a fixed location or attached to a portable handler or carrier.

[39] In accordance with various embodiments, a moment 305 can be relate to the motion and/or any state change of an object 302. In one example, a photographer may desire to capture a moment when a person is at the highest point of a jump or when the person's body is fully extended in a dive right before breaking into the water. In another example, a photographer may desire to capture a moment when a firework is fully displayed or when a racing car is passing another car at the last turn in a race. In yet another example, a photographer may desire to capture a moment when a bay is smiling or when a flower is blossoming. There are many different types of moments, some of which may even exist and can be appreciated beyond the description of words.

[40] In accordance with various embodiments, the imagery system can support convenient moment capturing in an imagery environment 300. As shown in Figure 3, the imaging device 301 can capture a plurality of images 311-315 after receiving a trigger 304.

[41] In accordance with various embodiments, the trigger 304 can be based on one or more signals or indicators generated by the object 302. Alternatively, the trigger can be based on one or more signals or indicators generated by a user or any object in the surrounding environment. Thus, the start of the imagery process can be straightforward and convenient. For example, a single person can operate the imagery system without additional helps.

[42] In accordance with various embodiments, the trigger 304 can be image based. For example, the object 302 in an image captured by the imaging device 301 can be a person. The person can interact with the imaging device 301 using indicators such as gestures, which are useful for conveying various messages such as starting to capture images. The gestures, which are visible body actions, can include various body movement by a person, such as the movement of hands, face, or other parts of the human body. Additionally, a gesture control mechanism can be used for detecting the trigger 304, such as recognizing and comprehending the different styles of gestures. In some embodiments, the gesture control mechanism can be based on various artificial intelligence and machine learning techniques, e.g. a convolutional neural network (CNN).

[43] In accordance with various embodiments, the trigger 304 can be device based. For example, a device 303 attached to the object 302 can send a signal to the imaging device 302 for triggering the start of the image capturing process. The signal can include location information of the object 302, e.g. the related global navigation satellite system (GNSS) data, and instructions to the imaging device 301.

[44] In accordance with various embodiments, the imagery system can support moment capturing by taking advantage of an image buffer. As shown in Figure 3, the captured images 311-315 can be maintained in a buffer 310 (e.g. stored in a memory). In some embodiments, the buffering of the captured images 311-315 can be configured in different modes, e.g. based on various rules. For example, the buffering can be set at a predetermined frequency or can be dynamically configured based on a predetermined rule. Also, the length of the time period for

buffering can be predetermined, configurable and/or dynamically determined. Thus, a user can conveniently adjust the buffering of the captured images in the imagery environment 300.

[45] In accordance with various embodiments, the imagery system can automatically select, from the buffered images, an image 314 (or a subset of images) of the object 302 corresponding to the moment 305. The selection can be configurable, such as based on various selection rules. For example, the selection rules can be prescribed based on motion/state estimation of the object 302. Alternatively, the selection can be a random process that is controlled or performed by a user. For example, the image(s) can be selected at a time point (or in a time period) that is pertinent to the particular moment 305.

[46] **Figure 4** illustrates an exemplary imagery system for moment capturing in accordance with various embodiments of the present invention. As shown in Figure 4, an imagery system 400 can start to capture images upon detecting a trigger 401, e.g. by detecting a triggering event or receiving a triggering signal from the object. The captured images can be maintained, e.g. stored using a buffering process 402. Furthermore, the imagery system 400 can perform motion/state estimation 403 to obtain motion information and/or state information of the object. Then, such information can be used by a selection process 404 for selecting one or more images related to a moment 405 from the buffered images 402 (for capturing the moment 405).

[47] In accordance with various embodiments, the imagery system 400 can support moment capturing based on object tracking 406. The object tracking can be image based or device based. For example, the object being tracked (e.g. a person) can wear a device, such as a location sensor such as a global positioning satellite (GPS) receiver, which can provide a location signal to the tracking device (e.g. a UAV). In other examples, the device may be embedded in or otherwise attached to the object being tracked. Alternatively, the tracking can be performed based on computer vision technologies. For example, a bounding box, which is used for identifying the object being tracked, can move along with the object in the captured images consistently as the object moves. Thus, the imagery system 400 can be aware of the location and movement information of the object being tracked, either based on the received location signal or captured images.

[48] In accordance with various embodiments, the imagery system 400 can perform motion and/or state estimation 403 based on the obtained location and movement information of the

object. For example, based on the object tracking, the imagery system 400 can obtain the speed, acceleration, and spatial coordinates of the object, by evaluating the movement of the bounding box surrounding the object being tracked. Also, the imagery system 400 can obtain state information including temperature, color, shape of the object based on the location information of the object. Then, based on the motion and/or state information of the object, the imagery system 400 can automatically select one or more images pertinent to the moment 405, or allow a user to conveniently select images that are desirable for the moment 405.

[49] Furthermore, the imagery system 400 can synchronize the estimated motion and/or state of the object with the plurality of images that are captured using the imaging device. For example, a UAV can track the object independently of the images that are captured by a main camera onboard. In such a case, the imagery system 400 can use a time stamp to ensure that the timing for tracking the object is synchronized with the timing for capturing images by the main camera.

[50] In accordance with various embodiments, the selection process 404 can be used for selecting images that are pertinent to the moment 405 in order to reduce the number of images that are buffered. For example, the selection process can use a selecting rule for determining a time interval between the selected images. An exemplary selecting rule can define a fixed or variable frequency in selecting the images based on the estimated motion and/or state of the object. Then, the imagery system 400 can apply the determined time interval for updating the buffered images.

[51] In accordance with various embodiments, the imagery system 400 can comprise a controller (not shown) that can generate instructions for controlling various components in the imagery system 400. For example, the controller can run on one or more microprocessors on an imaging device, a movable platform that carries the imaging device, a user terminal or any other computing device in the imagery system (such as a smart phone).

[52] In accordance with various embodiments, the imagery system 400 can use multiple devices, such as multiple UAVs, for tracking an object (e.g. a person) in order for capturing a moment of the object from different angles simultaneously. For example, the imagery system 400 can start the buffering process 402, after detecting a trigger 401 when any of the tracking devices receives a signal or detects an indicator (e.g. from the object being tracked, etc.). Then, based on the images captured or signals received (by any or all of the devices), the imagery system 400 can

perform motion/state estimation 403 for the object being tracked. Furthermore, based on the obtained motion and/or state information, the imagery system 400 can select one or more images related to the moment 405 from the buffered images 402 (i.e. for capturing the moment 405).

[53] In some embodiments, the imagery system 400 can employ a timing control mechanism for synchronizing the image capturing processes among the multiple devices. For example, the imagery system 400 can apply a time stamp to the images captured by the different devices. Alternatively, the imagery system 400 can send a signal to the multiple devices for capturing images simultaneously. Thus, by taking advantage of the timing control system, the imagery system 400 can obtain (and then buffer) multiple sets of images that are pertinent to a particular moment 405, with each set of images of the object being tracked being captured from different angles at a substantially same time. Additionally, a user can select and edit the sets of images that are pertinent to the moment 405 for capturing the moment 405 from an ideal angle.

[54] **Figure 5** shows an exemplary illustration of moment capturing based on motion tracking in an imagery environment, in accordance with various embodiments of the present invention. As shown in Figure 5, an imagery system 500 can capture a plurality of images as an object moves along a path 510 within a time period. For example, the object is at the position 511 at the time point T0, and the object is at the position 513 at the time point T1.

[55] In accordance with various embodiments, the imagery system 500 can maintain the captured images 501 in an image buffer (not shown). Furthermore, the imagery system 500 can analyze the locations of the object in the buffered images 301 for performing motion estimation to obtain motion information of the object for the time period between T0 and T1. For example, the motion information may indicate the different motion modes of the object, e.g. whether a person is in a jump or a dive, or whether multiple objects are collide into each other or a single object is broken into pieces. Additionally, the motion information may contain information that characterizes the motion of the object, such as the location, speed, or acceleration of the object, and/or the rotation and orientation of the object.

[56] In accordance with various embodiments, the imagery system 500 can perform motion estimation based on object tracking. For example, the imagery system 500 can estimate the motion of the object being tracked during the time period between T0 and T1 by evaluating the

movement of a bounding box that is used to identify the object in the buffered images 501. Then, based on the estimated motion information, the imagery system 500 can select one or more images, e.g. image 502, from the buffered images 501. As shown in Figure 5, the image 502 contains a portion of the object 522, which corresponds to the object at the position 512 at the moment T_c . Additionally, the imagery system 500 allows the user to pick a desirable image, which may not be exactly at the moment T_c .

[57] Alternatively, the tracking of the object can be based on image frames captured by image sensors that are arranged differently from the imaging device that are used for capturing the buffered images. For example, in addition to a main camera, a UAV may be equipped with a set of imaging devices, which are arranged at different locations onboard the UAV, e.g. for the purpose of obstacle avoidance and object tracking. Thus, the motion estimation of the object being tracked can be performed based on a perspective transformation that compensates for the difference of orientation and field of view (FOV) between the imaging devices and the main camera.

[58] Figure 6 illustrates capturing a moment of an object based on tracking the motion of the object in an imagery environment, in accordance with various embodiments of the present invention. As shown in Figure 6, an imagery system 600 can capture a moment (e.g. T_c) based on object tracking.

[59] In accordance with various embodiments, the imagery system 600 can capture a moment associated with an object based on image buffering while tracking the object. As shown in Figure 6, the imagery system 600 can buffer a plurality of images of the object while the object is moving along a motion path 620 for a time period (e.g. between the time points T_0 and T_1 along a timeline 610). At the time point T_0 , an image can be captured for the object locating at the position 611. A trigger 603, e.g. a gesture detected in the image 601, can trigger the start of the image buffering and moment capturing process. At the time point T_01 , an image can be captured for the object locating at the position 613. The imagery system 600 can stop the image buffering and moment capturing process after detecting an indicator 605 (e.g. based on the motion/state estimation) or after receiving a signal or a predetermined time period as the user prescribes.

[60] For instances, the imagery system 600 can capture a person in a jump motion. As soon as the imagery system detects the person in an initial position for jumping, the imaging device can

start capture images that track the person in the air until the person lands back on the ground. While the person is in the air (i.e. in real time) or after the person actually lands (i.e. for post-processing), the imagery system can analyze the motion of the person, e.g. by obtaining a vertical distance of the person from the ground, the vertical and horizontal speed of the person, and the extension or the degree of inclination of the body in each captured image.

[61] Then, based on the obtained motion information of the person, the imagery system 600 can output an image 602, or allow a user to pick an image 602, for the moment T_c from the buffered images. In the example as shown in Figure 6, the person may be located at the top of a trajectory path line 620 at the moment T_c . Alternatively, the image 602 can be select for the moment when the body of the person is fully extended or with the largest degree of inclination. Additionally, the imagery system 600 allows the user to pick a desirable image, which may not be exactly at the moment T_c .

[62] **Figure 7** shows an exemplary illustration of moment capturing based on state estimation in an imagery environment, in accordance with various embodiments of the present invention. As shown in Figure 7, an imagery system 700 can capture a plurality of images as a state of an object changes during a time period, e.g. between the time points T_0 and T_1 along the timeline 720.

[63] In accordance with various embodiments, the imagery system 700 can maintain the captured images 701 in an image buffer (not shown). Furthermore, the imagery system 700 can analyze the state change of the object among the buffered images 701 for capturing a moment that is associated with the state change of the object.

[64] As shown in Figure 7, along the timeline 720, the object is in the state 711 at the time point T_0 and the object is in the state 713 at the time point T_1 . At the time point T_c , the object is in a special state 712, which is a moment desirable for capturing. By taking advantage of a state estimation process, the imagery system 700 can obtain various state information associated with the object, such as the color, shape or temperature of the object. Then, the imagery system 700 can select one or more images, e.g. an image 702, from the buffered images 701. As shown in Figure 7, the image 702 contains a portion of the object 722, which corresponds to the object in the state 712 at the moment T_c .

[65] In accordance with various embodiments, the imagery system 600 can perform the state estimation based on the motion estimation. For example, based on object tracking, the imagery system 600 can be aware of the location of the object, as well as other movement characteristics of the object, such as speed, acceleration, rotation and orientation of the object being tracked. On the other hand, the tracking of the object can take into account of the state change associated with the object being tracked. For example, the imagery system 600 can ensure that the object is being tracked even when the object changes color or shape.

[66] **Figure 8** illustrates capturing a moment based on tracking an object with changing state in an imagery environment, in accordance with various embodiments of the present invention. As shown in Figure 8, an imagery system 800 can capture a moment (e.g. T_c) for an object based on tracking the object as its state changes.

[67] In accordance with various embodiments, the imagery system 800 can support the moment capturing based on image buffering while tracking an object with changing state. As shown in Figure 8, the imagery system 800 can buffer a plurality of images of the object, which is in a state transition 820 during a time period (e.g. the time period between the time point T_0 and the time point T_1 along the timeline 810). For example, at the time point T_0 , an image can be captured for the object, which is in the state 811. A trigger 803, e.g. a signal or a predetermined state, can be detected in the image 801, e.g. when the person pose a specific gesture which triggers the start of the image buffering. Then, the imagery system can output an image 802, or let a user to pick the image 802 from the buffered images at a moment T_c .

[68] For instance, the imagery system can capture an explosion of a firework at the moment T_c based on object tracking and buffering. The imagery system 800 can direct or cause the imaging device to start capturing images as soon as detecting a noise from the firing a shell. The imaging device can capture a series of images that track the shell and sparkles before and after the explosion. While the firework is in the air (i.e. in real time) or after the sparkles fade away (i.e. for post-processing), the imagery system 800 can analyze the state of the firework, e.g. evaluating the stage of the firework (e.g. before and after the explosion) in the buffered images. Also, the imagery system 800 can analyze the color, brightness, and pattern of the firework in each image. Additionally, the imagery system can analyze the motion information of the firework in the air, e.g. obtaining a distance of the firework from the ground, the vertical and horizontal speed of the

firework, and the scale and the position relative to another firework. In some embodiments, such motion information of the firework can be used by the imagery system 800 for analyzing the state of the firework. For example, the motion information for different shells can be beneficial in determining the right moment for capturing a picture with multiple fireworks displaying simultaneously.

[69] Then, based on the obtained motion information of the person, the imagery system 800 can output an image 802, or allow a user to pick an image 802, for the moment T_c from the buffered images. In the example as shown in Figure 8, the firework may be fully exploded (e.g. displaying a smile face) at the moment T_c . Alternatively, the image 802 can be select for the moment when multiple fireworks are displayed simultaneously. Additionally, the imagery system 800 allows the user to pick a desirable image, which may not be exactly at the moment T_c .

[70] **Figure 9** illustrates moment capturing based on object tracking using an unmanned aerial vehicle (UAV), in accordance with various embodiments of the present invention. As shown in Figure 9, a camera 903, which is carried by an UAV 901, can capture an image 902 while tracking the movement of an object (e.g. a person 904) in an imagery environment 900.

[71] For example, the UAV 901 can track the person 904, such as the user herself, while she is moving either in a jump motion along the path line 911 or jogging along a path line 912 in the three-dimensional (3D) space. The UAV 901 can track and monitor the movement of the person 904 by analyzing the images captured using the camera 903 with a field of view (FOV) 920. One exemplary method for determining the movement characteristics of the user can be performed by taking advantage of various computer vision technologies, such as an optical flow algorithm, and other useful techniques, such as various gait recognition methods.

[72] In accordance with various embodiments, an imagery system can comprise a controller (not shown) that can generate instructions for controlling various components in the imagery system. For example, the controller can run on one or more microprocessors on an imaging device 903, a movable platform 901 that carries the imaging device, a user terminal or any other computing device in the imagery system (such as a smart phone).

[73] As shown in Figure 9, the imagery system can obtain necessary dimensional information, e.g. the height information of the person, based on a bounding box that is used for identifying and tracking the person 904. Furthermore, the imagery system can perform more specialized

motion estimation based on the obtained dimensional information. For example, the imagery system for the UAV 901 can perform jump detection, in order to distinguish between a jump motion by the person 904 and the normal up and down motion of the human body, e.g. while the person 904 is jogging. To perform jump detection, the UAV 901 can determine that the person is in a jump motion when the bounding box for tracking the person moves upward for a substantial distance (e.g. for the distance 921, which is beyond a threshold distance). On the other hand, the UAVs 901 can recognize the normal up and down motion of the human body 922, e.g. for the distance 922, which is below the threshold distance, when the person is jogging.

[74] In accordance with various embodiments, the imagery system can select and maintain (e.g. store) the buffered images for the time period from the beginning of a jump to the landing the person. In some embodiments, the selection can be based on various predetermined rules. For example, the images can be selected based on a predetermined time interval, or a predetermined vertical distance interval. Alternatively, a cluster of images can be selected when the person is close or at the top point. Thus, the imagery system can automatically select an image that is pertinent to a particular moment.

[75] In some embodiments, the image 902 can be transmitted to a user terminal that is remote from the UAV 901. Thus, the imagery system may allow a user to select an image from a set of images that are buffered.

[76] **Figure 10** shows a flowchart of moment capturing in an imagery environment, in accordance with various embodiments of the present invention. As shown in Figure 10, at step 1001, the system can obtain a plurality of images of an object, wherein the plurality of images are captured using one or more imaging devices within a period of time while the object is being tracked. Furthermore, at step 1002, the system can perform motion and/or state estimation of the object for the period of time. Then, at step 803, the system can select one or more images from the plurality of images based on the motion and/or state estimation of the object.

[77] Many features of the present invention can be performed in, using, or with the assistance of hardware, software, firmware, or combinations thereof. Consequently, features of the present invention may be implemented using a processing system (e.g., including one or more processors). Exemplary processors can include, without limitation, one or more general purpose microprocessors (for example, single or multi-core processors), application-specific integrated

circuits, application-specific instruction-set processors, graphics processing units, physics processing units, digital signal processing units, coprocessors, network processing units, audio processing units, encryption processing units, and the like.

[78] Features of the present invention can be implemented in, using, or with the assistance of a computer program product which is a storage medium (media) or computer readable medium (media) having instructions stored thereon/in which can be used to program a processing system to perform any of the features presented herein. The storage medium can include, but is not limited to, any type of disk including floppy disks, optical discs, DVD, CD-ROMs, microdrive, and magneto-optical disks, ROMs, RAMs, EPROMs, EEPROMs, DRAMs, VRAMs, flash memory devices, magnetic or optical cards, nanosystems (including molecular memory ICs), or any type of media or device suitable for storing instructions and/or data.

[79] Stored on any one of the machine readable medium (media), features of the present invention can be incorporated in software and/or firmware for controlling the hardware of a processing system, and for enabling a processing system to interact with other mechanism utilizing the results of the present invention. Such software or firmware may include, but is not limited to, application code, device drivers, operating systems and execution environments/containers.

[80] Features of the invention may also be implemented in hardware using, for example, hardware components such as application specific integrated circuits (ASICs) and field-programmable gate array (FPGA) devices. Implementation of the hardware state machine so as to perform the functions described herein will be apparent to persons skilled in the relevant art.

[81] Additionally, the present invention may be conveniently implemented using one or more conventional general purpose or specialized digital computer, computing device, machine, or microprocessor, including one or more processors, memory and/or computer readable storage media programmed according to the teachings of the present disclosure. Appropriate software coding can readily be prepared by skilled programmers based on the teachings of the present disclosure, as will be apparent to those skilled in the software art.

[82] While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example, and not limitation. It will be

apparent to persons skilled in the relevant art that various changes in form and detail can be made therein without departing from the spirit and scope of the invention.

[83] The present invention has been described above with the aid of functional building blocks illustrating the performance of specified functions and relationships thereof. The boundaries of these functional building blocks have often been arbitrarily defined herein for the convenience of the description. Alternate boundaries can be defined so long as the specified functions and relationships thereof are appropriately performed. Any such alternate boundaries are thus within the scope and spirit of the invention.

[84] The foregoing description of the present invention has been provided for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. The breadth and scope of the present invention should not be limited by any of the above-described exemplary embodiments. Many modifications and variations will be apparent to the practitioner skilled in the art. The modifications and variations include any relevant combination of the disclosed features. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, thereby enabling others skilled in the art to understand the invention for various embodiments and with various modifications that are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalence.

Claims

What is claimed is

1. An imagery method, comprising:

obtaining a plurality of images of an object, wherein the plurality of images are captured using one or more imaging devices within a period of time while the object is being tracked;

performing motion and/or state estimation of the object for the period of time; and

selecting one or more images related to a moment from the plurality of images based on the motion and/or state estimation of the object.

2. The method of Claim 1, further comprising:

maintaining the plurality of images in an image buffer.

3. The method of Claim 2, further comprising:

causing the one or more imaging devices to capture the plurality of images upon receiving a trigger.

4. The method of Claim 3, wherein the trigger is an indicator that is detected from an image of the object or a signal received from the object.

5. The method of Claim 2, wherein the plurality of images are buffered at a frequency that is predetermined or dynamically configured based on a rule.

6. The method of Claim 1, further comprising:

obtaining one or more images that are used to track the object; and

determining motion information of the object from the one or more images that are used to track the object.

7. The method of Claim 6, wherein the motion information of the object is obtained by analyzing a movement of a bounding box that is used to identify the object in the one or more images that are used to track the object.
8. The method of Claim 6, wherein the one or more images that are used to track the object are captured using one or more image sensors that are arranged differently from said one or more imaging devices.
9. The method of Claim 1, further comprising:
 - receiving one or more location signals from the object; and
 - determining motion information of the object based on the one or more location signals received from the object.
10. The method of Claim 1, further comprising:
 - synchronizing the estimated motion and/or state of the object with the plurality of images that are captured using the one or more imaging devices.
11. The method of Claim 1, further comprising:
 - determining a time interval between the selected images based on a selecting rule, wherein the time interval is used to select the one or more images.
12. The method of Claim 11, further comprising:
 - storing the selected images in an image buffer.
13. The method of Claim 11, further comprising:
 - identifying an image from the selected images based on a user input.
14. The method of Claim 1, wherein the plurality of images of the object are received from an unmanned aerial vehicle (UAV).

15. An imagery system, comprising:

one or more microprocessors;

a controller running on the one or more microprocessors, wherein the controller operates to
obtain a plurality of images of an object, wherein the plurality of images are captured
using one or more imaging devices within a period of time while the object is being tracked;
perform motion and/or state estimation of the object for the period of time; and
select one or more images related to a moment from the plurality of images based on
the motion and/or state estimation of the object.

16. The imagery system of Claim 15, wherein the controller operates to maintain the plurality of
images in an image buffer.

17. The imagery system of Claim 16, wherein the controller operates to cause the one or more
imaging devices to capture the plurality of images upon receiving a trigger.

18. The imagery system of Claim 17, wherein the trigger is an indicator that is detected from an
image of the object or a signal received from the object.

19. The imagery system of Claim 17, wherein the plurality of images are buffered at a frequency
that is predetermined or dynamically configured based on a rule.

20. The imagery system of Claim 15, wherein the controller operates to
obtain one or more images that are used to track the object; and
determine motion information of the object from the one or more images that are used to
track the object.

21. The imagery system of Claim 20, wherein the motion information of the object is obtained by
analyzing a movement of a bounding box that is used to identify the object in the one or more
images that are used to track the object.

22. The imagery system of Claim 20, wherein the one or more images that are used to track the object are captured using one or more image sensors that are arranged differently from said one or more imaging devices.
23. The imagery system of Claim 15, wherein the controller operates to
receive one or more location signals from the object; and
determine motion information of the object based on the one or more location signals received from the object.
24. The imagery system of Claim 15, wherein the controller operates to synchronize the estimated motion and/or state of the object with the plurality of images that are captured using the one or more imaging devices.
25. The imagery system of Claim 15, wherein the controller operates to determine a time interval between the selected images based on a selecting rule, wherein the time interval is used to select the one or more images.
26. The imagery system of Claim 25, wherein the controller operates to maintain the selected images in an image buffer.
27. A non-transitory computer-readable medium with instructions stored thereon, that when executed by a processor, perform the steps comprising:
obtaining a plurality of images of an object, wherein the plurality of images are captured using one or more imaging devices within a period of time while the object is being tracked;
performing motion and/or state estimation of the object for the period of time; and
selecting one or more images related to a moment from the plurality of images based on the motion and/or state estimation of the object.
28. An unmanned aerial vehicle (UAV), comprising:
a memory that stores one or more computer-executable instructions; and

one or more processors configured to access the memory and execute the computer-executable instructions to perform a method comprising:

directing the UAV to track the object;

obtaining a plurality of images of the object, wherein the plurality of images are captured by one or more imaging devices carried by the UAV within a period of time while the object is being tracked;

performing motion and/or state estimation of the object for the period of time; and

selecting one or more images related to a moment from the plurality of images based on the motion and/or state estimation of the object.

29. The UAV of Claim 28, further comprising:

transmitting, via a communication module, the selected one or more images of the object to a user terminal.

30. The UAV of Claim 29, wherein an application running on the user terminal operates to

display the selected one or more images to a user; and

identify an image from the displayed images based on a user input.

100

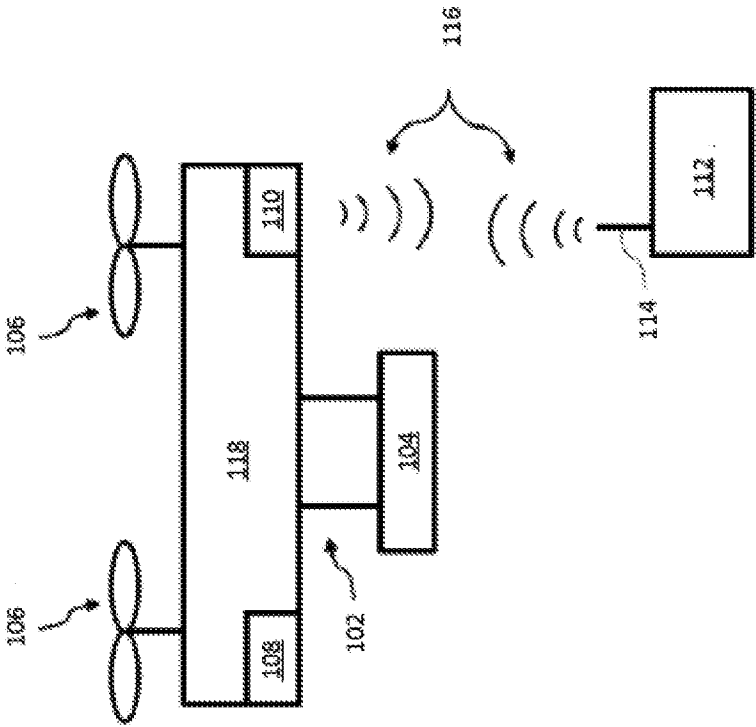


Figure 1

200

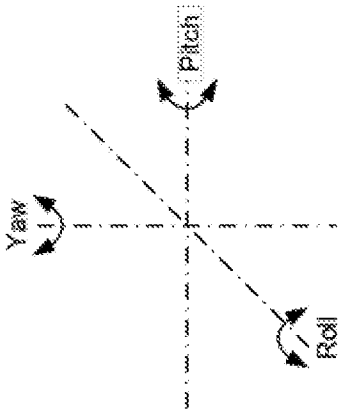
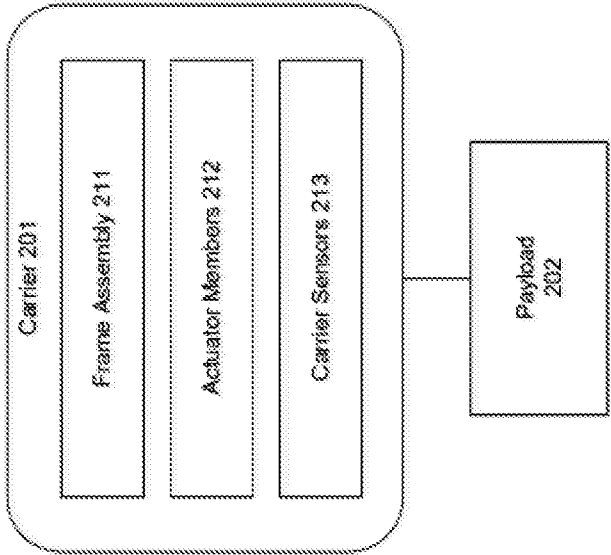


Figure 2


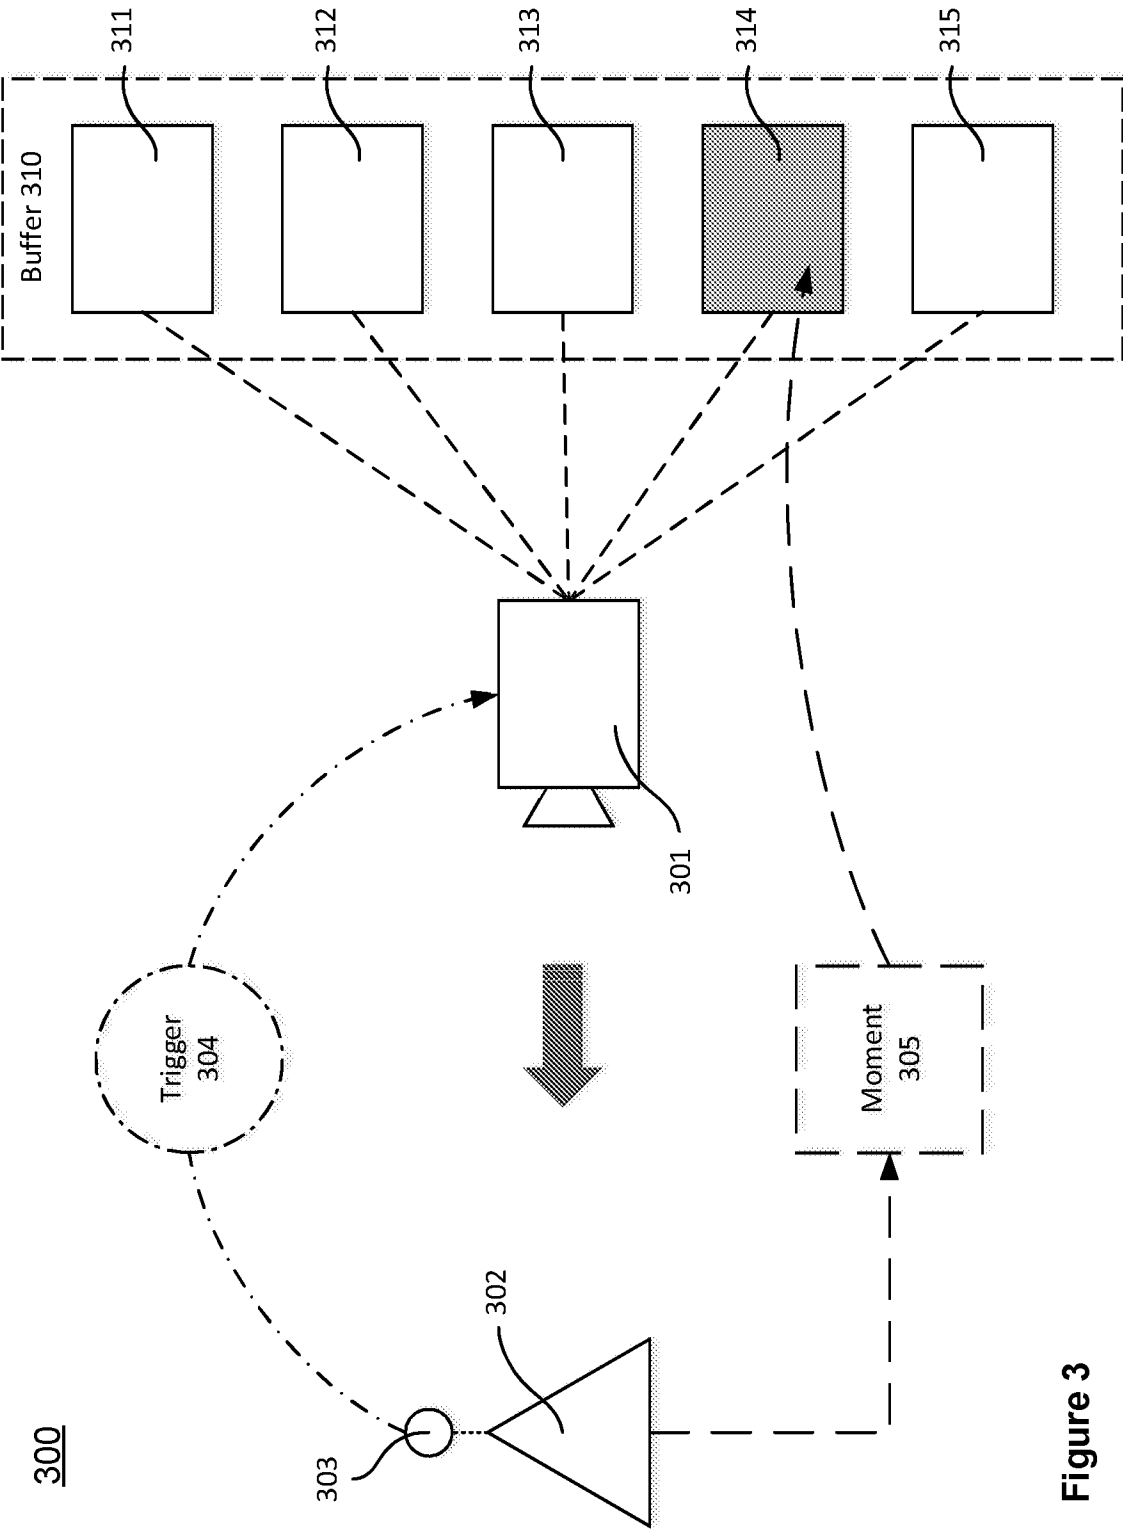


Figure 3

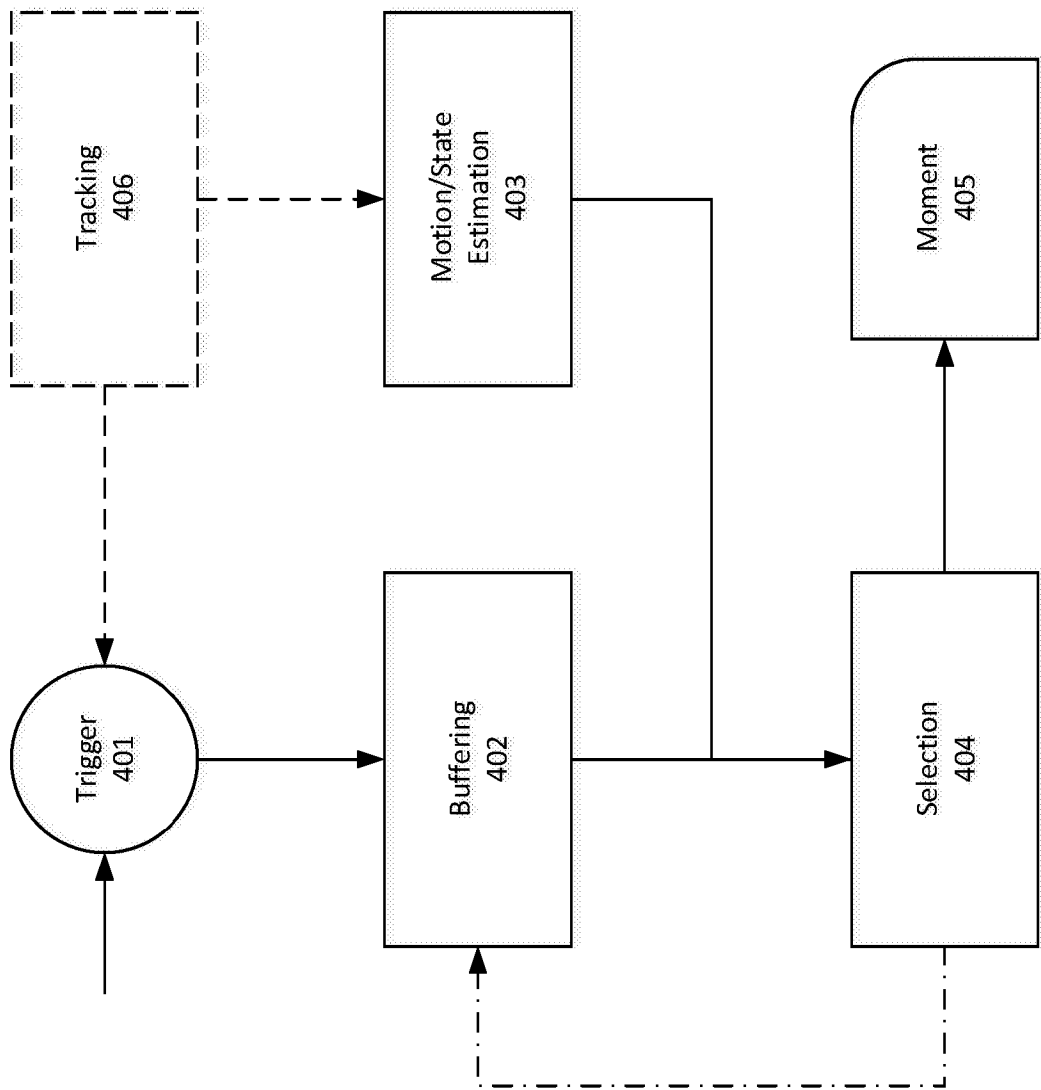

400

Figure 4

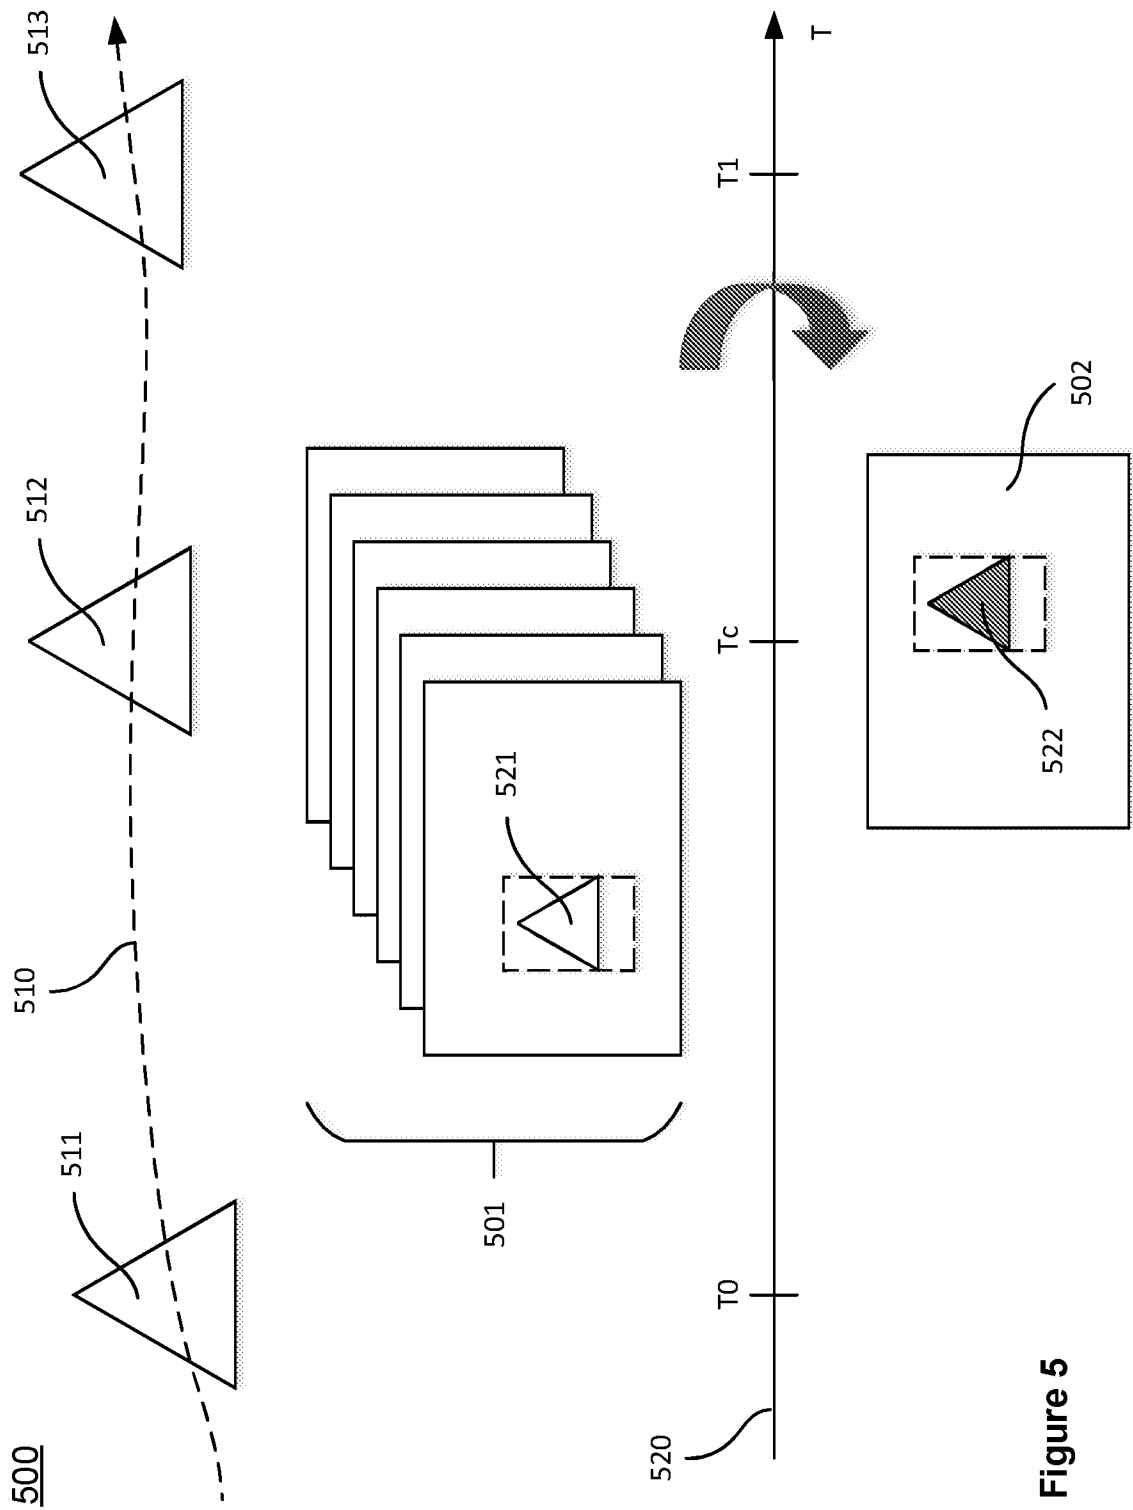


Figure 5

600

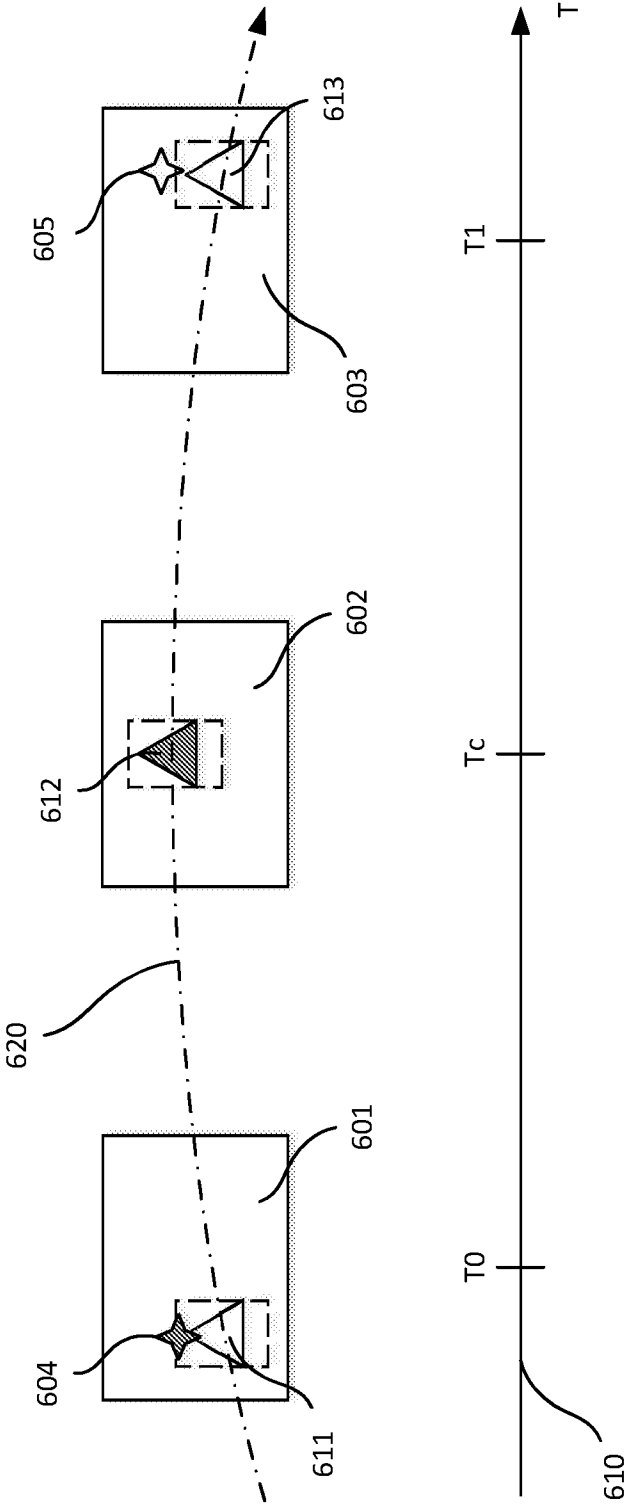
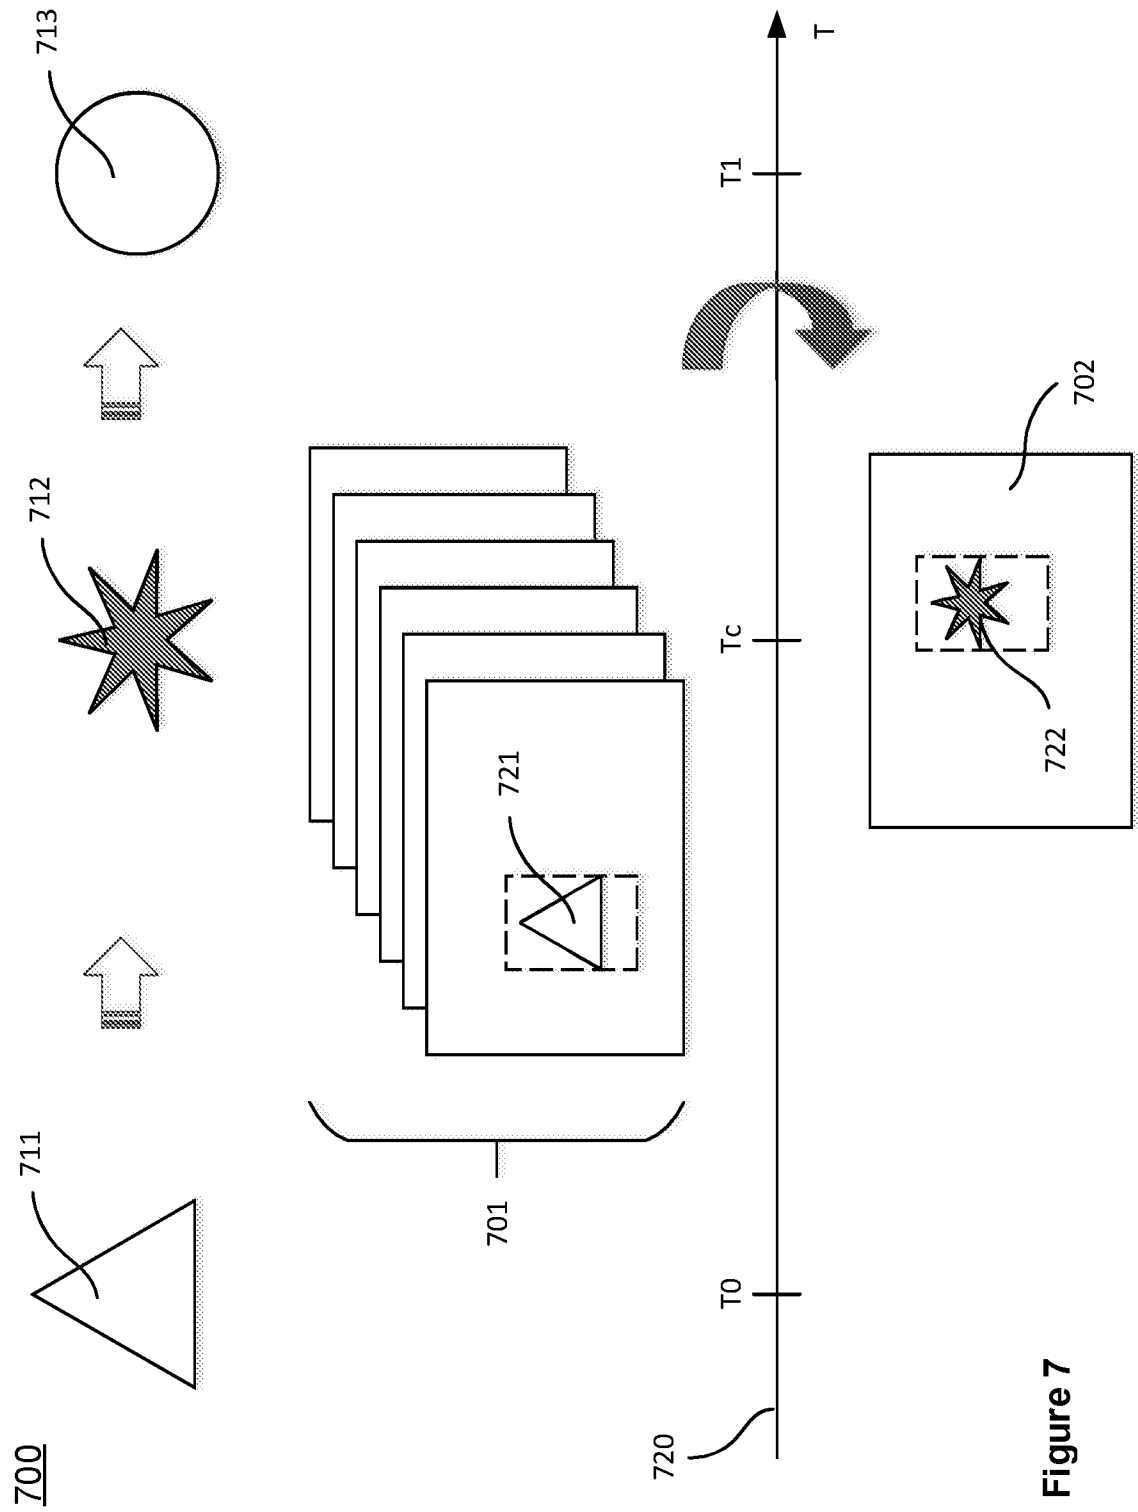


Figure 6



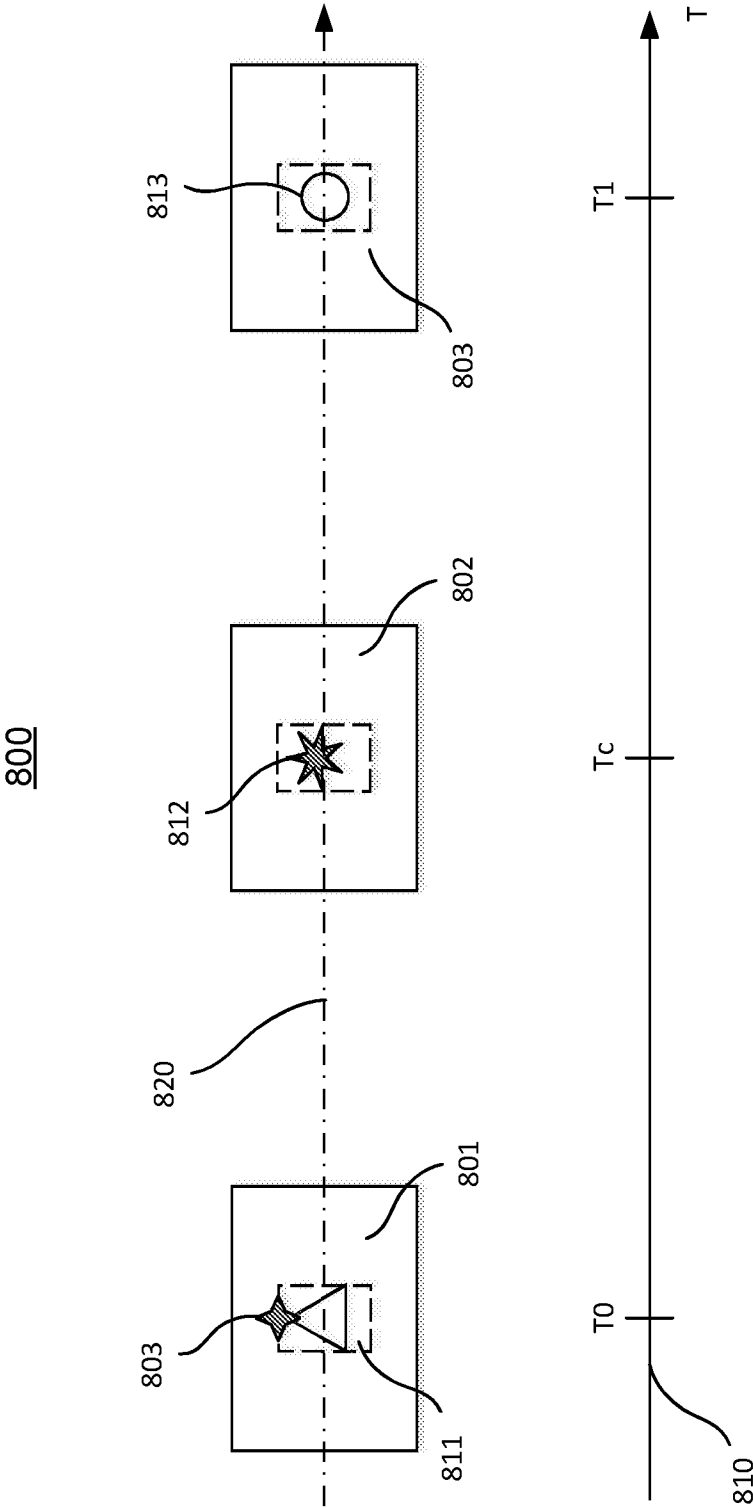


Figure 8

900

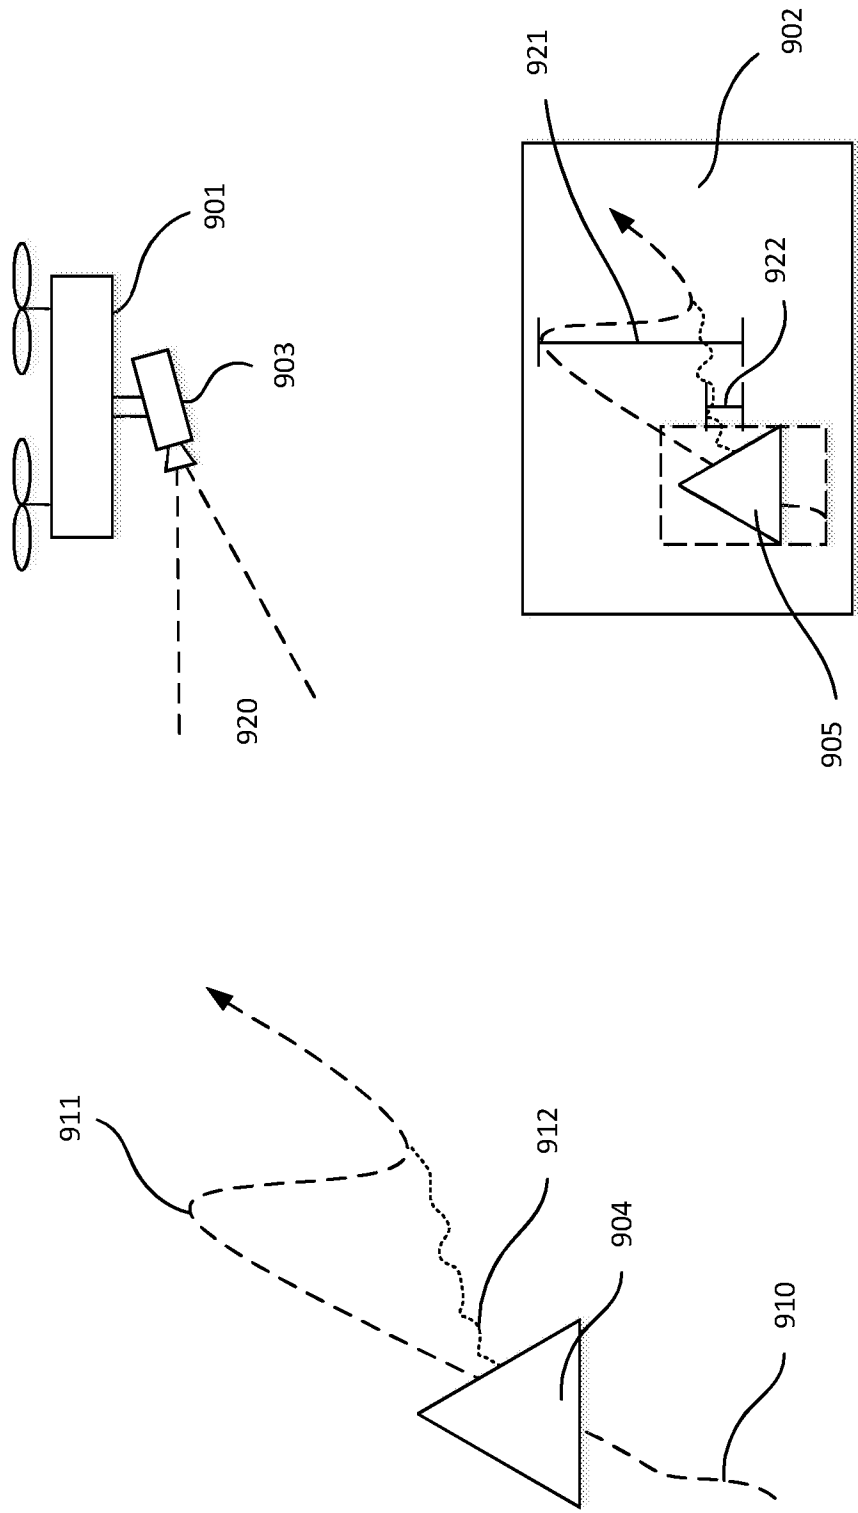
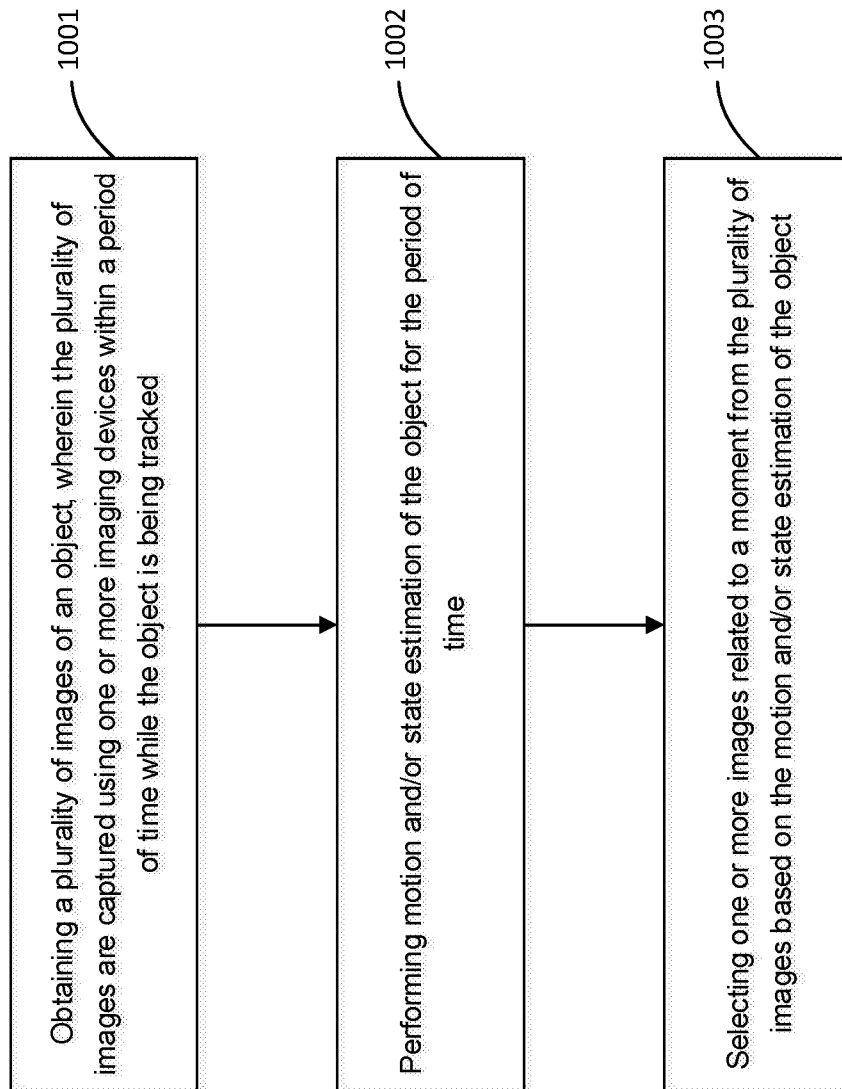


Figure 9

**Figure 10**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2016/102190

A. CLASSIFICATION OF SUBJECT MATTER		
H04N 5/232(2006.01)i; B64D 47/08(2006.01)i; G05D 1/00(2006.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) H04N; B64D; G05D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPI,EPODOC,CNPAT,CNKI: trac+, object, captur+, obtain+, select+, image?,frame?, motion,moving, state, estimati+, best, moment, camera, UAV, unmanned aircraft vehicles		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	CN 105658287 A (SONY CORP.) 08 June 2016 (2016-06-08) description, paragraphs [0054-0088], [0137-0139] and figures 1-5	1-27
Y	CN 105658287 A (SONY CORP.) 08 June 2016 (2016-06-08) description, paragraphs [0054-0088], [0137-0139] and figures 1-5	28-30
Y	CN 105518555 A (SHENZHEN DAJIANG INNOVATIONS TECHNOLOGY) 20 April 2016 (2016-04-20) description, paragraphs [0293-0300], figures 1 and 11	28-30
A	US 9442485 B1 (TRACE LIVE NETWORK INC.) 13 September 2016 (2016-09-13) the whole document	1-30
A	WO 2015105886 A1 (PICTOMETRY INTERNATIONAL CORP.) 16 July 2015 (2015-07-16) the whole document	1-30
A	CN 102469264 A (OLYMPUS IMAGING CORP.) 23 May 2012 (2012-05-23) the whole document	1-30
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 27 May 2017		Date of mailing of the international search report 11 July 2017
Name and mailing address of the ISA/CN STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088 China		Authorized officer ZHANG,Liguo
Facsimile No. (86-10)62019451		Telephone No. (86-10)61648239

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2016/102190

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	105658287	A	08 June 2016	JP	2015082817	A	27 April 2015
				WO	2015059874	A1	30 April 2015
				EP	3060317	A1	31 August 2016
				US	2016205317	A1	14 July 2016
CN	105518555	A	20 April 2016	US	9164506	B1	20 October 2015
				EP	3060966	A4	11 January 2017
				US	2017108877	A1	20 April 2017
				US	2017068246	A1	09 March 2017
				US	2016031559	A1	04 February 2016
				EP	3060966	A1	31 August 2016
				US	9567078	B2	14 February 2017
				US	2017023938	A1	26 January 2017
				JP	2017503226	A	26 January 2017
				WO	2016015251	A1	04 February 2016
US	9442485	B1	13 September 2016	None			
WO	2015105886	A1	16 July 2015	EP	3092625	A1	16 November 2016
				CA	2935457	A1	16 July 2015
				US	2016313736	A1	27 October 2016
				AU	2015204838	A1	14 July 2016
				US	9612598	B2	04 April 2017
				MX	2016008890	A	16 January 2017
CN	102469264	A	23 May 2012	CN	102469264	B	05 November 2014
				JP	2012109686	A	07 June 2012