



(43) International Publication Date
10 October 2013 (10.10.2013)

- (51) International Patent Classification:
D21F 3/08 (2006.01) *D21G 1/02* (2006.01)
- (21) International Application Number:
PCT/US2013/031966
- (22) International Filing Date:
15 March 2013 (15.03.2013)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
61/621,037 6 April 2012 (06.04.2012) US
- (71) Applicant: **STOWE WOODWARD LICENSCO, LLC**
[US/US]; 8537 Six Forks Road, Suite 300, Raleigh, North
Carolina 27615 (US).
- (72) Inventors: **TYSON, Chris**; 132 Elf Way, Clearbrook, Vir-
ginia 22624 (US). **HUNTER, Charles**; 166 Hockman
Court, Winchester, Virginia 22602 (US). **XU, Jun**; 151
Willowdale Drive, Frederick, Maryland 21702 (US).
- (74) Agent: **MYERS BIGEL SIBLEY & SAJOVEC, P.A.**;
P.O. Box 37428, Raleigh, North Carolina 27627 (US).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A HYDROPHOBIC AND/OR AMPHIPHOBIC ROLL COVER

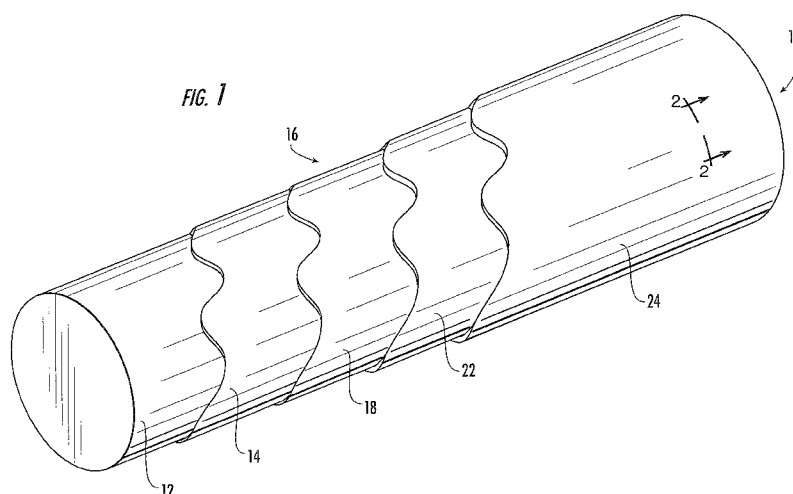

(57) Abstract: The present invention relates generally to an industrial roll, comprising: a substantially cylindrical metallic core (12); a base layer (18) that is adhered to and circumferentially overlies the core; a polymeric topstock layer (22) that circumferentially overlies the base layer; and a hydrophobic and/or amphiphobic coating (24) that circumferentially overlies the topstock layer.

A HYDROPHOBIC AND/OR AMPHIPHOBIC ROLL COVER

Related Applications

This application claims the benefit of and priority from U.S. Provisional Application Serial No. 61/621,037, filed on April 6, 2012, the disclosure of which is hereby incorporated herein by reference in its entirety.

Field

The present invention relates generally to industrial rolls, and more particularly to covers for industrial rolls.

Background

Cylindrical rolls are utilized in a number of industrial applications, especially those relating to papermaking. Such rolls are typically employed in demanding environments in which they can be exposed to high dynamic loads and temperatures and aggressive or corrosive chemical agents. As an example, in a typical paper mill, rolls are used not only for transporting a fibrous web sheet between processing stations, but also, in the case of press section and calender rolls, for processing the web sheet itself into paper.

Typically rolls used in papermaking are constructed with the location within the papermaking machine in mind, as rolls residing in different positions within the papermaking machines are required to perform different functions. Because papermaking rolls can have many different performance demands, and because replacing an entire metallic roll can be quite expensive, many papermaking rolls include a polymeric cover that surrounds the circumferential surface of a metallic core. By varying the polymer or elastomer employed in the cover, the cover designer can provide the roll with different performance characteristics as the papermaking application demands. Also, repair, regrinding or replacement of a cover over a metallic roll can be considerably less expensive than the replacement of an entire metallic roll.

In many instances, the roll cover will include at least two distinct layers: a base layer that overlies the core and provides a bond thereto; and a topstock layer that overlies and bonds to the base layer and serves the outer surface of the roll (some rolls will also include an intermediate "tie-in" layer sandwiched by the base and top stock layers). The layers for these

materials are typically selected to provide the cover with a prescribed set of physical properties for operation. These can include the requisite strength, elastic modulus, and resistance to elevated temperature, water and harsh chemicals to withstand the papermaking environment. In addition, covers are typically designed to have a predetermined surface hardness that is appropriate for the process they are to perform, and they typically require that the paper sheet “release” from the cover without damage to the paper sheet. Also, in order to be economical, the cover should be abrasion- and wear-resistant.

There may be a need for papermaking roll covers that have different balances of properties, particularly sheet release and water diffusion.

Summary

As a first aspect, embodiments of the invention are directed to an industrial roll, comprising: a substantially cylindrical metallic core; a base layer that is adhered to and circumferentially overlies the core; a polymeric topstock layer that circumferentially overlies the base layer; and a hydrophobic and/or amphiphobic coating that circumferentially overlies the topstock layer.

As a second aspect, embodiments of the invention are directed to an industrial roll, comprising: a substantially cylindrical metallic core; a base layer that is adhered to and circumferentially overlies the core; a polymeric topstock layer that circumferentially overlies the base layer and comprises a hydrophobic and/or amphiphobic compound in an amount sufficient to render the topstock layer hydrophobic and/or amphiphobic.

As a third aspect, embodiments of the invention are directed to an industrial roll, comprising: a substantially cylindrical metallic core; a base layer that is adhered to and circumferentially overlies the core; a polymeric topstock layer that circumferentially overlies the base layer, wherein the topstock layer comprises a plurality of recesses having an interior surface coated with a hydrophobic and/or amphiphobic coating.

As a further aspect, embodiments of the invention are directed to a method of constructing an industrial roll having a hydrophobic and/or amphiphobic coating, the method comprising the steps of: providing a substantially cylindrical metallic core; applying a base layer that circumferentially overlies the core; and applying a bi-layer over the base layer, the bi-layer comprising a topstock layer that circumferentially overlies the base layer and a hydrophobic and/or amphiphobic coating that circumferentially overlies the topstock layer.

Brief Description of the Figures

Figure 1 is a perspective cutaway view of an industrial roll according to embodiments of the present invention.

Figure 2 is a greatly enlarged, partial section view of the roll of **Figure 1** taken along lines 2--2 thereof.

Figure 3 is a greatly enlarged, partial section view of an industrial roll according to additional embodiments of the present invention.

Figure 4 is a greatly enlarged, partial section view of an industrial roll according to further embodiments of the present invention.

Figure 5 is a greatly enlarged, partial section view of an industrial roll according to still further embodiments of the present invention.

Figure 6 is a partial front view of a bi-nozzle system for producing a cover for an industrial roll according to embodiments of the present invention.

Figure 7 shows a greatly enlarged, partial section view of a topstock layer having a plurality of recesses according to embodiments of the present invention.

Description

The present invention will be described more particularly hereinafter with reference to the accompanying drawings. The invention is not intended to be limited to the illustrated embodiments; rather, these embodiments are intended to fully and completely disclose the invention to those skilled in this art. In the drawings, like numbers refer to like elements throughout. Thicknesses and dimensions of some components may be exaggerated for clarity. Well-known functions or constructions may not be described in detail for brevity and/or clarity.

In addition, spatially relative terms, such as "under", "below", "lower", "over", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "under" or "beneath" other elements or features would then be oriented "over" the other elements or features. Thus, the exemplary term "under" can encompass both an orientation of over and

under. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The terminology used in the description of the invention herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used in the description of the invention and the appended claims, the singular forms "a," "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. Where used, the terms "attached," "connected," "interconnected," "contacting," "coupled," "mounted," "overlying" and the like can mean either direct or indirect attachment or contact between elements, unless stated otherwise.

The term "about," as used herein when referring to a measurable value, such as an amount or concentration, encompasses variations of the specified measurable value as well as the specified value, and may encompass variations of $\pm 10\%$, $\pm 5\%$, $\pm 1\%$, $\pm 0.5\%$, $\pm 0.1\%$, or the like. For example, "about X" where X is the measurable value, is meant to include X as well as variations of X that may include $\pm 10\%$, $\pm 5\%$, $\pm 1\%$, $\pm 0.5\%$, $\pm 0.1\%$, or the like. A range provided herein for a measureable value may include any other range and/or individual value therein.

Referring now to the figures, a roll, designated broadly at **10**, is illustrated in **Figures 1 and 2**. The roll **10** includes in overlying relationship a core **12** (typically metallic), an adhesive layer **14**, and a cover **16**. Each of these components is discussed in greater detail herein below.

The core **12** is a substantially cylindrical, hollow structure typically formed of steel, some other metal, or even a composite material. The core **12** is typically between about 1.5 and 400 inches in length and 1 and 70 inches in diameter, with lengths between about 100 and 400 inches and diameters of between about 20 and 70 inches being common for papermaking purposes. At these more common length and diameter ranges, the core **12** typically has walls between about 1 and 5 inches in thickness. Components such as journals and bearings (not shown) are typically included on the core **12** to facilitate its mounting and rotation in a papermaking machine. The surface of the core **12** may be treated by blasting, sanding, sandblasting, or the like to prepare the surface for bonding to the adhesive layer **14**.

Referring again to **Figures 1 and 2**, the adhesive layer **14** comprises an adhesive (typically an epoxy adhesive) that can attach the core **12** to the cover **16**. Of course, the adhesive comprising the adhesive layer **14** should be chosen to be compatible with the materials of the core **12** and the base layer **18** of the cover **16** (*i.e.*, it should provide a high-integrity bond between these structures without unduly harming either material); preferably, the bond has a tensile bond strength of between about 1,200 and 5,000 psi. The adhesive may have additives, such as curing agents, that facilitate curing and physical properties. Exemplary adhesives include Chemlok 220X and Chemlok 205, which are epoxy adhesives available from Lord Corporation, Raleigh, North Carolina.

The adhesive layer **14** can be applied to the core **12** in any manner known to be suitable to those skilled in this art for applying a thin layer of material. Exemplary application techniques include spraying, brushing, immersion, scraping, and the like. It is preferred that, if a solvent-based adhesive is used, the adhesive layer **14** be applied such that the solvent can evaporate prior to the application of the cover **16** in order to reduce the occurrence of trapped solvent that can cause “blows” during the curing process. Those skilled in this art will appreciate that the adhesive layer **14** may comprise multiple coats of adhesive, which may comprise different adhesives; for example, two different epoxy adhesives with slightly different properties may be employed. It should also be noted that, in some embodiments, the adhesive layer may be omitted entirely, such that the cover **16** is bonded directly to the core **12**.

Still referring to **Figures 1 and 2**, the cover **16** comprises, in overlying relationship, a base layer **18**, a topstock layer **22** and a coating **24**. In the illustrated embodiment, the base layer **18** is adhered to the adhesive layer **14**. The base layer **18** comprises a polymeric compound that typically includes fillers and other additives. Exemplary polymeric compounds include, but are not limited to, polyurethane, natural rubber and synthetic rubbers such as nitrile-butadiene rubber (NBR) and hydrogenated nitrile-butadiene rubber (HNBR), an ethylene-propylene terpolymer formed of ethylene-propylene diene monomer (EPDM), chlorosulfonated polyethylene (CSPE), styrene butadiene (SBR), chloroprene (CR), neoprene, isoprene, silicone, fluoroelastomers, thermoset composites, and blends and copolymers thereof, including blends with polyvinylchloride (PVC). In some embodiments, the base layer **18** comprises a thermoset based composite. An exemplary polymeric material that may be suitable for use in the base layer **18** is epoxy. Additional components, such as

monomers and monomer coagents like trimethyl propane trimethacrylate and 1, 3-butylene glycol dimethacrylate, may be added to the base layer **18** to enhance polymerization.

Fillers are typically added to the base layer **18** to modify the physical properties of the compound and/or to reduce its cost. Exemplary filler materials include, but are not limited to, inorganic oxides such as aluminum oxide (Al_2O_3), silicon dioxide (SiO_2), magnesium oxide (MgO), calcium oxide (CaO), zinc oxide (ZnO) and titanium dioxide (TiO_2), carbon black (also known as furnace black), silicates such as clays, talc, wollastonite (CaSiO_3), magnesium silicate (MgSiO_3), anhydrous aluminum silicate, and feldspar (KAlSi_3O_8), sulfates such as barium sulfate and calcium sulfate, metallic powders such as aluminum, iron, copper, stainless steel, or nickel, carbonates such as calcium carbonate (CaCO_3) and magnesium carbonate (MgCO_3), mica, silica (natural, fumed, hydrated, anhydrous or precipitated), and nitrides and carbides, such as silicon carbide (SiC) and aluminum nitride (AlN). These fillers may be present in virtually any form, such as powder, pellet, fiber or sphere.

Also, the base layer **18** may optionally include other additives, such as polymerization initiators, activators and accelerators, curing or vulcanizing agents, plasticizers, heat stabilizers, antioxidants and antiozonants, coupling agents, pigments, and the like, that can facilitate processing and enhance physical properties. These components are generally compounded into the polymer prior to the time of application of the base layer **18** to the adhesive layer **14** or directly to the core **12**. Those skilled in this art will appreciate that the identity and amounts of these agents and their use in a base layer are generally known and need not be described in detail herein.

The base layer **18** can be applied by any manner known to those skilled in this art to be suitable for the application of polymers to an underlying surface. In some embodiments (particularly those applying a rubber base), the base layer **18** is applied through an extrusion process in which strips of the base layer **18** are extruded through an extrusion die, then, while still warm, are overlaid over the adhesive layer **14** as it is still somewhat tacky. The base layer strips are preferably between about 0.030 and about 0.125 inches in thickness and are applied in an overlapping manner, with the result that total thickness of the base layer **18** is typically between about 0.0625 inches and about 1 inch, in some embodiments between about 0.1 inches and about 0.5 inches, and in further embodiments between about 0.1 inches and about 0.25 inches. Those skilled in this art will appreciate that, in some embodiments, the

base layer **18** may be omitted such that the topstock layer **22** is adhered directly to the adhesive layer **14** or, in the absence of an adhesive layer, to the core **12**.

Referring again to **Figures 1 and 2**, in the illustrated embodiment, the topstock layer **22** circumferentially overlies and, unless one or more tie-in layers are included as described below, is adhered to the base layer **18**. The topstock layer **22** comprises a rubber compound, such as NBR, HNBR, EPDM, CSM, or natural rubber, or a polyurethane compound known to those skilled in this art to be suitable for use in papermaking machine rolls. Typically the topstock layer **22** includes fillers and other additives, and may include one or more recesses, such as grooves, through holes and/or blind drilled holes, if desired. Conventionally, a rubber topstock layer **22** will overlie a rubber base layer **18**, whereas a polyurethane topstock layer **22** will overlie an epoxy base layer **18** via casting the polyurethane layer.

Exemplary fillers include, but are not limited to, silicone dioxide, carbon black, clay, and titanium dioxide (TiO₂) as well as others set forth hereinabove in connection with the base layer **18**. Typically, fillers are included in an amount of between about 3 and 70 percent by weight of the topstock layer **22**. The fillers can take virtually any form, including powder, pellet, bead, fiber, sphere, or the like.

Exemplary additives include, but are not limited to, polymerization initiators, activators and accelerators, curing or vulcanizing agents, plasticizers, heat stabilizers, antioxidants, coupling agents, pigments, and the like, that can facilitate processing and enhance physical properties. Those skilled in this art will understand the types and concentrations of additives that are appropriate for inclusion in the topstock layer **22**, so these need not be discussed in detail herein.

The topstock layer **22** can be applied over the base layer **18** by any technique known to those skilled in this art to be suitable for the application of elastomeric materials over a cylindrical surface. Preferably, the components of the topstock layer **22** are mixed separately, then blended in a mill. The blended material is transferred from the mill to an extruder, which extrudes feed strips of top stock material onto the base layer **18**. Alternatively, either or both of the base and top stock layers **18, 22** can be applied through the overlaying of calendered sheets of material.

In some embodiments, the topstock layer **22** is applied such that it is between about 0.25 inches and about 2.5 inches in thickness (at higher thickness, multiple passes of material may be required). In some embodiments, the topstock layer **22** has a thickness between about

0.5 inches and about 1.5 inches and in some embodiments between about 1 inch and about 1.5 inches. It is also suitable for the thickness of the top stock layer **22** be between about 50 and 90 percent of the total cover thickness (*i.e.*, the total thickness of the combined base and topstock layers **18**, **22** and coating **24**). The rubber compounds of the base layer **18** and the topstock **22** may be selected such that the base layer **18** has a higher hardness value than the topstock layer **22**. As an example, the base layer **18** may have a hardness of between about 1 and 100 P&J (in some embodiments, between 3 and 100 P&J, and in other embodiments, between 3 and 20 P&J), and the top stock layer **22** may have a hardness of between about 30 and 300 P&J (in some embodiments between 30 and 250 P&J). The graduated hardness concept can reduce the bond line shear stresses that can occur due to mismatches of the elastic properties (such as elastic modulus and Poisson's ratio) of the various layers in the cover constructions. This reduction in interface shear stress can be important in maintaining cover integrity.

Those skilled in this art will also appreciate that the roll **10** may be constructed with a tie-in layer sandwiched between the base layer **18** and the topstock layer **22**, such that the tie-in layer would directly underlie the top stock layer **22**. The typical properties of a tie-in layer are well-known to those skilled in this art and need not be described in detail herein.

After the topstock **22** has been applied, these layers of the cover **16** are then cured, typically in an autoclave, for a suitable curing period (generally between about 16 and 30 hours). After curing, it is preferred that any crust that has developed is skimmed from the surface of the top stock layer **22**, and that the top stock layer **22** is ground for dimensional correctness.

Referring once again to **Figures 1 and 2**, the coating **24** is then applied over the topstock **22**. The coating **24** comprises a hydrophobic compound and/or an amphiphobic compound and optionally a matrix material. "Hydrophobic," as used herein in reference to a surface, coating, and the like, refers to a surface that has a contact angle greater than 90° for water, and in some embodiments, a contact angle greater than 120°, 130°, or even 140° for water. "Amphiphobic," as used herein in reference to a surface, coating, and the like, refers to a surface that has a contact angle greater than 90° for water and an organic liquid, and in some embodiments, a contact angle greater than 120°, 130°, or even 140° for water and an organic liquid. "Organic liquid," as used herein, refers to a hydrophobic compound comprising carbon and hydrogen. Exemplary organic liquids include, but are not limited to,

an oil, a fat, an alkane, an alkylene, an alkyne, an arene, and any combination thereof. The coating **24** comprises a sufficient amount of a hydrophobic and/or amphiphobic compound to render the outer surface of roll cover **16** hydrophobic and/or amphiphobic. A hydrophobic roll cover **16** can repel water and an amphiphobic roll cover **16** can repel water and an organic liquid.

According to some embodiments, the coating **24** comprises a superhydrophobic compound and/or a superamphiphobic compound and optionally a matrix material. "Superhydrophobic," as used herein, refers to a surface that has a contact angle greater than 150° for water. "Superamphiphobic," as used herein, refers to a surface that has a contact angle greater than 150° for water and an organic liquid.

Any method known to those of skill in the art can be used to measure the contact angle of water or an organic liquid, such as, but not limited to the static sessile drop method, the dynamic sessile drop method, optical tensiometry, force tensiometry, and any combination thereof. The contact angle of a drop of water or an organic liquid on a surface of a substrate (*e.g.*, the surface of the coating **24**) can be measured. The drop can be about 1 μL to about 1 mL, or any range therein, such as, but not limited to, about 1 μL to about 500 μL , about 1 μL to about 30 μL , about 25 μL to about 100 μL , or about 3 μL to about 10 μL .

Exemplary hydrophobic and/or amphiphobic compounds include, but are not limited to, polytetrafluoroethylene (PTFE); polyethylene; hydrophobic and/or amphiphobic diatomaceous earth; a hydrophobic and/or amphiphobic nanomaterial such as, but not limited to, carbon, silica, and/or a metal oxide (*e.g.*, boron oxide, titanium dioxide, vanadium pentoxide, etc.) nanoparticle, nanorod, nanotube, nanofiber, nanopin, and/or the like; and any combination thereof. A hydrophobic and/or amphiphobic compound can have a size in a range of about 10 nm to about 500 μm or any range and/or individual value therein, such as about 10 nm to about 10 μm or about 10 nm to about 1 μm .

A surface of a hydrophobic and/or amphiphobic compound, such as, but not limited to a nanomaterial, may be modified with a chemical moiety. Modifying a surface of a hydrophobic and/or amphiphobic compound may increase and/or provide the desired hydrophobic and/or amphiphobic property and may be accomplished by chemically and/or physically bonding the moiety to a surface of the hydrophobic and/or amphiphobic compound. Exemplary chemical moieties that may be used to modify a surface of a hydrophobic and/or amphiphobic compound include, but are not limited to, a hydrocarbon, a

fluorocarbon, a silicon containing compound such as a silane, an organic amine, stearic acid, t-butyltrichlorosilane, (3-acryloxypropyl)trimethoxy silane, methacryloxymethyltriethoxy silane, cyclopentyltrimethoxysilane, cyclohexyltrimethoxysilane, adamantylethyltrichlorosilane, 4-phenylbutyltrichlorosilane, 1-naphthyltrimethoxysilane, (3,3,3-trifluoropropyl)trimethoxysilane, (tridecafluoro-1,1,2,2-tetrahydrooctyl)trichlorosilane, tridecafluoro-2-(tridecafluorohexyl) decyltrichlorosilane, (heptadecafluoro-1,1,2,2-tetrahydrodecyl)dimethylchlorosilane, dimethyldimethoxy silane, dodecylamine, octylamine, and any combination thereof.

Exemplary matrix materials include, but are not limited to, a polymeric compound, such as a rubber compound, an acrylic polymer, a polyurethane, an epoxy, a latex, etc. Exemplary rubber compounds include, but are not limited to, NBR, HNBR, EPDM, CSM, and/or a natural rubber. Exemplary polyurethane compounds include, but are not limited to, those formed from cast and ribbon flow processes and those described in U.S. Patent No. 6,328,681, which is incorporated herein by reference in its entirety.

A hydrophobic and/or amphiphobic coating **24** can comprise a mixture of hydrophobic and/or amphiphobic compounds having different sizes and/or different morphologies. In certain embodiments, a hydrophobic and/or amphiphobic coating **24** can comprise a hydrophobic and/or amphiphobic compound that is uniform in size. In some embodiments, a hydrophobic and/or amphiphobic compound is mixed with a solvent (*e.g.*, water and/or an organic liquid) and applied to a roll **10**. In certain embodiments, a hydrophobic and/or amphiphobic compound is mixed with a matrix material and applied to a roll **10**.

A hydrophobic and/or amphiphobic coating **24** can comprise about 1 part to about 100 parts of a hydrophobic and/or amphiphobic compound against 100 parts of a matrix material (*e.g.*, a rubber and/or a polyurethane), or any range and/or individual value therein, such as, but not limited to, about 1 part to about 25 parts, about 5 parts to about 30 parts, about 10 parts to about 40 parts, about 15 part to about 45 parts, about 20 parts to about 80 parts, or about 50 parts to about 100 parts against a matrix material. In some embodiments, a hydrophobic and/or amphiphobic coating **24** comprises a mixture of PTFE powder and hydrophobic diatomaceous earth. A coating mixture can comprise about 1 part to about 50 parts of PTFE powder against a matrix material and about 1 part to about 50 parts of hydrophobic diatomaceous earth against a matrix material. In certain embodiments, a

hydrophobic and/or amphiphobic coating **24** comprises a mixture comprising about 1 part to about 50 parts of PTFE powder against a matrix material, about 1 part to about 50 parts of hydrophobic diatomaceous earth against a matrix material, and about 1 part to about 50 parts of a hydrophobic nanomaterial, such as, but not limited to, nano-silica (*e.g.*, a silica nanoparticle, nanorod, nanotube, nanofiber, nanopin, and/or the like), against a matrix material. In some embodiments, the hydrophobic nanomaterials comprise a surface coating comprising hydrocarbon and/or fluorocarbon compounds.

In some embodiments, the coating **24** comprises a mixture comprising about 30 parts or less of PTFE powder, about 10 parts or less of hydrophobic diatomaceous earth, and about 5 parts or less of a nanomaterial. Those skilled in this art will appreciate that a hydrophobic and/or amphiphobic compound can be present in substantially the same concentration throughout the coating **24** or the concentration of a hydrophobic and/or amphiphobic compound can vary throughout the coating **24**. In some embodiments, the ratio of a hydrophobic and/or amphiphobic compound to a matrix material varies throughout the coating **24**.

In certain embodiments, a hydrophobic and/or amphiphobic coating **24** is bionic. "Bionic," as used herein, refers to the structural similarity of the coating **24** to a hydrophobic and/or amphiphobic surface found in nature, such as, but not limited to, a surface of a lotus leaf. The coating **24** can resemble a natural hydrophobic and/or amphiphobic surface on the micro- and/or nano-scale. For example, bionic can refer to how a hydrophobic compound is organized to form the coating **24**, the surface-energy of the coating **24**, and/or a hierarchical micro- and/or nano-structure of the coating **24** compared to a natural hydrophobic and/or amphiphobic surface. In particular embodiments, the coating **24** is bionic in that it resembles a micro- and/or nano-scale structure of a surface of a lotus leaf. The coating **24** can self-assemble. "Self-assemble," as used herein, refers to the components of a hydrophobic and/or amphiphobic coating (*e.g.*, a hydrophobic and/or amphiphobic compound, matrix, etc.) assembling into the hydrophobic and/or amphiphobic coating through their own interactions and without external guidance and/or means, such as, *e.g.*, adding a catalyst, heat, light, pH, etc. (*i.e.*, the coating **24** builds itself). In some embodiments, the coating **24** can self-assemble, but external means can influence a property of the coating **24**, such as, but not limited to, the rate of assembly and/or hardness of the coating. In certain embodiments, the coating **24** is a self-assembled bionic micro- and/or nano-structure.

In some embodiments, a hydrophobic and/or amphiphobic coating **24** is between about 0.005 and 0.200 inches in thickness. In certain embodiments, a hydrophobic and/or amphiphobic coating has a hardness of between about 3 and 70 P&J, between about 3 and 30 P&J, or may even have a hardness of about 100 Shore D.

A hydrophobic and/or amphiphobic coating **24** may have other fillers and additives of the type described above in connection with the rubber compounds of the base and top stock layers **18**, **22** that can modify or enhance its physical properties and manufacturing characteristics. Exemplary materials, additives and fillers are set forth in U.S. Patent Nos. 4,224,372 to Romanski, 4,859,396 to Krenkel et al. and 4,978,428 to Cronin et al., the disclosures of each of which are hereby incorporated herein in their entireties.

A hydrophobic and/or amphiphobic coating **24** can be applied over the top stock **22** in any manner known to those skilled in this art, including extrusion, casting, spraying, roller coating, and the like. In certain embodiments, a hydrophobic and/or amphiphobic coating **24** may be applied to the topstock **22** by thermal spraying and/or solvent spraying.

Referring again to **Figures 1 and 2**, after application of the coating **24**, the roll **10** may optionally be cured (typically via the application of heat), and may be ground and/or otherwise finished in a manner known to those skilled in this art.

Another embodiment of a roll cover, designated at **110**, is illustrated in **Figure 3**. The roll **110** comprises, in overlying relationship, a core **112**, an adhesive layer **114**, a base layer **118**, a topstock layer **122**, and a coating **124** comprising a concentration gradient of a hydrophobic and/or amphiphobic compound that increases in concentration as the coating **124** extends distally from the core **112**. The coating **124** can comprise a single layer or two or more layers.

Referring to **Figures 1-3**, to address a potential issue of poor bonding between a hydrophobic and/or amphiphobic coating **24**, **124** and the topstock **22**, **122**, it may be desirable to apply multiple layers of coating **24**, **124** where the bottom layers of the coating contain minimum or no amounts of a hydrophobic and/or amphiphobic compound and increasing amounts of a hydrophobic and/or amphiphobic compound are provided in one or more top layers of the coating. Those skilled in the art will appreciate that when a coating comprises multiple layers, the concentration of a hydrophobic and/or amphiphobic compound can be selected to vary in any manner in the coating layers.

Referring now to **Figure 4**, a roll **210** comprising, in overlying relationship, a base layer **218**, a topstock layer **222**, a transition layer **223**, and a hydrophobic and/or amphiphobic coating **224** can be formed using a bi-layer coating mechanism comprising a bi-nozzle system **600** for a ribbon casting machine, such as a ribbon casting polyurethane machine. A bi-layer coating mechanism may be used to address a potential issue of poor bonding between a hydrophobic and/or amphiphobic coating **224** and topstock **222**. The bi-nozzle system **600** can apply a bi-layer comprising a hydrophobic and/or amphiphobic coating **224** and topstock **222**. The bi-nozzle system **600** can comprise a first nozzle **624** that casts a top ribbon comprising a hydrophobic and/or amphiphobic compound to form the coating **224** and that is placed directly above a second nozzle **622** that casts a bottom ribbon comprising a topstock material (e.g., a polyurethane or a rubber) without a hydrophobic and/or amphiphobic compound to form the topstock **222**. The coating **224** can have a thickness between about 0.0625 inches and about 1.5 inches and in some embodiments between about 0.050 inches and about 0.250 inches. The topstock **222** can have a thickness between about 0.0625 inches and about 1.5 inches and in some embodiments between about 0.5 inches and about 1.5 inches. The two ribbons can be cast simultaneously and can provide interphase mixing between the two ribbons to form a transition layer **223**. The transition layer **223** can comprise a concentration gradient of a hydrophobic and/or amphiphobic compound that decreases in concentration from the top ribbon to the bottom ribbon in the bilayer. The bi-layer coating mechanism can eliminate the distinct interphase that can be present between a hydrophobic and/or amphiphobic coating and a topstock containing no hydrophobic and/or amphiphobic compounds and can maximize the bonding strength between the coating and topstock. As described above, after application of the coating **224**, the roll **210** can undergo further processing/finishing steps known to those skilled in this art.

An industrial roll comprising a hydrophobic and/or a amphiphobic roll cover can provide better release properties to the roll cover and can provide protection against water swelling and solvent attack. An industrial roll comprising a hydrophobic and/or a amphiphobic roll cover can prevent the buildup of papermaking materials on the roll cover during operation. Materials such as cellulose, paper fillers, deposits from recycled paper such as latexes, and deposits known as "stickies" can cause runnability issues with roll covers because they buildup on the surface of the covers. Thus, the industrial rolls of the present invention can reduce runnability issues caused by the buildup of papermaking materials on

the roll cover during operation. In certain embodiments, a hydrophobic and/or amphiphobic roll cover can provide better sheet release, provide protection against water diffusion, and protect against solvent attack, especially for the case of amphiphobic roll cover.

Referring now to **Figure 5**, in further embodiments the roll **310** comprises, in overlying relationship, a core **312**, an adhesive layer **314**, a base layer **318**, and a topstock layer **322** comprising a hydrophobic and/or amphiphobic compound. The hydrophobic and/or amphiphobic layer **322** includes a hydrophobic and/or amphiphobic compound, such as PTFE and/or nano-silica, in an amount sufficient to provide the topstock layer **322** with hydrophobic and/or amphiphobic properties. A hydrophobic and/or amphiphobic topstock layer **322** can be applied to a roll **310** as described above. A hydrophobic and/or amphiphobic compound can be present in substantially the same concentration throughout the topstock **322** or the concentration of a hydrophobic and/or amphiphobic compound can vary throughout the topstock **322**. As an example, the roll **410** of **Figure 6** comprises, in overlying relationship, a core **412**, an adhesive layer **414**, a base layer **418**, and a topstock layer **422** comprising a concentration gradient of a hydrophobic and/or amphiphobic compound, wherein the concentration of the hydrophobic and/or amphiphobic compound increases in topstock **422** as the topstock **422** extends distally from the core **412**. Referring to **Figures 5** and **6**, in certain embodiments, a topstock **322** or **422** can comprise two or more layers and each layer can comprise the same and/or a different concentration of a hydrophobic and/or amphiphobic compound as another layer.

According to some embodiments, a hydrophobic and/or amphiphobic coating can protect all or part of the inside of a recess, such as a groove, a through hole, and/or a blind drilled hole, on a roll cover. As illustrated in **Figure 7**, a hydrophobic and/or amphiphobic coating **24'** can coat some or all of an interior surface of a recess **34** in a topstock layer **22'**. Coating an interior surface of a recess **34** with a hydrophobic and/or amphiphobic coating **24'** can greatly improve water removal from a recess after exiting the nip in a paper machine. Also, coating an interior surface of a recess **34** with a hydrophobic and/or amphiphobic coating **24'** can minimize the amount of surface exposed to water and/or solvent penetration and can limit water diffusion to one direction vertical to the working surface (*i.e.*, from the surface toward the core). Further, coating an interior surface of a recess **34** with a hydrophobic and/or amphiphobic coating **24'** can help to improve the long term compression performance of a roll cover under constant water and/or solvent attack. A hydrophobic

and/or amphiphobic coating **24'** on an inside surface of a recess **34** can increase the lifetime of a roll cover.

As those skilled in the art will appreciate, a hydrophobic and/or amphiphobic coating **24'** on an interior surface of a recess **34** can comprise a hydrophobic and/or amphiphobic compound and optionally any suitable matrix material. The same or different matrix materials may be used in a hydrophobic and/or amphiphobic coating **24'** on an interior surface of a recess **34** compared to the matrix materials used in a hydrophobic and/or amphiphobic coating on a surface of a roll. A coating **24'** on an interior surface of a recess **34** can be carried out by any known mechanism. In certain embodiments, coating an interior surface of a recess **34** is carried out so that there is no excess force applied onto the interface and there is no abrasive nature at those surfaces. In some embodiments, a hydrophobic and/or amphiphobic coating **24'** forms a self-assembled bionic micro- and/or nano-structure that repels water and/or an organic liquid.

The following examples are included to demonstrate embodiments of the present invention and are not intended to be a detailed catalog of all the different ways in which the present invention may be implemented or of all the features that may be added to the present invention. Persons skilled in the art will appreciate that numerous variations and additions to the various embodiments may be made without departing from the present invention. Hence, the following descriptions are intended to illustrate some particular embodiments of the invention, and not to exhaustively specify all permutations, combinations and variations thereof.

Examples

Example 1

Hydrophobic powder was incorporated into a solvent for a coating application. This mixture was then applied to the top layer of a polyurethane roll cover which created a hydrophobic surface. This mixture of solvent and hydrophobic powder was also applied between layers of polyurethane. This application was to simulate the addition of the hydrophobic powder into the ribbon of polyurethane during the casting process of roll covers. The incorporation of the hydrophobic powder into prepolymer as a filler was also achieved. Using a standard polyurethane formula, the hydrophobic filler was added at various loadings,

blended, then cured to create a polyurethane cover that had hydrophobic characteristics not only on the surface of the polyurethane but throughout the entire cover.

Regarding hydrophobic roll covers, it was determined that the incorporation of functional hydrophobic filler may be a particularly feasible approach, as other currently available approaches which induce desirable surface patterns may not be able to withstand the abrasive operating conditions between the working roll covers surface and the passing sheets. It was suggested that the application of a hydrophobic surface, perhaps in the form of amphiphobic coating at the inside of a groove and a drill hole on the roll cover, may be desirable, considering it is not a working surface and the coating will only need to adhere well to the roll with much less stress imposed onto the interface. Additionally, this coating can protect the inside of grooves and drill holes, which can greatly improve the water removal exiting the nip. Another advantage of having this hydrophobic or amphiphobic surface at the inside of a groove and a drill hole is that it can minimize the amount of surface being exposed to water and solvent penetration and limit the water diffusion to one direction (from surface toward the core), thereby helping to improve the long term compression performance of the grooved and drilled roll cover under constant water and solvent attack. To realize a hydrophobic roll cover or a amphiphobic roll cover with a hydrophobic or amphiphobic working surface, it was suggested that the application method of thermal spray is a desirable option, in which case binding matrix mixed with functional filler may be either premixed or even precompounded as a solid feed. Multiple coating layers can be used to build up the final coating and the mixing ratio of each layer can be changed to maximize the adhesion of the coating to the surface while maximizing the functional filler loading on the surface layer without jeopardizing the adhesion strength at the interface. Also proposed was a bi-layer coating mechanism for a ribbon casting PU machine, in which a nozzle casting the top ribbon containing the functional filler is placed right on top of another nozzle containing the bottom ribbon without filler incorporation. The two ribbons are cast simultaneously and can provide interphase mixing between the two ribbons and form a gradient filler concentration from the top ribbon to the bottom ribbon, which can eliminate the distinct interphase and maximize the bonding strength.

Example 2

Isocyanate prepolymer resin 20g

Teflon powder 6g

High density polyethylene powder 7g

Clay 2g

Ethacure® 300 Curative 2.8g

The mixture described above was diluted with 60 grams of solvent (5:1 mixture of methyl ethyl ketone and toluene) and was sprayed onto the surface of a roll. After being cured at elevated temperature, the coating was ground with 180 grit sandpaper. The contact angle of finished surface was measured to be 123°. Ethacure® 300 curative is a liquid urethane curative available from Albemarle® Corporation of Baton Rouge, LA.

Example 3

Isocyanate prepolymer resin 20g

Teflon powder 15g

Ethacure® 300 Curative 2.8g

The mixture described above was diluted with 60 grams of solvent (5:1 mixture of methyl ethyl ketone and toluene) and was sprayed onto the surface of a roll. After being cured at elevated temperature, the coating was ground with 180 grit sandpaper. The contact angle of finished surface was measured to be 140°.

Example 4

Isocyanate prepolymer resin 30g

Teflon powder 9g

Hydrophobic diatomaceous earth 1.5g

Ethacure® 300 Curative 4.4g

The mixture described above was diluted with 60 grams of solvent (5:1 mixture of methyl ethyl ketone and toluene) and was sprayed onto the surface of a roll. After being cured at elevated temperature, the coating was ground with 180 grit sandpaper. The contact angle of finished surface was measured to be 145°.

Example 5

Isocyanate prepolymer resin 20g

Teflon powder 10g

High density polyethylene powder 5g

Ethacure® 300 Curative 2.8g

The mixture described above was diluted with 60 grams of solvent (5:1 mixture of methyl ethyl ketone and toluene) and was sprayed onto the surface of a roll. After being cured at elevated temperature, the coating was ground with 180 grit sandpaper. The contact angle of finished surface was measured to be 132°.

The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

THAT WHICH IS CLAIMED IS:


1. An industrial roll, comprising:
 - a substantially cylindrical metallic core;
 - a base layer that is adhered to and circumferentially overlies the core;
 - a polymeric topstock layer that circumferentially overlies the base layer; and
 - a hydrophobic and/or amphiphobic coating that circumferentially overlies the topstock layer.
2. The industrial roll of claim 1, wherein the hydrophobic and/or amphiphobic coating comprises a polyurethane and/or a rubber and a hydrophobic and/or amphiphobic compound.
3. The industrial roll of claim 1, wherein the hydrophobic and/or amphiphobic coating comprises two or more layers.
4. The industrial roll of claim 3, wherein one or more of the two or more layers of the hydrophobic and/or amphiphobic coating comprises no hydrophobic and/or amphiphobic compound.
5. The industrial roll of claim 3, wherein the two or more layers of the hydrophobic and/or amphiphobic coating form a concentration gradient of the hydrophobic and/or amphiphobic compound that increases in concentration as the two or more layers extend distally from the core.
6. The industrial roll of claim 1, further comprising a transition layer that circumferentially overlies the topstock layer.
7. The industrial roll of claim 1, wherein the hydrophobic and/or amphiphobic coating comprises a hydrophobic and/or amphiphobic compound selected from the group consisting of polytetrafluoroethylene (PTFE); polyethylene; hydrophobic and/or




amphiphobic diatomaceous earth; a carbon nanomaterial; a silica nanomaterial; a metal oxide nanomaterial; and any combination thereof.

8. The industrial roll of claim 7, wherein the hydrophobic and/or amphiphobic compound has a size in a range of about 10 nm to about 500 μm .
9. The industrial roll of claim 7, wherein the hydrophobic and/or amphiphobic coating comprises a polyurethane and/or a rubber.
10. The industrial roll of claim 9, wherein the hydrophobic and/or amphiphobic compound is present in a ratio of about 1 part to about 100 parts against the polyurethane and/or the rubber.
11. The industrial roll of claim 1, wherein the topstock layer comprises a hydrophobic material.
12. The industrial roll of claim 1, wherein topstock layer comprises a plurality of recesses.
13. An industrial roll, comprising:
 - a substantially cylindrical metallic core;
 - a base layer that is adhered to and circumferentially overlies the core;
 - a polymeric topstock layer that circumferentially overlies the base layer and comprises a hydrophobic and/or amphiphobic compound in an amount sufficient to render the topstock layer hydrophobic and/or amphiphobic.
14. The industrial roll of claim 13, wherein the topstock layer further comprises a polyurethane and/or a rubber.
15. The industrial roll of claim 13, wherein the topstock layer comprises two or more layers.

16. The industrial roll of claim 15, wherein topstock layer comprises a concentration gradient of the hydrophobic and/or amphiphobic compound that increases in concentration as the topstock layer extends distally from the core.
17. The industrial roll of claim 13, wherein the hydrophobic and/or amphiphobic compound is selected from the group consisting of polytetrafluoroethylene (PTFE); polyethylene; hydrophobic and/or amphiphobic diatomaceous earth; a carbon nanomaterial; a silica nanomaterial; a metal oxide nanomaterial; and any combination thereof.
18. An industrial roll, comprising:
 - a substantially cylindrical metallic core;
 - a base layer that is adhered to and circumferentially overlies the core;
 - a polymeric topstock layer that circumferentially overlies the base layer, wherein the topstock layer comprises a plurality of recesses having an interior surface coated with a hydrophobic and/or amphiphobic coating.
19. The industrial roll of claim 18, wherein the hydrophobic and/or amphiphobic coating comprises hydrophobic and/or amphiphobic compounds selected from the group consisting of polytetrafluoroethylene (PTFE); polyethylene; hydrophobic and/or amphiphobic diatomaceous earth; a carbon nanomaterial; a silica nanomaterial; a metal oxide nanomaterial; and any combination thereof.
20. A method of constructing an industrial roll having a hydrophobic and/or amphiphobic coating, the method comprising the steps of:
 - providing a substantially cylindrical metallic core;
 - applying a base layer that circumferentially overlies the core; and
 - applying a bi-layer over the base layer, the bi-layer comprising a topstock layer that circumferentially overlies the base layer and a hydrophobic and/or amphiphobic coating that circumferentially overlies the topstock layer.

21. The method of claim 20, wherein the bi-layer further comprises a transition layer that circumferentially overlies the topstock layer and is between the topstock layer and the hydrophobic and/or amphiphobic coating.
22. The method of claim 21, wherein the transition layer comprises a concentration gradient of a hydrophobic and/or amphiphobic compound that increases in concentration as the transition layer extends distally from the core.
23. The method of claim 20, wherein the topstock layer comprises a polyurethane and the hydrophobic and/or amphiphobic coating comprises a polyurethane and a hydrophobic and/or amphiphobic compound.

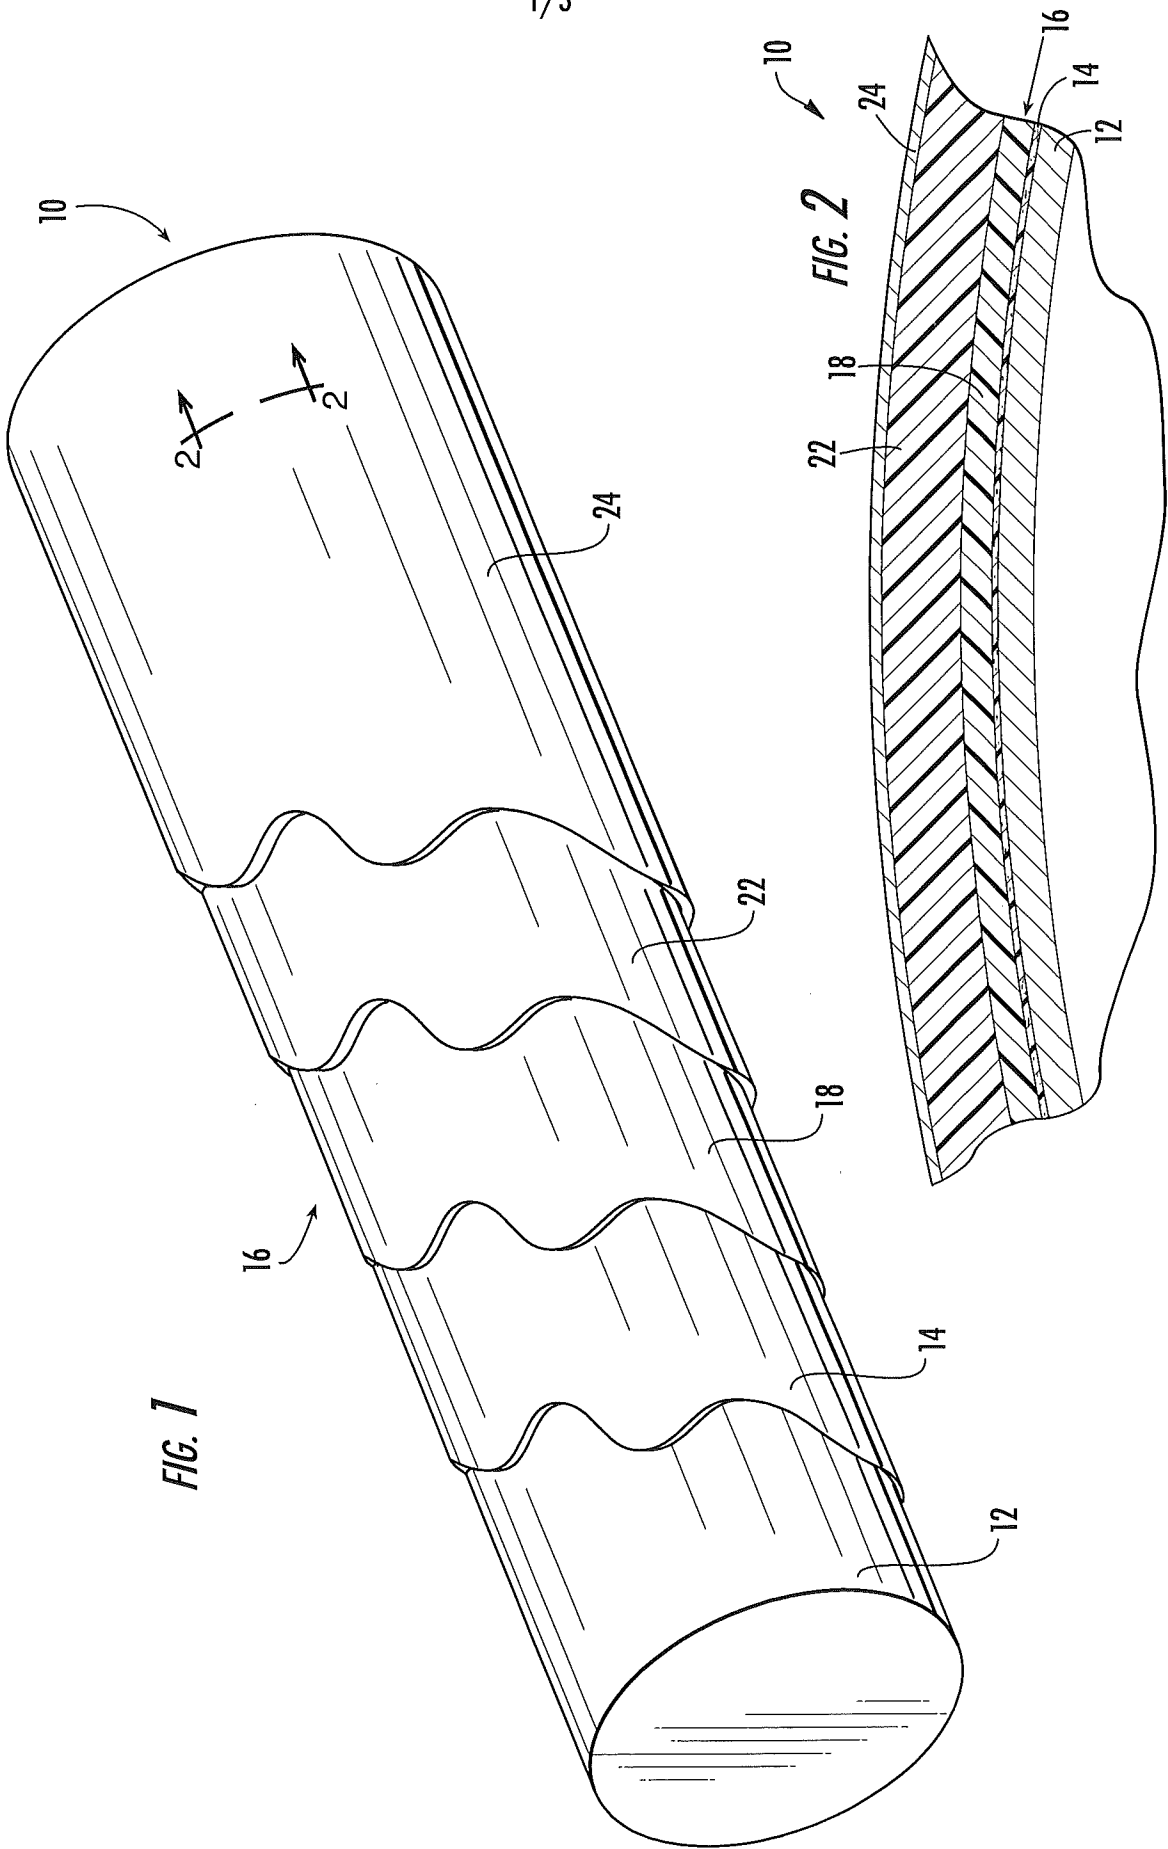

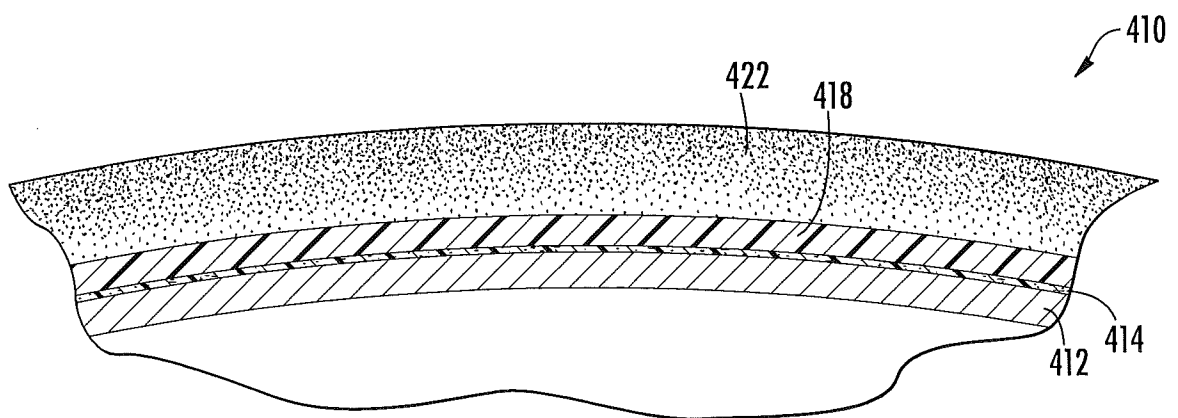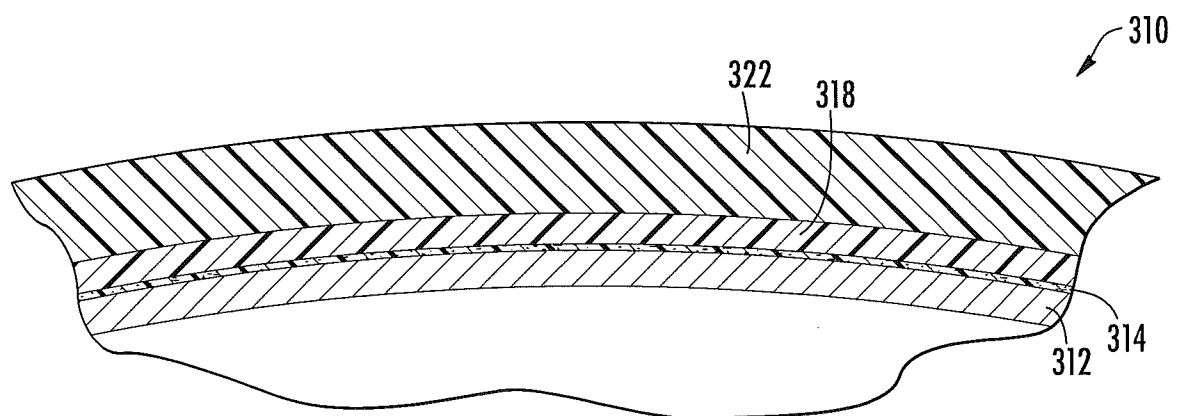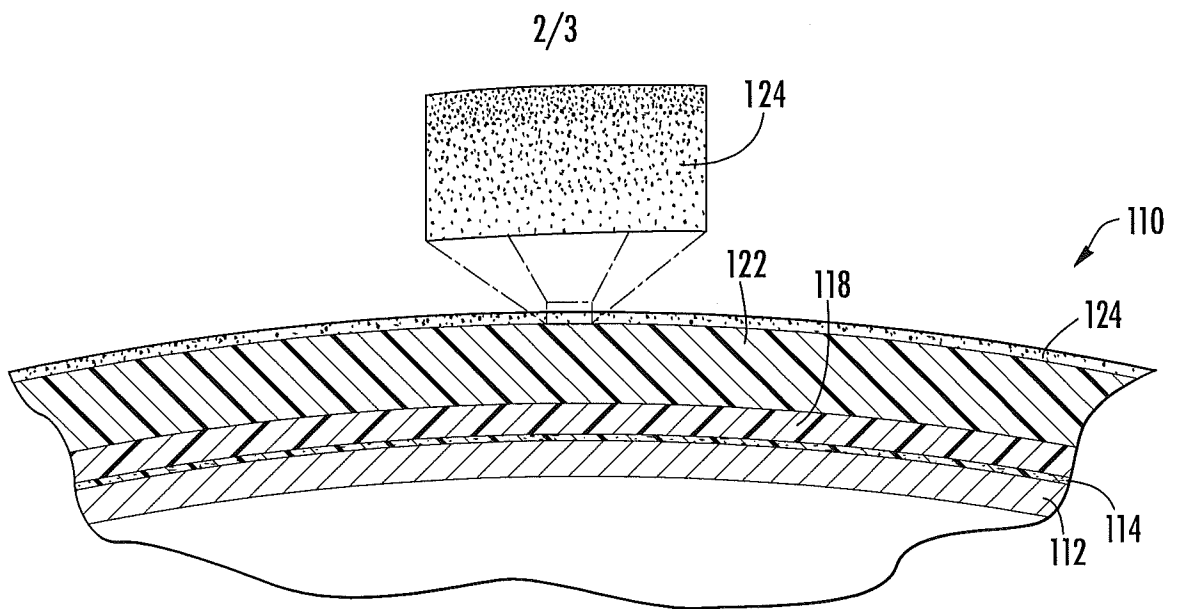

3/3

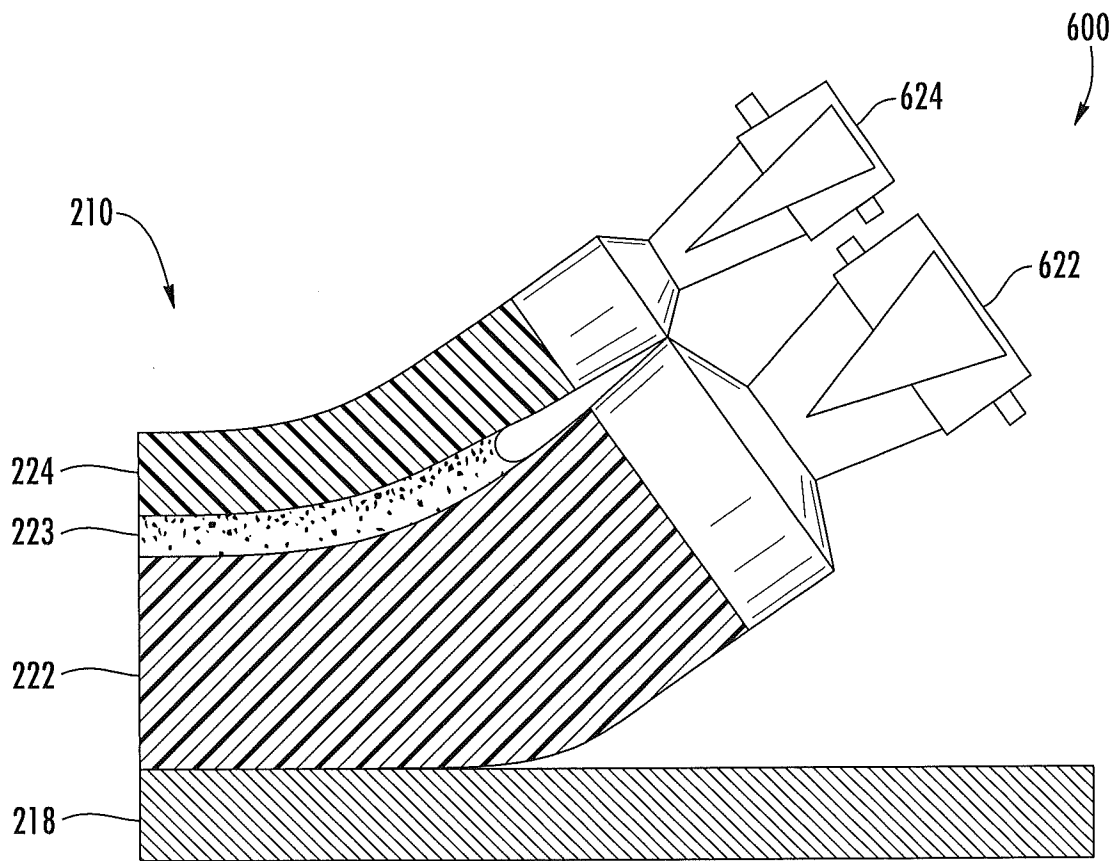


FIG. 4

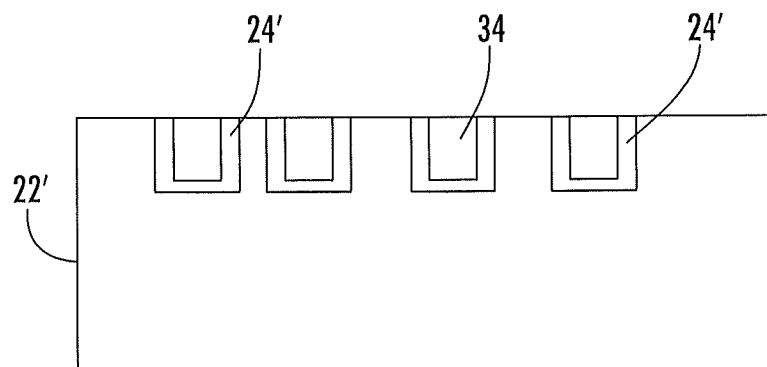


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/031966

A. CLASSIFICATION OF SUBJECT MATTER
 INV. D21F3/08 D21G1/02
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 D21F D21G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 2013/037525 A1 (VOITH PATENT GMBH [DE]; ERKELENZ MARC [DE]; SCHMITT MATTHIAS [DE]; EBE) 21 March 2013 (2013-03-21) page 5, line 10 - page 9, line 18; figures -----	1-4, 6-15, 17-21,23
X	US 2004/014573 A1 (VERGARA ROMEO G [US]) 22 January 2004 (2004-01-22) paragraphs [0023] - [0037]; figures -----	1-4, 6-11, 13-15, 17,20,21
A	EP 0 924 337 A2 (VOITH SULZER PAPIERTECH PATENT [DE] VOITH PAPER PATENT GMBH [DE]) 23 June 1999 (1999-06-23) paragraphs [0022] - [0028] -----	5,16,22



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 June 2013

Date of mailing of the international search report

13/06/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Pregetter, Mario

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/031966

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013037525 A1	21-03-2013	DE 102011082849 A1 WO 2013037525 A1	21-03-2013 21-03-2013
US 2004014573 A1	22-01-2004	AT 409775 T AU 2003257477 A1 CA 2492928 A1 EP 1534891 A1 SI 1534891 T1 US 2004014573 A1 WO 2004009903 A1	15-10-2008 09-02-2004 29-01-2004 01-06-2005 31-08-2009 22-01-2004 29-01-2004
EP 0924337 A2	23-06-1999	AT 269916 T DE 19756226 A1 EP 0924337 A2	15-07-2004 24-06-1999 23-06-1999