



(11) **EP 1 505 851 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
08.12.2010 Bulletin 2010/49

(51) Int Cl.:
H04R 1/02 (2006.01)

(21) Application number: **03017536.8**

(22) Date of filing: **06.08.2003**

(54) **Supporting device for sound generator**

Haltevorrichtung für einen Tongenerator

Dispositif de fixation pour un générateur de son

(84) Designated Contracting States:
DE FR GB

(43) Date of publication of application:
09.02.2005 Bulletin 2005/06

(73) Proprietor: **Vestel Elektronik Sanayi ve Ticaret A.S.**
45030 Manisa (TR)

(72) Inventor: **Karaguney, Seyit**
Izmir (TR)

(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastraße 4
81925 München (DE)

(56) References cited:
EP-A- 1 179 968 WO-A-03/056411
US-A- 4 651 218

EP 1 505 851 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

TECHNICAL FIELD OF THE INVENTION

[0001] The present invention relates to the fastening of sound generators in housings of television sets and/or PC (personal computer) monitors, and in particular to a supporting device for a loudspeaker to be attached to a housing and a method for supporting the sound generator in the housing.

[0002] In consumer electronic products it is of particular importance that a sound generator for generating audible sound and a display device or image generating device, e.g. a cathode ray tube (CRT), a flat screen or a monitor, are arranged in a housing adjacent to each other such that a sound signal accompanies the video or image signal.

[0003] In particular the respective sound generators and the image generating devices display device are enclosed in a single housing.

[0004] The generation of sound using a sound generator is associated with a generation of mechanical vibrations being transferred to the housing, in which the sound generator is arranged. Especially mechanical vibrations in the audio range caused by sound generated by the sound generator involve adverse effects on an image generated by an image generating device included in the housing.

[0005] The main disadvantage of such arrangements is the fact that an acoustic coupling between the sound generator, i.e. the loudspeaker, and a shadow mask of the monitor or the image generating device occurs.

[0006] Especially color cathode ray tubes (CRT) converting electronic signals into a visible color picture by means of three electron beams being scanned vertically and horizontally across an interior surface of the tube are very sensitive to mechanical vibrations. The three electron beams are respectively directed to the same spot at a time and scanned through the whole interior surface of the screen in order to generate a complete image. Each picture element of the screen (pixel) comprises red, blue and green crystals arranged in triads.

[0007] The spots emit light when illuminated by the electron beams due to phosphorescence. Each picture element (pixel) emits light when it is illuminated and thus a color is seen in the light being emitted from a signal pixel whereby the color of the emitted light is determined by the intensity of the three individual electron beams illuminating the color triads in the picture element.

[0008] A complete color image is formed on the screen of the color cathode ray tube being covered by colored light emitting pixels by scanning the three electron beams horizontally and vertically by predetermined amounts. Here the composition of the beam intensities corresponds to the color to be emitted from the picture element being illuminated.

[0009] In order to obtain an acceptable image quality only color triads in one spot must be illuminated at a time.

Furthermore an illumination of adjacent triads has to be prevented during a scanning period. A lateral spread at the screen when an illumination by an electron beam takes place causes a degradation of the image quality observed on the screen.

[0010] It is thus a disadvantage if mechanical vibrations of the housing caused by a sound generation are transferred to the image generating device.

[0011] The situation is being aggravated by the fact that in practice a metallic mesh, i.e. a shadow mask is arranged in front of the interior surface of the screen of a color cathode ray tube (CRT). The metallic mesh is provided in order to avoid any illumination of adjacent triads. The metallic mesh has such a structure that only one of the three electron beams is allowed to pass through one hole and to cause an illumination of one triad.

[0012] It is thus obvious that mechanical vibrations of this kind of a metallic mesh exhibits adverse effects on the quality of the image being displayed. It is a disadvantage that especially vibrations in the low frequency audio range caused by a sound generator arranged near by the cathode ray tube lead to excessive vibrations of the metallic mesh and the cathode ray tube on the whole.

[0013] In order to overcome the vibration problems it has been proposed to provide a vibration and shock resistant environment or a cathode ray tube as disclosed in US 4,651,218. In US 4,651,218 a mounting arrangement is presented where elastomeric grommets are provided in a fastening means in order to damp external vibrations. It is, however, a disadvantage of the arrangement described in US 4,651,218 that the cathode ray tube has to be rigidly fixed to its housing due to the heavy weight of the cathode ray tube. The provision of grommets in the fastening means leads to an unsatisfactory vibration damping with respect to vibrations caused by an acoustic sound generator or a loudspeaker.

[0014] In US 4,651,218 an insufficient vibration damping is provided because elastomeric grommets are placed between a fastener (screw) and a lug of the cathode ray tube and also between the cathode ray tube and the housing.

[0015] In the PCT application WO 98/41014 a monitor is proposed which has a tubular loudspeaker reducing mask vibrations of a cathode ray tube arranged adjacent to the loudspeaker system.

[0016] The loudspeaker system is physically integrated with a monitor and comprises an electro-acoustic transducer, a passive radiator and a tube mounted in between them. The tube has a circular cross section and its axis is parallel to the plane of the metallic mesh, i.e. the shadow mask, of the cathode ray tube.

[0017] A tubular housing or enclosure of the transducer includes a hollow elongated cylinder which is mechanical very rigid in the radial direction, thus that radial oscillations/vibrations hardly occur. The tubular housing is mounted in such a way, that its axis is substantially in parallel with a plane of a front panel of the monitor.

[0018] As the shadow mask (metallic mesh) of the

cathode ray tube is mainly sensitive to vibrations in its plane an arrangement of the tubular housing such that its axis is essentially in parallel to the mask reduces a mechanical coupling between the loudspeaker and the shadow mask of the cathode ray tube. The tubular housing can be elastically attached to an interior or exterior of the monitor system.

[0019] A disadvantage of the arrangement of WO 98/41014 is that the tubes are fixed to the housing such that still an acoustic coupling between the sound generator and the image generating device is possible resulting in a degraded image quality in many circumstances.

[0020] Fig. 6 shows a supporting device for supporting a sound generator 100 in a housing 105. The sound generator 100 is comprised of at least one loudspeaker which is attached at a mounting bracket 101. The mounting bracket 101 is fixed by at least one fastening means (not shown) to the housing of e.g. a television set and/or a PC monitor.

[0021] Absorber elements 201 are shown to be embedded between the mounting bracket 101 in the housing 105. Mechanical vibrations caused by the operation of the sound generator, i.e. by the operation of the loudspeaker 100 are damped by the absorbing elements 201 such that a vibration of the housing 105 is reduced. Nevertheless, vibrational energy generated by the loudspeaker is transferred to the housing 105 via the absorber elements 201.

[0022] It is thus a disadvantage of conventional supporting devices that vibrational energy from a sound generator is transferred to the housing in which an image generating device is accommodated.

SUMMARY OF THE INVENTION

[0023] Thus the object of the present invention is to provide a supporting device for supporting a sound generator in a housing wherein a transfer of vibrational energy to the housing is eliminated.

[0024] This object is achieved by a supporting device for supporting a sound generator in a housing comprising the features of claim 1.

[0025] Furthermore the object is achieved by a method for supporting a sound generator in a housing according to claim 15.

[0026] Further aspects of the present invention follow from the dependent claims.

[0027] According to one aspect of the invention is to provide a supporting device such that a mounting bracket where the sound generator is mounted is capable to slide on a guiding element engaging in the bracket.

[0028] Hence, it is an advantage of the present invention that mechanical vibrations caused by the sound generator cannot be transferred to the housing in which an image generating device such as a cathode ray tube or a monitor is accommodated.

[0029] It is a further advantage of the present invention that an assembly of the sound generator and the housing

requires much less workmanship compared to conventional supporting devices for sound generators.

[0030] It is advantageous that it is not required that components such as fixing elements, guiding elements and bushings have narrow specifications. Furthermore it is an advantage of the present invention that a transfer of vibrational energy to the housing is eliminated over a wide range of sound frequencies.

[0031] The supporting device for supporting a sound generator in a housing according to the present invention essentially comprises a bracket for carrying the sound generator and at least one fastening means for fastening the bracket to the housing, wherein the fastening means includes a guiding element engaging in the bracket wherein a clearance is provided between the guiding element and the bracket, and a fixing element for fixing the guiding element to the housing such that the bracket is slidably supported by the guiding element.

[0032] Furthermore, the method for supporting a sound generator in a housing according to the present invention essentially involves the following steps: mounting the sound generator onto a bracket and fastening the bracket to the housing using at least one fastening means, wherein the step of fastening the bracket to the housing is performed by inserting the bracket into a guiding element wherein a clearance is provided between the guiding element and the bracket, and by fixing the guiding element to the housing using a fixing element such that the bracket is slidably supported by the guiding element.

[0033] According to an aspect of the present invention the sound generator comprises at least one loudspeaker for generating audible sound. It is preferable that a loudspeaker system consists of at least two loudspeakers whereby one loudspeaker is adapted to generate high audible frequencies and one loudspeaker is adapted to generate low audible frequencies.

[0034] According to another aspect of the present invention the housing comprises a grill facing the sound generator for transmitting sound to the outside of the housing.

[0035] According to yet another aspect of the present invention the housing comprises at least one boss where the fixing element is attachable. It is preferred that the boss is rigid and provides a secure fastening of the guiding element.

[0036] Preferably the bracket comprises at least one lug wherein the guiding element slides with a clearance. It is advantageous that at least two lugs are provided on the bracket in order to slidably mount the bracket in the housing at two distinct locations.

[0037] According to yet another aspect of the present invention the guiding element engaging in the bracket consists of a bushing formed with a projection acting as a stopper element for holding the bracket in such a way that the bracket cannot drop from the guiding element.

[0038] In a preferred manner the bushing is fixed to the at least one boss arranged in the housing by means of at least one fixing element such that the bushing slides

within the lug.

[0039] It is to be preferred that the fixing consists of a screw or clamp in order to screw or clamp the guiding element to the housing. Furthermore it is possible that the fixing element and the guiding element are produced in one single component in order to facilitate a mounting of the bracket to the housing.

[0040] Moreover it is advantageous if the screw is made of an elastic material which has a long flat surface in order to slidably hold bracket with the sound generator.

[0041] According to yet another aspect of the present invention the bracket for carrying the sound generator and/or the fixing element for fixing the guiding element to the housing such that the bracket is slidably supported by the guiding element are made of an elastic material. Preferably the elastic material consists of plastic or a composition containing plastic.

[0042] According to yet another aspect of the present invention an elastic element is provided between the projection of the bushing and the bracket such that the bracket is pushed towards the housing by the action of the elastic element. It is thus possible to slightly push the bracket carrying the sound generator towards the housing in order to prevent a bouncing of the bracket with respect to the housing.

[0043] Preferably, the elastic element is formed as a coil spring, i.e. a spiral spring, wound or arranged around the bushing between the projection of the bushing and the bracket.

[0044] According to yet another aspect of the present invention an absorber element is provided between the bracket and the housing such that a sliding movement of the bracket with respect to the housing is damped.

[0045] It is to be preferred that the absorber element consists of a foamed material such as foamed plastic, rubber foam, cellular material, granulated foam plastic expanded material, etc.

[0046] According to yet another aspect of the present invention an image generating device for generating an image is accommodated in the housing where the sound generator is arranged. The image generating device includes a monitor, e.g. for personal computers (PC), a cathode ray tube or a color cathode ray tube (CRT) for a television set, a display screen for advertisement etc.

[0047] According to yet another aspect of the present invention the guiding element is screwed or clamped onto a boss arranged in the housing by means of the fixing element.

[0048] It is preferred that the bracket is pushed towards the housing by the action of an elastic element which is provided between the projection of the guiding element, e.g. the bushing and the bracket.

[0049] According to yet another aspect of the present invention a sliding movement of the bracket with respect to the housing is damped by means of an absorber element which is provided between the bracket and the housing.

BRIEF DESCRIPTION OF THE DRAWINGS

[0050] Embodiments of the present invention are depicted in the drawings and are explained in more detail in the following description.

[0051] In the drawings:

Fig. 1 is a cross-sectional side view of a supporting device for supporting a sound generator in a housing according to a preferred embodiment of the present invention;

Fig. 2 is an exploded side view of a supporting device comprising a bracket with fastening lugs according to another preferred embodiment of the present invention;

Fig. 3 illustrates a detail of the fastening means labeled A in Fig. 2;

Fig. 4 represents a cross-sectional side view of the supporting device according to the preferred embodiment of the present invention shown in Fig. 2 where the supporting device is shown in its assembled state;

Fig. 5 is a detailed view of a fastening means wherein the detail is labeled by B in Fig. 4; and

Fig. 6 a conventional supporting device for supporting a sound generator in a housing.

[0052] In the figures same reference numerals are related to same components or components having the same technical features and functions.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0053] The present invention now will be described more fully hereinafter with reference to accompanying drawings in which preferred embodiments of the present invention are shown.

[0054] Fig. 1 is a cross-sectional side view of a supporting device for supporting a sound generator in a housing according to a preferred embodiment of the present invention. A reference numeral in Fig. 1 illustrates a housing in which the sound generator is accommodated and it is to be noted that the housing also accommodates a image generating device such as a cathode ray tube (CRT), a color cathode ray tube or a flat screen. The sound generator 100 and the image generating device are components of, but are not restricted to, a television set, a personal computer (PC), an information display apparatus etc.

[0055] As shown in Fig. 1 the sound generator 100 is fixed to a bracket 101 which is provided as a component being separate from the housing 105. In the embodiment

shown in Fig. 1 the sound generator 100 consists of a single loudspeaker which converts an electric signal into sound waves.

[0056] Though not shown it is obvious for a skilled person that more than one loudspeaker 100 can be arranged on the bracket 101. It is preferable, e.g. to mount at least two loudspeakers onto the bracket 101 wherein one loudspeaker is adapted for generating sound at high audible frequencies and the other loudspeaker is adapted for the generating sound at low audible frequencies.

[0057] In an area facing the loudspeaker the housing 105 includes a grill 106 facing the sound generator 100 for transmitting the sound generated by the loudspeaker (s) to the outside of the housing 105. In the embodiment shown in Fig. 1 the housing 105 has mounting bosses 107a and 107b onto which fixing elements 103a, 103b may be fixed.

[0058] The bracket 101 on which the sound generator 100 is mounted, may be fixed to the housing 105, respectively to the bosses 107a, 107b of the housing 105 by means of fastening means 104a, 104b. It is obvious for the skilled person, that one fastening means 104a may be sufficient to fasten the bracket 101 to the housing 105. Nevertheless, the invention comprises the use of one or more fastening means 104a, 104b for fastening the bracket 101 to the housing 105. In the embodiment shown in Fig. 1 two fastening means 104a and 104b are provided.

[0059] The fastening means 104a, 104b consists of a fixing element 103a, 103b and a guiding element 102a, 102b. The guiding element 102a, 102b engages in the bracket 101, e.g. through a hole. In Fig. 1 the fixing element 103a, 103b is shown as a screw, the diameter of which is less than the diameter of the hole provided in the bracket 101.

[0060] Furthermore, a bushing which is an example of the guiding element 102a, 102b is provided with a projection 110, which may be ring-shaped whereby the outer diameter of the ring is larger than the diameter of the hole in the bracket 101. Thus, the bracket 101 together with the sound generator 100 is prevented from dropping out to the left side (see Fig. 1) when the fixing element 103a, 103b has been fixed to the mounting bosses 107a, 107b of the housing 105.

[0061] When the fastening means 104a, 104b is fixed at the housing 105, i.e. when the fixing element 103a, 103b is fixed to the boss 107a, 107b of the housing 105 the bracket 101 is able to slide along the guiding element 102a, 102b in a direction substantially parallel to the axis of the sound generator 100, i.e. in a direction parallel to the 1-1' axis (the broken line in Fig. 1).

[0062] The longitudinal movement is stopped by the stopping element consisting of the projection 110 of the guiding element 102a, 102b on one side and the housing 105 on the other side.

[0063] Thus the bracket 101 is allowed to vibrate freely together with the sound generator 100 while the sound generator 100 is generating sound resulting in vibrations

of the bracket 101 and the sound generator 100. In this manner the supporting device according to the present invention prevents a transfer of the generated vibrations to the housing 105.

[0064] Mechanical energy generated by the sound generator 100 caused by the acoustic emission of sound is not absorbed by the housing 105 and cannot degrade the image quality of a monitor installed nearby. Mechanical energy generated by the sound generator 100 cannot be transferred to the housing 105. Thus, the image quality of a display device, e.g. a monitor, installed nearby the sound generator 100 cannot be degraded due to vibrations caused by the sound generator 100.

[0065] Fig. 2 illustrates an exploded cross-sectional side view according to another preferred embodiment of the present invention, and Fig. 3 shows the detail A of Fig. 2.

[0066] It is noted that same reference numerals are given to same parts or components as in Fig. 1 and their description is omitted here. In addition to the supporting device shown in Fig. 1, the supporting device of Fig. 2 exhibits a modified bracket 101 for carrying the sound generator 100.

[0067] The modified bracket 101 comprises at least one lug 108a, 108b the diameter of which is larger than the diameter of the guiding element 102a, 102b. As described with reference to Fig. 1 the guiding element 102a, 102b may consist of a bushing.

[0068] The bushing 102a, 102b has a circular projection 110 the diameter of which is larger than the inner diameter of the lug 108a, 108b. Fig. 2 shows the supporting device for a sound generator 100 in a disassembled state, whereas Figs. 4 and 5 illustrate the supporting device of Figs. 2 and 3 in an assembled state.

[0069] Fig. 3 represents the detail A of Fig. 2. It is shown in Fig. 3, however, that an elastic element 109 can be provided between the projection 110 of the bushing and the bracket 101 such that the bracket 101 is pushed towards the housing 105 by the action of the elastic element 109. Preferably the elastic element 109 is a coil spring arranged around the bushing 102a, 102b between the projection 100 of the bushing 102a, 102b and the bracket 101. Preferably, the external diameter of boss 107a, 107b is larger than the diameter of guiding element 102a, 102b on which the bracket 101 is sliding.

[0070] It is noted that the elastic module of the elastic element 109 is selected in such a way that the bracket 101 together with the sound generator 100 is still capable to move in the direction along the axis 1-1' shown in Fig. 2.

[0071] Furthermore, the elastic element 109 formed as a coil spring has an outer diameter which is larger than the inner diameter of the lug 108a, 108b, whereas the inner diameter of the coil spring is larger than the outer diameter of the bushing 102a, 102b but smaller than the outer diameter of the projection 110 such that the coil spring slides over the bushing 102a, 102b and is stopped by the projection 110 as shown in the detail A of Fig. 3.

[0072] A sliding movement of the bracket 101 with respect to the housing 105 may be damped by means of an absorber element 201 which is provided between the bracket 101 and the housing 105. Preferably the absorber element 201 has an opening in a portion facing the grill 106 of the housing 105 in order to permit sound passing from the sound generator 100 to the outside of the housing 105. The absorber element 201 preferably consists of a foamed material such as foamed plastic or rubber foam. Furthermore, the absorber element 201 may consist of any kind of cellular materials or plastics.

[0073] Figs. 4 and 5 show the supporting device of Figs. 2 and 3 in an assembled state. As can be seen from Fig. 4 the fixing element 103a, 103b consisting of a screw is screwed onto the mounting boss 107a, 107b of the housing 105.

[0074] Fig. 5 shows a detail B of Fig. 4. The guiding element 102a formed as a bushing is fixed by the fixing element 103a whereas the lug 108a of the bracket 101 is allowed to move freely along the axis 2-2'

[0075] The supporting device according to the present invention may comprise more than one fastening means 104a, 104b. Preferably two fastenings means 104a, 104b are provided as shown in Fig. 4 in order to improve a stability of fastening the bracket 101 carrying the sound generator 100 to the housing 105.

[0076] When the sound generator 100 is being installed in the housing 105 at first the sound generator 100 is mounted onto a bracket 101 and secondly the bracket 101 is fastened to the housing 105 using at least one fastening means 104a, 104b, wherein the step of fastening the bracket to the housing includes the insertion of the guiding element 102a, 102b into the bracket 101, i.e. the bushing wherein a clearance is provided between the bushing 102a, 102b and the bracket 101, and the fixing of the guiding element 102a, 102b to the housing 105 using the fixing element 103a, 103b such that the bracket 101 is slidably supported by the guiding element 102a, 102b.

[0077] In the assembled state shown in Fig. 4 sound is permitted to pass through the grill 106 of the housing 105 whereby any vibrations caused by the sound generator 100 are not transmitted to the housing 105 as the bracket is freely movable along the axis 2-2' by a sliding of the lugs 108a, 108b along the guiding elements 102a, 102b. Furthermore the bracket 101 is pushed towards the housing by the action of the - elastic element 109, which is arranged between the projection 110 of the guiding element 102a, 102b and the bracket 101 (Fig. 3).

[0078] Moreover a sliding movement of the bracket 101 with respect to the housing 105 is damped by a means of the absorber element 201 which is arranged between the bracket 101 and the housing 105.

[0079] It is advantageous if the fixing element 103a, 103b and the guiding element 102a, 102b are provided as a single component used to fasten the bracket 101 to the housing 105. Furthermore, it is an advantage if the mounting bosses 107a, 107b of the housing 105 have

threaded bores in which the fixing elements 103a, 103b can be screwed.

[0080] Furthermore, an additional vibration damping effect can be obtained, if the bracket 101 for carrying the sound generator 100 and/or the fixing elements 103a, 103b are made of an elastic material.

[0081] The supporting device according to the present invention supports the sound generator with a loose contact such that vibrations are not transferred to the housing.

[0082] The supporting device according to the present invention is preferably employed in equipment where the sound generation system and an image generation system are both included in one common housing.

[0083] As for the description of a conventional supporting device for supporting a sound generator illustrated in Fig. 6 it is referred to the introduction of this description.

[0084] Accordingly it is to be understood that the present invention has been described by way of illustration and not limitation.

[0085] Furthermore the invention is not limited to the specific application areas mentioned above.

Claims

1. A supporting device for supporting a sound generator (100) in a housing (105) comprising:

- a) a bracket (101) for carrying the sound generator (100); and
- b) at least one fastening means (104a, 104b) for fastening the bracket (101) to the housing (105),

including

- b1) a guiding element (102a, 102b) engaging in the bracket (101) wherein a clearance is provided between the guiding element (102a, 102b) and the bracket (101); and
- b2) a fixing element (103a, 103b) for fixing the guiding element (102a, 102b) to the housing (105) such that the bracket (101) is slidably supported by the guiding element (102a, 102b),

characterised in that

the guiding element (102a, 102b) engaging in the bracket (101) consists of a bushing formed with a projection (110) acting as a stopper element for holding the bracket (101).

2. A device according to claim 1, **characterised in that** the sound generator (100) comprises at least one loudspeaker for generating audible sound.

3. A device according to claim 1 or 2, **characterised in that** the housing (105) comprises

a grill (106) facing the sound generator (100) for transmitting sound to the outside of the housing (105).

4. A device according to claim 1,
characterised in that the housing (105) comprises at least one boss (107a, 107b) where the fixing element (103a, 103b) is attachable.
5. A device according to claim 1,
characterised in that the bracket (101) comprises at least one lug (108a, 108b) wherein the guiding element (102a, 102b) slides within the lug (108a, 108b) with a clearance.
6. A device according to claim 4 and 5,
characterised in that the bushing is fixed to the boss (107a, 107b) of the housing (105) using the fixing element (103a, 103b) such that the bushing slides within the lug (108a, 108b).
7. A device according to claim 1,
characterised in that the fixing element (103a, 103b) consists of a screw or a clamp.
8. A device according to claim 1,
characterised in that the bracket (101) for carrying the sound generator (100) and/or the fixing element (103a, 103b) are made of an elastic material.
9. A device according to claim 1,
characterised in that an elastic element (109) is provided between the projection (110) of the bushing (102a, 102b) and the bracket (101) such that the bracket (101) is pushed towards the housing (105) by the action of the elastic element (109).
10. A device according to claim 9,
characterised in that the elastic element (109) is a coil spring arranged around the bushing (102a, 102b) between the projection (110) of the bushing (102a, 102b) and the bracket (101).
11. A device according to claim 1,
characterised in that an absorber element (201) is provided between the bracket (101) and the housing (105) such that a sliding movement of the bracket (101) with respect to the housing (105) is damped.
12. A device according to claim 11,
characterised in that the absorber element (201) consists of a foamed material such as foamed plastic or rubber foam.
13. A device according to claim 1,
characterised in that a monitor for displaying an image is accommodated in the housing (105) where the sound generator (100) is arranged.

14. A television set comprising a supporting device according to claims 1 to 13.

15. A method for supporting a sound generator (100) in a housing (105) comprising the following steps:

- a) mounting the sound generator (100) onto a bracket (101); and
- b) fastening the bracket (101) to the housing (105) using at least one fastening means (104a, 104b) by

- b1) inserting the bracket (101) into a guiding element (102a, 102b) wherein a clearance is provided between the guiding element (102a, 102b) and the bracket (101); and
- b2) fixing the guiding element (102a, 102b) to the housing (105) using a fixing element (103a, 103b) such that the bracket (101) is slidably supported by the guiding element (102a, 102b),

characterised in that

the guiding element (102a, 102b) engaging in the bracket (101) consists of a bushing formed with a projection (110) acting as a stopper element for holding the bracket (101).

16. A method according to claim 15,
characterised in that sound generated by the sound generator (100) is transmitted to the outside of the housing (105) via a grill (106) provided in the housing (105) and facing the sound generator (100).

17. A method according to claim 15,
characterised in that the guiding element (102a, 102b) slides within a lug (108a, 108b) provided in the bracket (101).

18. A method according to claim 17,
characterised in that the guiding element (102a, 102b) is fixed to a boss (107a, 107b) of the housing (105) using the fixing element (103a, 103b) such that the guiding element (102a, 102b) slides within the lug (108a, 108b).

19. A method according to claim 18,
characterised in that the guiding element (102a, 102b) is screwed or clamped onto the boss (107a, 107b) by means of the fixing element (103a, 103b).

20. A method according to claim 15,
characterised in that the bracket (101) is pushed towards the housing (105) by the action of an elastic element (109) which is provided between the projection (110) of the guiding element (102a, 102b) and the bracket (101).

21. A method according to claim 20,
characterised in that the elastic element (109) is arranged as a coil spring around the guiding element (102a, 102b) between the projection (110) of the guiding element (102a, 102b) and the bracket (101).
22. A method according to claim 15,
characterised in that a sliding movement of the bracket (101) with respect to the housing (105) is damped by means of an absorber element (201) which is provided between the bracket (101) and the housing (105).
23. A method according to claim 15,
characterised in that the fixing element (103a, 103b) and the guiding element (102a, 102b) are provided as a single component to fasten the bracket (101) to the housing (105).

Patentansprüche

1. Stützvorrichtung zum Stützen eines Schallerzeugers (100) in einem Gehäuse (105), welche umfasst:

- a) einen Träger (101) zum Tragen des Schallerzeugers (100); und
- b) wenigstens ein Befestigungsmittel (104a, 104b) zum Befestigen des Trägers (101) an das Gehäuse (105),
beinhaltend

- b1) ein Führungselement (102a, 102b), welches in den Träger (101) greift, wobei ein Freiraum zwischen dem Führungselement (102a, 102b) und dem Träger (101) bereitgestellt wird; und
- b2) ein Fixierelement (103a, 103b) zum Fixieren der Führungselemente (102a, 102b) an das Gehäuse (105), so dass der Träger (101) gleitbar von dem Führungselement (102a, 102b) gestützt wird,

dadurch gekennzeichnet, dass

das Führungselement (102a, 102b), welches in den Träger (101) greift, aus einer Buchse besteht, welche mit einer Erhebung (110) gebildet ist, welche als ein Stoppelement fungiert, zum Halten des Trägers (101).

2. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Schallerzeuger (100) wenigstens einen Lautsprecher zum Erzeugen von hörbarem Schall umfasst.
3. Vorrichtung nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** das Gehäuse (105) ein Gitter (106) umfasst, welches dem Schallerzeuger (100)

zugewandt ist, zum Übertragen von Schall an die Außenseite des Gehäuses (105).

4. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** das Gehäuse (105) wenigstens einen Knauf (107a, 107b) umfasst, wo das Fixierelement (103a, 103b) anbringbar ist.

5. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Träger (101) wenigstens eine Lasche (108a, 108b) umfasst, wobei das Führungselement (102a, 102b) innerhalb der Lasche (108a, 108b) mit einem Freiraum gleitet.

6. Vorrichtung nach Anspruch 4 und 5, **dadurch gekennzeichnet, dass** die Buchse an den Knauf (107a, 107b) des Gehäuses (105) unter Nutzung des Fixierelements (103a, 103b) fixiert ist, so dass die Buchse innerhalb der Lasche (108a, 108b) gleitet.

7. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** das Fixierelement (103a, 103b) aus einer Schraube oder einer Klemme besteht.

8. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** der Träger (101) zum Tragen des Schallerzeugers (100) und/oder das Fixierelement (103a, 103b) aus einem elastischen Material gemacht sind.

9. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** ein elastisches Element (109) zwischen der Erhebung (110) der Buchse (102a, 102b) und dem Träger (101) bereitgestellt wird, so dass der Träger (101) hin zu dem Gehäuse (105) durch die Wirkung des elastischen Elements (109) gedrückt wird.

10. Vorrichtung nach Anspruch 9, **dadurch gekennzeichnet, dass** das elastische Element (109) eine Spiralfeder ist, welche um die Buchse (102a, 102b) angeordnet ist, zwischen der Erhebung (110) der Buchse (102a, 102b) und dem Träger (101).

11. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** ein Dämpfungselement (201) zwischen dem Träger (101) und dem Gehäuse (105) bereitgestellt wird, so dass eine Gleitbewegung des Trägers (101) hinsichtlich des Gehäuses (105) gedämpft wird.

12. Vorrichtung nach Anspruch 11, **dadurch gekennzeichnet, dass** das Dämpfungselement (201) aus einem Schaumstoffmaterial besteht, wie einem Schaumstoff oder einem Moosgummi.

13. Vorrichtung nach Anspruch 1, **dadurch gekennzeichnet, dass** ein Monitor zum Anzeigen eines Bil-

des in dem Gehäuse (105) untergebracht ist, wo der Schallerzeuger (100) angeordnet ist.

14. Fernsehgerät, welches eine Stützvorrichtung nach den Ansprüchen 1 bis 13 umfasst.

15. Verfahren zum Stützen eines Schallerzeugers (100) in einem Gehäuse (105), welches die folgenden Schritte umfasst:

- a) Anbringen des Schallerzeugers (100) auf einem Träger (101); und
- b) Befestigen des Trägers (101) an das Gehäuse (105) unter Nutzung von wenigstens einem Befestigungsmittel (104a, 104b) durch

b1) Einfügen des Trägers (101) in ein Führungselement (102a, 102b), wobei ein Freiraum zwischen dem Führungselement (102a, 102b) und dem Träger (101) bereitgestellt wird; und

b2) Befestigen des Führungselements (102a, 102b) an das Gehäuse (105) unter Nutzung eines Fixierelements (103a, 103b), so dass der Träger (101) gleitbar von dem Führungselement (102a, 102b) gestützt wird,

dadurch gekennzeichnet, dass

das Führungselement (102a, 102b), welches in den Träger (101) greift, aus einer Buchse besteht, welche mit einer Erhebung (110) gebildet wird, welche als ein Stoppelement fungiert, zum Halten des Trägers (101).

16. Vorrichtung nach Anspruch 15, **dadurch gekennzeichnet, dass** der Schall, welcher durch den Schallerzeuger (100) erzeugt wird, an die Außenseite des Gehäuses (105) über ein Gitter (106) übertragen wird, welches in dem Gehäuse (105) bereitgestellt wird und dem Schallerzeuger (100) zugewandt ist.

17. Vorrichtung nach Anspruch 15, **dadurch gekennzeichnet, dass** das Führungselement (102a, 102b) innerhalb einer Lasche (108a, 108b) gleitet, die in dem Träger (101) bereitgestellt wird.

18. Verfahren nach Anspruch 17, **dadurch gekennzeichnet, dass** das Führungselement (102a, 102b) an einem Knauf (107a, 107b) des Gehäuses (105) unter Nutzung des Fixierelements (103a, 103b) fixiert ist, so dass das Führungselement (102a, 102b) innerhalb der Lasche (108a, 108b) gleitet.

19. Verfahren nach Anspruch 18, **dadurch gekennzeichnet, dass** das Führungselement (102a, 102b) auf den Knauf (107a, 107b) mittels des Fixierele-

ments (103a, 103b) geschraubt oder geklemmt wird.

20. Verfahren nach Anspruch 15, **dadurch gekennzeichnet, dass** der Träger (101) hin zu dem Gehäuse (105) durch die Wirkung eines elastischen Elements (109) gedrückt wird, welches zwischen der Erhebung (110) des Führungselements (102a, 102b) und dem Träger (101) bereitgestellt wird.

21. Verfahren nach Anspruch 20, **dadurch gekennzeichnet, dass** das elastische Element (109) als eine Spiralfeder um das Führungselement (102a, 102b) zwischen die Erhebung (110) des Führungselements (102a, 102b) und dem Träger (101) angeordnet ist.

22. Verfahren nach Anspruch 15, **dadurch gekennzeichnet, dass** eine Gleitbewegung des Trägers (101) hinsichtlich des Gehäuses (105) mittels eines Dämpfungselements (201) gedämpft wird, welches zwischen dem Träger (101) und dem Gehäuse (105) bereitgestellt wird.

23. Verfahren nach Anspruch 15, **dadurch gekennzeichnet, dass** das Fixierelement (103a, 103b) und das Führungselement (102a, 102b) als eine einzelne Komponente bereitgestellt werden, um den Träger (101) an das Gehäuse (105) zu befestigen.

Revendications

1. Dispositif de support pour supporter un générateur d'audio (100) dans un logement (105) comprenant :

- a) un support (101) pour supporter le générateur d'audio (100) ; et
- b) au moins un moyen de fixation (104a, 104b) pour fixer le support (101) au logement (105), comprenant :

b1) un élément de guidage (102a, 102b) s'engageant dans le support (101), dans lequel un espace libre est prévu entre l'élément de guidage (102a, 102b) et le support (101) ; et

b2) un élément de fixation (103a, 103b) pour fixer l'élément de guidage (102a, 102b) au logement (105) de sorte que le support (101) soit supporté de façon coulissante par l'élément de guidage (102a, 102b),

caractérisé en ce que

l'élément de guidage (102a, 102b) s'engageant dans le support (101) est constitué d'une douille formée avec une saillie (110) servant d'élément de butée pour retenir le support (101).

2. Dispositif selon la revendication 1, **caractérisé en ce que** le générateur d'audio (100) comprend au moins un haut-parleur pour générer un son audible.
3. Dispositif selon la revendication 1 ou 2, **caractérisé en ce que** le logement (105) comprend une grille (106) faisant face au générateur d'audio (100) pour transmettre un son à l'extérieur du logement (105).
4. Dispositif selon la revendication 1, **caractérisé en ce que** le logement (105) comprend au moins un bossage (107a, 107b) où l'élément de fixation (103a, 103b) est fixable.
5. Dispositif selon la revendication 1, **caractérisé en ce que** le support (101) comprend au moins une oreille (108a, 108b), dans lequel l'élément de guidage (102a, 102b) coulisse à l'intérieur de l'oreille (108a, 108b) avec un espace libre.
6. Dispositif selon la revendication 4 et 5, **caractérisé en ce que** la douille est fixée au bossage (107a, 107b) du logement (105) en utilisant l'élément de fixation (103a, 103b) de sorte que la douille coulisse à l'intérieur de l'oreille (108a, 108b).
7. Dispositif selon la revendication 1, **caractérisé en ce que** l'élément de fixation (103a, 103b) est constitué d'une vis ou d'un élément de serrage.
8. Dispositif selon la revendication 1, **caractérisé en ce que** le support (101) pour supporter le générateur d'audio (100) et/ou l'élément de fixation (103a, 103b) sont faits d'un matériau élastique.
9. Dispositif selon la revendication 1, **caractérisé en ce qu'un** élément élastique (109) est prévu entre la saillie (110) de la douille (102a, 102b) et le support (101) de sorte que le support (101) soit poussé vers le logement (105) par l'action de l'élément élastique (109).
10. Dispositif selon la revendication 9, **caractérisé en ce que** l'élément élastique (109) est un ressort hélicoïdal agencé autour de la douille (102a, 102b) entre la saillie (110) de la douille (102a, 102b) et le support (101).
11. Dispositif selon la revendication 1, **caractérisé en ce qu'un** élément absorbant (201) est prévu entre le support (101) et le logement (105) de sorte qu'un mouvement de coulissement du support (101) par rapport au logement (105) soit amorti.
12. Dispositif selon la revendication 11, **caractérisé en ce que** l'élément absorbant (201) est constitué d'un matériau mousse, tel que du plastique mousse ou de la mousse de caoutchouc.
13. Dispositif selon la revendication 1, **caractérisé en ce qu'un** moniteur pour afficher une image est logé dans le logement (105) où le générateur d'audio (100) est agencé.
14. Poste de télévision comprenant un dispositif de support selon les revendications 1 à 13.
15. Procédé pour supporter un générateur d'audio (100) dans un logement (105) comprenant les étapes suivantes :
- a) monter le générateur d'audio (100) sur un support (101) ; et
- b) fixer le support (101) au logement (105) en utilisant au moins un moyen de fixation (104a, 104b) en
- b1) insérant le support (101) dans un élément de guidage (102a, 102b), dans lequel un espace libre est prévu entre l'élément de guidage (102a, 102b) et le support (101); et
- b2) fixant l'élément de guidage (102a, 102b) au logement (105) en utilisant un élément de fixation (103a, 103b) de sorte que le support (101) soit supporté de façon coulissante par l'élément de guidage (102a, 102b),
- caractérisé en ce que** l'élément de guidage (102a, 102b) s'engageant dans le support (101) est constitué d'une douille formée avec une saillie (110) servant d'élément de butée pour retenir le support (101).
16. Procédé selon la revendication 15, **caractérisé en ce qu'un** son généré par le générateur d'audio (100) est transmis à l'extérieur du logement (105) par l'intermédiaire d'une grille (106) prévue dans le logement (105) et faisant face au générateur d'audio (100).
17. Procédé selon la revendication 15, **caractérisé en ce que** l'élément de guidage (102a, 102b) coulisse à l'intérieur d'une oreille (108a, 108b) prévue dans le support (101).
18. Procédé selon la revendication 17, **caractérisé en ce que** l'élément de guidage (102a, 102b) est fixé à un bossage (107a, 107b) du logement (105) en utilisant l'élément de fixation (103a, 103b), de sorte que l'élément de guidage (102a, 102b) coulisse à l'intérieur de l'oreille (108a, 108b).

19. Procédé selon la revendication 18,
caractérisé en ce que l'élément de guidage (102a, 102b) est vissé ou serré sur le bossage (107a, 107b) au moyen de l'élément de fixation (103a, 103b). 5
20. Procédé selon la revendication 15,
caractérisé en ce que le support (101) est poussé vers le logement (105) par l'action d'un élément élastique (109) qui est prévu entre la saillie (110) de l'élément de guidage (102a, 102b) et le support (101). 10
21. Procédé selon la revendication 20,
caractérisé en ce que l'élément élastique (109) est agencé sous forme de ressort hélicoïdal autour de l'élément de guidage (102a, 102b) entre la saillie (110) de l'élément de guidage (102a, 102b) et le support (101). 15
22. Procédé selon la revendication 15,
caractérisé en ce qu'un mouvement de coulissement du support (101) par rapport au logement (105) est amorti au moyen d'un élément absorbeur (201) qui est prévu entre le support (101) et le logement (105). 20
23. Procédé selon la revendication 15,
caractérisé en ce que l'élément de fixation (103a, 103b) et l'élément de guidage (102a, 102b) sont prévus sous forme de composant unique pour fixer le support (101) au logement (105). 25
- 30

35

40

45

50

55

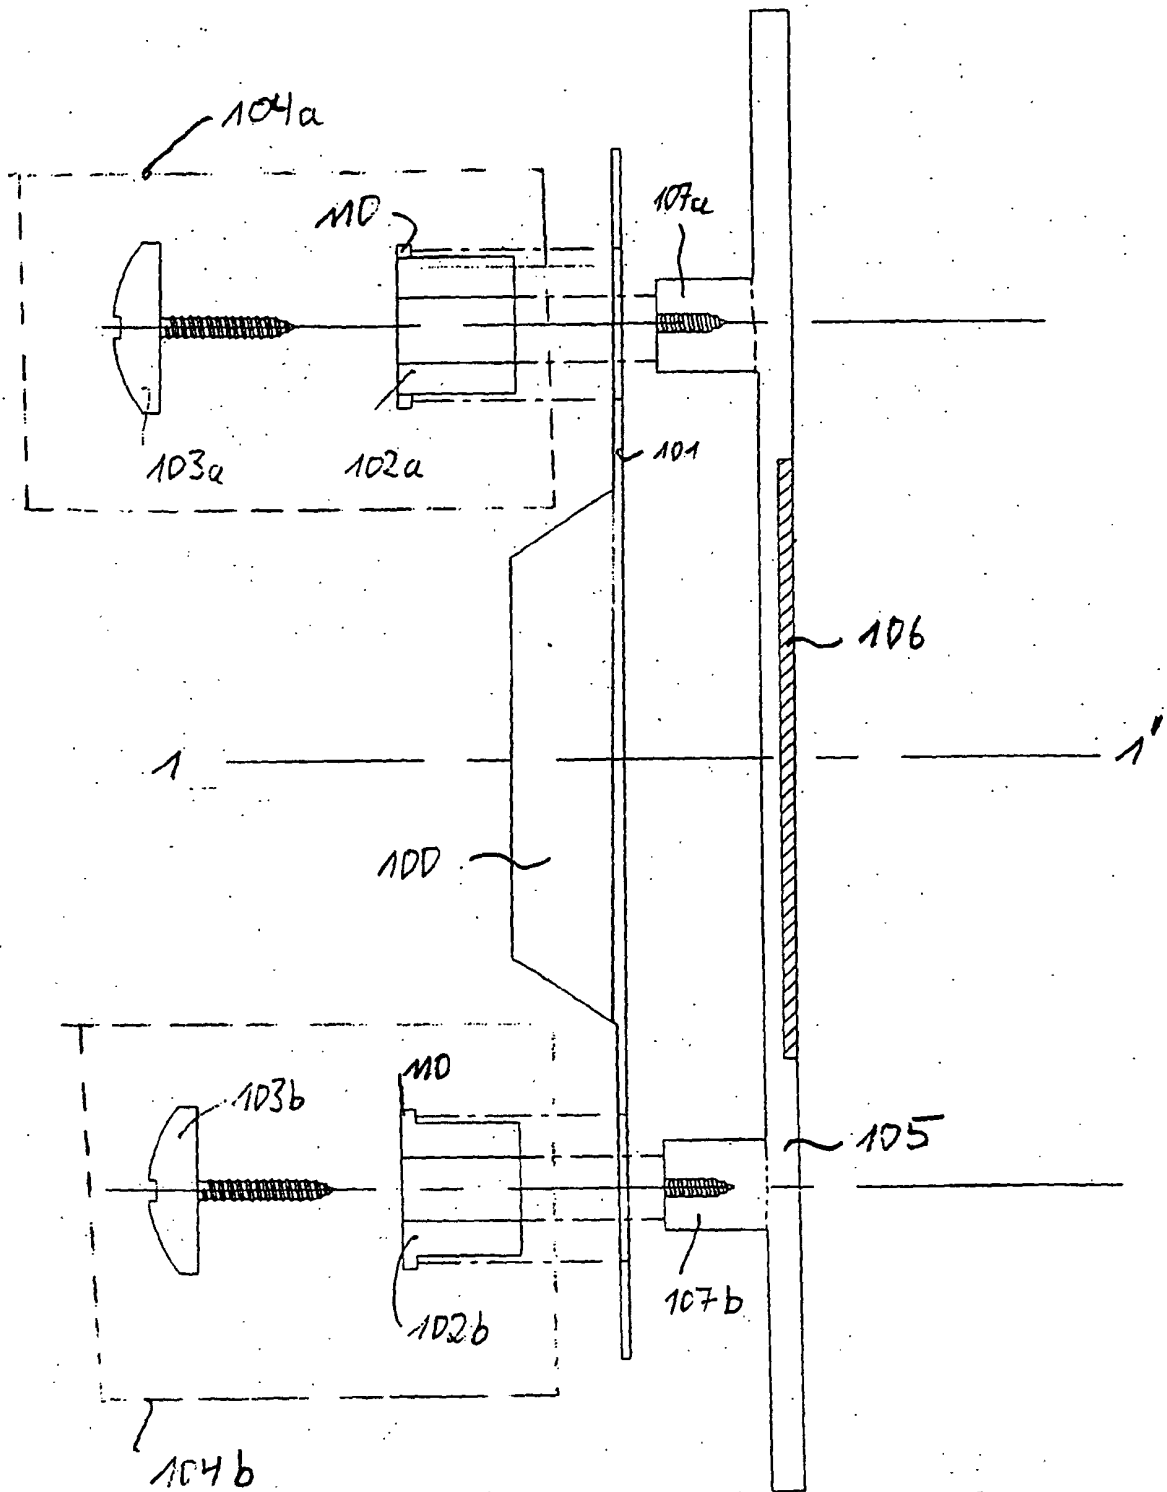


Fig. 1

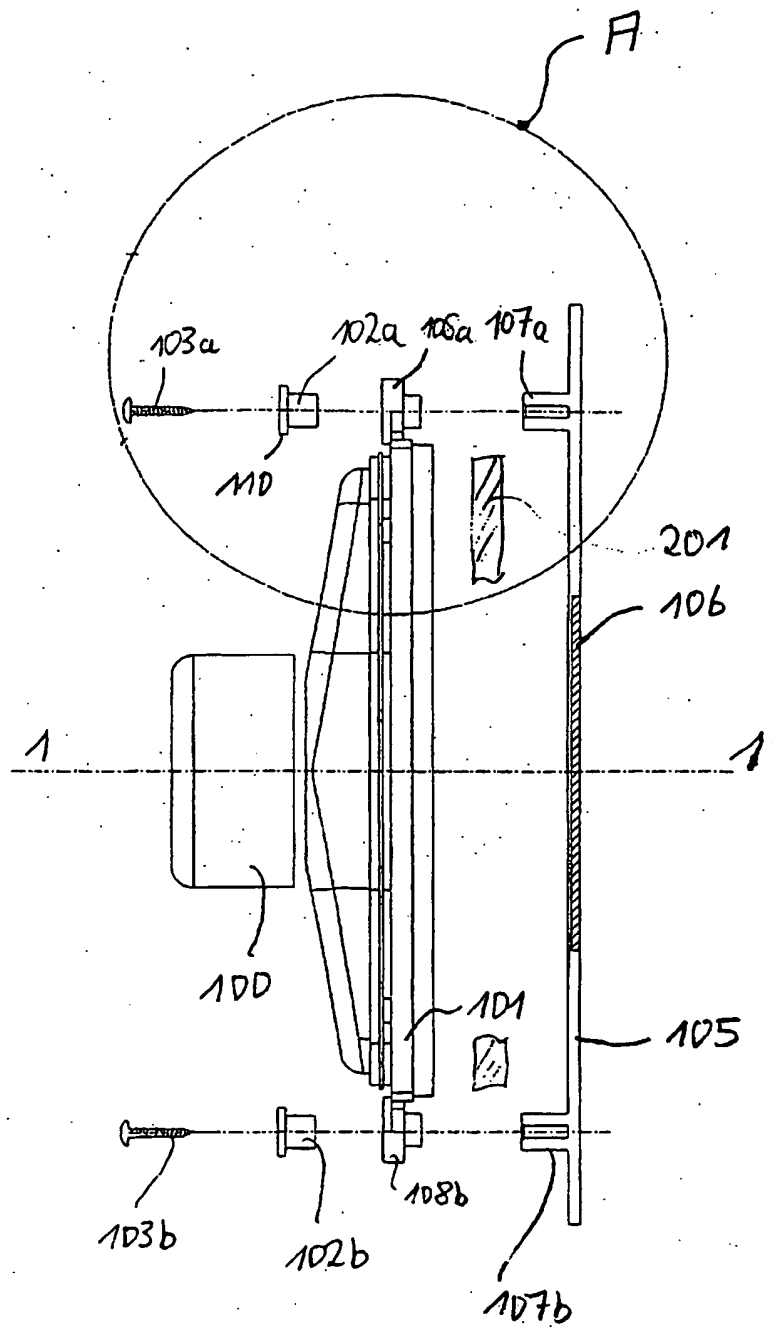


Fig. 2

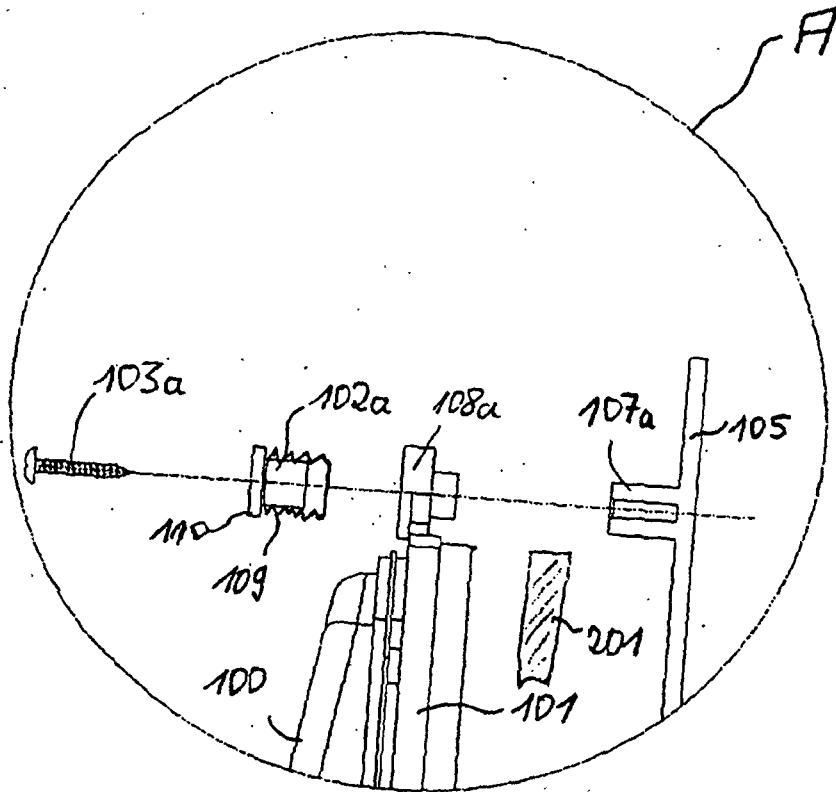


Fig. 3

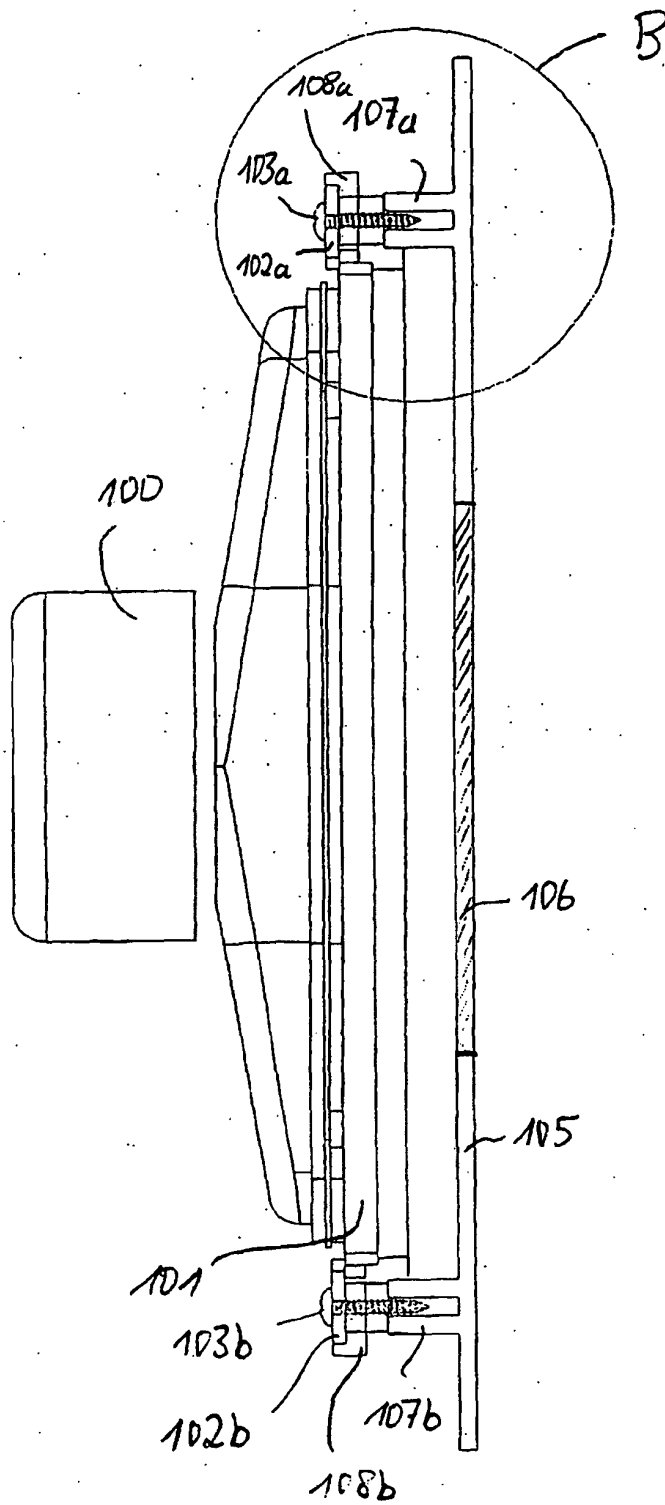


Fig. 4

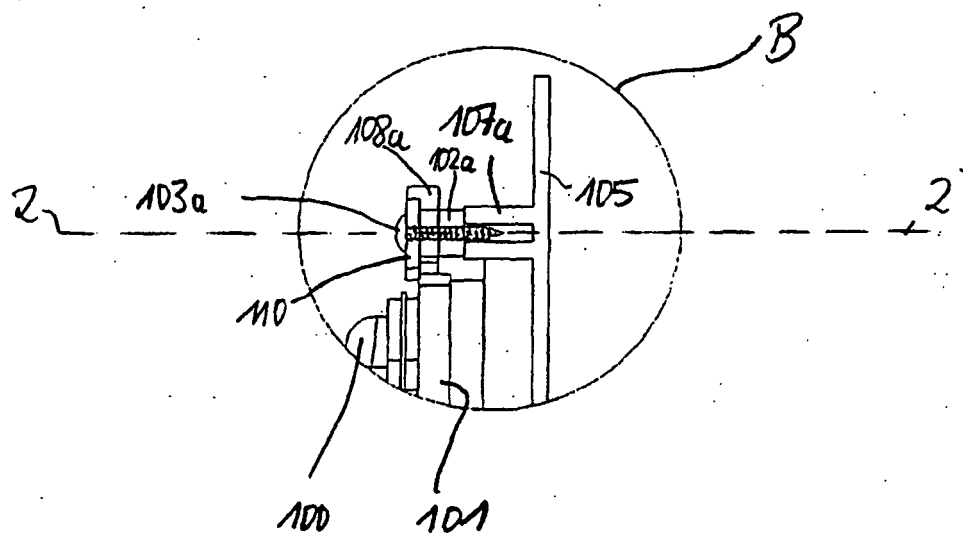


Fig. 5

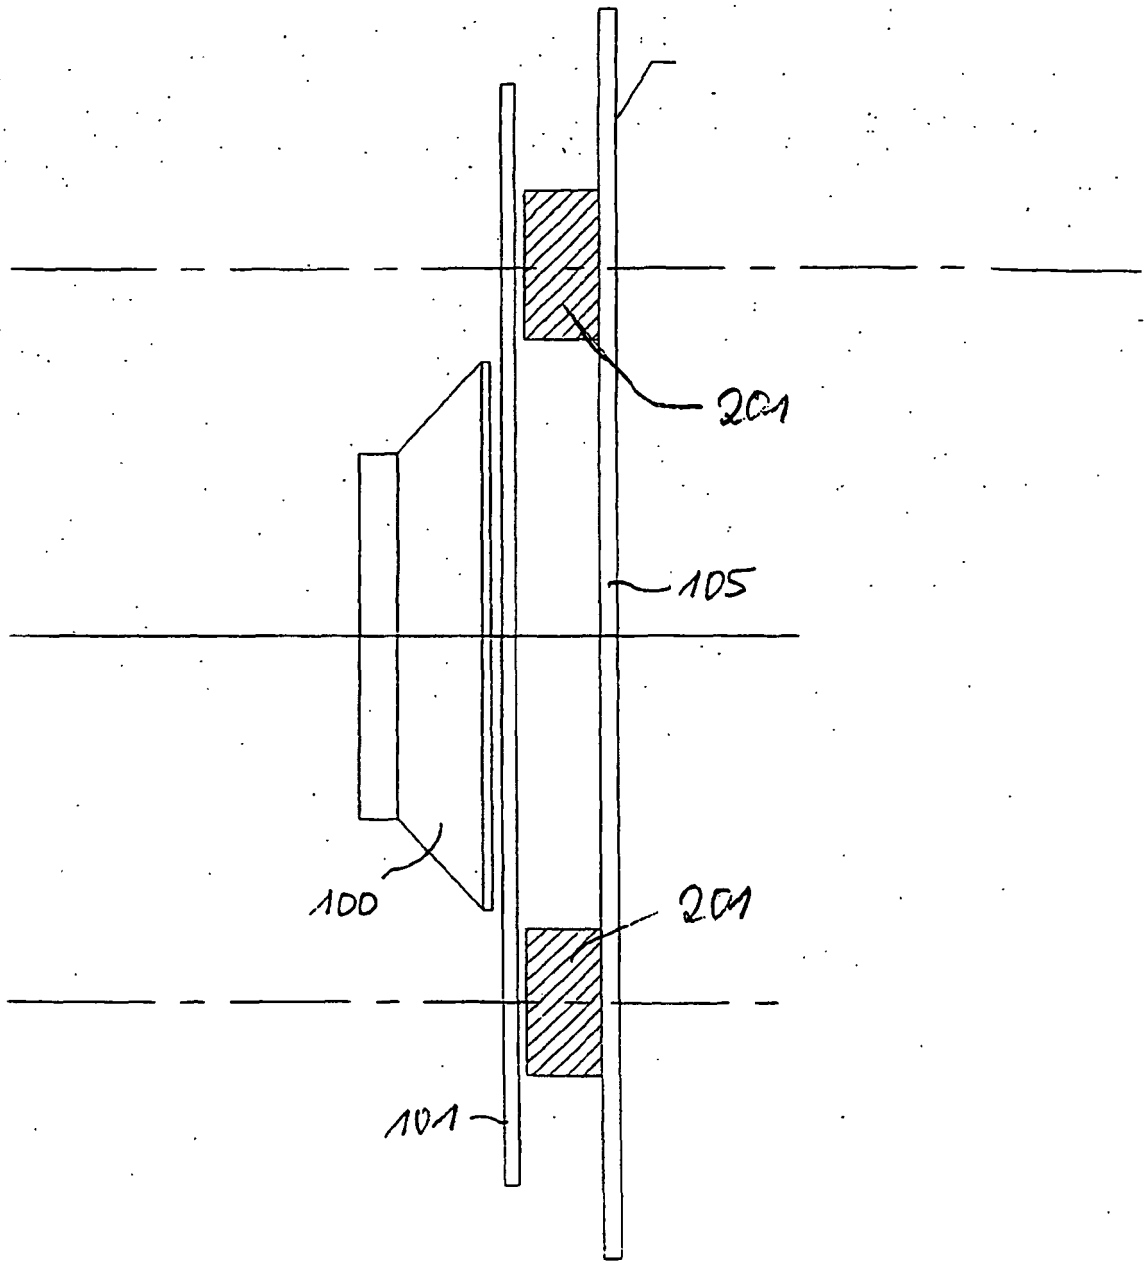


Fig. 6
(Prior Art)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4651218 A [0013] [0014]
- WO 9841014 A [0015] [0019]