



(19) **United States**

(12) **Patent Application Publication**
Stroup

(10) **Pub. No.: US 2004/0121481 A1**

(43) **Pub. Date: Jun. 24, 2004**

(54) **FLUID-TRANSFER COLLECTION ASSEMBLY AND METHOD OF USING THE SAME**

Publication Classification

(51) **Int. Cl.⁷ G01N 21/03**

(52) **U.S. Cl. 436/165**

(76) **Inventor: David Karl Stroup, El Cajon, CA (US)**

Correspondence Address:
PROCOPIO, CORY, HARGREAVES & SAVITCH LLP
530 B STREET
SUITE 2100
SAN DIEGO, CA 92101 (US)

(57) **ABSTRACT**


A method of using a fluid-transfer collection assembly includes providing a fluid-transfer collection assembly including an inlet for receiving one or more fluids, the inlet including an inlet check valve, an outlet including an outlet check valve, a test media, and a depressable, flexible bulb pump located between the inlet and the outlet and including an interior; depressing and releasing the bulb pump to draw one or more fluids into the interior of the bulb pump through the inlet check valve; and depressing the bulb pump again to impart a positive pressure in the interior of the bulb pump to cause one or more fluids in the interior of the bulb pump to exit the interior of the bulb pump through the outlet check valve and be transferred to the test media.

(21) **Appl. No.: 10/731,837**

(22) **Filed: Dec. 9, 2003**

Related U.S. Application Data

(63) **Continuation-in-part of application No. 10/113,456, filed on Mar. 28, 2002, now Pat. No. 6,660,527.**

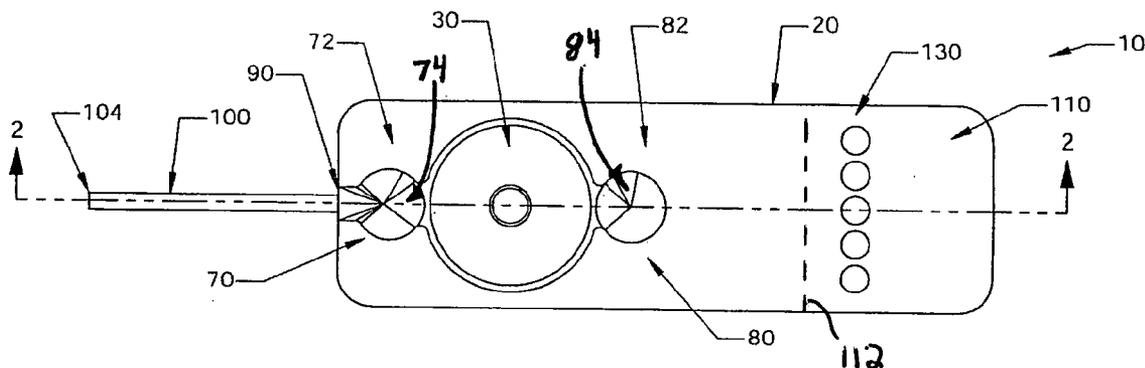

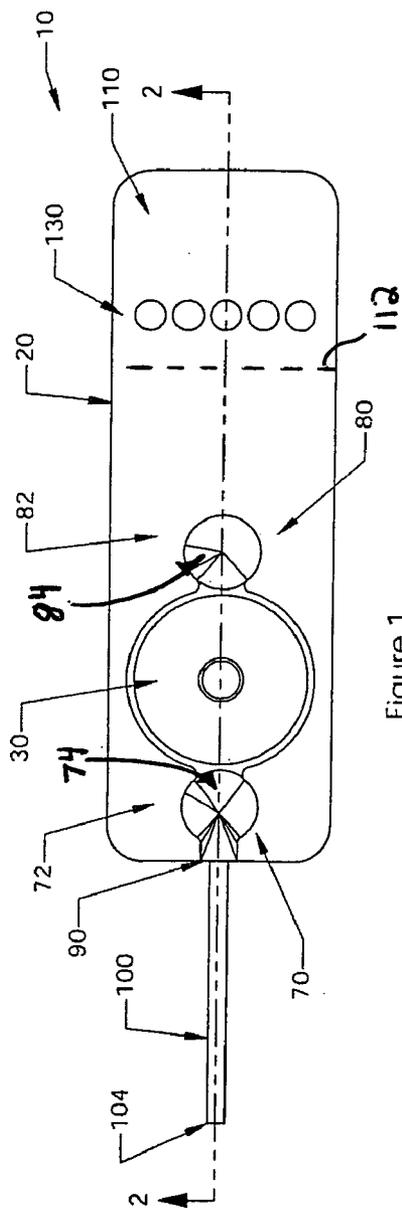


Figure 1

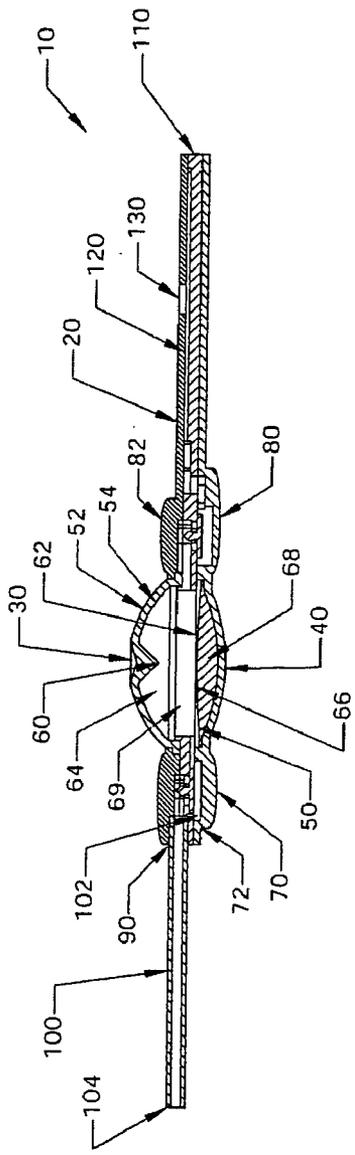


Figure 2

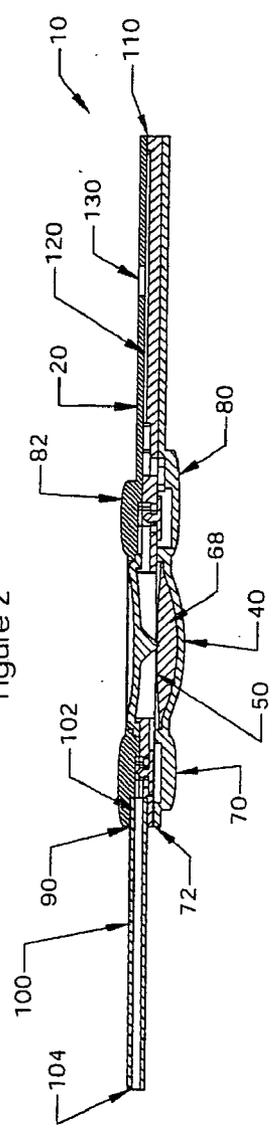


Figure 3

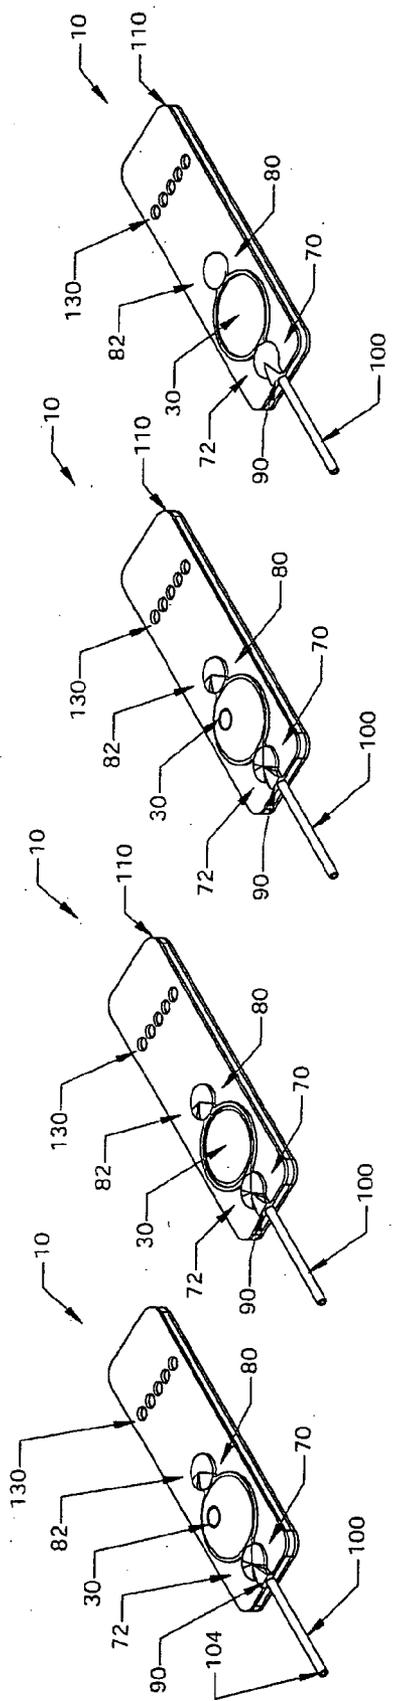


Figure 4A

Figure 4B

Figure 4C

Figure 4D

FLUID-TRANSFER COLLECTION ASSEMBLY AND METHOD OF USING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation-in-part application of U.S. application Ser. No. 10/113,456, filed Mar. 28, 2002, issued as U.S. Pat. No. 6,660,527 on Dec. 9, 2003.

FIELD OF THE INVENTION

[0002] The present invention is, in general, in the field of fluid-transfer collection assemblies, and, in particular, in the field of fluid transfer and mixing collection assemblies.

BACKGROUND OF THE INVENTION

[0003] Collection kits used for testing one or more analytes of a sample include multiple separate components such as a pipettes, collection tubes, vials or ampoules containing needed diluents or reagents, and test media devices. Because these collection kits have so many separate pieces, in most cases, use of such collection kits has been limited to a laboratory. Simple tests may be performed outside of the laboratory using only test media devices, but these test media devices are limited as to the types of tests that can be performed. More elaborate tests require diluents, pipettes, collection tubes, etc., and are difficult and awkward to perform outside of the laboratory.

[0004] Accordingly, a need exists for a simple fluid transfer and mixing collection assembly that does not include numerous separate pieces, is easy to use, can be used for multiple different types of tests and can be used in and outside a laboratory.

SUMMARY OF THE INVENTION

[0005] Accordingly, an aspect of the invention involves a fluid transfer and mixing collection assembly. The collection assembly includes a base, a test media carried by the base, an inlet for receiving a first fluid, the inlet including an inlet check valve, an outlet including an outlet check valve, a bladder carried by the base between the inlet and the outlet and including an interior with a second fluid therein, and a depressable, flexible member carried by the base between the inlet and the outlet and including an interior. A membrane separates the interior of the bladder from the interior of the flexible member. The flexible member includes an exterior surface, an interior surface, and a pointed member extending from the interior surface of the flexible member. The flexible member is depressable to cause the pointed member to rupture the membrane, releasable to draw the first fluid into the interior of the flexible member through the inlet check valve to mix with the second fluid, and depressable again to pump the mixed first and second fluids out of the interior of the flexible member through the outlet check valve and be transferred to the test media.

[0006] Another aspect of the invention involves a method of using a fluid transfer and mixing collection assembly. The method includes providing a fluid transfer and mixing collection assembly including a base, a test media carried by the base, an inlet for receiving a first fluid, the inlet including an inlet check valve, an outlet including an outlet check valve, a bladder carried by the base between the inlet and the outlet and including an interior with a second fluid therein,

and a depressable, flexible member carried by the base between the inlet and the outlet, the flexible member including an interior, a membrane separating the interior of the bladder from the interior of the flexible member, the flexible member including an exterior surface, an interior surface, and a pointed member extending from the interior surface of the flexible member; depressing the flexible member to cause the pointed member to rupture the membrane; releasing the flexible member to draw the first fluid into the interior of the flexible member through the inlet check valve to mix with the second fluid; and depressing the flexible member to pump the mixed first fluid and second fluid out of the interior of the flexible member through the outlet check valve and be transferred to the test media.

[0007] A further aspect of the invention involves a fluid-transfer collection assembly. The collection assembly includes an inlet for receiving one or more fluids, the inlet including an inlet check valve, an outlet including an outlet check valve, a test media, and a depressable, flexible member located between the inlet and the outlet and including an interior. The flexible member is depressable to cause one or more fluids to exit the interior of the flexible member through the outlet check valve and be transferred to the test media and releasable to draw one or more fluids into the interior of the flexible member through the inlet check valve.

[0008] A still further aspect of the invention involves a method of using a fluid-transfer collection assembly. The method includes providing a fluid-transfer collection assembly including an inlet for receiving one or more fluids, the inlet including an inlet check valve, an outlet including an outlet check valve, a test media, and a depressable, flexible member located between the inlet and the outlet and including an interior; depressing and releasing the bulb pump to draw one or more fluids into the interior of the bulb pump through the inlet check valve; and depressing the bulb pump again to cause the one or more fluids in the interior of the bulb pump to exit the interior of the bulb pump through the outlet check valve and be transferred to the test media.

[0009] Further objects and advantages will be apparent to those skilled in the art after a review of the drawings and the detailed description of the preferred embodiments set forth below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] FIG. 1 is a top plan view of a fluid transfer and mixing collection assembly constructed in accordance with an embodiment of the invention.

[0011] FIG. 2 is a cross-sectional view of the fluid transfer and mixing collection assembly of FIG. 1 taken along line 2-2 of FIG. 1.

[0012] FIG. 3 is a cross-sectional view, similar to FIG. 2, of the fluid transfer and mixing collection assembly of FIG. 1 and illustrates a flexible member of the assembly in a depressed condition and a bladder of the assembly in a ruptured condition.

[0013] FIGS. 4A-4D illustrate an exemplary method of using the fluid transfer and mixing collection assembly of FIG. 1.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0014] With reference to FIGS. 1-4, an embodiment of a fluid transfer and mixing collection assembly 10, and

method of using the same will now be described. Further below, the collection assembly **10** will be described as an optical assay test device in an optical assay test method; however, the collection assembly **10** may be used in other devices, processes, and applications where mixing of two or more fluids and/or delivery of one or more fluids to a collection area is desired.

[0015] The collection assembly **10** includes a substantially flat, rectangular, plastic base **20** that carries a bulb pump **30** and a reagent bladder **40** separated by a pierceable membrane **50**.

[0016] The bulb pump **30** may be a flexible, depressable, domed, elastic member having an exterior surface **52** and an interior surface **54**. A spike **60** extends downward from the interior surface **54** towards the pierceable membrane **50**. The spike **60** may be formed along with the bulb pump **30** or may be a separate element that is fixed to the interior surface **54** of the bulb pump **30** (e.g., a stylet or other pointed member). Although the bulb pump **30** is shown as being located on an upper surface of the base **20** and oriented in an upward direction, in alternative embodiments, the bulb pump **30** may be located at other locations on the base **20** and may be oriented in one or more of an upward, a downward, a lateral, a forward, and a rearward direction with respect to the base **20**. Similarly, the bladder **40** may be located at other locations on the base **20** and oriented differently.

[0017] The pierceable membrane **50** is a thin, rupturable membrane and includes an upper surface **62** exposed to an interior **64** of the bulb pump **30** and a lower surface **66** exposed to an interior **68** of the bladder **40**.

[0018] In the embodiment shown in the FIG. 2, the fluid in the interior **64** of the bulb pump **30** is air and the fluid in the interior **68** of the bladder **40** is one or more chemical reagents or diluents. In alternative embodiments, one or more different types of fluids may be used in the bulb pump **30** and the bladder **40**.

[0019] A fluid path **69** is located directly above the upper surface **62** of the pierceable membrane **50** between an inlet check valve **70** of an inlet **72** and an outlet check valve **80** of an outlet **82**. The inlet **72** may include an inlet port **90** that communicates with a sample tube **100**. The sample tube **100** may include a proximal end **102** and a distal end **104**. The outlet check valve **80** communicates with a test media **110** via one or more fluid paths **120**. The check valves **70**, **80** include locking mechanisms and unlocking mechanisms **74**, **84** that are lockable/unlockable to prevent/allow sample from passing through the check valves **70**, **80**. The locking mechanisms and unlocking mechanisms **74**, **84** may include flexible upper dome members of the check valves **70**, **80** that may be pressed downward into a dimpled configuration (and remain in this position) in contact with a check valve mechanism to prevent the check valve from opening, effectively locking the check valves **70**, **80**, and moved upward out of contact with the check valve mechanism to a domed configuration (and remain in this position) to open the check valves **70**, **80** for normal use. Other locking and unlocking mechanisms may be used for the valves **70**, **80** such as, but not limited to, folding elements and retracting elements. The locking mechanisms for the valves **70**, **80** may be actuated to lock a sample in the bulb pump **30** and prevent the sample from being transferred out of the bulb pump so that the assembly **10** (with sample in bulb pump **30**) may be sent to

a lab where a more extensive test on the locked-in sample may be performed. At the lab, the unlocking mechanisms may be actuated to unlock the check valves **70**, **80** so that the sample in the bulb pump **30** may be transferred out of the bulb pump **30** through the check valve **80** for a more extensive test to be performed on the sample.

[0020] The test media **110** may include visual indicia **130** to visually indicate the presence or absence of a target analyte or other target object(s). The test media **110** may include one or more of the following: base strip(s), sample pad(s), conjugate pad(s), membrane(s), and absorbent pad(s). The test media **110** may be removable/replaceable with respect to the base **20** on an upper and/or lower side of the base **20** so that different test media **110** may be used with the collection assembly **10** for performing multiple tests (e.g., multiple different tests and/or redundant tests) using the same sample. The replaceable test media **110** may be separated from the base **20** and joined to the base near line **112**.

[0021] With reference additionally to FIGS. 4A-4D, the collection assembly **10** will now be described in use as an optical assay test device in an exemplary optical assay method of use. The collection assembly **10** and method of use may be used in applications such as, but not by way of limitation, drug screening, chemical analysis, crime/accident scene investigations, ground water testing (EPA), and livestock testing.

[0022] With reference to FIGS. 2 and 4A, the distal end **104** of the sample tube **100** may be put in communication with a fluid sample. In an embodiment of the assembly **10** where the sample tube **100** is retractable, foldable, pivotal, the sample tube may be moved to the position shown in FIGS. 1-4 so that the sample tube **100** may be put in communication with a fluid sample. The sample may be any fluid medium such as, but not by way of limitation, a gas, a liquid, a suspension, an extracted or dissolved sample, or a supercritical fluid, as long as some flow properties exist in the sample. The sample may include one or more target analytes of interest for detection. Example analytes include, but not by way of limitation, antigens, antibodies, receptors, ligands, chelates, proteins, enzymes, nucleic acids, DNA, RNA, pesticides, herbicides, inorganic or organic compounds or any material for which a specific binding reagent may be found.

[0023] With reference to FIGS. 3 and 4B, the bulb **30** is depressed, causing the spike **60** to pierce the membrane **50** of the reagent bladder **40** and the bladder **40** to rupture.

[0024] With reference to FIG. 3C, release of the bulb **30** creates a vacuum force in the bulb **30**, causing the sample to flow from the sample reservoir, through the tube **100** and the inlet check valve **70**, into the interior **64** of the bulb **30**, where the sample mixes and reacts with the reagent.

[0025] With reference to FIG. 4D, the bulb **30** is depressed again, causing the resulting reaction fluid to flow via the fluid path **69** out of the bulb **30** and bladder **40**, through the outlet check valve **80** and the one or more fluid paths **120**, and to the test media **110**. The visual indicia **130** of the test media **110** may indicate the presence or absence of a target analyte for the optical assay method.

[0026] Although the collection assembly **10** has been described as including a bladder **40** that may be ruptured to

mix a fluid in the bladder **40** with a sample fluid, in an alternative embodiment, the collection assembly **10** may not include the bladder **40**, the pierceable membrane **50**, and spike **60**. In such an embodiment, the bulb pump **30** may be depressed and released, causing the sample fluid to be drawn through the sample tube **100** and the inlet check valve **70**, into the interior **64** of the bulb pump **30**. Depressing the bulb pump **30** again causes sample fluid to exit the interior **64** of the bulb pump **30** via the outlet check valve **80** and be transferred through the one or more fluid paths **120** to the test media **110**. Thus, in this embodiment, the assembly **10** functions as a fluid-transfer collection assembly instead of a fluid transfer and mixing collection assembly.

[0027] The locking mechanisms of the check valves **70**, **80** may be actuated to prevent sample from passing through the check valves **70**, **80**. The check valves **70**, **80** may be locked, for example, but not by way of limitation, when the assembly **10** is transferred to a lab or other location for further testing on the sample in the bulb **30** and when different test media **110** are added to the assembly for performing different tests on the sample in the bulb **30**. The tube **100** may be retracted, pivoted, folded, or otherwise moved to an-out-of-the-way position prior to transfer of the assembly **10** to the lab or other location. After the assembly **10** with sample is received by the lab (or a different test media **110** has been added to the assembly **10**), the unlocking mechanisms may be actuated allowing the check valves **70**, **80** to function normally so that sample may be transferred out of the bulb **30** by pressing on the bulb **30**. Further testing is then performed on the sample.

[0028] Numerous features, implementations, and embodiments of the collection assembly **10** will now be described. The collection assembly **10** may be used more than once to perform the same test, different tests, or may be disposed of after single use. Different collection assemblies **10** may be used to perform different tests. The collection assembly **10** may be used to test for one or more analytes. The collection assembly **10** may be held and operated with a single hand of a user. In the embodiment of the collection assembly **10** shown in FIGS. 1-3, the user may operate the bulb pump **30** with a thumb or other digit of the same hand used to hold the collection assembly **10**. In an alternative embodiment, the collection assembly **10** may have more than one member (e.g., bulb pump **30**) that is actuatable using any of the digits of the hand used to hold the collection assembly. For example, a first bulb pump **30**/bladder **40** combination may be used to transfer a sample fluid into the first bulb pump, mix the sample fluid with a first reagent/diluent, and transfer the combined sample fluid and first reagent/diluent out of the first bulb pump. A second bulb pump **30**/bladder **40** combination may be used to transfer the combined sample fluid and first reagent/diluent into the second bulb pump, mix this with a second reagent/diluent, and transfer this mixture to a test media for testing. The collection assembly **10** is especially advantageous in that the multiple transfer and mixing steps can all be done with a single hand of the user.

[0029] Although the embodiment of the collection assembly **10** shown in FIGS. 1-3 includes a single bladder **40**, in an alternative embodiment, the collection assembly **10** may have multiple bladders **40**, one or more of which includes a rupturable membrane **50**. The bladders **40** may contain the same or different reagent(s)/diluent(s). Further, the collection assembly **10** may have one or more bladders **40** con-

taining one or more reagent(s)/diluent(s) and/or one or more separate reagent(s)/diluent(s) may be used with collection assembly **10** during the test process. In a still further embodiment of the collection assembly **10**, the collection assembly **10** may not have any bladder **40**. In such an embodiment, separate diluent(s)/reagent(s) may be used with collection assembly **10** during the test process or no diluent(s)/reagent(s) may be used with collection assembly **10** during the test process, e.g., the sample fluid may be the only fluid transferred and collected by the assembly **10**.

[0030] In one or more embodiments of the collection assembly **10**, the sample tube **100** may have one or more of the following: the sample tube **100** may be fixed to the inlet **72**, the sample tube **100** may be retractable, the sample tube **100** may not be retractable, the sample tube **100** may lock to the inlet **72**, the sample tube **100** may not lock **72** to the inlet **72**, the sample tube **100** may detachably connect to the inlet **72**, the sample tube may include or be replaced with one or more wicks, sponges, open-cell foams, porous materials, or other absorbent materials, the sample tube **100** may fold or pivot with respect to the base **20** from the position shown in FIGS. 1-4 to an out-of-the-way position (e.g., in a groove or recess on the bottom of the base **20**), and the sample tube **100** may be integrated with the base **20**.

[0031] In a further embodiment, the collection assembly **10** may include one or both of the inlet check valve **70** and the outlet check valve **80**. Further, one or both of the inlet check valve **70** and the outlet check valve **80** may be replaced with one or more different types of valves. Still further, the collection assembly **10** may have a number of valves other than that shown in FIGS. 1-3, the number of valves depending on the number of bulb pumps **30**.

[0032] The assembly **10** is advantageous in that it can be gripped in one hand and by the simple action of pressing and releasing the bulb pump **30** with a digit of the same hand, fluid can be drawn into the bulb pump **30** through the check valve **70**. If the assembly **10** includes a rupturable bladder **40** with a different fluid and the bulb pump **30** includes a spike, pressing and releasing the bulb pump **30** can cause the bladder to rupture and the fluids to mix in the bulb pump **30**. Pressing the bulb pump **30** again pumps the fluid out of the bulb pump **30** through the outlet check valve **80**. In an exemplary embodiment of the assembly **10**, the fluid pumped out of the bulb pump **30** can be collected on a test media to test the fluid for the presence or absence of a target object in the fluid. Because the unit is so simple to use, the assembly **10** may be used by the user for testing in the field, in the lab, and in the home for a wide variety of applications.

[0033] It will be readily apparent to those skilled in the art that still further changes and modifications in the actual concepts described herein can readily be made without departing from the spirit and scope of the invention as defined by the following claims.

What is claimed is:

1. A method of using a fluid-transfer collection assembly, comprising:

providing a fluid-transfer collection assembly including an inlet for receiving one or more fluids, the inlet including an inlet check valve, an outlet including an outlet check valve, a test media, and a depressable,

flexible bulb pump located between the inlet and the outlet and including an interior;

depressing and releasing the bulb pump to draw one or more fluids into the interior of the bulb pump through the inlet check valve;

depressing the bulb pump again to impart a positive pressure in the interior of the bulb pump to cause one or more fluids in the interior of the bulb pump to exit the interior of the bulb pump through the outlet check valve and be transferred to the test media.

2. The method of claim 1, wherein the test media is removable with respect to the fluid-transfer collection assembly, and the method further includes removing the test media from the fluid-transfer collection assembly, replacing the test media with a replacement test media, and depressing the bulb pump again to impart a positive pressure in the interior of the bulb pump to cause one or more fluids in the interior of the bulb pump to exit the interior of the bulb pump through the outlet check valve and be transferred to the replacement test media.

3. The method of claim 1, wherein the fluid-transfer collection assembly includes a sample tube movable between an out-of-the-way position and deployed position, and the method further includes deploying the sample tube from the out-of-the-way position to the deployed position, and one or more fluids are drawn into the interior of the bulb pump through the deployed sample tube.

4. The method of claim 1, wherein the inlet includes a locking mechanism to lock the inlet check valve in a closed condition and the outlet includes a locking mechanism to lock the outlet check valve in a closed condition, and the method further includes locking the inlet check valve and the outlet check valve with the locking mechanisms to prevent fluid flow through the check valves.

5. The method of claim 4, further including transferring the fluid-transfer collection assembly to a lab for further processing of one or more fluids therein after locking the inlet check valve and the outlet check valve with the locking mechanisms.

6. The method of claim 4, wherein the test media is removable with respect to the fluid-transfer collection assembly, and the method further includes removing the test media from the fluid-transfer collection assembly and replacing the test media with a replacement test media after locking the inlet check valve and the outlet check valve with the locking mechanisms.

7. The method of claim 4, wherein the inlet includes an unlocking mechanism to unlock the inlet check valve from the closed condition and the outlet includes an unlocking

mechanism to unlock the outlet check valve from the closed condition, and the method further includes unlocking the inlet check valve and the outlet check valve with the unlocking mechanisms to allow fluid flow through the check valves.

8. The method of claim 1, wherein the fluid-transfer collection assembly further includes a sample tube having a proximal end connected to the inlet and a distal end, and the method further includes communicating the distal end of the sample tube with one or more fluids to draw one or more fluids into the interior of the bulb pump.

9. The method of claim 1, wherein the inlet check valve only allows fluid into the bulb pump and the outlet check valve only allows fluid out of the bulb pump.

10. The method of claim 1, wherein the fluid-transfer collection assembly further includes a base that carries the bulb pump, inlet check valve, outlet check valve, and test media, the test media visually indicating the presence or absence of one or more target objects in the one or more fluids, and the method further includes transferring the one or more fluids from the interior of the bulb pump to the test media to determine the presence or absence of one or more target objects.

11. The method of claim 10, wherein the fluid-transfer collection assembly further includes a bladder carried by the base between the inlet and the outlet and including an interior with a bladder fluid therein, a membrane separating the interior of the bladder from the interior of the bulb pump, the bulb pump including an exterior surface, an interior surface, and a pointed member extending from the interior surface of the flexible member, and depressing and releasing the bulb pump to draw one or more fluids into the interior of the bulb pump through the inlet check valve includes depressing the bulb pump to cause the pointed member to rupture the membrane and releasing the bulb pump to draw an external fluid into the interior of the bulb pump through the inlet check valve to mix with the bladder fluid, and depressing the bulb pump again includes depressing the bulb pump to impart a positive pressure in the interior of the bulb pump to cause mixed first fluid and second fluid to be pumped out of the interior of the bulb pump through the outlet check valve and be transferred to the test media.

12. The method of claim 1, wherein the method is an assay test method, the external fluid is a sample fluid including an analyte of interest for assay testing, the bladder fluid is a reagent, and the test media visually indicates the presence or absence of an analyte of interest.

* * * * *