

(19)



(11)

EP 3 128 068 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.04.2019 Bulletin 2019/15

(51) Int Cl.:
D06F 39/14 ^(2006.01) *D06F 23/04* ^(2006.01)

(21) Application number: **16166991.6**

(22) Date of filing: **26.04.2016**

(54) **WASHING MACHINE**

WASCHMASCHINE

MACHINE À LAVER

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **04.08.2015 CN 201510470997**
04.08.2015 CN 201520578513 U

(43) Date of publication of application:
08.02.2017 Bulletin 2017/06

(73) Proprietor: **WUXI LITTLE SWAN CO., LTD.**
New District
Wuxi Jiangsu
214028 (CN)

(72) Inventors:
• **YAO, Jiawang**
214028 Wuxi (CN)
• **YU, Detao**
214028 Wuxi (CN)
• **XU, Pengcheng**
214028 Wuxi (CN)

(74) Representative: **advotec.**
Patent- und Rechtsanwälte
Widenmayerstrasse 4
80538 München (DE)

(56) References cited:
EP-A1- 1 949 843 WO-A1-2015/123933
US-A- 5 724 837 US-A- 5 870 787
US-A- 5 903 120

EP 3 128 068 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD

[0001] The present invention relates to a washing machine.

BACKGROUND

[0002] For the first time, a brief electric door driven by a motor is provided by the present applicant in Chinese application No. 201520365984.3. Compared with manual door opening, electric door opening driven by the motor is an improvement which more meets the needs of the users.

[0003] In the brief electric door, a driving motor is mounted close to the center of the worktable and connected to a frame at a center of a window, a motor output shaft is fitted into a groove of the frame at the center of the window, and one damper is disposed at each of two ends of the window. In this solution, the driving motor is disposed at the center of the worktable, a motor portion and a reducer portion of the driving motor are disposed on two opposite sides of the whole driving motor respectively and occupy a lot of space of the worktable, which affects original space arrangement of other electric devices in the worktable, such as a detergent dispenser.

[0004] A US application (US5724837 A) discloses a clothes washer including a lid formed by a first member hinged to a housing of the clothes washer, and a second member hinged to the first member. The first and second members are folded together when the lid is opened, and are unfolded when the lid is closed. A motor-driven lid opening/closing mechanism is provided for opening and closing the lid. That mechanism includes a motor-driven rotary cam member mounted on the housing, and a following member fixed to the first member of the lid. During rotation in one direction, the cam member engages the following member to open the lid, and during rotation in the opposite direction, the cam member engages the following member to close the lid. When the lid is in the closed and open states, the cam member is disengaged from the following member to enable the lid to be manually opened and closed.

[0005] Another application (WO2015123933) discloses an opening/closing mechanism for a washing machine top cover and a washing machine, comprising a control apparatus, a drive apparatus (3), a clutch apparatus, and a speed-reducing apparatus (2), wherein a top cover (1) opens or closes under the drive of an output end (21) of the speed-reducing apparatus (2), an input end of the speed-reducing apparatus (2) is connected to the drive apparatus (3), the clutch apparatus and the drive apparatus (3) are both connected to the control apparatus, the clutch apparatus cooperates with the speed-reducing apparatus (2) and the drive apparatus (3), and under the control of the control apparatus, when power is connected, a transmission path between the drive apparatus (3)

and the top cover (1) is connected, and after disconnection, the transmission path between the drive apparatus (3) and the top cover (1) is disconnected. The present invention is provided with a clutch apparatus, and when an electric motor is disconnected, the clutch apparatus separates the electric motor and the speed-reducing apparatus (2), preventing the electric motor being driven to rotate when the top cover (1) is touched and opened, being easy and convenient, and not damaging the electric motor or causing the electric motor to rotate abnormally. The opening/closing mechanism of the present invention also has advantages such as occupying little space, being structurally compact, and having high stability in opening and closing the top cover.

SUMMARY

[0006] Embodiments of the present invention seek to solve at least one of the problems existing in the related art to at least some extent.

[0007] Accordingly, an object of the present invention is to provide a washing machine. An improved electric door opening structure is provided by the washing machine, which may at least solve the problem of effectively arranging the worktable space to some extent.

[0008] The washing machine according to embodiments of the present invention includes a cabinet having a worktable, the worktable defining a port for putting into and taking out of laundry; a cover disposed on a top of the cabinet and having a cover frame, the cover frame having a cover frame edge as a pivotable shaft for the cover; and a driving assembly including a driving motor, the driving assembly being configured to drive the cover to pivot about the cover frame edge. The worktable defines a receiving space in at least one corner thereof for receiving the driving motor, the worktable has a corner sidewall at the at least one corner, the corner sidewall of the worktable is adjacent to the cover frame, a left side or a right side of the driving motor is adapted to abut against the corner sidewall of the worktable. The driving assembly further comprises a one-way bearing, the cover frame has a bearing mounting portion at an end of the cover frame edge, the one-way bearing defines a first end fixedly mounted with the bearing mounting portion of the cover and a second end opposite to the first end, the second end of the one-way bearing being connected to the driving motor, the driving motor is configured to drive the cover via the one-way bearing so as to make the cover pivot about the cover frame edge.

[0009] With the washing machine according to embodiments of the present invention, it is possible to realize a function of the electric door opening and improve an automation degree of the washing machine, and further improve experiences of users. Moreover, by disposing the driving motor at the corner of the worktable, the problem of the arrangement of the driving motor can be solved, and it is possible to further make the space arrangement of the worktable appropriate, and to reduce occupied

space of the driving motor to facilitate the arrangement of other components (e.g., a detergent dispenser).

[0010] In addition, the washing machine according to embodiments of the present invention may further have additional characteristics as follows:

In some embodiments of the present invention, the one-way bearing includes an inner shaft portion connected to the driving motor and an outer ring portion fixedly mounted within the bearing mounting portion of the cover.

[0011] In some embodiments of the present invention, the one-way bearing is received in the bearing mounting portion and the inner shaft portion of the one-way bearing is configured to extend out from an open end of the bearing mounting portion.

[0012] In some embodiments of the present invention, the driving motor defines a driving shaft hole, at least a part of the inner shaft portion is inserted into the driving shaft hole.

[0013] In some embodiments of the present invention, the driving motor is provided with an upwardly-extending ear, the driving shaft hole is formed in the ear.

[0014] In some embodiments of the present invention, the ear is configured to abut against an end surface of the end of the bearing mounting portion.

[0015] In some embodiments of the present invention, the driving motor is a reduction motor.

[0016] In some embodiments of the present invention, the driving motor includes a motor portion and a reducer portion, which are disposed at a same side of the driving motor.

[0017] In some embodiments of the present invention, the motor portion of the driving motor is configured to abut against the corner sidewall of the worktable.

[0018] Additional aspects and advantages of embodiments of present invention will be given in part in the following descriptions, become apparent in part from the following descriptions, or be learned from the practice of the embodiments of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] These and other aspects and advantages of embodiments of the present invention will become apparent and more readily appreciated from the following descriptions made with reference to the accompanying drawings, in which:

Fig. 1 is a schematic view of a washing machine according to an embodiment of the present invention, in which a port is closed by a cover;

Fig. 2 is a perspective view of a washing machine according to an embodiment of the present invention, in which a cover closes a port;

Fig. 3 is a perspective view of a washing machine according to an embodiment of the present invention, in which a cover opens a port;

Fig. 4 is a schematic assembly view of a cover, a driving motor and a bearing assembly of a washing machine according to an embodiment of the present invention;

Fig. 5 is an exploded view of a cover, a driving motor and a bearing assembly of a washing machine according to an embodiment of the present invention;

Fig. 6 is a schematic view of a driving motor and a bearing assembly of a washing machine according to an embodiment of the present invention;

Fig. 7 is a schematic view of a worktable with a driving motor of a washing machine according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0020] Reference will be made in detail to embodiments of the present invention. The same or similar elements and the elements having same or similar functions are denoted by like reference numerals throughout the descriptions. The embodiments described herein with reference to drawings are explanatory, illustrative, and used to generally understand the present invention. The embodiments shall not be construed to limit the present invention.

[0021] In the specification, unless specified or limited otherwise, relative terms such as "central", "longitudinal", "lateral", "front", "rear", "right", "left", "inner", "outer", "lower", "upper", "horizontal", "vertical", "above", "below", "up", "top", "bottom", "inner", "outer", "clockwise", "anti-clockwise" as well as derivative thereof (e.g., "horizontally", "downwardly", "upwardly", etc.) should be construed to refer to the orientation as then described or as shown in the drawings under discussion. These relative terms are for convenience of description and do not require that the present invention be constructed or operated in a particular orientation. In addition, terms such as "first" and "second" are used herein for purposes of description and are not intended to indicate or imply relative importance or significance. Thus, features limited by "first" and "second" are intended to indicate or imply including one or more than one these features. In the description of the present invention, "a plurality of" relates to two or more than two.

[0022] In the description of the present invention, unless specified or limited otherwise, it should be noted that, terms "mounted," "connected" "coupled" and "fastened" may be understood broadly, such as permanent connection or detachable connection, electronic connection or mechanical connection, direct connection or indirect connection via intermediary, inner communication or inter reaction between two elements. Those having ordinary skills in the art should understand the specific meanings in the present invention according to specific situations.

[0023] In the description of the present invention, a structure in which a first feature is "on" a second feature may include an embodiment in which the first feature directly contacts the second feature, and may also include an embodiment in which an additional feature is formed between the first feature and the second feature so that the first feature does not directly contact the second feature, unless otherwise specified. Furthermore, a first feature "on," "above," or "above" a second feature may include an embodiment in which the first feature is right "on," "above," or "above" the second feature, and may also include an embodiment in which the first feature is not right "on," "above," or "above" the second feature, or just means that the first feature has a sea level elevation larger than the sea level elevation of the second feature. While first feature "beneath," "below," or "on bottom of" a second feature may include an embodiment in which the first feature is right "beneath," "below," or "on bottom of" the second feature, and may also include an embodiment in which the first feature is not right "beneath," "below," or "on bottom of" the second feature, or just means that the first feature has a sea level elevation smaller than the sea level elevation of the second feature.

[0024] A washing machine 100 according to embodiments of the present invention will be described below with reference to Fig. 1 to Fig. 7.

[0025] The washing machine 100 according to embodiments of the present invention includes: a cabinet 10, a cover 20 and a driving assembly 50. As shown in Fig. 3, the cabinet 10 has a worktable 13 which defines a port 11 for putting into and taking out of laundry. The cover 20 is disposed on a top of the cabinet 10 and has a cover frame 21. The cover frame 21 has a cover frame edge as a pivotable shaft for the cover 20. The driving assembly 50 includes a driving motor 30, and is configured to drive the cover 20 to pivot about the cover frame edge. That is, the driving assembly 50 may drive the cover 20 to rotate around the cover frame edge to open or close the port 11. It should be understood that, by providing the driving assembly 50, the washing machine 100 may realize a function of the electric door opening, so as to improve an automation degree of the washing machine 100, and further improve experiences of users.

[0026] As shown in Fig. 1 and Fig. 2, the cover 20 can close the port 11. When the washing machine 100 is working, the cover 20 closes the port 11 to ensure that the washing machine works normally. Alternatively, when the washing machine 100 is not working, the cover 20 closes the port 11 to prevent foreign objects from entering into the interior of the washing machine 100 via the port 11, so as to protect the washing machine 100 to at least some extent. As shown in Fig. 3, the cover 20 can open the port 11, after clothes have been washed by the washing machine 100, the cover 20 may open the port 11, so as to take out the clothes for drying.

[0027] Specifically, as shown in Fig. 7, a receiving space for receiving the driving motor 30 is formed in at least one corner of the worktable 13, and the worktable

13 has a corner sidewall at the at least one corner, the corner sidewall of the worktable 13 is adjacent to the cover frame 21, and a left side or a right side of the driving motor 30 is adapted to abut against the corner sidewall of the worktable 13. Specifically, as shown in Fig. 4, when the driving motor 30 is mounted at a left side of the cover 20, the left side of the driving motor 30 is abutted against the corner sidewall of the worktable 13. When the driving motor 30 is mounted at a right side of the cover 20, the right side of the driving motor 30 is abutted against the corner sidewall of the worktable 13. That is, the driving motor 30 is disposed at the worktable 13 and the driving motor 30 is disposed at the corner of the worktable 13, and the driving motor 30 is close to the corner sidewall of the worktable 13 abutted on the cover frame 21, such that the driving motor 30 may drive the cover 20 to rotate around the cover frame 21. As shown in Fig. 7, the driving motor 30 can be disposed at a left-rear corner of the worktable 13, and the right side of the driving motor 30 is close to the corner sidewall of the worktable 13. It should be understood that, by disposing the driving motor 30 at the corner of the worktable 13, the problem of the arrangement of the driving motor 30 can be solved, and it is possible to further make the space arrangement of the worktable 13 appropriate, and to reduce occupied space of the driving motor 30 to facilitate the arrangement of other components (e.g., a detergent dispenser).

[0028] Therefore, with the washing machine 100 according to embodiments of the present invention, it is possible to realize a function of the electric door opening and improve an automation degree of the washing machine 100, and further improve experiences of users. Moreover, by disposing the driving motor 30 at the corner of the worktable 13, the problem of the arrangement of the driving motor 30 can be solved, and it is possible to further make the space arrangement of the worktable 13 appropriate, and to reduce occupied space of the driving motor 30 to facilitate the arrangement of other components (e.g., a detergent dispenser).

[0029] According to the present invention, as shown in Fig. 6, the driving assembly 50 further includes a one-way bearing 40, the cover frame 21 has a bearing mounting portion 22 at an end thereof, the one-way bearing 40 has a first end fixedly mounted within the bearing mounting portion 22 of the cover 20 and a second end opposite to the first end and connected to the driving motor 30, the driving motor 30 is configured to drive the cover 20 via the one-way bearing 40 to make the cover 20 pivot about the cover frame edge.

[0030] It should be understood that when the driving motor 30 is working, it may drive the one-way bearing 40 to move. Because the one-way bearing 40 is fixed on the bearing mounting portion 22, the cover 20 and the one-way bearing 40 move synchronously, that is, the driving motor 30 may make the cover 20 open the port 11 by driving the one-way bearing 40. As shown in Fig. 3 to Fig. 5, the bearing mounting portion 22 is disposed at the cover frame 21 at the rear end of the cover 20, so as to

rotate the cover 20 around the cover frame 21 as the pivotal axis. By providing the driving motor 30 and the one-way bearing 40, the cover 20 is easy to rotate, which further simplifies the structure of the washing machine 100. Alternatively, the driving motor 30 may be a reduction motor. It should be understood that, the reduction motor may reduce the output rotation rate to keep the opening rate of the cover 20 driven by the driving motor 30 to be moderate.

[0031] Specifically, when the cover 20 needs to close the port 11, the driving motor 30 may drive the cover 20 to rotate around the cover frame 21 via the one-way bearing 40 to close the port 11. It should be understood that, at this time, a rotation direction of the driving motor 30 is opposite to a rotation direction of the driving motor 30 opening the cover 20. Moreover, the rotation rate of the driving motor 30 may be lower to prevent the problem of clamping hand of the user by the cover 20 caused by the fact that the rate of the cover 20 when closing the port 11 is too fast, thus improving use safety of the washing machine 100.

[0032] In some embodiments, the cabinet 10 of the washing machine 100 may be provided with a control button for opening or closing the cover 20. The control button is connected with the driving motor 30, and the user only needs to press the control button to realize the motion of opening or closing the cover 20, thus further improving an automation degree of the washing machine 100 and experiences of users.

[0033] In addition, it should be understood that the washing machine 100 may further complete the process of closing the port 11 by the cover 20 by manpower. For example, when the cover 20 needs to close the port 11, the driving motor 30 stops to work and human hand may press the cover 20 downwardly to close the port 11.

[0034] Alternatively, as shown in Fig. 6, the one-way bearing 40 includes an inner shaft portion 41 connected to the driving motor 30 and an outer ring portion 42 fixedly mounted within the bearing mounting portion 22 of the cover 20. When the driving motor 30 drives the one-way bearing 40 to open the cover 20, the inner shaft portion 41 and the outer ring portion 42 move in the same direction, so that the outer ring portion 42 may drive the cover 20 to rotate around the cover frame 21, so as to enable the cover 20 to open the port 11. When the driving motor 30 drives the one-way bearing 40 to close the cover 20, the driving motor 30 drives the inner shaft portion 41 to rotate, and the cover 20 associated with the outer ring portion 42 moves downwardly under the effect of its own gravity to close the port 11. The difference between the technical effect achieved using the one-way bearing in the electric door of the present invention and the technical effect achieved without using the one-way bearing in the related art will be described in detail as follows.

[0035] In the related art, when the cover is only driven by the driving motor without any one-way bearing, if the driving motor is driven to rotate to a first direction, the cover rotates to the first direction and the first direction

is set to be a direction of opening the cover; if the driving motor is driven to rotate to a second direction, the cover rotates to the second direction and the second direction is set to be a direction of closing the cover.

[0036] However, when the driving motor 30 according to embodiments of the present invention drives the cover 20 via the one-way bearing 40, if the driving motor 30 is driven to rotate to a first direction, the cover 20 rotates to the first direction and the first direction is set to be a direction of opening the cover; if the driving motor 30 is driven to rotate to a second direction, the one-way bearing 40 and the inner shaft portion 41 connected to the driving motor 30 rotate to the second direction, the one-way bearing 40 and the outer ring portion 42 connected to the cover 20 will not rotate if the cover 20 is not mounted. However, the cover 20 is mounted to the outer ring portion 42, under the gravity of the cover 20, the outer ring portion 42 following the inner shaft portion 41 rotates to the second direction, so that the cover 20 connected to the outer ring portion 42 falls down or becomes closed under the gravity of the cover 20. If there is an obstacle such as human hand or foreign object during the process of closing the cover 20, despite the inner shaft portion 41 of the one-way bearing 40 rotates under the drive of the driving motor 30, the outer ring portion 42 may stop rotating because of the effect of the one-way bearing 40, and thus the cover 20 connected to the outer ring portion 42 may stop falling or be stopped, which prevents the problem of clamping hand of the user by the cover 20, thus improving use safety of the washing machine 100. When the cover 20 is no more obstructed by the hand and foreign object, it will continue to fall down under the gravity effect to complete the motion of closing the cover. Therefore, the use of the one-way bearing 40 on the driving motor 30 can prevent the problem of clamping hands.

[0037] Obviously, during the process of closing the cover 20, if human hand presses further, the cover 20 will be closed faster under pressure.

[0038] It should be understood that, the one-way bearing 40 and the driving motor 30 are connected to be used, which is used for the electric door of the washing machine for the first time, and solves the problem of clamping hands by the electric door.

[0039] Alternatively, because of an open end of the bearing mounting portion 22, the driving motor 30 and the inner shaft portion 41 of the one-way bearing 40 are easily connected. The one-way bearing 40 is entirely received in the bearing mounting portion 22 and the inner shaft portion 41 of the one-way bearing 40 is extended out from an open end of the bearing mounting portion 22. By receiving the entire one-way bearing 40 in the bearing mounting portion 22, it is possible to improve the reliability of mounting the one-way bearing 40 on the cover 20. A part of the inner shaft portion 41 extending out from the bearing mounting portion 22 may be connected to the driving motor 30.

[0040] Alternatively, as shown in Fig. 6, the outer ring portion 42 of the one-way bearing 40 may be provided

with a positioning step 43 for locating a position with the bearing mounting portion 22 and an elastic boss 44 for elastically pressing an inner wall surface of the bearing mounting portion 22. By providing the positioning step 43 and the elastic boss 44, the one-way bearing 40 may be detachably mounted on the bearing mounting portion 22, so as to facilitate the mounting and dismounting of the one-way bearing 40, and to maintain and replace the one-way bearing 40 in the later period. Moreover, by providing the elastic boss 44, the mounting difficulty of mounting the one-way bearing 40 onto the bearing mounting portion 22 may be reduced, and the mounting stability of the one-way bearing 40 at the bearing mounting portion 22 may be improved. Specifically, the positioning step 43 and the elastic boss 44 can be spaced apart in an axial direction of the outer ring portion 42 (that is, a left-right direction shown in Fig. 6), in which each bearing mounting portion 22 is provided with a groove engaged with the positioning step 43 and another groove engaged with the elastic boss 44.

[0041] Alternatively, the driving motor 30 defines a driving shaft hole (not shown), and at least a part of the inner shaft portion 41 is inserted into the driving shaft hole. The driving motor 30 is provided with an upwardly-extending ear 31, and the driving shaft hole is formed in the ear 31. For example, the ear 31 is extended upwardly in a radial direction of the driving motor 30. That is, the inner shaft portion 41 is extended into the ear 31 to cooperate with the driving shaft hole, so that the driving motor 30 is connected to the inner shaft portion 41. As shown in Fig. 4, the ear 31 can be abutted against an end surface of the end of the bearing mounting portion 22. Specifically, the ear 31 can be abutted against an end surface of an end of the bearing mounting portion 22 extending out from a part of the inner shaft portion 41, and by attaching the ear 31 to the end surface of the end of the bearing mounting portion 22, the driving motor 30 may cooperate with the one-way bearing 40 steadily, and the structure may be compact, which may further save space and improve the space utilization efficiency of the washing machine 100.

[0042] Alternatively, the driving motor 30 may be a reduction motor. Thus, the output rotation rate of the driving motor 30 may meet the need of a moderate rate for the washing machine 100 to open the cover 20. In a preferred embodiment of the present invention, as shown in Fig. 6, the driving motor 30 includes a motor portion 33 and a reducer portion 32, which are disposed at a same side of the driving motor 30, so as to save more space. Alternatively, the reducer portion 32 may include a plurality of engaged reduction gears. Alternatively, as shown in Fig. 7, the motor portion 33 of the driving motor 30 is configured to abut against the corner sidewall of the worktable 13, so that the space arrangement of the worktable 13 may be more appropriate and the space utilization efficiency of the worktable 13 may be improved.

Claims

1. A washing machine (100), comprising:

a cabinet (10) having a worktable (13), said worktable defining a port (11) for putting into and taking out of laundry;
a cover (20) disposed on a top of the cabinet (10) and having a cover frame (21), the cover frame (21) having a cover frame edge as a pivotable shaft for the cover (20); and
a driving assembly (50) comprising a driving motor (30), the driving assembly (50) being configured to drive the cover (20) to pivot about said cover frame edge;
wherein the worktable (13) defines a receiving space in at least one corner thereof for receiving the driving motor (30), the worktable (13) has a corner sidewall at said at least one corner, the corner sidewall of the worktable (13) is adjacent to the cover frame (21), a left side or a right side of the driving motor (30) is adapted to abut against said corner sidewall of the worktable (13), **characterized in that** the driving assembly (50) further comprises an one-way bearing (40), the cover frame (21) has a bearing mounting portion (22) at an end of the cover frame edge, the one-way bearing (40) defines a first end fixedly mounted with the bearing mounting portion (22) of the cover (20) and a second end opposite to the first end, said second end of the one-way bearing (40) being connected to the driving motor (30), the driving motor (30) is configured to drive the cover (20) via the one-way bearing (40) so as to make the cover (20) pivot about the cover frame edge.

2. The washing machine (100) according to claim 1, wherein the one-way bearing (40) comprises an inner shaft portion (41) connected to the driving motor (30) and an outer ring portion (42) fixedly mounted within the bearing mounting portion (22) of the cover (20).

3. The washing machine (100) according to claim 2, wherein the one-way bearing (40) is received in the bearing mounting portion (22) and the inner shaft portion (41) of the one-way bearing (40) is configured to extend out from an open end of the bearing mounting portion (22).

4. The washing machine (100) according to claim 2 or 3, wherein the driving motor (30) defines a driving shaft hole, at least a part of the inner shaft portion (41) is inserted into the driving shaft hole.

5. The washing machine (100) according to claim 4, wherein the driving motor (30) is provided with an

upwardly-extending ear (31), the driving shaft hole is formed in the ear (31).

6. The washing machine (100) according to claim 5, wherein the ear (31) is configured to abut against an end surface of the end of the bearing mounting portion (22). 5
7. The washing machine (100) according to one of claims 1 to 6, wherein the driving motor (30) is a reduction motor. 10
8. The washing machine (100) according to one of claims 1 to 7, wherein the driving motor (30) comprises a motor portion (33) and a reducer portion (32), which are disposed at a same side of the driving motor (30). 15
9. The washing machine (100) according to one of claims 1 to 8, wherein said motor portion (33) of the driving motor (30) is configured to abut against the corner sidewall of the worktable (13). 20

Patentansprüche

1. Waschmaschine (100), umfassend:

ein Gehäuse (10) mit einer Arbeitsplatte (13), wobei die Arbeitsplatte eine Öffnung (11) zum Einfüllen und Herausnehmen von Wäsche begrenzt, eine Abdeckung (20), welche auf einer Oberseite des Gehäuses (10) angeordnet ist und einen Abdeckrahmen (21) aufweist, wobei der Abdeckrahmen (21) eine Abdeckrahmenkante als Schwenkachse für die Abdeckung (20) aufweist; und eine Antriebsanordnung (50), welche einen Antriebsmotor (30) umfasst, wobei die Antriebsanordnung (50) dazu ausgebildet ist, die Abdeckung (20) dazu anzutreiben, um die Abdeckrahmenkante zu schwenken; wobei die Arbeitsplatte (13) in mindestens einer Ecke derselben einen Aufnahmeraum zur Aufnahme des Antriebsmotors (30) begrenzt, die Arbeitsplatte (13) an der mindestens einen Ecke eine Eckseitenwand aufweist, die Eckseitenwand der Arbeitsplatte (13) an den Abdeckrahmen (21) angrenzt und eine linke Seite oder eine rechte Seite des Antriebsmotors (30) derart ausgebildet ist, dass sie an der Eckseitenwand der Arbeitsplatte (13) anliegt, **dadurch gekennzeichnet, dass** die Antriebsanordnung (50) des Weiteren ein Einweglager (40) umfasst, der Abdeckrahmen (21) an einem Ende der Abdeckrahmenkante einen Lagermontageabschnitt (22) aufweist, das Einweglager (40) ein fest an

dem Lagermontageabschnitt (22) der Abdeckung (20) montiertes erstes Ende und ein dem ersten Ende gegenüberliegendes zweites Ende aufweist, wobei das zweite Ende des Einweglagers (40) mit dem Antriebsmotor (30) verbunden ist und der Antriebsmotor (30) dazu ausgebildet ist, die Abdeckung (20) über das Einweglager (40) anzutreiben, sodass die Abdeckung (20) um die Abdeckrahmenkante schwenkbar ist.

2. Waschmaschine (100) nach Anspruch 1, wobei das Einweglager (40) einen mit dem Antriebsmotor (30) verbundenen inneren Wellenabschnitt (41) und einen fest innerhalb des Lagermontageabschnitts (22) der Abdeckung (20) montierten äußeren Ringabschnitt (42) umfasst.
3. Waschmaschine (100) nach Anspruch 2, wobei das Einweglager (40) in dem Lagermontageabschnitt (22) aufgenommen ist und der innere Wellenabschnitt (41) des Einweglagers (40) dazu ausgebildet ist, aus einem offenen Ende des Lagermontageabschnitts (22) herauszuragen.
4. Waschmaschine (100) nach Anspruch 2 oder 3, wobei der Antriebsmotor (30) eine Antriebswellenöffnung bildet und zumindest ein Teil des inneren Wellenabschnitts (41) in die Antriebswellenöffnung eingesetzt ist. 25
5. Waschmaschine (100) nach Anspruch 4, wobei der Antriebsmotor (30) mit einem nach oben ragenden Fortsatz (31) versehen ist und die Antriebswellenöffnung in dem Fortsatz (31) ausgebildet ist. 30
6. Waschmaschine (100) nach Anspruch 5, wobei der Fortsatz (31) dazu ausgebildet ist, an einer Endfläche des Endes des Lagermontageabschnitts (22) anzuliegen. 35
7. Waschmaschine (100) nach einem der Ansprüche 1 bis 6, wobei der Antriebsmotor (30) ein Getriebemotor ist. 40
8. Waschmaschine (100) nach einem der Ansprüche 1 bis 7, wobei der Antriebsmotor (30) einen Motorabschnitt (33) und einen Getriebeabschnitt (32) umfasst, welche auf derselben Seite des Antriebsmotors (30) angeordnet sind. 45
9. Waschmaschine (100) nach einem der Ansprüche 1 bis 8, wobei der Motorabschnitt (33) des Antriebsmotors (30) dazu ausgebildet ist, an der Eckseitenwand der Arbeitsplatte (13) anzuliegen. 50 55

Revendications

1. Machine à laver (100), comprenant :

un boîtier (10) ayant une table de travail (13), ladite table de travail définissant une ouverture (11) pour le remplissage et l'enlèvement du linge ;
 un couvercle (20) disposé sur une partie supérieure du boîtier (10) et ayant un cadre de couvercle (21), le cadre de couvercle (21) ayant un bord de cadre de couvercle comme arbre pivotant pour le couvercle (20) ; et
 un assemblage d'entraînement (50) comprenant un moteur d'entraînement (30), l'assemblage d'entraînement (50) étant configuré pour entraîner le couvercle (20) à pivoter autour dudit bord de cadre de couvercle ;
 la table de travail (13) définissant un espace de réception dans au moins un coin de celle-ci pour recevoir le moteur d'entraînement (30), la table de travail (13) ayant une paroi latérale de coin audit au moins un coin, la paroi latérale de coin de la table de travail (13) étant adjacente au cadre de couvercle (21), et un côté gauche ou un côté droit du moteur d'entraînement (30) étant adapté pour buter contre ladite paroi latérale de coin de la table de travail (13), **caractérisée en ce que** l'assemblage d'entraînement (50) comprend en outre un palier unidirectionnel (40), le cadre de couvercle (21) a une partie de montage de palier (22) à une extrémité du bord de cadre de couvercle, le palier unidirectionnel (40) définit une première extrémité montée de manière fixe avec la partie de montage de palier (22) du couvercle (20) et une deuxième extrémité opposée à la première extrémité, ladite deuxième extrémité du palier unidirectionnel (40) étant connectée au moteur d'entraînement (30), et le moteur d'entraînement (30) est configuré pour entraîner le couvercle (20) par l'intermédiaire du palier unidirectionnel (40) afin de provoquer que le couvercle (20) pivote autour du bord de cadre de couvercle.

2. Machine à laver (100) selon la revendication 1, le palier unidirectionnel (40) comprenant une partie d'arbre (41) intérieure connectée au moteur d'entraînement (30) et une partie de bague (42) extérieure montée de manière fixe dans la partie de montage de palier (22) du couvercle (20).
3. Machine à laver (100) selon la revendication 2, le palier unidirectionnel (40) étant reçu dans la partie de montage de palier (22) et la partie d'arbre (41) intérieure du palier unidirectionnel (40) étant configurée pour s'étendre hors d'une extrémité ouverte de la partie de montage de palier (22).

4. Machine à laver (100) selon la revendication 2 ou 3, le moteur d'entraînement (30) définissant un trou d'arbre d'entraînement et au moins une part de la partie d'arbre (41) intérieure étant introduite dans le trou d'arbre d'entraînement.
5. Machine à laver (100) selon la revendication 4, le moteur d'entraînement (30) étant pourvu d'une patte (31) qui s'étend vers le haut, le trou d'arbre d'entraînement étant formé dans la patte (31).
6. Machine à laver (100) selon la revendication 5, la patte (31) étant configurée pour buter contre une surface d'extrémité de l'extrémité de la partie de montage de palier (22).
7. Machine à laver (100) selon l'une quelconque des revendications 1 à 6, le moteur d'entraînement (30) étant un moteur réducteur.
8. Machine à laver (100) selon l'une quelconque des revendications 1 à 7, le moteur d'entraînement (30) comprenant une partie moteur (33) et une partie réducteur (32) qui sont disposées du même côté du moteur d'entraînement (30).
9. Machine à laver (100) selon l'une quelconque des revendications 1 à 8, ladite partie moteur (33) du moteur d'entraînement (30) étant configurée pour buter contre la paroi latérale de coin de la table de travail (13).

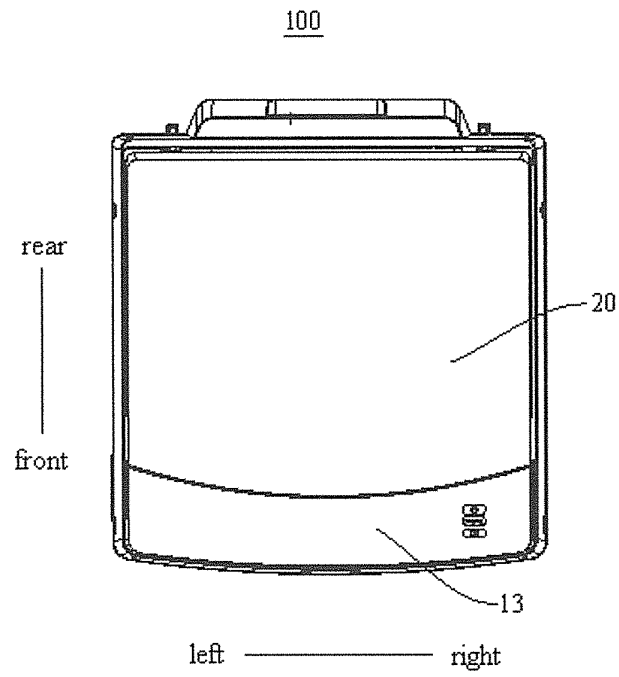


Fig. 1

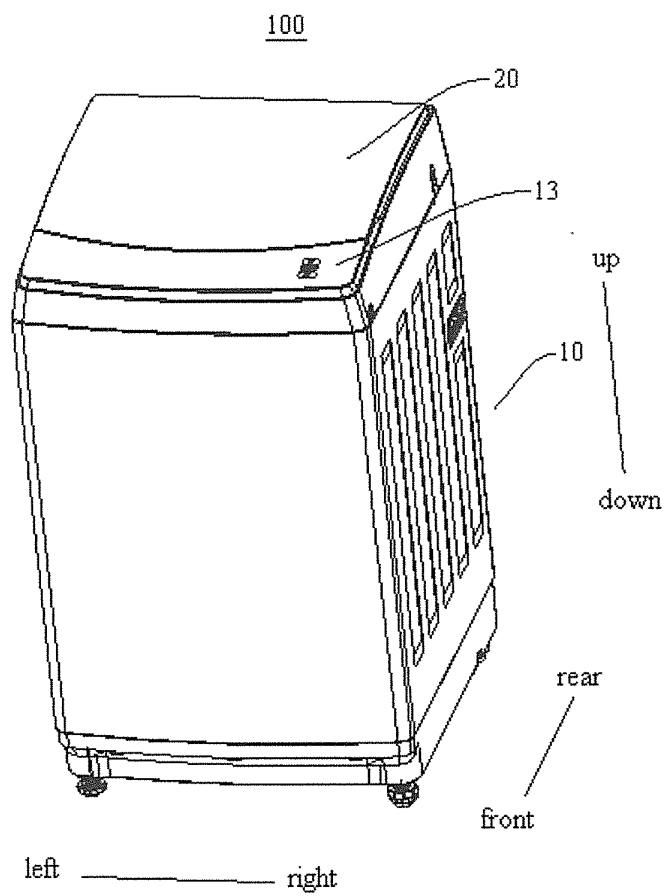


Fig. 2

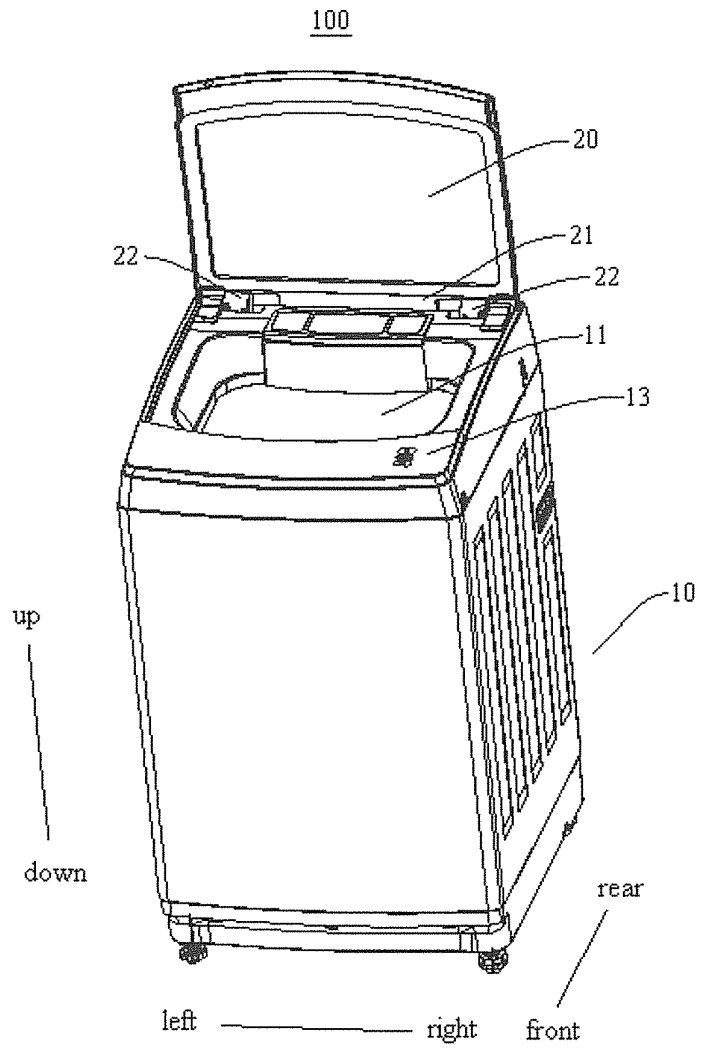


Fig. 3

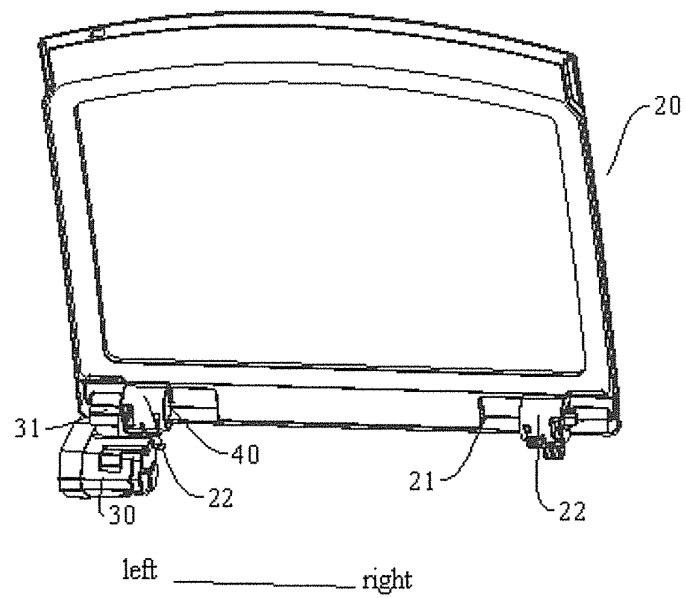


Fig. 4

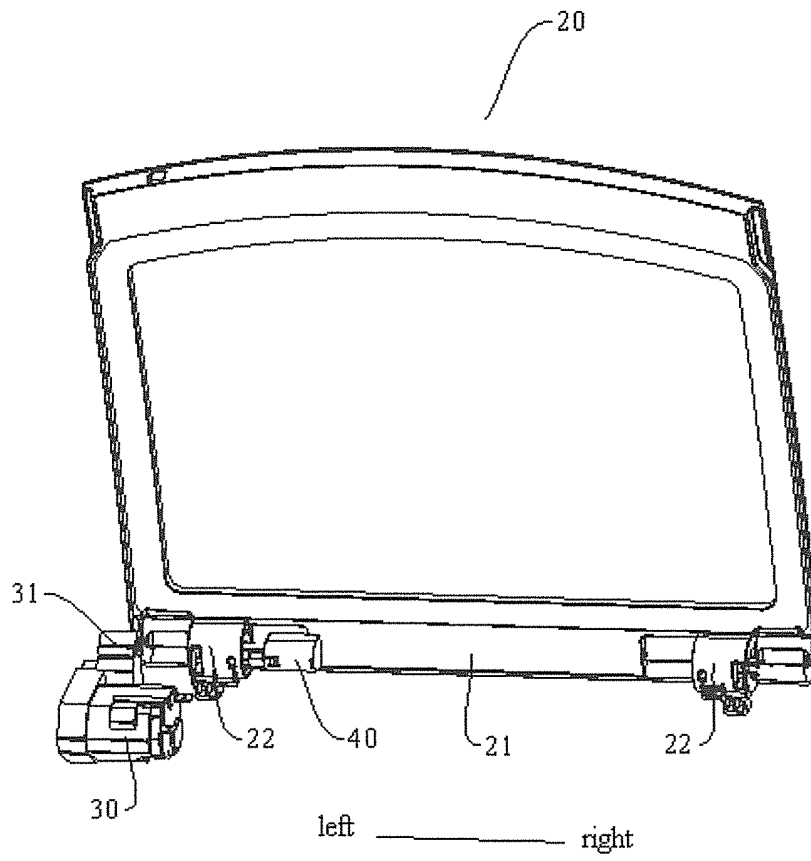


Fig. 5

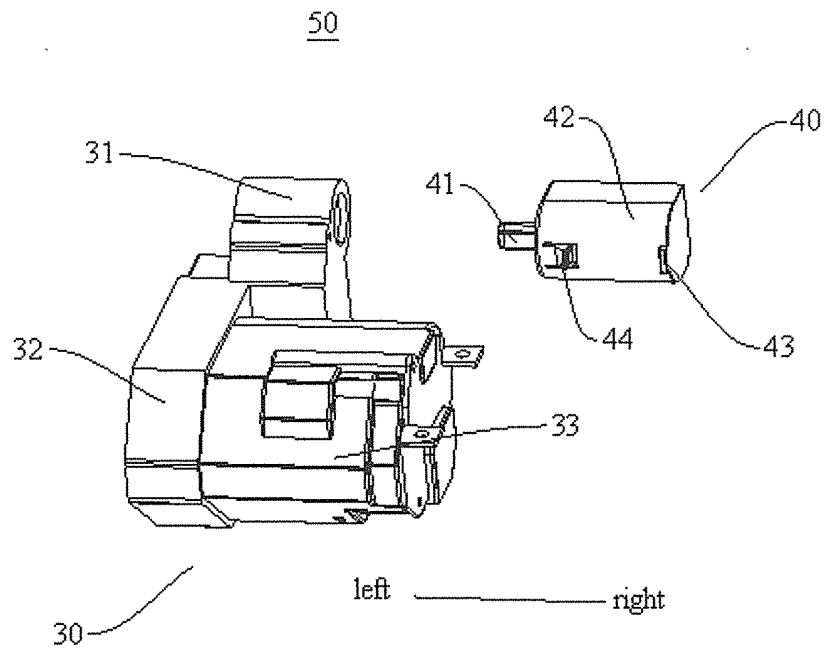


Fig. 6

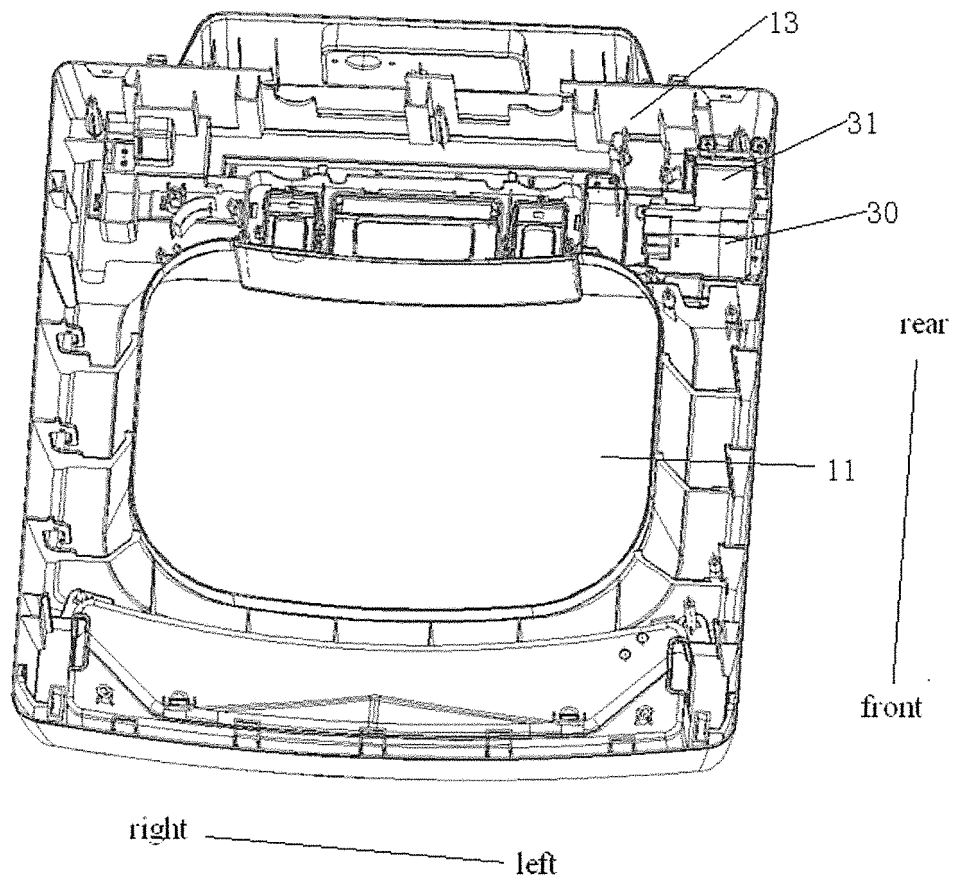


Fig. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201520365984 [0002]
- US 5724837 A [0004]
- WO 2015123933 A [0005]