



(51) International Patent Classification:

A61B 5/00 (2006.01) A61B 5/08 (2006.01)
A61B 7/00 (2006.01) H04R 1/32 (2006.01)
A61B 5/11 (2006.01) H04R 1/40 (2006.01)

(21) International Application Number:

PCT/IB2013/060983

(22) International Filing Date:

16 December 2013 (16.12.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/738,026 17 December 2012 (17.12.2012) US

(71) Applicant: **KONINKLIJKE PHILIPS N.V.** [NL/NL];
High Tech Campus 5, NL-5656 AE Eindhoven (NL).

(72) Inventor: **TRIKI, Mahdi**; c/o High Tech Campus, Building 5, NL-5656 AE Eindhoven (NL).

(74) Agents: **STEFFEN, Thomas** et al.; High Tech Campus Building 5, NL-5656 AE Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,

KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available):

ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: SLEEP APNEA DIAGNOSIS SYSTEM AND METHOD OF GENERATING INFORMATION USING NON-OBTRUSIVE AUDIO ANALYSIS

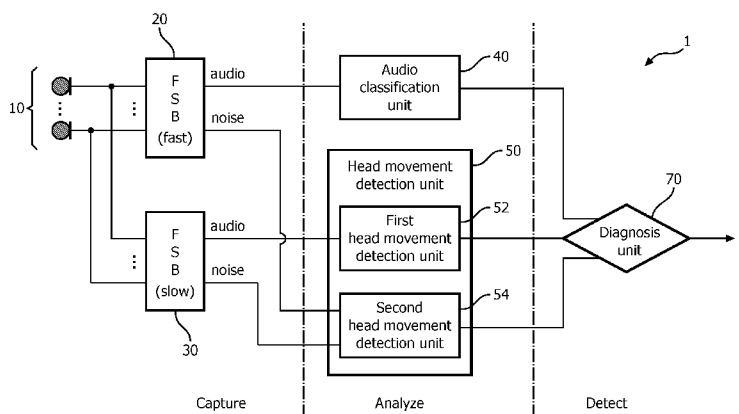


FIG. 1

(57) Abstract: An electronic apparatus includes an array of microphones for detecting audible sounds generated by a patient and for generating audio information representing the detected audible sounds, a first beamformer having a first adaptability speed and configured to generate first audio information and first noise information from the audio information, a second beamformer having a second adaptability speed which is slower than the first adaptability speed, the second adaptive beamformer configured to generate second audio information and second noise information from the audio information, an audio classification unit for generating audio classification information based on the first audio information, a head movement detection unit for generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information, and a diagnosis unit for determining a sleep apnea diagnosis based on the audio classification information and the head movement information.



Sleep apnea diagnosis system and method of generating information using non-obtrusive audio analysis

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention pertains to sleep apnea diagnosis, and, in particular, to a sleep apnea diagnosis system and method.

5

2. Description of the Related Art

Obstructive sleep apnea (OSA) is a condition that affects millions of people from around the world. OSA is characterized by disturbances or cessation in breathing during sleep. OSA episodes result from partial or complete blockage of airflow during sleep that lasts at least 10 seconds and often as long as 1 to 2 minutes. In a given night, people with moderate to severe apnea may experience complete or partial breathing disruptions as high as 200-500 per night. Because their sleep is constantly disrupted, they are deprived of the restorative sleep necessary for efficient functioning of body and mind. This sleep disorder has also been linked with hypertension, depression, stroke, cardiac arrhythmias, myocardial infarction and other cardiovascular disorders. OSA also causes excessive tiredness.

Various methods have been used to assess whether a patient suffers from OSA. The most comprehensive method is a clinical polysomnogram (PSG), which can diagnose many significant sleep pathologies. However, a PSG requires special hospital or sleep disorder center over-night stays with technicians present to monitor both the equipment and the patient.

Home use devices which measure and combine blood oxygen saturation, pulse rate, airflow, snoring level and head movements have also been used to assess sleep apnea. While these devices are less expensive than a PSG, the devices are still too expensive and obtrusive.

Questionnaires and tests have also been used to assess sleep apnea. However, although questionnaires and tests are cost-free and easy to take, their accuracy in assessing sleep apnea is very limited.

Audio recording has also been used to assess sleep apnea. While audio recording can be accomplished inexpensively and non-obtrusively, the audio recording is sensitive to noise such as ambient noise, a snoring partner, or other noises, thus reducing the accuracy of the technique.

5 Accordingly, a need exists for improvement in assessing sleep apnea and, for example, for an inexpensive and non-obtrusive way to accurately assess sleep apnea.

SUMMARY OF THE INVENTION

10 In one embodiment, an electronic apparatus is provided and includes an array of microphones for detecting audible sounds generated by a patient and for generating audio information representing the detected audible sounds generated by the patient, a first beamformer having a first adaptability speed and configured to generate first audio information and first noise information from the audio information, a second beamformer having a second adaptability speed which is slower than the first adaptability speed, the
15 second adaptive beamformer configured to generate second audio information and second noise information from the audio information, an audio classification unit for generating audio classification information based on the first audio information, a head movement detection unit for generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information, and a
20 diagnosis unit for determining a sleep apnea diagnosis based on the audio classification information and the head movement information.

In another embodiment, a method of generating audio classification information and head movement information is provided which includes detecting audible sounds generated by a patient with an array of microphones and generating audio information
25 representing the detected audible sounds generated by the patient, processing the audio information with a first beamformer having a first adaptability speed and generating first audio information and first noise information from the audio information, processing the audio information with a second beamformer having a second adaptability speed which is slower than the first adaptability speed and generating second audio information and second
30 noise information from the audio information, generating audio classification information based on the first audio information, and generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information.

In another embodiment, a non-transitory computer readable medium storing one or more programs, including instructions, which when executed by a computer, causes the computer to perform a method is provided. The method includes detecting audible sounds generated by a patient with an array of microphones and generating audio information representing the detected audible sounds generated by the patient, processing the audio information with a first beamformer having a first adaptability speed and generating first audio information and first noise information from the audio information, processing the audio information with a second beamformer having a second adaptability speed which is slower than the first adaptability speed and generating second audio information and second noise information from the audio information, generating audio classification information based on the first audio information, generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information, and determining a sleep apnea diagnosis based on the audio classification information and the head movement information.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram of a sleep apnea diagnosis system according to one exemplary embodiment;

FIG. 2A is a graph of exemplary audio information of a patient;

FIG. 2B is a graph of exemplary noise information output from a fast beamformer;

FIG. 2C is a graph of exemplary noise information output from a slow beamformer; and

FIG. 3 is a flow chart of a method of generating audio classification information and head movement information according to one exemplary embodiment.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

As used herein, the singular form of “a”, “an”, and “the” include plural references unless the context clearly dictates otherwise. As used herein, the statement that two or more parts or components are “coupled” shall mean that the parts are joined or operate together either directly or indirectly, i.e., through one or more intermediate parts or components, so long as a link occurs. As used herein, “directly coupled” means that two elements are directly in contact with each other. As used herein, “fixedly coupled” or “fixed”

means that two components are coupled so as to move as one while maintaining a constant orientation relative to each other.

Directional phrases used herein, such as, for example and without limitation, top, bottom, left, right, upper, lower, front, back, and derivatives thereof, relate to the orientation of the elements shown in the drawings and are not limiting upon the claims unless expressly recited therein.

As used herein, the phrase “adaptability speed of a beamformer” shall mean a speed at which a beamformer can converge on a new target location.

FIG. 1 is a block diagram of a system 1 adapted to diagnose sleep apnea according to one exemplary embodiment of the present disclosed concept. System 1 is configured to record audible sounds generated by a patient, and through the recorded sounds, to detect snoring of the patient and head movement of the patient. System 1 analyzes the snoring and head movement patterns to assess sleep apnea of the patient.

System 1 includes an array of microphones 10. Array of microphones 10 are operable to record the audible sounds generated by the patient. In the exemplary embodiment shown in FIG. 1, array of microphones 10 includes multiple microphones. One skilled in the art will understand that any number of microphones greater than one can be utilized without deviating from the scope of the present disclosed concept. Increasing the number of microphones in array of microphones 10 allows a narrower beam to be formed by array of microphones 10.

In some exemplary embodiments, array of microphones 10 are arranged as a linear array of microphones. In some other exemplary embodiments, array of microphones are arranged in a symmetric shape (e.g., without limitation, triangular, rectangular, etc.). The symmetric shape can deliver consistent performance when an orientation of array of microphones 10 with respect to the patient is not previously known. In some exemplary embodiments, array of microphones 10 are arranged within about 10 cm of each other. However, the present disclosed concept is not limited thereto. Array of microphones 10 may be arranged in any suitable manner without departing from the scope of the present disclosed concept.

System 1 also includes fast beamformer 20 and slow beamformer 30. Each of fast beamformer 20 and slow beamformer 30 receive and process outputs of each microphone in array of microphones 10. Fast beamformer 20 and slow beamformer 30 process the outputs of each microphone in array of microphones 10 so as to each form a directional beam

such that sounds received from directions inside the beam are enhanced while sounds received from directions outside the beam are attenuated.

Fast beamformer 20 and slow beamformer 30 focus the direction of their beams on the patient's head and adapt the direction of their beams based on movements of the patient's head. For example and without limitation, fast beamformer 20 and slow beamformer 30 can use the patient's snoring to determine the direction of the patient's head and track the patient's head. However, the fast beamformer 20 and the slow beamformer 30 do not adapt to the direction of the patient's head at the same speed. Rather, fast beamformer 20 has an adaptability speed that is faster than an adaptability speed of slow beamformer 30. In an exemplary embodiment, fast beamformer 20 has an adaptability speed that is fast enough to track normal movements of the patient (e.g., without limitation, movement of the head due to snoring), whereas slow beamformer 30 has an adaptability speed that is not fast enough to track normal head movements of the patient, but is fast enough to track normal body movements of the patient (e.g., without limitation, shifting body position during sleeping). As such, during periods of patient head movement, which is common during snoring events, the beam of fast beamformer 20 remains focused on the patient's head while the beam of slow beamformer 30 is not precisely focused on the patient's head.

In a further exemplary embodiment, fast beamformer 20 has an adaptability speed of less than one second and slow beamformer 30 has an adaptability speed of greater than ten seconds. It is understood that an adaptability speed of less than one second is fast enough to track normal head movement speed and an adaptability speed of greater than ten seconds is not fast enough to track normal head movements, but is fast enough to track normal body movement.

Fast beamformer 20 and slow beamformer 30 may each be any suitable type of beamformer. In the exemplary embodiment shown in FIG. 1, fast beamformer 20 and slow beamformer 30 are filter and sum type beamformers. In other embodiments, fast beamformer 20 and slow beamformer 30 can be implemented as delay and sum type beamformers.

Fast beamformer 20 and slow beamformer 30 each output enhanced audio information and noise information. The enhanced audio information is information of sounds which are located inside the beams of fast beamformer 20 and slow beamformer 30. The noise information is information of sounds which are located outside the beams of fast beamformer 20 and slow beamformer 30.

FIGS. 2A, 2B, and 2C illustrate exemplary inputs to fast beamformer 20 and slow beamformer 30 along with some outputs from fast beamformer 20 and slow

beamformer 30. Referring first to FIG. 2A, exemplary audio information output from array of microphones 10 during periods of snoring and head movement of a patient is illustrated. As shown in FIG. 2A, a snoring event 100 causes a rise in the amplitude of the signal.

Referring now to FIG. 2B, an exemplary noise reference output of fast beamformer 20 is shown. As described above, the noise information output from fast beamformer 20 only includes audio information from directions located outside the beam. Since the beam of fast beamformer 20 is focused on the patient's head, the snoring event 100' in the noise information does not rise in amplitude. Rather, as shown in FIG. 2B, the noise information output from fast beamformer 20 only includes ambient noise.

Referring now to FIG. 2C, an exemplary noise information output of slow beamformer 30 is shown. As described above, slow beamformer 30 does not adapt fast enough to precisely track movements of the patient's head. As such, during snoring event 100" some of the snoring audio will remain in the noise information output from the slow beamformer 30. The difference between the noise information of fast beamformer 20 and slow beamformer 30 indicates that patient head movement is also present during snoring event 100.

While FIGS. 2B and 2C illustrate exemplary noise information output from fast beamformer 20 and slow beamformer 30, fast beamformer 20 and slow beamformer 30 also output enhanced audio information. As described above, the enhanced audio information is audio information from directions inside the beams of fast beamformer 20 and slow beamformer 30. During periods of snoring and head movement of the patient, the enhanced audio information output from fast beamformer 20 and slow beamformer 30 will differ as slow beamformer 30 is not able to keep its beam focused on the patient's head during periods of head movement.

Referring again to FIG. 1, outputs of the fast beamformer 20 and slow beamformer 30 are output to an audio classification unit 40 and a head movement detection unit 50 which includes a first head movement detection unit 52 and a second head movement detection unit 54. In the exemplary embodiment shown in FIG. 1, the enhanced audio information from fast beamformer 20 is output to audio classification unit 40 and the enhanced audio information from slow beamformer 30 is output to first head movement detection unit 52. The noise information from both fast beamformer 20 and slow beamformer 30 is output to second head movement detection unit 54.

Audio classification unit 40 uses the enhanced audio information from fast beamformer 20 to classify acoustic events such as, for example and without limitation,

snoring events. Other acoustic events such as coughing, sneezing, and groaning events may also be classified by the audio classification unit 40. Known sound classification techniques may be employed in the audio classification unit 40 to classify the acoustic events. For example and without limitation, the sound classification techniques described in U.S. Patent Application Publication No. 2011/0087079 can be suitably modified for use in audio classification unit 40. As the enhanced audio information from fast beamformer 20 only includes sounds from directions inside its beam, the enhanced audio information from fast beamformer 20 is relatively noise-free audio of a patient's snoring, and thus the enhanced audio information from fast beamformer 20 is well suited for use in classifying snoring events. Audio classification unit 40 output information of the classified acoustic events.

System 1 also includes head movement detection unit 50 including first head movement detection unit 52 and second head movement detection unit 54. Head movement detection unit 50 detects movement of the patient's head based on the enhanced audio information of slow beamformer 20 and noise information of fast beamformer 20 and slow beamformer 30.

First head movement detection unit 52 receives the enhanced audio information from slow beamformer 30. As described above, slow beamformer 30 does not adapt fast enough to track movement of the patient's head. As such, during periods of snoring and head movement, the enhanced audio information of slow beamformer 30 will change due to its beam not being directly focused on the patient's head. First head detection movement unit 52 analyzes the enhanced audio information of slow beamformer 30 for such changes and thusly determines when head movement occurs. In some exemplary embodiments, first head movement detection unit 52 includes an envelope analysis unit which performs envelope analysis on the enhanced audio information of slow beamformer 30 to determine when head movement occurs. First head movement detection unit 52 output first head movement information.

System 1 further includes second head movement detection unit 54. second head movement detection unit 54 receives noise information from both fast beamformer 20 and slow beamformer 30. As described above with reference to FIGS. 2B and 2C, a difference in noise information between fast beamformer 20 and slow beamformer 30 can indicate a period of head movement. Second head movement detection unit 54 analyzes the noise information from fast beamformer 20 and slow beamformer 30 to determine when head movement occurs. Second head movement detection unit 54 can include, for example and

without limitation, a filter analysis unit. Second head movement detection unit 54 outputs second head movement information.

System 1 further includes a diagnosis unit 70. Diagnosis unit 70 receives outputs of audio classification unit 40 head movement detection unit 50. That is, diagnosis unit 70 receives audio classification information from audio classification unit 40, first head movement information from first head movement detection unit 52, and second head movement information from second head movement detection unit 54. From the received information, diagnosis unit 70 is able to analyze snoring and head movement patterns of the patient.

Snoring information alone may not accurately indicate a sleep apnea condition. Likewise, head movement information alone may also not accurately indicate a sleep apnea condition. By utilizing both snoring information and head movement information, diagnosis unit 70 is able to more accurately diagnose a sleep apnea condition. Diagnosis unit 70 outputs information on the diagnosed sleep apnea condition which can then be used to, for example, prescribe a treatment program for the patient.

Furthermore, system 1 can diagnose a sleep apnea condition from only audio of the patient. As such, system 1 is less obtrusive than other sleep apnea diagnosis systems which use sensors such as accelerometers to monitor head movement of the patient. Also, since system 1 uses both snoring information and head movement information, system 1 can provide a more accurate diagnosis than other sleep apnea diagnosis systems which only use snoring event information or only use head movement information.

Referring to FIG. 3, a flow chart for a method of generating audio classification and head movement information according to one exemplary embodiment is shown. The audio classification and head movement information can subsequently be used to diagnose sleep apnea. The method begins at step 100 where sounds generated by a patient are detected and audio information of the patient is generated. The detection of sounds generated by the patient and the generation of audio information of the patient can be performed with an array of microphones. The audio information of the patient is then processed with a fast beamformer in step 102 and a slow beamformer in step 104. The fast beamformer has an adaptability speed which is fast enough to track normal head movements of the patient and the slow beamformer has an adaptability speed which is too slow to track normal head movements of the patient, but is fast enough to track normal body movements of the patient. The fast beamformer and slow beamformer each output enhanced audio information and noise information, as described above with respect to FIG. 1.

In step 106, audio classification information is generated. The audio classification information is generated based on the enhanced audio information of the fast beamformer. In step 108, head movement information is generated. The head movement information can include first head movement information generated based on the enhanced audio information of the second beamformer and second head movement information based on the noise information of the fast beamformer and the slow beamformer. As noted above, the audio classification information and the head movement information can subsequently be used to diagnose sleep apnea, as shown in step 110.

The present disclosed concept can be embodied in an electronic apparatus, such as, for example and without limitation, a mobile device, a mobile computer, a tablet computer, a peripheral device etc. The present disclosed concept can also be embodied as computer readable codes on a computer readable recording medium. The computer readable recording medium is any data storage device that can store data which can be thereafter read by a computer system. Examples of the computer readable recording medium include read-only memory (ROM), random-access memory (RAM), CD-ROMs, magnetic tapes, floppy disks, and optical data storage devices.

In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word “comprising” or “including” does not exclude the presence of elements or steps other than those listed in a claim. In a device claim enumerating several means, several of these means may be embodied by one and the same item of hardware. The word “a” or “an” preceding an element does not exclude the presence of a plurality of such elements. In any device claim enumerating several means, several of these means may be embodied by one and the same item of hardware. The mere fact that certain elements are recited in mutually different dependent claims does not indicate that these elements cannot be used in combination.

Although the invention has been described in detail for the purpose of illustration based on what is currently considered to be the most practical and preferred embodiments, it is to be understood that such detail is solely for that purpose and that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover modifications and equivalent arrangements that are within the spirit and scope of the appended claims. For example, it is to be understood that the present invention contemplates that, to the extent possible, one or more features of any embodiment can be combined with one or more features of any other embodiment.

CLAIMS:

1. An electronic apparatus comprising:

an array of microphones (10) for detecting audible sounds generated by a patient and for generating audio information representing the detected audible sounds generated by the patient;

5 a first beamformer (20) having a first adaptability speed and configured to generate first audio information and first noise information from the audio information;

a second beamformer (30) having a second adaptability speed which is slower than the first adaptability speed, the second adaptive beamformer configured to generate
10 second audio information and second noise information from the audio information;

an audio classification unit (40) for generating audio classification information based on the first audio information;

a head movement detection unit (50) for generating head movement information based on at least one of the second audio information, the first noise information,
15 and the second noise information; and

a diagnosis unit (70) for determining a sleep apnea diagnosis based on the audio classification information and the head movement information.

2. The electronic apparatus of claim 1, wherein the first adaptability speed is fast
20 enough to track normal head movements of the patient and the second adaptability speed is too slow to track the normal head movements of the patient.

3. The electronic apparatus of claim 1, wherein the first beamformer (20) and the second beamformer (30) are one of filter and sum type beamformers and delay and sum type
25 beamformers.

4. The electronic apparatus of claim 1, wherein the head movement detection unit (50) comprises a first head movement detection unit (52) and a second head movement detection unit (54) and the head movement information comprises first head movement

information and second head movement information, wherein the first head movement detection unit (52) is configured to calculate the first head movement information based on the second audio information and the second head movement detection unit (54) is configured to calculate the second head movement information based on the first noise information and the second noise information.

5. The electronic apparatus of claim 4, wherein the first head movement detection unit (52) is an envelope detection unit for calculating the first head movement information based on variations in the second audio information.

6. The electronic apparatus of claim 4, wherein the second head movement detection unit (54) is a filter analysis unit for calculating the second head movement information based on differences between the first noise information and the second noise information.

7. The electronic apparatus of claim 1, wherein the array of microphones (10) are located within about 10 cm or less of each other.

8. A method of generating audio classification information and head movement information, the method comprising:

detecting audible sounds generated by a patient with an array of microphones (10) and generating audio information representing the detected audible sounds generated by the patient;

processing the audio information with a first beamformer (20) having a first adaptability speed and generating first audio information and first noise information from the audio information;

processing the audio information with a second beamformer (30) having a second adaptability speed which is slower than the first adaptability speed and generating second audio information and second noise information from the audio information;

generating audio classification information based on the first audio information; and

generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information.

9. The method of claim 8, wherein the first adaptability speed is fast enough to track normal head movements of the patient and the second adaptability speed is too slow to track the normal head movements of the patient.

5 10. The method of claim 8, wherein the first beamformer (20) and the second beamformer (30) are one of filter and sum type beamformers and delay and sum type beamformers.

11. The method of claim 8, wherein the generating head movement information
10 comprises generating first head movement information based on the second audio information and generating second head movement information based on the first noise information and the second noise information.

12. The method of claim 11, wherein the generating first head movement
15 information comprises performing envelope analysis on the second audio information to determine variations in the second audio information.

13. The method of claim 11, wherein the generating second head movement
20 information comprises performing filter analysis to determine differences between the first noise information and the second noise information.

14. The method of claim 11, wherein the array of microphones (10) are located within about 10 cm or less of each other.

25 15. A non-transitory computer readable medium storing one or more programs, including instructions, which when executed by a computer, causes the computer to perform a method comprising:

30 detecting audible sounds generated by a patient with an array of microphones (10) and generating audio information representing the detected audible sounds generated by the patient;

processing the audio information with a first beamformer (20) having a first adaptability speed and generating first audio information and first noise information from the audio information;

processing the audio information with a second beamformer (30) having a

second adaptability speed which is slower than the first adaptability speed and generating second audio information and second noise information from the audio information;
generating audio classification information based on the first audio information; and

5 generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information.

16. The non-transitory computer readable medium of claim 15, wherein the first adaptability speed is fast enough to track normal head movements of the patient and the
10 second adaptability speed is too slow to track normal head movements of the patient.

17. The non-transitory computer readable medium of claim 15, wherein the first beamformer (20) and the second beamformer (30) are one of filter and sum type beamformers and delay and sum type beamformers.

15

18. The non-transitory computer readable medium of claim 15, wherein the generating head movement information comprises generating first head movement information based on the second audio information and generating second head movement information based on the first noise information and the second noise information.

20

19. The non-transitory computer readable medium of claim 18, wherein the generating first head movement information comprises performing envelope analysis on the second audio information to determine variations in the second audio information.

25

20. The non-transitory computer readable medium of claim 18, wherein the generating second head movement information comprises performing filter analysis to determine differences between the first noise information and the second noise information.

30

21. The non-transitory computer readable medium of claim 15, wherein the array of microphones (10) are located within about 10 cm or less of each other.

22. A method of diagnosing sleep apnea, the method comprising:
detecting audible sounds generated by a patient with an array of microphones (10) and generating audio information representing the detected audible sounds generated by

the patient;

processing the audio information with a first beamformer (20) having a first adaptability speed and generating first audio information and first noise information from the audio information;

5 processing the audio information with a second beamformer (30) having a second adaptability speed which is slower than the first adaptability speed and generating second audio information and second noise information from the audio information;

generating audio classification information based on the first audio information;

10 generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information; and

determining a sleep apnea diagnosis based on the audio classification information and the head movement information.

15 23. A non-transitory computer readable medium storing one or more programs, including instructions, which when executed by a computer, causes the computer to perform a method comprising:

detecting audible sounds generated by a patient with an array of microphones (10) and generating audio information representing the detected audible sounds generated by
20 the patient;

processing the audio information with a first beamformer (20) having a first adaptability speed and generating first audio information and first noise information from the audio information;

25 processing the audio information with a second beamformer (30) having a second adaptability speed which is slower than the first adaptability speed and generating second audio information and second noise information from the audio information;

generating audio classification information based on the first audio information;

30 generating head movement information based on at least one of the second audio information, the first noise information, and the second noise information; and

determining a sleep apnea diagnosis based on the audio classification information and the head movement information.

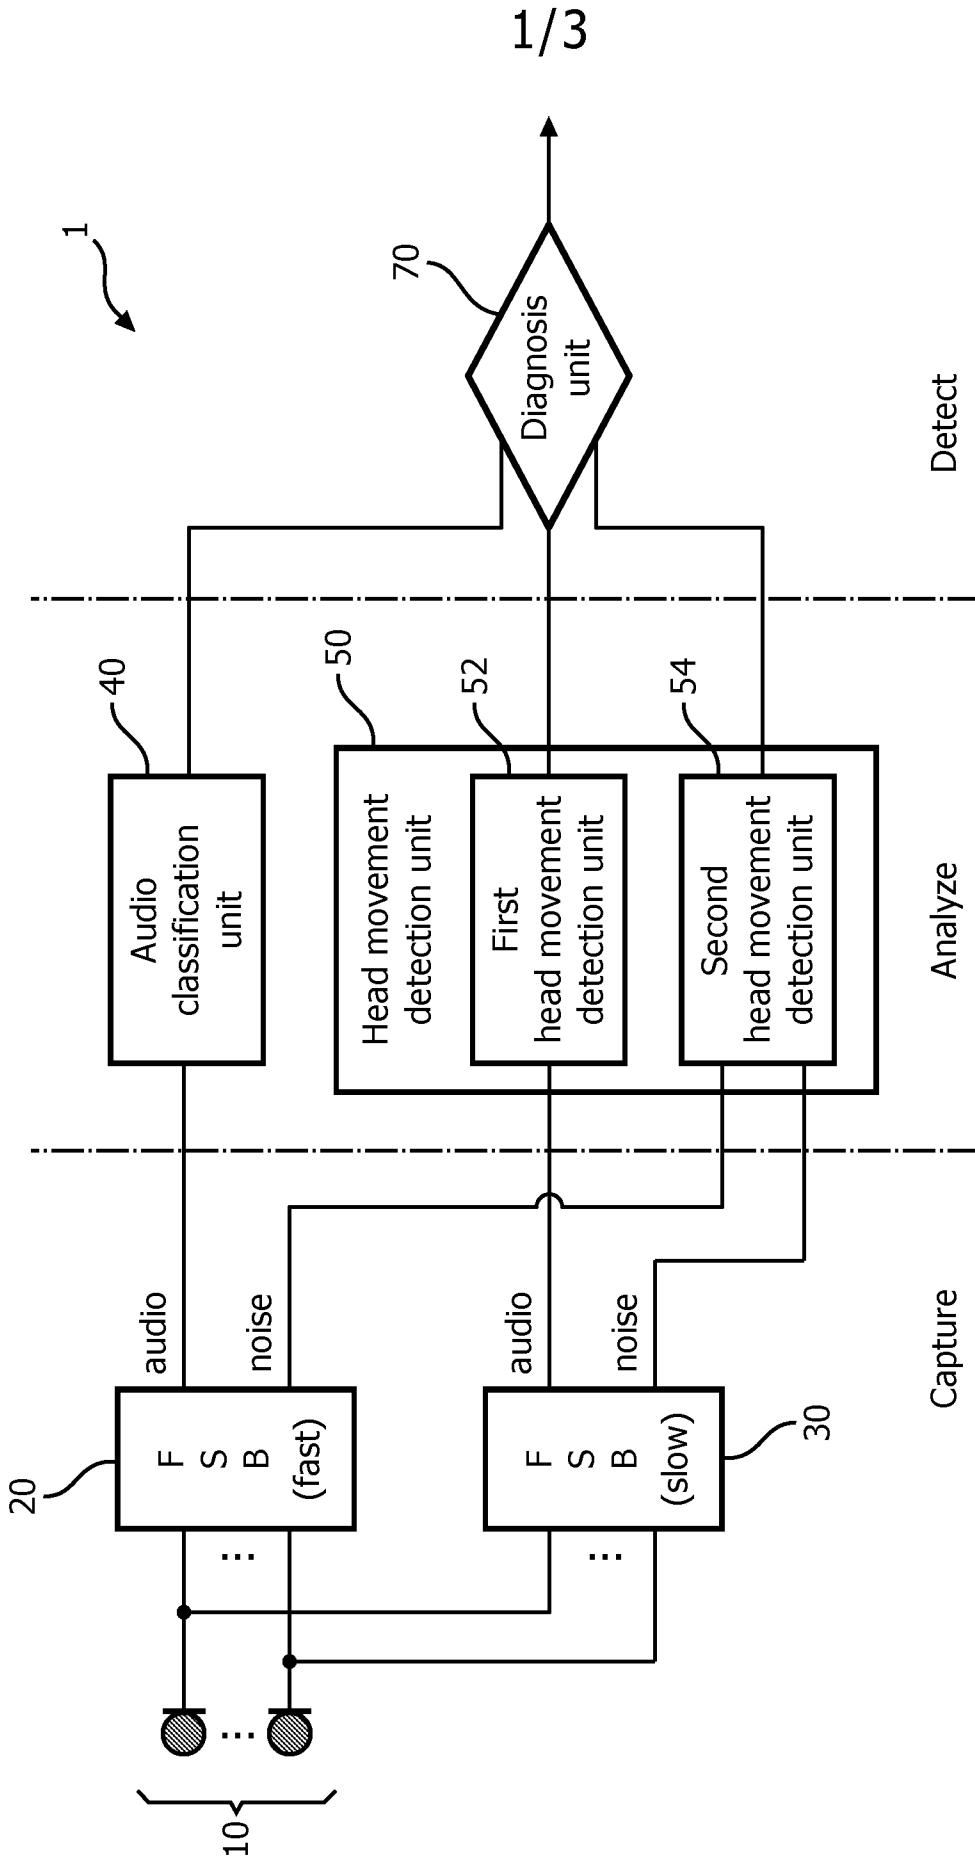
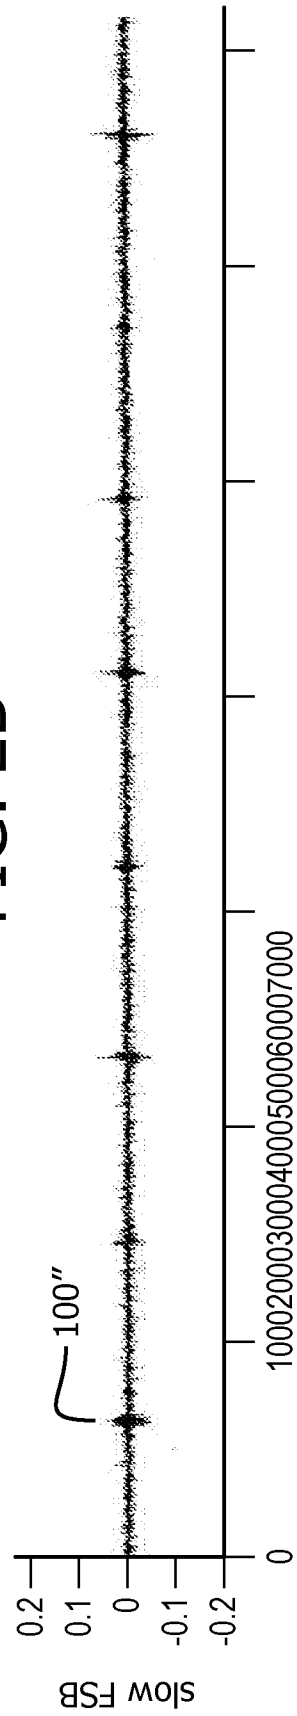
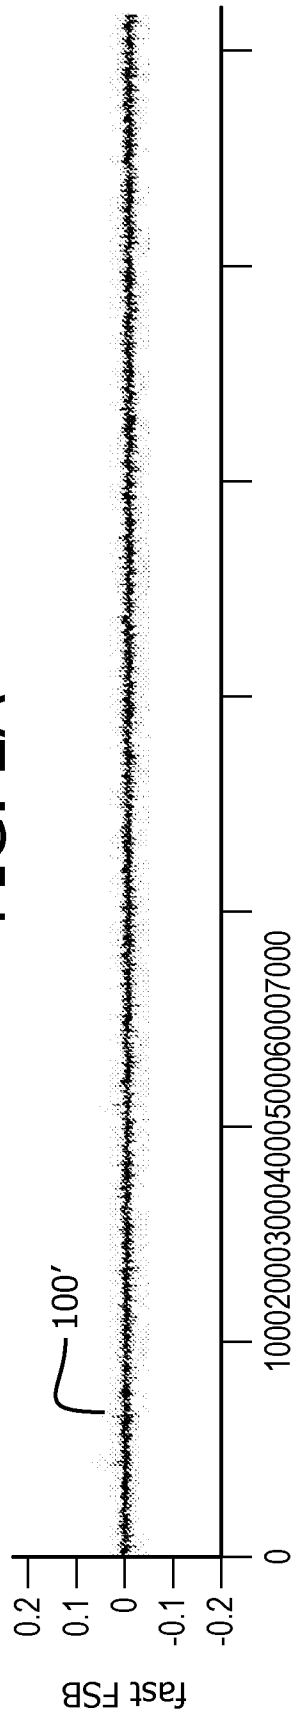
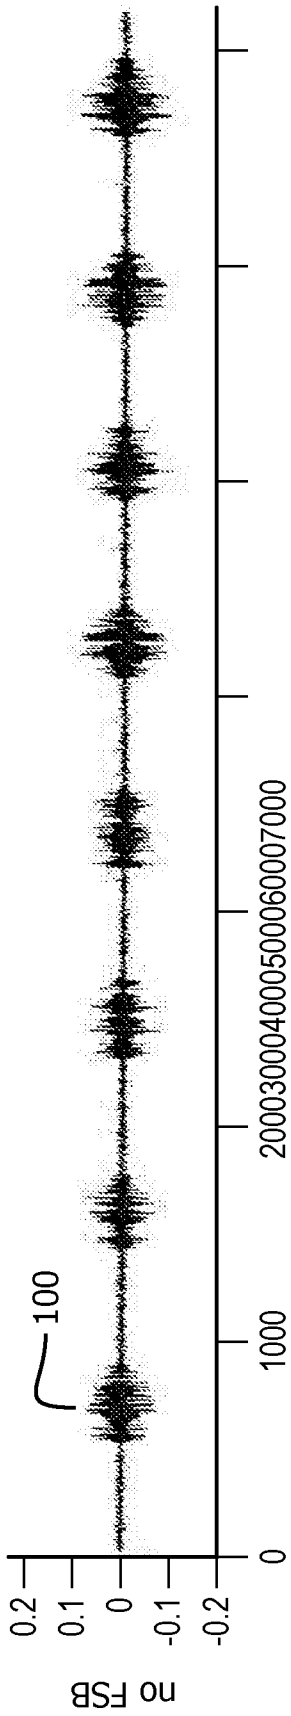


FIG. 1



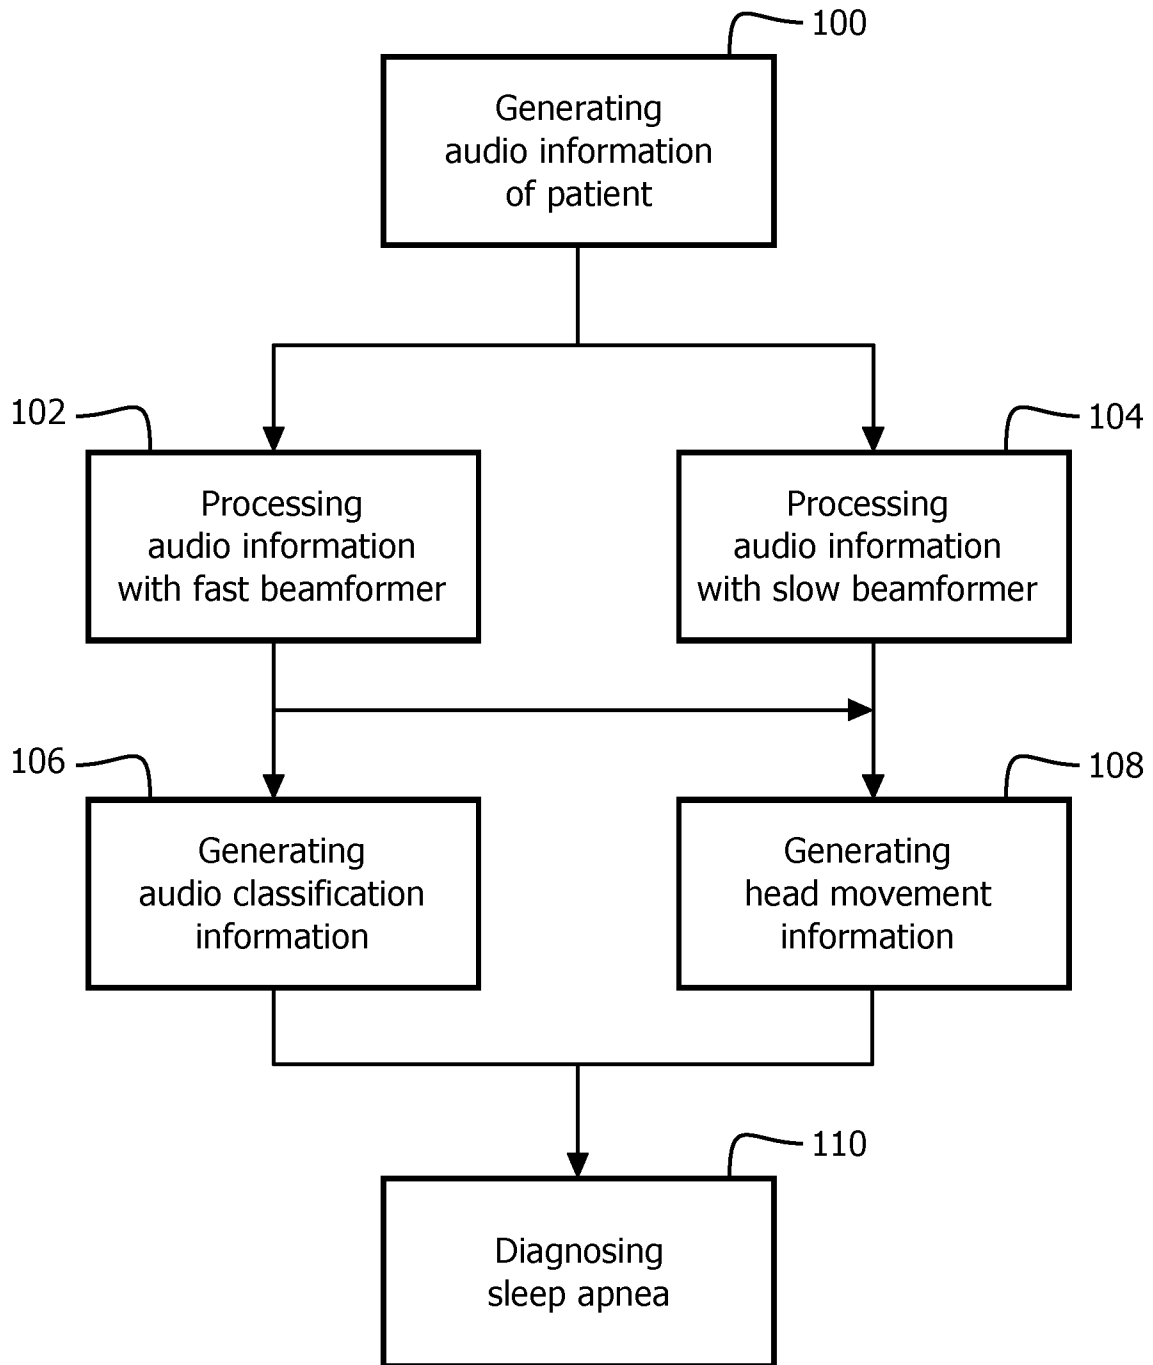


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2013/060983

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61B5/00 A61B7/00 A61B5/11
ADD. A61B5/08 H04R1/32 H04R1/40

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61B G06F H04R G10L G10K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|--|-----------------------|
| Y | WO 2011/141916 A1 (SENSEWISER LTD [IL]; WURM ARIE JOHN MARTIN [IL]; HELLER ZEEV [IL]; SCH) 17 November 2011 (2011-11-17) page 5, line 5 - line 8 page 6, line 2 - page 7, line 10 page 8, line 8 - line 14 page 9, line 4 - line 22 page 12, line 5 - line 12 page 14, line 26 - line 29 page 15, line 5 - line 16 ----- | 1-7, 15-21,23 |
| Y | WO 2009/034524 A1 (KONINKL PHILIPS ELECTRONICS NV [NL]; ROOVERS DAVID A C M [NL]; KOT VAL) 19 March 2009 (2009-03-19) page 1, line 6 - page 2, line 5 page 3, line 5 - page 4, line 3 page 6, line 1 - page 7, line 12 ----- -/-- | 1-7, 15-21,23 |

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

2 June 2014

Date of mailing of the international search report

10/06/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kowalczyk, Szczepan

INTERNATIONAL SEARCH REPORT

 International application No
 PCT/IB2013/060983

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

| Category* | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|-----------|---|-----------------------|
| Y | WO 2007/071812 A1 (SMART VALLEY SOFTWARE OY [FI]; SALMI SEPP0 [FI]; SALMI AINO [FI]; VIRT) 28 June 2007 (2007-06-28) page 4, line 14 - page 17, line 16 ----- | 1-7, 15-21,23 |
| Y | US 2011/087079 A1 (AARTS RONALD M [NL]) 14 April 2011 (2011-04-14) paragraph [0016] - paragraph [0019] paragraph [0026] ----- | 1-7, 15-21,23 |
| A | US 2009/164212 A1 (CHAN KWOK-LEUNG [US] ET AL) 25 June 2009 (2009-06-25) the whole document ----- | 1-7, 15-21,23 |
| A | US 5 797 852 A (KARAKASOGLU AHMET [US] ET AL) 25 August 1998 (1998-08-25) the whole document ----- | 1-7, 15-21,23 |

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2013/060983

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.: 8-14, 22
because they relate to subject matter not required to be searched by this Authority, namely:
see FURTHER INFORMATION sheet PCT/ISA/210
2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box II.1

Claims Nos.: 8-14, 22

No opinion is established on novelty, inventive step or industrial application concerning claims 8-14 and 22 of the present application because claims 8-14 and 22 are directed to generating audio classification information which is used for diagnosing sleep apnea (although not mentioned explicitly in claim 8, it is clear from the description (p.1, l. 2 - p.2, l. 6) that the aim of the classification is to diagnose sleep apnea) and as such considered a diagnostic method, thus covered by the provision of Rule 67(1)(iv) PCT (see also the PCT Guidelines, 9.08-9-10 and Rule 43bis.1(b) PCT).

INTERNATIONAL SEARCH REPORT

Information on patent family members

| |
|---|
| International application No PCT/IB2013/060983 |
|---|

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|--|------------------|---|--|
| WO 2011141916 A1 | 17-11-2011 | US 2013060100 A1 WO 2011141916 A1 | 07-03-2013 17-11-2011 |
| ----- | | | |
| WO 2009034524 A1 | 19-03-2009 | NONE | |
| ----- | | | |
| WO 2007071812 A1 | 28-06-2007 | EP 1962685 A1 FI 20051300 A US 2009227888 A1 WO 2007071812 A1 | 03-09-2008 21-06-2007 10-09-2009 28-06-2007 |
| ----- | | | |
| US 2011087079 A1 | 14-04-2011 | CN 102088911 A EP 2299910 A1 JP 2011524769 A US 2011087079 A1 WO 2009153681 A1 | 08-06-2011 30-03-2011 08-09-2011 14-04-2011 23-12-2009 |
| ----- | | | |
| US 2009164212 A1 | 25-06-2009 | CN 101903948 A EP 2229678 A1 JP 5479364 B2 JP 2011508533 A KR 20100105700 A TW 200939210 A US 2009164212 A1 WO 2009086017 A1 | 01-12-2010 22-09-2010 23-04-2014 10-03-2011 29-09-2010 16-09-2009 25-06-2009 09-07-2009 |
| ----- | | | |
| US 5797852 A | 25-08-1998 | NONE | |
| ----- | | | |