

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) Publication number:

0 318 131
A1

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 88304916.5

(51) Int. Cl. 4: **H01F 41/02** , **H01F 1/08** ,
B22F 3/20

(22) Date of filing: 31.05.88

(30) Priority: 18.11.87 US 122351

(43) Date of publication of application:
31.05.89 Bulletin 89/22

(84) Designated Contracting States:
AT BE CH DE ES FR GB GR IT LI LU NL SE

(71) Applicant: **CRUCIBLE MATERIALS CORPORATION**
P.O. Box 88 Parkway West & Route 60
Pittsburgh Pennsylvania 15230(US)

(72) Inventor: **Chandhok, Vijay K.**
115 Woodhaven Drive
Pittsburgh Pennsylvania 15228(US)
Inventor: **Krause, Robert F.**
3505 McElroy Drive
Murrysville Pennsylvania 15668(US)
Inventor: **Ma, Bao-Min**
209 Countryside Drive
McKees Rocks Pennsylvania 15136(US)
Inventor: **Duplessis, John J.**
621 Eldorado Drive
Elizabethtown Kentucky 42701(US)

(74) Representative: **Shedder, Brian N. et al**
ERIC POTTER & CLARKSON 27 South Street
Reading Berkshire, RG1 4QU(GB)

(54) **Method and assembly for producing extruded permanent magnet articles.**

(57) A method for producing a compacted fully dense permanent magnet article (6) by providing a particle (P) charge of a permanent magnet alloy composition from which the article (6) is to be made and placing the charge in a cylindrical container (8) having a generally axially positioned core (12) with the charge surrounding the core (12) within the container (8). The container (8) and charge are heated to an elevated temperature and extruded to compact the charge to a substantially fully dense permanent magnet article (6).

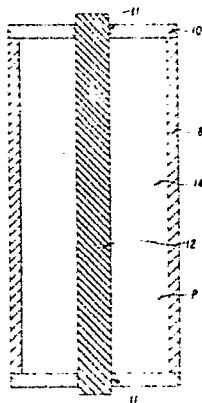


FIG. 3

Xerox Copy Centre

EP 0 318 131 A1

METHOD AND ASSEMBLY FOR PRODUCING EXTRUDED PERMANENT MAGNET ARTICLES

This invention relates to a method and assembly for producing extruded permanent magnet articles from particle charges of permanent magnet alloys.

It is known to produce permanent magnet articles by powder metallurgy techniques, which include the consolidation of particles of the permanent magnet alloys. These practices are employed with permanent magnet alloys of at least one rare earth element and transition element. These conventional practices generally include the steps of aligning, pressing and sintering. With prior art practices of this type, high energy product (BH_{max}) and uniaxial anisotropic crystal alignment is achieved, and this combination finds utility in various permanent magnet applications.

Uniaxial anisotropic crystal alignment, however, is not always advantageous for magnet applications for rotating machinery, motor rotors, beam focussing devices and the like. For these applications a [100] fibre texture wherein the C crystallographic axis is perpendicular to the axis of the magnet may be desired. One of the primary applications for magnets of this construction is for use in DC motors. In this application, with conventional practice, multiple segments of uniaxial anisotropic magnets are needed to form the armature for the motor, which segments are identified as 2 positioned around a motor shaft 4 in Fig. 1.

To obviate the need for the use of a plurality of magnet segments, as shown in Fig. 1, it is known to extrude a cylindrical magnet conforming to the required dimensions of the motor shaft. An extruded magnet 6 in association with a motor shaft 4 is shown in Fig. 2.

Cylindrical, extruded magnets, as shown in Fig. 2, are conventionally produced by the use of a cylindrical extrusion container. Magnet alloy particles are introduced to the container, and the container is outgassed, evacuated and sealed. Thereafter, the container is heated to extrusion temperature and extruded to consolidate the particles to substantially full density. The hollow centre of the magnet is achieved by the use of a solid cylinder or mandrel of a diameter corresponding to the internal diameter of the magnet to be produced, which cylinder is attached to the extrusion ram. This solid cylinder moves with the extrusion ram during the extrusion operation and thereby maintains the desired inner diameter of the extruded magnet. It is difficult to maintain concentricity of the inner and outer peripheries of the extruded magnet because the mandrel tends to wander and thus is not maintained in axial alignment during the extrusion operation. In addition, at the high extrusion ratios breaking of the mandrel may occur. It may be seen, therefore, that in producing cylindrical magnets by conventional extrusion practices, a cylindrical magnet having the required concentric dimensions is difficult to achieve.

It is accordingly a primary object of the present invention to provide an extrusion method and assembly for use therewith that achieves improved concentricity in the production of extruded hollow cylindrical magnets.

Another object of the invention is a method and assembly for use therewith that enables the production of a complete assembly, including a permanent magnet and associated shaft in a single extrusion operation.

Broadly, in accordance with the method of invention for producing a compacted fully dense permanent magnet article, a particle charge is provided of a permanent magnet alloy composition from which the permanent magnet article is to be made. The particle charge is placed in a cylindrical container having a generally axially positioned core with the charge surrounding the core within the container. The container is evacuated and sealed against the atmosphere. The container and particle charge are heated to elevated temperature and the container and charge are then extruded to compact the charge to substantially full density to thereby produce a substantially fully dense permanent magnet article.

To facilitate removal of the core to produce a cylindrical magnet article, a separating medium, such as magnesium oxide, may be provided on the core. The core may be of carbon steel, a soft magnet material or stainless steel. During the extrusion operation, the core may be bonded to the permanent magnet alloy. This is advantageous from the standpoint of producing a unitary magnet and shaft assembly during the extrusion operation.

Extrusion ratios within the range of 1.5:1 to 50:1 may be employed with extrusion temperatures within the range of 500 to 1200 °C.

The method of the invention finds particular use in producing rare earth element containing permanent magnets. More specifically, it may be used in the production of magnets of this type wherein at least one rare earth element, such as samarium, neodymium and dysprosium, may be used with a transition element, such as iron and cobalt, plus boron and/or carbon.

The invention also provides an assembly for use in producing a compacted, fully dense permanent magnet article by extrusion including a cylindrical container having a core generally axially positioned

therein. The mandrel defines an annular chamber within the container. A particle charge of a permanent magnet alloy from which the article is to be made is provided within this annular chamber. Means are provided for sealing the annular chamber.

A separating medium may be provided on the core. This facilitates removal of the core from the compacted magnet after extrusion. The core may be constructed of carbon steel, a soft magnet material or stainless steel.

The invention will be more particularly described with reference to the accompanying drawings, in which:

Fig. 1 shows a conventional assembly of permanent magnet segments in association with a motor shaft;

Fig. 2 shows a conventional assembly of a motor shaft and an associated cylindrical permanent magnet;

Fig. 3 shows in vertical cross-section an embodiment of an assembly in accordance with the invention for use in the method thereof to produce an extruded magnet; and

Fig. 4 is a top view of the assembly of Fig.3.

In accordance with one embodiment of the invention, with reference to Figs. 3 and 4, there is shown a cylindrical container 8 having end plates 10 with axial openings 11 connected at opposite ends of the container, as by welding (not shown) to seal the container. A solid core 12 is connected at opposite ends thereof to the plates 10 and a portion extends through openings 11. The core is axially positioned within the container 8 to define therein an annular chamber 14 surrounding the core. Particles P of the magnet alloy composition from which the magnet is to be constructed are provided within the annular chamber 14 of the container 8.

The assembly of Figs.3 and 4 so constructed is then after outgassing heated to extrusion temperature and extruded in conventional extruding apparatus to compact the particles in the container to substantially full density. Thereafter, the core 12 may be removed from the compacted hollow cylindrical magnet. This may be facilitated by having the core provided with a separating medium, such as magnesium oxide, on the surface thereof. Alternately, the core may be bonded to the cylindrical magnet for use as an assembly in the production of a conventional motor rotor, as shown in Fig. 2.

Example 1

A carbon steel extrusion container was made with a solid low-carbon rod, 3/4" (19mm) in diameter, welded axially to the top and bottom plates of a mild carbon steel can. Atomized $(\text{NdDy})_{15}\text{Fe}_{79}\text{B}_6$ powder was put into the 3-1/8" (79.38mm) diameter can and the can was heated to 150 °C, evacuated and sealed. The container was then heated to 927 °C and extruded with a ratio of 13.8:1. The final extrusion consisted of a 0.3" (7.62mm) diameter steel rod surrounded by a ring shaped magnet with a wall thickness of about 0.25" (6.35mm). The magnetic properties are listed in Table 1. The identical properties along two orthogonal directions perpendicular to the extrusion direction indicates that a [100] fibre texture is obtained. This is the same magnetic behaviour as is observed for magnets extruded by conventional methods.

These extruded magnets, with rods at their centres, can directly be magnetized into multiple poles and used for any type of rotating assembly.

TABLE I

Sample Designation	Test Direction	Br kG	Hc kOe	Hci kOe	BHmax MGOe
EX-267	Axial	3.8	3.3	15.3	3.1
	Transverse 1	7.3	6.4	15.8	12.3
	Transverse 2	7.2	6.3	15.7	11.6

Example 2

To compare the practice of Example 1 with a conventional practice, the identical powder used in Example 1, $(\text{NdDy})_{15}\text{Fe}_{79}\text{B}_6$, was placed into a 3-1/8" (79.38mm) diameter can and the can was heated to 150 °C, evacuated and sealed. The can was then heated to 927 °C and extruded with a ratio of 13.8:1. The magnetic properties of the resultant solid cylinder are presented in Table II. The magnetic properties are very similar to those obtained in Example 1. Thus, the extrusion technique of Example 1 in accordance with the invention will produce magnetic properties comparable to a conventional magnet extrusion method.

TABLE II

Sample Designation	Test Direction	Br kG	Hc kOe	Hci kOe	BHmax MGOe
EX-235	Axial	3.6	3.1	13.9	2.7
	Transverse 1	7.1	6.1	14.0	10.9
	Transverse 2	7.1	6.1	14.1	11.0

Example 3

The same powder as used in Examples 1 and 2 was placed in a carbon steel extrusion container. This extrusion container was in the shape of a hollow circular cylinder, 3-1/8" (79.38mm) OD and 3/4" (19mm) ID. The container was evacuated, sealed and heated to 927 °C and extruded at a 10:1 extrusion ratio. The inner diameter was maintained during extrusion by affixing a solid mandrel to the ram of the extrusion press in accordance with conventional practice. The magnetic properties, Table III, are similar to the properties presented in Tables I and II. The concentricity defined as the ratio of minimum to maximum wall thickness, was calculated to be 0.90. This value is poorer than the concentricity, 0.95, measured on the sample extruded in Example 1 in accordance with the invention.

TABLE III

Sample Designation	Test Direction	Br kG	Hc kOe	Hci kOe	BHmax MGOe
EX-261	Axial	3.5	3.0	14.4	2.6
	Transverse	7.4	6.5	16.5	12.4

As may be seen from the above description and Examples, the invention provides for the production of a hollow permanent magnet by an extrusion practice wherein the desired dimensions of the magnet may be maintained while achieving permanent magnet properties comparable to conventional practices used for this purpose.

It is to be understood that the shape of the core may include symmetrical geometries other than cylindrical. The particles of magnetic material for compaction may be produced by atomization, rapidly solidified ribbon, cast and pulverized particles, direct cast ingots or particles made by a reduction-diffusion practice.

Since the core may be bonded to the compacted magnet during extrusion, an assembly may be produced having an outer shell of a permanent magnet alloy and a soft magnetic inner core, with the inner core acting to direct magnetic flux.

Claims

1. A method for producing a compacted fully dense permanent magnet article (6), said method being characterised in comprising:
providing a particle (P) charge of a permanent magnet alloy composition from which said article (6) is to be made;

placing said charge in a cylindrical container (8) having a generally axially positioned core (12), with said charge surrounding said core (12) within said container (8); and
 heating said container (8) and charge to an elevated temperature and extruding said container (8) and charge to compact said charge to a substantially fully dense permanent magnet article (6).

- 5 2. A method according to claim 1, wherein said core (12) is removed after compacting.
3. A method according to claim 1 or 2, wherein a separating medium is provided on said core (12).
4. A method according to claim 1, 2 or 3, wherein said core (12) is carbon steel.
5. A method according to claim 1, 2 or 3, wherein said core (12) is a soft magnetic material.
6. A method according to claim 1, 2 or 3, wherein said core (12) is stainless steel.
- 10 7. A method according to claim 1 or any one of claims 3 to 6, wherein said core (12) is bonded to said permanent magnet alloy during said extrusion.
8. A method according to any one of the preceding claims, wherein said extruding is performed with an extrusion ratio within the range of 1.5:1 to 50:1.
9. A method according to any one of the preceding claims, wherein said extruding is performed with
 15 said charge at a temperature within the range of 500 to 1200 °C.
10. A method according to any one of the preceding claims, wherein said particle charge of a permanent magnet alloy comprises at least one rare earth element.
11. An assembly adapted for use in producing a compacted, fully dense permanent magnet article (6) by extrusion, said assembly being characterised in comprising a cylindrical container (8) having a core (12)
 20 generally axially positioned within said container (8) and defining an annular chamber (14) within said container (8), and a particle (P) charge of a permanent magnet alloy from which said article (6) is to be made provided within said annular chamber (14).
12. An assembly according to claim 11, wherein a separating medium is provided on said core (12).
13. An assembly according to claim 11 or 12, wherein said core (12) is carbon steel.
- 25 14. An assembly according to claim 11 or 12, wherein said core (12) is a soft magnet material.
15. An assembly according to claim 21 wherein said core (12) is stainless steel.
16. An assembly according to any one of the preceding claims 11 to 15, wherein said particle charge of a permanent magnet alloy comprises at least one rare earth element.

30

35

40

45

50

55

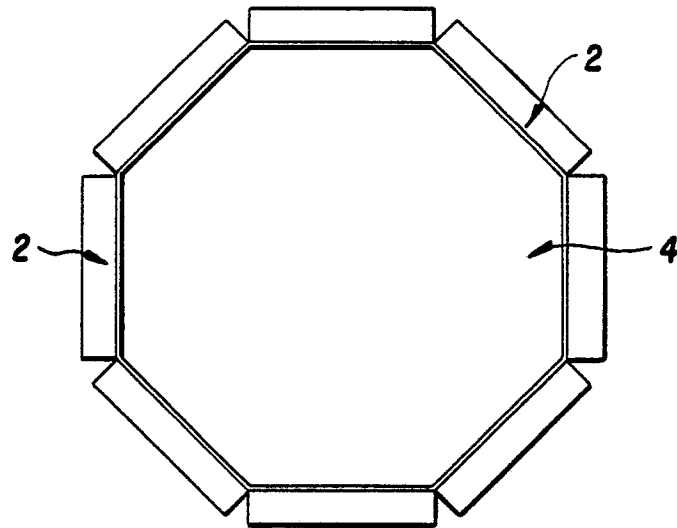


FIG. 1
PRIOR ART

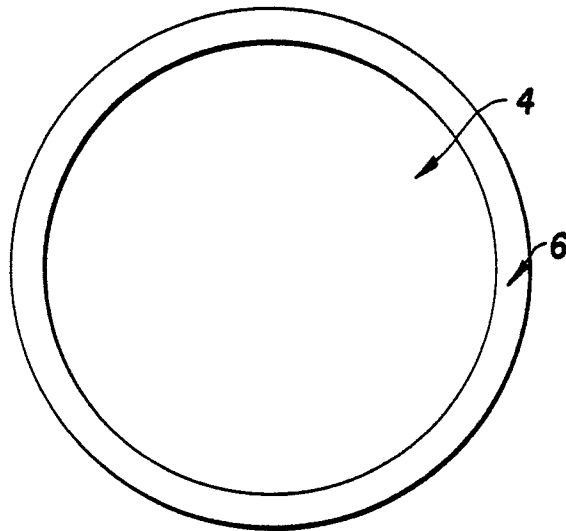


FIG. 2

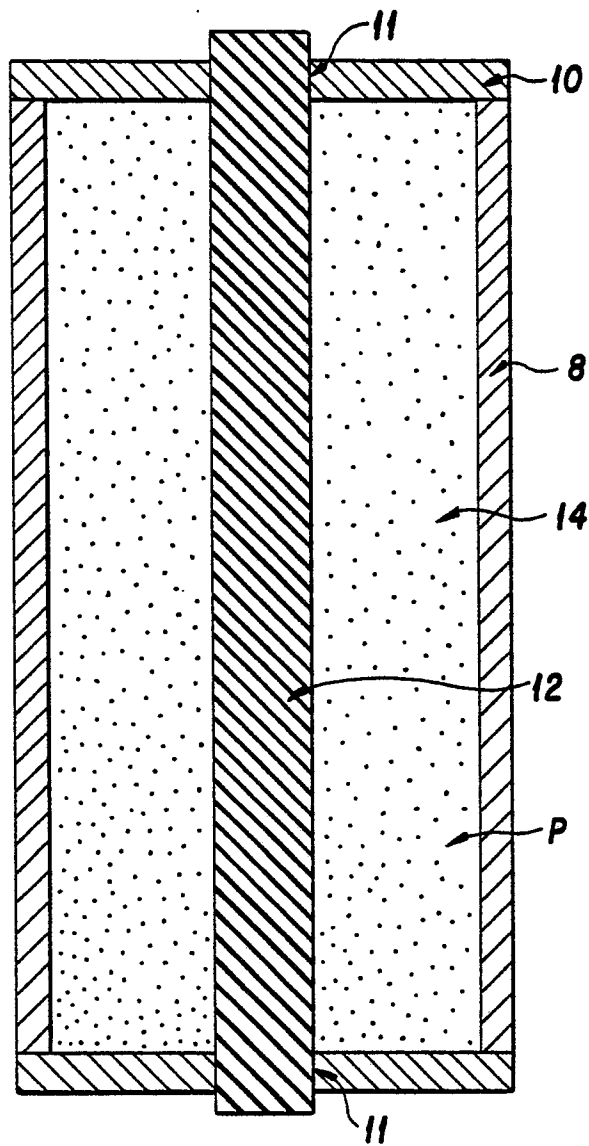


FIG. 3

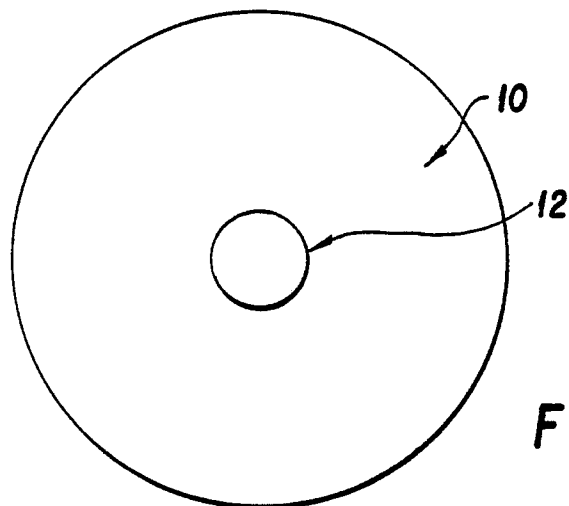


FIG. 4



EP 88 30 4916

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
Y	EP-A-0 231 620 (GENERAL MOTORS CORP.) * Page 6, lines 15-45 *	1,11	H 01 F 41/02
A	---	9,10,16	H 01 F 1/08
Y	US-A-4 640 815 (CRUCIBLE MATERIALS CORP.) * Column 2, lines 31-53; column 3, lines 5-25 *	1,11	B 22 F 3/20
A	---	2,4,7,9,13	
A	GB-A-1 534 221 (LASZLO TOTH) * Page 2, line 125 - page 3, line 55 *	1-3	
A	US-A-3 447 230 (SYLVANIA ELECTRIC PRODUCTS INC.) * Column 2, lines 60-72 *	1,2,6	
A	US-A-3 918 867 (U.S. PHILIPS CORP.) * Column 2, line 55 - column 3, line 10 *	1,5	
A	EP-A-0 092 422 (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD)		TECHNICAL FIELDS SEARCHED (Int. Cl. 4)
A	EP-A-0 240 420 (SHIN-ETSU CHEMICAL CO., LTD)		H 01 F 41/00
A	PATENT ABSTRACTS OF JAPAN, vol. 8, No. 213 (E-269)[1650], 28th September 1984; & JP-A-59 99 705 (SUWA SEIKOSHA K.K.) 08-06-1984		H 01 F 1/00
	---		B 22 F 3/00

The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
THE HAGUE	21-02-1989	VANHULLE R.	
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	



DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.4)
A	PATENT ABSTRACTS OF JAPAN, vol. 7, no. 4 (E-151)[1149], 8th January 1983; & JP-A-57 164 509 (FUJI XEROX K.K.) 09-10-1982 -----		
			TECHNICAL FIELDS SEARCHED (Int. Cl.4)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 21-02-1989	Examiner VANHULLE R.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			