



US 20150305409A1

(19) **United States**(12) **Patent Application Publication**
Verleur et al.(10) **Pub. No.: US 2015/0305409 A1**(43) **Pub. Date: Oct. 29, 2015**(54) **VAPORIZER**

filed on Feb. 10, 2014, provisional application No. 61/903,344, filed on Nov. 12, 2013.


(71) Applicant: **VMR Products, LLC**, Miami, FL (US)**Publication Classification**(72) Inventors: **Jan Andries Verleur**, Miami Beach, FL (US); **Dan Recio**, Miami, FL (US); **Yifeng Lu**, Miami, FL (US); **Yinjun Zhang**, Miami, FL (US); **Arturo Fajardo**, Miami, FL (US); **Hans Verleur**, El Dorado, CA (US)(51) **Int. Cl.**
A24F 47/00 (2006.01)
(52) **U.S. Cl.**
CPC **A24F 47/008** (2013.01)(73) Assignee: **VMR Products, LLC**, Miami, FL (US)(21) Appl. No.: **14/790,566**(22) Filed: **Jul. 2, 2015****Related U.S. Application Data**

(63) Continuation-in-part of application No. 14/539,801, filed on Nov. 12, 2014.

(60) Provisional application No. 62/015,148, filed on Jun. 20, 2014, provisional application No. 61/937,851,

(57) **ABSTRACT**

An electronic cigarette or vaporizer may include a shell and a cartomizer receivable within a chamber within a portion of the shell. The cartomizer may hold a vaporizable fluid, dry substance, or other vaporizable substance such as a wax. A charger may also be included which in one embodiment may be insertable into the chamber, and in another embodiment may be connectable to an end of the shell. Various electrical components, such as a printed circuit board, a rechargeable battery, various indicator lights, a sensor, and display screen, for instance, improve the functionality of the vaporizer from known vaporizers. Magnets may also be provided in order to secure the cartomizer or the charger to the shell.

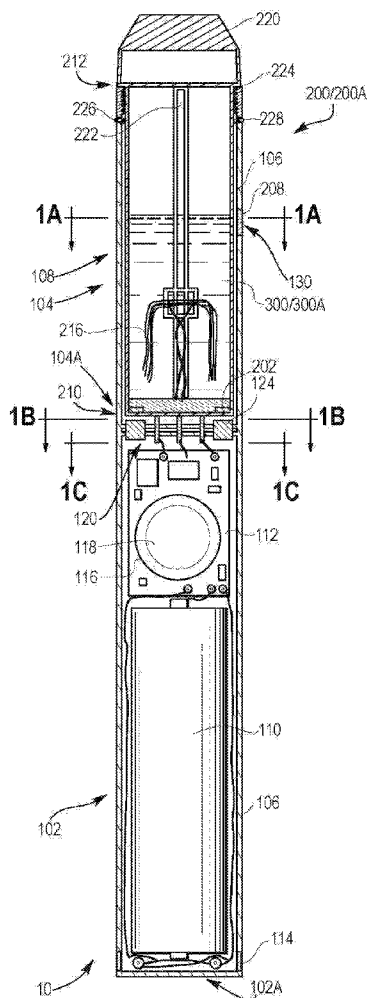

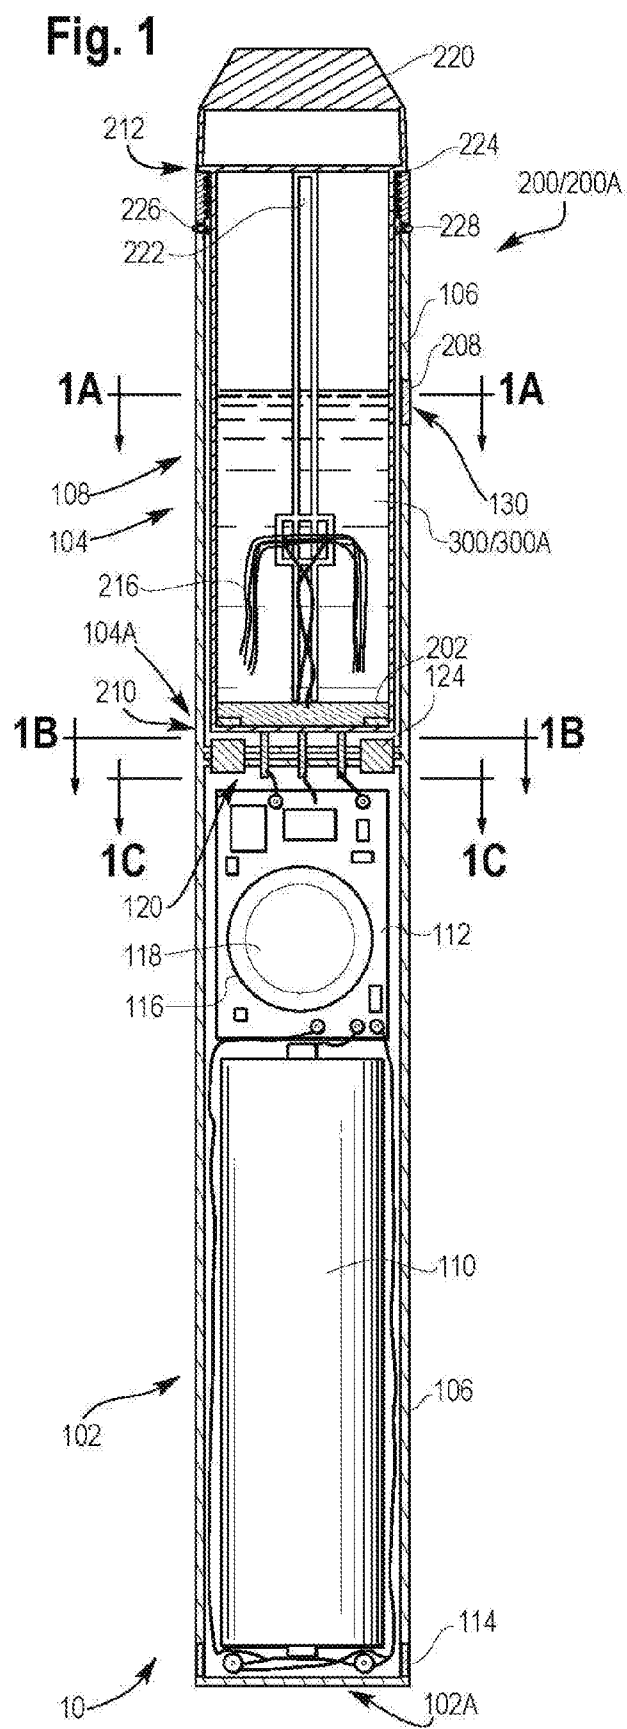


Fig. 1A




Fig. 1B





Fig. 1C



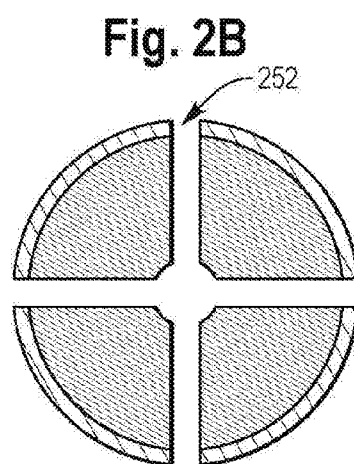
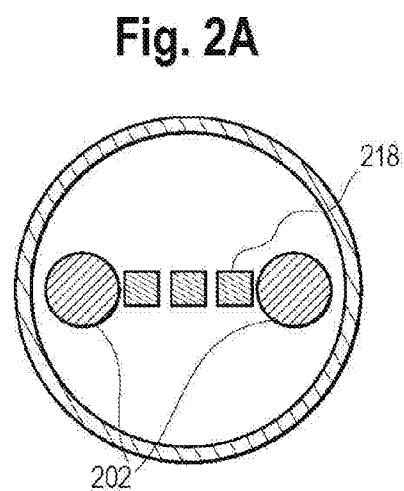
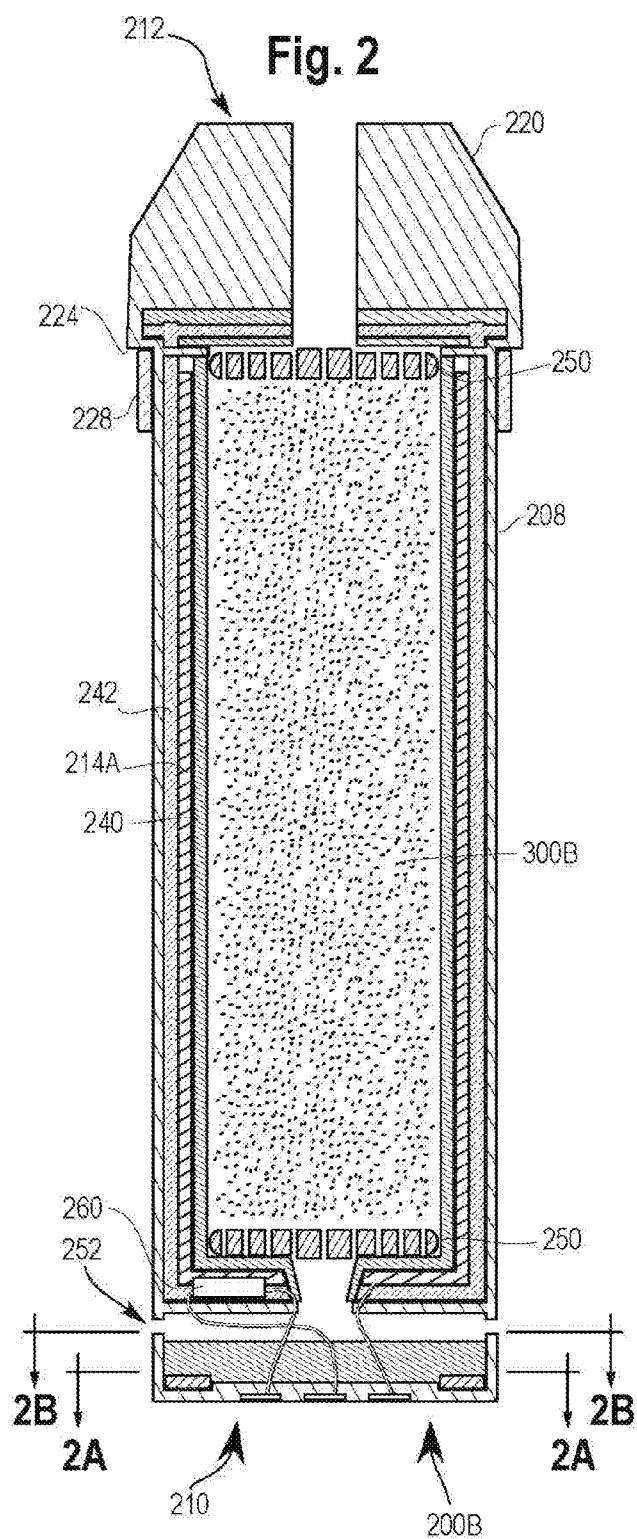
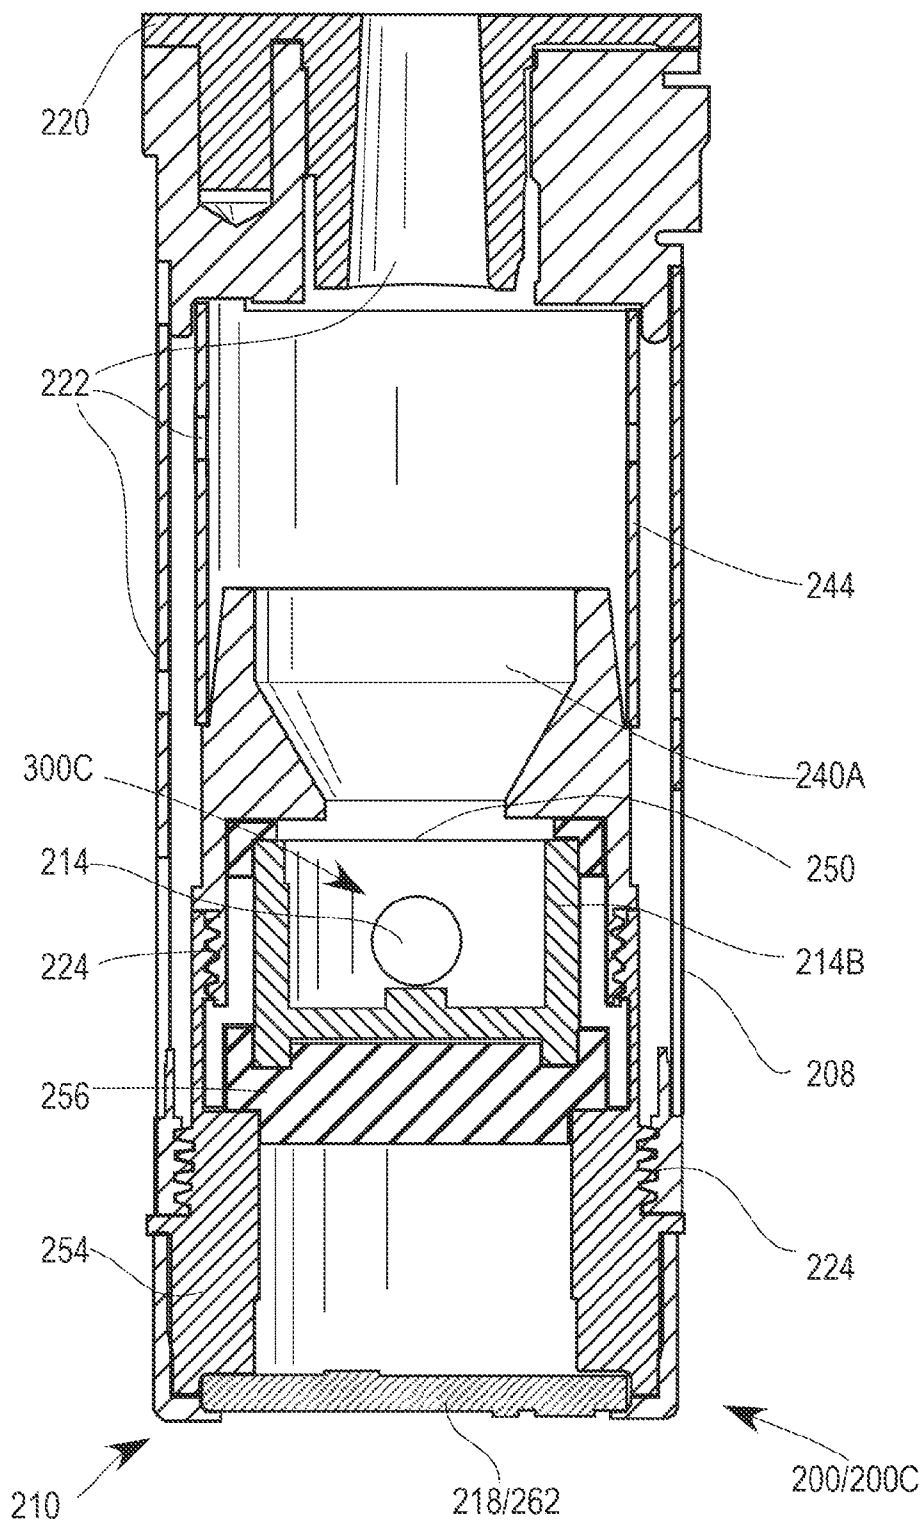
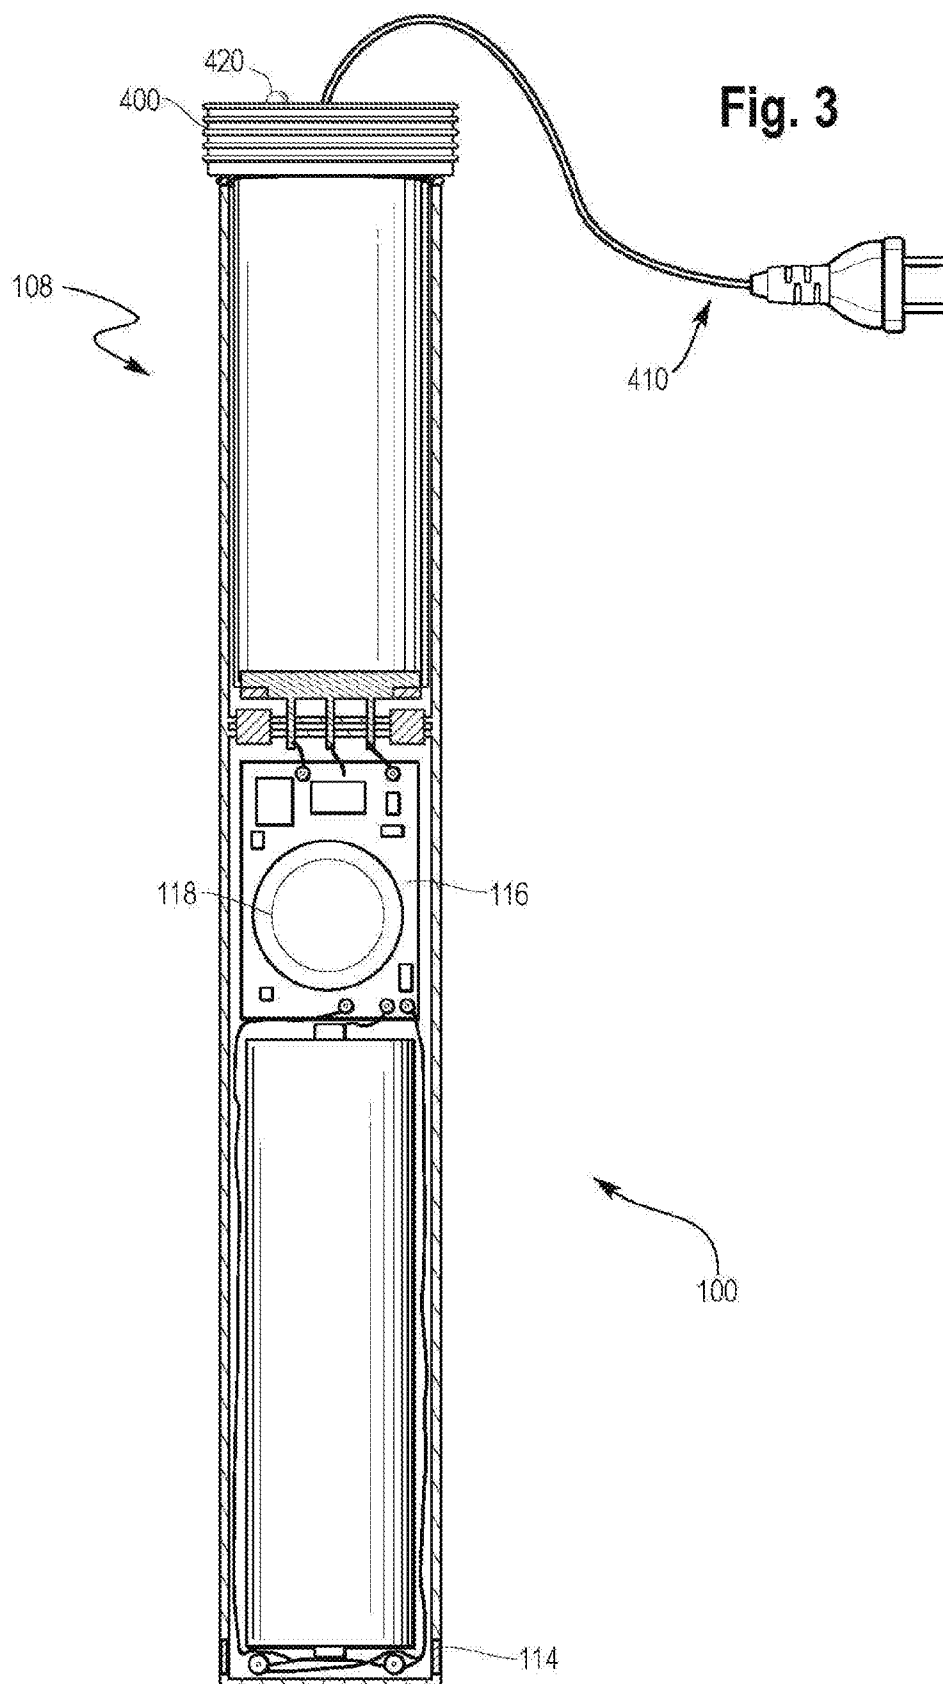


FIG. 2C





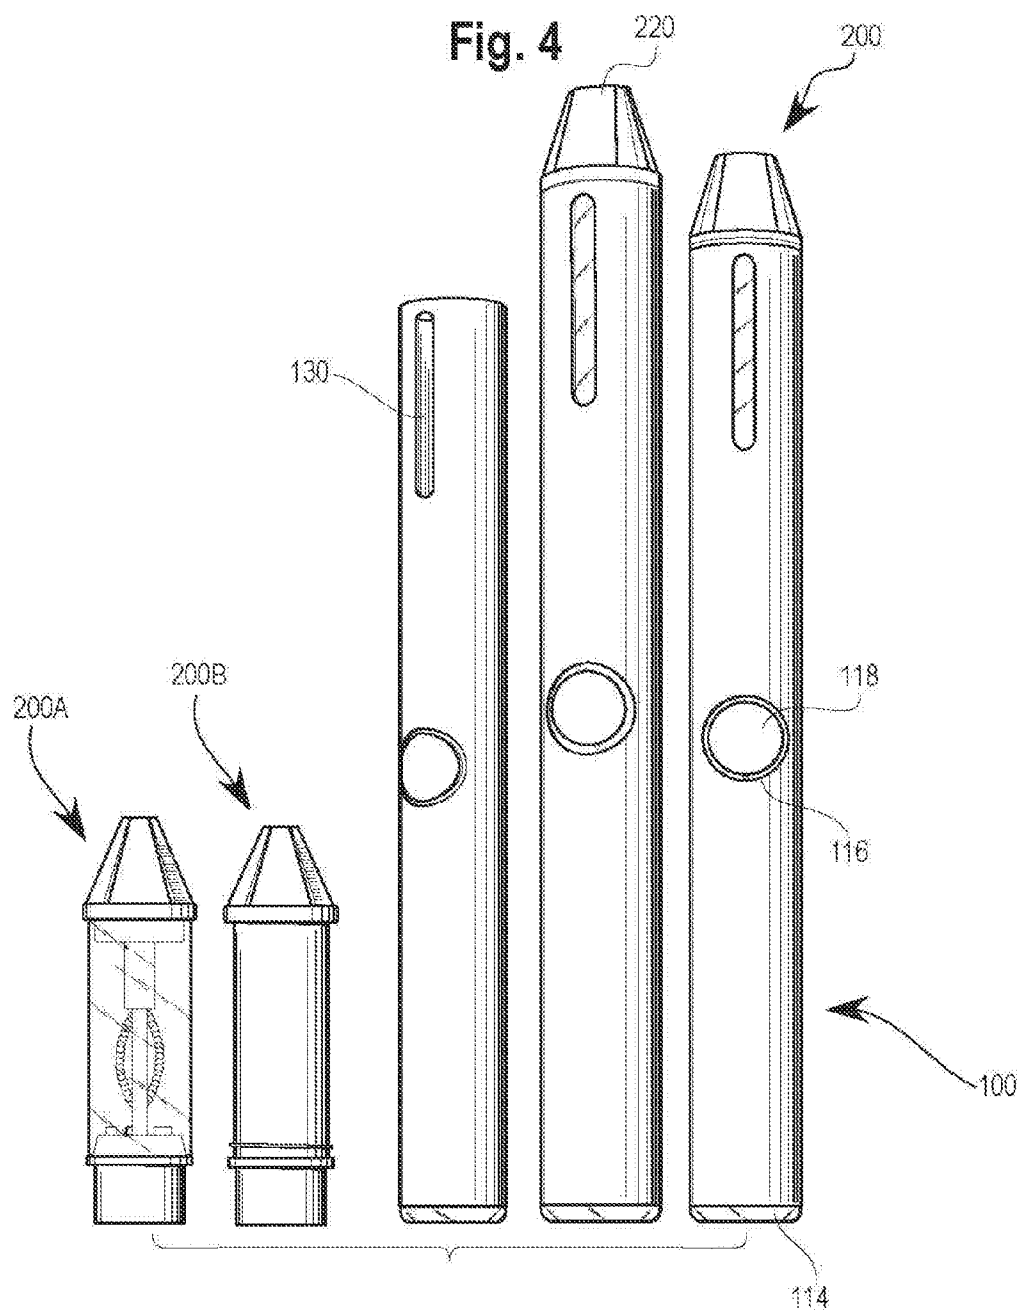
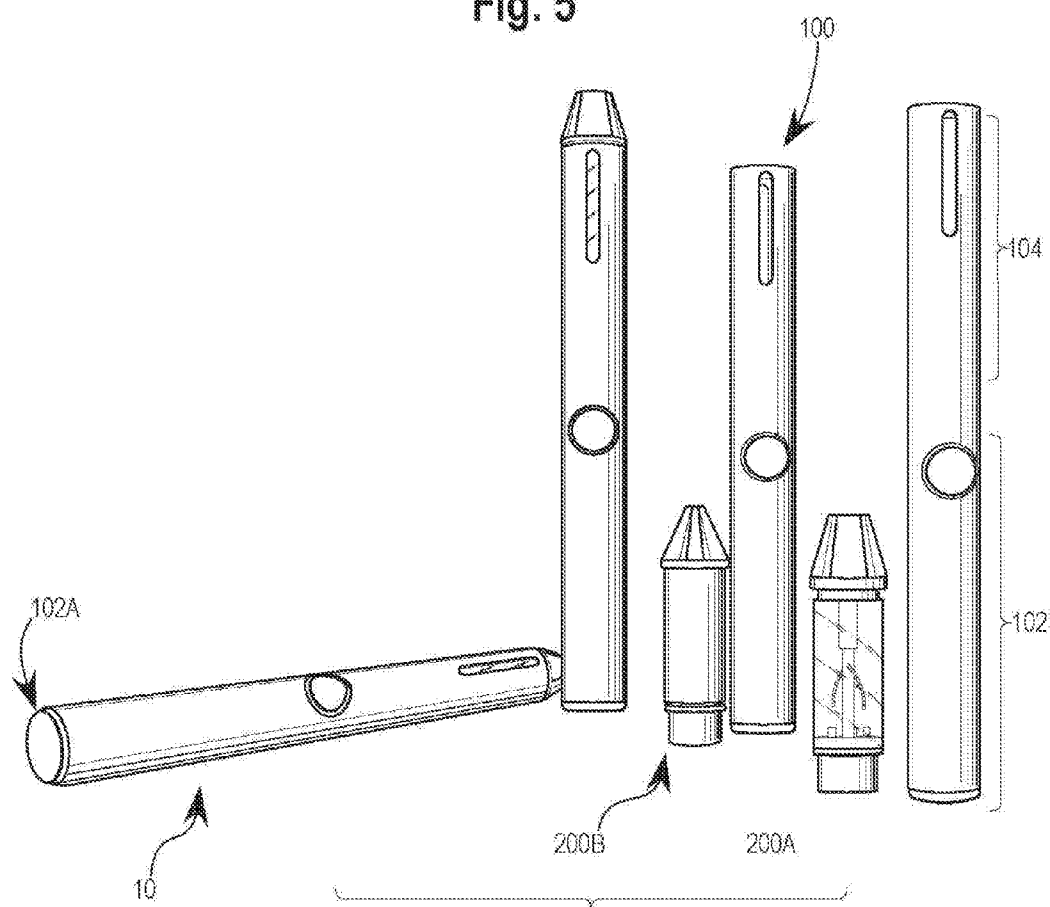


Fig. 5



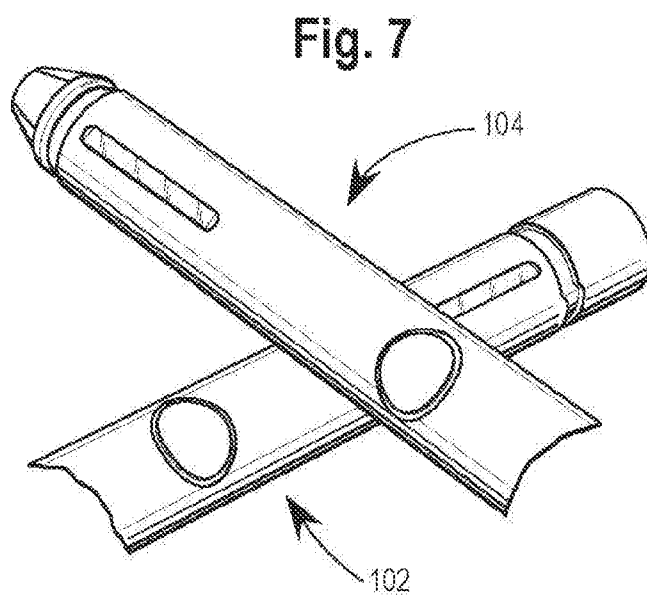
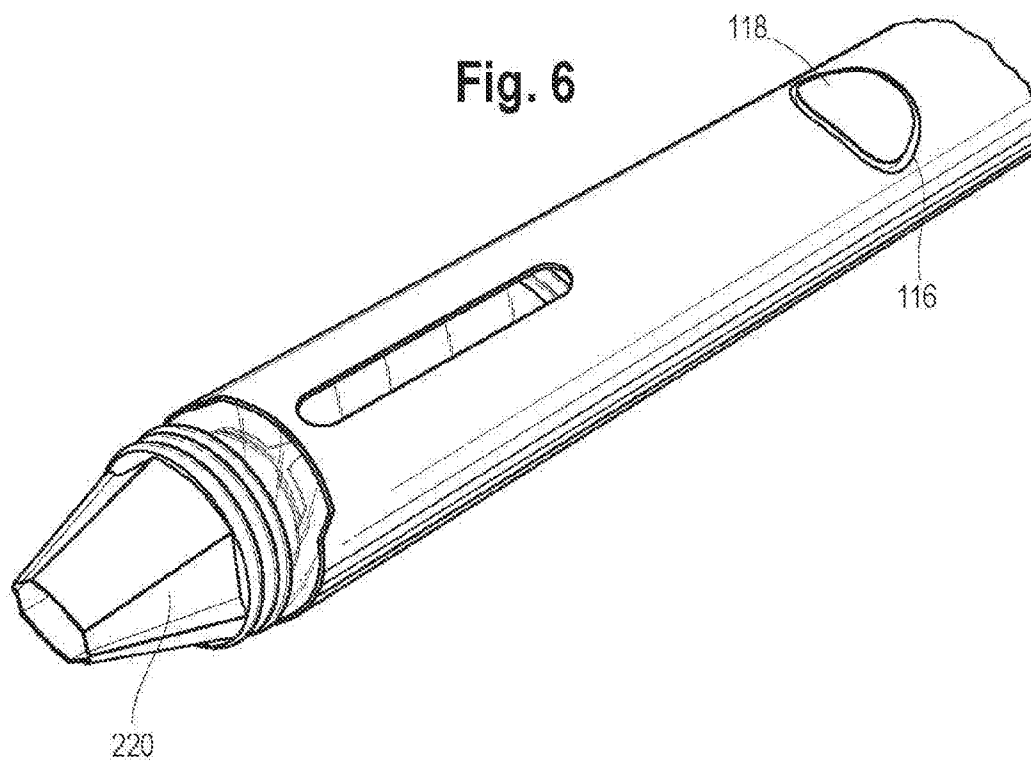


Fig. 8

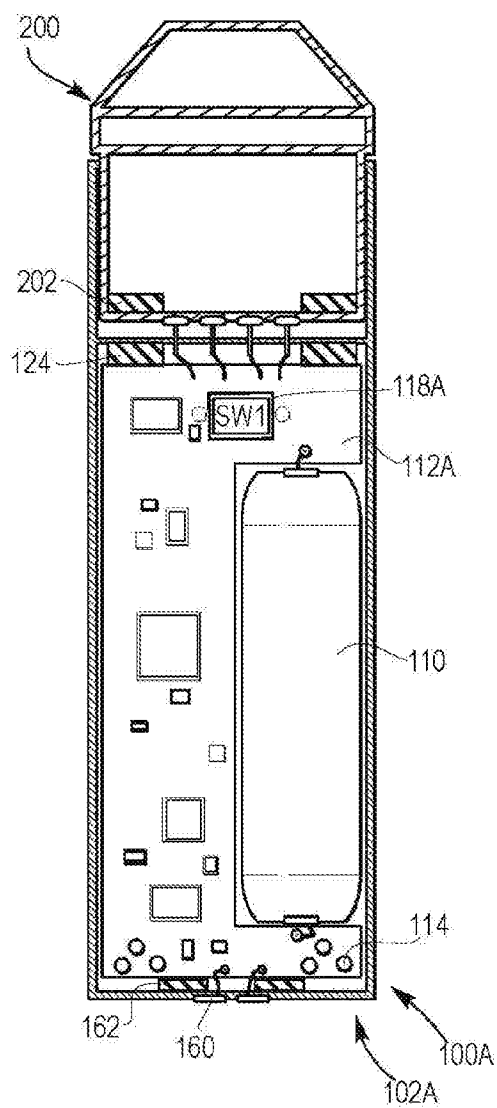


Fig. 9

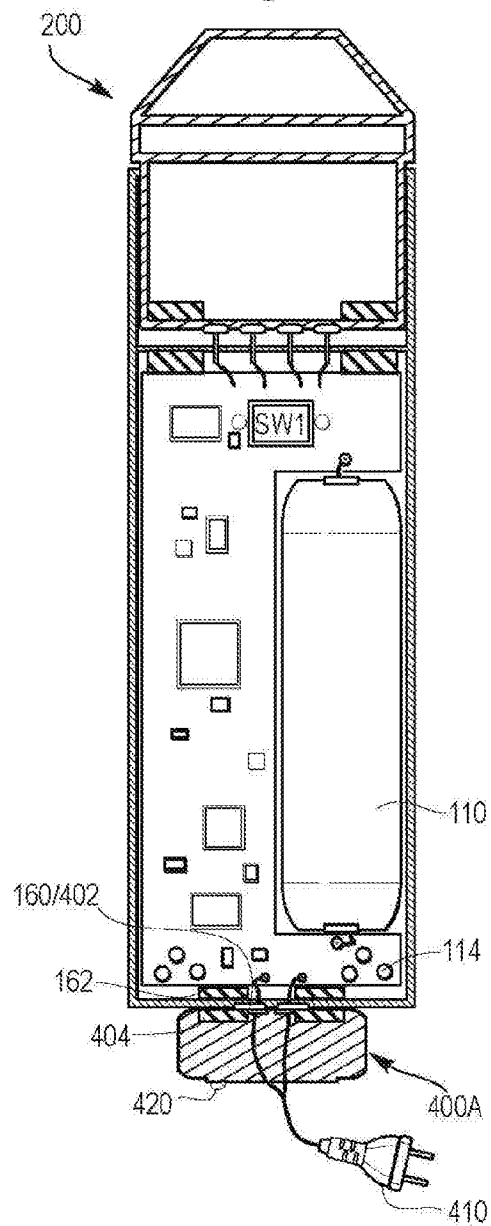


Fig. 10

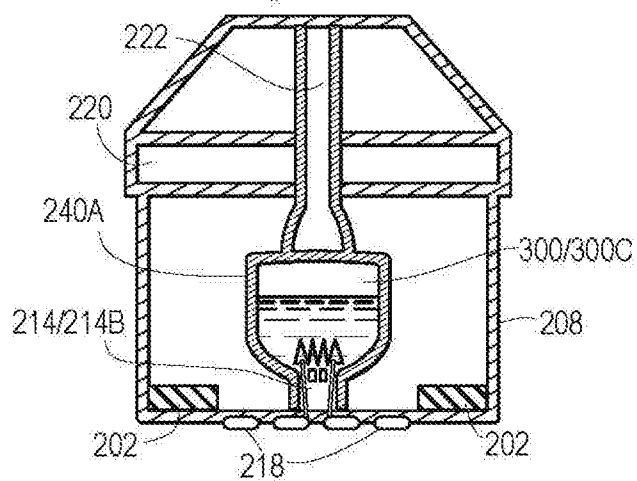
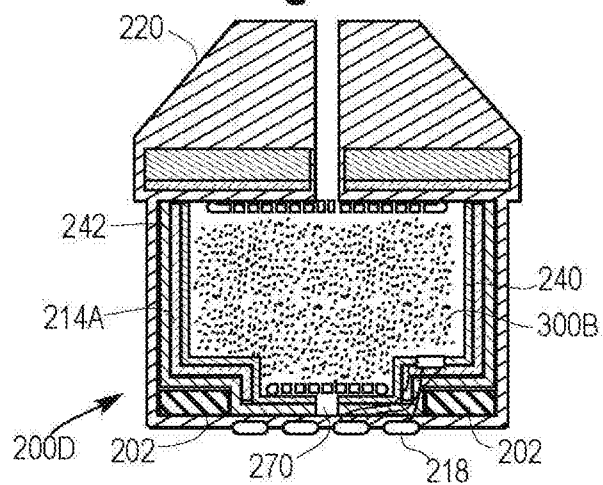


Fig. 11



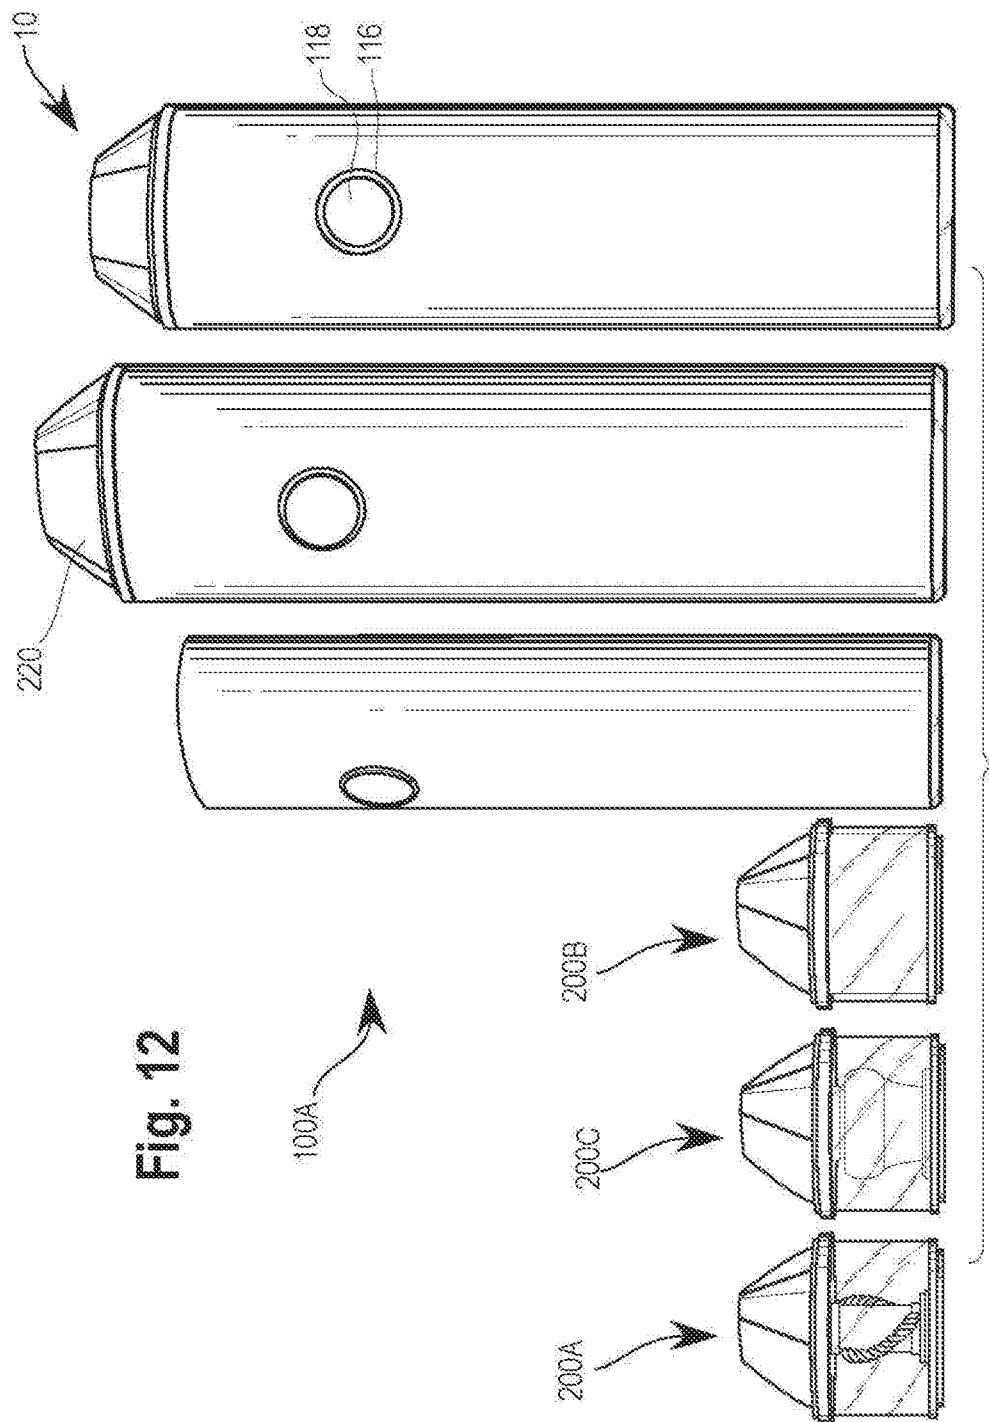


Fig. 13

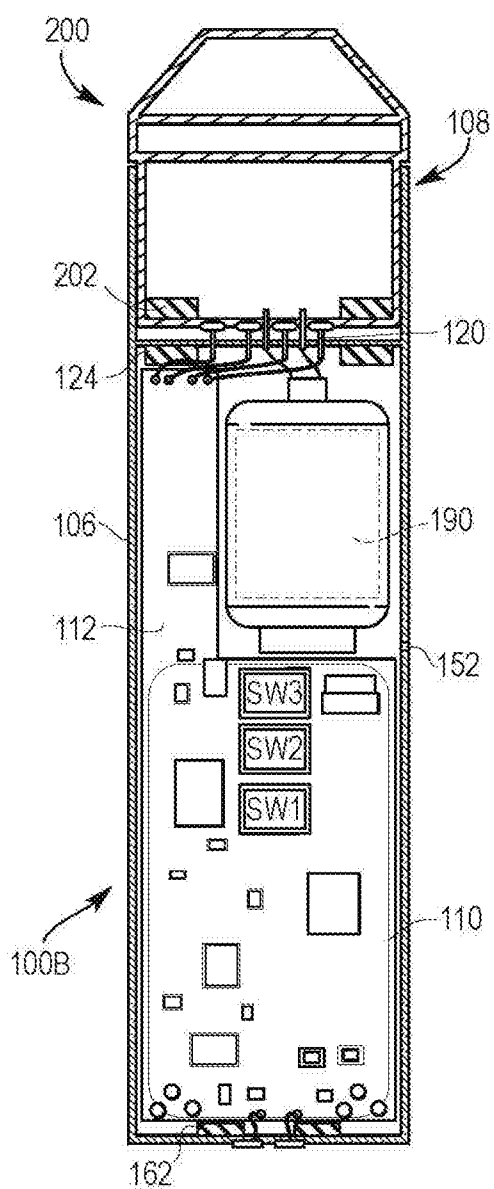
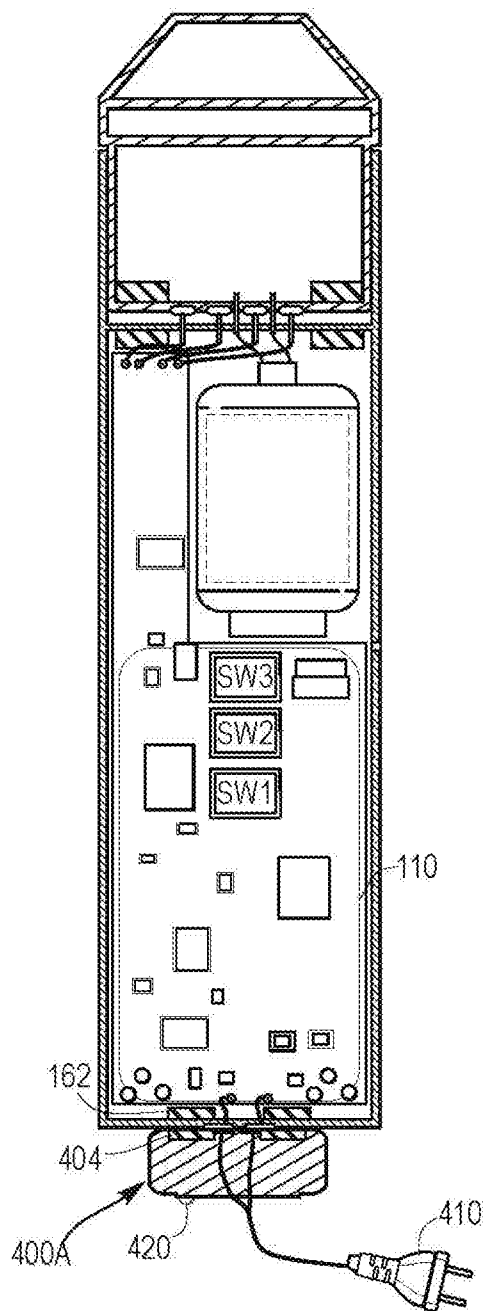


Fig. 14



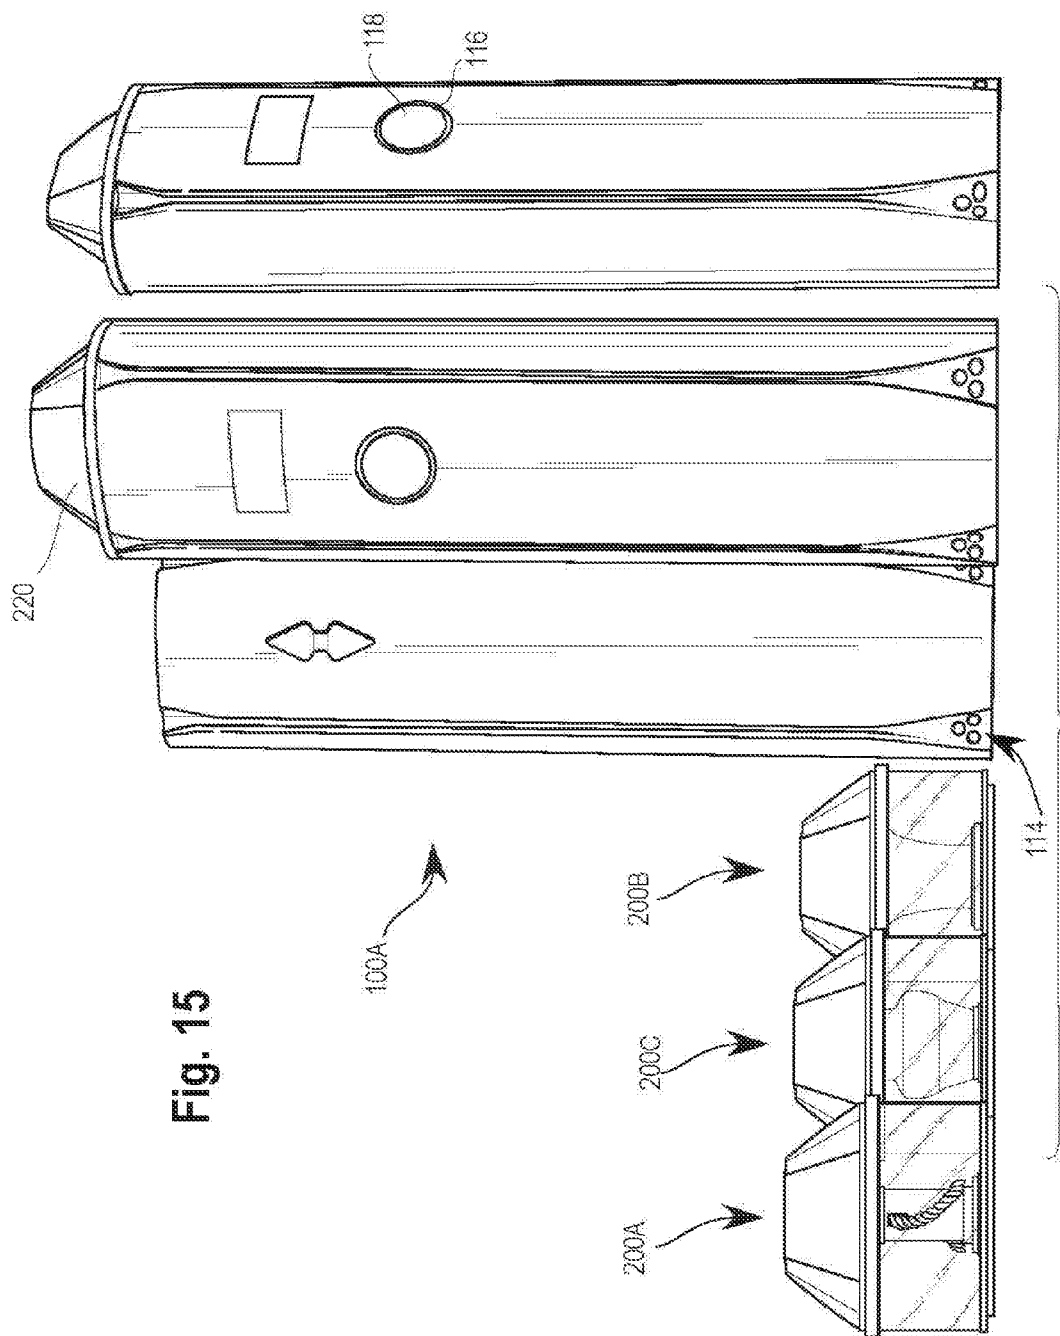


FIG. 16

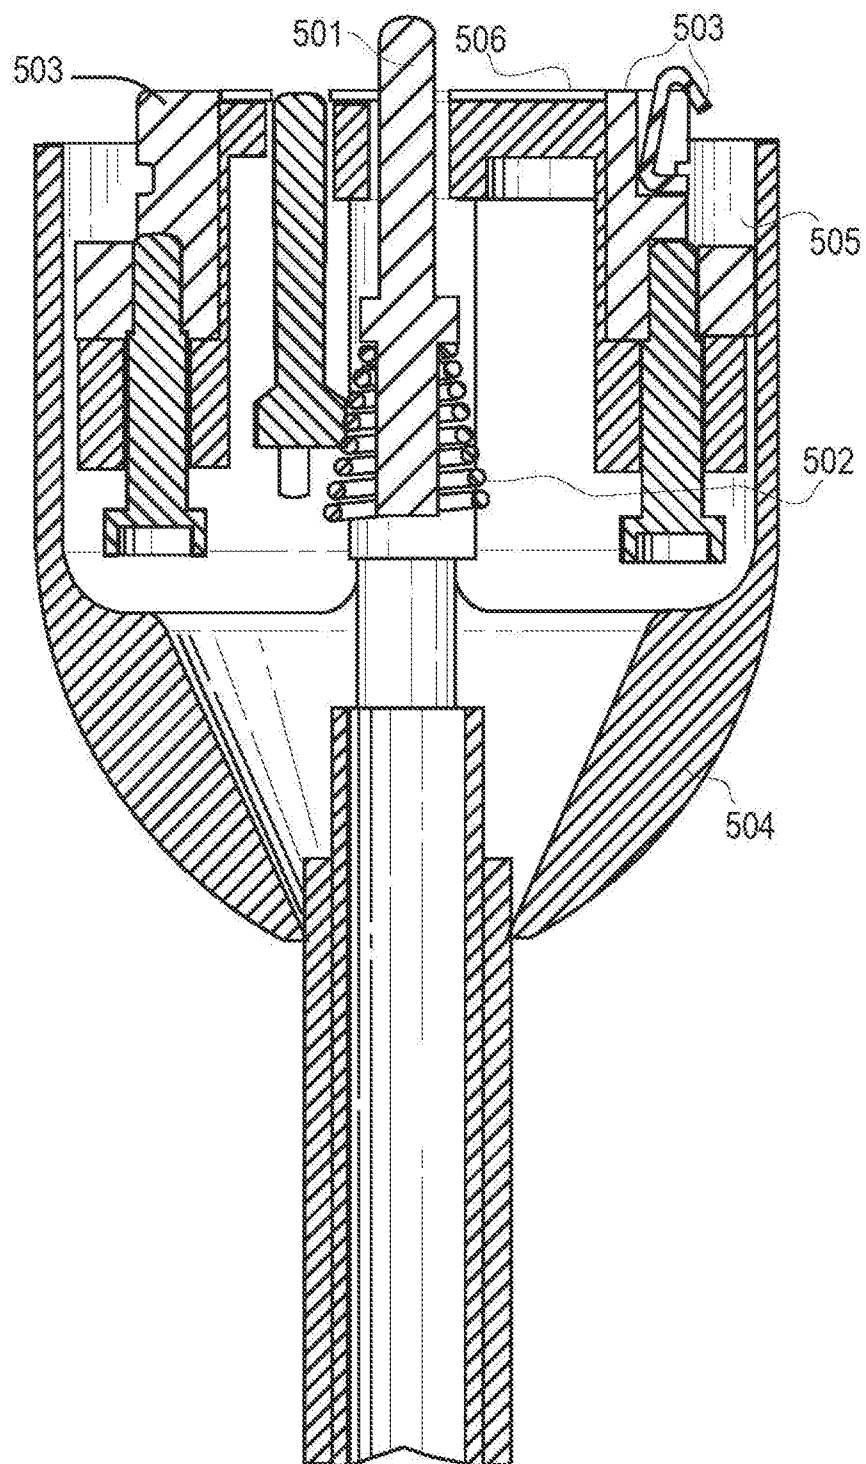


FIG. 17

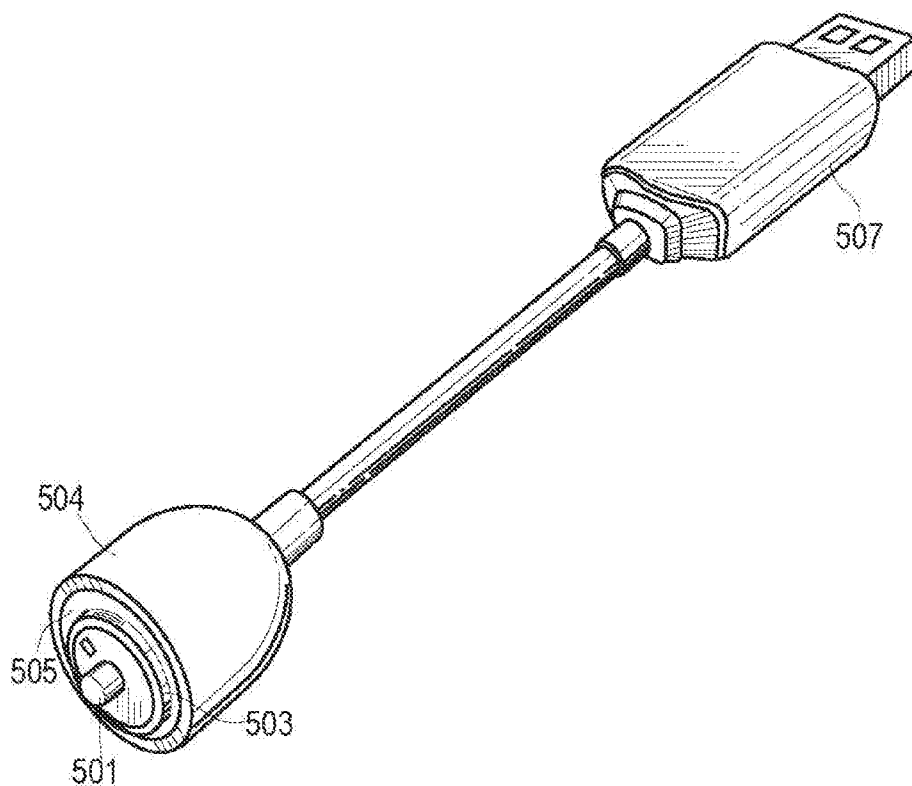


FIG. 18

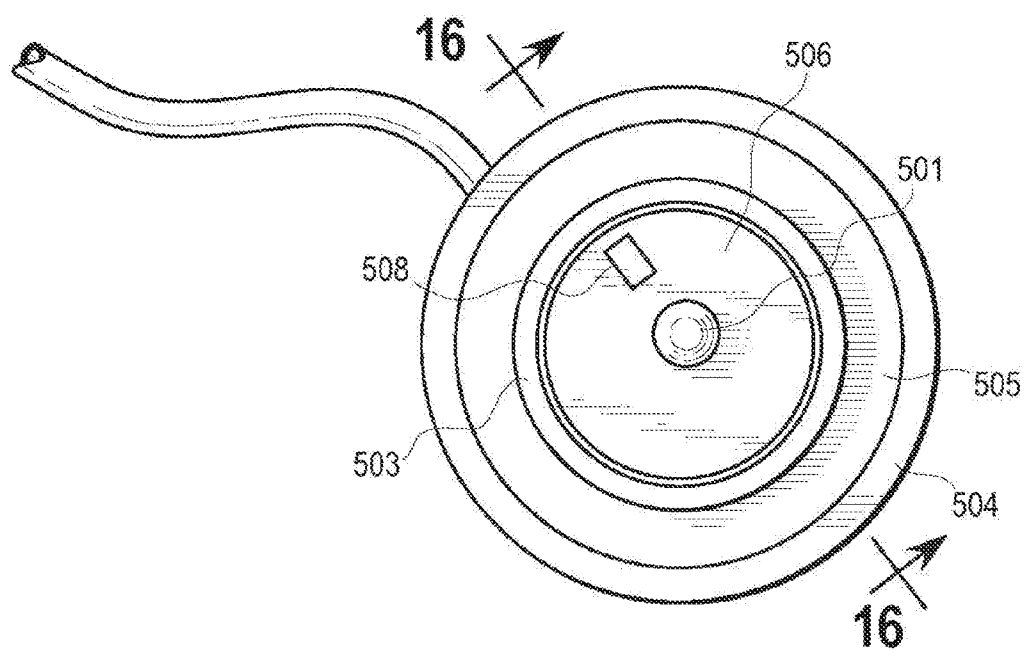


FIG. 19

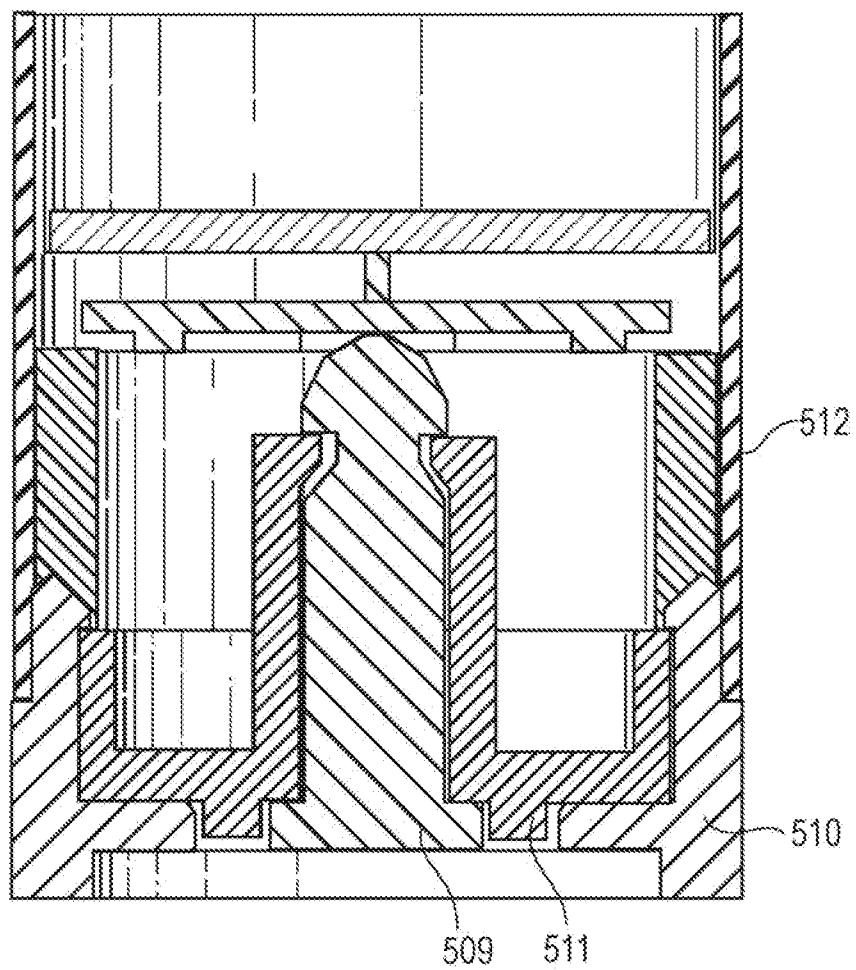


FIG. 20

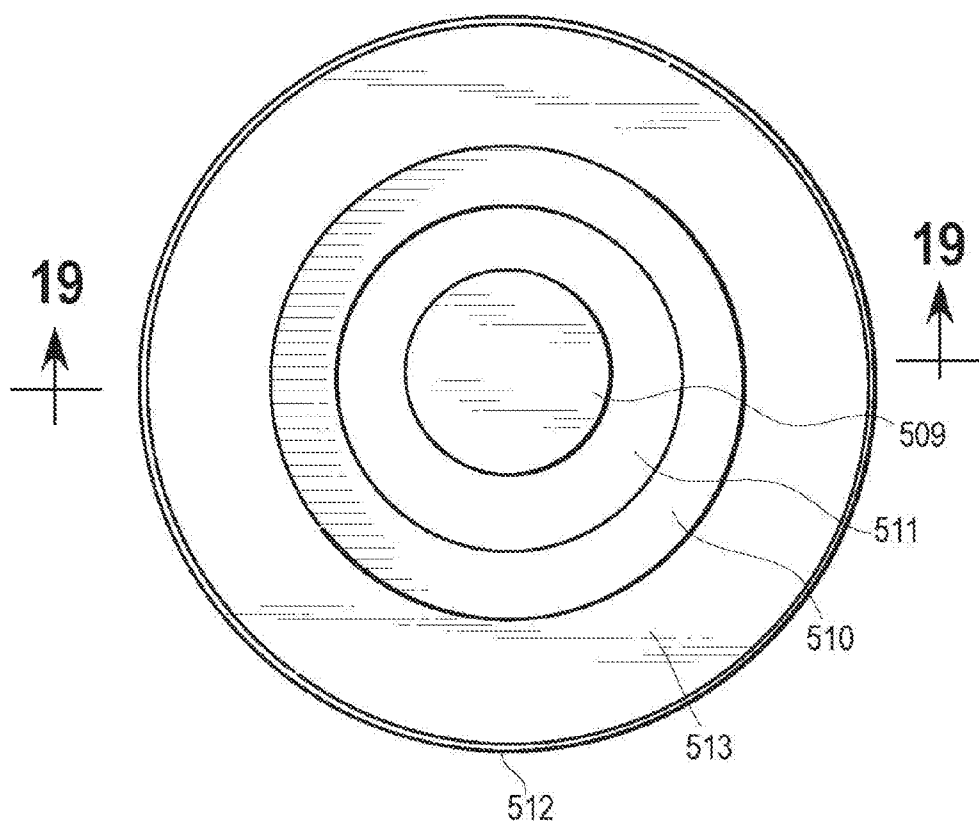


FIG. 21

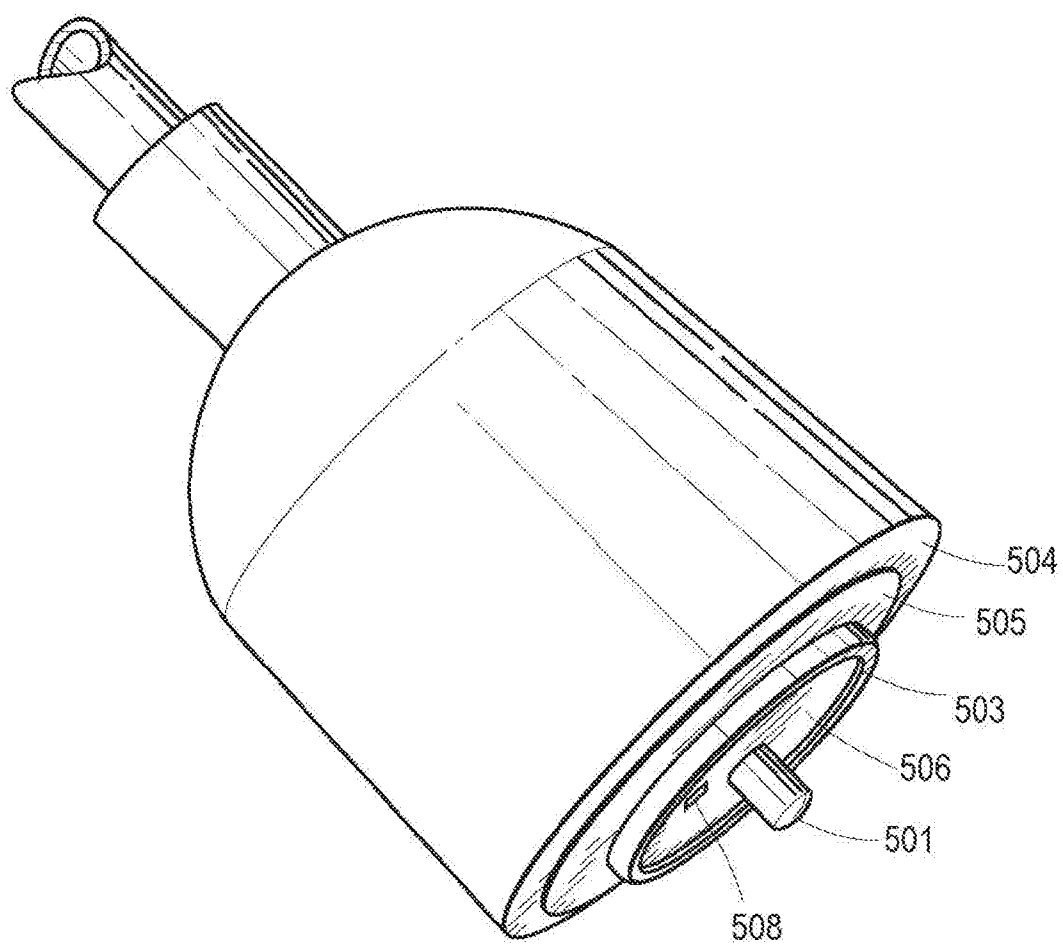


FIG. 22

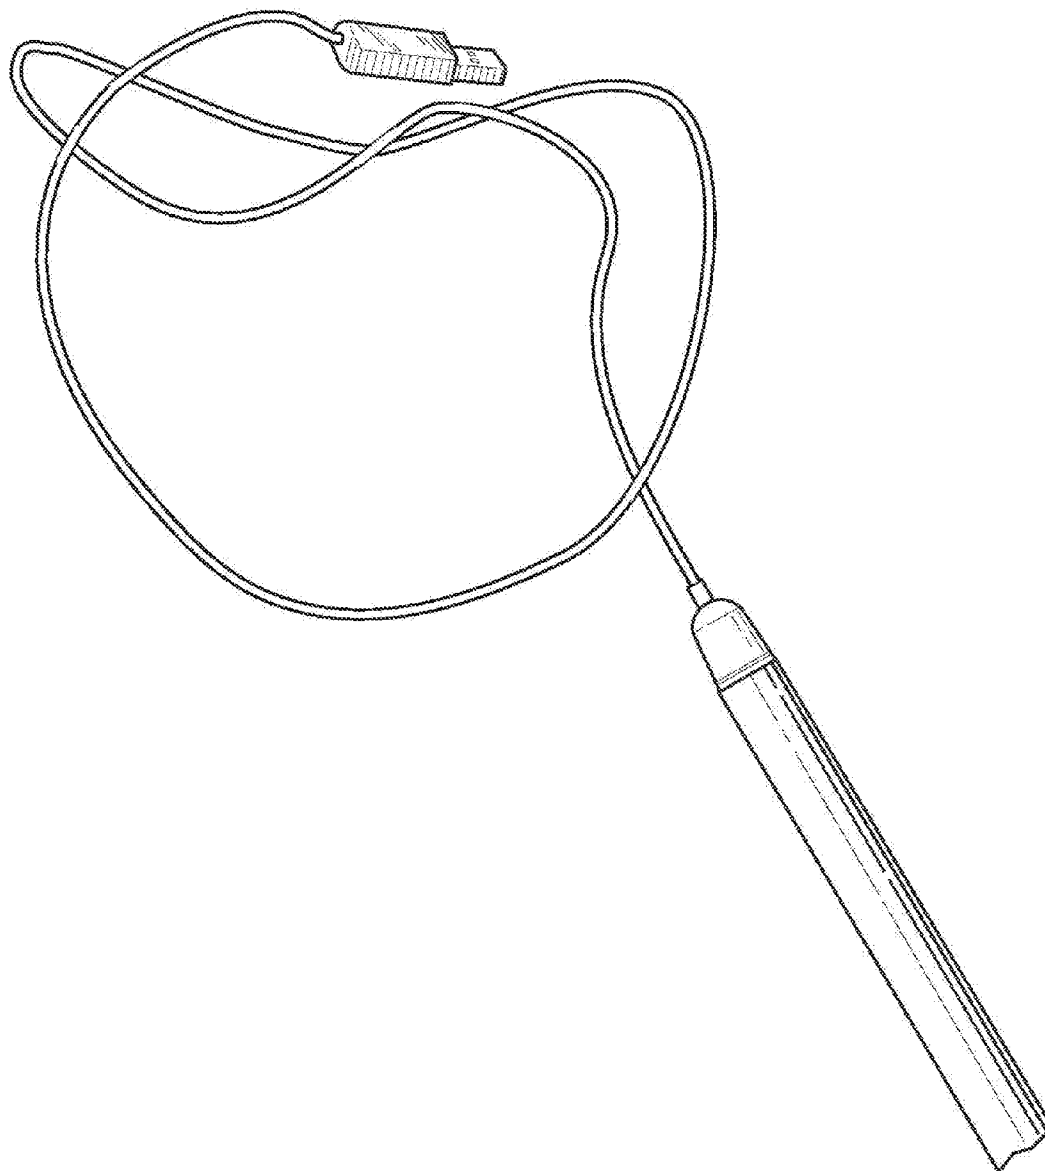


FIG. 23

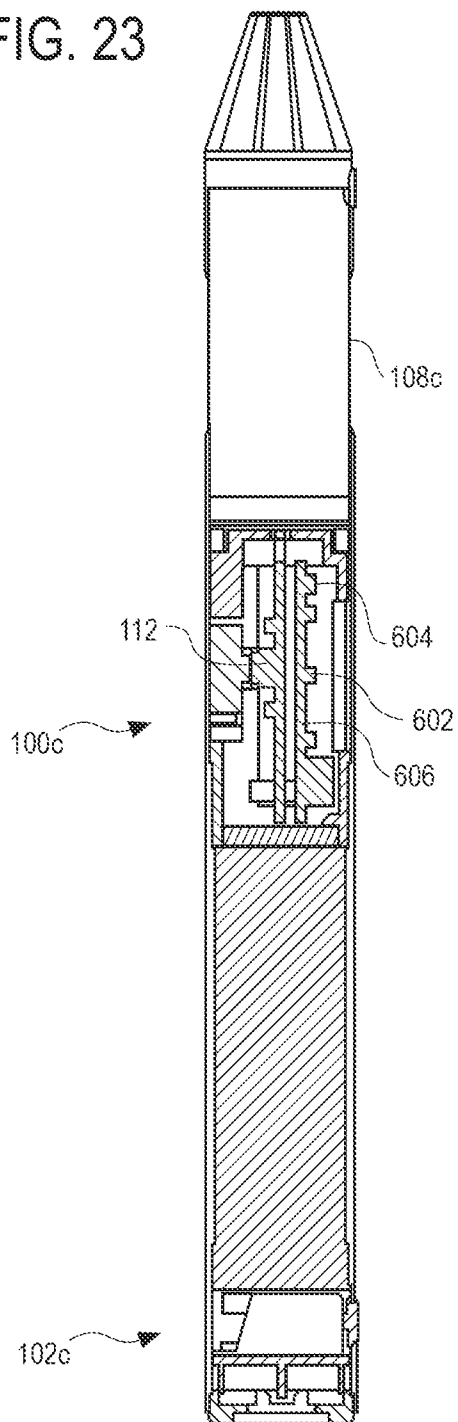


FIG. 24


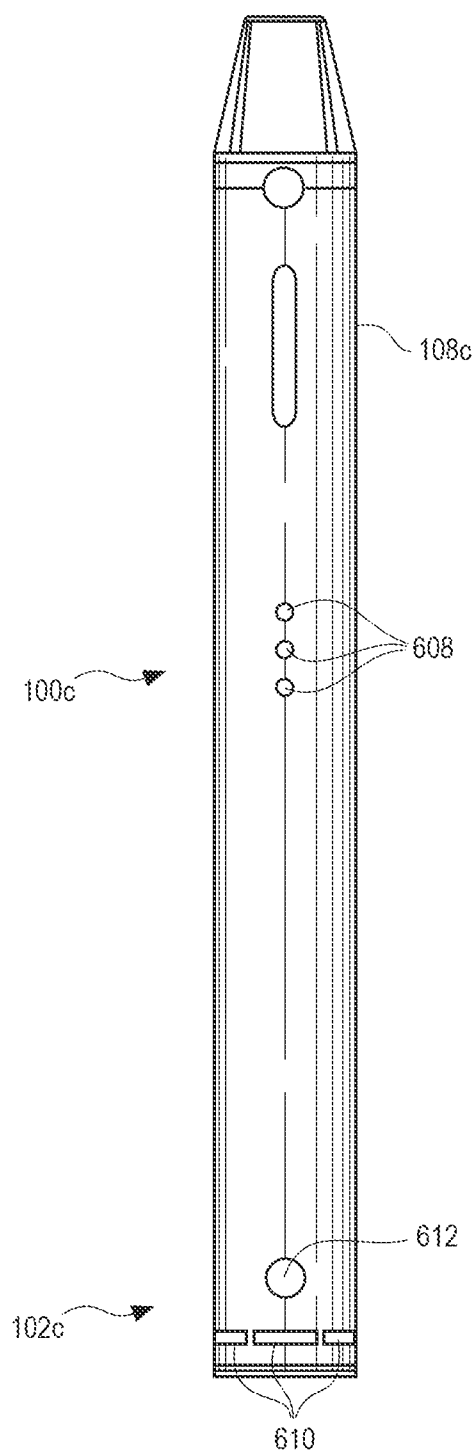


FIG. 25

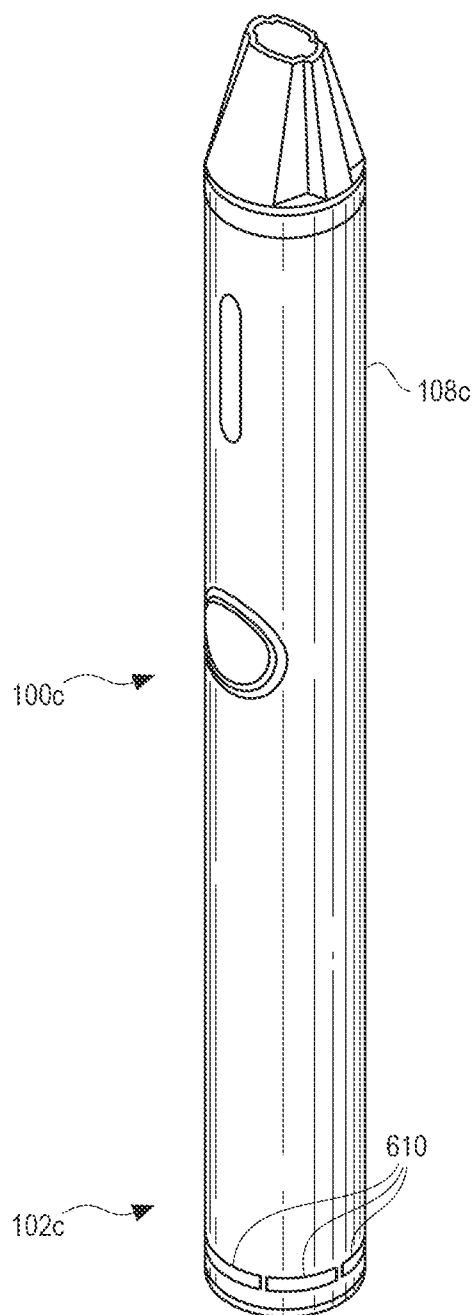

VAPORIZER

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation in part application of U.S. application Ser. No. 14/539,801 filed Nov. 12, 2014, which claims the benefit of U.S. Provisional Application No. 61/903,344 filed Nov. 12, 2013, U.S. Provisional Application No. 61/937,851, filed Feb. 10, 2014, and U.S. Provisional Application No. 62/015,148, filed Jun. 20, 2014, the disclosures of which are hereby incorporated herein by reference in their entireties.

FIELD OF THE INVENTION

[0002] This invention relates to the field of vaporizers, which may also be referred to as electronic cigarettes.

BACKGROUND

[0003] Electronic cigarettes have recently emerged as a new product for providing nicotine through a smokeless inhalation process. Typically, implementations consist of a power supply (typically a battery) and an atomizing device. In reusable electronic cigarettes the two items are separated into a battery and a cartomizer, to allow the disposal and replacement of a nicotine containing fluid cartomizer while preserving the more costly battery and associated circuitry (micro-controller, switch, indicating LED, etc.) for additional use. In disposable electronic cigarettes, the two items are combined to integrate the functions into one unit that is discarded after either the battery energy or the nicotine containing liquid is exhausted.

[0004] The electronic cigarette liquid used to vaporize ingredients such as nicotine is generally a solution of propylene glycol (PG), vegetable glycerin (VG), or polyethylene glycol 400 (PEG400), as well as their mixtures to which a flavor and/or nicotine has been added. The solution is often sold in a bottle (for refilling by the user) or in disposable cartridges or cartomizers. Many different flavors are incorporated into these liquids, including those that resemble the taste of regular tobacco, menthol, vanilla, coffee, cola and/or various fruits. Various nicotine concentrations are also available, and nicotine-free solutions are also common.

BRIEF SUMMARY

[0005] Embodiments of a vaporizer, in accordance with the disclosure, may include a shell having a battery segment and a cartomizer receiving segment, the cartomizer receiving segment defining a chamber having an insertion end distal from the battery segment and a base end proximate to the battery segment; a cartomizer insertable into the chamber at the insertion end, the cartomizer including: an outer cartomizer shell, a holding structure provided within, and secured to, the outer cartomizer shell, the holding structure including a basin dimensioned to hold a vaporizable substance, a heating element provided within the basin operable to heat the vaporizable substance, cartomizer electrical contacts provided on the exterior of the cartomizer, cartomizer electrical circuitry operable to direct an electronic current between the cartomizer electrical contacts and the heating element, and a mouthpiece fluidly communicable with the basin, the mouthpiece extending from the insertion end of the chamber when the cartomizer is inserted in the chamber, wherein the heating element is activated by the current and is operable to heat the

vaporizable substance to a vaporization temperature; a battery housed within the battery segment; battery electrical contacts provided between the base end of the chamber and the battery segment, the battery electrical contacts positioned to contact the cartomizer electrical contacts when the cartomizer is inserted in the chamber; battery electrical circuitry housed within the battery segment and operable to direct an electrical current between the battery, the battery electrical contacts, the cartomizer electrical contacts, the heating element, and the inserted cartomizer.

BRIEF DESCRIPTION OF THE FIGURES

[0006] FIG. 1 illustrates a front view of an embodiment of an electronic cigarette of the disclosure comprising a first embodiment of a battery portion with an embodiment of a cartomizer for use with a vaporizable liquid inserted into a cartomizer chamber of the first embodiment battery portion, the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

[0007] FIG. 1A illustrates a lateral cross sectional view of the electronic cigarette of FIG. 1 illustrating an electrical connector and magnets.

[0008] FIG. 1B illustrates a lateral cross sectional view of the electronic cigarette of FIG. 1 illustrating the end of the inserted cartomizer.

[0009] FIG. 1C illustrates a lateral cross sectional view of the electronic cigarette of FIG. 1 illustrating the cartomizer chamber.

[0010] FIG. 2 illustrates a front view of an embodiment of a cartomizer in accordance with the disclosure that may be inserted into the cartomizer chamber of the battery portion of FIG. 1, the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

[0011] FIG. 2A illustrates a lateral cross sectional view of the cartomizer of FIG. 2 illustrating the end of the cartomizer at the inserted end.

[0012] FIG. 2B illustrates a lateral cross sectional view of the cartomizer of FIG. 2 illustrating the air hole structure.

[0013] FIG. 2C illustrates a front view of an embodiment of a cartomizer in accordance with the disclosure that may be inserted into the cartomizer chamber of an embodiment of a battery portion of the disclosure, the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

[0014] FIG. 3 illustrates a front view of an embodiment of the battery portion of FIG. 1 with an embodiment of a charger, in accordance with the disclosure, inserted into the cartomizer chamber, with the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

[0015] FIGS. 4-7 illustrate embodiments of electronic cigarettes comprising the first battery portion of FIGS. 1-3 and the cartomizers of FIGS. 1 and 2, in accordance with the disclosure.

[0016] FIG. 8 illustrates a front view of an embodiment of an electronic cigarette, in accordance with the disclosure, comprising another embodiment of a battery portion with the outer shell of the second embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

[0017] FIG. 9 illustrates a front view of the electronic cigarette of FIG. 8 with a charger attached, with the outer shell of

another embodiment battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

[0018] FIG. 10 illustrates a front cross sectional view of an embodiment of a cartomizer in accordance with the disclosure.

[0019] FIG. 11 illustrates a front view of an embodiment of a cartomizer in accordance with the disclosure.

[0020] FIG. 12 illustrates embodiments of electronic cigarettes comprising the second battery portion of FIGS. 8-9 and the cartomizers of FIGS. 8-10.

[0021] FIG. 13 illustrates a front view of an embodiment of an electronic cigarette in accordance with the disclosure, with the outer shell of the embodiment of the battery portion shown transparently so as to illustrate the inner components of the electronic cigarette.

[0022] FIG. 14 illustrates a front view of the electronic cigarette of FIG. 13 with a charger attached.

[0023] FIG. 15 illustrates embodiments of the electronic cigarette of FIGS. 13-14 in accordance with the disclosure.

[0024] FIG. 16 illustrates a longitudinal cross sectional view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

[0025] FIG. 17 illustrates a perspective view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

[0026] FIG. 18 illustrates a lateral view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

[0027] FIG. 19 illustrates a longitudinal cross sectional view of an embodiment of charger contacts of a vaporizer or electronic cigarette for connecting with a vaporizer or electronic cigarette charger of the present invention.

[0028] FIG. 20 illustrates a lateral cross sectional view of an embodiment of charger contacts on a vaporizer or electronic cigarette for connecting with a vaporizer or electronic cigarette charger of the present invention.

[0029] FIG. 21 illustrates a perspective view of an embodiment of charger contacts on a power cord of a vaporizer or electronic cigarette charger of the present invention.

[0030] FIG. 22 illustrates a side view of an embodiment of a charger of the present invention in contact with charger contacts of a vaporizer or electronic cigarette for charging a vaporizer or electronic cigarette battery.

[0031] FIG. 23 illustrates a front view of an embodiment of an electronic cigarette of the disclosure comprising a first embodiment of a battery portion with an embodiment of a cartomizer for use with a vaporizable liquid inserted into a cartomizer chamber of the embodiment of the battery portion, the outer shell of the first embodiment battery portion shown transparently so as to illustrate the inner components of the battery portion.

[0032] FIG. 24 is a front view of the electronic cigarette embodiment of FIG. 23.

[0033] FIG. 25 is a front perspective view of the electronic cigarette embodiment of FIG. 23.

DETAILED DESCRIPTION

[0034] The following detailed description and the appended drawings describe and illustrate some embodiments of the disclosure for the purpose of enabling one of ordinary skill in the relevant art to make and use these embodiments. As such, the detailed description and illustra-

tion of these embodiments are purely illustrative in nature and are in no way intended to limit the scope of the disclosure in any manner. It should also be understood that the drawings are not necessarily to scale and in certain instances details may have been omitted, which are not necessary for an understanding of the embodiments, such as details of fabrication and assembly. In the accompanying drawings, like numerals represent like components.

[0035] Embodiments of a vaporizer, in accordance with the disclosure, may include a shell having a battery segment and a cartomizer receiving segment, the cartomizer receiving segment defining a chamber having an insertion end distal from the battery segment and a base end proximate to the battery segment; a cartomizer insertable into the chamber at the insertion end, the cartomizer including: an outer cartomizer shell, a holding structure provided within, and secured to, the outer cartomizer shell, the holding structure including a basin dimensioned to hold a vaporizable substance, a heating element provided within the basin operable to heat the vaporizable substance, cartomizer electrical contacts provided on the exterior of the cartomizer, cartomizer electrical circuitry operable to direct an electronic current between the cartomizer electrical contacts and the heating element, and a mouthpiece fluidly communicable with the basin, the mouthpiece extending from the insertion end of the chamber when the cartomizer is inserted in the chamber, wherein the heating element is activated by the current and is operable to heat the vaporizable substance to a vaporization temperature; a battery housed within the battery segment; battery electrical contacts provided between the base end of the chamber and the battery segment, the battery electrical contacts positioned to contact the cartomizer electrical contacts when the cartomizer is inserted in the chamber; battery electrical circuitry housed within the battery segment and operable to direct an electrical current between the battery, the battery electrical contacts, the cartomizer electrical contacts, the heating element, and the inserted cartomizer.

[0036] Further embodiments of a vaporizer may include a container having container walls provided proximate to the basin, the container dimensioned such that the vaporizable substance may pass from the container to the basin. The holding structure may further include a stabilizing element connectable with the outer cartomizer shell, the basin secured to the stabilizing element. The stabilizing element may include a first threaded portion threadably connectable with the outer cartomizer shell. The vaporizer may also include a container including container walls and a threaded container portion, the container dimensioned such that the vaporizable substance is passable from the between the container walls to the basin, and the stabilizing element includes a second threaded portion threadably engagable with the threaded container portion. The vaporizer may include at least one air passage provided through at least one hole in the outer shell and at least one hole in the container wall. The vaporizable substance may be a wax. The vaporizer may further include a cartomizer printed circuit board in electronic communication with the cartomizer electrical circuitry.

[0037] With reference now to FIGS. 1 and 2, an embodiment of an electronic cigarette 10 is provided in accordance with the disclosure. Electronic cigarette 10 may include a battery portion connectable with a vaporization unit or cartomizer 200 for holding a vaporizable substance 300. The battery portion may include a battery housing segment 102 provided proximate to the first end 102A of the battery por-

tion, and a second cartomizer receiving segment **104** provided proximate a second end **104A** of the battery portion. The battery portion may include an outer shell **106** for covering or protecting one or more of the components of battery portion **100** as may be internally provided as described herein. Outer shell **106** may be substantially constructed from metal, plastic, or any other known or to be developed material suitable for protecting internal components of electronic cigarette **10**, including the electrical components described herein. Battery housing segment **102** and cartomizer receiving segment **104** may commonly share outer shell **106**. A cartomizer chamber **108** may be provided within at least a portion of cartomizer receiving segment **104**. A cartomizer **200** may be insertable into the cartomizer chamber **108** in accordance with embodiments of the disclosure. Shell **106** may cover cartomizer chamber **108** thereby protecting an inserted or received cartomizer **200**.

[0038] Electrical components for operating electronic cigarette **10** may be provided within battery housing segment **102**. A battery **110** may be provided in order to provide electrical power as may be required by various features of the electronic cigarette **10**. In some embodiments, battery **110** may be disposable, such as an AA or AAA cell battery, while in other embodiments, battery **110** may be of a rechargeable type, for example a 13450 lithium ion battery, an 18650 2600 mAh lithium ion cell, or flat lithium ion 903180 cell rated at 2300 mAh. Multiple batteries **110** may be used in series to generate higher voltages capable of shortening times to achieve vaporization temperatures in the cartomizer **200**. A printed circuit board (PCB) **112** may also be provided for controlling one or more functions of electronic cigarette **10**. PCB **112** may be electrically connected to battery **110** through circuitry in order to direct current flow as required in accordance with the disclosure. PCB **112** may include one or more integrated circuit chips as well as a micro control unit. A boost chip may also be provided in order to amplify voltage with at least portion of circuitry, as may be required in order to accomplish various functions described herein. PCB **112** may include a light emitting diode (LED), a microcontroller, a plurality of capacitors, a plurality of transistors, and a plurality of resistors or any combination thereof. An accelerometer for sensing gravity shifts of electronic cigarette **10** may be further provided. The accelerometer may be operable to detect tilting or changes in orientation of battery portion **100**, and PCB **112** may be accordingly operable to react to a shift in orientation detected by the accelerometer. For instance, electronic cigarette **10** including an accelerometer may be activated by shaking or inverting electronic cigarette **10**. Any known or to be discovered circuitry or arrangement of the components of PCB **112** are contemplated within the disclosure in order to achieve the desired functions of electronic cigarette **10** as described herein.

[0039] A variety of indicator lights forming one or more illuminative indicators may be provided in embodiments of the disclosure. One such indicator may be a battery end indicator **114** provided as a ring extending about at least a portion of shell **106** at or proximate to first end **102A**. In one such embodiment, battery end indicator **114** may be provided at or proximate to first end **102A** and includes one or more LED lights having one or more colors. Each color may, for instance, indicate a status of electronic cigarette **10**. The status may be associated with the power remaining of battery **110**, an activation state of electronic cigarette **10**, the heating level of an inserted cartomizer **200**, or any other status which

may be desirable to communicate to a user of electronic cigarette **10** through a light color. For instance, when electronic cigarette **10** is activated such that a user is either actively inhaling cigarette **10**, as described in accordance with disclosure, or cigarette **10** is in a state such that the user could inhale, indicator **114** may be red or reddish. In such an embodiment, battery end indicator **114** could extend about at least a portion of the first end **102A** such that when indicator **114** emanates a red or reddish color a user may associate the red color at or proximate to first end **102A** with the red glow of a lit cigarette. In another embodiment, an indicator ring may be provided to illuminate one or more colors associated with the charge or power state of battery **110**. For instance, battery end indicator **114** may illuminate green or blue when the battery is operating with a sufficient charge, and yellow or red when the battery is operating with a low charge such that the user should consider charging battery **110**, in accordance with the disclosure. A ring indicator **116** may be provided on or proximate to an activation button **118**, which may function to activate cigarette **10** as described herein in accordance with the disclosure. While activation button **118** may be provided on the surface of outer shell **106**, and ring indicator **116** may substantially circumference button **118**. Ring indicator **116** may include one or more LED lights having one or more colors to indicate various statuses of electronic cigarette **10**. Status changes of electronic cigarette **10**, such as insertion of cartomizer **200**, activation of electronic cigarette **10** by pressing button **118**, or deactivation of electronic cigarette **10** by pressing button **118** an additional time may each result in a different associated and predetermined color. The activation of the appropriate LED light or lights may be controlled by PCB **112**. In embodiments where button **118** is coplanar or aligned with the surface of outer shell **106**, as described herein, ring indicator **116** may also be coplanar or aligned with button **118** and the surface of outer shell **106**. Another indicator light may be provided at or proximate to cartomizer end **104A**. In one embodiment, in order to transmit a lighting effect from the battery segment **102**, where battery **110** and PCB **112** may be housed, to the cartomizer end **104A**, one or more LED lights may be provided in the cartomizer receiving segment **104** at or proximate to the battery segment **102**. One or more clear tubes or optic fibers may be also be provided within or just below the surface of outer shell **106**, with the tubes or fibers terminating at or proximate to the cartomizer end **104A**. The resulting effect is an attractive, illuminative effect where the LED lights provided in the cartomizer segment are projected into and transmitted along the fibers. PCB **112** could potentially alternate or change the LED light colors projected into the fibers. The color alternation could be periodic, creating a steady change of colors, or the color alteration could be responsive to a status change of the electronic cigarette **10**.

[0040] In order to provide an electrical connection between PCB **112** and an inserted cartomizer **200**, an electrical connector **120** may be provided and may include a plurality of pogo pins **120**. Pogo pins are devices used to establish connections between two circuits, and each may take the form of a cylinder containing one or more spring-loaded pins **122**, each retractable upon compression, for instance by cartomizer **200** when it is inserted in cartomizer chamber **108**. In one such embodiment, three pogo pins **122** may be provided, one for establishing positive current connection, one for establishing a negative current connection, and one for establishing a ground current connection. Each pogo pin **122** may

be connected to PCB 112, which may control current outputted to pogo pins 122. For instance, PCB 112 may operate to vary or intermittently activate current flow to connector 120, the variation thereby regulating the activation of a heating element in a connected cartomizer. When cartomizer 200 is not received in cartomizer chamber 108, a head portion of each pogo pin may extend into cartomizer chamber 108. When cartomizer 200 is received in cartomizer chamber 108, the pins 122 are contacted and at least partially compressed into battery portion 102. Pins 122 may be contacted or pressed against electrical receivers provided on cartomizer 200 as described herein, thereby establishing an electrical connection between PCB 112 and cartomizer 200. Additional pins 122 are contemplated in embodiments of the disclosure, such as a fourth pin for providing an electrical connection to another element, such as the LED lights described above or a temperature sensor 260 described herein and illustrated in FIG. 2.

[0041] An additional embodiment of connector 120 may operate to identify information from an inserted cartomizer 200 based on voltage drop over one or more pins 122. For instance, connector 120 may include a controlling pin 122 from which connected PCB 112 may detect variations in voltage drop across the pin when connected to various types of cartomizers 200. Circuitry provided within a first type of cartomizer 200 may effectuate a first voltage drop over a controlling pin 122, while circuitry provided within a second type of cartomizer 200 may effectuate a second voltage drop over controlling pin 122 when cartomizer 200 is inserted in chamber 108. If PCB 112 detects a first voltage drop, the cartomizer 200 is identified as a first type of cartomizer, whereas if PCB 112 detects a second voltage drop, the cartomizer is identified as second type of cartomizer. A first cartomizer type may hold a first type of vaporizable substance 300, while a second cartomizer type may hold a second type of vaporizable substance 300. In one embodiment, connector 120 includes three pins 122: a positive pin, a ground pin, and a controlling pin. A controlling pin may also serve a dual function in that communication between a sensor 260 may also occur through a controlling pin 122. Other known or to be developed devices or connectors are contemplated within the disclosure for establishing an electrical current between PCB 112 and cartomizer 200.

[0042] Various features may be further provided in embodiments of electronic cigarette 10 in order to secure and align cartomizer 200 within cartomizer chamber 108. For instance, at least one magnet 124 may be provided in or proximate to chamber 108. A magnet 202 of opposing polarity to magnet 124 may be placed on a surface of cartomizer 200 so as to secure cartomizer 200 within chamber 108 when magnets 124, 202 (see FIGS. 1A, 1B) contact each other. It should be understood and appreciated that, in some embodiments, battery portion magnet(s) 124 may attach to cartomizer metallic surface(s) 202 and, conversely, cartomizer magnet(s) 202 may attach to battery portion metallic surface(s) 124, thereby establishing a magnetic connection between battery portion 100 and cartomizer 200. Other known or to be discovered means of securing cartomizer 200 in cartomizer chamber 108 are contemplated within the disclosure, including but not limited to, snap fit connectors, friction fit, threaded insertion of cartomizer 200 into chamber 108, a suction fit using pressurized means or any other suitable method of securing known or to be developed in the art.

[0043] One or more alignment features or mechanism may be included in order to ensure proper placement of cartomizer 200 in cartomizer chamber 108. In one embodiment, two magnets 124 may be provided proximate to connector 120 (see FIG. 1A), each magnet 124 having an opposed polarity. In this embodiment, two cartomizer magnets 202 (see FIG. 1B) may be provided of opposing polarity at an insertion end 210 of cartomizer 200. Because of the opposing polarities of magnets 124/202, the cartomizer 200 may only be inserted and secured in one direction or orientation, thereby facilitating alignment of cartomizer 200 within chamber 108. An alignment protrusion or peg 126 (see FIG. 1C) may be provided on a portion of an interior surface of chamber 108, and an alignment slit or slot 204 may be provided on a portion of cartomizer 200. Alignment protrusion 126 may be dimensioned to fit or slid along slit 204 so that cartomizer 200 may only be inserted in a particular, proper orientation. In another embodiment, a slit, crevice, or cutout may be provided on a portion of shell 106, with a matching protrusion provided on a portion cartomizer 200. For instance, a cutout may be provided on an upper rim of shell 106 at cartomizer receiving segment 104, while a matching protrusion may be provided on a portion of cartomizer 200 proximate to insertion end 210, with battery portion cutout engageable with the cartomizer protrusion when the cartomizer is properly aligned so as to ensure proper orientation of cartomizer 200 within chamber 108. Ensuring cartomizer 200 is properly oriented within chamber 108 in turn ensures proper contacting of cartomizer 200 with connector 120, and therefore proper functioning of electronic cigarette 10.

[0044] One or more windows 130 may be provided in outer shell 106 (see FIG. 1). Windows 130 may be made of a translucent material, such as glass or substantially clear plastic, in order to view internal components of battery portion 100. Window 130 may also be a slit cut into shell 106. For instance, in one embodiment, window 130 may be provided on or proximate to cartomizer receiving segment 104 and, more particularly, cartomizer chamber 108 so as to permit a user of electronic cigarette 10 to view the cartomizer 200 when it is inserted into cartomizer chamber 108.

[0045] One embodiment of cartomizer 200 for holding vaporizable material 300 is cartomizer 200A for holding a vaporizable fluid 300A, an embodiment of which is illustrated in FIG. 1. Vaporizable fluid 300A may be, for example, any known or to be developed fluid useful to vaporize, for inhalation nicotine, flavor or other desired ingredients in an electronic cigarette, such fluids include propylene glycol (PG), vegetable glycerin (VG), or polyethylene glycol 400 (PEG400), as well as their mixtures to which a flavor and/or nicotine has been added. Cartomizer 200A may be substantially elongate and insertable into chamber 108. Chamber 108 is defined by outer shell 106 and electrical connector 120. An insertion end 210 of cartomizer 200A, defined opposite of a mouthpiece end 212, may be inserted into the chamber first and may ultimately contact or be positioned proximate to connector 120 of battery portion 100. Cartomizer 200A may include a body 208 for holding fluid 300A. At least a portion of body 208 may be composed of translucent or substantially translucent material, such as glass or plastic, so that a user may see fluid 300A held within. The portion of body 208 composed of translucent material may be alignable with window 130 and may be proximate to LED lights or fiber optics so as to illuminate cartomizer 200A as it is inserted into chamber 108. The illumination may occur automatically

upon insertion, or may be programmed to illuminate upon activation or manipulation of a switch, such as button 118.

[0046] In order to vaporize fluid 300A, a heating element 214 and a wicking element 216 may be provided within cartomizer body 208. An electrical current may be transmitted to heating element 214 through circuitry in electrical communication with electrical contacts, which contact pins 122 (see FIG. 1A) when cartomizer 200A is inserted into chamber 108. Once fluid 300A is heated to an optimal vaporizing temperature, the user may inhale the vaporized fluid 300A through a mouthpiece 220 provided on body 208 at or proximate to mouthpiece end 212. The vaporized fluid may travel through an inhalation tube 222 in fluid connection with heating element 214 and wick 216. Inhalation tube 222 may also be in fluid communication with one or more holes or ducts provided, for instance, in sides of outer shell 106 in order to permit air flow through cartomizer body 208. The electrical current transmitted to heating element 214 may be controlled by PCB 112 through connector 120 when cartomizer 200A is inserted into chamber 108. The electronic cigarette 10 may be manually controlled, as a user may press button 118 to initiate a charge to heating element 214, which in turn may heat fluid 300A to a vaporized temperature which a user may inhale through mouthpiece 220. An automatically heating version of electronic cigarette 10 is also contemplated with disclosure, where a pressure switch integrated with connector 120 may activate current flow from PCB to heating element 214 rather than by manual activation from switch 118.

[0047] So that a user may refill fluid 300A held in body 208, mouthpiece 220 may be removable from body 208. Mouthpiece 220 may include a screw thread 224 so that mouthpiece 220 may be threadably engaged with mouthpiece end 212 of body 208 or, alternatively, may be press fit onto or into mouthpiece end 212 of body 208. A bushing 226, which may be a ring formed from plastic, rubber, or any other suitable material, may be provided to help stabilize and retain cartomizer 200 tightly fit in chamber 108. Additionally, a colored ring or logo 228 may be provided about a portion of cartomizer body 208 in order to identify the type or cartomizer being used.

[0048] With reference now to FIGS. 2, 2A and 2B, an additional embodiment of cartomizer 200B is provided for holding a dry vaporizable material 300B, such as dry tobacco. A container 240 may be provided within cartomizer body 208. Container 240 may be made from a material having a high thermal conductivity, such as metal, in order to transmit heat from a heating element 214A provided about at least a portion of container 240. In that at least a portion of heating element 214A may be provided about at least a portion of container 240, the material 300B provided within container 240 may be heated from multiple sides, similar to an oven, as opposed to from a single concentrated heat source. As an electrical current is transmitted to heating element 214A, the interior of container 240 may be heated to a desired vaporizing temperature. Heating element 214A may be substantially comprised of a non-conductive material, such as a polyimide flex harness material, with a conductive material, such as a copper or other metal wiring shaped into a wire or flat ribbon, dispersed throughout the non-conductive material. The conductive material may be intertwined or wound throughout the non-conductive material in order to increase the heated surface area as well as to increase the impedance of the conductive material, which may then be electrically connected to PCB 112 through connector 120 when cartomizer 200B (See

FIG. 2) is inserted in cartomizer chamber 108 (See FIG. 1). The impedance value of the conductive material may be 2-3 ohms in some embodiments, and in other embodiments a maximum of 1 ohm. In some embodiments, heating element 214A may be provided around the majority of cartomizer body 208, and in some embodiments heating element 214A may be provided proximate to only a portion of cartomizer body 208. For instance, heating element 214A may be provided only proximate to insertion end 210, in order to provide a greater portion of heating through convection rather than through conduction. In some embodiment, heating element 214A may be provided about all or the majority of body 208, and PCB 112 may be operable in order to vary the amount of heating provided through convection rather than conduction. For instance, only the portion of heating element 214A proximate to insertion end 210 may be activated in order to heat vaporizable substance 300B through convection, or all or nearly all portions of heating element 214A may be activated in order to increase the conduction heating of substance 300B. PCB 112 may operate to switch between a conduction heating and a convection heating.

[0049] An insulating material 242 may be further provided within body 208 in order to control or regulate the heat distribution. Insulating material 242 may be provided around at least a portion of the exterior of heating element 214A in order to insulate body 208 from excess heat temperature, which may transmit to outer shell 106 (See FIG. 1). Insulating material 242 may also be provided between heating element 214A and container 240 so as to regulate or control heat transmitted to container 240.

[0050] One or more screens 250 may be provided within body 208 in order to contain dry material 300B within container 240, as well as to filter circulated air. Air may be circulated by providing one or more holes 252 in the cartomizer body 208. In one embodiment, holes 252 form a "t" shape (See FIG. 2B) from which the center of the "t" is substantially aligned with a hole leading to container 240. Holes 252 may be capable of alignment with one or more holes on the outer shell 106 of battery portion 100 so that air from the environment may pass through holes 252 and into container 240 where material 300B is provided. Holes 252 may be provided proximate to the inserted end 210. Screens 250 may be provided either at or proximate to inserted end 210, mouthpiece end 212, or both. In some embodiments, container 240 is removable from the rest of cartomizer body 208. Mouthpiece 220 may be removable or detachable, for instance through a screw thread, so as to permit access to container 240. An upper screen 250 may be attached or manufactured integrally with mouthpiece 220 so as to be removed with mouthpiece 220.

[0051] A sensor 260 may be included in some embodiments of cartomizer 200. Sensor 260 may operate to sense vaporizing temperature, and may be electronically communicative with PCB 112 so as to provide sensory information to PCB 112, which may be consequently transmitted to one of the LED indicators provided in electronic cigarette 10 as described in accordance with the disclosure. For instance, indicator 118 (See FIG. 1) may illuminate a certain color when sensor 260 has detected that vaporization temperature in container 240 has been reached and the user may proceed to inhale vaporized material 300. PCB 112 may also including safety protocols for automatic shutoff in the event that sensor 260 records a temperature above a preset vaporization temperature range, which may indicate material 300 (includ-

ing, for example, 300A, 300B, 300C) is actively burning or about to burn. Thus, sensor 260 may operate as a thermistor. A vaporization range for many materials 300 may be between about 190 degrees Celsius and about 240 degrees Celsius, and in some embodiments the vaporization temperature may be at about 230 degrees Celsius. In this vaporization temperature range, active ingredients of the vaporization material 300 may begin to vaporize without actively burning, which may occur at about 400 degrees Celsius or higher for some materials. PCB 112 may operate to control the vaporization temperature, for instance regulating a maximum vaporization temperature or controlling the vaporization actual temperature. In one embodiment, PCB 112 may control or regulate vaporization temperature within 10 degree Celsius, and in another embodiment PCB 112 may more finely control or regulate vaporization temperature within 1 degree Celsius, based on a selected or desired vaporization temperature as inputted by a user of electronic cigarette 10. It should be understood and appreciated that communication between sensor 260 and PCB 112 may be bidirectional so that sensor 260 may operate to control at least portions of vaporizer functions or to transmit information to PCB 112 and additionally receive information from PCB 112, which operates to control electronic cigarette 10.

[0052] FIG. 2C illustrates an additional embodiment of cartomizer 200C which may be inserted into cartomizer chamber 108 (FIG. 1) and utilized for vaporization of a vaporizable wax 300C. Cartomizer 200C may include an outer cartomizer shell or body 208 for housing and protecting internal components of cartomizer 200C. Outer shell 208 may include a threadable end 224 provide proximate to insertion end 210, and distal to mouthpiece 220. In one embodiment, mouthpiece 220 may be connected to outer shell 208 while in another embodiment mouthpiece 220 may be removable from outer shell 208, for instance from threading or a friction held push fit. Through threading 224 proximate to insertion end 210, outer shell 208 may be threadably engagable with a holding structure 254, which may be provided for securing a heating element 214 provided within a bowl or basin 214B. As part of holding structure 254, a stabilizing element may be provided 256. In one embodiment, basin 214B is secured to stabilizing element 256. Stabilizing element 256 may be constructed for silicone rubber or any other known or to be discovered material which may be provided to secure basin 214B while embodying the necessary thermal properties for contacting basin 214B. In one embodiment, basin 214B is composed of ceramic. Proximate to basin 214B may be a wax container 240A, and a screen or mesh 250 may be provided between basin 214B and container 240A. Container 240A may include a threaded portion 224 for removable engaging with holding structure 254. In this regard, holding structure 254 may feature two threadings 224—a first threading for engagement with outer shell 208 and a second threading for engagement with container 240A. A container cover 244 may be further provided and may include cover walls which substantially surround the upper and open portion of container 240 opposite heating element 214 and basin 214B. In one embodiment, cover 244 is secured to a portion of mouthpiece 220 such that when outer cover 208 is removed along with mouthpiece 220, cover 244 is further removed thereby exposing container 240A so that it may be refilled with additional wax 300C. Airflow passage 222 may be provided as a first passage within the wall of container cover 244, a second passage within the wall of outer shell 208, and an tube leading

through mouthpiece 220. Multiple first passages and multiple second passages may be provided as described. In order to discourage back flow of vapor, the one or more first passages may be placed closer to mouthpiece 220 than the one or more second passages. In this arrangement, vaporized wax 300C may travel from heating element 214 through container 240A and the first passage within the wall of cover 244, through a circumferentially outer passage between cover 244 and outer shell 208, and out through mouthpiece 220 as a user inhales. Electrical wiring may be provided from heating element 214 to a cartomizer PCB 262, which may operate to control the functioning of the cartomizer including activation of heater 214. In association with PCB 262 may be electrical contacts 218 for permitting electrical communication with battery portion 100.

[0053] As shown in FIG. 3, a charger 400 may be inserted into chamber 108 (FIG. 1) in order to charge battery 110 (FIG. 1) in embodiments where battery 110 may be rechargeable. Through its insertion into chamber 108 and contact with connector 120, charger 400 may provide an electrical charge to battery 110. Charger 400 may include a plug 410 for connecting charger 400 to a power source, which in one embodiment is a wall socket. Other plugs 410 for different power sources are contemplated within the disclosure, including USB connections and other known or to be developed power sources. An indicator light 420, which may be an LED light, may be provided on charger 400 in order to indicate a charging status, for instance when charger 400 is connected with a power source. PCB 112 may operate to change other indicators, for instance LED indicators 114/116, to indicate the charging status of electronic cigarette 10. In accordance with the disclosure, and illustrated for instance in FIG. 9, charger 400 may be connectable to battery portion at or proximate to first end 102A. Furthermore, as also illustrated for instance in FIG. 9, charger magnets 404 are contemplated within the disclosure in order to securely couple charger 400 to battery portion 100. In one embodiment, a metallic surface 404 is provided and positioned so as to be adjacent to magnets 124 or magnets 162 (depending on the embodiment of the disclosure). In another embodiment, a metallic surface 124 or 162 in order to magnetically couple battery portion 100 with charger magnets 404. Additionally, charger magnets 404 may be provided having opposing polarities as battery portion magnets 124 or 162.

[0054] With regards to PCB 112, as previously discussed for instance in reference to FIG. 1, and related electrical components, functioning, and control of vaporizer 100, a variety of controls or commands are contemplated in association with the operation of vaporizer 100. Various LED indicators 114, 116 may be utilized in conjunction with PCB 110 in showing operation states or statuses of vaporizer 100. For instance, the pressing of button 118 a preset number of times, which may be 3 times, within a preset time period, which may be 2 seconds, may result in locking or unlocking the vaporizer. Ring indicator 116 may then change illuminated colors to indicate a lock state of vaporizer 100. In a lock state, vaporizer may not function to activate a heating element 214/214A/214B of an inserted cartomizer 200. A low battery voltage may also be indicated to a user by illuminating and possibly flashing a predetermined color through indicator 116. In one embodiment, a low battery state is indicated when the battery voltage of battery 110 falls below about 3.2V. Activation of heating element 214/214A/214B may be accomplished by pressing or holding button 118. A cutoff

feature may be programmed into either PCB 112 or cartomizer PCB 262 such that heating element 118 will be disabled if button 118 is actuated for longer than a preset time, which may be 10 seconds in one embodiment and 30 seconds in another embodiment. While button 118 is actuated, and accordingly heating element 214 of an inserted cartomizer 200 is activated, indicator 116 may illuminate a predetermined color. Additionally, PCB 112 may operate to detect the type of inserted cartomizer 200, namely what type of vaporizable substance 300 the inserted cartomizer 200 is designed to hold and vaporize, and accordingly ring indicator 116 may illuminate a preset color associated with the inserted cartomizer 200 type. For instance, ring indicator may illuminate in a white, red, and green color when a first, second, and third cartomizer type is inserted, respectively. For some vaporizable substances 300, particularly many varieties of dry tobacco 300B, heating element may need to heat the substance for a certain time period before the substance is vaporized and may be inhaled by the user. In this situation, button 118 may be held for a certain time, which may be 3 seconds, before ring indicator illuminates indicating the user may inhale the vaporized substance. Furthermore, in the event an error in the PCB 112 programming occurs, a reset feature may be incorporated. For instance, pressing and holding button 118 for a certain time period, which may be three (3) seconds, while no cartomizer is inserted may operate to reset the programming to a default programming.

[0055] FIGS. 4-7 further illustrate the embodiments of electronic cigarette 10 provided in FIGS. 1-3, in accordance with the disclosure.

[0056] FIGS. 8 and 9 illustrate an additional embodiment of an electronic cigarette 10 having a battery portion 100A for receiving a cartomizer such as cartomizer 200 or cartomizer 200B. PCB 112 may operate to perform a variety of functions including, such as vaporization temperature control or regulation, voltage boost, accelerometer, or various drivers for controlling LED functioning. One or more LED indicators 114 may be provided and, in one embodiment, a set of three LED lights of variable colors are provided proximate to battery end 102A of the battery portion 100A. Magnets 124/202 may be provided in order to retain cartomizer 200 within cartomizer chamber 108. A switch 118A may be provided in order to manually activate or otherwise control electronic cigarette 10.

[0057] A battery charger 400A, having charging contacts 402, may be attached or connected to charging contacts 160 provided on outer shell 106, or otherwise exposable to the environment. In one embodiment, charging contacts 160 are positioned at or proximate to battery end 102A. Charging contacts 160, 402 may include a first positive contact and a second negative contact. In order to secure charging contacts 160 against corresponding charging contacts 402 of charger 400A, one or more magnets 162 may be provided proximate to charging contacts 160. Magnets 162 may then be capable of engaging with charger magnets 404 provided on portion of charger 400A such that magnets 162, 404 are adjacent to each other when contacts 160, 402 are contacting one another. In order to ensure the proper alignment of contacts 160, 402, two magnets 162 may be provided with opposed polarities, and two charger magnets 404 may be provided with opposed polarities. These opposed polarities may ensure proper orientation of charger 400A when it is connected to battery portion 100A. In some embodiments, battery portion magnet(s) 162 may operate to magnetically attract and connect a

metallic charger surface 404, or charger magnets 404 may operate to magnetically attract and connect a metallic battery surface 162, each of these embodiments thereby operating to magnetically couple charger 400 with battery portion 100. An indicator light 420, which may be an LED, may be provided to indicate a charging status of battery 110. A charging extension 410 may be provided so as to connect charger 400A to a power source or, alternatively, a power source may be internally provided within charger 400A. Charging extension 410 may be an AC wall adapter to USB and USB cord to magnetic plug. Any charger 400 of the disclosure may contain Over-Voltage and OverCurrent protection in order to prevent overcharging of battery 110 thereby assuring long battery life and in order to reduce the likelihood of battery 110 overheating. In one embodiment, charger 400 is rated at approximately 1000 mA current, which for some embodiments will equate to approximately two hours of battery life. The battery life will vary depending on battery selection and number of batteries 110 used in a given embodiment.

[0058] Referring now to FIG. 10, an embodiment for a cartomizer 200C is provided for holding a vaporizable substance 300. Cartomizer 200C may be used as an alternative cartomizer to 200/200B cartomizers, for example. Vaporizable substance 300 in cartomizer 200C may be a wax, oil or gel 300C. In cartomizer 200C, heating element 214 may be provided at the base of a basin 214B, which may or may not be removable from cartomizer body 208. Basin 214B may be dimensioned to hold wax, oil or gel 300C while heating element 214 may elevate the temperature within basin 214B to a vaporization temperature range, as controlled by PCB 112. Once the wax, oil or gel 300C is vaporized, a user may inhale the vapor through an inhalation tube 222 and out through mouthpiece 220. In some embodiments, mouthpiece 220 is removable through a friction fit, threaded connection, or any other known or to be developed connection means. One or more O-ring seals may also be provided proximate to the mouthpiece to ensure a fluid tight connection between mouthpiece 220 and cartomizer body 208.

[0059] FIG. 11 shows an additional embodiment of a cartomizer 200D for holding a dry vaporizable substance 300B. Cartomizer 200D may be used as an alternative cartomizer to 200/200B cartomizers, for example. Dry substance 300B may be held in a removable liner or container 240. Cartomizer 200D may also include heating element 214A and insulation material 242, each of which may be similarly provided and oriented as previously described with respect to cartomizer 200B. An air flow hole or aperture 270 may be provided at the base of cartomizer 200D. This airflow hole 270 may be provided off plane or misaligned with respect to electrical contacts 218. Airflow hole 270 may align with a hole between chamber 108 and battery portion 100A, which may house a fan 190 as described below. A temperature sensor 260 may also be included.

[0060] FIG. 12 further illustrates the embodiments of an electronic cigarette 10 provided in FIGS. 9-11 in accordance with the disclosure.

[0061] Referring now to FIG. 13, an embodiment of an electronic cigarette 10 including a battery portion 100B is provided. PCB 112 may include a microcontroller, voltage boost integrated circuit, accelerometer, and a fan control circuitry. A fan 190, including blades and a motor, may be provided internally in battery segment 110 of battery portion 100B. Fan 190 may operate to facilitate air flow from external battery portion 100B, such as through one or more holes 152

provided in outer shell **106**, through battery segment **110** and into cartomizer thereby establishing an air flow for inhalation in accordance with the disclosure. In some embodiments, fan **190** has a reversible operation in order to “clear” the air flow path in the event debris or excess vapor is caught in the air flow path. PCB **112** may also include one or more switches that, for instance, may be provided beneath control buttons, such as that exemplified in FIG. **15**). PCB **112** may also include one or more LED’s for these and other similar switch lights. PCB **112** may also operate to display a status message on an LED screen, which may be provided on outer shell **106** (e.g., as shown in FIG. **15**). A status message may, for example, include messages to indicate a status of the electronic cigarette **10**, such as when the cigarette **10** is activated, charging, or has reached a vaporization temperature. An LED screen may also display warning or error messages, for instance a danger message when a critical temperature has been detected by a sensor. Further, as illustrated in FIG. **14**. In some embodiments, PCB **112** may operate to recognize the cartomizer **200/200A/200B/200C** inserted into chamber **108**, and in order to identify the vaporizable substance **300** included in cartomizer **200**. For instance, PCB **112** may communicate with sensor **260** in cartomizer **200** in order to identify both the type and amount of vaporizable substance **300** within cartomizer **200**. This identification may be included in the status message displayable on the LED screen on outer shell **106**. Charger **400A** may be utilized for charging battery **110** in battery portion **100C**. It should be understood and appreciated that, in some embodiments, charger **400A** may be inserted into chamber **108** of battery portions **100A/100B** in addition to connection of charger **400A** as described herein. It should be further understood and appreciated that in embodiments where charger **400/400A** is coupled with battery portion **100** at a position other than where cartomizer **200** is connected, such as embodiments where charger **400A** is coupled at or proximate to first end **102A**, electronic cigarette **10** may operate with a pass through function, namely the ability to operate electronic cigarette **10** while the unit is charging from charger **400A**.

[0062] FIG. **15** further illustrates the embodiments of an electronic cigarette **10** provided in FIGS. **13-14** in accordance with the disclosure.

[0063] Certain charger embodiments for rechargeable vaporizers or electronic cigarettes disclosed hereinabove, for example in FIG. **3**, employ electrical contacts between the charger and the cartomizer portion’s electrical connector. Under these circumstances, the cartomizer portion is first removed from the chamber to expose the electrical connector and thereafter a charger with compatible electrical contacts is inserted into the chamber. The invention contemplates other types and locations of connectors on the vaporizer and charger. Accordingly, in certain embodiments, the present invention provides a charger **400** for charging a vaporizer or electronic cigarette having charging contacts attached essentially transversely to its outer shell at an end distal to the cartomizer receiving portion and proximate to its battery portion. One such embodiment is shown in FIG. **14**. In some of these embodiments where the cartomizer portion is not removed from the vaporizer to expose the electrical connector, the charging contacts are incorporated into the device such that the vaporizer or electronic cigarette may be operated in its typical fashion during the recharging of the battery (“pass-through” charging).

[0064] Still other embodiments for chargers and rechargeable vaporizers or electronic cigarettes are illustrated in FIGS. **16, 17, 18, 19**, and **20**. For example, FIG. **16** depicts aspects of the portion of the charger that connects with the vaporizer during the charging operation. In this example, the positive connection to the vaporizer’s charging contacts is facilitated through the use of a spring-loaded pogo pin (see **501** and **502**). The negative connection pin (**503**) or other negative connection is isolated from the pogo pin by an insulator **506** to isolate the positive and negative connections from each other. At the contacts insulator surface such that it is isolated from electrical connections **501** and **503** is a wiper contact that is capable of powering a LED charging indicator light. In some instances the exterior housing **504** for the charger is at least in part, translucent or transparent, so that the indicator lamp can be readily observed. To maintain readily removable connectivity with the vaporizer, a magnet **505** is provided, and is typically in proximity to the outer edges of the charger’s charging contacts and optionally takes the form of a ring disposed in substantially concentric fashion about the assembly containing the electrical contacts and insulation. The charger is generally held in the correct position for charging by magnetic attraction to the vaporizer’s charging contacts. The magnetic attraction strength is such that the charger can be easily detached by just pulling on the charger. This level of attractive force may also allow the charger to break away if it is pulled too far away from the battery portion of the vaporizer so that no significant damage will occur to the vaporizer or the charger. Other aspects of the charger include one or more of support pieces and/or fixing screws, for example. The materials employed in the construction of the charger would be readily understood by the ordinarily skilled artisan once equipped with the teachings of the present invention. Any material that conducts electricity will generally be acceptable where transfer of electricity to charge the battery is required. Similarly, where insulation is a necessary property for normal operation, electrically non-conductive materials are typically acceptable. FIG. **17** illustrating a perspective drawing of a charger that employs a USB terminus connection **507** as a source of power for the charging operation. At the end distal to the USB terminus are the charger’s charging contacts for the vaporizer or electronic cigarette, including a pogo pin-type positive connection **501**, an insulator **506**, a negative connection **503**, a magnet **505** and a housing **504**.

[0065] FIG. **18** shows an alternate end on view of a charger’s electrical contacts region, depicting a housing **504**, magnet **505**, negative connection **503**, wiper contact **508** for an optional LED-type charging indicator light disposed on the housing, pogo pin-type positive connection **501**, and insulator **506**.

[0066] FIG. **19** illustrates a partial longitudinal cross section view of an embodiment of the vaporizer’s electrical connector attached essentially transversely to its outer shell **512** at an end distal to the cartomizer receiving portion and proximate to its battery portion, which may be contacted with the chargers contacts illustrated in FIG. **18**. FIG. **19** shows an arrangement of components for an embodiment of present invention’s electrical connector including a positive contact **509**, negative contact **510**, and insulation **511**.

[0067] An alternative vaporizer electrical connector compatible with the charger shown in FIG. **18** is shown in FIG. **20** in an end on view. In this view, the positive contact **509** forms an innermost circle, surrounded by concentric circles of independently varying dimensions including an insulator **511**, a

negative contact **510**, a magnet **513** and outer shell **512**. In certain embodiments **513** may be a magnet or a magnetic material. In embodiments where **513** is a magnetic material, it is preferably magnetic metal, more preferably a ferromagnetic metal. The magnetic attraction between **513** and the magnet in the charger contacts is strong enough to hold the charger contacts and vaporizer charging contacts sufficiently so that the battery may be recharged. In certain preferred embodiments, the attraction is sufficiently strong to maintain the charger/vaporizer connection, but weak enough to be disconnected without substantial damage to the charger or the vaporizer.

[0068] FIG. **21** shows a perspective side on view of the FIG. **18** charger's electrical contacts region depicting a housing (**504**), magnet (**505**), negative connection (**503**), wiper contact (**508**), pogo pin-type positive connection (**501**), and insulator (**506**).

[0069] FIG. **22** shows the charger of FIG. **18** connected for recharging to the electrical connector of the vaporizer compatible with the charger shown in FIG. **20**.

[0070] Vaporizer or electronic cigarette charger kits useful in, for example, the recharging of batteries used to power the vaporization process in such devices, are also within the ambit of the present invention. These kits typically include one or more chargers of the present invention, or alternatively a charger with multiple interchangeable power connectors (e.g., wall plug and USB connector). Such kits may further include, if desired, one or more of various compatible vaporizers or electronic cigarettes, their components, such as for example, one or more interchangeable cartomizers, cartomizer refills, etc., as will be readily apparent to those skilled in the art. Instructions, either as inserts or as labels, indicating quantities of the components contained in the kit, guidelines for operation or use, and/or guidelines for connecting any of the components and/or refilling the cartomizers, may also be included in the kit.

[0071] In accordance with certain embodiments of the present invention, there are provided methods which comprise contacting a charger of the present invention with a compatible vaporizer or electronic cigarette for a time and under conditions effective to recharge a rechargeable battery contained within said vaporizer or electronic cigarette sufficient to repower vaporizer or electronic cigarette for its continued use.

[0072] As will be understood by the ordinarily skilled artisan equipped with the disclosure herein, electrical contacts compatible with the charger must be provided for on or within the vaporizer or electronic cigarette.

[0073] Referring now to FIGS. **23-25**, in some embodiments of an electronic cigarette **10**, battery portion **100C** may include an additional PCB **602**. The additional PCB **602** may be similarly dimensioned and with similar components as the PCB **112**. Further, the additional PCB **602** may be housed within an outer shell **106C** of the battery portion **100C** and arranged parallel to PCB **112**. A booster chip **604** may be provided in electrical connection with the additional PCB **602** in order to increase the voltage and allow for a variable voltage in at least a portion of the circuitry. As those of skill in the art will appreciate, the voltage may be increased or decreased corresponding to different vaporization temperatures of the vaporizable substance **300**. In one embodiment, booster chip **604** may provide for a voltage jump from about 4.2V to about 5.5V. An integrated circuit (IC) charge control-

ler **606** may also be provided to decrease the likelihood of any circuitry failure when charging.

[0074] A voltage indicator **608** may be provided to indicate a voltage level or temperature. The voltage indicator **608** may be, for example, three LEDs arranged axially along the outer shell **106C**. In use, the LEDs may be illuminated to correspond to a greater voltage or temperature. For example, when the electronic cigarette **10** is not powered, zero indicators may be illuminated. One indicator illuminated may be illuminated to correspond to low voltage or low temperature, two indicators illuminated corresponding to medium voltage or medium temperature, and three indicators illuminated corresponding to high voltage or high temperature. A battery indicator **610** may be provided on the outer shell **106C** proximate to a battery end **102C** of the battery portion **100C** to indicate a battery charge remaining. The battery indicator **610** may be, for example, a plurality of LEDs arranged radially along the outer shell **106C** in one or more sections and illuminable in one or more colors. In use, when the battery **110** is fully charged, all sections of the battery indicator **610** may be illuminated in green. As the battery charge is diminished, sections of the battery indicator **610** may de-illuminate and the color of illumination in the remaining sections may change, for example, to yellow or red.

[0075] In another embodiment, indicator holes are provided on the outer shell **106C** proximate the voltage indicator **608** or battery indicator **610** so that the indicators may be seen by a user when illuminated. The indicator holes may be micro-drilled into the outer shell **106C** so to appear substantially invisible to a user when the voltage indicator **608** or battery indicator **610** is not illuminated. Alternatively, the indicator holes may be hole punched or manufactured in another manner known to those of skill in the art. A mode activation button **612** may also be provided on the outer shell **106C** proximate to the battery end **102C**. The mode activation button **612** may function to deactivate, or at least dim, the voltage indicator **608** and/or battery indicator **610** when the vaporizer **10** is in use. Thus, vaporizer **10** may be used without indicators **608**, **610** illuminating as brightly, or without them illuminating at all. Deactivating or dimming indicators **608**, **610**, thereby reducing or eliminating outwardly appearing indicators, allows a user to operate vaporizer **10** discretely, particularly in a dark or dimly lit environment.

[0076] The descriptions set forth above are meant to be illustrative and not limiting. Various modifications of the embodiments, in addition to those described herein, will be apparent to those skilled in the art from the foregoing description. Such modifications are also intended to fall within the scope of the concepts described herein. Each patent, patent application and publication cited or described in this document are hereby incorporated herein by reference, in their entireties.

[0077] The foregoing description of possible implementations consistent with the present disclosure does not represent a comprehensive list of all such implementations or all variations of the implementations described. The description of some implementation should not be construed as an intent to exclude other implementations. For example, artisans will understand how to implement the embodiments in many other ways, using equivalents and alternatives that do not depart from the scope of the disclosure. Moreover, unless indicated to the contrary in the preceding description, none of the components described in the implementations are essential to the embodiments disclosed. It is thus intended that the

embodiments be considered as illustrative, with a true scope and spirit of the disclosure being indicated by the following claims.

LIST OF REFERENCES

[0078] 10 Electronic Cigarette
 [0079] 100 Battery Portion
 [0080] 100A Battery Portion
 [0081] 100B Battery Portion
 [0082] 100C Battery Portion
 [0083] 102 Battery Housing Segment
 [0084] 102A First end of Battery Portion
 [0085] 102C First end of the Battery Portion
 [0086] 104 Cartomizer Receiving Segment
 [0087] 104A Second end of Battery Portion
 [0088] 106 Shell
 [0089] 106C Shell
 [0090] 108 Cartomizer Chamber
 [0091] 110 Battery
 [0092] 112 PCB
 [0093] 112A PCB
 [0094] 114 Indicator
 [0095] 116 Ring Indicator
 [0096] 118 Button
 [0097] 118A Switch
 [0098] 120 Electrical Connector
 [0099] 122 Pin
 [0100] 124 Magnet
 [0101] 126 Protrusion
 [0102] 130 Window
 [0103] 152 Hole
 [0104] 160 Charging Contact
 [0105] 162 Magnet
 [0106] 190 Fan
 [0107] 200 Cartomizer
 [0108] 200A Cartomizer
 [0109] 200B Cartomizer
 [0110] 200C Cartomizer
 [0111] 202 Magnet
 [0112] 204 Groove
 [0113] 208 Body
 [0114] 210 Insertion End
 [0115] 212 Mouthpiece End
 [0116] 214 Heating Element
 [0117] 214A Heating Element
 [0118] 214B Basin
 [0119] 216 Wick
 [0120] 218 Electrical Contact
 [0121] 220 Mouthpiece
 [0122] 222 Inhalation Tube
 [0123] 224 Threading
 [0124] 226 Bushing
 [0125] 228 Colored Ring
 [0126] 240 Container
 [0127] 242 Insulating Material
 [0128] 250 Screen
 [0129] 252 Hole
 [0130] 260 Sensor
 [0131] 262 Cartomizer PCB
 [0132] 300 Vaporizable Substance
 [0133] 300A Vaporizable Fluid
 [0134] 300B Vaporizable Dry Substance
 [0135] 300C Vaporizable Wax
 [0136] 400 Charger

[0137] 400A Charger
 [0138] 402 Electrical Contact
 [0139] 404 Magnet
 [0140] 410 Plug
 [0141] 420 Light
 [0142] 501 Pogo pin
 [0143] 502 Spring
 [0144] 503 Negative Connection Pin
 [0145] 504 Exterior Housing
 [0146] 505 Magnet
 [0147] 506 Insulator
 [0148] 507 USB Terminus Connection
 [0149] 508 Wiper Contact
 [0150] 509 Positive Contact
 [0151] 510 Negative Contact
 [0152] 511 Insulation
 [0153] 512 Outer Shell
 [0154] 513 Magnet or Magnetic Metal
 [0155] 602 Additional PCB
 [0156] 604 Booster Chip
 [0157] 606 IC Charge Controller
 [0158] 608 Voltage Indicator
 [0159] 610 Battery Indicator
 [0160] 612 Mode Activation Button

What is claimed:

1. A vaporizer comprising:

- a shell connectable with a cartomizer, the cartomizer including cartomizer electrical contacts;
- a battery housed within the shell;
- battery electrical contacts provided to contact cartomizer electrical contacts when the cartomizer is connected with the shell;
- a plurality of printed circuit boards housed within the shell;
- electrical circuitry housed within the shell and operable to direct an electrical current between the battery, the battery electrical contacts, the plurality of printed circuit boards, and the cartomizer electrical contacts when the cartomizer is connected with the shell; and
- a booster chip electrically connected to at least one of the plurality of printed circuit boards, and operable, in cooperation with the plurality of printed circuit boards, to provide a variable voltage to the cartomizer electrical contacts when the cartomizer is connected with the shell.

2. The vaporizer of claim 1, further comprising an integrated circuit charge controller.

3. The vaporizer of claim 1, further comprising at least one illuminable indicator housed within the shell and electrically connected to the electrical circuitry.

4. The vaporizer of claim 3, wherein the at least one illuminable indicator includes a plurality of light emitting diodes, and wherein at least one of the plurality of printed circuit boards operates to illuminate a predetermined number of the plurality of light emitting diodes corresponding to a level of the variable voltage.

5. The vaporizer of claim 4, wherein the plurality of light emitting diodes includes three light emitting diodes, and wherein all three diodes illuminate if the variable voltage is at least at a first predetermined level of volts, two diodes illuminate if the variable voltage is at a second predetermined level of volts, one diode illuminates if the variable voltage is at a third predetermined level of volts, and no diode illuminates if the battery has less than the third predetermined level of volts.

6. The vaporizer of claim 3, wherein the at least one illuminable indicator includes a plurality of light emitting diodes, and wherein at least one of the plurality of printed circuit boards operates to illuminate a predetermined number of the plurality of light emitting diodes corresponding to a charge state of the battery.

7. The vaporizer of claim 6, wherein the plurality of light emitting diodes are arranged radially along the shell.

8. The vaporizer of claim 6, wherein the plurality of light emitting diodes includes six light emitting diodes, and wherein all six diodes illuminate if the charge state of the battery is at least at a first predetermined charge state, five diodes illuminate if the charge state of the battery is at a second predetermined charge state, four diodes illuminate if the charge state of the battery is at a third predetermined charge state, three diodes illuminate if the charge state of the battery is at a fourth predetermined charge state, two diodes illuminate if the charge state of the battery is at a fifth predetermined charge state, one diode illuminates if the charge state of the battery is at a sixth predetermined charge state, and no

diode illuminates if the charge state of the battery is less than the sixth predetermined charge state.

9. The vaporizer of claim 8, wherein the plurality of light emitting diodes illuminate a predetermined color corresponding to the charge state of the battery.

10. The vaporizer of claim 9, wherein the color is green if the charge state of the battery is at a seventh predetermined charge state, yellow if the charge state of the battery is at an eighth predetermined charge state, red if the charge state of the battery is at a ninth predetermined charge state.

11. The vaporizer of claim 3, wherein the shell includes at least one hole aligned with the at least one illuminable indicator to allow a user to view the at least one illuminable indicator when illuminated.

12. The vaporizer of claim 11, wherein the at least one hole is micro-drilled.

13. The vaporizer of claim 3, further comprising a switch positioned on the shell and capable of deactivating the at least one illuminable indicator.

* * * * *