



(51) International Patent Classification:
B01D 63/02 (2006.01)

(21) International Application Number:
PCT/EP2017/071700

(22) International Filing Date:
30 August 2017 (30.08.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
16186583.7 31 August 2016 (31.08.2016) EP

(71) Applicant: **GAMBRO LUNDIA AB** [SE/SE]; Magistratsvägen 16, 220 10 Lund (SE).

(72) Inventors: **BECK, Christof**; Kleeweg 7, 72475 Bitz (DE). **WAGNER, Steffen**; Lindenstr. 11, 72469 Meßstetten (DE). **HERTZLER, Bernd**; Spechtstraße 7, 72336 Balingen (DE). **BLICKLE, Rainer**; Sonnenstrasse 5, 72475 Bitz (DE). **ERMANTRAUT, Stefan**; Haydnstrasse 21, 72336 Balingen (DE).

(74) Agent: **PERCHENEK, Nils**; Holger Crafoord-Strasse 26, 72379 Hechingen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

(54) Title: DIFFUSION AND/OR FILTRATION DEVICE

(57) Abstract: The present disclosure relates to diffusion and/or filtration devices comprising hollow fiber membranes, e.g., ultrafilters for water purification, plasma filters, or capillary dialyzers for blood purification; housings and end caps for the devices; and methods for the production of the devices.

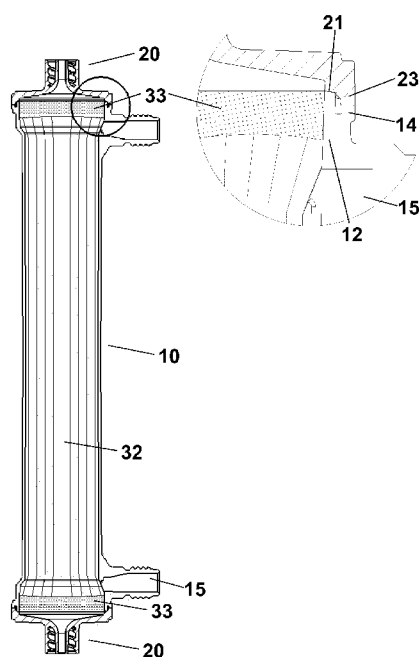


Fig. 3

Published:

— *with international search report (Art. 21(3))*

5

Diffusion and/or filtration device**Technical Field**

The present disclosure relates to diffusion and/or filtration devices comprising hollow fiber membranes, e.g., ultrafilters for water purification, plasma filters, or capillary dialyzers for blood purification; housings and end caps for the devices; and methods for the production of the devices.

15

Background of the Invention

Diffusion and/or filtration devices comprising hollow fiber membranes are widely used for separation or purification of liquids. Examples are ultrafilters used for water purification; plasma filters for the separation of plasma from blood; capillary dialyzers for blood purification in patients suffering from renal insufficiency, i.e., for treatment of the patients by hemodialysis, hemodiafiltration or hemofiltration; etc. A multitude of different models of diffusion and/or filtration devices comprising hollow fiber membranes is commercially available.

The devices generally consist of a housing comprising a tubular section with end caps capping the mouths of the tubular section. A bundle of hollow fiber membranes is arranged in the housing in a way that a seal is provided between a first flow space formed by the fiber cavities and a second flow space surrounding the membranes on the outside. The seal generally is provided by end wall means within the housing formed by a polymer mass in which the ends of the

hollow fiber membranes are embedded. Examples of such devices are disclosed in EP 0 844 015 A2, EP 0 305 687 A1, WO 01/60477 A2, and WO 2013/190022 A1.

5 It is important that the seal between the end caps and the housing and the seal between the flow space formed by the fiber cavities and the flow space surrounding the membranes on the outside remain intact at all times, especially during operation of the device. Often, additional parts like
10 sealing rings, gaskets, and support rings are provided in the device as additional safeguards against leakage. Production, handling, and subsequent assembly of the additional elements add to the complexity of the production process and the manufacturing cost. It would therefore be desirable
15 to dispense with these additional parts in the device.

To this end, it is imperative that a tight connection between the end walls and the inner surface of the dialyzer housing is established and any delamination is prevented.
20 The end walls and the housing of the device generally are comprised of different materials which also usually have different thermal expansion coefficients. As a consequence, temperature changes during manufacture or processing of the device, e.g. thermal sterilization, or pressure changes
25 within the device during operation generate strain at the interface between the inner wall of the housing and the end wall means which may cause delamination of the end wall means from the housing and generate leaks. This is particularly the case for combinations of materials where the adhesive force between the respective materials is low, for
30 instance, when a polypropylene housing is combined with polyurethane end wall means. Likewise, the seal between the housing and the end caps must remain intact at all times to prevent fluid leaks.

Summary of the Invention

The present application relates to a diffusion and/or filtration device which does not comprise sealing rings, gas-kets, or support rings. The device comprises a housing and
5 end caps of optimized construction. Processes for the production of the device also are provided.

Short Description of the Drawings

- Fig. 1 shows a longitudinal-sectional partial view and a
10 top view of an embodiment of the dialyzer housing of the present disclosure;
- Fig. 2 shows a longitudinal-sectional schematic view of an embodiment of the dialyzer end cap of the present disclosure;
- 15 Fig. 3 shows a longitudinal-sectional schematic view of an embodiment of the diffusion and/or filtration device of the present disclosure.

Detailed Description

20 A housing **10** for a diffusion and/or filtration device **30** is provided. The housing **10** comprises a tubular midsection **11** and header sections **12** at both ends of the tubular midsection **11**. The header sections **12** have a diameter which is larger than the diameter of the tubular midsection **11**. In
25 one embodiment, the inner diameter of the tubular midsection **11** is in the range of from 20 mm to 55 mm, for instance 25 to 50 mm. The difference of the diameters of the tubular midsection **11** and the header sections **12** generally is in the range of from 5 mm to 15 mm, e.g., 5 to 10 mm.

30

The wall strength of the header sections **12** is greater than the wall strength of the tubular midsection **11**. In one embodiment of the housing **10**, the wall strength of the header sections **12** is in the range of from 2 to 3 mm.

35

A plurality of elongated noses **13** is arranged on the inside surface of each header section **12**. The noses **13** run parallel to the longitudinal axis of the housing **10** and parallel to each other. In one embodiment of the housing **10**, the noses **13** are evenly spaced over the circumference of the inner surface of each header section **12**. In one embodiment of the housing **10**, the number of noses **13** in each header section **12** is in the range of from 15 to 25. In the embodiment shown in Fig. 1, each header section **12** comprises 20 noses. In one embodiment of the housing **10**, each nose **13** has a width in the range of from 3 to 4 mm, e.g., 3.3 to 3.7 mm. In one embodiment of the housing **10**, each nose **13** has a length in the range of from 10 to 15 mm, for instance, 12 to 14 mm. In one embodiment of the housing **10**, each nose **13** has a height in the range of from 0.5 to 1.0 mm, for instance, 0.6 to 0.8 mm.

In one embodiment of the housing **10**, the header sections **12** each comprise a collar **14**. The collar **14** has a diameter which is larger than the diameter of the header section **12**. As shown in Fig. 1, the upper rim of the collar **14** defines a gap to the outside surface of the header section **12**; and it is positioned below the upper rim of the header section **12**. In one embodiment of the housing **10**, the gap between the outer surface of the header section **12** and the upper rim of the collar **14** has a width in the range of from 0.5 to 1.0 mm, for instance 0.6 to 0.8 mm. In one embodiment of the housing **10**, the upper rim of the collar **14** is planar. In one embodiment of the housing, the upper rim of the collar **14** has a wall strength in the range of from 1.5 to 2.0 mm, for instance, 1.6 to 1.8 mm.

The housing **10** comprises one or two fluid ports **15**. The fluid port(s) **15** serve(s) as an inlet or an outlet, respectively, for a liquid.

5 The housing **10** is comprised of a transparent or opaque polymeric material. Examples of suitable polymeric materials include polymethyl(meth)acrylate (PMMA); polyesters like PET or PBT; and polycarbonate. In one embodiment, the housing **10** is comprised of a polyolefin. Examples of suitable polyole-
10 fins are polyethylene, polypropylene, polybutylene, polystyrene (HIPS), and cycloolefin copolymers (COC). In one embodiment, the housing **10** is comprised of polypropylene.

An end cap **20** for a diffusion and/or filtration device **30**
15 also is provided. The end cap **20** has an inner surface which is axially symmetrical with regard to the longitudinal axis of the end cap **20** and has an inner surface having the form of a funnel and comprises, in the direction of increasing diameter, a first section **I** taking the form of a cylinder
20 or a truncated cone, a middle section **II** taking the form of a torus segment, and a third section **III** taking the form of a truncated cone.

The end cap **20** comprises a fluid port **25**, which is an inlet
25 or outlet, respectively, for a liquid, arranged axially in the center of the end cap **20**. In one embodiment of the end cap **20**, a two-start thread which fits a standard blood-line connector is provided round the fluid port **25**. Starting from the mouth of the end cap **20**, the inner diameter of the fluid
30 port **25** is constant or increases linearly in a first section **I** of the end cap, then widens gradually, with a constant curvature **R**, in a second section **II** until the inner surface includes a predetermined angle α with the horizontal. The dia-

meter then increases linearly in a third section **III**, until a predetermined diameter **D** is reached.

In one embodiment, the radius **R** of the middle section **II**,
5 i.e., the curvature **R**, is in the range of from 4 mm to 10 mm, e.g., from 5 mm to 9 mm, in particular from 6 to 8 mm. In one embodiment, the aperture of the first section **I** from the inlet to the middle section is in the range of from 0° to 4°, e.g., from 1° to 3°, in particular from 1.5
10 to 2.5°. In one embodiment, the angle α is in the range of from 7 to 12°, i.e. the aperture of the third section **III** is in the range of from 156 to 166°. The diameter **D** generally is in the range of from 20 to 60 mm, e.g., 30 to 50 mm.

15 The end cap **20** comprises a circumferential planar sealing face **21** sloping at an angle in the range of from 5° to 10°. In one embodiment of the end cap **20**, the sealing face **21** has a width in the range of from 1.5 to 2.5 mm.

20 In one embodiment, the end cap **20** comprises a plurality of noses **22** evenly distributed over an annulus of the inner surface of the end cap **20**. The annulus has an inner diameter which is larger than the outer diameter of the sealing face **21**. In one embodiment, the number of noses **22** is in
25 the range of from 30 to 50, for instance, 35 to 45. In one embodiment of the end cap **20**, the width of each nose **22** is in the range of from 1.0 to 2.0 mm, for instance, 1.3 to 1.7 mm. In one embodiment of the end cap **20**, the height of each nose **22** is in the range of from 0.25 to 0.75 mm, e.g.,
30 0.4 to 0.6 mm. In one embodiment of the end cap **20**, the distance between vicinal noses **22** is in the range of from 1.5 to 2.5 mm, for instance, 1.8 to 2.2 mm.

In one embodiment of the end cap **20**, the wall strength of
35 the end cap **20** in the zone of the third section **III** in-

creases towards the periphery of the end cap **20**. In one embodiment, the ratio of the wall strength at the outer diameter of section **III** to the wall strength at the inner diameter of section **III** is in the range of from 2:1 to 5:1, for instance, 2:1 to 3:1.

In one embodiment of the end cap **20**, the width of the outer rim **23** of the end cap **20** is in the range of from 1.5 to 2.0 mm, for instance, 1.6 to 1.8 mm. In one embodiment, the outer rim **23** of the end cap **20** is planar and the plane is perpendicular to the longitudinal axis of the end cap **20**.

In one embodiment, the end cap **20** comprises an annular plane **24** running along the circumference of the end cap **20** on its upper side. The annular plane **24** is perpendicular to the longitudinal axis of the end cap **20**. In one embodiment of the end cap **20**, the width of the annular plane **24** is equal to the width of the outer rim **23** of the end cap **20**.

The end cap **20** is comprised of a transparent or opaque polymeric material. Examples of suitable polymeric materials include polymethyl(meth)acrylate (PMMA); polyesters like PET or PBT; and polycarbonate. In one embodiment, the end cap **20** is comprised of a polyolefin. Examples of suitable polyolefins are polyethylene, polypropylene, polybutylene, polystyrene (HIPS), and cycloolefin copolymers (COC). In one embodiment, the end cap **20** is comprised of polypropylene.

A diffusion and/or filtration device **30** also is provided, which comprises a housing **10** and end caps **20** as described above. In one embodiment, the diffusion and/or filtration device **30** comprises a housing **10** as described above, defining a longitudinally extending internal chamber **31** including a first end and a second end. It further comprises a bundle **32** of semi-permeable hollow fiber membranes disposed

within the internal chamber **31** and extending longitudinally from the first end of the internal chamber **31** to the second end of the internal chamber **31**, the hollow fiber membranes each having an outer surface, and a first end and a second end corresponding to the first end and the second end of the internal chamber **31**. The device features end wall means **33** supporting the first and second ends of the hollow fiber membranes within the internal chamber **31** so as to sealingly separate the first ends and second ends of the hollow fiber membranes from the outer surfaces of the hollow fiber membranes between the first ends and second ends thereof. End caps **20** as described above seal the mouths of the housing **10**. The device comprises one or two fluid ports **15** arranged on the housing **10** at a position between the end wall means **33** supporting the first and second ends of the hollow fiber membranes. The fluid port(s) **15** serve(s) as an inlet or an outlet, respectively, for a liquid.

In one embodiment of the diffusion and/or filtration device **30**, the upper rim of each header section **12** of the housing **10** slopes at the same angle as the circumferential planar sealing face **21** of the end cap **20**. The upper rim of the header section **12** of the housing **10** and the circumferential planar sealing face **21** of the end cap **20** contact each other and form a first tight seal. The outer rim **23** of the end cap **20** is fused to the housing **10** and provides a second tight seal. In one embodiment of the diffusion and/or filtration device **30** shown in Fig. 3, the outer rim **23** of the end cap **20** is fused to the upper rim of the collar **14** of the housing **10** to provide the second tight seal.

The present disclosure also provides a process for producing the diffusion and/or filtration device **30**. The process comprises the following steps:

a) providing a housing **10** as described above, defining a longitudinally extending internal chamber **31** including a first end and a second end;

5 b) introducing a bundle **32** of semi-permeable hollow fiber membranes each having an outer surface, a first end and a second end into the internal chamber **31** of the housing **10** so that the bundle **32** extends longitudinally from the first end of the internal chamber **31** to the second end of the internal chamber **31** and the first ends and second ends of the hollow fiber membranes correspond to the first end and the second end of the internal chamber **31**, respectively;

10 c) providing end wall means **33** supporting the first and second ends of the hollow fiber membranes within the internal chamber **31** so as to sealingly separate the first ends and second ends of the hollow fiber membranes from the outer surface of the hollow fiber membranes between the first ends and second ends thereof, by introducing a potting material into the header sections **12** of the housing **10** and allowing the potting material to cure;

15 d) opening the first and second ends of the hollow fiber membranes by cutting through the end wall means **33** perpendicularly to the longitudinal axis of the housing **10**;

20 e) providing an end cap **20** as described above for each header section **12**;

25 f) circumferentially beveling the wall of the rim of each header section **12** to produce a rim of the header section **12** which slopes at an angle matching the slope of the circumferential planar sealing face **21** of the end cap **20**;

30 g1) closing each header section **12** with an end cap **20**, thereby causing the rim of the header section **12**

of the housing **10** and the circumferential planar sealing face **21** of the end cap **20** to contact each other and form a first tight seal; and

g2) fusing each end cap **20** to the housing **10**,
5 thereby providing a second tight seal.

A bundle **32** of semi-permeable hollow fiber membranes is introduced into the internal chamber **31** of the housing **10**. Each hollow fiber membrane has an outer surface, a first
10 end and a second end. After the bundle **32** has been inserted into the housing **10**, the bundle **32** extends longitudinally from the first end of the internal chamber **31** to the second end of the internal chamber **31**; and the first ends and second ends of the hollow fiber membranes correspond to the
15 first end and the second end of the internal chamber **31**, respectively.

It is expedient to close the ends of the hollow fiber membranes before the subsequent potting step in order to prevent the potting material from permeating into the fibers.
20 The fiber ends can be closed by processes known in the art, e.g., by melting or by means of an adhesive. In one embodiment of the process, the ends of the hollow fiber membranes are closed before the bundle **32** of hollow fiber membranes
25 is introduced into the housing **10**.

The end wall means **33** supporting the first and second ends of the hollow fiber membranes within the internal chamber **31** are generated by potting the ends of the hollow fiber
30 membranes with a polymer. A suitable potting material for the hollow fiber membranes is polyurethane. In an exemplary process, the ends of the housing **10** are closed and potting material, for instance polyurethane, is introduced into the housing **10** via at least one fluid port **15**. The potting material is distributed within the housing **10** of the diffu-
35

sion and/or filtration device **30** by centrifugation, i.e., rotating the diffusion and/or filtration device **30** at high speed perpendicular to its longitudinal axis. The potting material is allowed to cure; thereby forming end wall means
5 **33** on both ends of the bundle **32** of hollow fiber membranes.

The potting material shrinks during the curing process. The shrinkage of the cross-section of the end wall means **33** generates a centripetal tensile force on the header section
10 **12** of the housing **10**. The noses **13** provide an additional lock between the end wall means **33** and the housing **10**. It prevents detachment of the end wall means **33** from the inner wall of the housing **10** and thus the formation of leaks.

15 The ends of the hollow fiber membranes are subsequently opened by cutting through the end wall means **33** perpendicularly to the longitudinal axis of the housing **10**. Part of the end wall means **33** and the header sections **12** of the housing **10** are thus removed, producing a planar cut face
20 perpendicular to the longitudinal axis of the housing **10**.

The wall of the rim of each header section **12** is subsequently beveled circumferentially to produce a rim of the header section **12** which slopes at an angle matching the
25 slope of the circumferential planar sealing face **21** of the end cap **20**. The beveled rim is smooth and even and also represents a circumferential planar sealing face. In one embodiment, a rotating blade is used to bevel the rim of each header section **12**. The blade rotates around the longitudinal axis of the housing **10** and includes an angle with
30 the longitudinal axis of the housing **10** that matches the desired slope of the rim, i.e. the blade includes an angle of 80 to 85° with the longitudinal axis. The rotating blade is moved towards the housing **10** along the longitudinal axis

of the housing **10** until the rim of the header section **12** has been beveled. The housing **10** then is turned around and the rim of the header section **12** on the other end of the housing **10** is beveled similarly. An advantage of the design
5 of the diffusion and/or filtration device **30** of the present disclosure which includes a beveled rim of the header sections **12** is that a smooth and even sealing face can be produced on the rim of the header sections **12** without compromising the planar cut face of the end wall means **33** generated
10 in the previous process step, and without generating discontinuities, i.e. steps, between the end wall means **33** and the housing **10**.

After the beveling step, the header sections **12** are closed
15 with end caps **20**, thereby causing the rim of the respective header section **12** of the housing **10** and the circumferential planar sealing face **21** of the corresponding end cap **20** to contact each other and form a first tight seal. The particular design of the diffusion and/or filtration device **30** of
20 the present disclosure which includes a circumferential planar sealing face **21** in the end cap **20** and a matching rim of the header section **12** of the housing **10** which also represents a circumferential planar sealing face, both sealing faces sloping at the same angle, makes it possible to provide
25 a fluid-tight seal between the end cap **20** and the housing **10** without having to resort to additional elements like sealing rings, gaskets, or support rings. In addition to the benefit of having fewer components, the space otherwise required by the additional elements now can be utilized,
30 i.e., a larger proportion of the face of the end wall means **33** is accessible to a fluid. This also allows for an increased diameter of the bundle **32** of hollow fiber membranes in the header section **12**.

The end caps **20** then are fused to the housing **10**, thereby providing a second tight seal. In one embodiment of the process, the second tight seal is provided by fusing the outer rim **23** of the end cap **20** to the upper rim of the corresponding collar **14** of the housing **10**.

In one embodiment of the process, first one header section **12** of the housing **10** is sealed with an end cap **20**, and then the other. In another embodiment of the process, both header sections are simultaneously sealed with end caps **20**.

In one embodiment of the process, a contact force is applied to the upper side of the end cap **20** in the direction of the longitudinal axis of the housing **10**, after the header section **12** has been closed with the end cap **20**, thereby pressing the circumferential planar sealing face **21** of the end cap **20** onto the upper rim of the corresponding header section **12** of the housing **10**. The contact force is maintained until the end cap **20** has been fused to the housing **10**. In one embodiment, the contact force is applied to an annular plane **24** which runs along the circumference of the end cap **20** on its upper side. The annular plane **24** is perpendicular to the longitudinal axis of the end cap **20**. In one embodiment, the width of the annular plane **24** equals the width of the outer rim **23** of the end cap **20**; and the outer rim **23** of the end cap **20** and the annular plane **24** are congruent. In one embodiment, the contact force is in the range of from 3,000 to 5,000 N, for instance, 3,500 to 4,500 N.

The noses **13** and the increased wall strength of the header sections **12** increase the rigidity of the header sections **12**, making them less prone to deformation. Likewise, the profile of section **III** of the end cap **20**, with its wall

strength increasing in radial direction towards the outer diameter of the end cap **20**, and the noses **22** in the end cap **20**, which are positioned adjacent to the outer diameter of the sealing face **21**, increase the rigidity of the end cap **20** and make it less prone to deformation. As a result, when the end cap **20** is placed on the header section **12** of the housing **10**, an accurate fit is achieved between the sealing face **21** of the end cap **20** and the rim of the header section **12**, thus providing a fluid-tight seal. Additionally, when a contact force is applied to the end cap **20**, and in particular to the annular plane **24**, the contact force does not cause a deformation of the end cap **20** or the header section **12** which would weaken the seal formed by the sealing face **21** of the end cap **20** and the rim of the header section **12**. Instead, the contact force applied presses together the sealing face **21** of the end cap **20** and the rim of the header section **12** of the housing **10**, and enhances the adhesive strength of the seal.

A variety of techniques known in the art can be used to fuse the end caps **20** to the housing **10**. Suitable examples include laser welding, ultrasonic welding, friction welding, electron beam welding, and solvent welding. The end caps can also be glued to the housing with an adhesive for instance, a polyurethane adhesive. In one embodiment of the process, the end cap **20** is fused to the housing **10** using hot plate welding. A hot plate is brought into close vicinity of the parts to be fused together. After a time sufficient to melt the corresponding parts of the end cap **20** and the housing **10**, respectively, to be fused, the hot plate is removed and the end cap **20** and the housing **10** are pressed together until the melt has solidified, thereby forming a tight seal between the end cap **20** and the housing **10**. The temperature of the hot plate generally is in the range of

from 200 to 400°C. Exemplary processes use temperatures in the range of from 220 to 240°C; or from 330 to 380°C, respectively. The time required to partially melt the components to be joined depends on the temperature used and the distance of the hot plate from the fusion line. The higher the temperature of the hot plate and the closer it is to the fusion line, the shorter the time required to produce the melt. In one embodiment of the process, a surface of the hot plate touches the parts to be melted. In this embodiment, lower temperatures of the hot plate are sufficient to produce a melt. However, there is a risk that the molten material sticks to the hot plate and leaves residues on its surface. Therefore, in another embodiment of the process, the surface of the hot plate does not touch the parts to be melted, but keeps a distance from their surface. The distance generally is at least 0.1 mm; and it can be as large as 10 mm, or even more. In order to keep the time required for the melting process short, the distance generally is in the range of from 0.1 to 1.0 mm. Depending on the temperature of the hot plate and its distance from the fusion line, the residence time of the hot plate generally is in the range of from 1 to 60 seconds; e.g., 1 to 30 seconds; or even 1 to 15 seconds. The time required for the solidification of the melt after the parts have been joined generally is in the range of 10 to 60 seconds, for instance, 15 to 45 seconds.

In one embodiment of the process, the outer rim **23** of the end cap **20** and the upper rim of the collar **14** of the housing **10** are joined using a hot plate. In one embodiment, the outer rim **23** of the end cap **20** and the upper rim of the collar **14** of the housing **10** have the same width and the same outer diameter, i.e., they are congruent; and the upper rim of the collar **14** of the housing **10** is planar and the plane is perpendicular to the longitudinal axis of the

housing **10**. This greatly facilitates the joining process, as the surfaces of both parts will melt evenly, and a uniform, defect-free joint is formed when the two parts are pressed onto each other. A further advantage is that the collar **14** has a diameter which is larger than the diameter of the header section **12**; and there is a gap between the upper rim of the collar **14** and the outside surface of the header section **12**. This allows for heating and melting the upper rim of the collar **14** without also partially melting the outside surface of the header section **12**. In a particular embodiment of the process, the outer rim **23** of the end cap **20** and the upper rim of the collar **14** of the housing **10** are heated by a hot plate having a temperature in the range of from 340 to 365°C; and having a distance from the outer rim **23** of the end cap **20** and the upper rim of the collar **14**, in axial direction, in the range of from 0.1 to 0.3 mm; for a time in the range of from 5 to 10 sec. The hot plate is removed and the outer rim **23** of the end cap **20** and the upper rim of the collar **14** of the housing **10** subsequently are pressed onto each other for a time in the range of from 20 to 30 sec.

List of reference signs

	10	housing
	11	tubular midsection
	12	header section
5	13	nose
	14	collar
	15	fluid port
	20	end cap
	21	sealing face
10	22	nose
	23	outer rim
	24	annular plane
	25	fluid port
	26	two-start thread
15	30	diffusion and/or filtration device
	31	internal chamber
	32	bundle of hollow fiber membranes
	33	end wall means

Claims

1. A housing (10) for a diffusion and/or filtration device comprising a tubular midsection (11); and header sections (12) at both ends of the tubular midsection (11) having a diameter larger than the diameter of the tubular midsection (11); **characterized in that** the wall strength of the header sections (12) is greater than the wall strength of the tubular midsection (11); and a plurality of elongated noses (13) is arranged on the inside surface of each the header sections (12), the noses (13) running parallel to the longitudinal axis of the housing (10) and parallel to each other.
2. The housing of claim 1, wherein the header sections (12) each comprise a collar (14) having a diameter which is larger than the diameter of the header section (12), the upper rim of the collar (14) defining a gap to the outside surface of the header section (12), and being positioned below the upper rim of the header section (12).
3. An end cap (20) for a diffusion and/or filtration device having an inner surface which is axially symmetrical with regard to the longitudinal axis of the end cap and has an inner surface having the form of a funnel and comprising, in the direction of increasing diameter, a first section **(I)** taking the form of a cylinder or a truncated cone, a middle section **(II)** taking the form of a torus segment, and a third section **(III)** taking the form of a truncated cone, **characterized in that** the end cap comprises a circumferential

planar sealing face (21) sloping at an angle in the range of from 5° to 10°.

4. The end cap (20) of claim 3, comprising a plurality of noses (22) evenly distributed over an annulus of the inner surface of the end cap (20) having an inner diameter which is larger than the outer diameter of the sealing face (21).
5. The end cap (20) of claims 3 or 4, wherein the wall strength of the end cap (20) in the zone of the third section (III) increases towards the periphery of the end cap (20).
6. The end cap (20) of any one of claims 3 to 5, comprising an annular plane (24) running along the circumference of the end cap (20) on its upper side, the annular plane (24) being perpendicular to the longitudinal axis of the end cap (10).
7. A diffusion and/or filtration device (30) comprising a housing (10) according to claims 1 or 2; and end caps (20) according to any one of claims 3 to 6.
8. The diffusion and/or filtration device (30) of claim 7, comprising:
 - a) a housing (10) according to claims 1 or 2, defining a longitudinally extending internal chamber (31) including a first end and a second end;
 - b) a bundle (32) of semi-permeable hollow fiber membranes disposed within the internal chamber (31) and extending longitudinally from the first end of the internal chamber (31) to the second end of the internal chamber (31), the hollow fiber membranes each having an outer surface, and a first end and a second end corresponding to the first end and the second end of the internal chamber (31);

c) end wall means (33) supporting the first and second ends of the hollow fiber membranes within the internal chamber (31) so as to sealingly separate the first ends and second ends of the hollow fiber membranes from the outer surfaces of the hollow fiber membranes between the first ends and second ends thereof;

d) end caps (20) according to any one of claims 3 to 6 sealing the mouths of the housing (10).

9. The diffusion and/or filtration device (30) of claim 8, wherein the upper rim of the header section (12) of the housing (10) slopes at the same angle as the circumferential planar sealing face (21) of the end cap (20), the upper rim of the header section (12) of the housing (10) and the circumferential planar sealing face (21) of the end cap (20) contacting each other and forming a first tight seal; and the outer rim (23) of the end cap (20) being fused to the housing (10) and providing a second tight seal.
10. The diffusion and/or filtration device (30) of claim 9, wherein the outer rim (23) of the end cap (20) is fused to the upper rim of the collar (14) of the housing (10) to provide the second tight seal.
11. A process for producing a diffusion and/or filtration device (30), comprising:
 - a) providing a housing (10) according to claims 1 or 2, the housing (10) defining a longitudinally extending internal chamber (31) including a first end and a second end;;
 - b) introducing a bundle (32) of semi-permeable hollow fiber membranes each having an outer surface, a first end and a second end into internal chamber (31) of the housing (10) so that the bundle (32) extends longitudinally from the first end of the internal

chamber (31) to the second end of the internal chamber (31); and the first ends and second ends of the hollow fiber membranes correspond to the first end and the second end of the internal chamber (31), respectively;

c) providing end wall means (33) supporting the first and second ends of the hollow fiber membranes within the internal chamber (31) so as to sealingly separate the first ends and second ends of the hollow fiber membranes from the outer surface of the hollow fiber membranes between the first ends and second ends thereof, by introducing a potting material into the header sections (12) of the housing (10) and allowing the potting material to cure;

d) opening the first and second ends of the hollow fiber membranes by cutting through the end wall means (33) perpendicularly to the longitudinal axis of the housing (10);

e) providing an end cap (20) according to any one of claims 3 to 6 for each header section (12);

f) circumferentially beveling the wall of the rim of each header section (12) to produce a rim of the header section (12) sloping at an angle matching the slope of the circumferential planar sealing face (21) of the end cap (20);

g1) closing each header section (12) with an end cap (20), thereby causing the upper rim of the header section (12) of the housing (10) and the circumferential planar sealing face (21) of the end cap (20) to contact each other and form a first tight seal;

g2) fusing each end cap (20) to the housing (10), thereby providing a second tight seal.

12. The process of claim 11, wherein the second tight seal is provided by fusing the outer rim (23) of the end cap (20) to the upper rim of the collar (14) of the housing (10).

13. The process of claims 11 or 12, wherein a contact force is applied to the upper side of the end cap (20) in the direction of the longitudinal axis of the housing (10), after the header section (12) has been closed with the end cap (20), thereby pressing the circumferential planar sealing face (21) of the end cap (20) onto the upper rim of the header section (12) of the housing (10); and the contact force is maintained until the end cap (20) has been fused to the housing (10).
14. The process of claim 13, wherein the contact force is applied to an annular plane (24) running along the circumference of the end cap (20) on its upper side, the annular plane (24) being perpendicular to the longitudinal axis of the end cap (20).
15. The process of claims 13 or 14, wherein the contact force is in the range of from 3,000 to 5,000 N.

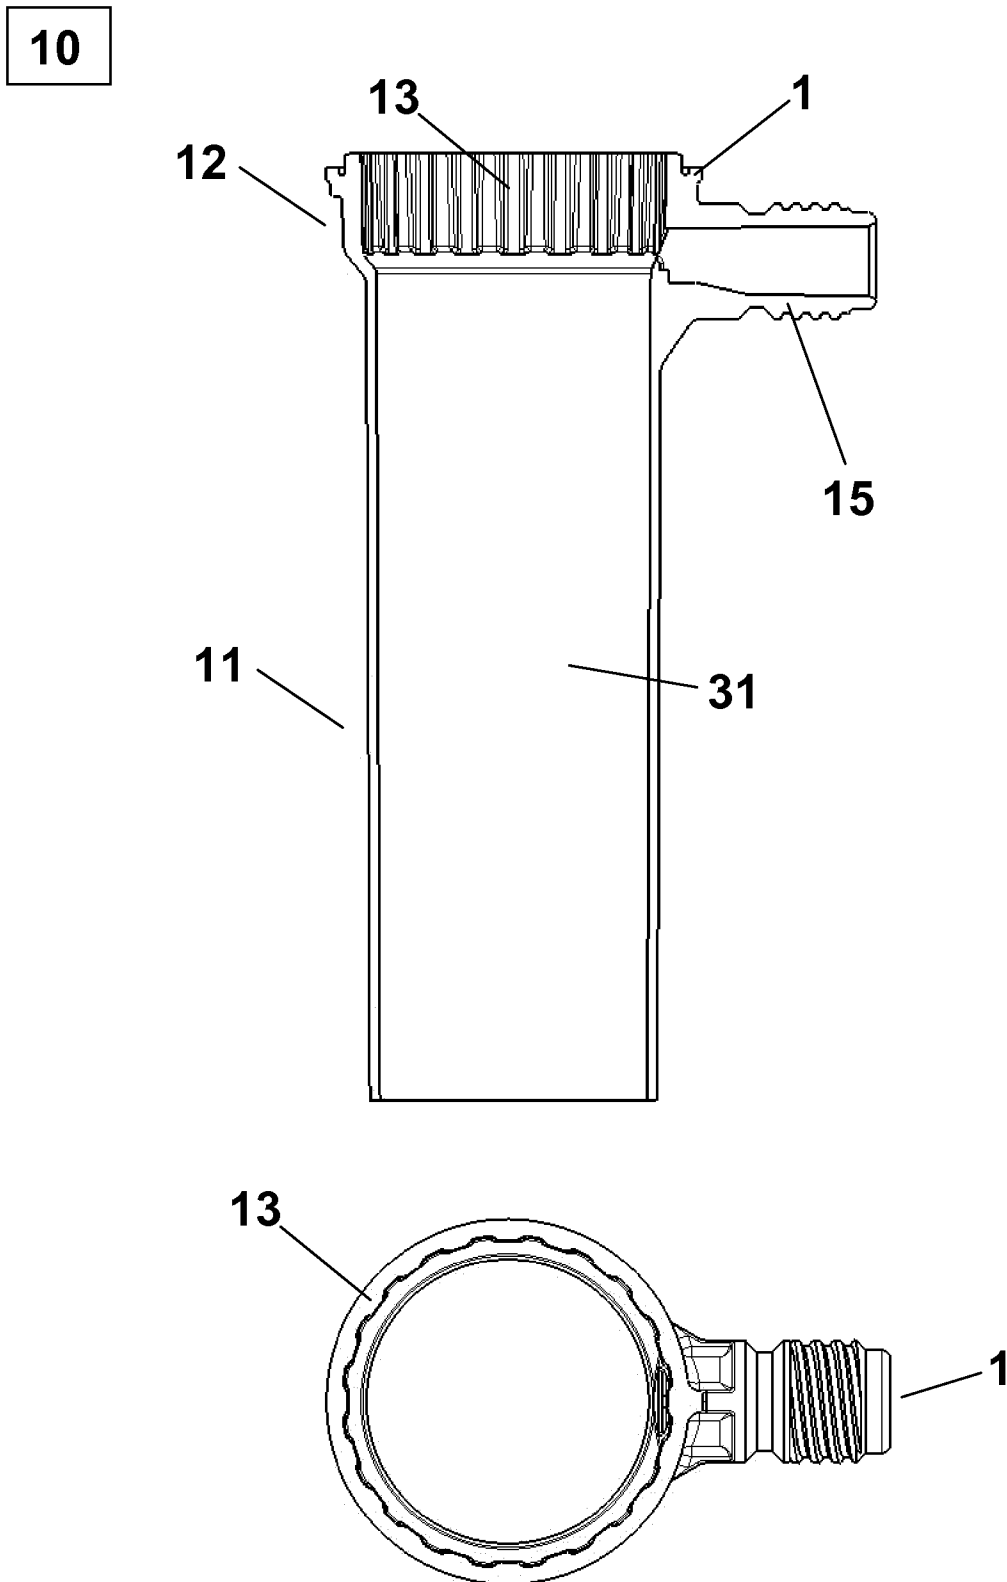


Fig. 1

20

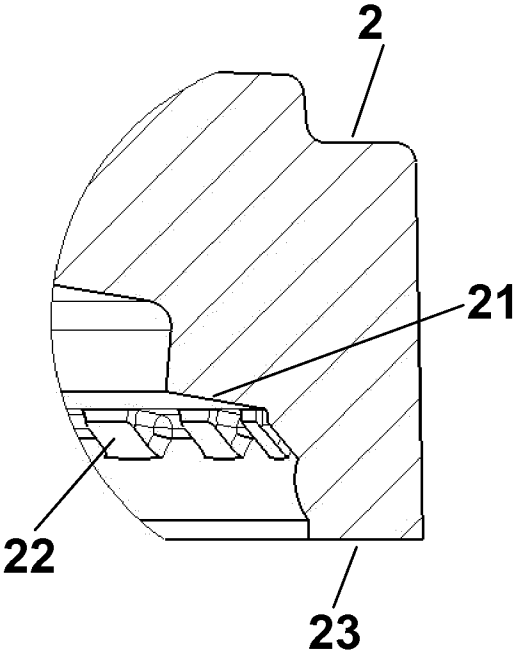
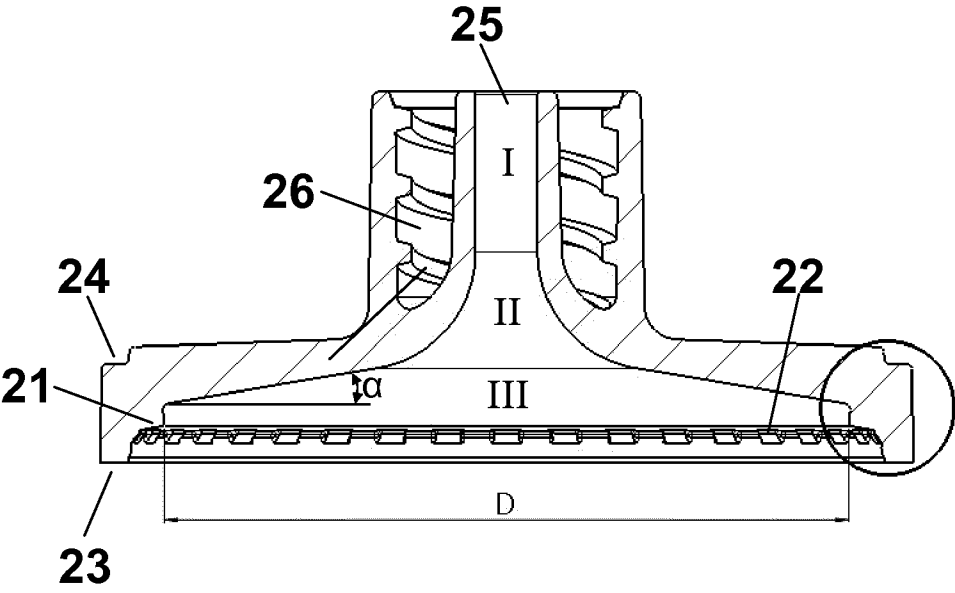


Fig. 2

30

21

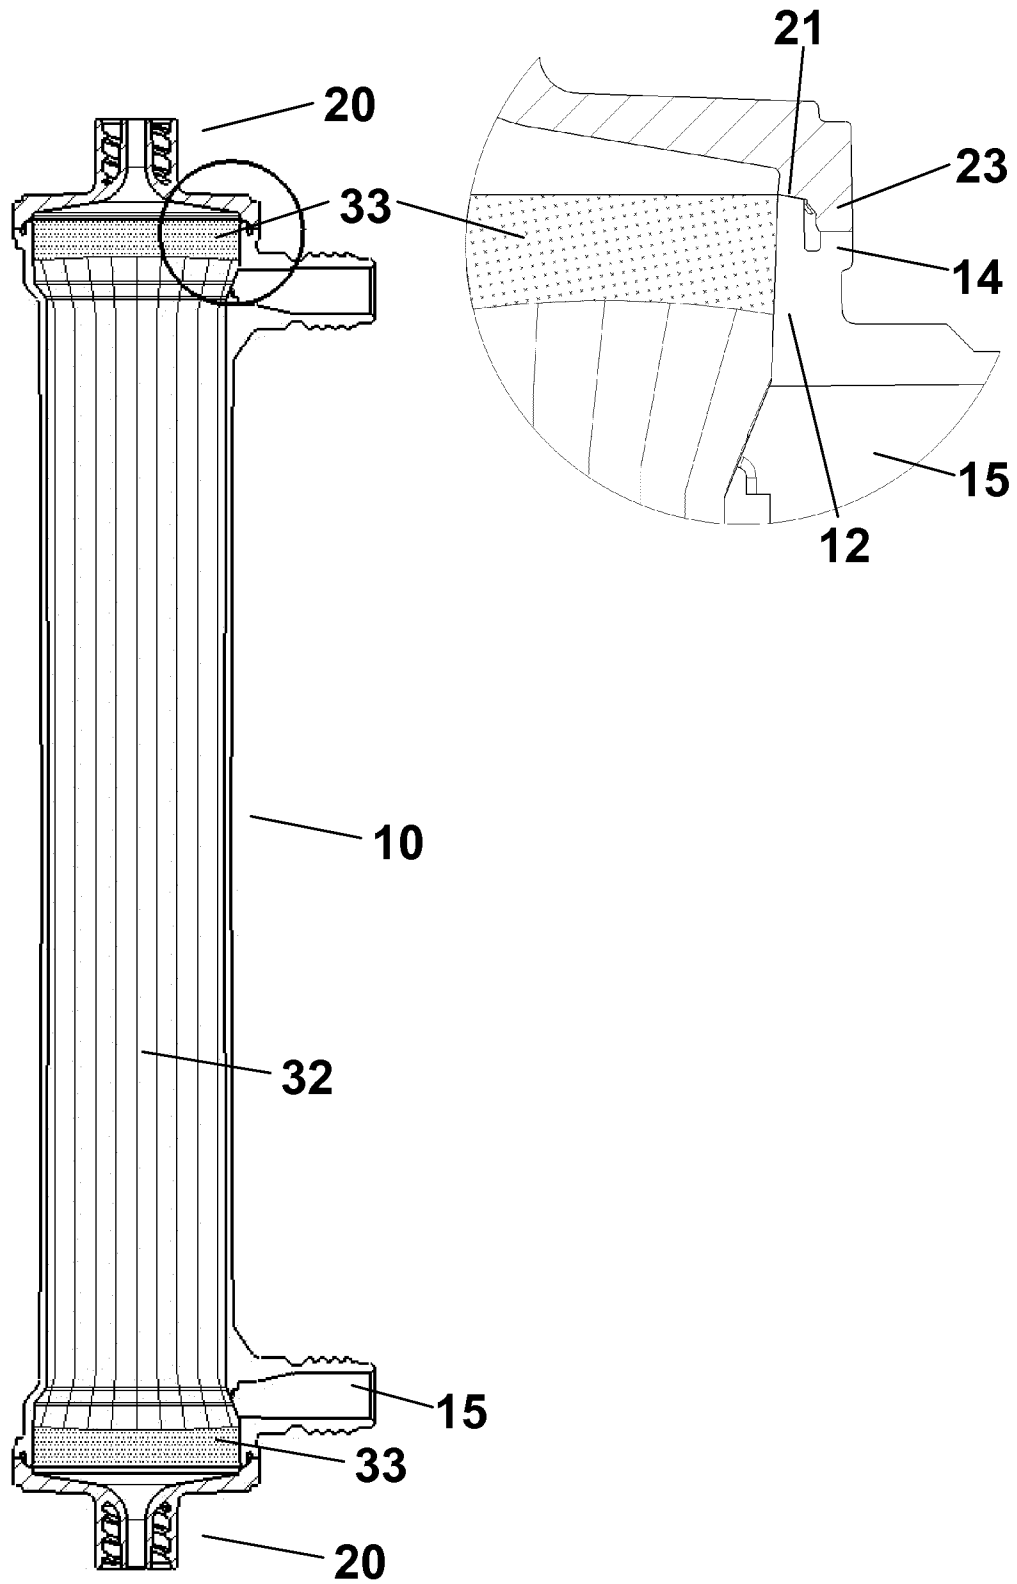


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2017/071700

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B01D63/02
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 B01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2005 161305 A (NIKKISO CO LTD) 23 June 2005 (2005-06-23)	1,3,5,7, 8
Y	abstract; figures 1,2	9,10
X	----- WO 2013/190022 A1 (GAMBRO LUNDIA AB [SE]) 27 December 2013 (2013-12-27)	1,2
A	cited in the application page 3, line 12 - page 5, line 25 page 8, line 24 - page 9, line 11; figures 1,3,4	3-15
X	----- EP 0 844 015 A2 (FRESENIUS MEDICAL CARE DE GMBH [DE]) 27 May 1998 (1998-05-27) cited in the application the whole document	1
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 November 2017

Date of mailing of the international search report

16/11/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Marti, Pedro

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/071700

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 192 499 A (SAKAI SATORU [JP] ET AL) 9 March 1993 (1993-03-09) the whole document	1
X	US 2003/080047 A1 (WATKINS RANDOLPH H [US] ET AL) 1 May 2003 (2003-05-01) the whole document	1
A	EP 0 706 818 A1 (KANEKAFUCHI CHEMICAL IND [JP]) 17 April 1996 (1996-04-17) column 4, line 42 - column 5, line 30; figures 1,2	1
A	US 2005/194305 A1 (VIDO TONY R [US] ET AL) 8 September 2005 (2005-09-08) the whole document	1,2
X	US 4 497 104 A (FOWLES TOM A [US] ET AL) 5 February 1985 (1985-02-05)	3-6
Y	column 3, line 60 - column 4, line 17;	9,10
A	figure 4	11-15
X	US 4 414 110 A (GEEL ZANE H [US] ET AL) 8 November 1983 (1983-11-08) column 7, line 61 - column 9, line 38; figures 5,6	3,5,6
X	US 4 708 796 A (YOSHIMOTO MASAYUKI [JP] ET AL) 24 November 1987 (1987-11-24) column 3, line 61 - column 5, line 2; figures 1,2	3,5
X	EP 2 832 423 A1 (TORAY INDUSTRIES [JP]) 4 February 2015 (2015-02-04) paragraph [0024] - paragraph [0030]; figures 2,4	3,5
A	US 4 283 284 A (SCHNELL WILLIAM J) 11 August 1981 (1981-08-11) the whole document	1-15

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2017/071700

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-15

Housing and end cap for a diffusion and/or filtration device.

1.1. claims: 1, 2

Housing for a diffusion and/or filtration device.

1.2. claims: 3-15

Claims 3-6: End cap for a diffusion and/or filtration device.

Claims 7-10: Diffusion and/or filtration device comprising a housing according to claims 1 or 2; and end caps according to any one of claims 3 to 6.

Claims 11-15: Process for producing a diffusion and/or filtration device comprising the steps of providing a housing according to claims 1 or 2, and providing end caps according to any one of claims 3 to 6 for each header section.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/071700

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2005161305 A	23-06-2005	JP 4381957 B2 JP 2005161305 A	09-12-2009 23-06-2005
WO 2013190022 A1	27-12-2013	CN 202740496 U EP 2864025 A1 US 2015165106 A1 WO 2013190022 A1	20-02-2013 29-04-2015 18-06-2015 27-12-2013
EP 0844015 A2	27-05-1998	EP 0844015 A2 ES 2208806 T3 JP 4312277 B2 JP H10211421 A US 6074559 A US 6426002 B1 US 2002153314 A1 US 2004206704 A1 US 2005056584 A1 US 2006096907 A1 US 2007062871 A1	27-05-1998 16-06-2004 12-08-2009 11-08-1998 13-06-2000 30-07-2002 24-10-2002 21-10-2004 17-03-2005 11-05-2006 22-03-2007
US 5192499 A	09-03-1993	AU 622568 B2 DE 69015905 D1 DE 69015905 T2 EP 0408000 A1 JP H0347271 A US 5192499 A	09-04-1992 23-02-1995 18-05-1995 16-01-1991 28-02-1991 09-03-1993
US 2003080047 A1	01-05-2003	AR 033170 A1 AT 397946 T EP 1406685 A1 JP 4036828 B2 JP 2004529723 A JP 2008029857 A MX PA03010988 A TW 553751 B US 2003080047 A1 WO 02098490 A1	03-12-2003 15-07-2008 14-04-2004 23-01-2008 30-09-2004 14-02-2008 27-02-2004 21-09-2003 01-05-2003 12-12-2002
EP 0706818 A1	17-04-1996	EP 0706818 A1 JP H06296834 A US 5472601 A	17-04-1996 25-10-1994 05-12-1995
US 2005194305 A1	08-09-2005	CN 1680006 A EP 1570896 A1 JP 2005246379 A TW I279250 B US 2005194305 A1	12-10-2005 07-09-2005 15-09-2005 21-04-2007 08-09-2005
US 4497104 A	05-02-1985	CA 1220907 A EP 0128905 A1 ES 8506200 A1 IL 70106 A IT 1169696 B JP S60500246 A US 4497104 A WO 8402486 A1 ZA 8308420 B	28-04-1987 27-12-1984 01-11-1985 16-09-1987 03-06-1987 28-02-1985 05-02-1985 05-07-1984 25-07-1984

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/071700

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4414110	A	08-11-1983	NONE

US 4708796	A	24-11-1987	BE 903324 A 16-01-1986
		DE 3580833 D1 17-01-1991	
		EP 0181470 A2 21-05-1986	
		JP S6163240 U 28-04-1986	
		US 4708796 A 24-11-1987	

EP 2832423	A1	04-02-2015	CA 2868711 A1 03-10-2013
		CN 104245097 A 24-12-2014	
		EP 2832423 A1 04-02-2015	
		HK 1203878 A1 06-11-2015	
		JP 6028730 B2 16-11-2016	
		JP W02013146663 A1 14-12-2015	
		KR 20140137417 A 02-12-2014	
		TW 201343211 A 01-11-2013	
		WO 2013146663 A1 03-10-2013	

US 4283284	A	11-08-1981	AU 528928 B2 19-05-1983
		BE 884219 A 03-11-1980	
		BR 8003833 A 22-04-1981	
		CA 1139677 A 18-01-1983	
		CH 650939 A5 30-08-1985	
		DE 3023681 A1 05-02-1981	
		ES 8200820 A1 16-02-1982	
		FR 2461512 A1 06-02-1981	
		GB 2053725 A 11-02-1981	
		IL 60371 A 30-09-1983	
		IT 1212441 B 22-11-1989	
		JP S5615757 A 16-02-1981	
		JP S6029283 B2 10-07-1985	
		MX 149673 A 09-12-1983	
		NL 8003547 A 20-01-1981	
		SE 448428 B 23-02-1987	
		US 4283284 A 11-08-1981	
		ZA 8004163 B 26-08-1981	
