



No. 649,638.

Patented May 15, 1900.

**E. E. HENDRICK.  
BOBBIN.**

(Application filed July 15, 1899.)

(No Model.)

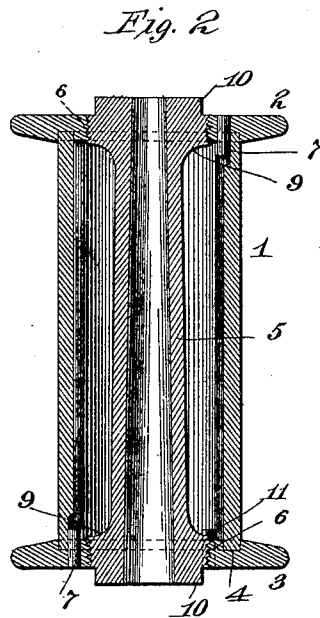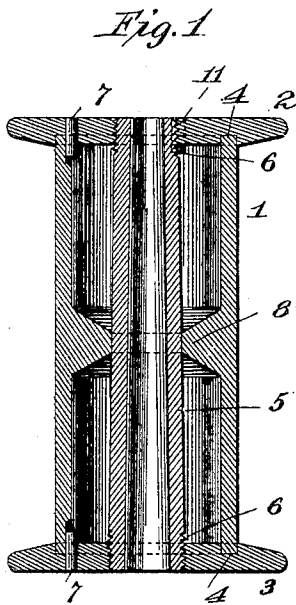

Witnesses:

*Jas. F. Collins*  
*Jno. A. Taylor*

Inventor

*Eli E. Hendrick*  
*by Alfred Edwards & Alfred*  
Att'ys.

# UNITED STATES PATENT OFFICE.

ELI E. HENDRICK, OF CARBONDALE, PENNSYLVANIA.

## BOBBIN.

SPECIFICATION forming part of Letters Patent No. 649,638, dated May 15, 1900.

Application filed July 15, 1899. Serial No. 723,916. (No model.)

*To all whom it may concern:*

Be it known that I, ELI E. HENDRICK, a citizen of the United States, residing at Carbon-  
dale, in the county of Lackawanna and State  
5 of Pennsylvania, have invented a certain new  
and useful Improvement in Bobbins, of which  
the following is a description.

My invention relates to various new and  
useful improvements in bobbins; and the ob-  
10 ject of the invention is to simplify the con-  
struction, increase the efficiency, and reduce  
the cost of manufacture of such devices.

I purpose applying the invention especially  
to bobbins constructed wholly or partly of  
15 hard fiber.

In order that the invention may be better  
understood, attention is directed to the ac-  
companying drawings, forming a part of this  
specification, and in which—

20 Figure 1 is a longitudinal section of one  
form of my improved bobbin, and Fig. 2 a  
similar view of another form thereof.

In both of the above views corresponding  
parts are represented by the same numerals  
25 of reference.

1 represents a tubular body made of wood,  
metal, or any other suitable material, and 2  
3 the circular heads thereof. Preferably the  
ends of the body 1 are seated in annular re-  
cesses 4 in said heads.

5 is a mandrel or core located within the body  
1 and having screw-threaded ends 6 6, which  
engage screw-threaded openings formed cen-  
trally in the heads 2 3, as shown. The man-  
35 drel or core 5 is provided with a bore (here  
shown as tapered, although it may be straight)  
for the proper mounting of the bobbin, as  
will be understood.

In assembling the parts of the bobbin one  
40 of the heads is first engaged with one end of  
the core or mandrel 5. The body 1 is then in-  
serted in place over the said core or mandrel  
and the other head is screwed upon the other  
end of said core, whereby the body 1 will be  
45 clamped tightly between said heads. Dis-  
placement of the heads relative to the body  
is prevented in any suitable way—as, for in-  
stance, by a pin 7 inserted in an opening ex-  
tending through the head and into the body,  
50 as shown, said opening being formed after  
the parts have been assembled or by a pin,  
such as shown in dotted lines at 11, inserted

in an opening extending through the head  
and into the core or mandrel 5. If desired,  
the body 1 may be formed with a rib 8, fitting  
55 over the core or mandrel 5 and by means of  
which the body will be very materially stiff-  
ened at its central part.

The modification shown in Fig. 2 is prac-  
tically identical with that just described, with  
60 the exception that the rib 8 is omitted, and  
the core or mandrel 5 is provided at its ends  
with enlarged portions 9 9, which are screw-  
threaded into the two heads. With this modi-  
fication also the enlarged portions of the core  
65 or mandrel 5 for facility of adjustment are  
made to extend beyond the heads 2 3 at 10,  
as shown.

A bobbin made in accordance with my pres-  
ent invention can be constructed very cheaply  
70 and will be light and durable in use.

Having now described my invention, what  
I claim as new, and desire to secure by Letters  
Patent, is as follows:

1. As a new article of manufacture, a bob-  
bin provided with a cylindrical body, a head  
75 at each end of said body, a hollow core or  
mandrel engaging the heads by screw-thread-  
ed connections, whereby the heads will be  
clamped tightly in position against the ends  
80 of the body, and means for preventing the  
heads from rotating with respect to the body,  
whereby disengagement of the heads from  
the screw-threaded ends of the core or man-  
drel will be prevented, substantially as set  
85 forth.

2. As a new article of manufacture, a bob-  
bin provided with a body, a head at each end  
of said body, a hollow core or mandrel en-  
gaged with said heads and clamping the same  
90 upon the body, and a pin passing through each  
head into the body for preventing the dis-  
engagement of the body from said core or man-  
drel, substantially as set forth.

3. As a new article of manufacture, a bob-  
bin provided with a body, a head at each end  
of said body, a hollow core or mandrel screw-  
threaded into said heads and clamping the  
same upon the body, and a pin passing  
45 through each head into the body for prevent-  
ing the disengagement of the heads from said  
core or mandrel, substantially as set forth.  
100

4. As a new article of manufacture, a bob-  
bin provided with a cylindrical body, a cir-

cular head at each end of said body, a hollow  
core or mandrel mounted within the body and  
having enlarged ends which are screw-thread-  
ed into said heads, and a pin passing through  
5 each head into the body for preventing said  
heads from being unscrewed, substantially  
as set forth.

5. As a new article of manufacture, a bob-  
bin provided with a cylindrical body, a cir-  
10 cular head at each end of said body, a hollow  
core or mandrel mounted within the body  
and having enlarged ends which are screw-

threaded into said heads, said enlarged ends  
extending beyond the heads, and a pin pass- 15  
ing through each head into the body for pre-  
venting said heads from being unscrewed,  
substantially as set forth.

This specification signed and witnessed  
this 10th day of July, 1899.

ELI E. HENDRICK.

Witnesses:

W. T. COLVILLE,  
L. A. BASSETT.