



(86) Date de dépôt PCT/PCT Filing Date: 2011/09/23
(87) Date publication PCT/PCT Publication Date: 2012/03/29
(85) Entrée phase nationale/National Entry: 2013/03/19
(86) N° demande PCT/PCT Application No.: CA 2011/001060
(87) N° publication PCT/PCT Publication No.: 2012/037658
(30) Priorités/Priorities: 2010/09/24 (US61/386,245);
2010/09/24 (US61/386,270); 2010/09/27 (US61/386,689)

(51) Cl.Int./Int.Cl. *G06F 21/00* (2013.01),
G06F 3/14 (2006.01)
(71) Demandeur/Applicant:
RESEARCH IN MOTION LIMITED, CA
(72) Inventeurs/Inventors:
BROWN, MICHAEL KENNETH, CA;
BENDER, CHRISTOPHER LYLE, CA;
LITTLE, HERBERT ANTHONY, CA;
BROWN, MICHAEL STEPHEN, CA
(74) Agent: MOFFAT & CO.

(54) Titre : PROCEDE ET APPAREIL POUR UNE COMMANDE D'ACCES DIFFERENCIEE
(54) Title: METHOD AND APPARATUS FOR DIFFERENTIATED ACCESS CONTROL

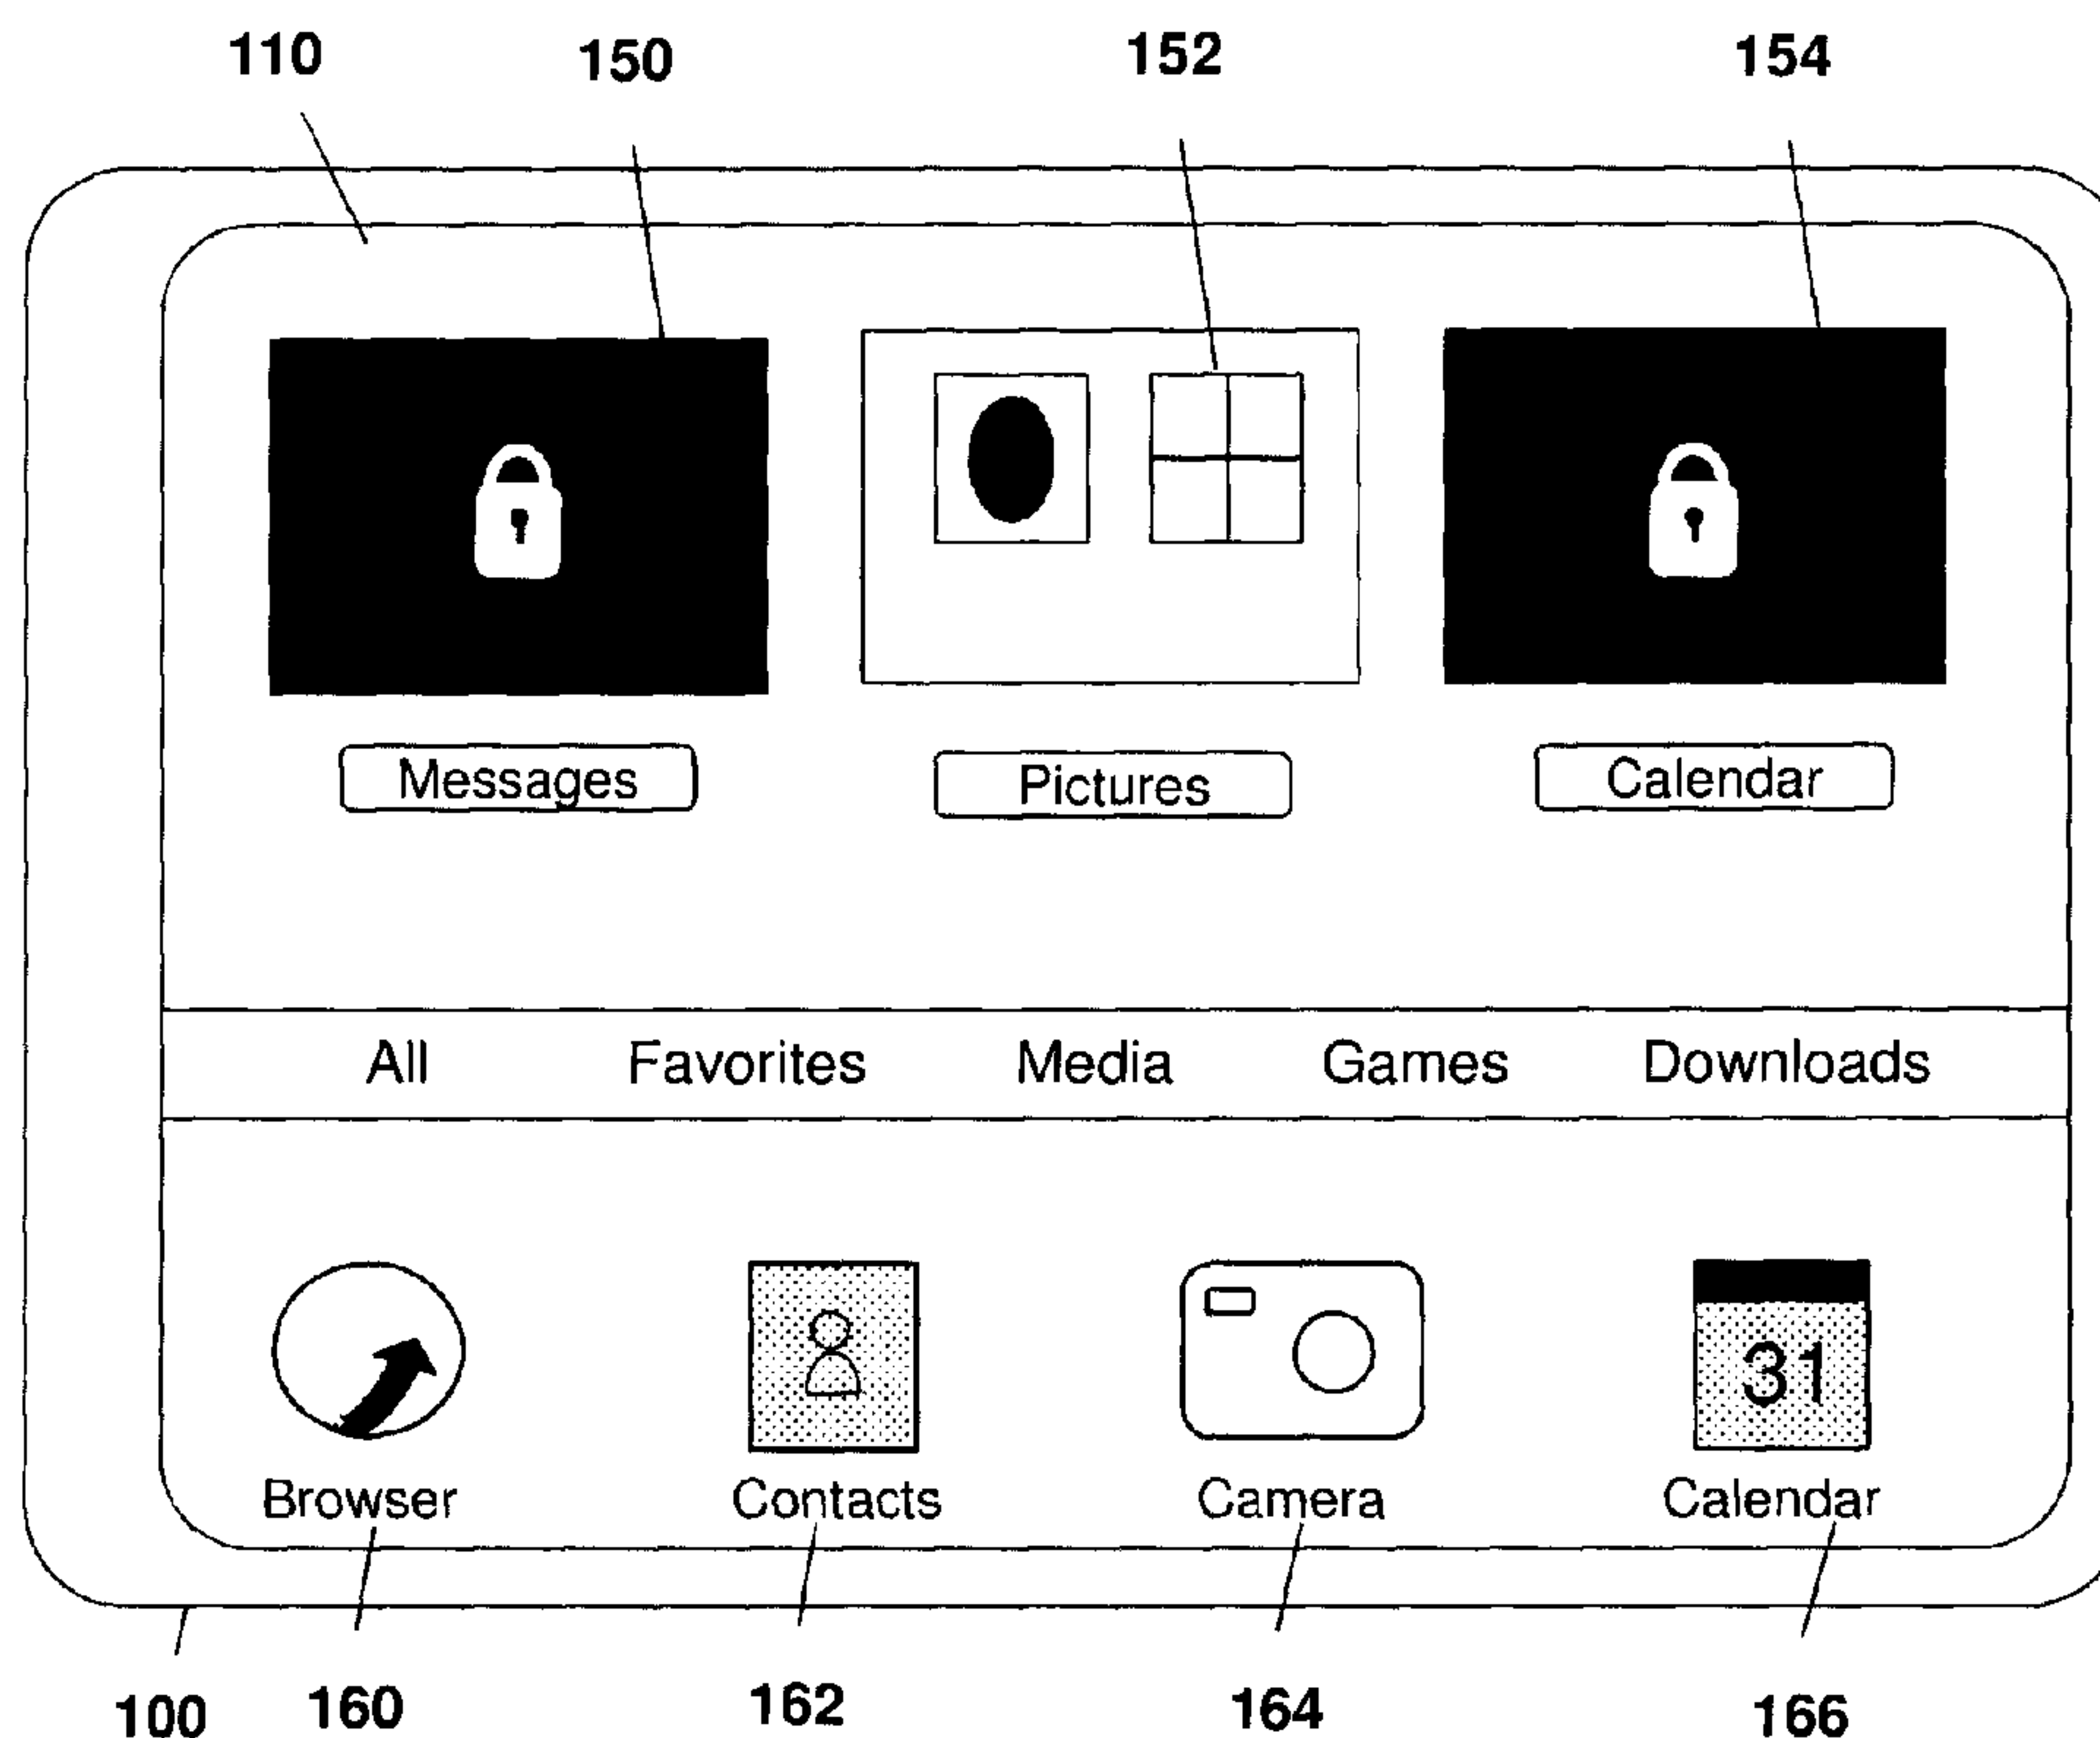


FIG. 3B

(57) **Abrégé/Abstract:**

A method for differentiated access control on a computing device having a connection with a second device, the method checking whether a timer has expired on the second device or if a connection is lost to the second device; and preventing at least one of the plurality of application subsets from being launched or enabled if the timer has expired on the second device or the connection is lost to the second device.

ABSTRACT

A method for differentiated access control on a computing device having a connection with a second device, the method checking whether a timer has expired on the second device or if a connection is lost to the second device; and preventing at least one of the plurality of application subsets from being launched or enabled if the timer has expired on the second device or the connection is lost to the second device.

METHOD AND APPARATUS FOR DIFFERENTIATED ACCESS CONTROL

RELATED APPLICATIONS

[0001] The present application claims priority from US Provisional Application No. 61/386245, filed Sept. 24, 2010; US Provisional Application No. 61/386270, filed Sept 24, 2010; and US Provisional Application No. 61/386689, filed Sept 27, 2010, the contents of all of which are incorporated herein by reference.

FIELD OF THE DISCLOSURE

[0002] The present disclosure relates to computing devices and in particular relates to application security on the computing devices.

BACKGROUND

[0003] Computing devices, including mobile devices such as personal digital assistants, smart phones, cellular telephones, laptops, among others, as well as desktop or other computing devices have the capability of running multiple applications at one time. For security purposes, a user or an IT policy for the user may dictate that the computer device lock access to the applications that are running after a period of inactivity. For example, if the user has not touched the computing device for 2 minutes, all of the applications on the device may lock. The user is then required to enter a password prior to the use of any application on the device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] The present application will be better understood with reference to the drawings, in which:

Figure 1 is an example representation of a user interface showing a cover flow style with running applications;

Figure 2 is a representation of an example user interface in which the mobile device is locked and requires a password;

Figure 3A is an example user interface representation showing a cover sheet with running applications in which a subset has been locked;

Figure 3B is another example user interface representation showing a cover flow with running applications in which a subset has been locked;

Figure 4 shows a data flow diagram for locking a subset of applications;

Figure 5 shows an example diagram of a table which has a plurality of locked times for various application subsets;

Figure 6 is a data flow diagram showing the locking of various subsets of applications at different times;

Figure 7 is a block diagram showing a connection between a secure device and a non-secure device;

Figure 8 is a flow diagram showing the launching or enabling of an application;

Figure 9 shows a simplified block diagram of a computing device; and

Figure 10 is a block diagram of an example mobile device capable of being used with the present disclosure.

DETAILED DESCRIPTION

[0005] The present disclosure provides a method for providing differentiated access control on a computing device having a connection with a second device, the method comprising: checking whether a timer has expired on the second device or if a connection is lost to the second device; and preventing each application of at least one of a plurality of application subsets from being launched or enabled if the timer has expired on the second device or the connection is lost to the second device.

[0006] The present disclosure further provides a computing device comprising: a processor; a communications subsystem; a user interface; and memory, wherein the computing device communicates with a second device, and wherein the computing device is configured to: determine whether a timer has expired on the second device or if a connection is lost to the second device; and prevent each application of at least one of a plurality of application subsets from being launched or enabled if the timer has expired on the second device or the connection is lost to the second device.

[0007] When a user is interacting with a computing device, he or she may have multiple applications running at one time. Some of these applications may be work oriented and some may be personal oriented. For example, work oriented applications may include, but are not limited to, customer relationship management software, enterprise resource planning software, server or desktop virtualization software such as Citrix™, among others. Examples of personal applications may include, but are not limited to, various social networking applications, games, really simple syndication (RSS) readers among others. Hybrid applications which may involve both personal and business oriented functionality, such as email applications may, for security reasons, be considered to be corporate applications.

[0008] When used herein, a computing device can be any device capable of running applications and providing a user interface to a user. Examples of computing devices include desktop computers, personal computers, tablets, mobile devices such as smart phones, personal digital assistants (PDAs), digital data devices, among others. The present disclosure is not meant to be limited to any particular computing device.

[0009] Many computing devices include an inactivity lock out period. After the inactivity period expires, the device locks and the user must enter a password prior to being permitted to continue utilizing applications that are already running or launching new applications.

[0010] One issue is that when a device locks, access to both personal and work oriented applications will also lock. This may be due to an IT policy which required that work items be locked after a certain inactivity time. However, it may not be ideal to force a strict policy onto a user's personal applications merely because work applications are being protected.

[0011] The present disclosure provides for a navigation entity that manages launching applications. The entity is aware of which applications are work

(business) oriented and which are personal oriented. In case of locking the device from inactivity, the navigation entity can ensure that only work oriented applications require an authentication mechanism such as a password entry to regain access to them.

[0012] In other embodiments, applications can be further differentiated into different classes of applications, and various classes of applications can have different inactivity times. Upon the expiration of the inactivity time for a particular class of applications, that class of applications can then be locked and require a password to launch or enable applications already running which are of that class. Any number of classes can be used, and at one extreme each application on the device can have its own class.

[0013] Defining the class of an application, for example personal or corporate, can be done by various entities, and the present disclosure is not meant to be limited to any particular entity defining the class of the application. In one embodiment, an enterprise information technology (IT) department may deem various applications to be work oriented and thus can, on an enterprise server or on the individual devices, designate that certain applications are considered to fall with a particular class. For example, with the two-class system of work in personal applications, the IT department can designate which applications are considered to be work applications on a user's device. The remaining applications on the device can then, by default, be designated as personal applications.

[0014] In other embodiments, the user can set the IT policy himself or herself for security purposes. Thus, the navigator entity can have a configuration option in which the various applications are configured to be either work or personal applications in a two-class system or can be configured to be one of various classes in a multi-class system. This permits the user to have a level of security if, for example, they leave their computer running or if a laptop or mobile device that they carry is misplaced or stolen.

[0015] A user utilizing the differentiated access system as described above can have easy access to their personal data and applications while at the same time providing for a secure environment for corporate or corporate applications meeting the IT policies of their enterprise.

[0016] Reference is now made to **Figure 1**. **Figure 1** shows an example user interface. In one potential embodiment, the user interface may comprise a grid style type interface that shows thumbnails of applications that are currently running or potential applications that may be launched. Thus, for example, in **Figure 1**, user interface **110** on mobile device **100** includes icons **120**, **122**, **124**, **126**, **128** and **130**. Each of these thumbnails can represent an application that is currently running, for example. In one embodiment, the grid style may show the current screen shot of the application as it is currently running. Thus, for example, icon **128** may represent a spreadsheet application or spreadsheet viewer that shows a view of the data on a current spreadsheet.

[0017] In order to bring an application into focus, or enable the application, the user may select one of the thumbnails. The selection causes the application to become the application in focus.

[0018] In other embodiments, rather than having thumbnails in a grid style, various navigator entities can include icons or text or other combinations to identify the various applications, either potentially to be launched or already running, to a user. The present disclosure is not meant to be limited to any particular representation of applications to a user.

[0019] Reference is now made to **Figure 2**. **Figure 2** shows a mobile device **100** on which there has been no activity for a particular amount of time. In this case, the user interface **110** has been locked by the navigation entity and the user is required to enter a password to unlock the device, as is shown by password prompt **210**. In this case, the entire device is locked and password entry is prompted to access both personal and corporate data.

WO 2012/037658

PCT/CA2011/001060

[0020] Referring to **Figure 3A**, **Figure 3A** shows an embodiment in which the mobile device **100** has user interface **110** showing the applications already running or capable of being launched. As with **Figure 1**, the embodiment of **Figure 3A** shows a grid style navigation in which various applications can be selected and thumbnails of the current screen on those applications is shown. However, the embodiment of **Figure 3A** has had a period of inactivity in which work/corporate applications have been locked. In the embodiment of **Figure 3A**, applications **120**, **122**, **126** and **130** are personal applications and are shown as being selectable to a user.

[0021] Conversely, applications **124** and **128** have now been made inaccessible and would require password entry in order to access or launch the applications.

[0022] Instead of graying-out the application other options are possible. For example, the thumbnails may be provided in a different color. However, if a thumbnail contains a screenshot, sensitive data may be visible even when the device is locked. Thus, the graying-out of the application can provide additional security.

[0023] In other options, instead of providing a gray box, an icon or some other visual display may be provided to a user, and the present disclosure is not meant to be limited to any particular symbol or way of representing or showing restricted access to applications.

[0024] Thus, in the embodiment of **Figure 3A**, the applications represented by thumbnails **120**, **122**, **126** and **130** can be launched without any restriction but the applications represented by thumbnails **124** and **128** would require a password entry to unlock them.

[0025] Another example cover flow style user interface is shown with regard to **Figure 3B**. In particular, in **Figure 3B**, applications **150**, **152** and **154** are running. However, due to inactivity, the windows for applications **150** and **154** have been obscured, for example, blacked out. In the example of **Figure 3B**,

WO 2012/037658

PCT/CA2011/001060

a lock icon is placed over these application thumbnails. In another example, the windows and icons may be obscured by being hidden when their respective applications are locked.

[0026] Similarly, applications that are considered to be within a class of locked applications will not be permitted to be started by the application launcher. Thus, in the example of **Figure 3B**, applications icons **160**, **162**, **164**, and **166** allow the respective applications to be started. In the example of **Figure 3B**, however, application icons **162** and **166** are shown obscured, for example, greyed out, indicating that these applications cannot be launched or enabled without receipt of a password because they are considered to be in the class of locked applications.

[0027] Reference is now made to **Figure 4**. A navigation entity on the mobile device may track the various applications and determine when they should be locked. One example method of locking the applications at the navigation entity is shown in **Figure 4**.

[0028] The process of **Figure 4** starts at block **410** and proceeds to block **420** in which a timer is reset. The timer represents the maximum inactivity time before applications are locked. The value of the timer at block **420** can be determined by the user, by an IT department from the user's enterprise, or it can be provisioned by a mobile device manufacturer or set by a carrier of a mobile device, among various other options.

[0029] From block **420**, the process proceeds to block **422** in which a check is made to determine whether any activity has occurred. If activity has occurred, the process proceeds from block **422** to block **420** in which the timer is reset.

[0030] From block **422**, if no activity has occurred on the device the process proceeds to block **424** in which a check is made to determine whether or not the timer has expired. If not, the process proceeds back to block **422** to continue to check for activity and to block **424** to determine whether the timer has expired.

[0031] From block **424**, if the timer has expired, the process proceeds to block **430** in which office applications are locked and would require a password to launch the applications. Corporate or work applications may be identified in various ways. For example, the navigation entity can have a list of applications and a flag can be associated with each, where the flag indicates whether or not the application is a corporate application. In other embodiments, the navigation entity can query an enterprise server when locking applications. In other embodiments, a list of applications that are corporate applications can be stored and the navigation entity goes through the list to lock the applications within the list. Other examples of identifying corporate applications are possible.

[0032] The process then proceeds to block **440** and ends.

[0033] The check at block **422** to determine whether activity has occurred may be looking for various activity. In one embodiment, any use of a user interface on the device can be considered to be activity and thus reset the inactivity timer. However, in other embodiments, "activity" may include use of work applications only. Thus, for example, if the user is using a personal application and is not using any work application, the activity check in block **422** may be looking to see whether or not there is activity on the work applications and may cause the work applications to lock even though the user is interacting with the device.

[0034] In other embodiments, each application or class of application can have its own inactivity time before it locks. Thus, applications that are more likely to access more sensitive data can have a shorter inactivity period than other applications that may not be as sensitive.

[0035] Reference is now made to **Figure 5**. A navigation entity may keep a table or list of the various classes of applications and a lock time for each class. The example of **Figure 5** shows a table in which each of the classes **510** is associated with a lock time **520**.

[0036] Lock time **520** can be an absolute time at which the class is locked. Alternatively, it can include a timer value or a countdown time.

[0037] For example, in row **530**, class XYZ has a lock time represented as an absolute time of 17:36:24, indicating that at 5:36 pm and 24 seconds the application will lock. Column **540** includes a class ABC which has a lock time of 17:28:31 which indicates that at 5:28 and 31 seconds, class ABC will be locked.

[0038] Referring to **Figure 6**, **Figure 6** shows a process for locking the various classes at individual times. The process of **Figure 6** starts a block **610** and proceeds to block **612** in which the lock times are reset for those applications or classes that are not already locked.

[0039] The process then proceeds to block **620** in which a check is made to determine whether there is any activity. If yes, the process proceeds back to block **612** in which the lock times are reset for the applications that are not already locked. Thus, referring to **Figure 5**, the class XYZ may be, for example, the current time plus 5 minutes of inactivity and thus the lock time represented in column **520** can be reset to the current time plus 5 minutes. Similarly, class ABC may be current time plus 3 minutes of inactivity and the lock time in column **520** would be reset to this value.

[0040] From block **620**, if there is no activity the process proceeds to block **630** to determine whether or not the time has expired for any class. This can be done by checking the current time against all of the entries in the lock time, for example. In other embodiments, if the column **520** represents a countdown timer then the check at block **630** may include the decreasing of the time and check to see whether or not any of the times have reached zero. Other options are also available.

[0041] From block **630**, if no timers have expired the process proceeds back to block **620** and the process continues to check between block **620** and **630** until either activity occurs or until one of the activity timers expires.

[0042] From block **630**, the process proceeds to block **632** in which the class or application whose timer has expired is locked. The process then proceeds to block **634** in which a check is made to determine whether there are any other classes or applications which have unexpired lock times. If yes, the process proceeds back to block **620** to either check for activity and continues to check between block **620** and **630** until the remaining timers or times have expired.

[0043] Utilizing the example of **Figure 5**, if the time for class ABC expires, the process will proceed to block **632** and lock the applications associated with class ABC. At this time, class XYZ is still active and therefore the process will proceed from block **634** back to block **620**. In this example, if activity occurs, the process will proceed back to block **612** in which the lock times will be reset. However, since class ABC is already locked, the process will merely reset the lock time for class XYZ.

[0044] From block **634**, if all of the lock times have expired, the process will proceed to block **640** and ends.

[0045] The process of **Figure 6** can be restarted if the applications are then unlocked.

[0046] The navigation entity will also control the launching or enabling of applications. As used herein, launching applications refers to starting applications that are currently not running. Enabling applications refers to the bringing into focus of currently running applications.

[0047] In an alternative embodiment, the locking may be controlled based on the status of a paired device. In particular, the locking can be controlled

based on whether a paired device has locked (based on a timeout or a manual lock) or whether a connection to the paired device has been lost.

[0048] Reference is now made to **Figure 7**. In one embodiment, control of a subset of applications on a computing device **702** may be based on a connection to a secure (IT trusted) computing device **710**.

[0049] In one example, the secure device comprises mobile device **710**. However, this is merely an example and other possibilities for secure mobile devices are known. The computing device **702** may comprise a tablet computer in one example.

[0050] The example of **Figure 7** uses two classes of data/applications, corporate and personal. However, this is merely an example and more classes of data/applications may be used.

[0051] In order to run corporate applications on computing device **702**, a client **720** may be provided on the computing device **702**. Client **720** communicates with a server **722** on the mobile device **710** to obtain corporate data.

[0052] Further, the computing device **702** may include memory which has a corporate space **734** for storing corporate applications that may be run on computing device **702**. Computing device **702** may also have a personal space **732** within memory **730**.

[0053] As seen in the example of **Figure 7**, the personal mobile space contains applications **732** which may access data **736**. However, no similar data exists for corporate applications **734**.

[0054] In an alternative embodiment, corporate space **734** may have data **738** which may be regulated by the same corporate policies as data **748** on mobile device **710**. Thus, data **738** would be subject to access restrictions to corporate applications, garbage collection, restrictions on copying or cutting, among the other restrictions provided above. The client **710** may provide this functionality.

WO 2012/037658

PCT/CA2011/001060

[0055] On mobile device **710** the divided modes are similarly provided. In particular, application space **740** contains a personal application area **742** and a corporate application area **744**.

[0056] In order to provide security, a user of computing device **702** may start an application under the corporate application **734**. As indicated above, a password may be required to start such applications.

[0057] Client **710** recognizes that a corporate application **734** is running and can communicate with server **720** to indicate that corporate data can be provided. In this way server **720** can access the corporate data that is either in data storage **748** or the corporate data can be obtained from an enterprise server.

[0058] Corporate applications **744** do not necessarily have to be the same as corporate applications **734**. For example, with a larger display, computing device **702** may be able to run different applications or variations of applications **744**. The corporate data **748** may be the same between the two sets of applications, but can be displayed to the user or used by corporate applications **734** differently than the data **748** would be used on mobile device **710**.

[0059] The corporate data may then be provided over a connection **760** between mobile device **710** and computing device **702**. Connection **760** may comprise any short or long range wired or wireless connection and examples of such connections include Bluetooth™, Universal Serial Bus (USB), IrDA, WiFi, NFC, among others.

[0060] Communication over link **760** can be secure. That is, corporate data that is passed to computing device **702** or back to mobile device **710** may be encrypted. In one embodiment, the encryption key may be stored on mobile device **710** thus necessitating the connection in order to decrypt the data on the computing device **702**.

[0061] Further, it may be a policy that the data is not stored on computing device **702**. Thus, except for some caching that is required for smooth

WO 2012/037658

PCT/CA2011/001060

operation of computing device **702**, corporate data will not be stored on device **702**. Further, client **710** can ensure that the cache is cleared prior to the corporate application shutting down.

[0062] In terms of locking applications on computing device **702**, the locking may be based on mobile device **710**.

[0063] In one embodiment, corporate applications **734** can be locked if mobile device **710** times out from inactivity and thus locks. This would then require a user to enter a password to unlock mobile device **710** and corporate applications **734**. The locking of mobile device **710** may also be a result of an explicit action to lock the mobile device **710**.

[0064] In a further embodiment, corporate applications **734** may lock if the connection **760** between computing device **702** and mobile device **710** is disconnected. In this case the connection may need to be re-established prior to applications **734** being enabled or started.

[0065] The locking of applications may result in a cover flow style similar to that of Figures 3A and 3B. A user might also be prompted for the mobile device **710** password when trying to access or enable a corporate application.

[0066] Personal applications **732** may be unaffected by the connection to mobile device **710** in one embodiment, and in accordance with the above, remain unlocked even if corporate applications **734** are locked.

[0067] Reference is now made to **Figure 8**. In **Figure 8**, the process starts at block **810** and proceeds to block **820** in which a navigation entity has received a request to launch or enable an application. The process then proceeds to block **830** to check whether or not the application for which the request was received is locked. If no, the process proceeds to block **840** and launches or enables the application.

WO 2012/037658

PCT/CA2011/001060

[0068] Conversely, if the application is locked, assuming that a connection exists to a mobile device **710** if required to launch the application, the process proceeds to block **850** to request the password to unlock the application.

[0069] From block **850** the process proceeds to block **852** to check whether or not the password is correct. If yes, the process proceeds to block **854** in which other locked applications are also unlocked based on the successful password entry and the process then proceeds to block **840** in which the application is launched or enabled.

[0070] From block **852** if the password is not valid the process may proceed to block **860** in which a check is made to determine whether the maximum number of attempts at entering the password has occurred. If no, the process may proceed back to block **850** to prompt the user for a password again.

[0071] From block **860**, if the maximum number of password attempts have been made, the process proceeds to block **862** in which security measures are initiated based on the maximum number of attempts being reached. This may include wiping out the memory of the device completely, blocking attempts at access for a predetermined time period, among other options.

[0072] From block **862** or block **840** the process proceeds to block **870** and ends.

[0073] The navigator entity may be found on any computing device. Referring to **Figure 9**, **Figure 9** shows a simplified block diagram of a computing device. In the example of **Figure 9**, device **910** includes a processor **920**. Processor **920** interacts with a navigator entity **930**, which may be a software application found on device **910**.

[0074] Processor **920** further interacts with an application memory **940**. In one embodiment, application memory **940** may be segregated in some embodiments to provide security for locked applications verses unlocked applications. Thus, the two memory areas may be separate and may be

inaccessible by applications that are of different classes. This is similar to, for example, UNIX file permissions in which various group permissions can be set for various applications. In this way, portions of application memory **940** may be inaccessible by non-authorized applications, thereby providing additional security.

[0075] Processor **920** may further communicate with a user interface **950**. User interface **950** can comprise any user interface, including, for example, a display on the computing device, audio output means, as well as input means such as a keyboard, mouse, stylus, touch screen, among others. Software for processor **920** may display the various applications on user interface **950**. Further, navigator entity **930** may provide that certain application representations on the user interface be displayed as grayed-out or unavailable until a password is entered utilizing the input component of user interface **950**.

[0076] While computing device **100** or **710** or **810** may be any computing device, as indicated above, in one embodiment computing device **100**, **710** or **810** may be a mobile device. One such mobile device is illustrated below with reference to **Figure 10**. The mobile device of **Figure 10** is however not meant to be limiting and other mobile devices may also be used.

[0077] Mobile device **1000** may comprise a two-way wireless communication device having voice and data communication capabilities. Mobile device **1000** generally has the capability to communicate with other devices or computer systems. Depending on the exact functionality provided, the mobile device may be referred to as a data messaging device, a smartphone, a tablet, a computer, a wireless e-mail device, a cellular telephone, a wireless Internet appliance, a wireless device, a user equipment, or a data communication device, as examples.

[0078] Where mobile device **1000** is enabled for two-way communication, it will incorporate a communication subsystem **1011**, including both a receiver **1012** and a transmitter **1014**, as well as associated components such as one

WO 2012/037658

PCT/CA2011/001060

or more antenna elements **1016** and **1018**, local oscillators (LOs) **913**, and a processing module such as a digital signal processor (DSP) **920**. The particular design of the communication subsystem **1011** will be dependent upon the communication network in which the device is intended to operate.

[0079] Network access requirements will also vary depending upon the type of network **1019**. In some networks, network access is associated with a subscriber or user of mobile device **1000**. A mobile device may require a removable user identity module (RUIM) or a subscriber identity module (SIM) card in order to operate on the network. The SIM/RUIM interface **1044** may be similar to a card-slot into which a SIM/RUIM card can be inserted and ejected like a diskette or PCMCIA card. The SIM/RUIM card can have memory and hold many key configuration **1051**, and other information **1053** such as identification, and subscriber related information. A SIM/RUIM is however an optional feature.

[0080] When required network registration or activation procedures have been completed, mobile device **1000** may send and receive communication signals over the network **1019**. As illustrated in **Figure 10**, network **1019** can consist of multiple base stations communicating with the mobile device. For example, in a hybrid CDMA 1x EVDO system, a CDMA base station and an EVDO base station communicate with the mobile station and the mobile device is connected to both simultaneously. In other systems such as Long Term Evolution (LTE) or Long Term Evolution Advanced (LTE-A), multiple base stations may be connected to for increased data throughput. Other systems such as GSM, GPRS, UMTS, HSDPA, among others are possible and the present disclosure is not limited to any particular cellular technology. In other embodiments, the mobile device may communicate with an access point rather than, or in addition to, a cellular network. Such communication may be done using WiFi or WiMAX, for example.

[0081] Signals received by antenna **1016** through communication network **1019** are input to receiver **1012**, which may perform such common receiver functions as signal amplification, frequency down conversion, filtering,

channel selection and the like, and in the example system shown in **Figure 10**, analog to digital (A/D) conversion. A/D conversion of a received signal allows more complex communication functions such as demodulation and decoding to be performed in the DSP **1020**. In a similar manner, signals to be transmitted are processed, including modulation and encoding for example, by DSP **1020** and input to transmitter **1014** for digital to analog conversion, frequency up conversion, filtering, amplification and transmission over the communication network **1019** via antenna **1018**. DSP **1020** not only processes communication signals, but also provides for receiver and transmitter control. For example, the gains applied to communication signals in receiver **1012** and transmitter **1014** may be adaptively controlled through automatic gain control algorithms implemented in DSP **1020**.

[0082] Mobile device **1000** generally includes a processor **1038** which controls the overall operation of the device. Communication functions, including data and voice communications, are performed through communication subsystem **1011**. Processor **1038** also interacts with further device subsystems such as the display **1022**, flash memory **1024**, random access memory (RAM) **1026**, auxiliary input/output (I/O) subsystems **1028**, serial port **1030**, one or more keyboards or keypads **1032**, speaker **1034**, microphone **1036**, other communication subsystem **1040** such as a short-range communications subsystem and any other device subsystems generally designated as **1042**. Serial port **1030** may include a USB port or other port known to those in the art.

[0083] Some of the subsystems shown in **Figure 10** perform communication-related functions, whereas other subsystems may provide "resident" or on-device functions. Notably, some subsystems, such as keyboard **1032** and display **1022**, for example, may be used for both communication-related functions, such as entering a text message for transmission over a communication network, and device-resident functions such as a calculator or task list, among other applications.

[0084] Operating system software used by the processor **1038** may be stored in a persistent store such as flash memory **1024**, which may instead be a read-only memory (ROM) or similar storage element (not shown). In one embodiment, the operating system, specific device applications, or parts thereof, may be temporarily loaded into a volatile memory such as RAM **1026**. Received communication signals may also be stored in RAM **1026**.

[0085] As shown, flash memory **1024** can be segregated into different areas for both computer programs **1058** and program data storage **1050**, **1052**, **1054** and **1056**. These different storage types indicate that each program can allocate a portion of flash memory **1024** for their own data storage requirements. This may further provide security if some applications are locked while others are not.

[0086] Processor **1038**, in addition to its operating system functions, may enable execution of software applications on the mobile device. A predetermined set of applications that control basic operations, including at least data and voice communication applications for example, will normally be installed on mobile device **1000** during manufacturing. Other applications can be installed subsequently or dynamically.

[0087] Applications and software, such as those for implements the process of **Figure 4 to 7**, may be stored on any computer readable storage medium. The computer readable storage medium may be a tangible or intransitory/non-transitory medium such as optical (e.g., CD, DVD, etc.), magnetic (e.g., tape) or other memory known in the art.

[0088] One software application may be a personal information manager (PIM) application having the ability to organize and manage data items relating to the user of the mobile device such as, but not limited to, e-mail, calendar events, voice mails, appointments, and task items. Naturally, one or more memory stores would be available on the mobile device to facilitate storage of PIM data items. Such PIM application may have the ability to send and receive data items, via the wireless network **1019**. In one embodiment,

WO 2012/037658

PCT/CA2011/001060

the PIM data items are seamlessly integrated, synchronized and updated, via the wireless network **1019**, with the mobile device user's corresponding data items stored or associated with a host computer system. Further applications, such as a media player; a camera; a messenger; mail; social networking; a web browser; games; electronic book readers; wallet; maps, among others, may also be loaded onto the mobile device **1000** through the network **1019**, an auxiliary I/O subsystem **1028**, serial port **1030**, short-range communications subsystem **1040** or any other suitable subsystem **1042**, and installed by a user in the RAM **1026** or a non-volatile store (not shown) for execution by the processor **1038**. Such flexibility in application installation increases the functionality of the device and may provide enhanced on-device functions, communication-related functions, or both. For example, secure communication applications may enable electronic commerce functions and other such financial transactions to be performed using the mobile device **1000**.

[0089] In a data communication mode, a received signal such as a text message or web page download will be processed by the communication subsystem **1011** and input to the processor **1038**, which may further process the received signal for output to the display **1022**, or alternatively to an auxiliary I/O device **1028**.

[0090] A user of mobile device **1000** may also compose data items such as email messages for example, using the keyboard **1032**, which may be a complete alphanumeric keyboard or telephone-type keypad, among others, in conjunction with the display **1022** and possibly an auxiliary I/O device **1028**. Such composed items may then be transmitted over a communication network through the communication subsystem **1011**.

[0091] For voice communications, overall operation of mobile device **1000** is similar, except that received signals would typically be output to a speaker **1034** and signals for transmission would be generated by a microphone **1036**. Alternative voice or audio I/O subsystems, such as a voice message recording subsystem, may also be implemented on mobile device **1000**.

Although voice or audio signal output is preferably accomplished primarily through the speaker **1034**, display **1022** may also be used to provide an indication of the identity of a calling party, the duration of a voice call, or other voice call related information for example.

[0092] Serial port **1030** in **Figure 10** would normally be implemented in a personal digital assistant (PDA)-type mobile device for which synchronization with a user's desktop computer (not shown) may be desirable, but is an optional device component. Such a port **1030** would enable a user to set preferences through an external device or software application and would extend the capabilities of mobile device **1000** by providing for information or software downloads to mobile device **1000** other than through a wireless communication network. The alternate download path may for example be used to load an encryption key onto the device through a direct and thus reliable and trusted connection to thereby enable secure device communication. Serial port **1030** can further be used to connect the mobile device to a computer to act as a modem.

[0093] Other communications subsystems **1040**, such as a short-range communications subsystem, is a further optional component which may provide for communication between mobile device **1000** and different systems or devices, which need not necessarily be similar devices. For example, the subsystem **1040** may include an infrared device and associated circuits and components or a Bluetooth™ communication module to provide for communication with similarly enabled systems and devices.

[0094] The embodiments described herein are examples of structures, systems or methods having elements corresponding to elements of the techniques of this application. This written description may enable those skilled in the art to make and use embodiments having alternative elements that likewise correspond to the elements of the techniques of this application. The intended scope of the techniques of this application thus includes other structures, systems or methods that do not differ from the techniques of this application as described herein, and further includes other structures, systems

WO 2012/037658

PCT/CA2011/001060

or methods with insubstantial differences from the techniques of this application as described herein.

CLAIMS

1. A method for providing differentiated access control on a computing device having a connection with a second device, the method comprising:
checking whether a timer has expired on the second device or if a connection is lost to the second device; and
preventing each application of at least one of a plurality of application subsets from being launched or enabled if the timer has expired on the second device or the connection is lost to the second device.
2. The method of claim 1, wherein each of the plurality of application subsets utilize a separate file system in memory of the computing device.
3. The method of claim 1, wherein the preventing comprises changing a graphical representation of an application window or icon displayed on the computing device.
4. The method of claim 3, wherein the graphical representation is a grid style and the changing replaces the application window with an obscured or locked graphic.
5. The method of claim 4, wherein selection of the obscured graphic initiates a password prompt.
6. The method of claim 1, wherein the timer on the second device has a plurality of expiry times for different subsets of applications.
7. The method of claim 1, wherein one of the plurality of application subsets is designated as corporate applications.
8. The method of claim 7, wherein the designating is based on an enterprise information technology policy.

9. The method of claim 7, wherein the designating is done on the computing device.

10. The method of claim 1, wherein the timer on the second device is an inactivity timer for any application on the second device.

11. The method of claim 1, wherein the timer on the second device is an inactivity timer for any application on the second device.

12. The method of claim 1, further comprising unlocking each application associated with the at least one of the plurality of applications subsets in response to successful authentication.

13. The method of claim 1, further comprising preventing each application associated with the at least one of the plurality of application subsets whose timer has expired from being launched or enabled, while allowing the launching or enablement of one or more applications associated with another of the plurality of application subsets.

14. A computing device comprising:

- a processor;
- a communications subsystem;
- a user interface; and
- memory,

wherein the computing device communicates with a second device, and wherein the computing device is configured to:

- determine whether a timer has expired on the second device or if a connection is lost to the second device; and

- prevent each application of at least one of a plurality of application subsets from being launched or enabled if the timer has expired on the second device or the connection is lost to the second device.

WO 2012/037658

PCT/CA2011/001060

15. The computing device of claim 14, wherein each of the plurality of application subsets utilize a separate file system in memory of the computing device.


16. The computing device of claim 14, wherein the computing device is configured to prevent each application of at least one of a plurality of application subsets from being launched or enabled by changing a graphical representation of an application window or icon displayed on the computing device.

17. The computing device of claim 16, wherein the graphical representation is a grid style and the changing replaces the application window with an obscured or locked graphic.

18. The computing device of claim 17, wherein selection of the obscured or locked graphic on the user interface initiates a password prompt.

19. The computing device of claim 14, wherein the computing device comprises at least one of a mobile device, smartphone, a tablet computer, a desktop computer, or a laptop computer.

1/11

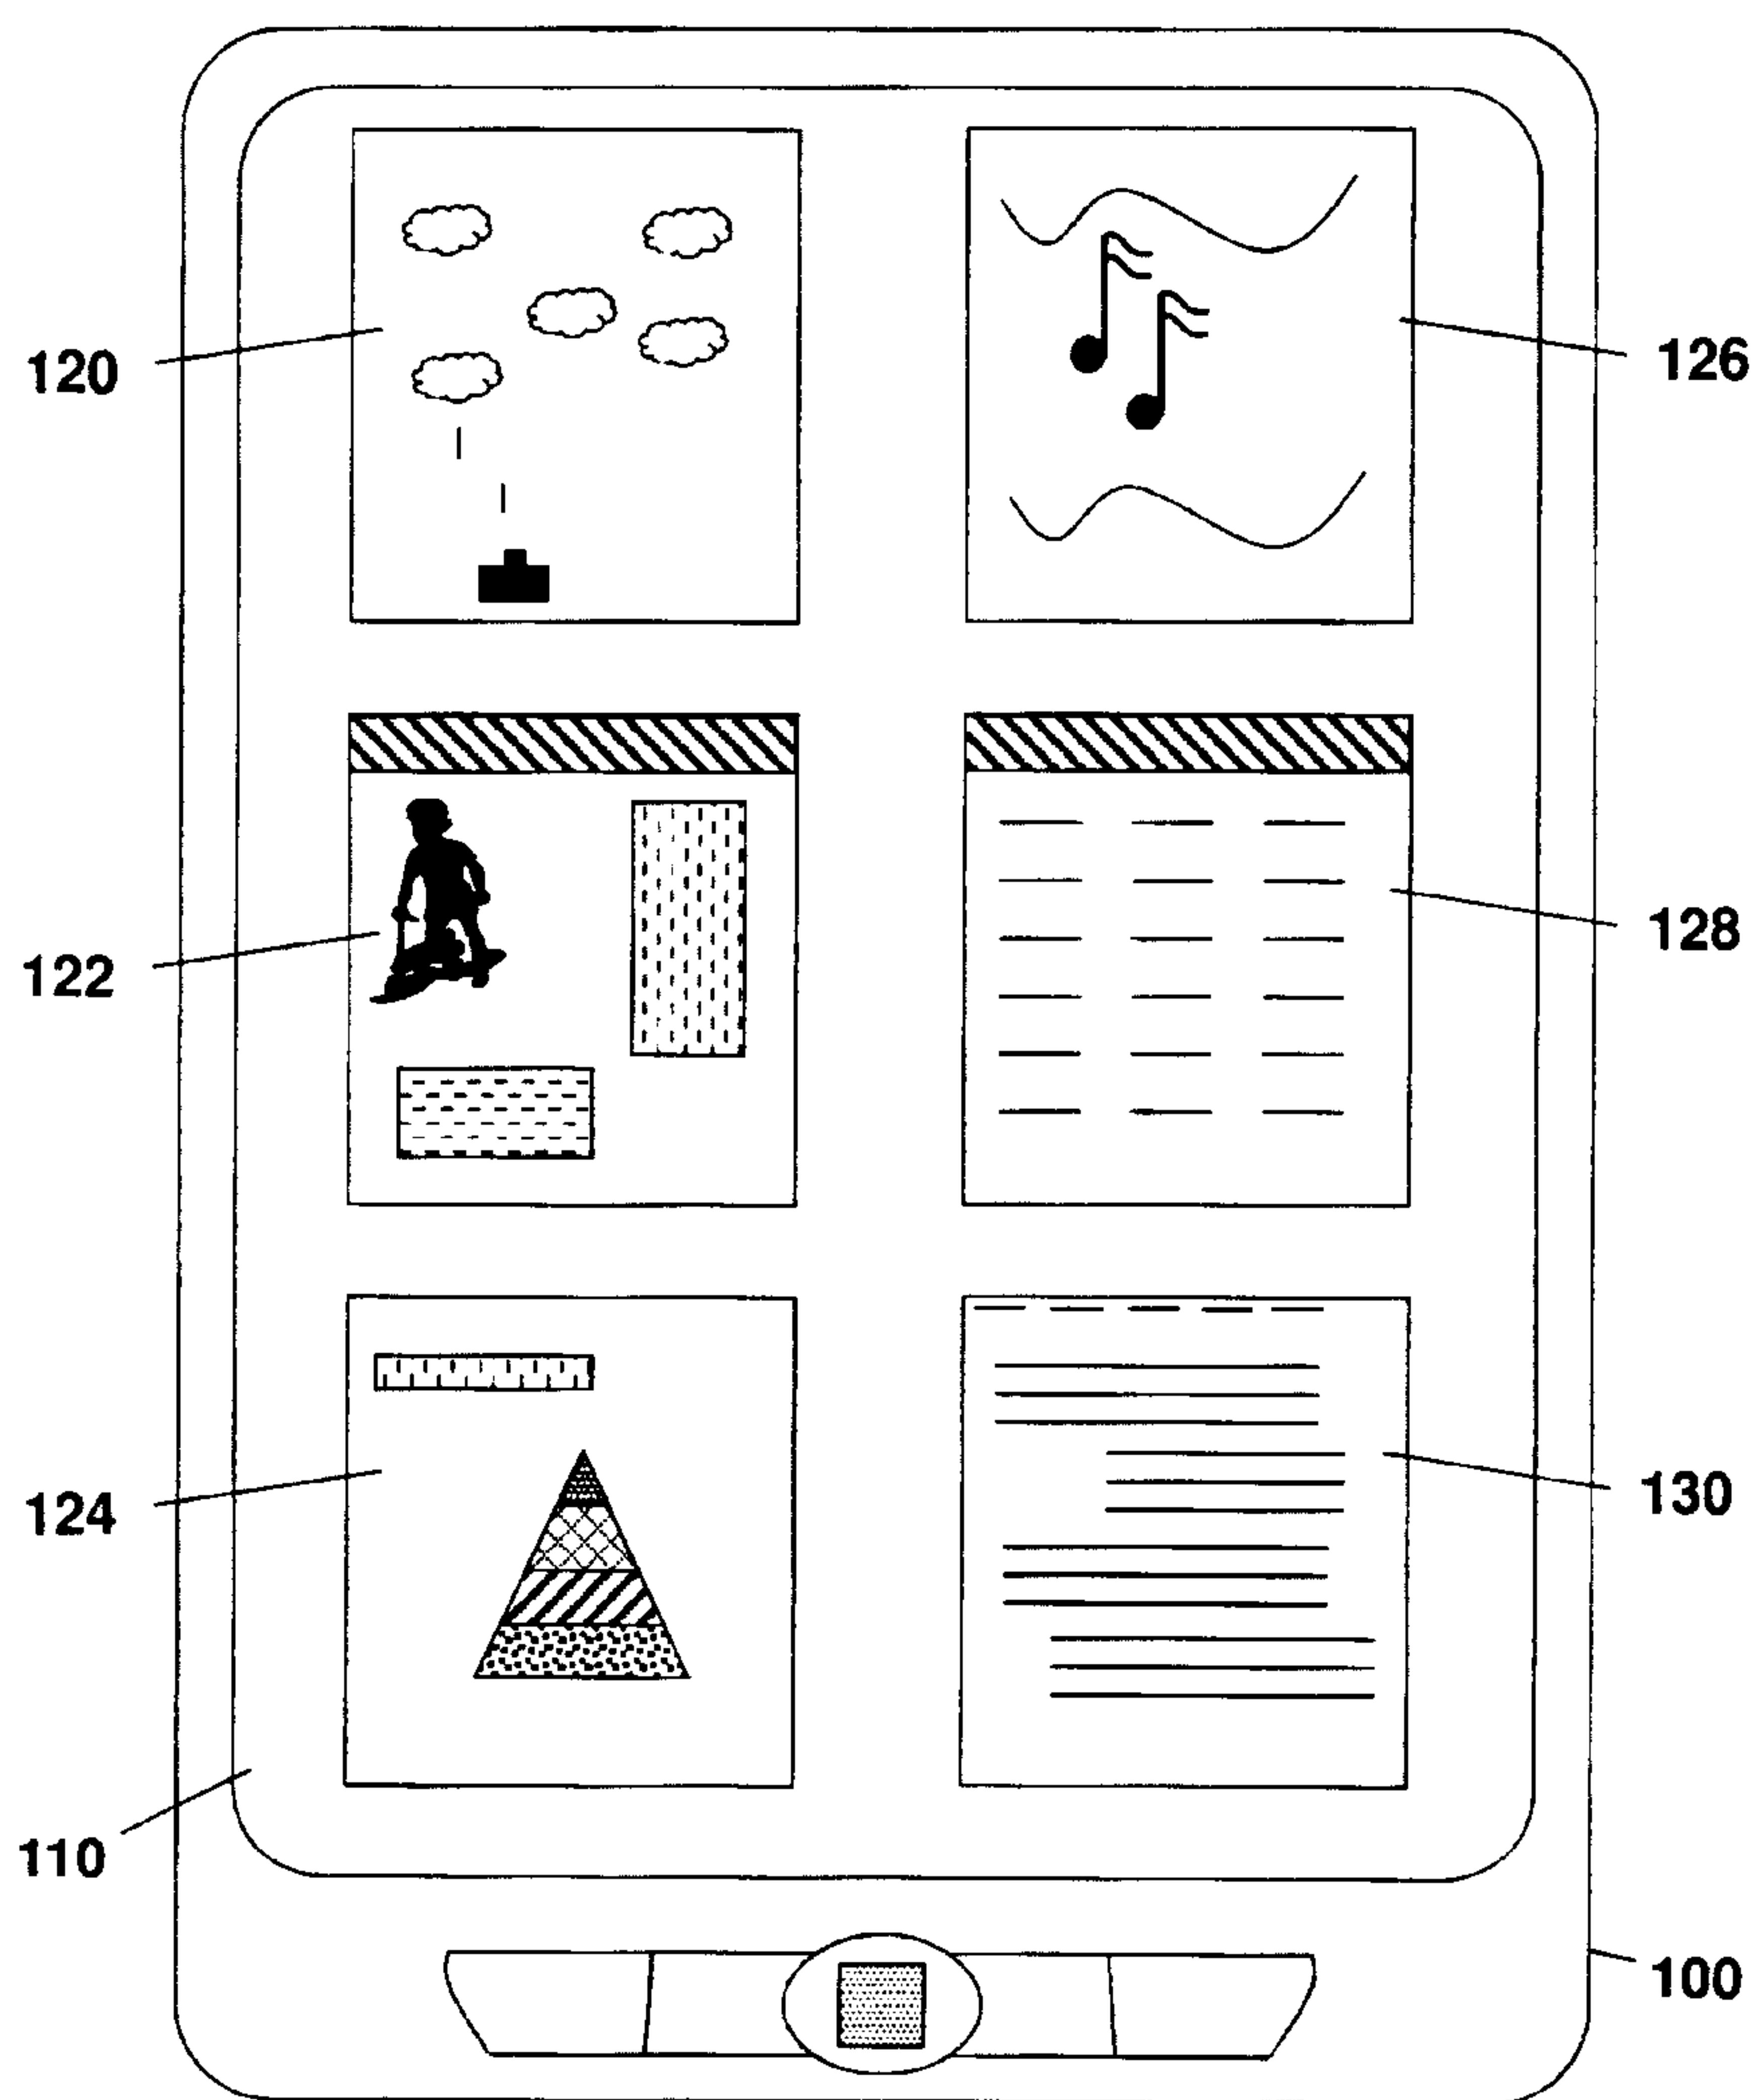**FIG. 1**

2/11

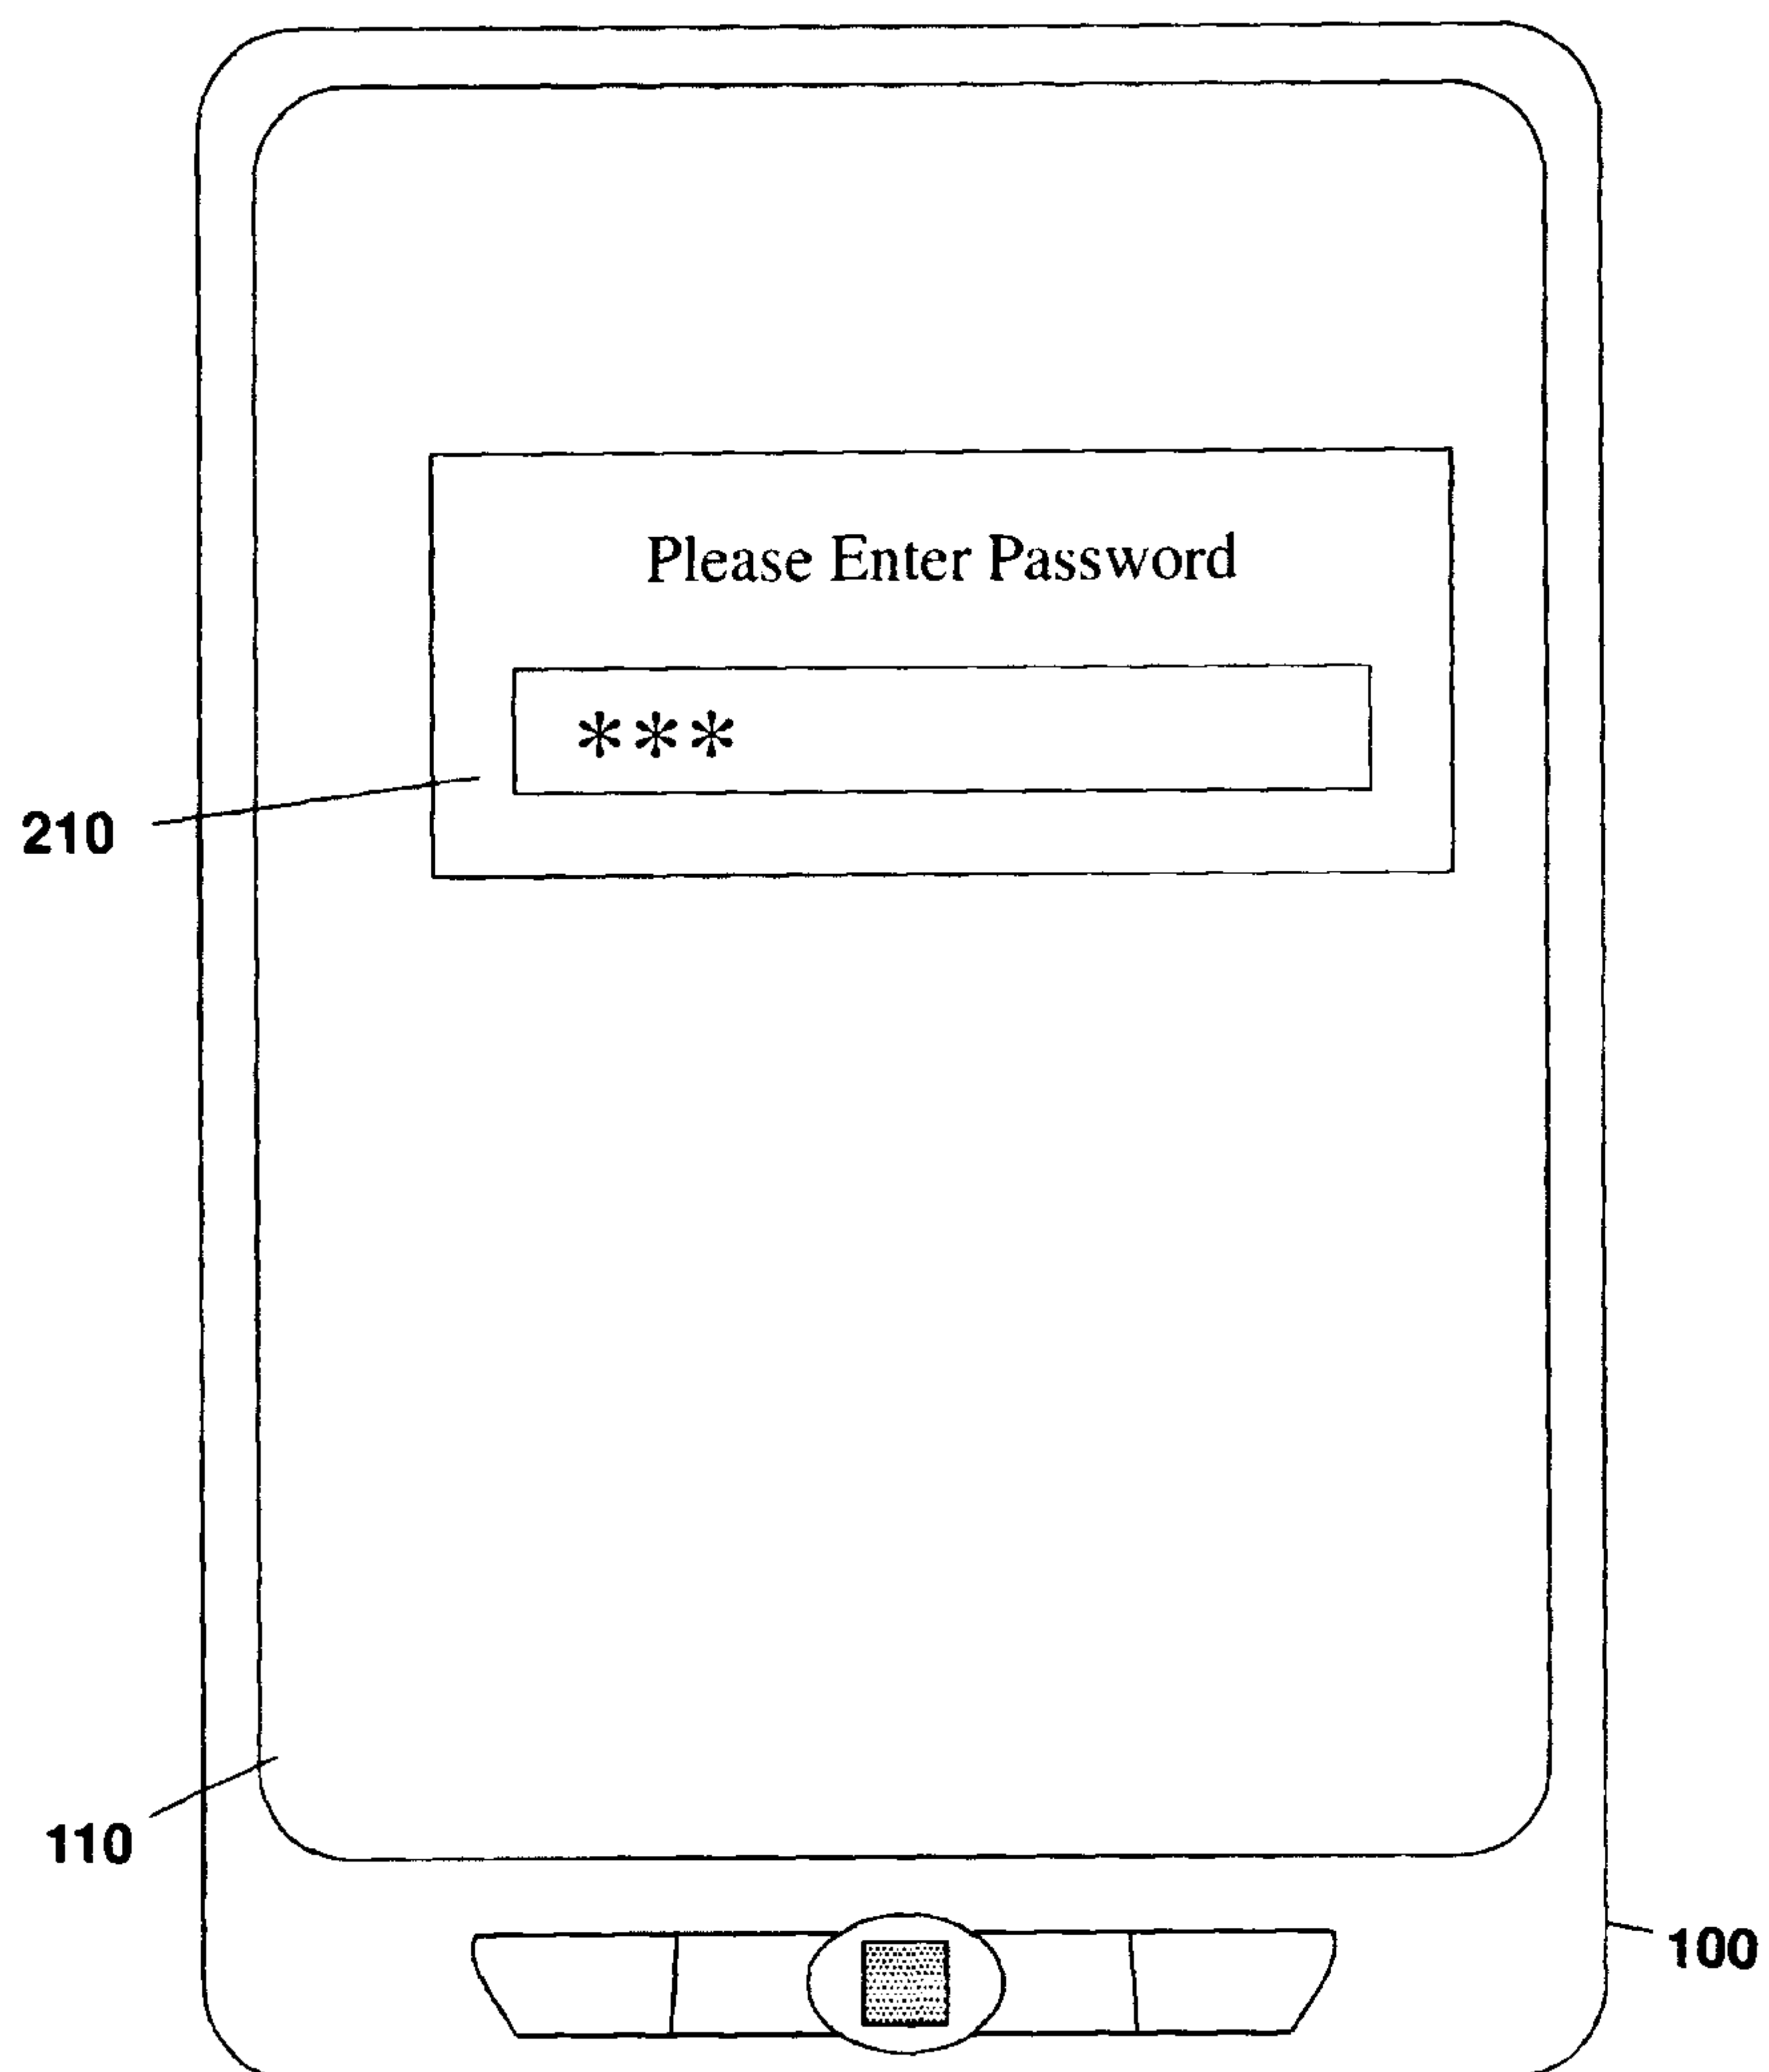


FIG. 2

3/11

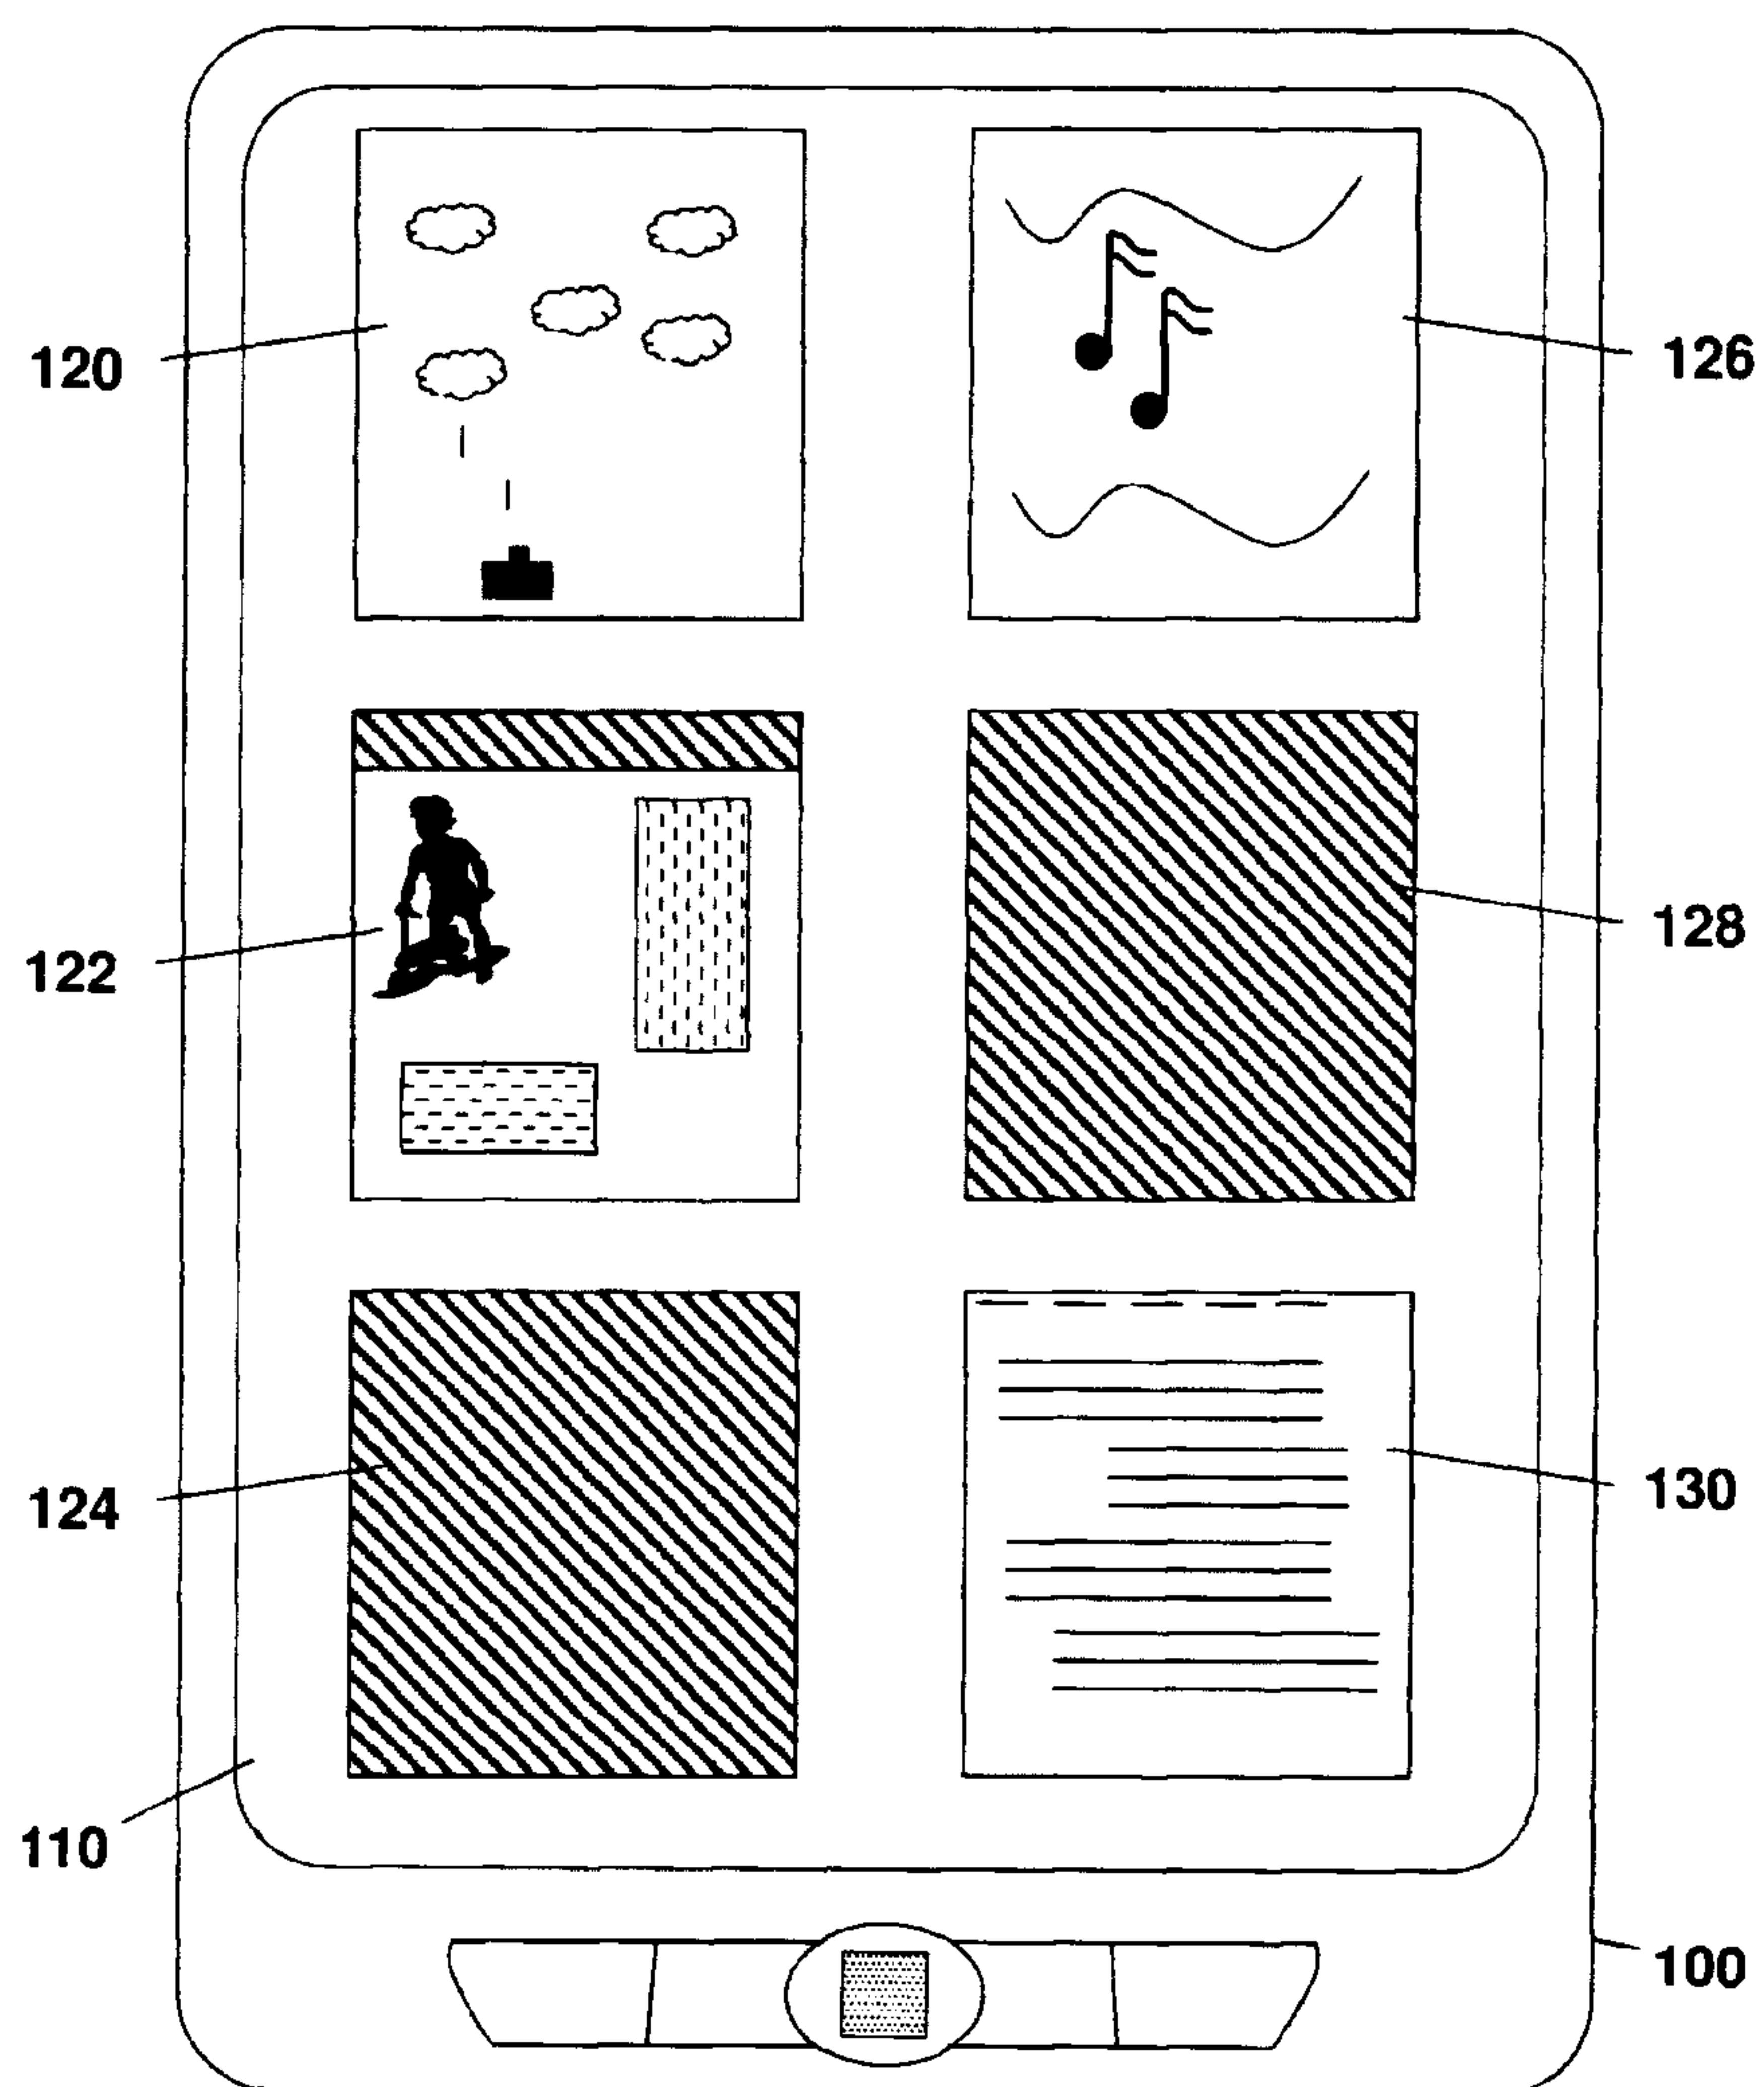
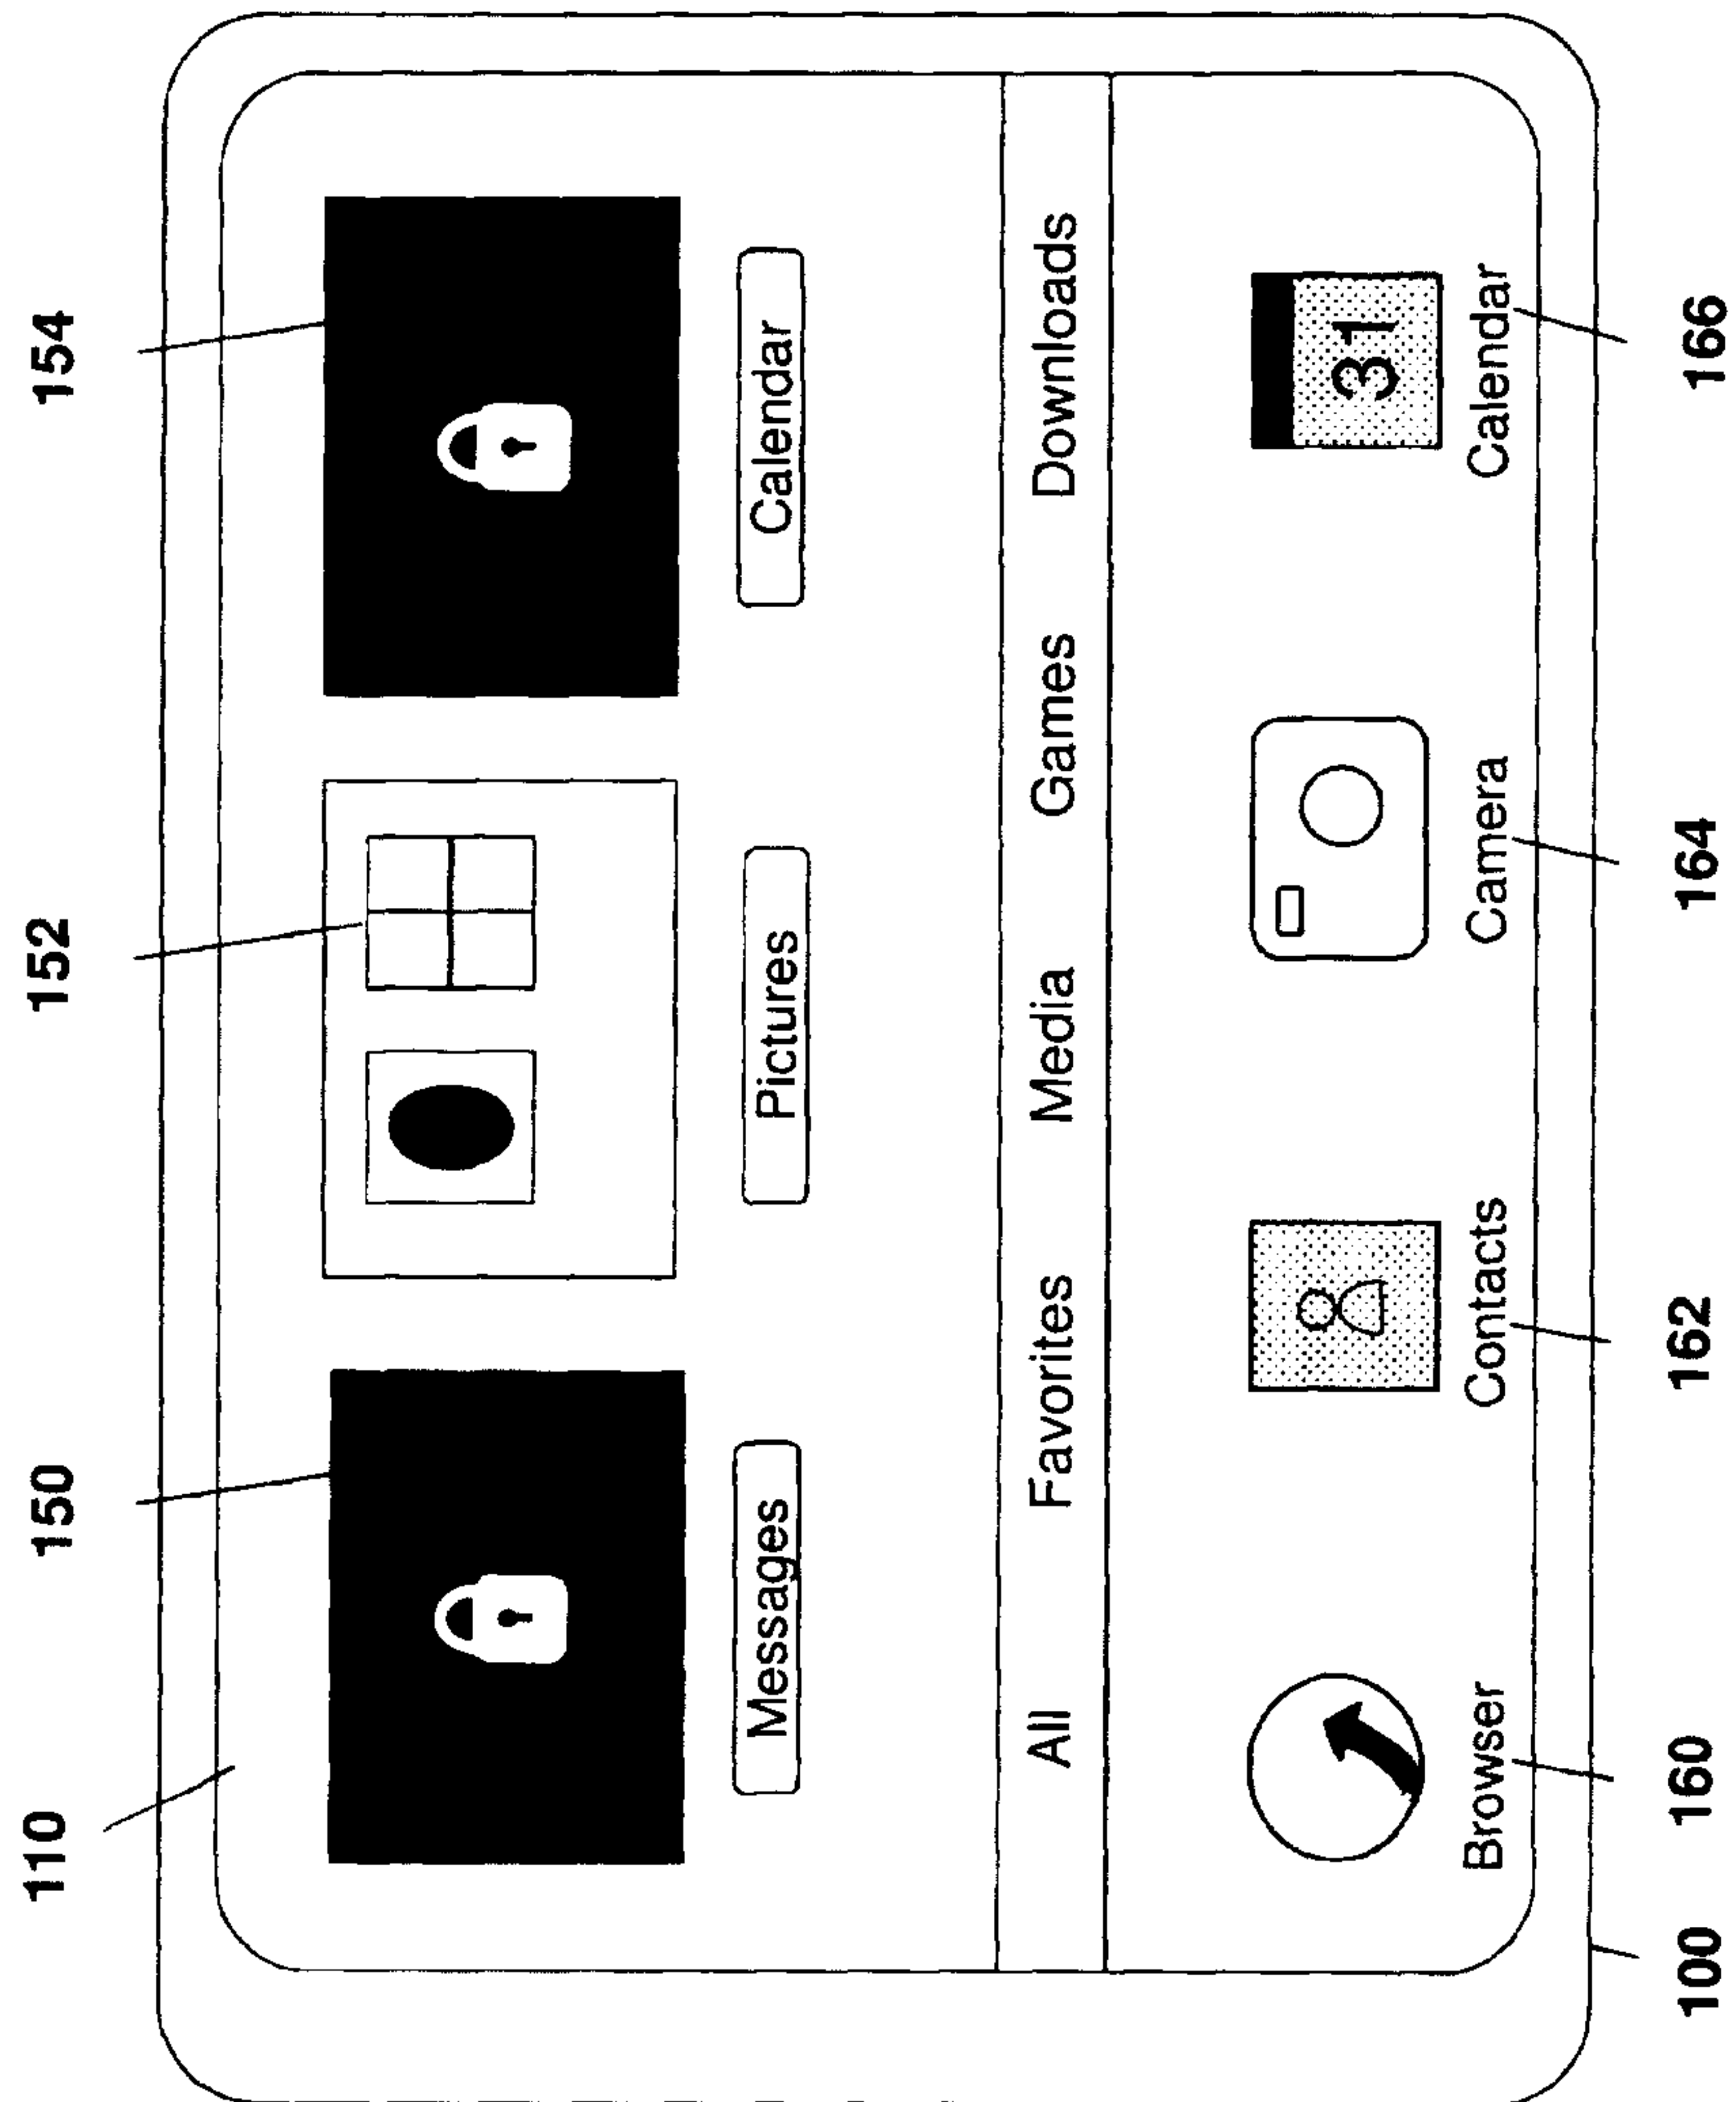
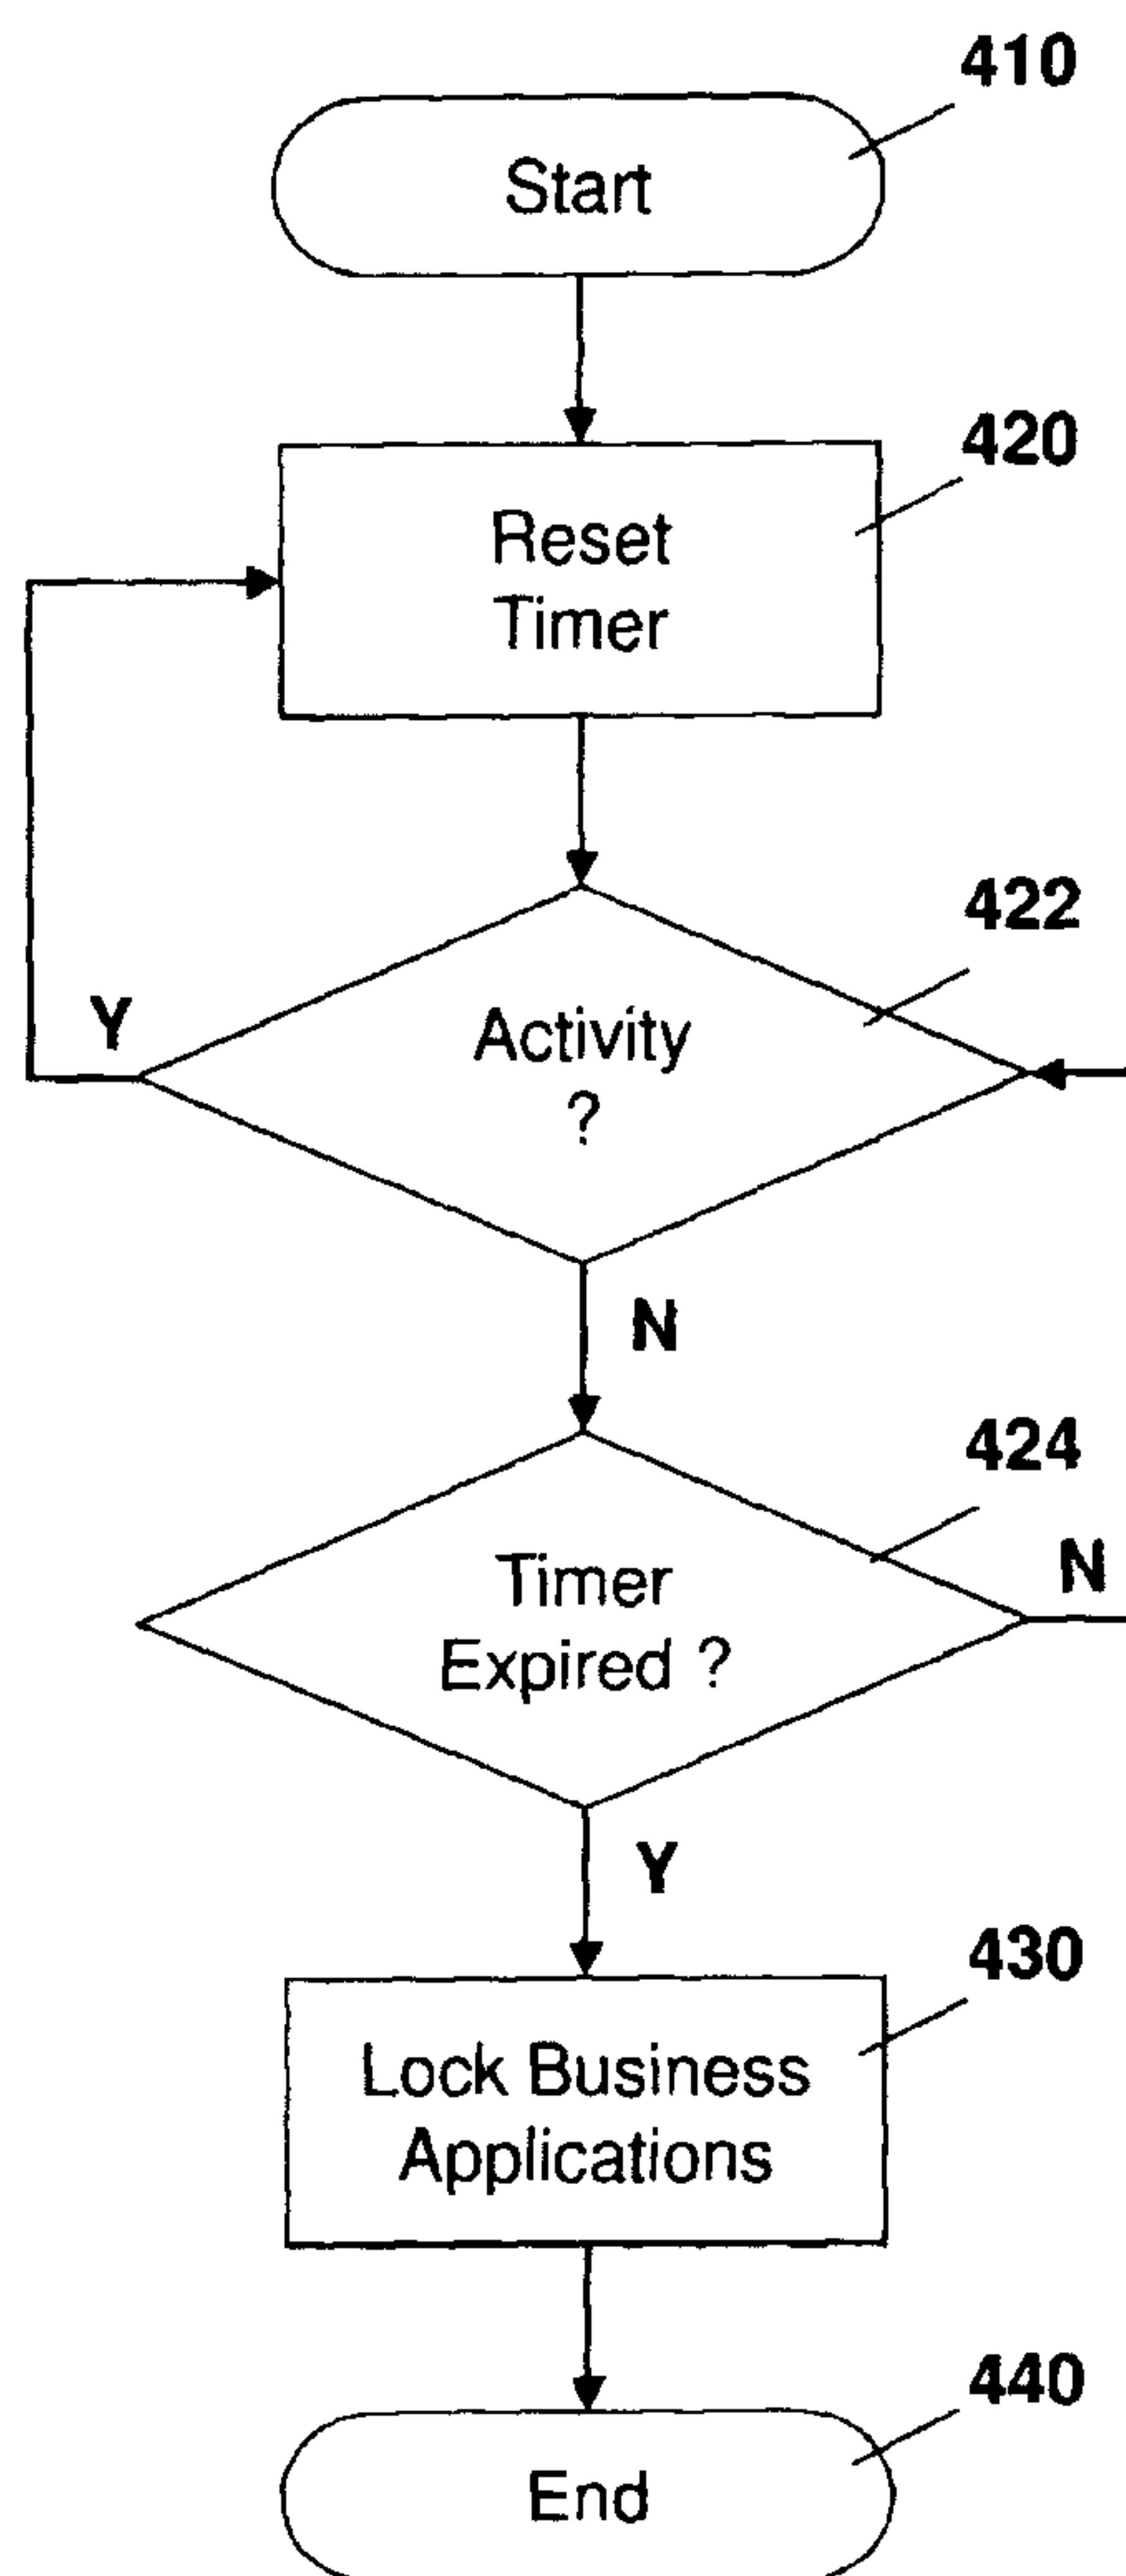


FIG. 3A

4/11

**FIG. 3B**

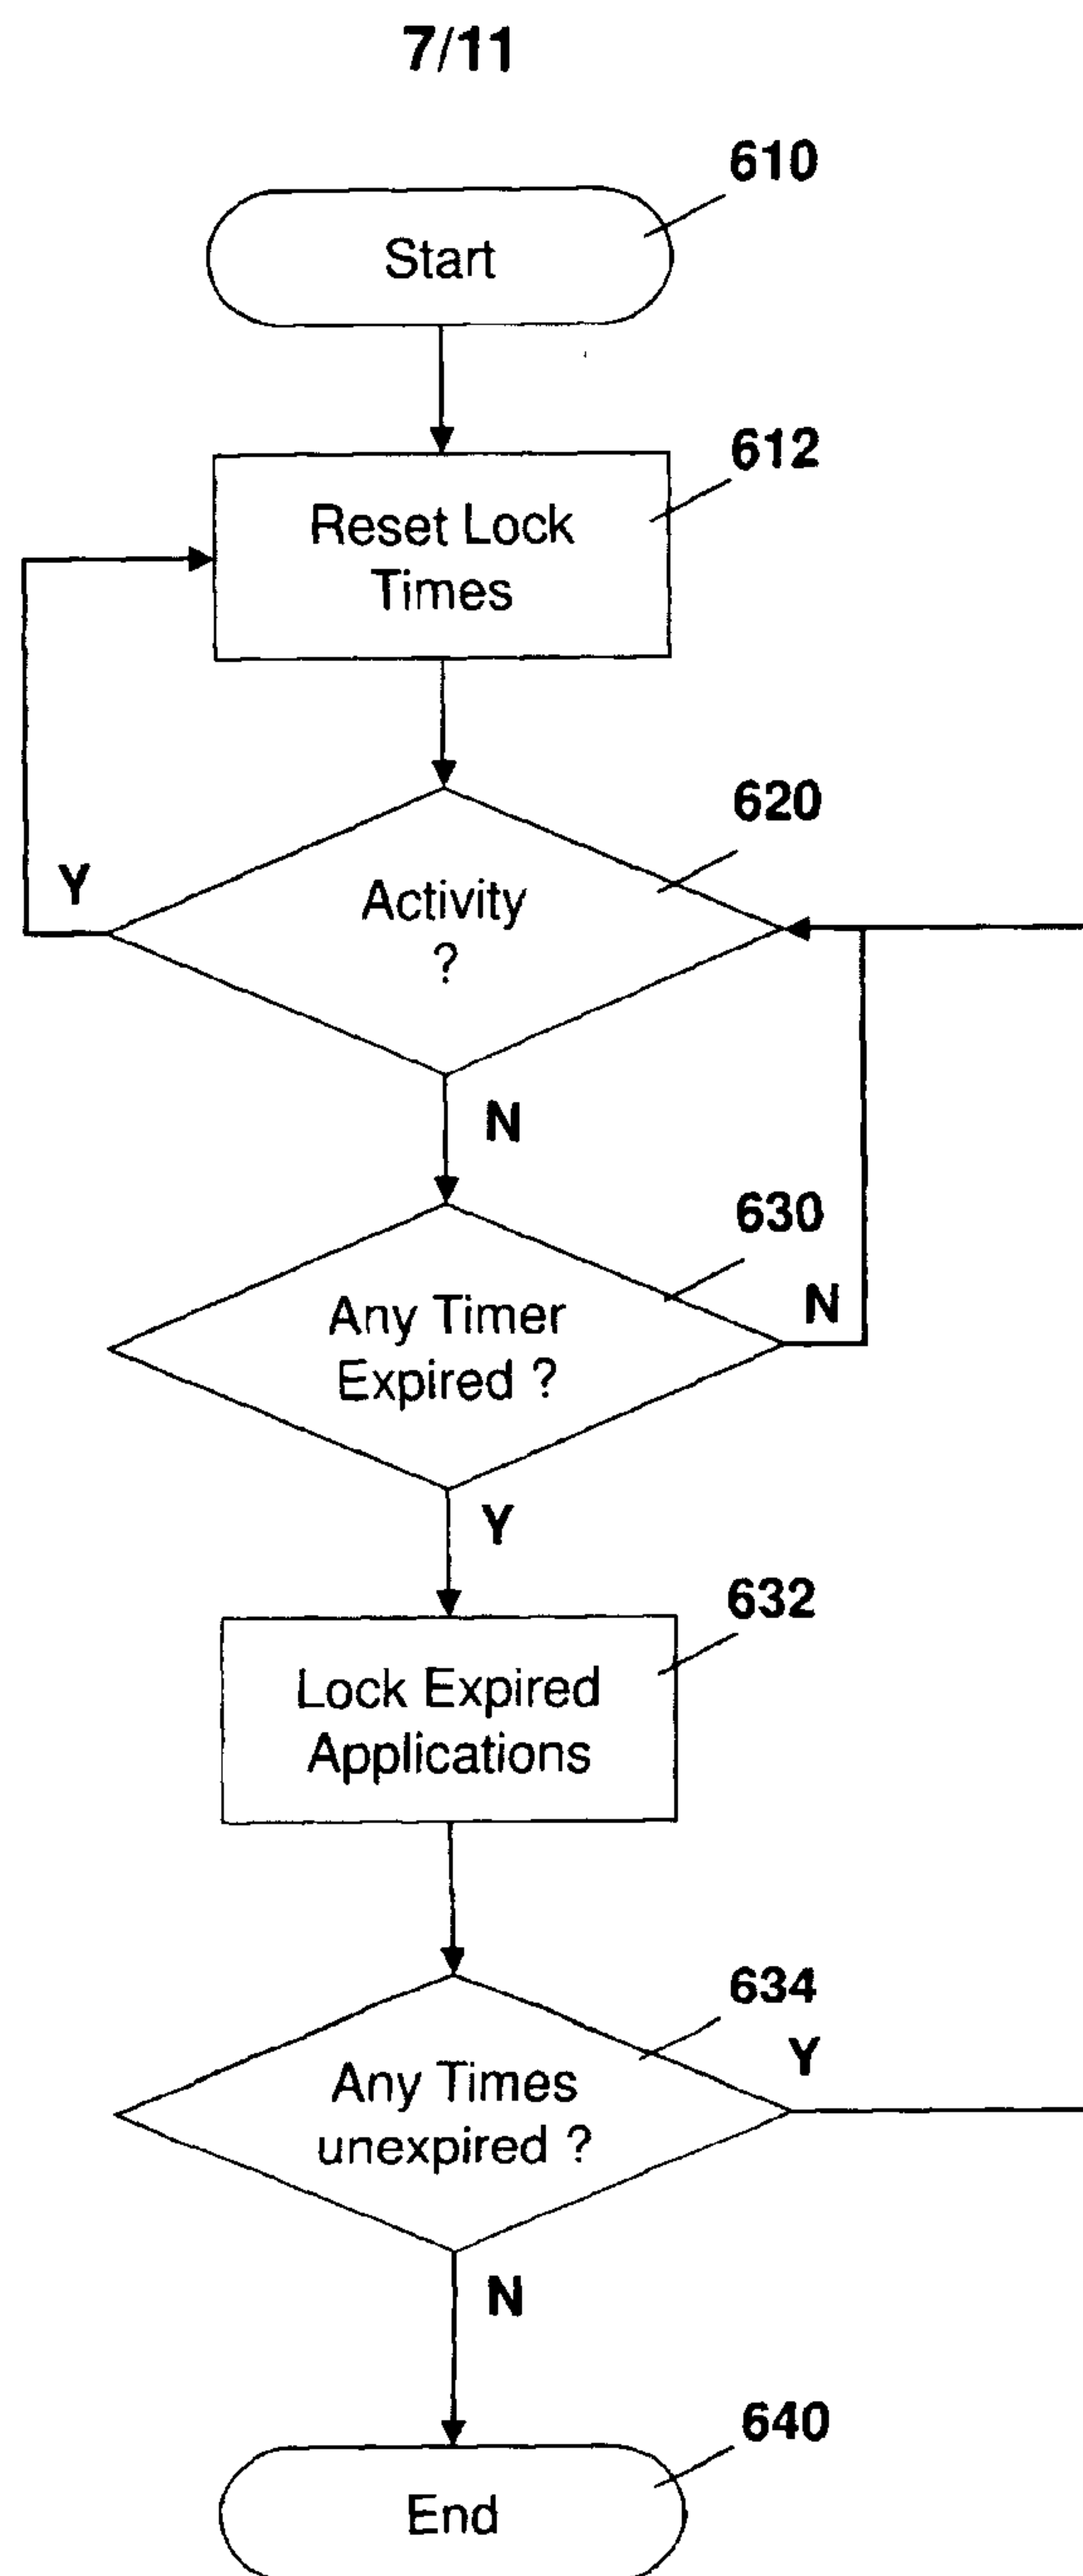
5/11

**FIG. 4**

6/11

510		520	
App/Class		Lock Time	
530	XYZ	17:36:24	
540	ABC	17:28:31	
		⋮	

FIG. 5

**FIG. 6**

8/11

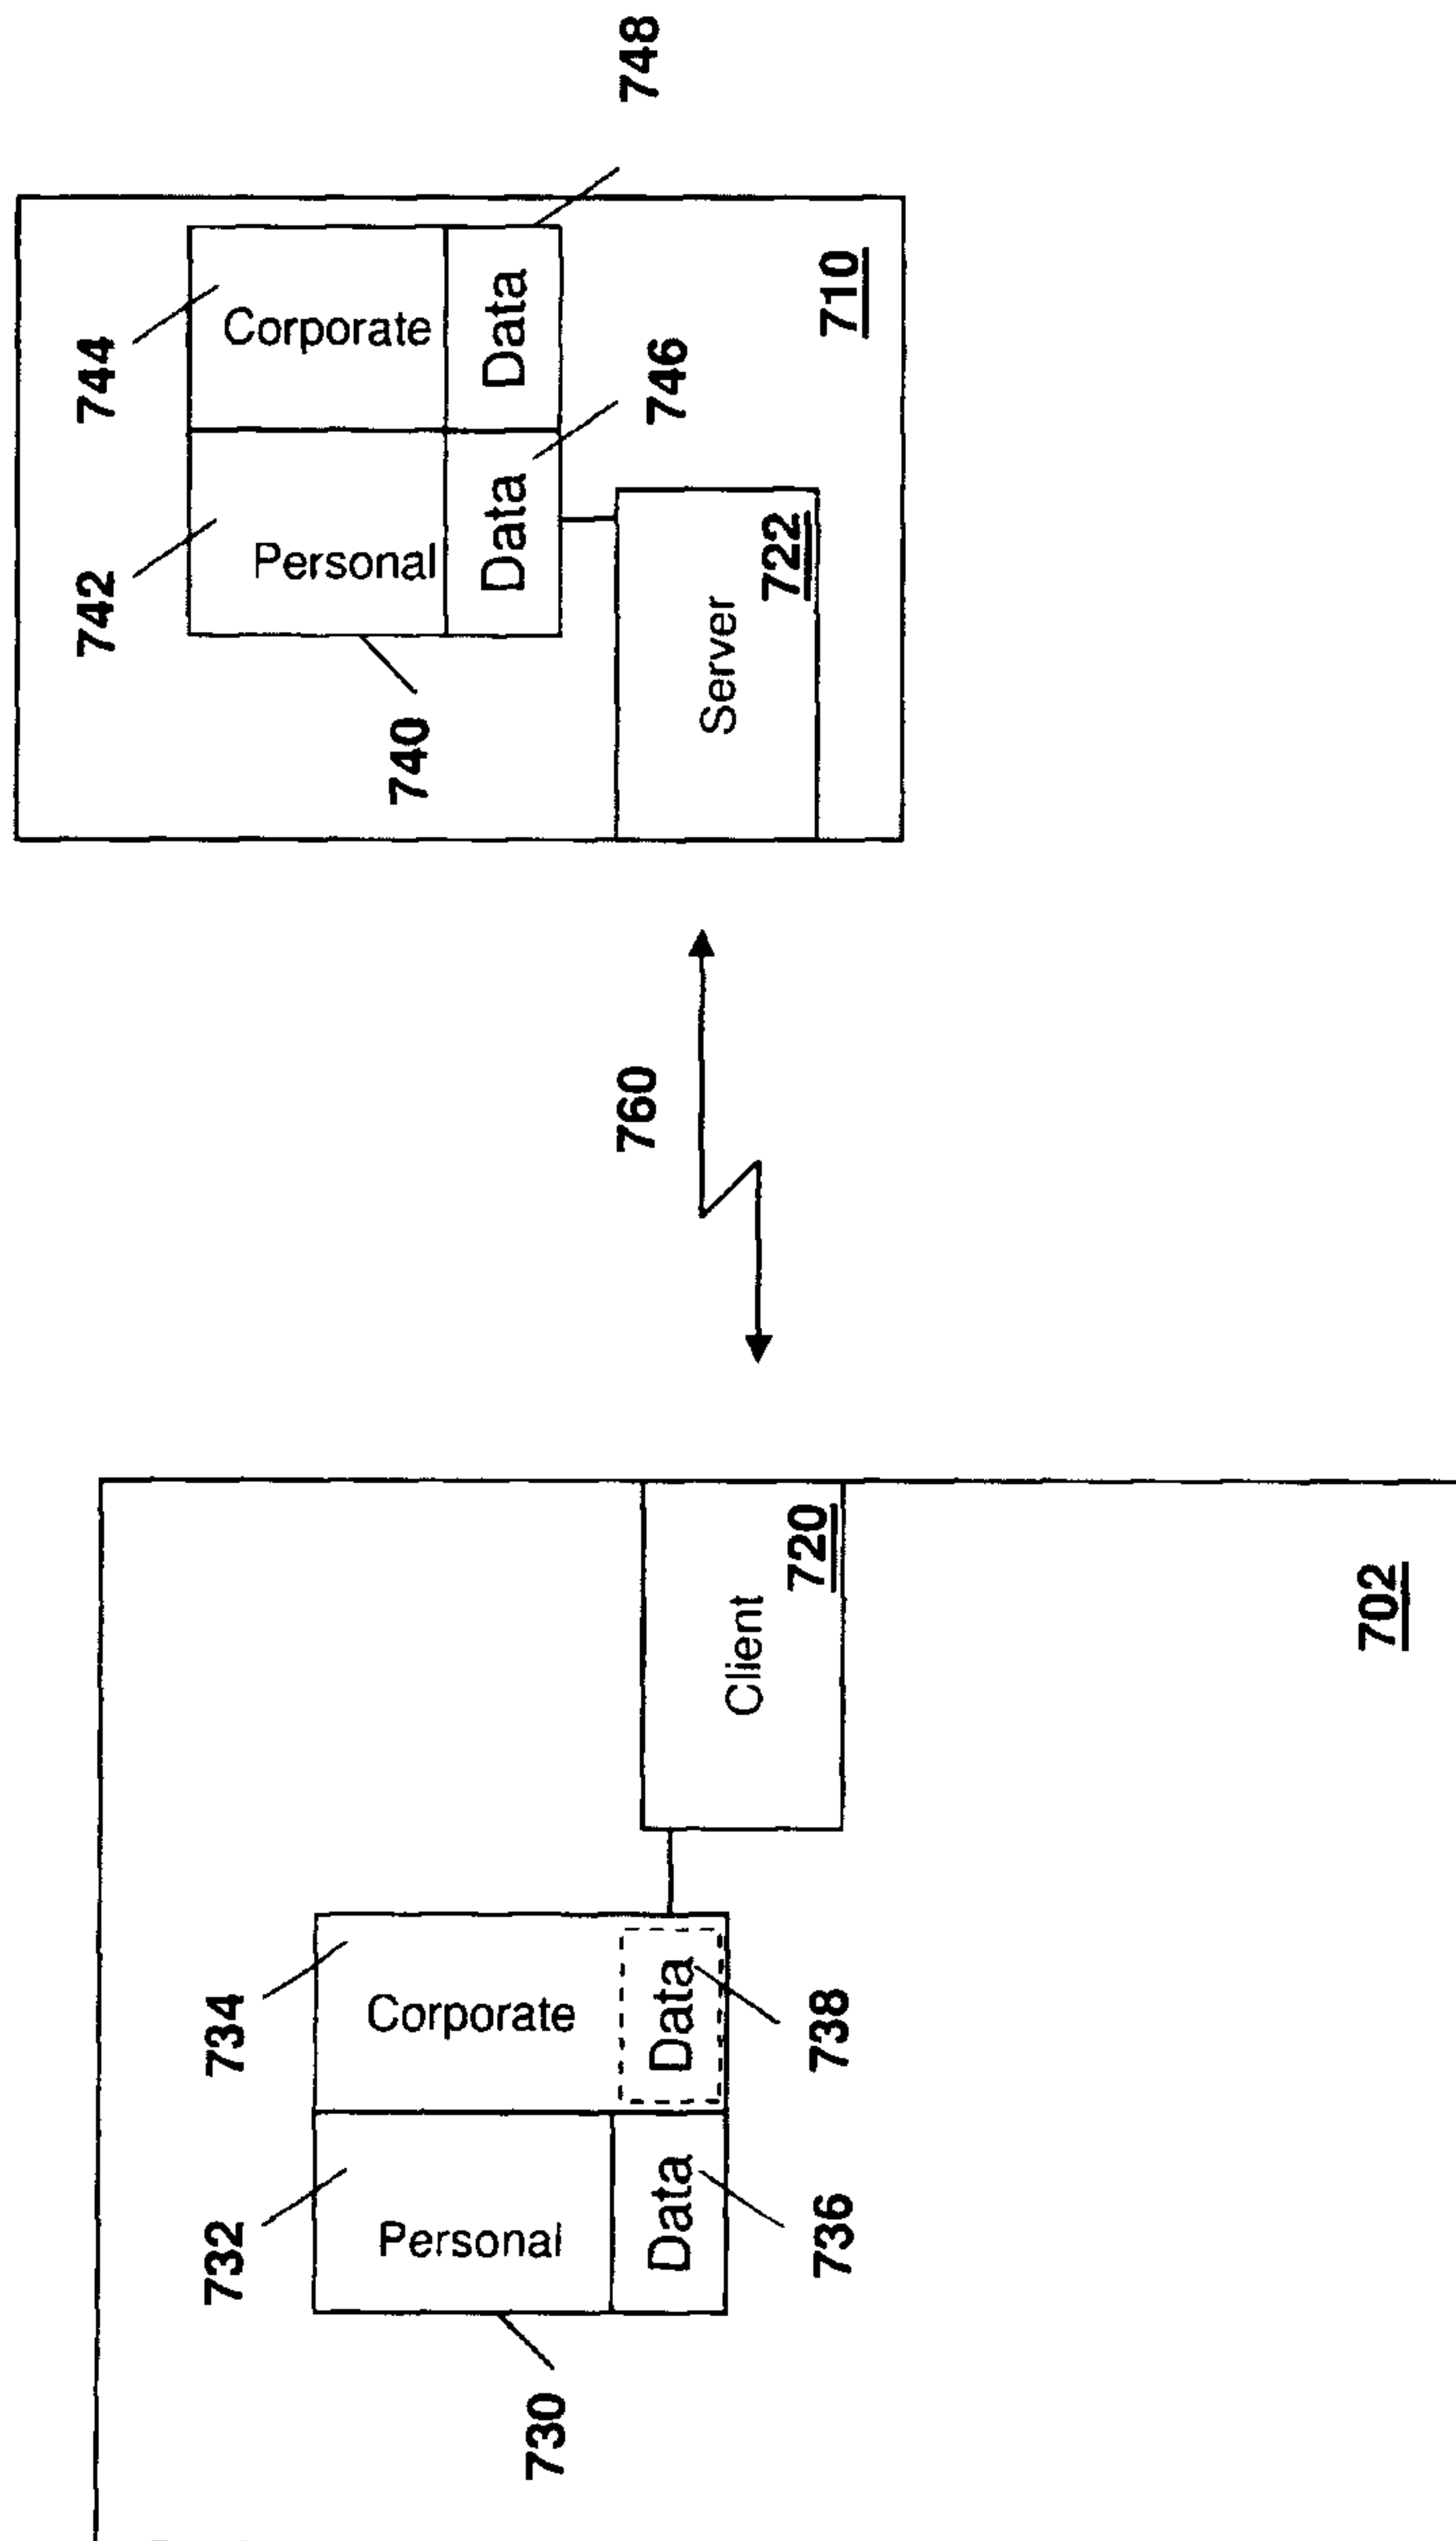
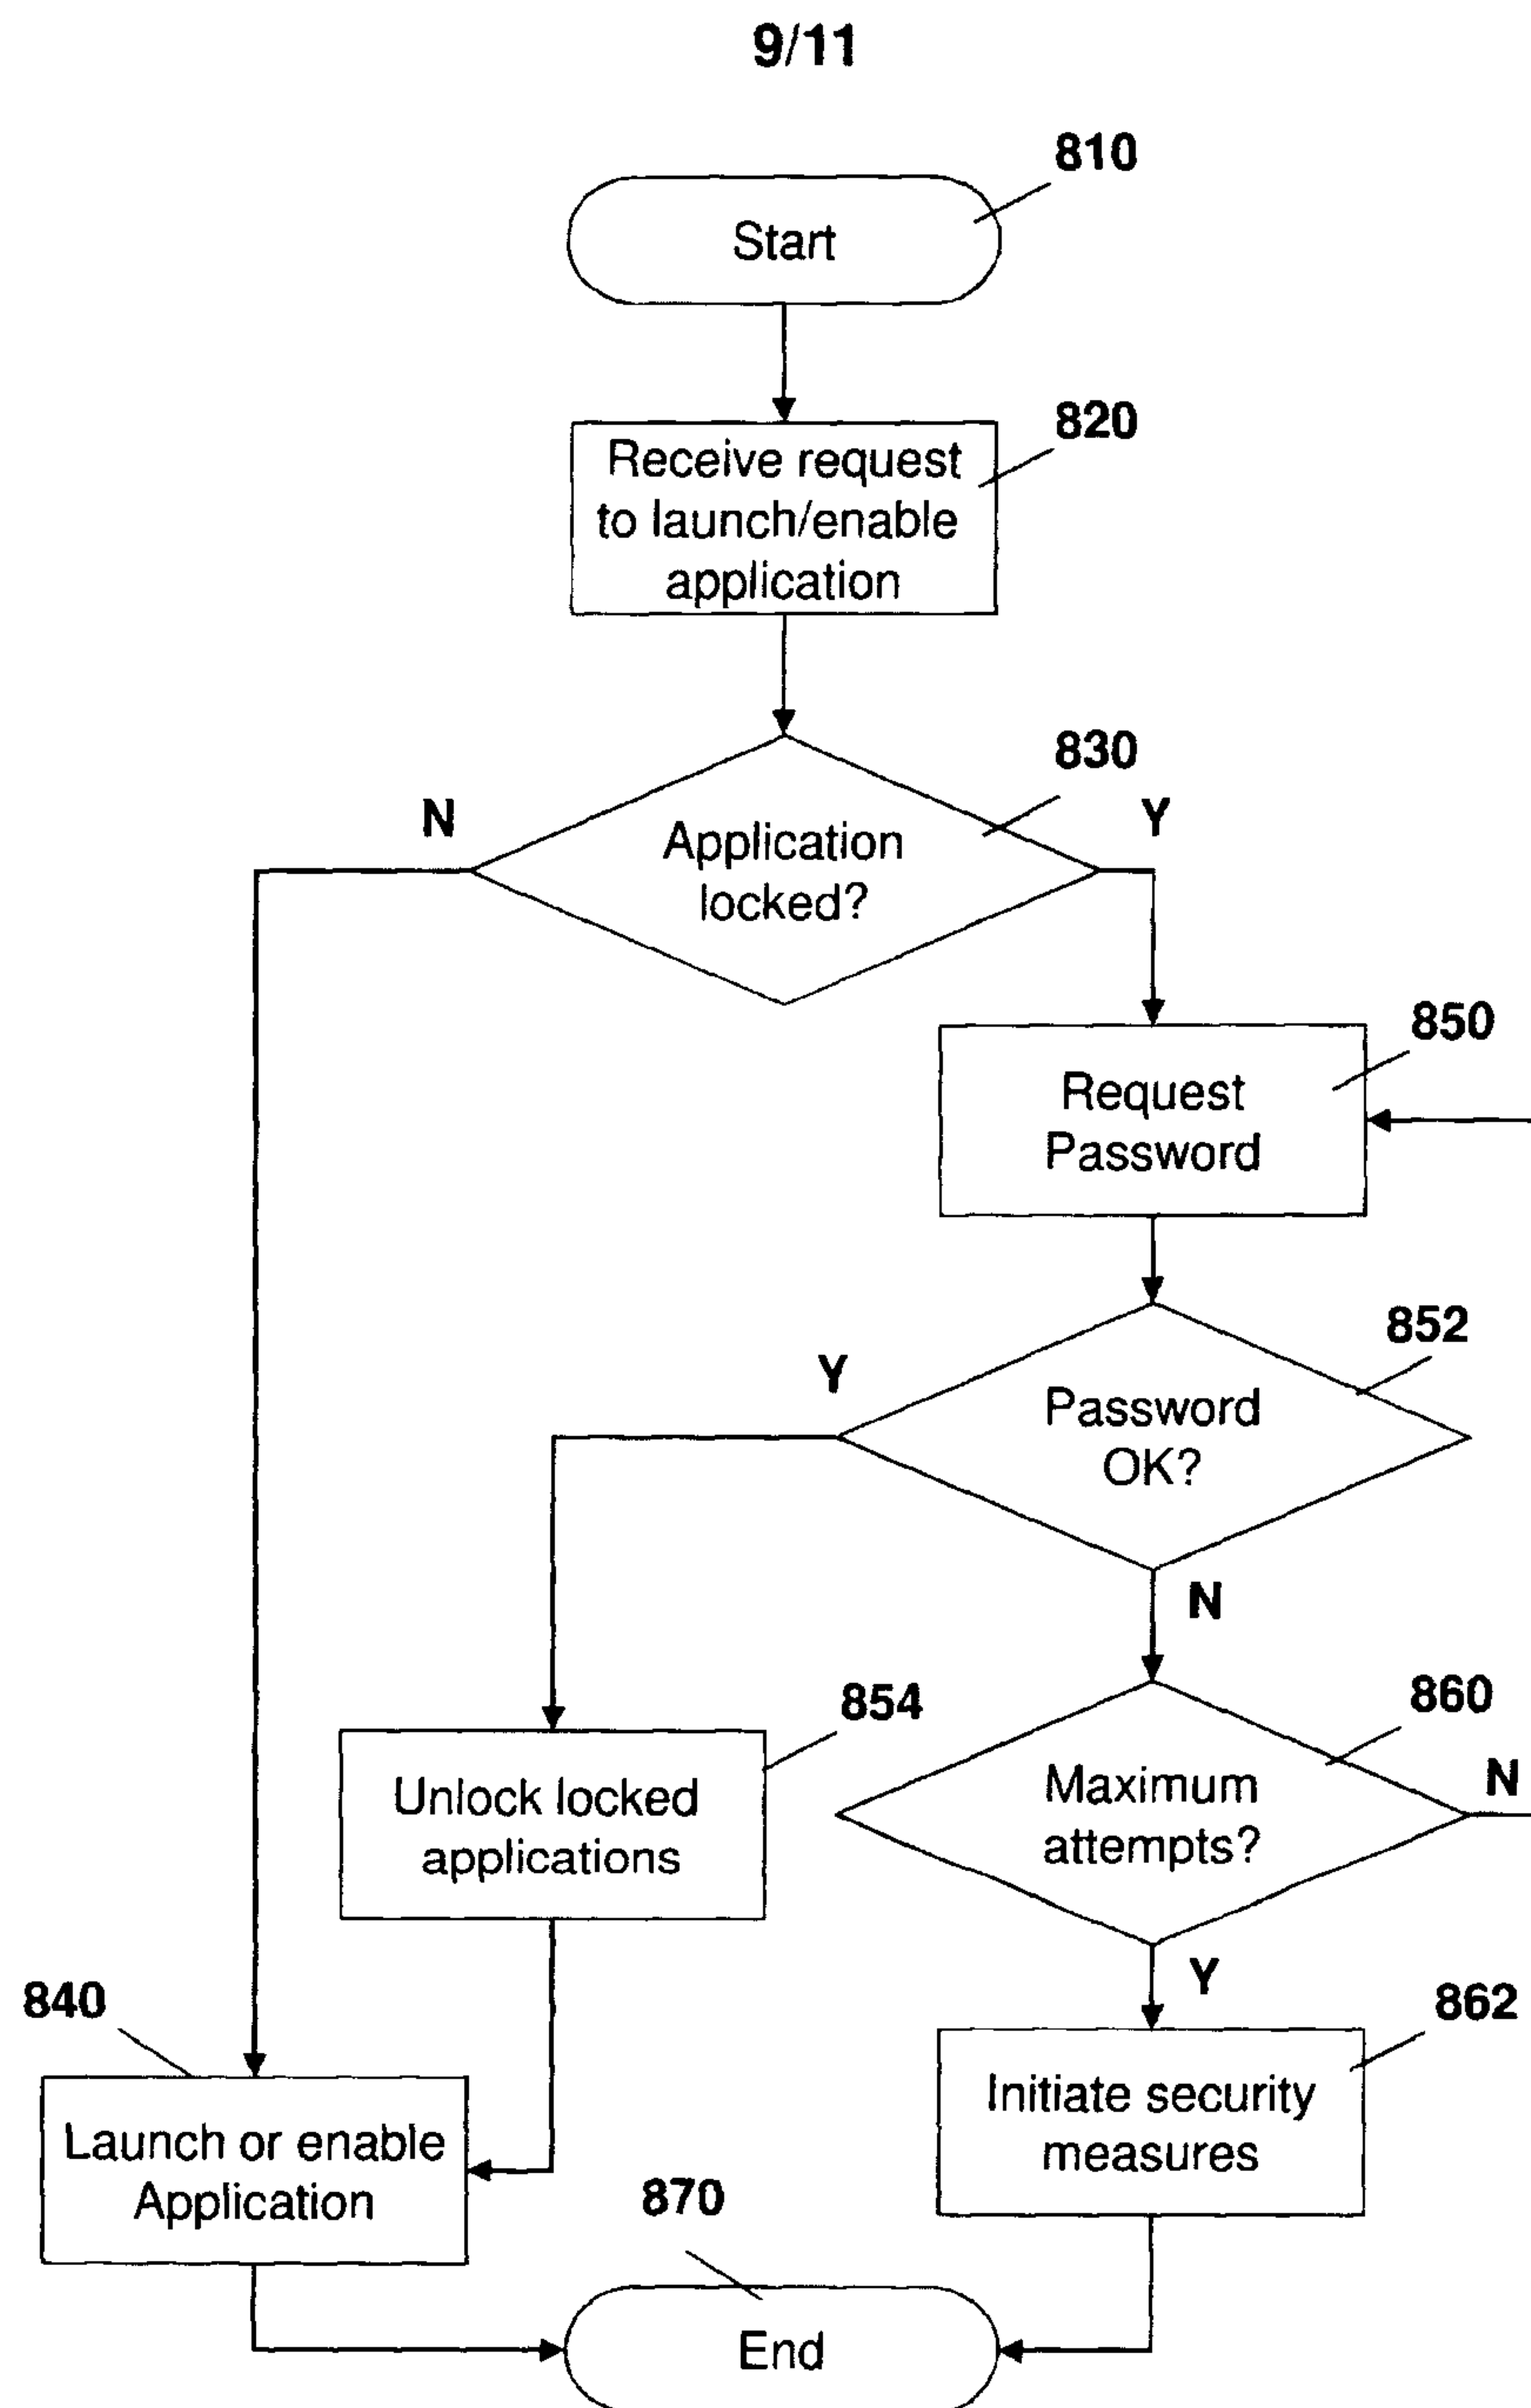
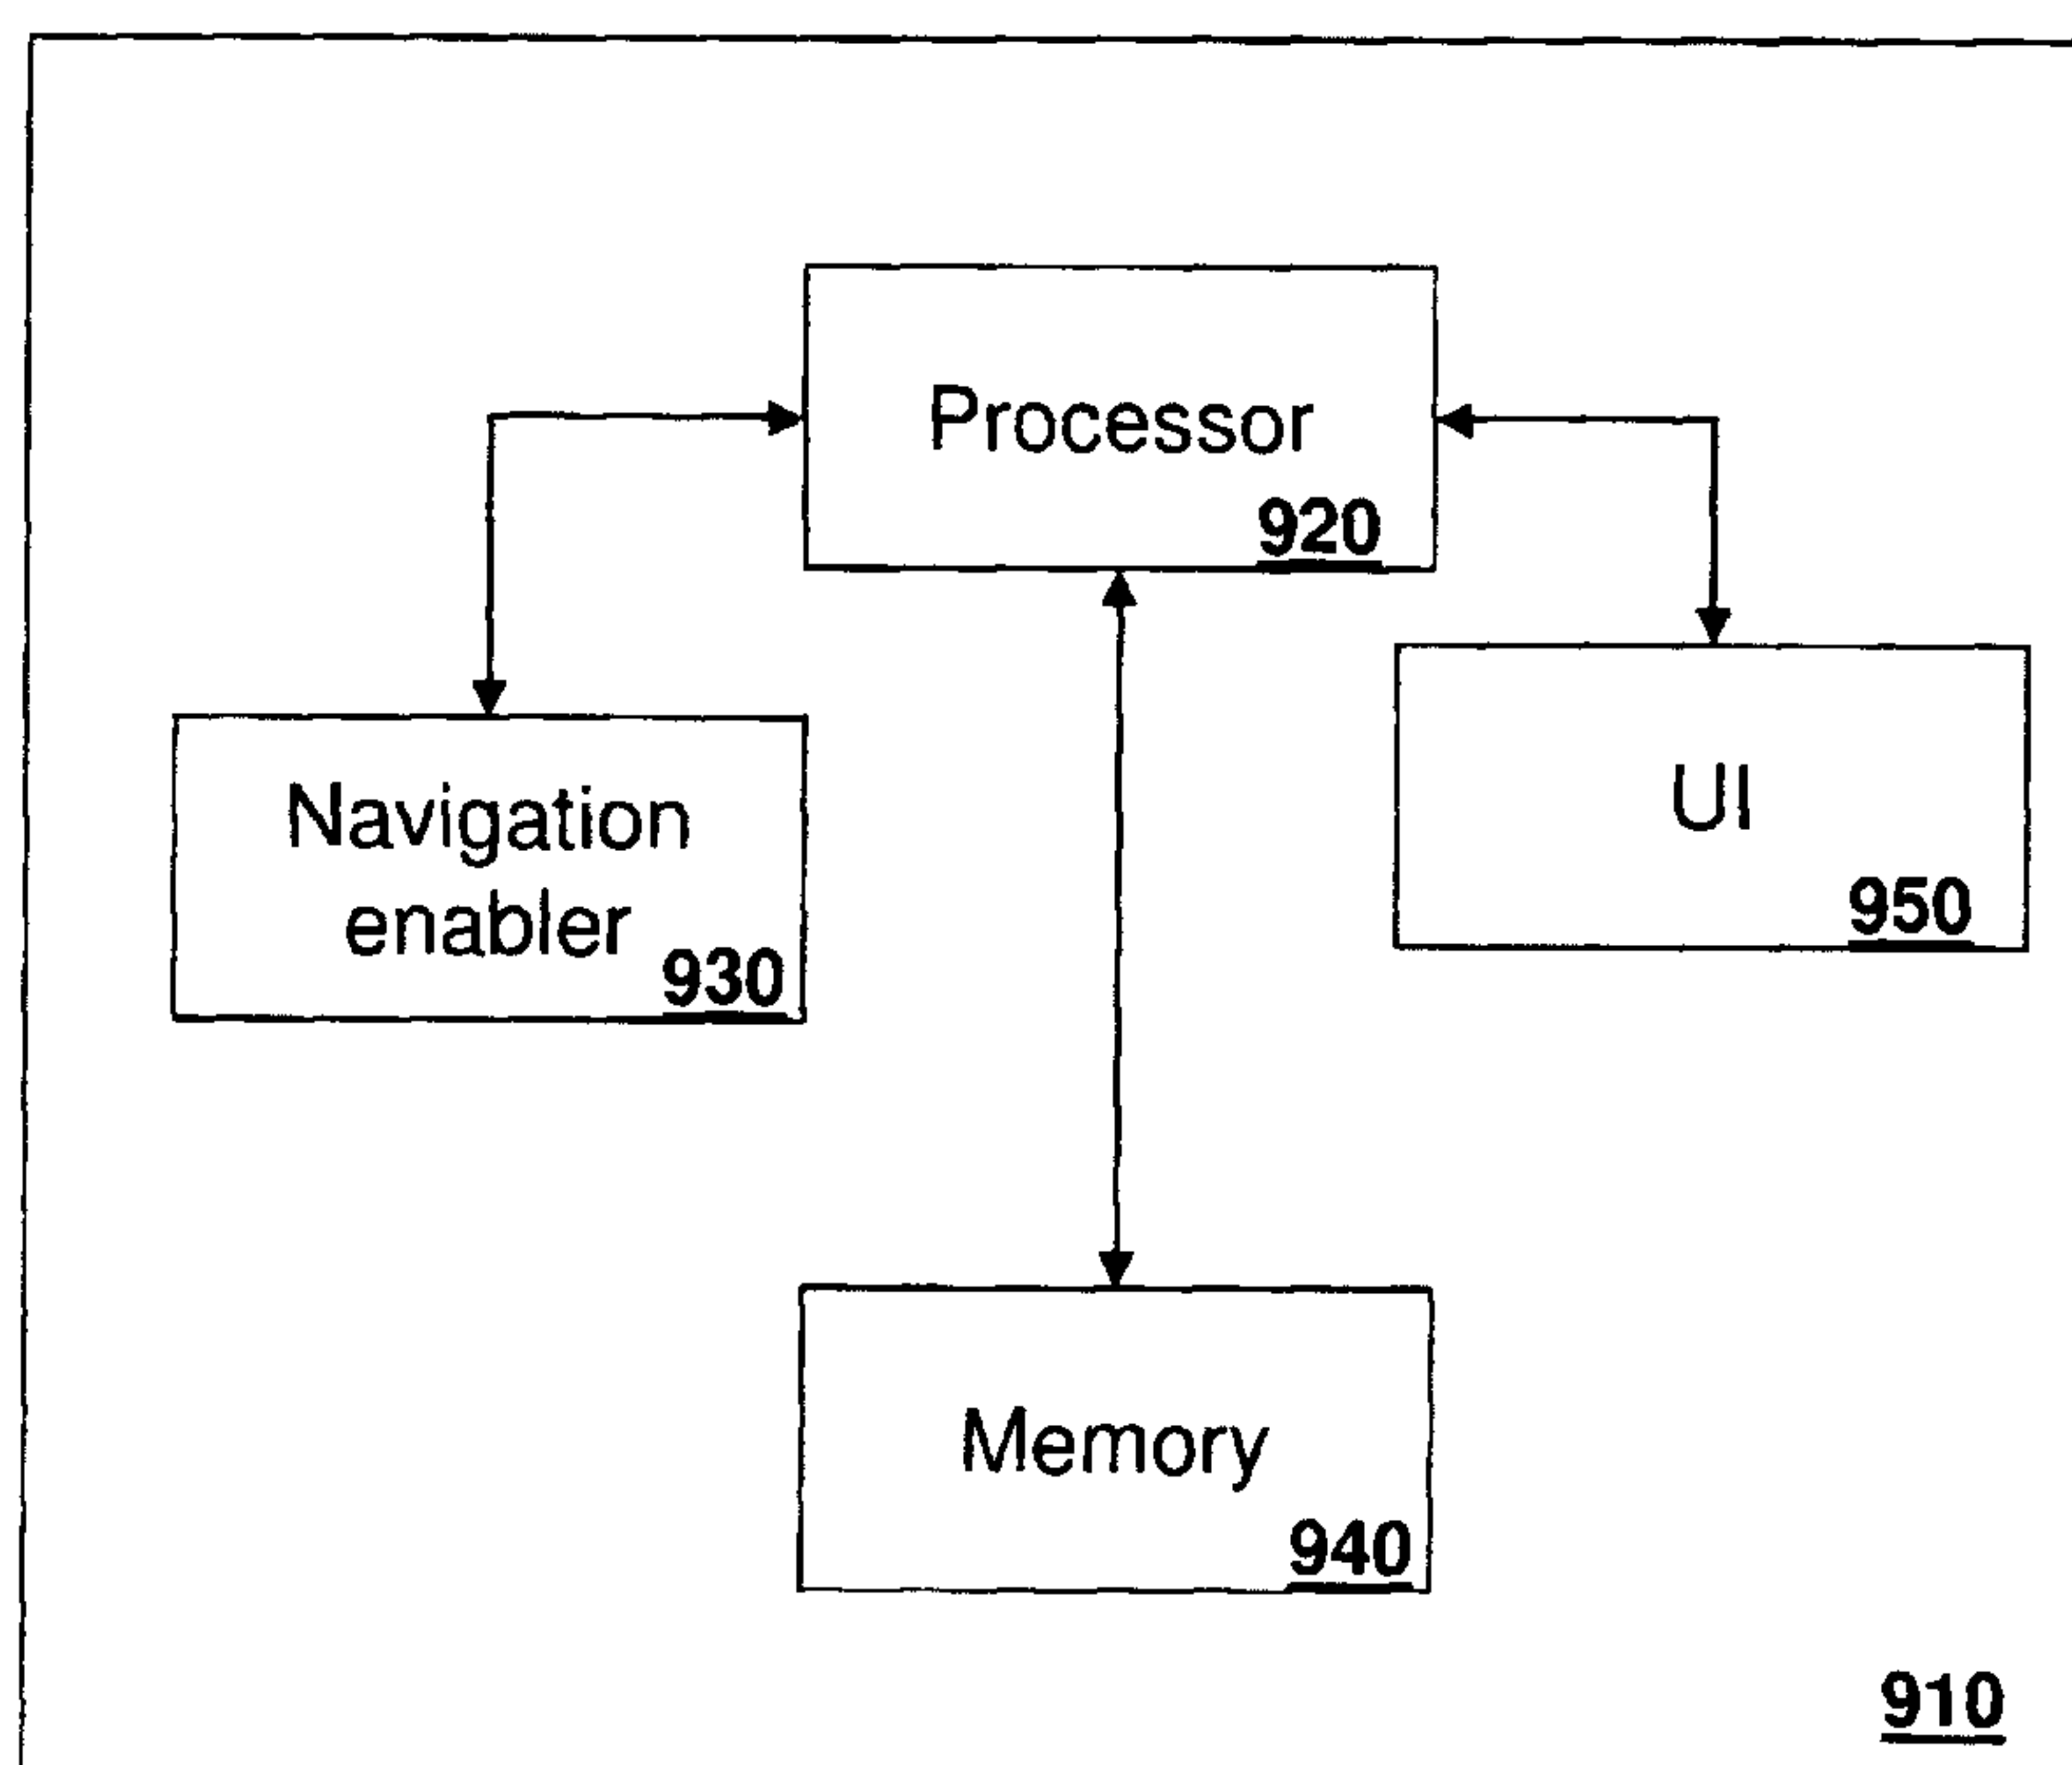


FIG. 7

**FIG. 8**

10/11

**FIG. 9**

11/11

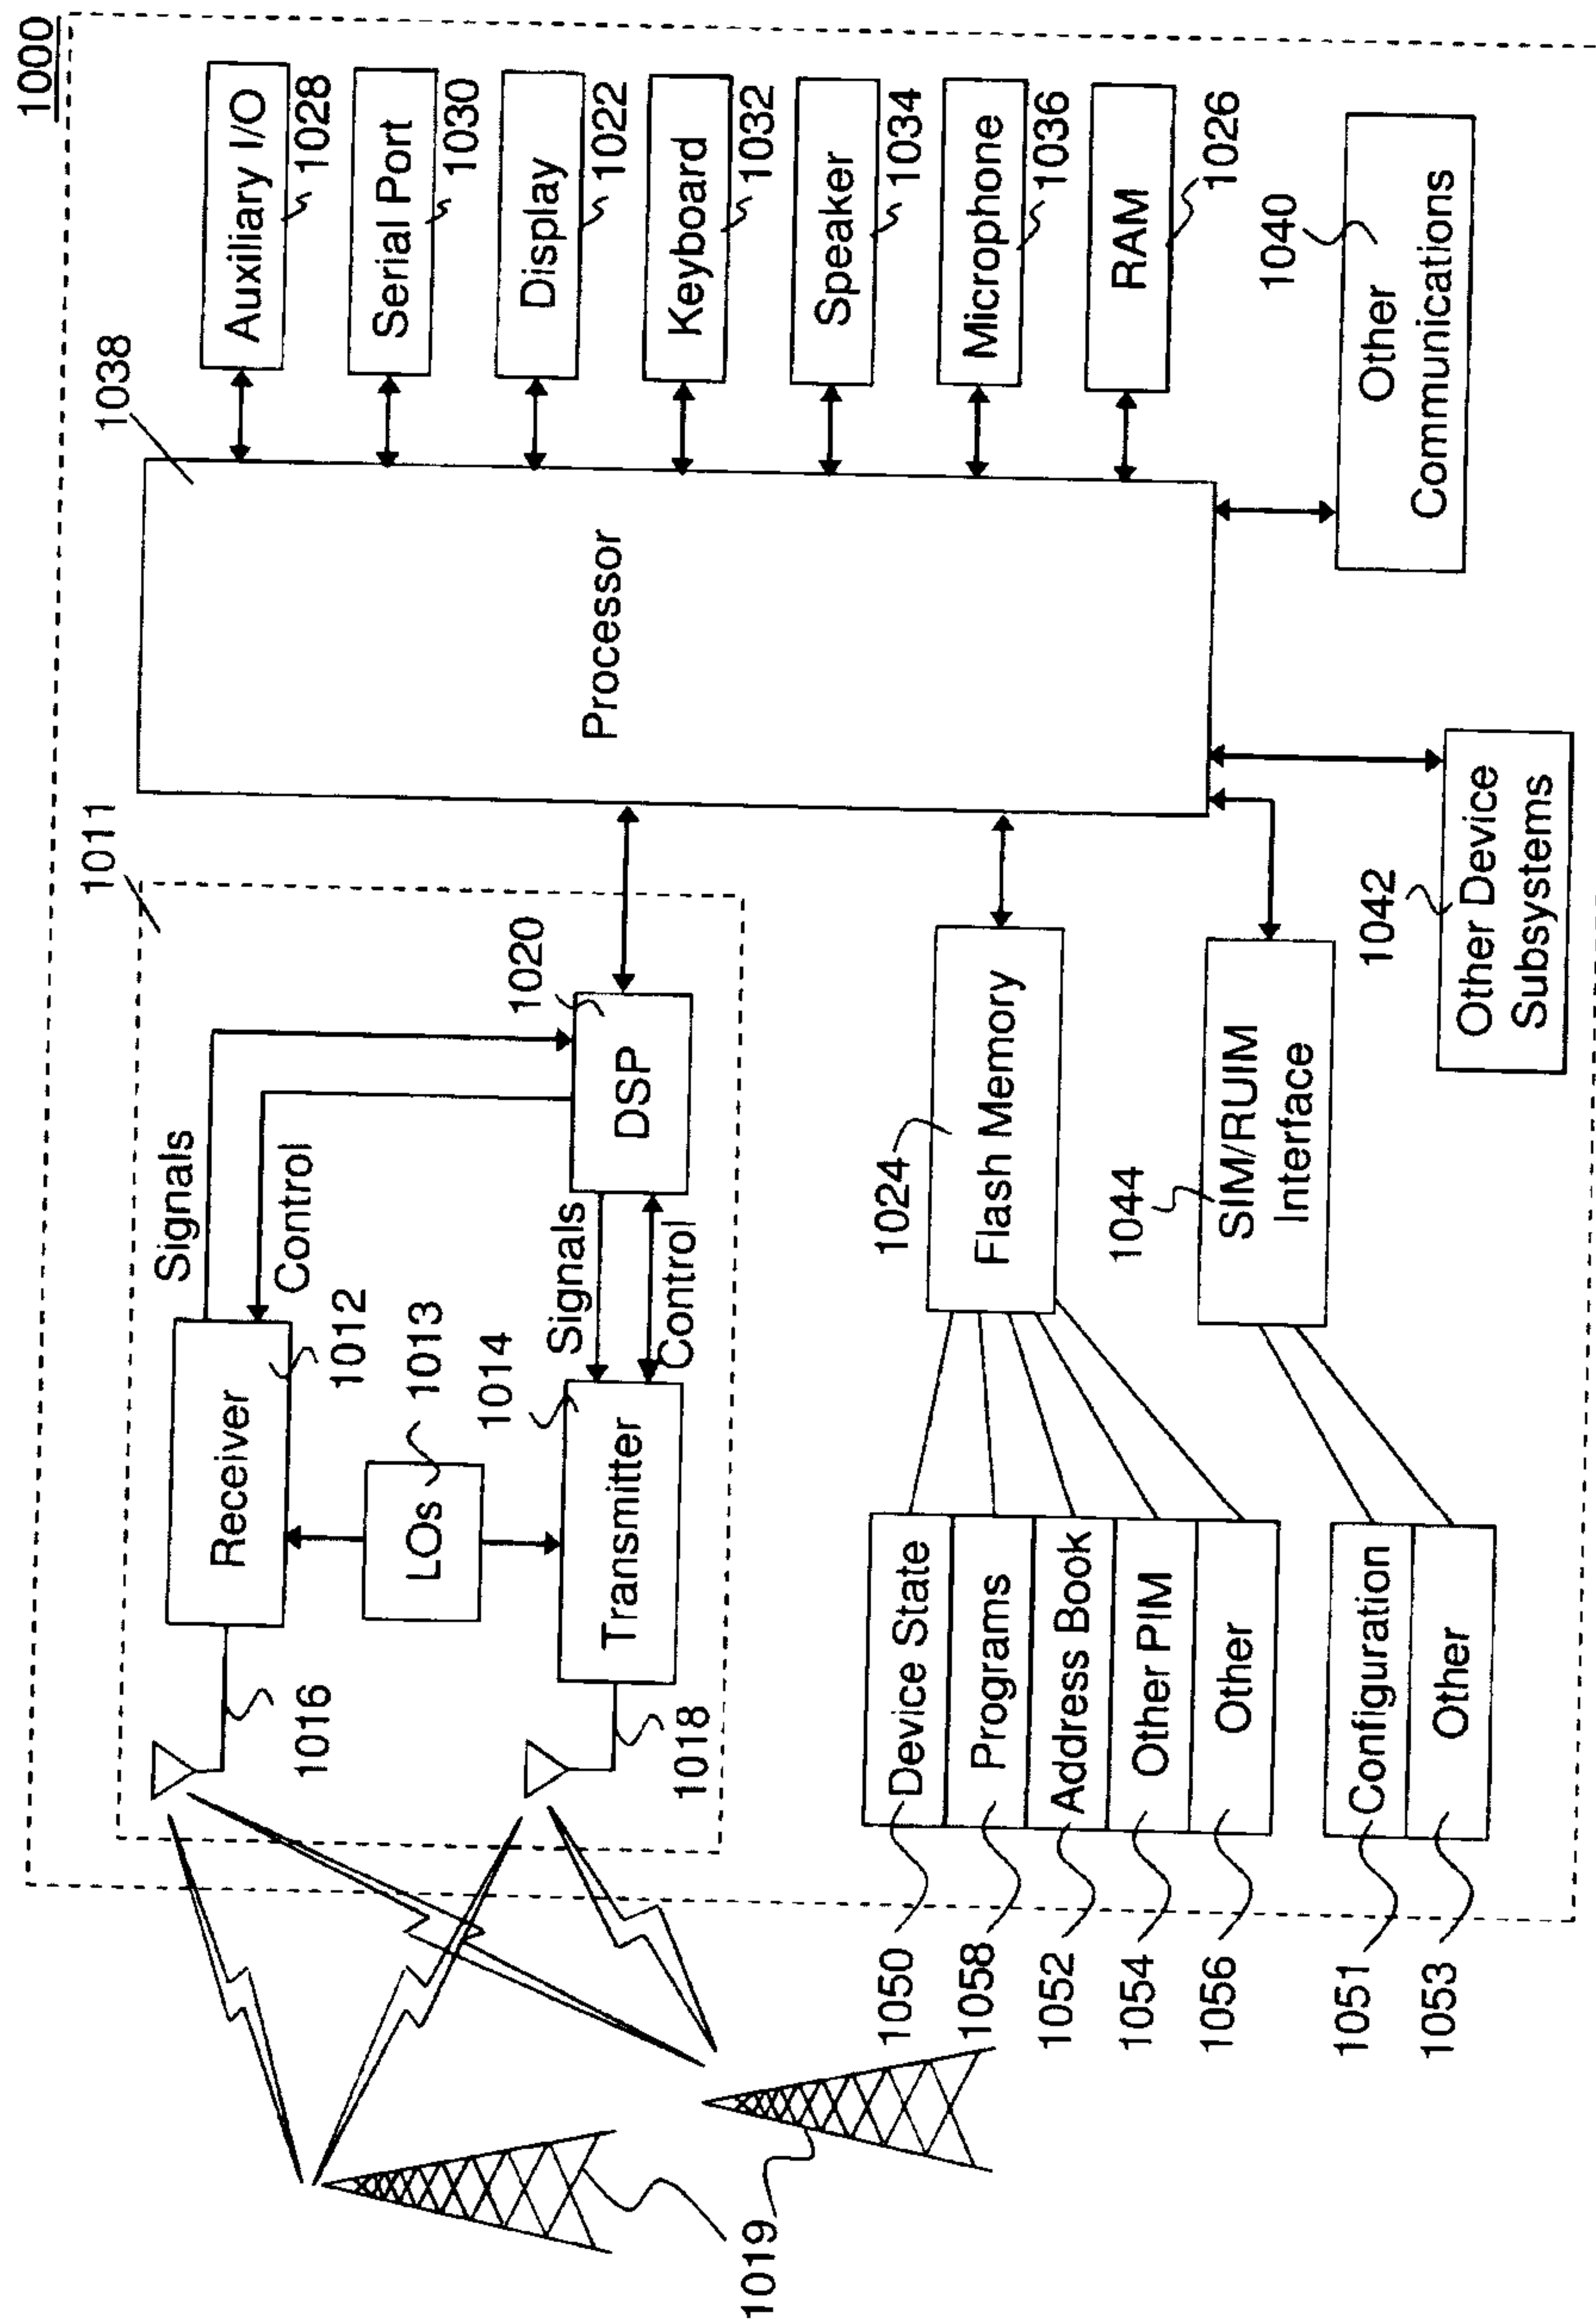


FIG.10

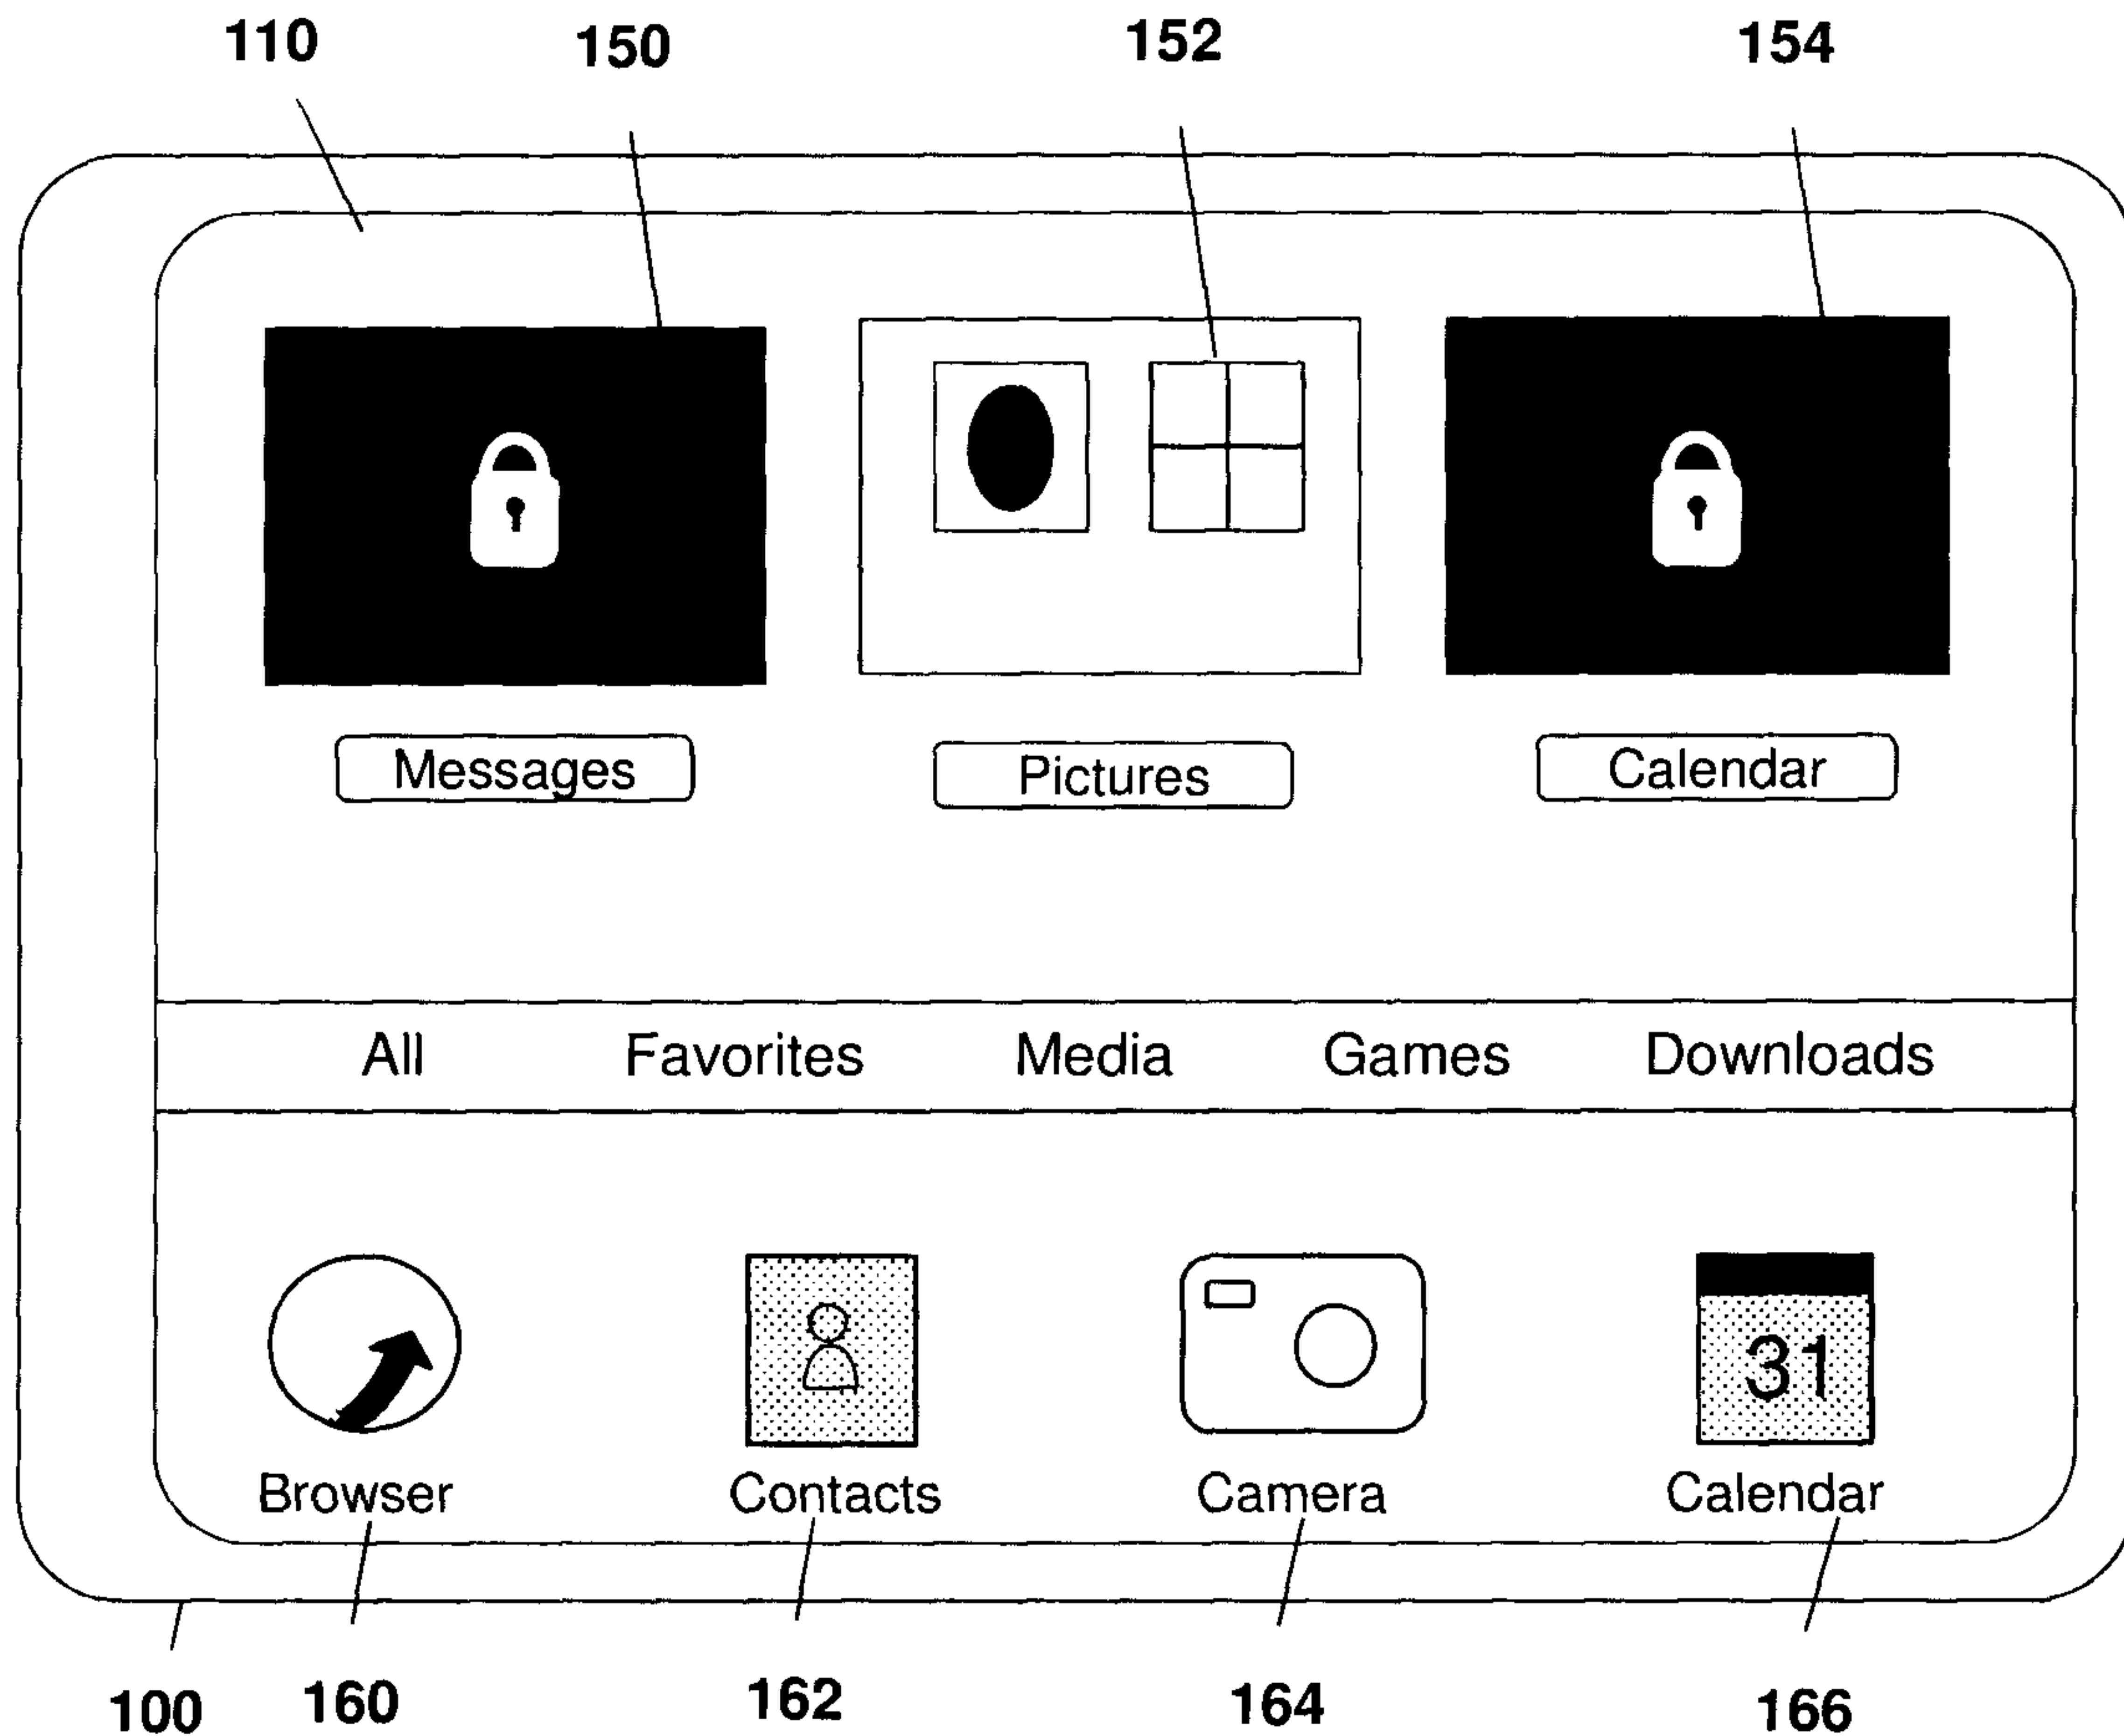


FIG. 3B