

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
31 March 2005 (31.03.2005)

PCT

(10) International Publication Number
WO 2005/029397 A1

(51) International Patent Classification⁷: **G06K 13/08**,
7/00, H01R 13/635, H05K 5/02

(21) International Application Number:
PCT/US2004/016079

(22) International Filing Date: 21 May 2004 (21.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03256975.0 21 May 2003 (21.05.2003) CN

(71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).

(72) Inventor: **JIN, Hao, Qui**; Room 307, No. 8, Haifeng Road, Kunshan City, Jiangsu Province (CN).

(74) Agent: **CALDWELL, Stacey, E.**; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MEMORY CARD CONNECTOR SYSTEM FOR STABILIZING THE POSITION OF A CONTACTED MEMORY CARD

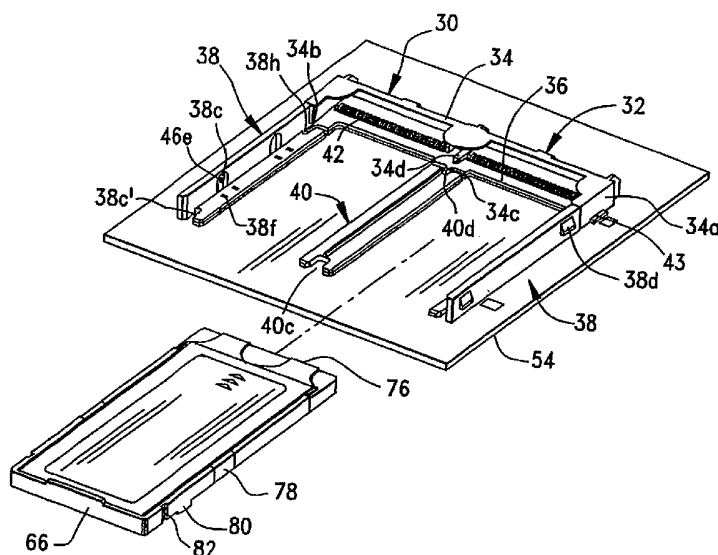

Attorney Reference: A3-354PCT

MEMORY CARD CONNECTOR SYSTEM FOR STABILIZING THE POSITION OF A CONTACTED MEMORY CARD

Field of the Invention:

This invention generally relates to the art of electrical connectors and, particularly, to a memory card connector system for stabilizing a memory card in a connector.

Background of the Invention:

Memory cards are known in the art and contain intelligence in the form of a memory circuit or other electronic program. Some form of card reader reads the information or memory stored on the card. Such cards are used in many applications in today's electronic society, including video cameras, digital still cameras, smartphones, music players, ATMs, cable television decoders, toys, games, PC adapters, multi-media cards and other electronic applications. Typically, a memory card includes a contact or terminal array for connection through a card connector to a card reader system and then to external equipment. The connector readily accommodates insertion and removal of the card to provide quick access to the information and program on the card. The card connector includes terminals for yieldingly engaging the contact array of the memory card.

A typical memory card connector includes an insulating housing structure usually having a lateral terminal-mounting section across the rear of the connector. The contacts or terminals of the connector are mounted on this lateral section. The housing may have one or two legs projecting at right angles forwardly from one or both sides or ends of the lateral section. The insulating housing of such connectors typically is molded of dielectric plastic material into the desired shape. The terminals are stamped and formed of a sheet metal material having a high resiliency, such as phosphor bronze. The connector often is mounted on the top surface of a printed circuit board, and solder tail portions of the terminals are connected, as by a reflow soldering process, to appropriate circuit traces on the board.

Figure 1 shows a memory card connector, generally designated 16, according to the prior art as described above and mounted on a printed circuit board 18. The connector includes a dielectric housing, generally designated 20, which includes a rear terminal-mounting section 22 and a pair of side wall sections 24 extending forwardly from opposite ends of the rear section to

define a receiving space 26 for receiving a memory card 28 inserted therein in the direction of arrow "A". The rear section 22 mounts a plurality of terminals 29 for engaging appropriate contacts on the memory card when inserted into the connector.

Conventional memory card connectors as represented by the prior art connector in Figure 1 have problems in that, after the memory card is fully inserted into the connector, the memory card has a tendency to shift about within the receptacle because the card is not tightly fitted within the connector. The looseness of the memory card may simply be due to manufacturing tolerances. If the card shifts within the receptacle of the connector, this can adversely affect the electrical and mechanical connections between the terminals of the connector and the contacts of the memory card. The present invention is directed to solving these problems by providing a system which stabilizes the card within the connector.

Summary of the Invention:

An object, therefore, of the invention is to provide a new and improved memory card connector of the character described.

In the exemplary embodiment of the invention, a memory card connector includes a rear terminal-mounting section mounting a plurality of terminals for engaging appropriate contacts on a memory card. The rear section defines at least part of a receptacle for receiving a mating end of the memory card. A pair of side wall sections extend forwardly from opposite ends of the rear section for guiding the memory card into the receptacle. Each side wall section includes a card stabilizing notch. A memory card has a mating end insertable into the receptacle and a stabilizing protrusion engageable in each of the card stabilizing notches to prevent the card from shifting relative to the connector.

According to one aspect of the invention, each side wall section is generally L-shaped in cross-section as defined by a horizontal wall and a vertical wall. The card stabilizing notch is located in the horizontal wall, at a front end of the respective side wall section near the vertical wall thereof. The stabilizing protrusion is at an edge of the memory card.

According to another aspect of the invention, a center section extends forwardly from the rear section between the side wall sections for receiving one or two reduced-size memory cards inserted between the side wall sections and the center section. The center section includes card stabilizing notches engageable with stabilizing protrusions on the reduced-size memory card(s).

Other objects, features and advantages of the invention will be apparent from the following detailed description taken in connection with the accompanying drawings.

Brief Description of the Drawings:

5 The features of this invention which are believed to be novel are set forth with particularity in the appended claims. The invention, together with its objects and the advantages thereof, may be best understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify like elements in the figures and in which:

10 FIGURE 1 is a perspective view of a prior art memory card connector mounted on a circuit board for receiving a memory card, as described in the Background, above;

 FIGURE 2 is an exploded perspective view of a memory card connector according to the invention with the components thereof in disassembled condition;

15 FIGURE 3 is a perspective view similar to that of Figure 2, with the connector in assembled condition;

 FIGURE 4 is an exploded perspective view similar to that of Figure 2, on a reduced scale and including a cover for the connector;

20 FIGURE 5 is an exploded perspective view of another embodiment of a memory card connector according to the invention, with the side wall sections and center wall section fabricated of metal material, in conjunction with an accompanying circuit board;

 FIGURE 6 is a perspective view of the connector of Figure 5 in assembled condition and mounted to the circuit board;

 FIGURE 7 is an exploded perspective view of the embodiment of Figures 2-4, in conjunction with a pair of reduced-size memory cards and a circuit board;

25 FIGURE 8 is a perspective view of the two memory cards of Figure 7 inserted into the assembled connector;

 FIGURE 9 is a perspective view of the connector mounted on the circuit board and about to receive a single memory card;

30 FIGURE 10 is a view similar to that of Figure 9, but with the connector about to receive a single reduced-size memory card;

 FIGURE 11 is a view similar to that of Figure 8, but showing a cover for the connector;

FIGURE 12 is a bottom perspective view of the memory card shown in Figure 9; and
FIGURE 13 is a bottom perspective view of the reduced-size memory card shown in
Figure 10 and other selected views.

5 **Detailed Description of the Preferred Embodiments:**

Referring to the drawings in greater detail, and first to Figures 2 and 3, a first
embodiment of a memory card connector, generally designated 30, includes an insulative
housing, generally designated 32, having an elongated rear terminal-mounting section 34
defining a receptacle 36 for receiving a mating end of a memory card, as described hereinafter.

10 A pair of longitudinal side wall sections, generally designated 38, extend forwardly from
opposite ends of the rear section. A center wall section, generally designated 40, extends
forwardly from a mid-point of the rear section to divide receptacle 36 into two portions for
receiving a pair of reduced-size memory cards (described hereinafter) between the center wall
section and the two side wall sections.

15 A plurality of conductive terminals 42 are mounted on rear section 34 of the housing for
engaging appropriate contacts at the mating end of the memory card(s) when inserted into
receptacle 36. The terminals are divided into two groups on opposite sides of center wall section
40 as can be seen clearly in Figures 2 and 3.

Rear terminal-mounting section 34 is a one-piece structure molded of dielectric plastic
20 material. The rear section is elongated and includes a pair of end supports 34a. A pair of end
connecting fingers 34b project forwardly from end supports 34a, and a third or center connecting
finger 34c projects forwardly from the rear section at a mid-point thereof. A guide finger 36d
projects forwardly from a mid-point of the rear section, aligned above center connecting finger
34c and within receptacle 36. The housing is fixed to a circuit board, described hereinafter, by
25 metal "fitting nails" 43 at opposite ends of rear section 34.

Each side wall section 38 also is a one-piece structure and is molded of dielectric plastic
material. Each side wall section is generally L-shaped in cross section and includes an upright
side wall 38a and an inwardly projecting bottom wall 38b. As viewed in the drawings, the side
wall is generally vertical and the bottom wall is generally horizontal. The side walls are guide
30 walls for the memory card(s). A pair of cut-outs or recesses 38c are formed in the inside surface
of the vertical side wall. A pair of chamfered latch bosses 38d project outwardly from the

outside of the side wall. A pair of positioning pins 38e project downwardly from the bottom of the horizontal bottom wall, and pairs of holes 38f are formed through the bottom wall. A pair of mounting posts 38g project downwardly from bottom wall 38b for mounting the side wall section in a pair of holes in a printed circuit board, as will be seen hereinafter. A rear positioning notch 38h is formed in the bottom wall immediately adjacent the inside surface of the side wall, and a similar notch 38i is formed at the front of the bottom wall. Notches 38i are card stabilizing notches.

Center wall section 40 is molded of plastic material and includes a pair of mounting posts 40a projecting from the bottom thereof for insertion into appropriate mounting holes in the printed circuit board. A plurality of positioning pins 40b also project downwardly from the center wall section. A front card stabilizing notch 40c and a rear notch 40d are formed in opposite ends of the center wall section. Finally, a partition rib 40e runs the length of the center wall section. The partitioning rib is a guide rib for the reduced-size memory cards, as will be seen hereinafter.

Still referring to Figures 2 and 3, at least one, or more, grounding members, generally designated 46, are mounted in side wall sections 38. Two grounding members are shown, but four grounding members can be mounted in the side wall sections. Each grounding member 46 is generally L-shaped and includes a generally horizontal base 46a and a vertical or upright arm 46b. A pair of side wings 46c project upwardly from opposite side edges of the base. A downwardly projecting detent 46d is embossed or formed from base 46a, and an inwardly projecting detent 46e is embossed or formed out of upright arm 46b.

Grounding members 46 are assembled to side wall sections 48 by pushing each grounding member upwardly through a hole into the bottom of a respective side wall section so that the upright arm 46b of the grounding member becomes inserted into a respective one of the recesses 38c in the side wall section. This can be seen in Figure 3. When fully inserted, side wings 46c of the grounding member are press-fit into a pair of the holes 38f of the side wall section. When fully inserted, the inwardly projecting detents 46e on the upright arms will engage grounding contacts on the memory card(s). Side walls 38a of the side wall sections, within recesses 38c, provide rigid back up means for arms 46b and detents 46e of the grounding members. The bottom walls 38b of the side wall sections lay on top of the bases 46a of grounding members 46. The downwardly projecting detents 46d on the bases of the grounding

members will engage grounding circuit pads on the printed circuit board. Therefore, the memory card(s) are grounded to the circuit board through grounding members 46 which are mounted on side wall sections 38, as described. Inwardly protruding detents 46e and downwardly protruding detents 46d establish a more positive contact engagement with the memory card and the circuit board, respectively.

The rear terminal-mounting section 34 of housing 32 is detachably assembled to side wall sections 38 and center wall section 40 as shown in Figure 3. During assembly, end connecting fingers 34b of the rear section are press-fit into rear positioning notches 38h at the rear of the side wall sections. In addition, center connecting finger 34c of the rear section is press-fit into rear notch 40d of center wall section 40, as shown.

Figure 4 shows a cover 48 for positioning onto housing 32 of the memory card connector. Specifically, the cover is stamped and formed of sheet metal material and includes a top wall 48a and a pair of side walls 48b. The side walls overlie side wall sections 38 and end supports 34a of rear section 34 of the housing. A pair of latch openings 48c are formed in each side wall. A pair of grounding tabs 48d project outwardly from the bottom of each side wall. A pair of latch arms 48e project forwardly from each side wall. Finally, a pair of cantilevered grounding arms 48f are stamped and formed out of the top wall at opposite sides thereof. When cover 48 is assembled, latch openings 48c snap into latching engagement with the chamfered latch bosses 38d of side wall sections 38. Grounding tabs 48d of the cover form solder tails for fixing the cover to the circuit board and also grounding the cover to the board to provide good shielding and EMI protection for the connector. Cantilevered grounding arms 48f engage ground portions on top of the memory card(s) and latch arms 48e hold the memory card(s) in the connector.

Figures 5 and 6 show another embodiment of the invention wherein a pair of side wall sections 38' and a center wall section 40' are stamped and formed of sheet metal material. The metal wall sections are similar in function to plastic wall sections 38 and 40. Each metal side wall section includes a vertical side wall 38a' and a horizontal bottom wall 38b'. Each metal side wall section includes a downwardly projecting rear connecting flange 38h which is positioned in a connecting slot 50 at an end of rear section 34 of housing 32 to detachably interconnect the side wall sections to the rear section. Each metal side wall section has a pair of mounting posts 38g' for insertion into a pair of mounting holes 52 in a printed circuit board 54. The metal side wall section has an inwardly bent grounding tab 46' which, in essence, replaces

the grounding members 46 of the first embodiment. A downwardly embossed detent 56 is formed out of the bottom wall to engage the top of the circuit board to maintain the side wall section at a proper height. A notch 38i' is formed at the front of the bottom wall. A guide arm 58, having a slanted surface 58a, is formed out of the bottom wall, and a latch arm 60 is formed out of the vertical side wall. As seen in Figure 6, guide arm 58 engages the top surface of circuit board 54, and slanted surface 58a of the guide arm guides the memory card(s) into the connector, while latch arm 60 will latch the card(s) in the connector. Metal center wall section 40' includes a pair of mounting posts 40a' for insertion into a pair of mounting holes in circuit board 54. A pair of upstanding positioning ribs 40e' are formed out of the center wall section.

At this point, it should be noted that Figure 5 shows two linear groupings of circuit traces 64 on circuit board 54. These circuit traces are connected, as by soldering, to appropriate solder tails of the two groups of terminals 42. The solder tails of the terminals are not visible in the drawings.

Figures 7 and 8 show memory card connector 30 in conjunction with circuit board 54, with Figure 8 showing the connector mounted to the board. These two depictions also show a pair of reduced-size memory cards 66 for mounting in the connector. When the connector is mounted onto circuit board 54, mounting posts 38g of side wall sections 38 are inserted into mounting holes 52 of the circuit board, and positioning pins 38e of the side wall sections are inserted into positioning holes 68 in the circuit board. Mounting posts 40a of center wall section 40 are inserted into mounting holes 62 in the circuit board, while positioning pins 40b are inserted into positioning holes 70 in the circuit board. Detents 46d on bases 46a of grounding members 46 will engage a pair of ground pads 72 on the circuit board. Grounding tabs 48d (Fig. 4) of cover 48 will engage ground pads 74 on the circuit board.

Still referring to Figures 7 and 8, each reduced-size memory card 66 includes a recessed mating end 76 which contains appropriate contacts for engaging the two groups of terminals 42. The sides of the memory cards include ground contacts 78 for engaging the embossed detents 46e on upright arms 46b of ground members 46. Cantilevered grounding arms 48f of cover 48 engage the top edges of ground contacts 78. The memory cards are provided with downwardly depending stabilizing projections 80 which are positioned into the front stabilizing notches 38i of side wall sections 38 and into forward stabilizing notch 40c of center wall section 40 to prevent the memory cards from shifting in the connector. Each memory card also includes a notch 82 in

each opposite side thereof near the front end of the memory card for receiving latch arms 48e of cover 48 and/or latch arms 60 (Figs. 5 and 6) of metal side wall sections 38'.

Figure 9 shows a single, larger memory card 66A for insertion into memory card connector 30 mounted on circuit board 54. The larger memory card has a recessed mating end 76 with arrays of contacts for engaging the two groups of terminals 42. Like the reduced-size memory cards 66, memory card 66A has ground contacts 78 on opposite sides thereof, as well as stabilizing projections 80 and notches 82.

Figure 10 simply shows that memory card connector 30 can be used to receive a single reduced-size memory card 66 and does not necessarily have to receive two reduced-size cards.

In other words, the connector can receive one or two reduced-size cards or one larger size card.

Figure 11 shows that cover 48 has a top wall 83 with a large recessed, downwardly projecting area 84 which also can be seen in Figure 4. In Figure 11, a pair of downwardly projecting protrusions 86 are formed on the underside of the cover for insertion into a pair of recesses 88 in the top surfaces of memory cards 66. The interengagement of these protrusions and recesses fix the positions of the memory cards and help prevent the cards from shifting around when fully inserted into the connector.

Figure 12 shows that the larger memory card 66A has a groove 94 in the underside thereof to accommodate the positioning rib 40e of center wall section 40 or the positioning ribs 40e' of the metal center wall section 40'.

Figure 13 shows that the reduced-size memory cards 66 are provided with elongated notches 96 to accommodate the positioning rib 40e of center wall section 40 or the positioning ribs 40e' of metal center wall sections 40'.

It will be understood that the invention may be embodied in other specific forms without departing from the spirit or central characteristics thereof. The present examples and embodiments, therefore, are to be considered in all respects as illustrative and not restrictive, and the invention is not to be limited to the details given herein.

CLAIMS:

What is claimed is:

1. A memory card connector system, comprising:

a connector including a rear terminal-mounting section mounting a plurality of terminals for engaging appropriate contacts on a memory card and defining at least part of a receptacle for receiving a mating end of the memory card, and a pair of side wall sections extending forwardly from opposite ends of the rear section for guiding the memory card into the receptacle, each side wall section including a card stabilizing notch; and

a memory card having a mating end insertable into said receptacle and a stabilizing protrusion engageable in each of said card stabilizing notches to prevent the card from shifting relative to the connector.

2. The memory card connector system of claim 1 wherein said card stabilizing notch is located at a front end of each side wall section.

3. The memory card connector system of claim 1 wherein each side wall section is generally L-shaped in cross-section as defined by a horizontal wall and a vertical wall, and said card stabilizing notch is located in the horizontal wall.

4. The memory card connector system of claim 3 wherein said stabilizing notch is located in the horizontal wall near the vertical wall, and said stabilizing protrusion is at an edge of the memory card.

5. The memory card connector system of claim 1, including a center section extending forwardly from the rear section between said side wall sections for receiving one or two reduced-size memory cards inserted between the side wall sections and the center section, the center section including a card stabilizing notch engageable with stabilizing protrusions on the reduced-size memory card(s).

6. A memory card connector system, comprising:

a connector including a rear terminal-mounting section mounting a plurality of terminals for engaging appropriate contacts on a memory card and defining at least part of a receptacle for receiving a mating end of the memory card, and a pair of side wall sections extending forwardly from opposite ends of the rear section for guiding the memory card into the receptacle, each side wall section being elongated and generally L-shaped in cross-section as defined by a horizontal wall and a vertical wall, and including a card stabilizing notch located in the horizontal wall of each side wall section near a front end thereof and near the vertical wall of the side wall section; and

a memory card having a mating end insertable into said receptacle and a stabilizing protrusion at opposite edges thereof engageable in said card stabilizing notches to prevent the card from shifting relative to the connector.

7. The memory card connector system of claim 6, including a center section extending forwardly from the rear section between said side wall sections for receiving one or two reduced-size memory cards inserted between the side wall sections and the center section, the center section including a card stabilizing notch engageable with stabilizing protrusions on the reduced-size memory card(s).

8. A memory card connector system, comprising:

a connector including a rear terminal-mounting section mounting a plurality of terminals for engaging appropriate contacts on a memory card and defining at least part of a receptacle for receiving a mating end of the memory card, at least one side wall section extending forwardly from one end of the rear section for guiding the memory card into the receptacle; and

a memory card having a mating end insertable into said receptacle; and
complementary interengaging stabilizing means between the side wall section and the memory card to prevent the card from shifting relative to the connector, including a card stabilizing notch in one of the side wall section or the memory card engageable with a stabilizing protrusion on the other of the side wall section or memory card.

9. The memory card connector system of claim 8 wherein said stabilizing means are located at a front end of the side wall section.

10. The memory card connector system of claim 8 wherein said side wall section is generally L-shaped in cross-section as defined by a horizontal wall and a vertical wall, and said stabilizing means are located in the horizontal wall.

11. The memory card connector system of claim 10 wherein said stabilizing means is located in the horizontal wall near the vertical wall and at an edge of the memory card.

12. A memory card connector system, comprising:

a connector including a rear terminal-mounting section mounting a plurality of terminals for engaging appropriate contacts on a memory card and defining at least part of a receptacle for receiving a mating end of the memory card, and a pair of side wall sections extending forwardly
5 from opposite ends of the rear section for guiding the memory card into the receptacle;

a cover mountable over the connector and including a top wall spanning said side wall sections;

a memory card having a mating end insertable into said receptacle; and

complementary interengaging stabilizing means between the top wall of the cover and the
10 memory card to prevent the card from shifting relative to the connector.

13. The memory card connector system of claim 12 wherein said stabilizing means include a stabilizing protrusion on one of the top wall of the cover or the memory card for insertion into a stabilizing hole in the other of the top wall of the cover or the memory card.

14. The memory card connector system of claim 13, including a plurality of stabilizing protrusions depending from the underside of the top wall of the cover insertable into a plurality of card stabilizing holes in the top of the memory card.

AMENDED CLAIMS

[received by the International Bureau on 19 November 2004 (19.11.04);
original claims 5,7 and 9 cancelled; new independent claim 15 added;
remaining claims amended]

1. A memory card connector system, comprising:

a connector (30) including a rear terminal-mounting section (34) mounting a plurality of terminals (42) for engaging appropriate contacts on a memory card and defining at least part of a receptacle (36) for receiving a mating end of the memory card, and a pair of side wall sections (38) extending forwardly from opposite ends of the rear section for guiding the memory card into the receptacle, each side wall section including a card stabilizing notch (38i) and further including a center section (40) extending forwardly from the rear section (34) between said side wall sections (38) for receiving one or two reduced-size memory cards (66) inserted between the side wall sections (38) and the center section (40), the center section including a card stabilizing notch (40c) engageable with stabilizing protrusions (80) on the reduced-size memory card(s) (66); and

a memory card (66,66A) having a mating end (76) insertable into said receptacle (36) and a stabilizing protrusion (80) engageable in each of said card stabilizing notches (38i) to prevent the card from shifting relative to the connector.

2. The memory card connector system of claim 1 wherein said card stabilizing notch (38i) is located at a front end of each side wall section (38).

3. The memory card connector system of claim 1 wherein each side wall section (38) is generally L-shaped in cross-section as defined by a horizontal wall (38b) and a vertical wall (38a), and said card stabilizing notch (38i) is located in the horizontal wall.

4. The memory card connector system of claim 3 wherein said stabilizing notch (38i) is located in the horizontal wall (38b) near the vertical wall (38a), and said stabilizing protrusion (80) is at an edge of the memory card (66,66A).

6. A memory card connector system, comprising:

a connector (30) including a rear terminal-mounting section (34) mounting a plurality of terminals (42) for engaging appropriate contacts on a memory card and defining at least part of a receptacle (36) for receiving a mating end of the memory card, and a pair of side wall sections (38) extending forwardly from opposite ends of the rear section for guiding the memory card into the receptacle, each side wall section being elongated and generally L-shaped in cross-section as defined by a horizontal wall (38b) and a vertical wall (38a), and including a card stabilizing notch (38i) located in the horizontal wall of each side wall section near a front end thereof and near the vertical wall of the side

AMENDED SHEET (ARTICLE 19)

wall section and further including a center section (40) extending forwardly from the rear section (34) between said side wall sections (38) for receiving one or two reduced-size memory cards (66) inserted between the side wall sections (38) and the center section (40), the center section including a card stabilizing notch (40c) engageable with stabilizing protrusions (80) on the reduced-size memory card(s) (66); and

a memory card (66,66A) having a mating end (76) insertable into said receptacle (36) and a stabilizing protrusion (80) at opposite edges thereof engageable in said card stabilizing notches (38i) to prevent the card from shifting relative to the connector.

8. A memory card connector system, comprising:

a connector (30) including a rear terminal-mounting section (34) mounting a plurality of terminals (42) for engaging appropriate contacts on a memory card and defining at least part of a receptacle (36) for receiving a mating end of the memory card, at least one side wall section (38) extending forwardly from one end of the rear section for guiding the memory card into the receptacle; and

a memory card (66,66A) having a bottom face and a mating end (76) insertable into said receptacle; and

complementary interengaging stabilizing means (38i,80) between the side wall section (38) and the memory card (66,66A) to prevent the card from shifting relative to the connector, including a card stabilizing notch (38i) in a front end of one of the side wall sections engageable with a stabilizing protrusion (80) extending toward the card stabilizing notch from the bottom face of the memory card.

10. The memory card connector system of claim 8 wherein said side wall section (38) is generally L-shaped in cross-section as defined by a horizontal wall (38b) and a vertical wall (38a), and said stabilizing means (38i) are located in the horizontal wall.

11. The memory card connector system of claim 10 wherein said stabilizing means (38i) is located in the horizontal wall (38b) near the vertical wall (38a) and at an edge of the memory card (66,66A).

12. A memory card connector system, comprising:

a connector (30) including a rear terminal-mounting section (34) mounting a plurality of terminals (42) for engaging appropriate contacts on a memory card and defining at least part of a receptacle (36) for receiving a mating end of the memory card,

AMENDED SHEET (ARTICLE 19)

and a pair of side wall sections (38) extending forwardly from opposite ends of the rear section for guiding the memory card into the receptacle;

a cover (48) mountable over the connector and including a top wall (48a) spanning said side wall sections;

a memory card (66,66A) having a mating end (76) insertable into said receptacle; and

complementary interengaging stabilizing means (86,88) between the top wall of the cover and the memory card to prevent the card from shifting relative to the connector.

13. The memory card connector system of claim 12 wherein said stabilizing means include a stabilizing protrusion (86) on one of the top wall (48a) of the cover or the memory card for insertion into a stabilizing hole (88) in the other of the top wall of the cover or the memory card.

14. The memory card connector system of claim 13, including a plurality of stabilizing protrusions (86) depending from the underside of the top wall (48a) of the cover insertable into a plurality of card stabilizing holes (88) in the top of the memory card.

15. A memory card connector system, comprising:

a connector (30) including a rear terminal-mounting section (34) mounting a plurality of terminals (42) for engaging appropriate contacts on a memory card and defining at least part of a receptacle (36) for receiving a mating end of the memory card, at least one side wall section (38) extending forwardly from one end of the rear section for guiding the memory card into the receptacle; and

a memory card (66,66A) having a bottom face and a mating end (76) insertable into said receptacle; and

complementary interengaging stabilizing means (38i,80) between the side wall section (38) and the memory card (66,66A) to prevent the card from shifting relative to the connector, including a card stabilizing projection (38i) in a front end of one of the side wall sections projecting upwardly engageable with a stabilizing notch in the bottom face of the memory card.

1/7

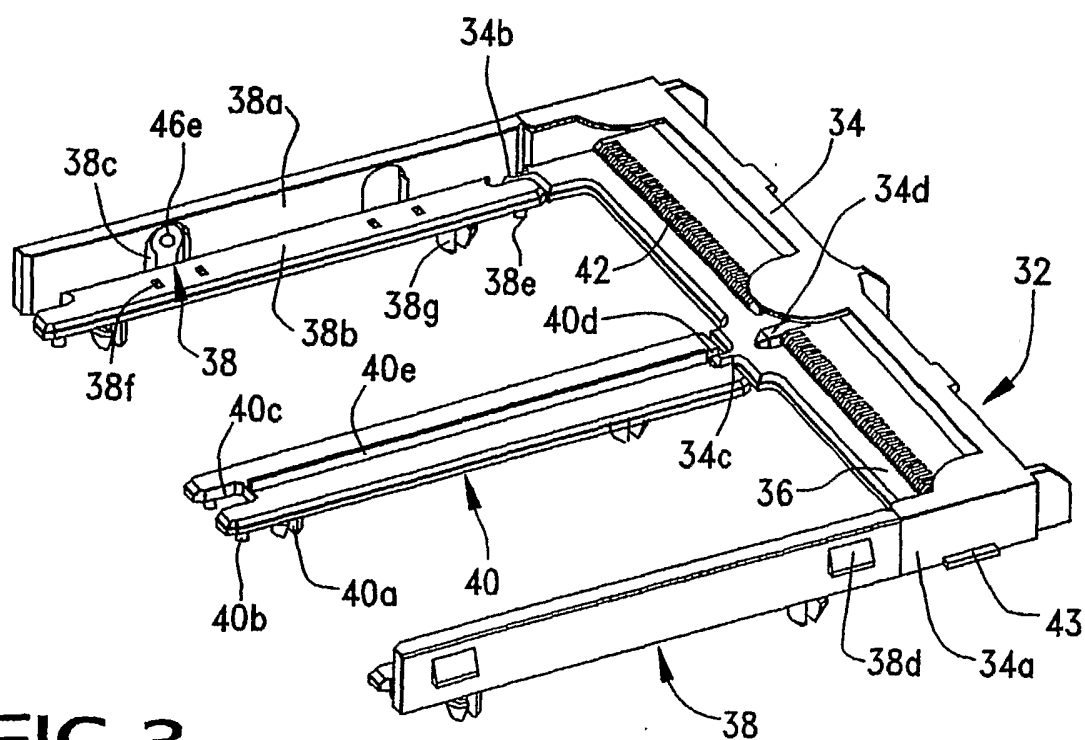
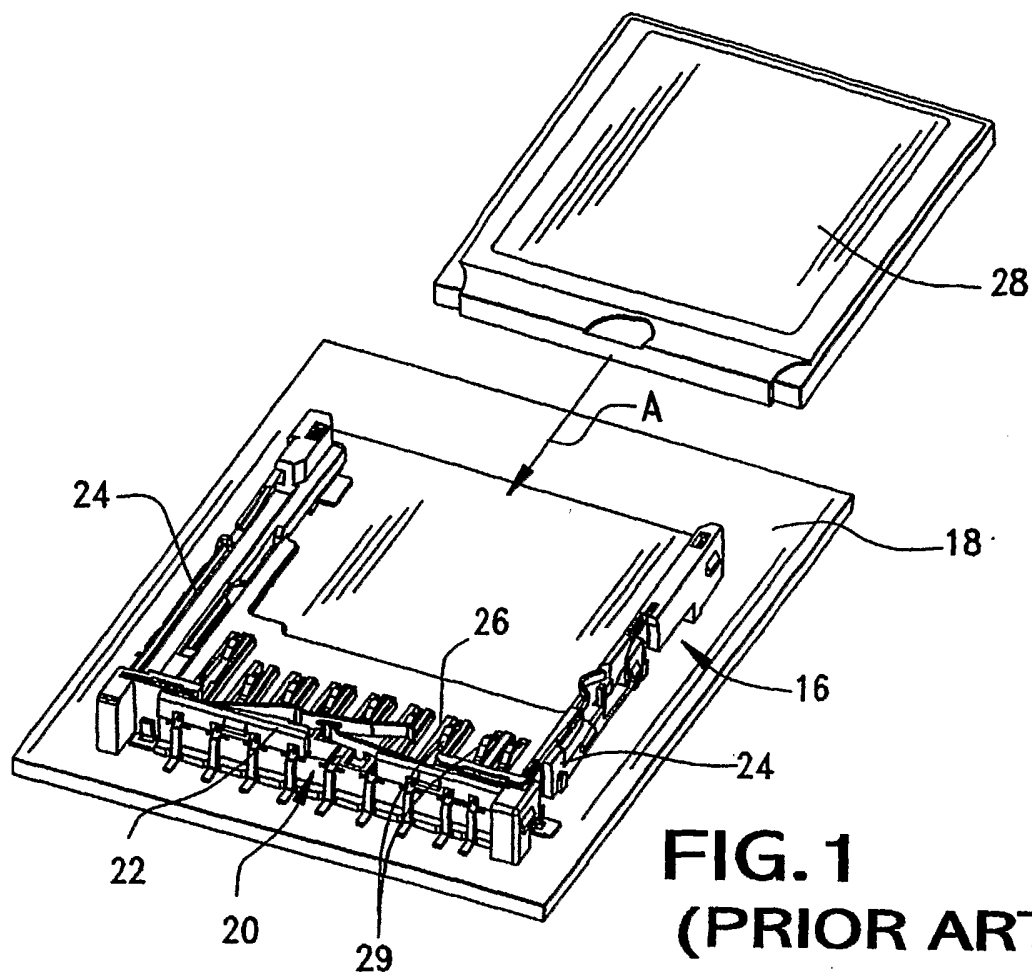


FIG. 2

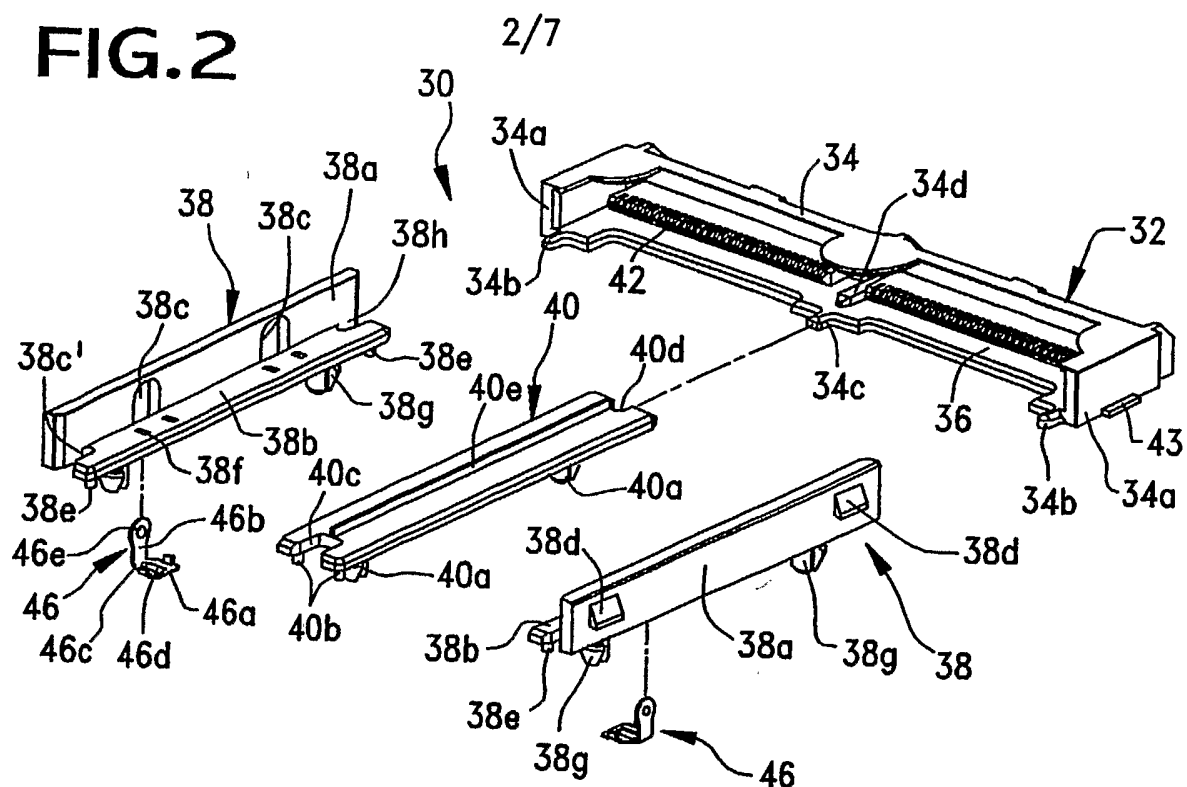


FIG. 4

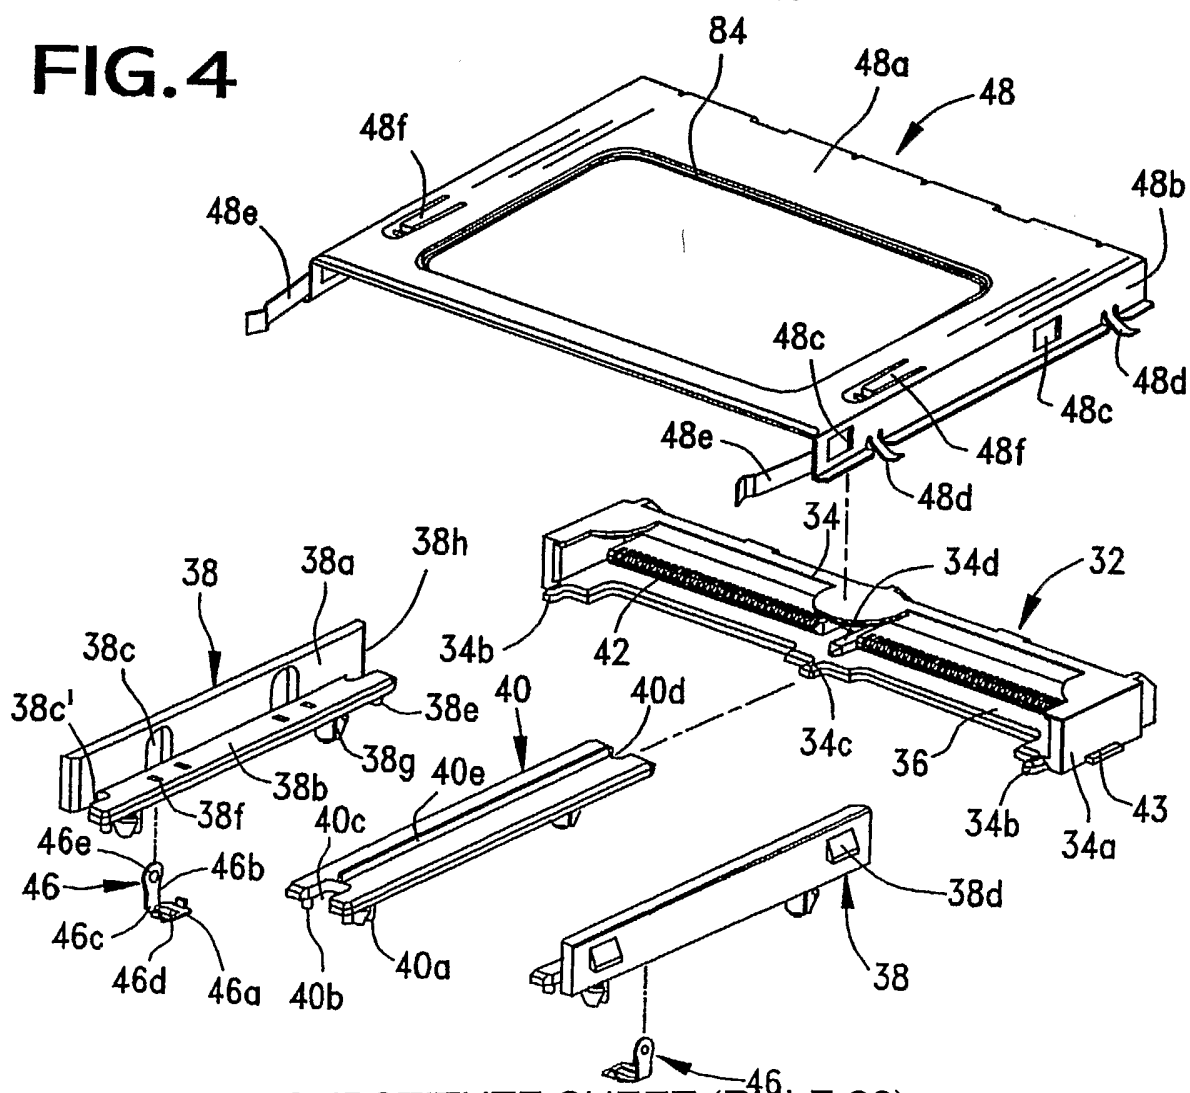


FIG.5

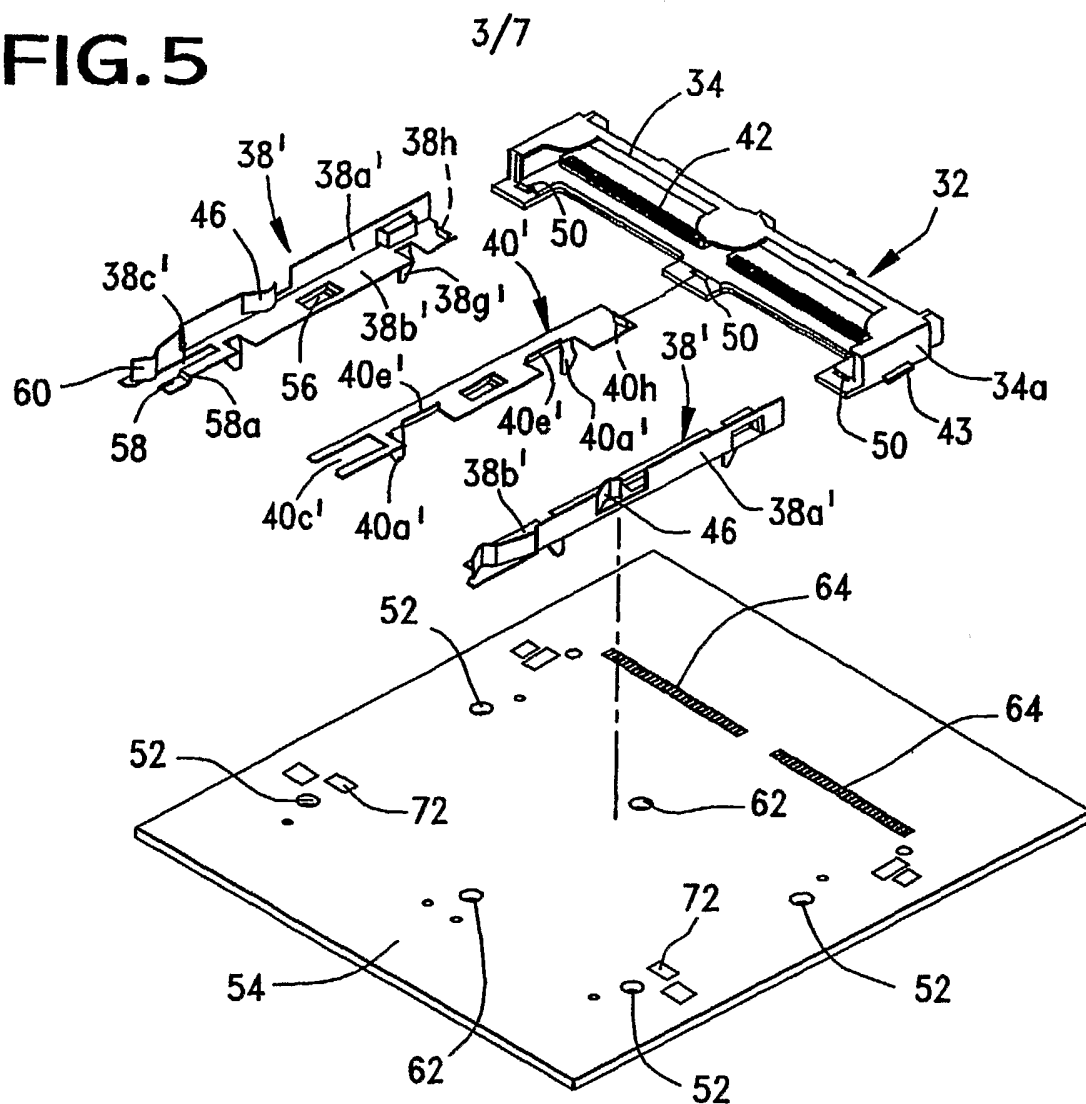
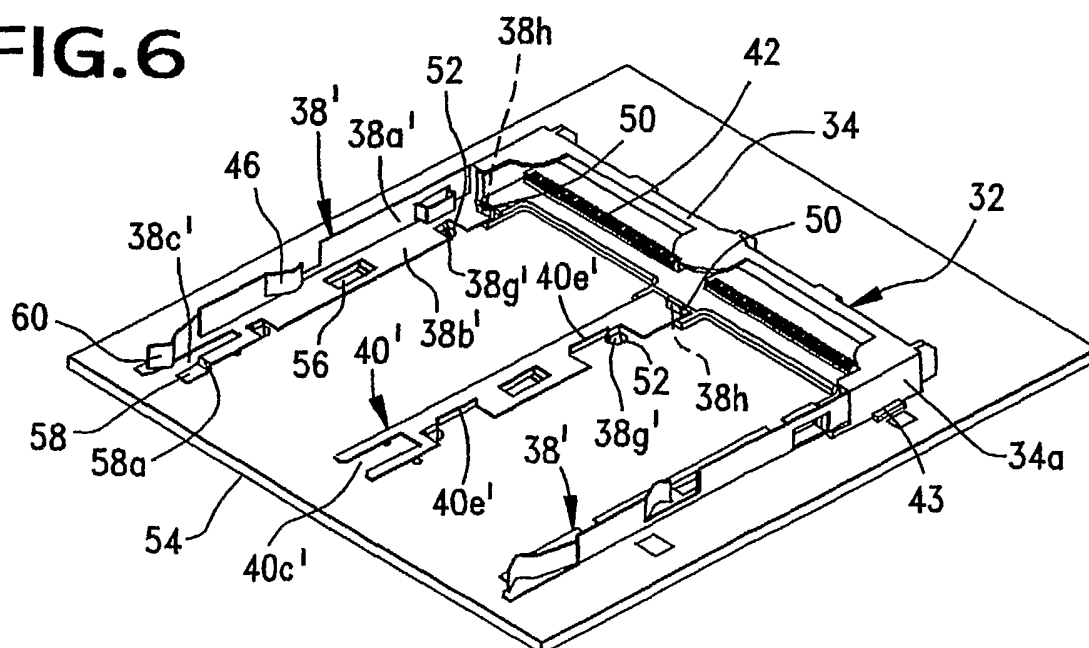


FIG.6



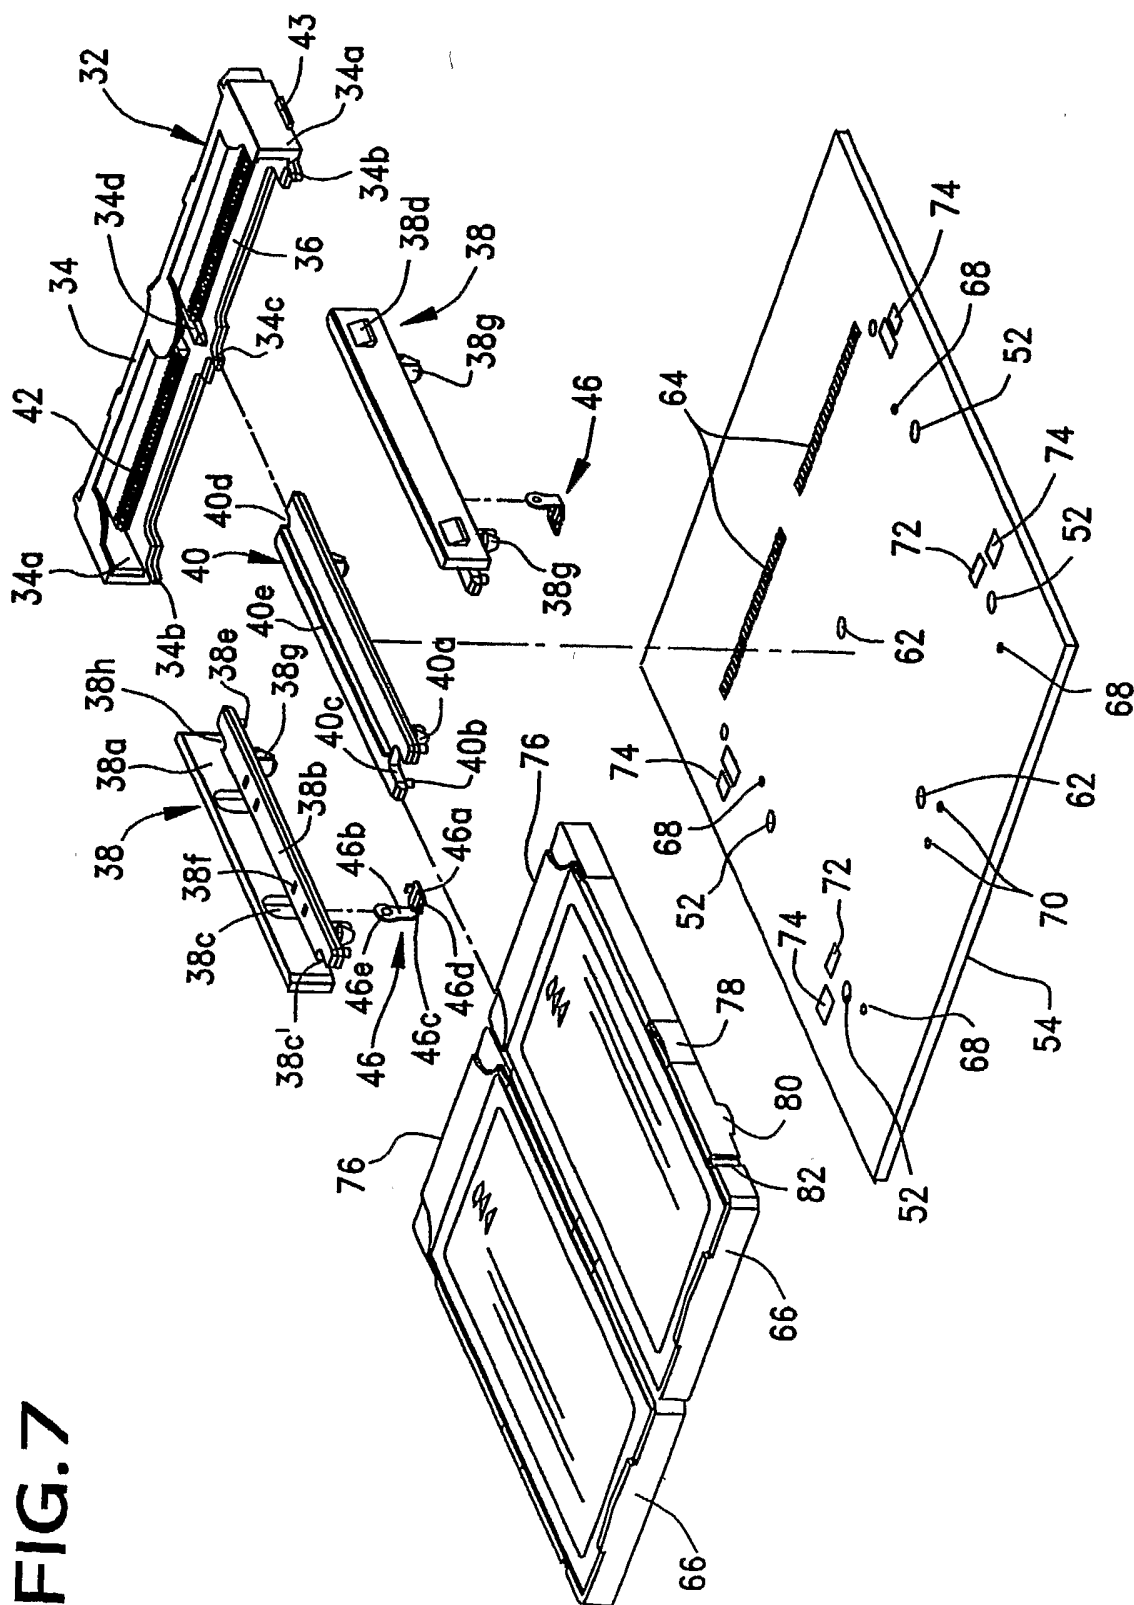


FIG. 7

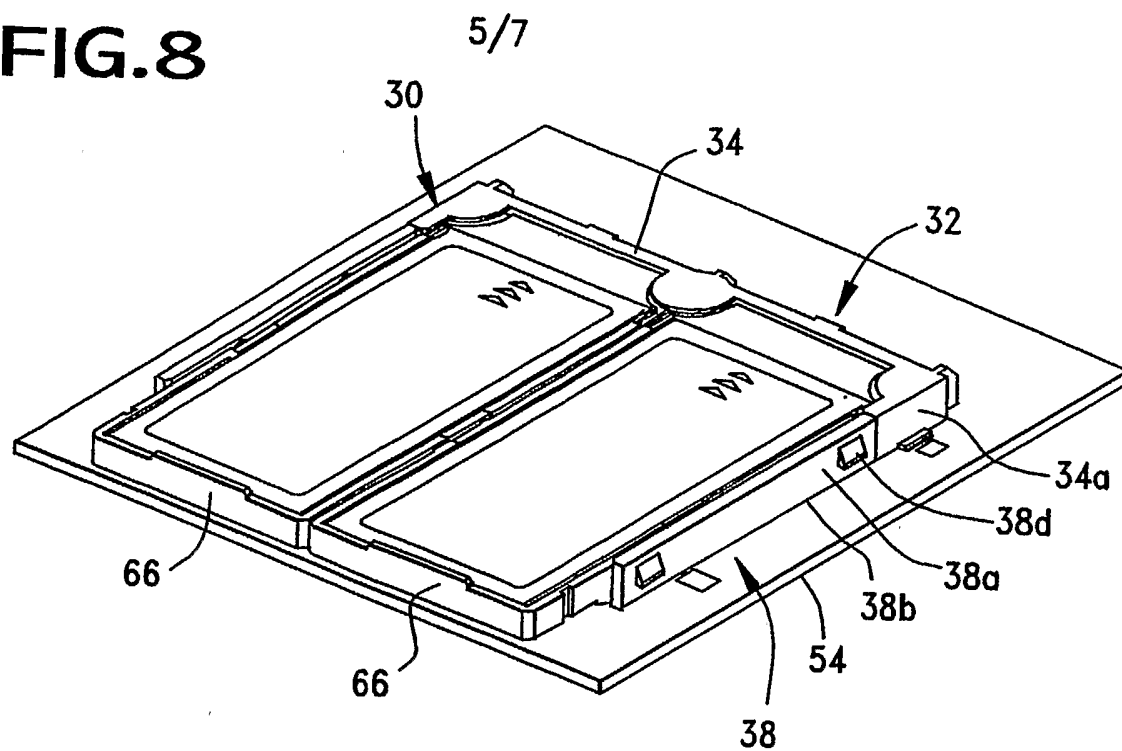
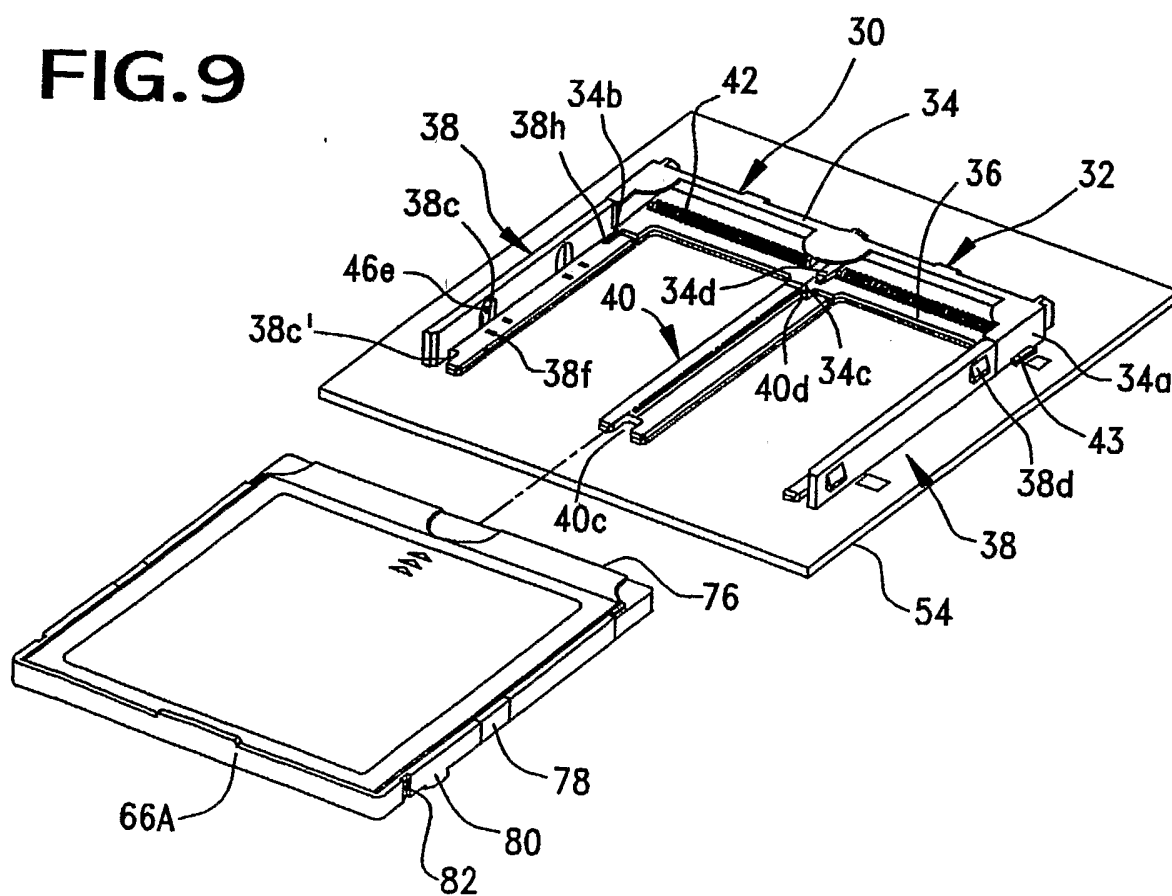
FIG.8**FIG.9**

FIG. 10

6/7


**FIG. 11**

FIG. 12

7/7





FIG. 13

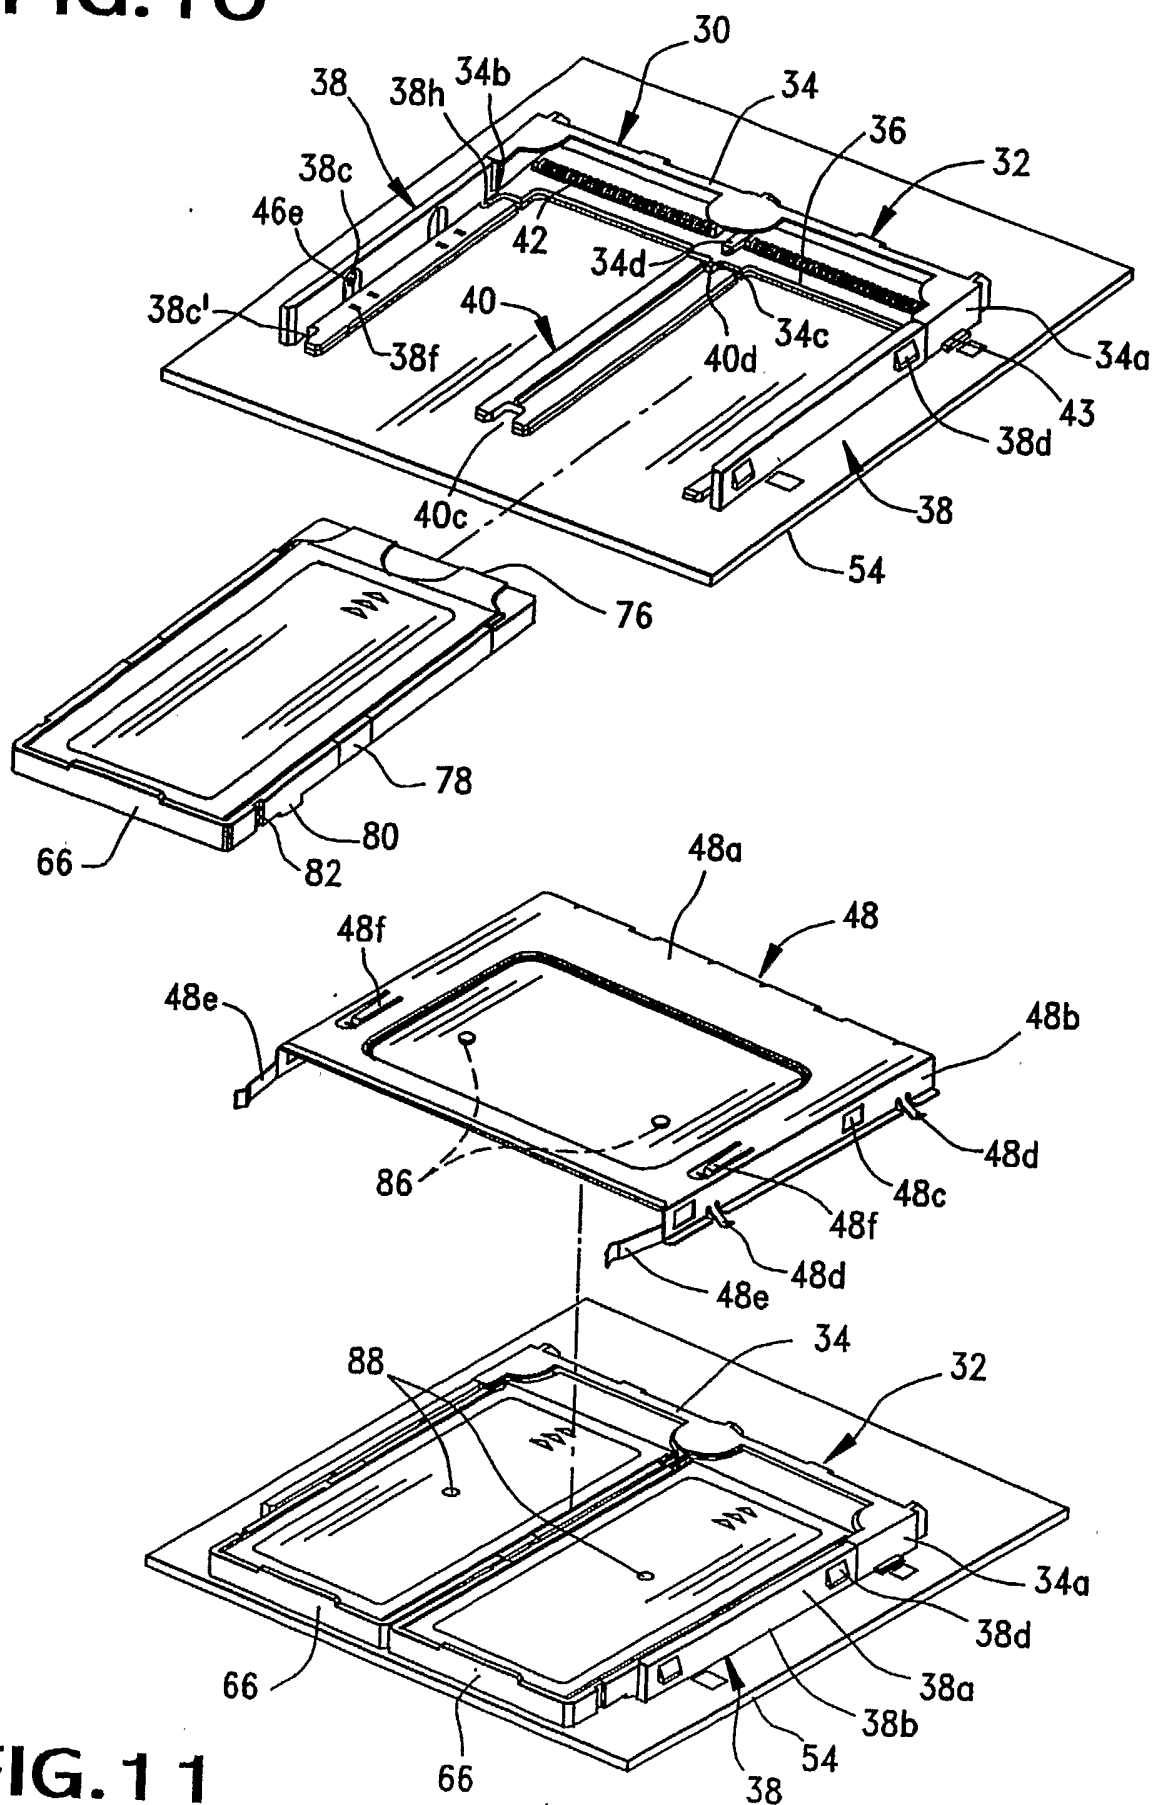

INTERNATIONAL SEARCH REPORT

International Application No

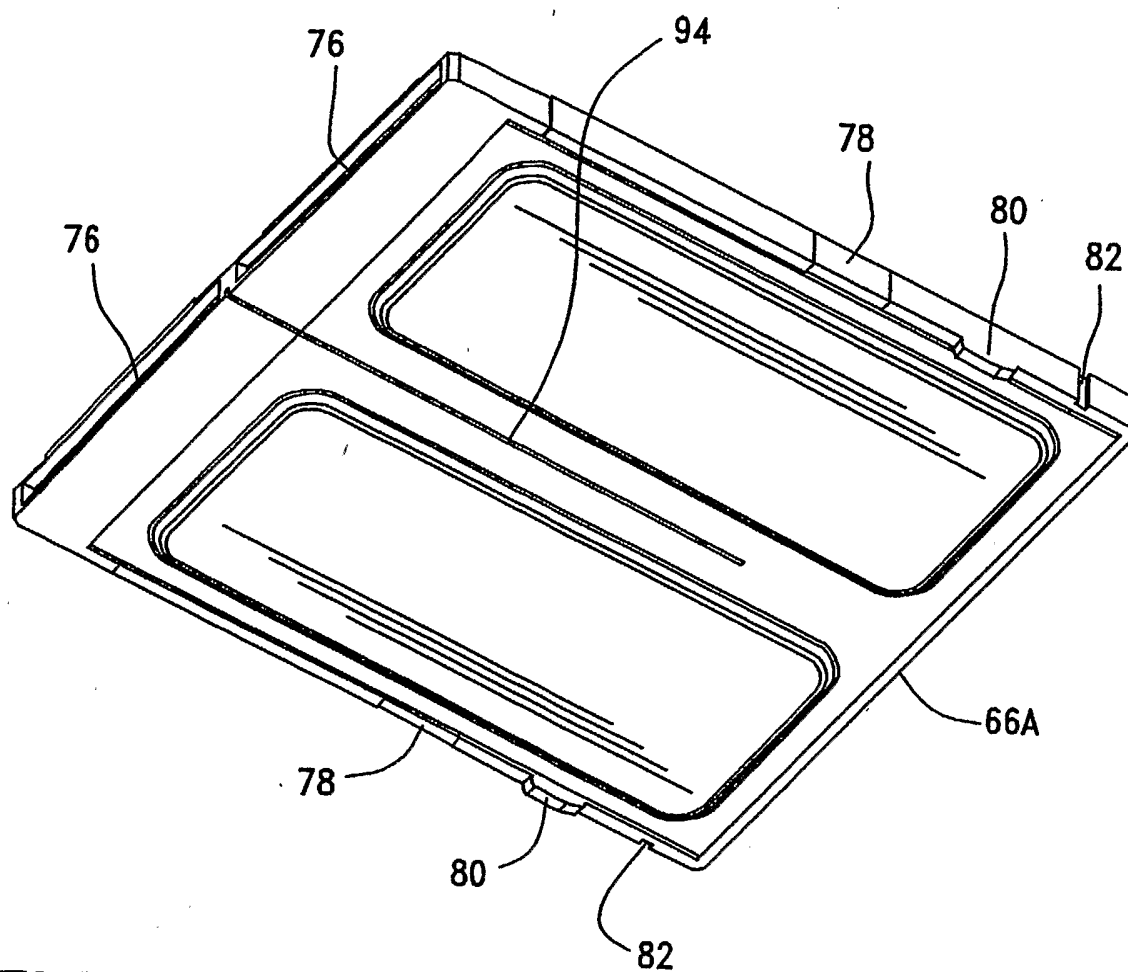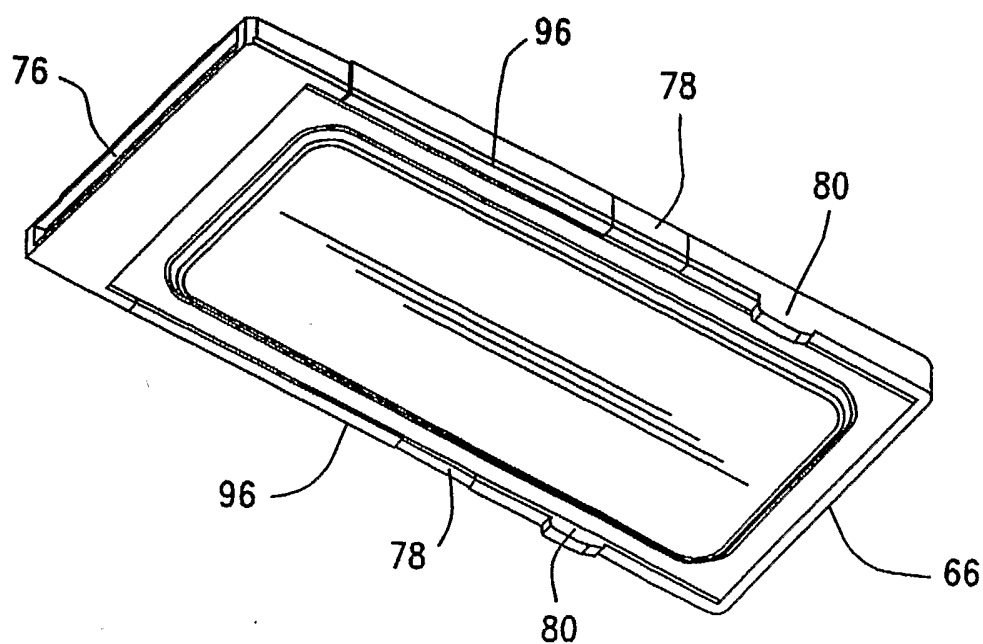PCT/US2004/016079

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06K13/08 G06K7/00 H01R13/635 H05K5/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06K H01R H05K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 219 231 B1 (NABETANI HITOSHI ET AL) 17 April 2001 (2001-04-17)	1,2,8,9
Y	column 1, lines 50-63 column 15, lines 1-56 figures 22,24	3,4,6, 10-14
Y	US 2002/132527 A1 (ITO TOSHIYASU ET AL) 19 September 2002 (2002-09-19) figures 2,3	3,4,6, 10-14
A	DE 100 52 025 A (ORGA KARTENSYSTEME GMBH) 25 April 2002 (2002-04-25) abstract; figures 1,2	5,7
A	US 6 137 710 A (YAJIMA TOSHIO ET AL) 24 October 2000 (2000-10-24) abstract; figures 3,5	5,7



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 October 2004

Date of mailing of the international search report

18/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Koegler, L

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US2004/016079

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6219231	B1	17-04-2001	JP 3513204 B2	31-03-2004
			JP 7239923 A	12-09-1995
			JP 7282207 A	27-10-1995
			US 5889649 A	30-03-1999
			US 2002109967 A1	15-08-2002
			US 2001009501 A1	26-07-2001
US 2002132527	A1	19-09-2002	JP 3431608 B2	28-07-2003
			JP 2002270287 A	20-09-2002
DE 10052025	A	25-04-2002	DE 10052025 A1	25-04-2002
US 6137710	A	24-10-2000	JP 10302030 A	13-11-1998
			US 6002605 A	14-12-1999