

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 August 2006 (24.08.2006)

PCT

(10) International Publication Number
WO 2006/088646 A1

(51) International Patent Classification:
C08L 83/04 (2006.01) **B32B 25/20** (2006.01)

(21) International Application Number:
PCT/US2006/003536

(22) International Filing Date: 1 February 2006 (01.02.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/653,306 16 February 2005 (16.02.2005) US

(71) Applicants (for all designated States except US): **DOW CORNING CORPORATION** [US/US]; 2200 West Salzburg Road, Midland, Michigan 48686-0994 (US). **DOW CORNING TORAY CO., LTD.** [JP/JP]; 4TH FLOOR, AIG BUILDING, 1-1-3, Marunouchi, Chiyoda-ku, 100-0005 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BAILEY, Debbie** [US/US]; 1636 Avon Street, Saginaw, Michigan 48602 (US). **KATSOULIS, Dimitris, Elias** [US/US]; 5810 Wildflower Circle, Midland, Michigan 48642 (US). **SUTO, Michitaka** [JP/JP]; 2-5-1-3- Kozu, Odawara, Kanagawa, 256-0812 (JP). **ZHU, Bizhong** [CN/US]; 1212 Marriett Court, Midland, Michigan 48640 (US).

(74) Agent: **MILCO, Larry, A.**; PATENT DEPARTMENT-MAIL CO1232, 2200 West Salzburg Road, Midland, Michigan 48686-0994 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REINFORCED SILICONE RESIN FILM AND METHOD OF PREPARING SAME

(57) Abstract: A method of preparing a reinforced silicone resin film, the method comprising the steps of impregnating a fiber reinforcement in a hydrosilylation-curable silicone composition comprising a silicone resin, and heating the impregnated fiber reinforcement at a temperature sufficient to cure the silicone resin, wherein the reinforced silicone resin film comprises from 10 to 99% (w/w) of the cured silicone resin and the film has a thickness of from 15 to 500 μm ; and a reinforced silicone resin film prepared according to the method.



WO 2006/088646 A1

REINFORCED SILICONE RESIN FILM AND METHOD OF PREPARING SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] None

FIELD OF THE INVENTION

[0002] The present invention relates to a method of preparing a reinforced silicone resin film and more particularly to a method comprising impregnating a fiber reinforcement in a hydrosilylation-curable silicone composition comprising a silicone resin, and heating the impregnated fiber reinforcement to cure the silicone resin. The present invention also relates to a reinforced silicone resin film prepared according to the method.

BACKGROUND OF THE INVENTION

[0003] Silicone resins are useful in a variety of applications by virtue of their unique combination of properties, including high thermal stability, good moisture resistance, excellent flexibility, high oxygen resistance, low dielectric constant, and high transparency. For example, silicone resins are widely used as protective or dielectric coatings in the automotive, electronic, construction, appliance, and aerospace industries.

[0004] Although silicone resin coatings can be used to protect, insulate, or bond a variety of substrates, free standing silicone resin films have limited utility due to low tear strength, high brittleness, low glass transition temperature, and high coefficient of thermal expansion. Consequently, there is a need for free standing silicone resin films having improved mechanical and thermal properties.

SUMMARY OF THE INVENTION

[0005] The present invention is directed to a method of preparing a reinforced silicone resin film, the method comprising the steps of:

- impregnating a fiber reinforcement in a hydrosilylation-curable silicone composition comprising a silicone resin; and

- heating the impregnated fiber reinforcement at a temperature sufficient to cure the silicone resin; wherein the reinforced silicone resin film comprises from 10 to 99% (w/w) of the cured silicone resin and the film has a thickness of from 15 to 500 μm .

[0006] The present invention is also directed to a reinforced silicone resin film prepared according to the aforementioned method.

[0007] The reinforced silicone resin film of the present invention has low coefficient of thermal expansion, high tensile strength, and high modulus compared to an un-reinforced silicone resin film prepared from the same silicone composition. Also, although the reinforced and un-reinforced silicone resin films have comparable glass transition temperatures, the reinforced film exhibits a much smaller change in modulus in the temperature range corresponding to the glass transition.

[0008] The reinforced silicone resin film of the present invention is useful in applications requiring films having high thermal stability, flexibility, mechanical strength, and transparency. For example, the silicone resin film can be used as an integral component of flexible displays, solar cells, flexible electronic boards, touch screens, fire-resistant wallpaper, and impact-resistant windows. The film is also a suitable substrate for transparent or nontransparent electrodes.

DETAILED DESCRIPTION OF THE INVENTION

[0009] As used herein, the term “free of aliphatic unsaturation” means the hydrocarbyl or halogen-substituted hydrocarbyl group does not contain an aliphatic carbon-carbon double bond or carbon-carbon triple bond. Also, the term “mol% of the groups R^2 in the silicone resin are alkenyl” is defined as the ratio of the number of moles of silicon-bonded alkenyl groups in the silicone resin to the total number of moles of the groups R^2 in the resin, multiplied by 100. Further, the term “mol% of the groups R^4 in the organohydrogenpolysiloxane resin are organosilylalkyl” is defined as the ratio of the number of moles of silicon-bonded organosilylalkyl groups in the silicone resin to the total number of moles of the groups R^4 in the resin, multiplied by 100. Still further, the term “mol% of the groups R^5 in the silicone resin are hydrogen” is defined as the ratio of the number of moles of silicon-bonded hydrogen atoms in the silicone resin to the total number of moles of the groups R^5 in the resin, multiplied by 100.

[0010] A method of preparing a reinforced silicone resin film according to the present invention comprises the steps of:

impregnating a fiber reinforcement in a hydrosilylation-curable silicone composition comprising a silicone resin; and

heating the impregnated fiber reinforcement at a temperature sufficient to cure the silicone resin; wherein the reinforced silicone resin film comprises from 10 to 99% (w/w) of the cured silicone resin and the film has a thickness of from 15 to 500 μm .

[0011] In the first step of the method of preparing a reinforced silicone resin film, a fiber reinforcement is impregnated in a hydrosilylation-curable silicone composition comprising a silicone resin.

[0012] The hydrosilylation-curable silicone composition can be any hydrosilylation-curable silicone composition comprising a silicone resin. Such compositions typically contain a silicone resin having silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms, a cross-linking agent having silicon-bonded hydrogen atoms or silicon-bonded alkenyl groups capable of reacting with the silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms in the resin, and a hydrosilylation catalyst. The silicone resin is typically a copolymer containing T and/or Q siloxane units in combination with M and/or D siloxane units. Moreover, the silicone resin can be a rubber-modified silicone resin, described below for the fifth and sixth embodiments of the silicone composition.

[0013] According to a first embodiment, the hydrosilylation-curable silicone composition comprises (A) a silicone resin having the formula $(\text{R}^1\text{R}^2_2\text{SiO}_{1/2})_w(\text{R}^2_2\text{SiO}_{2/2})_x(\text{R}^1\text{SiO}_{3/2})_y(\text{SiO}_{4/2})_z$ (I), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin has an average of at least two silicon-bonded alkenyl groups per molecule; (B) an organosilicon compound having an average of at least two silicon-bonded hydrogen atoms per molecule in an amount sufficient to cure the silicone resin; and (C) a catalytic amount of a hydrosilylation catalyst.

[0014] Component (A) is at least one silicone resin having the formula $(\text{R}^1\text{R}^2_2\text{SiO}_{1/2})_w(\text{R}^2_2\text{SiO}_{2/2})_x(\text{R}^1\text{SiO}_{3/2})_y(\text{SiO}_{4/2})_z$ (I), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin has an average of at least two silicon-bonded alkenyl groups per molecule.

[0015] The hydrocarbyl and halogen-substituted hydrocarbyl groups represented by R^1 are free of aliphatic unsaturation and typically have from 1 to 10 carbon atoms, alternatively from 1 to 6 carbon atoms. Acyclic hydrocarbyl and halogen-substituted hydrocarbyl groups containing at least 3 carbon atoms can have a branched or unbranched structure. Examples of hydrocarbyl groups represented by R^1 include, but are not limited to, alkyl, such as methyl, ethyl, propyl, 1-methylethyl, butyl, 1-methylpropyl, 2-methylpropyl, 1,1-dimethylethyl, pentyl, 1-methylbutyl, 1-ethylpropyl, 2-methylbutyl, 3-methylbutyl, 1,2-dimethylpropyl, 2,2-dimethylpropyl, hexyl, heptyl, octyl, nonyl, and decyl; cycloalkyl, such as cyclopentyl, cyclohexyl, and methylcyclohexyl; aryl, such as phenyl and naphthyl; alkaryl, such as tolyl and xylyl; and aralkyl, such as benzyl and phenethyl. Examples of halogen-substituted hydrocarbyl groups represented by R^1 include, but are not limited to, 3,3,3-trifluoropropyl, 3-chloropropyl, chlorophenyl, dichlorophenyl, 2,2,2-trifluoroethyl, 2,2,3,3-tetrafluoropropyl, and 2,2,3,3,4,4,5,5-octafluoropentyl.

[0016] The alkenyl groups represented by R^2 , which may be the same or different, typically have from 2 to about 10 carbon atoms, alternatively from 2 to 6 carbon atoms, and are exemplified by, but not limited to, vinyl, allyl, butenyl, hexenyl, and octenyl.

[0017] In the formula (I) of the silicone resin, the subscripts w, x, y, and z are mole fractions. The subscript w typically has a value of from 0 to 0.8, alternatively from 0.02 to 0.75, alternatively from 0.05 to 0.3; the subscript x typically has a value of from 0 to 0.6, alternatively from 0 to 0.45, alternatively from 0 to 0.25; the subscript y typically has a value of from 0 to 0.99, alternatively from 0.25 to 0.8, alternatively from 0.5 to 0.8; the subscript z typically has a value of from 0 to 0.35, alternatively from 0 to 0.25, alternatively from 0 to 0.15. Also, the ratio $y+z/(w+x+y+z)$ is typically from 0.2 to 0.99, alternatively from 0.5 to 0.95, alternatively from 0.65 to 0.9. Further, the ratio $w+x/(w+x+y+z)$ is typically from 0.01 to 0.80, alternatively from 0.05 to 0.5, alternatively from 0.1 to 0.35.

[0018] Typically at least 50 mol%, alternatively at least 65 mol%, alternatively at least 80 mol% of the groups R^2 in the silicone resin are alkenyl.

[0019] The silicone resin typically has a number-average molecular weight (M_n) of from 500 to 50,000, alternatively from 500 to 10,000, alternatively 1,000 to 3,000, where the molecular weight is determined by gel permeation chromatography employing a low angle laser light scattering detector, or a refractive index detector and silicone resin (MQ) standards.

[0020] The viscosity of the silicone resin at 25 °C is typically from 0.01 to 100,000 Pa·s, alternatively from 0.1 to 10,000 Pa·s, alternatively from 1 to 100 Pa·s.

[0021] The silicone resin typically contains less than 10% (w/w), alternatively less than 5% (w/w), alternatively less than 2% (w/w), of silicon-bonded hydroxy groups, as determined by ^{29}Si NMR.

[0022] The silicone resin contains $\text{R}^1\text{SiO}_{3/2}$ units (i.e., T units) and/or $\text{SiO}_{4/2}$ units (i.e., Q units) in combination with $\text{R}^1\text{R}^2_2\text{SiO}_{1/2}$ units (i.e., M units) and/or $\text{R}^2_2\text{SiO}_{2/2}$ units (i.e., D units), where R^1 and R^2 are as described and exemplified above. For example, the silicone resin can be a DT resin, an MT resin, an MDT resin, a DTQ resin, and MTQ resin, and MDTQ resin, a DQ resin, an MQ resin, a DTQ resin, an MTQ resin, or an MDQ resin.

[0023] Examples of silicone resins include, but are not limited to, resins having the following formulae:

$(\text{Vi}_2\text{MeSiO}_{1/2})_{0.25}(\text{PhSiO}_{3/2})_{0.75}$, $(\text{ViMe}_2\text{SiO}_{1/2})_{0.25}(\text{PhSiO}_{3/2})_{0.75}$,

$(\text{ViMe}_2\text{SiO}_{1/2})_{0.25}(\text{MeSiO}_{3/2})_{0.25}(\text{PhSiO}_{3/2})_{0.50}$, $(\text{ViMe}_2\text{SiO}_{1/2})_{0.15}(\text{PhSiO}_{3/2})_{0.75}$

$(\text{SiO}_{4/2})_{0.1}$, and $(\text{Vi}_2\text{MeSiO}_{1/2})_{0.15}(\text{ViMe}_2\text{SiO}_{1/2})_{0.1}(\text{PhSiO}_{3/2})_{0.75}$, where Me is methyl, Vi is vinyl, Ph is phenyl, and the numerical subscripts outside the parenthesis denote mole fractions. Also, in the preceding formulae, the sequence of units is unspecified.

[0024] Component (A) can be a single silicone resin or a mixture comprising two or more different silicone resins, each as described above.

[0025] Methods of preparing silicone resins are well known in the art; many of these resins are commercially available. Silicone resins are typically prepared by cohydrolyzing the appropriate mixture of chlorosilane precursors in an organic solvent, such as toluene. For example, a silicone resin consisting essentially of $\text{R}^1\text{R}^2_2\text{SiO}_{1/2}$ units and $\text{R}^1\text{SiO}_{3/2}$ units can be prepared by cohydrolyzing a compound having the formula $\text{R}^1\text{R}^2_2\text{SiCl}$ and a compound having the formula R^1SiCl_3 in toluene, where R^1 and R^2 are as defined and exemplified above. The aqueous hydrochloric acid and silicone hydrolyzate are separated and the hydrolyzate is washed with water to remove residual acid and heated in the presence of a mild condensation catalyst to “body” the resin to the requisite viscosity. If desired, the resin can be further treated with a condensation catalyst in an organic solvent to reduce the content of silicon-bonded hydroxy groups. Alternatively, silanes containing hydrolysable

groups other than chloro, such $-\text{Br}$, $-\text{I}$, $-\text{OCH}_3$, $-\text{OC}(\text{O})\text{CH}_3$, $-\text{N}(\text{CH}_3)_2$, NHCOCH_3 , and $-\text{SCH}_3$, can be utilized as starting materials in the cohydrolysis reaction. The properties of the resin products depend on the types of silanes, the mole ratio of silanes, the degree of condensation, and the processing conditions.


[0026] Component (B) is at least one organosilicon compound having an average of at least two silicon-bonded hydrogen atoms per molecule in an amount sufficient to cure the silicone resin of component (A).


[0027] The organosilicon compound has an average of at least two silicon-bonded hydrogen atoms per molecule, alternatively at least three silicon-bonded hydrogen atoms per molecule. It is generally understood that cross-linking occurs when the sum of the average number of alkenyl groups per molecule in component (A) and the average number of silicon-bonded hydrogen atoms per molecule in component (B) is greater than four.

[0028] The organosilicon compound can be an organohydrogensilane or an organohydrogensiloxane. The organohydrogensilane can be a monosilane, disilane, trisilane, or polysilane. Similarly, the organohydrogensiloxane can be a disiloxane, trisiloxane, or polysiloxane. The structure of the organosilicon compound can be linear, branched, cyclic, or resinous. Cyclosilanes and cyclosiloxanes typically have from 3 to 12 silicon atoms, alternatively from 3 to 10 silicon atoms, alternatively from 3 to 4 silicon atoms. In acyclic polysilanes and polysiloxanes, the silicon-bonded hydrogen atoms can be located at terminal, pendant, or at both terminal and pendant positions.

[0029] Examples of organohydrogensilanes include, but are not limited to, diphenylsilane, 2-chloroethylsilane, bis[(p-dimethylsilyl)phenyl]ether, 1,4-dimethyldisilylethane, 1,3,5-tris(dimethylsilyl)benzene, 1,3,5-trimethyl-1,3,5-trisilane, poly(methylsilylene)phenylene, and poly(methylsilylene)methylene.


[0030] The organohydrogensilane can also have the formula $\text{HR}^1_2\text{Si-R}^3\text{-SiR}^1_2\text{H}$, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, and R^3 is a hydrocarbylene group free of aliphatic unsaturation having a formula selected from:

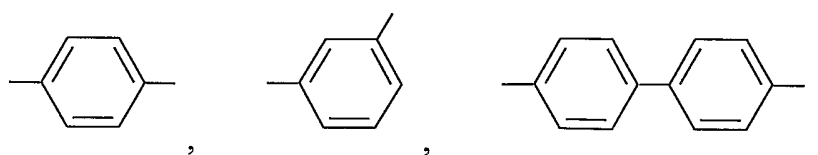


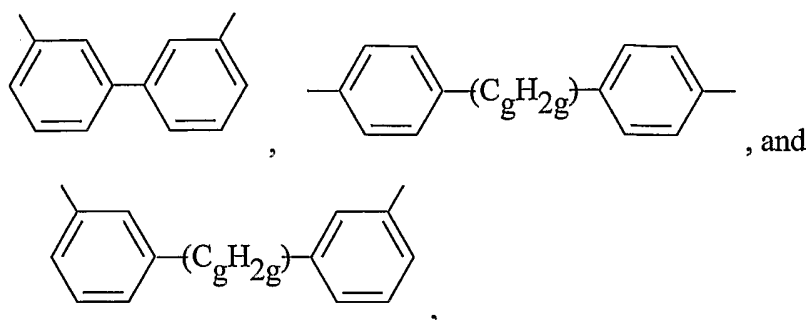

wherein g is from 1 to 6. The hydrocarbyl and halogen-substituted hydrocarbyl groups represented by R^1 are as defined and exemplified above for the silicone resin of component (A).

[0031] Examples of organohydrogensilanes having the formula $HR^1_2Si-R^3-SiR^1_2H$, wherein R^1 and R^3 are as described and exemplified above include, but are not limited to, silanes having the following formulae:



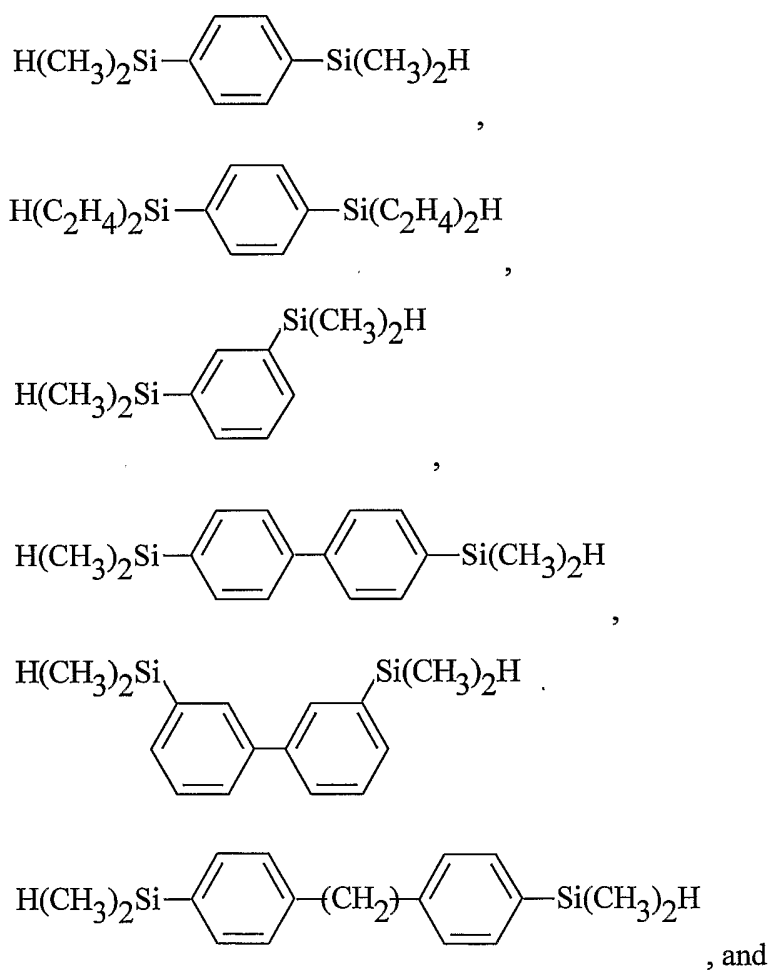


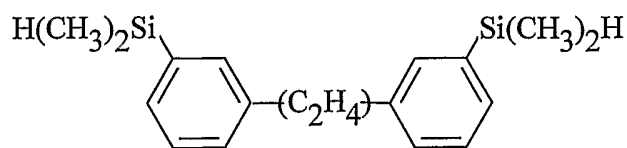


[0032] Examples of organohydrogensiloxanes include, but are not limited to, 1,1,3,3-tetramethyldisiloxane, 1,1,3,3-tetraphenyldisiloxane, phenyltris(dimethylsiloxy)silane, 1,3,5-trimethylcyclotrisiloxane, a trimethylsiloxy-terminated poly(methylhydrogensiloxane), a trimethylsiloxy-terminated poly(dimethylsiloxane/methylhydrogensiloxane), a dimethylhydrogensiloxy-terminated poly(methylhydrogensiloxane), and a resin consisting essentially of $\text{HMe}_2\text{SiO}_{1/2}$ units, $\text{Me}_3\text{SiO}_{1/2}$ units, and $\text{SiO}_{4/2}$ units, wherein Me is methyl.

[0033] The organohydrogensiloxane can also be an organohydrogenpolysiloxane resin having the formula $(\text{R}^1\text{R}^4_2\text{SiO}_{1/2})_w(\text{R}^4_2\text{SiO}_{2/2})_x(\text{R}^1\text{SiO}_{3/2})_y(\text{SiO}_{4/2})_z$ (II), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^4 is R^1 or an organosilylalkyl group having at least one silicon-bonded hydrogen atom, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided at least 50 mol% of the groups R^4 are organosilylalkyl.

[0034] The hydrocarbyl and halogen-substituted hydrocarbyl groups represented by R^1 are as described and exemplified above for the silicone resin of component (A). Examples of organosilylalkyl groups represented by R^4 include, but are not limited to, groups having the following formulae:





,
 $-\text{CH}_2\text{CH}_2\text{SiMe}_2\text{H}$,
 $-\text{CH}_2\text{CH}_2\text{SiMe}_2\text{C}_n\text{H}_{2n}\text{SiMe}_2\text{H}$,
 $-\text{CH}_2\text{CH}_2\text{SiMe}_2\text{C}_n\text{H}_{2n}\text{SiMePhH}$,
 $-\text{CH}_2\text{CH}_2\text{SiMePhH}$,
 $-\text{CH}_2\text{CH}_2\text{SiPh}_2\text{H}$,
 $-\text{CH}_2\text{CH}_2\text{SiMePhC}_n\text{H}_{2n}\text{SiPh}_2\text{H}$,
 $-\text{CH}_2\text{CH}_2\text{SiMePhC}_n\text{H}_{2n}\text{SiMe}_2\text{H}$,
 $-\text{CH}_2\text{CH}_2\text{SiMePhOSiMePhH}$, and
 $-\text{CH}_2\text{CH}_2\text{SiMePhOSiPh(OSiMePhH)}_2$, where Me is methyl, Ph is phenyl, and the subscript n has a value of from 2 to 10.

[0035] In the formula (II) of the organohydrogenpolysiloxane resin, the subscripts w, x, y, and z are mole fractions. The subscript w typically has a value of from 0 to 0.8, alternatively from 0.02 to 0.75, alternatively from 0.05 to 0.3; the subscript x typically has a value of from 0 to 0.6, alternatively from 0 to 0.45, alternatively from 0 to 0.25; the subscript y typically has a value of from 0 to 0.99, alternatively from 0.25 to 0.8, alternatively from 0.5 to 0.8; the subscript z typically has a value of from 0 to 0.35, alternatively from 0 to 0.25, alternatively from 0 to 0.15. Also, the ratio $y+z/(w+x+y+z)$ is typically from 0.2 to 0.99, alternatively from 0.5 to 0.95, alternatively from 0.65 to 0.9. Further, the ratio $w+x/(w+x+y+z)$ is typically from 0.01 to 0.80, alternatively from 0.05 to 0.5, alternatively from 0.1 to 0.35.






[0036] Typically, at least 50 mol%, alternatively at least 65 mol%, alternatively at least 80 mol% of the groups R^4 in the organohydrogenpolysiloxane resin are organosilylalkyl groups having at least one silicon-bonded hydrogen atom.

[0037] The organohydrogenpolysiloxane resin typically has a number-average molecular weight (M_n) of from 500 to 50,000, alternatively from 500 to 10,000, alternatively 1,000 to 3,000, where the molecular weight is determined by gel permeation chromatography employing a low angle laser light scattering detector, or a refractive index detector and silicone resin (MQ) standards.

[0038] The organohydrogenpolysiloxane resin typically contains less than 10% (w/w), alternatively less than 5% (w/w), alternatively less than 2% (w/w), of silicon-bonded hydroxy groups, as determined by ^{29}Si NMR.

[0039] The organohydrogenpolysiloxane resin contains $\text{R}^1\text{SiO}_{3/2}$ units (i.e., T units) and/or $\text{SiO}_{4/2}$ units (i.e., Q units) in combination with $\text{R}^1\text{R}^4_2\text{SiO}_{1/2}$ units (i.e., M units) and/or $\text{R}^4_2\text{SiO}_{2/2}$ units (i.e., D units), where R^1 and R^4 are as described and exemplified above. For example, the organohydrogenpolysiloxane resin can be a DT resin, an MT resin, an MDT resin, a DTQ resin, and MTQ resin, and MDTQ resin, a DQ resin, an MQ resin, a DTQ resin, an MTQ resin, or an MDQ resin.

[0040] Examples of organohydrogenpolysiloxane resins include, but are not limited to, resins having the following formulae:



$\text{Me}_2\text{SiO}_{1/2})_{0.06}(\text{PhSiO}_{3/2})_{0.86}$, where Me is methyl, Ph is phenyl, C_6H_4 denotes a para-phenylene group, and the numerical subscripts outside the parenthesis denote mole fractions. Also, in the preceding formulae, the sequence of units is unspecified.

[0041] Component (B) can be a single organosilicon compound or a mixture comprising two or more different organosilicon compounds, each as described above. For example, component (B) can be a single organohydrogensilane, a mixture of two different organohydrogensilanes, a single organohydrogensiloxane, a mixture of two different organohydrogensiloxanes, or a mixture of an organohydrogensilane and an organohydrogensiloxane. In particular, component (B) can be a mixture comprising at least 0.5% (w/w), alternatively at least 50% (w/w), alternatively at least 75% (w/w), based on the total weight of component (B), of the organohydrogenpolysiloxane resin having the formula

(II), and an organohydrogensilane and/or organohydrogensiloxane, the latter different from the organohydrogenpolysiloxane resin.

[0042] The concentration of component (B) is sufficient to cure (cross-link) the silicone resin of component (A). The exact amount of component (B) depends on the desired extent of cure, which generally increases as the ratio of the number of moles of silicon-bonded hydrogen atoms in component (B) to the number of moles of alkenyl groups in component (A) increases. The concentration of component (B) is typically sufficient to provide from 0.4 to 2 moles of silicon-bonded hydrogen atoms, alternatively from 0.8 to 1.5 moles of silicon-bonded hydrogen atoms, alternatively from 0.9 to 1.1 moles of silicon-bonded hydrogen atoms, per mole of alkenyl groups in component (A).

[0043] Methods of preparing organosilicon compounds containing silicon-bonded hydrogen atoms are well known in the art. For example, organohydrogensilanes can be prepared by reaction of Grignard reagents with alkyl or aryl halides. In particular, organohydrogensilanes having the formula $\text{HR}^1_2\text{Si-R}^3\text{-SiR}^1_2\text{H}$ can be prepared by treating an aryl dihalide having the formula R^3X_2 with magnesium in ether to produce the corresponding Grignard reagent and then treating the Grignard reagent with a chlorosilane having the formula HR^1_2SiCl , where R^1 and R^3 are as described and exemplified above.

[0044] Methods of preparing organohydrogensiloxanes, such as the hydrolysis and condensation of organohalosilanes, are also well known in the art.

[0045] In addition, the organohydrogenpolysiloxane resin having the formula (II) can be prepared by reacting (a) a silicone resin having the formula $(\text{R}^1\text{R}^2_2\text{SiO}_{1/2})_w(\text{R}^2_2\text{SiO}_{2/2})_x(\text{R}^1\text{SiO}_{3/2})_y(\text{SiO}_{4/2})_z$ (I) with (b) an organosilicon compound having an average of from two to four silicon-bonded hydrogen atoms per molecule and a molecular weight less than 1,000, in the presence of (c) a hydrosilylation catalyst and, optionally, (d) an organic solvent, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin (a) has an average of at least two silicon-bonded alkenyl groups per molecule, and the mole ratio of silicon-bonded hydrogen atoms in (b) to alkenyl groups in (a) is from 1.5 to 5.

[0046] Silicone resin (a) is as described and exemplified above for component (A) of the silicone composition. Silicone resin (a) can be the same as or different than the silicone resin used as component (A) in the hydrosilylation-curable silicone composition.

[0047] Organosilicon compound (b) is at least one organosilicon compound having an average of from two to four silicon-bonded hydrogen atoms per molecule. Alternatively, the organosilicon compound has an average of from two to three silicon-bonded hydrogen atoms per molecule. The organosilicon compound typically has a molecular weight less than 1,000, alternatively less than 750, alternatively less than 500. The silicon-bonded organic groups in the organosilicon compound are selected from hydrocarbyl and halogen-substituted hydrocarbyl groups, both free of aliphatic unsaturation, which are as described and exemplified above for R^1 in the formula of the silicone resin of component (A).

[0048] Organosilicon compound (b) can be an organohydrogensilane or an organohydrogensiloxane. The organohydrogensilane can be a monosilane, disilane, trisilane, or polysilane. Similarly, the organohydrogensiloxane can be a disiloxane, trisiloxane, or polysiloxane. The structure of the organosilicon compound can be linear, branched, or cyclic. Cyclosilanes and cyclosiloxanes typically have from 3 to 12 silicon atoms, alternatively from 3 to 10 silicon atoms, alternatively from 3 to 4 silicon atoms. In acyclic polysilanes and polysiloxanes, the silicon-bonded hydrogen atoms can be located at terminal, pendant, or at both terminal and pendant positions.

[0049] Examples of organohydrogensilanes include, but are not limited to, diphenylsilane, 2-chloroethylsilane, bis[(p-dimethylsilyl)phenyl]ether, 1,4-dimethyldisilylthane, 1,3,5-tris(dimethylsilyl)benzene, and 1,3,5-trimethyl-1,3,5-trisilane. The organohydrogensilane can also have the formula $HR^1_2Si-R^3-SiR^1_2H$, wherein R^1 and R^3 are as described and exemplified above.

[0050] Examples of organohydrogensiloxanes include, but are not limited to, 1,1,3,3-tetramethyldisiloxane, 1,1,3,3-tetraphenyldisiloxane, phenyltris(dimethylsiloxy)silane, and 1,3,5-trimethylcyclotrisiloxane.

[0051] Organosilicon compound (b) can be a single organosilicon compound or a mixture comprising two or more different organosilicon compounds, each as described above. For example, component (B) can be a single organohydrogensilane, a mixture of two different organohydrogensilanes, a single organohydrogensiloxane, a mixture of two different

organohydrogensiloxanes, or a mixture of an organohydrogensilane and an organohydrogensiloxane.

[0052] Methods of preparing organohydrogensilanes, such as the reaction of Grignard reagents with alkyl or aryl halides, described above, are well known in the art. Similarly, methods of preparing organohydrogensiloxanes, such as the hydrolysis and condensation of organohalosilanes, are well known in the art.

[0053] Hydrosilylation catalyst (c) can be any of the well-known hydrosilylation catalysts comprising a platinum group metal (i.e., platinum, rhodium, ruthenium, palladium, osmium and iridium) or a compound containing a platinum group metal. Preferably, the platinum group metal is platinum, based on its high activity in hydrosilylation reactions.

[0054] Hydrosilylation catalysts include the complexes of chloroplatinic acid and certain vinyl-containing organosiloxanes disclosed by Willing in U.S. Pat. No. 3,419,593, which is hereby incorporated by reference. A catalyst of this type is the reaction product of chloroplatinic acid and 1,3-diethenyl-1,1,3,3-tetramethyldisiloxane.

[0055] The hydrosilylation catalyst can also be a supported hydrosilylation catalyst comprising a solid support having a platinum group metal on the surface thereof. A supported catalyst can be conveniently separated from the organohydrogenpolysiloxane resin product, for example, by filtering the reaction mixture. Examples of supported catalysts include, but are not limited to, platinum on carbon, palladium on carbon, ruthenium on carbon, rhodium on carbon, platinum on silica, palladium on silica, platinum on alumina, palladium on alumina, and ruthenium on alumina.

[0056] Organic solvent (d) is at least one organic solvent. The organic solvent can be any aprotic or dipolar aprotic organic solvent that does not react with silicone resin (a), organosilicon compound (b), or the organohydrogenpolysiloxane resin under the conditions of the present method, and is miscible with components (a), (b), and the organohydrogenpolysiloxane resin.

[0057] Examples of organic solvents include, but are not limited to, saturated aliphatic hydrocarbons such as n-pentane, hexane, n-heptane, isooctane and dodecane; cycloaliphatic hydrocarbons such as cyclopentane and cyclohexane; aromatic hydrocarbons such as benzene, toluene, xylene and mesitylene; cyclic ethers such as tetrahydrofuran (THF) and dioxane; ketones such as methyl isobutyl ketone (MIBK); halogenated alkanes such as trichloroethane; and halogenated aromatic hydrocarbons such as bromobenzene and

chlorobenzene. Organic solvent (d) can be a single organic solvent or a mixture comprising two or more different organic solvents, each as described above.

[0058] The reaction can be carried out in any standard reactor suitable for hydrosilylation reactions. Suitable reactors include glass and Teflon-lined glass reactors. Preferably, the reactor is equipped with a means of agitation, such as stirring. Also, preferably, the reaction is carried out in an inert atmosphere, such as nitrogen or argon, in the absence of moisture.

[0059] The silicone resin, organosilicon compound, hydrosilylation catalyst, and, optionally, organic solvent, can be combined in any order. Typically, organosilicon compound (b) and hydrosilylation catalyst (c) are combined before the introduction of the silicone resin (a) and, optionally, organic solvent (d).

[0060] The reaction is typically carried out at a temperature of from 0 to 150 °C, alternatively from room temperature ($\sim 23 \pm 2$ °C) to 115 °C. When the temperature is less than 0 °C, the rate of reaction is typically very slow.

[0061] The reaction time depends on several factors, such as the structures of the silicone resin and the organosilicon compound, and the temperature. The time of reaction is typically from 1 to 24 h at a temperature of from room temperature ($\sim 23 \pm 2$ °C) to 150 °C. The optimum reaction time can be determined by routine experimentation using the methods set forth in the Examples section below.

[0062] The mole ratio of silicon-bonded hydrogen atoms in organosilicon compound (b) to alkenyl groups in silicone resin (a) is typically from 1.5 to 5, alternatively from 1.75 to 3, alternatively from 2 to 2.5.

[0063] The concentration of hydrosilylation catalyst (c) is sufficient to catalyze the addition reaction of silicone resin (a) with organosilicon compound (b). Typically, the concentration of hydrosilylation catalyst (c) is sufficient to provide from 0.1 to 1000 ppm of a platinum group metal, alternatively from 1 to 500 ppm of a platinum group metal, alternatively from 5 to 150 ppm of a platinum group metal, based on the combined weight of silicone resin (a) and organosilicon compound (b). The rate of reaction is very slow below 0.1 ppm of platinum group metal. The use of more than 1000 ppm of platinum group metal results in no appreciable increase in reaction rate, and is therefore uneconomical.

[0064] The concentration of organic solvent (d) is typically from 0 to 99% (w/w), alternatively from 30 to 80% (w/w), alternatively from 45 to 60% (w/w), based on the total weight of the reaction mixture.

[0065] The organohydrogenpolysiloxane resin can be used without isolation or purification in the first embodiment of the hydrosilylation-curable silicone composition or the resin can be separated from most of the solvent by conventional methods of evaporation. For example, the reaction mixture can be heated under reduced pressure. Moreover, when the hydrosilylation catalyst used to prepare the organohydrogenpolysiloxane resin is a supported catalyst, described above, the resin can be readily separated from the hydrosilylation catalyst by filtering the reaction mixture. However, when the organohydrogenpolysiloxane resin is not separated from the hydrosilylation catalyst used to prepare the resin, the catalyst may be used as component (C) of the first embodiment of the hydrosilylation-curable silicone composition.

[0066] Component (C) of the hydrosilylation-curable silicone composition is at least one hydrosilylation catalyst that promotes the addition reaction of component (A) with component (B). The hydrosilylation catalyst can be any of the well-known hydrosilylation catalysts comprising a platinum group metal, a compound containing a platinum group metal, or a microencapsulated platinum group metal-containing catalyst. Platinum group metals include platinum, rhodium, ruthenium, palladium, osmium and iridium. Preferably, the platinum group metal is platinum, based on its high activity in hydrosilylation reactions.

[0067] Preferred hydrosilylation catalysts include the complexes of chloroplatinic acid and certain vinyl-containing organosiloxanes disclosed by Willing in U.S. Pat. No. 3,419,593, which is hereby incorporated by reference. A preferred catalyst of this type is the reaction product of chloroplatinic acid and 1,3-diethenyl-1,1,3,3-tetramethyldisiloxane.

[0068] The hydrosilylation catalyst can also be a microencapsulated platinum group metal-containing catalyst comprising a platinum group metal encapsulated in a thermoplastic resin. Compositions containing microencapsulated hydrosilylation catalysts are stable for extended periods of time, typically several months or longer, under ambient conditions, yet cure relatively rapidly at temperatures above the melting or softening point of the thermoplastic resin(s). Microencapsulated hydrosilylation catalysts and methods of preparing them are well known in the art, as exemplified in U.S. Pat. No. 4,766,176 and the references cited therein; and U.S. Pat. No. 5,017,654.

[0069] Component (C) can be a single hydrosilylation catalyst or a mixture comprising two or more different catalysts that differ in at least one property, such as structure, form, platinum group metal, complexing ligand, and thermoplastic resin.

[0070] The concentration of component (C) is sufficient to catalyze the addition reaction of component (A) with component (B). Typically, the concentration of component (C) is sufficient to provide from 0.1 to 1000 ppm of a platinum group metal, preferably from 1 to 500 ppm of a platinum group metal, and more preferably from 5 to 150 ppm of a platinum group metal, based on the combined weight of components (A) and (B). The rate of cure is very slow below 0.1 ppm of platinum group metal. The use of more than 1000 ppm of platinum group metal results in no appreciable increase in cure rate, and is therefore uneconomical.

[0071] According to a second embodiment, the hydrosilylation-curable silicone composition comprises (A') a silicone resin having the formula $(R^1R^5_2SiO_{1/2})_w(R^5_2SiO_{2/2})_x(R^5SiO_{3/2})_y(SiO_{4/2})_z$ (III), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^5 is R^1 or $-H$, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin has an average of at least two silicon-bonded hydrogen atoms per molecule; (B') an organosilicon compound having an average of at least two silicon-bonded alkenyl groups per molecule in an amount sufficient to cure the silicone resin; and (C) a catalytic amount of a hydrosilylation catalyst.

[0072] Component (A') is at least one silicone resin having the formula $(R^1R^5_2SiO_{1/2})_w(R^5_2SiO_{2/2})_x(R^5SiO_{3/2})_y(SiO_{4/2})_z$ (III), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^5 is R^1 or $-H$, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin has an average of at least two silicon-bonded hydrogen atoms per molecule. In the formula (III), R^1 , w , x , y , z , $y+z/(w+x+y+z)$, and $w+x/(w+x+y+z)$ are as described and exemplified above for the silicone resin having the formula (I).

[0073] Typically at least 50 mol%, alternatively at least 65 mol%, alternatively at least 80 mol% of the groups R^5 in the silicone resin are hydrogen.

[0074] The silicone resin typically has a number-average molecular weight (M_n) of from 500 to 50,000, alternatively from 500 to 10,000, alternatively 1,000 to 3,000, where the molecular weight is determined by gel permeation chromatography employing a low angle

laser light scattering detector, or a refractive index detector and silicone resin (MQ) standards.

[0075] The viscosity of the silicone resin at 25 °C is typically from 0.01 to 100,000 Pa·s, alternatively from 0.1 to 10,000 Pa·s, alternatively from 1 to 100 Pa·s.

[0076] The silicone resin typically contains less than 10% (w/w), alternatively less than 5% (w/w), alternatively less than 2% (w/w), of silicon-bonded hydroxy groups, as determined by ^{29}Si NMR.

[0077] The silicone resin contains $\text{R}^5\text{SiO}_{3/2}$ units (i.e., T units) and/or $\text{SiO}_{4/2}$ units (i.e., Q units) in combination with $\text{R}^1\text{R}^5_2\text{SiO}_{1/2}$ units (i.e., M units) and/or $\text{R}^5_2\text{SiO}_{2/2}$ units (i.e., D units). For example, the silicone resin can be a DT resin, an MT resin, an MDT resin, a DTQ resin, and MTQ resin, and MDTQ resin, a DQ resin, an MQ resin, a DTQ resin, an MTQ resin, or an MDQ resin.

[0078] Examples of silicone resins suitable for use as component (A') include, but are not limited to, resins having the following formulae:

$(\text{HMe}_2\text{SiO}_{1/2})_{0.25}(\text{PhSiO}_{3/2})_{0.75}$, $(\text{HMeSiO}_{2/2})_{0.3}(\text{PhSiO}_{3/2})_{0.6}(\text{MeSiO}_{3/2})_{0.1}$, and $(\text{Me}_3\text{SiO}_{1/2})_{0.1}(\text{H}_2\text{SiO}_{2/2})_{0.1}(\text{MeSiO}_{3/2})_{0.4}(\text{PhSiO}_{3/2})_{0.4}$, where Me is methyl, Ph is phenyl, and the numerical subscripts outside the parenthesis denote mole fractions. Also, in the preceding formulae, the sequence of units is unspecified.

[0079] Component (A') can be a single silicone resin or a mixture comprising two or more different silicone resins, each as described above.

[0080] Methods of preparing silicone resins containing silicon-bonded hydrogen atoms are well known in the art; many of these resins are commercially available. Silicone resins are typically prepared by cohydrolyzing the appropriate mixture of chlorosilane precursors in an organic solvent, such as toluene. For example, a silicone resin consisting essentially of $\text{R}^1\text{R}^5_2\text{SiO}_{1/2}$ units and $\text{R}^5\text{SiO}_{3/2}$ units can be prepared by cohydrolyzing a compound having the formula $\text{R}^1\text{R}^5_2\text{SiCl}$ and a compound having the formula R^5SiCl_3 in toluene, where R^1 and R^5 are as described and exemplified above. The aqueous hydrochloric acid and silicone hydrolyzate are separated and the hydrolyzate is washed with water to remove residual acid and heated in the presence of a mild non-basic condensation catalyst to "body" the resin to the requisite viscosity. If desired, the resin can be further treated with a non-basic

condensation catalyst in an organic solvent to reduce the content of silicon-bonded hydroxy groups. Alternatively, silanes containing hydrolysable groups other than chloro, such $-\text{Br}$, $-\text{I}$, $-\text{OCH}_3$, $-\text{OC}(\text{O})\text{CH}_3$, $-\text{N}(\text{CH}_3)_2$, NHCOCH_3 , and $-\text{SCH}_3$, can be utilized as starting materials in the cohydrolysis reaction. The properties of the resin products depend on the types of silanes, the mole ratio of silanes, the degree of condensation, and the processing conditions.

[0081] Component (B') is at least one organosilicon compound having an average of at least two silicon-bonded alkenyl groups per molecule in an amount sufficient to cure the silicone resin of component (A').

[0082] The organosilicon compound contains an average of at least two silicon-bonded alkenyl groups per molecule, alternatively at least three silicon-bonded alkenyl groups per molecule. It is generally understood that cross-linking occurs when the sum of the average number of silicon-bonded hydrogen atoms per molecule in component (A') and the average number of silicon-bonded alkenyl groups per molecule in component (B') is greater than four.

[0083] The organosilicon compound can be an organosilane or an organosiloxane. The organosilane can be a monosilane, disilane, trisilane, or polysilane. Similarly, the organosiloxane can be a disiloxane, trisiloxane, or polysiloxane. The structure of the organosilicon compound can be linear, branched, cyclic, or resinous. Cyclosilanes and cyclosiloxanes typically have from 3 to 12 silicon atoms, alternatively from 3 to 10 silicon atoms, alternatively from 3 to 4 silicon atoms. In acyclic polysilanes and polysiloxanes, the silicon-bonded alkenyl groups can be located at terminal, pendant, or at both terminal and pendant positions.

[0084] Examples of organosilanes suitable for use as component (B') include, but are not limited to, silanes having the following formulae:

Vi_4Si , PhSiVi_3 , MeSiVi_3 , PhMeSiVi_2 , Ph_2SiVi_2 , and $\text{PhSi}(\text{CH}_2\text{CH}=\text{CH}_2)_3$, where Me is methyl, Ph is phenyl, and Vi is vinyl.

[0085] Examples of organosiloxanes suitable for use as component (B') include, but are not limited to, siloxanes having the following formulae:

$\text{PhSi}(\text{OSiMe}_2\text{H})_3$, $\text{Si}(\text{OSiMe}_2\text{H})_4$, $\text{MeSi}(\text{OSiMe}_2\text{H})_3$, and $\text{Ph}_2\text{Si}(\text{OSiMe}_2\text{H})_2$, where Me is methyl, and Ph is phenyl.

[0086] Component (B') can be a single organosilicon compound or a mixture comprising two or more different organosilicon compounds, each as described above. For example

component (B') can be a single organosilane, a mixture of two different organosilanes, a single organosiloxane, a mixture of two different organosiloxanes, or a mixture of an organosilane and an organosiloxane.

[0087] The concentration of component (B') is sufficient to cure (cross-link) the silicone resin of component (A'). The exact amount of component (B') depends on the desired extent of cure, which generally increases as the ratio of the number of moles of silicon-bonded alkenyl groups in component (B') to the number of moles of silicon-bonded hydrogen atoms in component (A') increases. The concentration of component (B') is typically sufficient to provide from 0.4 to 2 moles of silicon-bonded alkenyl groups, alternatively from 0.8 to 1.5 moles of silicon-bonded alkenyl groups, alternatively from 0.9 to 1.1 moles of silicon-bonded alkenyl groups, per mole of silicon-bonded hydrogen atoms in component (A').

[0088] Methods of preparing organosilanes and organosiloxanes containing silicon-bonded alkenyl groups are well known in the art; many of these compounds are commercially available.

[0089] Component (C) of the second embodiment of the silicone composition is as described and exemplified above for component (C) of the first embodiment.

[0090] According to a third embodiment, the hydrosilylation-curable silicone composition comprises (A) a silicone resin having the formula $(R^1R^2_2SiO_{1/2})_w(R^2_2SiO_{2/2})_x$

$(R^1SiO_{3/2})_y(SiO_{4/2})_z$ (I); (B) an organosilicon compound having an average of at least two silicon-bonded hydrogen atoms per molecule in an amount sufficient to cure the silicone resin; (C) a catalytic amount of a hydrosilylation catalyst; and (D) a silicone rubber having a formula selected from (i) $R^1R^2_2SiO(R^2_2SiO)_aSiR^2_2R^1$ (IV) and (ii)

$R^5R^1_2SiO(R^1R^5SiO)_bSiR^1_2R^5$ (V); wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, subscripts a and b each have a value of from 1 to 4, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin and the silicone rubber (D)(i) each have an average of at least two silicon-bonded alkenyl groups per molecule, the silicone rubber (D)(ii) has an average of at least two silicon-bonded hydrogen atoms per molecule, and the mole ratio of silicon-bonded alkenyl groups or silicon-bonded

hydrogen atoms in the silicone rubber (D) to silicon-bonded alkenyl groups in the silicone resin (A) is from 0.01 to 0.5.

[0091] Components (A), (B), and (C) of the third embodiment of the silicone composition are as described and exemplified above for the first embodiment.

[0092] The concentration of component (B) is sufficient to cure (cross-link) the silicone resin of component (A). When component (D) is (D)(i), the concentration of component (B) is such that the ratio of the number of moles of silicon-bonded hydrogen atoms in component (B) to the sum of the number of moles of silicon-bonded alkenyl groups in component (A) and component (D)(i) is typically from 0.4 to 2, alternatively from 0.8 to 1.5, alternatively from 0.9 to 1.1. Furthermore, when component (D) is (D)(ii), the concentration of component (B) is such that the ratio of the sum of the number of moles of silicon-bonded hydrogen atoms in component (B) and component (D)(ii) to the number of moles of silicon-bonded alkenyl groups in component (A) is typically from 0.4 to 2, alternatively from 0.8 to 1.5, alternatively from 0.9 to 1.1.

[0093] Component (D) is a silicone rubber having a formula selected from (i) $R^1R^2_2SiO(R^2_2SiO)_aSiR^2_2R^1$ (IV) and (ii) $R^5R^1_2SiO(R^1R^5SiO)_bSiR^1_2R^5$ (V); wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, and subscripts a and b each have a value of from 1 to 4, provided the silicone rubber (D)(i) has an average of at least two silicon-bonded alkenyl groups per molecule, and the silicone rubber (D)(ii) has an average of at least two silicon-bonded hydrogen atoms per molecule.

[0094] Component (D)(i) is at least one silicone rubber having the formula $R^1R^2_2SiO(R^2_2SiO)_aSiR^2_2R^1$ (IV), wherein R^1 and R^2 are as described and exemplified above and the subscript a has a value of from 1 to 4, provided the silicone rubber (D)(i) has an average of at least two silicon-bonded alkenyl groups per molecule. Alternatively, the subscript a has a value of from 2 to 4 or from 2 to 3.

[0095] Examples of silicone rubbers suitable for use as component (D)(i) include, but are not limited to, silicone rubbers having the following formulae:

$ViMe_2SiO(Me_2SiO)_aSiMe_2Vi$, $ViMe_2SiO(Ph_2SiO)_aSiMe_2Vi$, and $ViMe_2SiO(PhMeSiO)_aSiMe_2Vi$, where Me is methyl, Ph is phenyl, Vi is vinyl, and the subscript a has a value of from 1 to 4.

[0096] Component (D)(i) can be a single silicone rubber or a mixture comprising two or more different silicone rubbers, each having the formula (IV).

[0097] Component (D)(ii) is at least one silicone rubber having the formula $R^5R^1_2SiO(R^1R^5SiO)_bSiR^1_2R^5$ (V); wherein R^1 and R^5 are as described and exemplified above, and the subscript b has a value of from 1 to 4, provided the silicone rubber (D)(ii) has an average of at least two silicon-bonded hydrogen atoms per molecule. Alternatively, the subscript b has a value of from 2 to 4 or from 2 to 3.

[0098] Examples of silicone rubbers suitable for use as component (D)(ii) include, but are not limited to, silicone rubbers having the following formulae:

$HMe_2SiO(Me_2SiO)_bSiMe_2H$, $HMe_2SiO(Ph_2SiO)_bSiMe_2H$, $HMe_2SiO(PhMeSiO)_bSiMe_2H$, and $HMe_2SiO(Ph_2SiO)_2(Me_2SiO)_2SiMe_2H$, where Me is methyl, Ph is phenyl, and the subscript b has a value of from 1 to 4.

[0099] Component (D)(ii) can be a single silicone rubber or a mixture comprising two or more different silicone rubbers, each having the formula (V).

[0100] The mole ratio of silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms in the silicone rubber (D) to silicon-bonded alkenyl groups in the silicone resin (A) is typically from 0.01 to 0.5, alternatively from 0.05 to 0.4, alternatively from 0.1 to 0.3.

[0101] Methods of preparing silicone rubbers containing silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms are well known in the art; many of these compounds are commercially available.

[0102] According to a fourth embodiment, the hydrosilylation-curable silicone composition comprises (A') a silicone resin having the formula $(R^1R^5_2SiO_{1/2})_w(R^5_2SiO_{2/2})_x(R^5SiO_{3/2})_y(SiO_{4/2})_z$ (III); (B') an organosilicon compound having an average of at least two silicon-bonded alkenyl groups per molecule in an amount sufficient to cure the silicone resin; (C) a catalytic amount of a hydrosilylation catalyst; and (D) a silicone rubber having a formula selected from (i) $R^1R^2_2SiO(R^2_2SiO)_aSiR^2_2R^1$ (IV) and (ii) $R^5R^1_2SiO(R^1R^5SiO)_bSiR^1_2R^5$ (V); wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, subscripts a and b each have a value of from 1 to 4, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and

$w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin and the silicone rubber (D)(ii) each have an average of at least two silicon-bonded hydrogen atoms per molecule, the silicone rubber (D)(i) has an average of at least two silicon-bonded alkenyl groups per molecule, and the mole ratio of silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms in the silicone rubber (D) to silicon-bonded hydrogen atoms in the silicone resin (A') is from 0.01 to 0.5.

[0103] Components (A'), (B'), and (C) of the fourth embodiment of the silicone composition are as described and exemplified above for the second embodiment, and component (D) of the fourth embodiment is as described and exemplified above for the third embodiment.

[0104] The concentration of component (B') is sufficient to cure (cross-link) the silicone resin of component (A'). When component (D) is (D)(i), the concentration of component (B') is such that the ratio of the sum of the number of moles of silicon-bonded alkenyl groups in component (B') and component (D)(i) to the number of moles of silicon-bonded hydrogen atoms in component (A') is typically from 0.4 to 2, alternatively from 0.8 to 1.5, alternatively from 0.9 to 1.1. Furthermore, when component (D) is (D)(ii), the concentration of component (B') is such that the ratio of the number of moles of silicon-bonded alkenyl groups in component (B') to the sum of the number of moles of silicon-bonded hydrogen atoms in component (A') and component (D)(ii) is typically from 0.4 to 2, alternatively from 0.8 to 1.5, alternatively from 0.9 to 1.1.

[0105] The mole ratio of silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms in the silicone rubber (D) to silicon-bonded hydrogen atoms in the silicone resin (A') is typically from 0.01 to 0.5, alternatively from 0.05 to 0.4, alternatively from 0.1 to 0.3.

[0106] According to a fifth embodiment, the hydrosilylation-curable silicone composition comprises (A'') a rubber-modified silicone resin prepared by reacting a silicone resin having the formula $(R^1R^2_2SiO_{1/2})_w(R^2_2SiO_{2/2})_x(R^1SiO_{3/2})_y(SiO_{4/2})_z$ (I) and a silicone rubber having the formula $R^5R^1_2SiO(R^1R^5SiO)_cSiR^1_2R^5$ (VI) in the presence of a hydrosilylation catalyst and, optionally, an organic solvent to form a soluble reaction product, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, c has a value of from greater than 4 to 1,000, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35,

$w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin (I) has an average of at least two silicon-bonded alkenyl groups per molecule, the silicone rubber (VI) has an average of at least two silicon-bonded hydrogen atoms per molecule, and the mole ratio of silicon-bonded hydrogen atoms in the silicone rubber (VI) to silicon-bonded alkenyl groups in silicone resin (I) is from 0.01 to 0.5; (B) an organosilicon compound having an average of at least two silicon-bonded hydrogen atoms per molecule in an amount sufficient to cure the rubber-modified silicone resin; and (C) a catalytic amount of a hydrosilylation catalyst.

[0107] Components (B) and (C) of the fifth embodiment of the silicone composition are as described and exemplified above for the first embodiment.

[0108] The concentration of component (B) is sufficient to cure (cross-link) the rubber-modified silicone resin. The concentration of component (B) is such that the ratio of the sum of the number of moles of silicon-bonded hydrogen atoms in component (B) and the silicone rubber (VI) to the number of moles of silicon-bonded alkenyl groups in the silicone resin (I) is typically from 0.4 to 2, alternatively from 0.8 to 1.5, alternatively from 0.9 to 1.1.

[0109] Component (A") is a rubber-modified silicone resin prepared by reacting at least one silicone resin having the formula $(R^1R^2_2SiO_{1/2})_w(R^2_2SiO_{2/2})_x(R^1SiO_{3/2})_y(SiO_{4/2})_z$ (I) and at least one silicone rubber having the formula $R^5R^1_2SiO(R^1R^5SiO)_cSiR^1_2R^5$ (VI) in the presence of a hydrosilylation catalyst and, optionally, an organic solvent to form a soluble reaction product, wherein R^1 , R^2 , R^5 , w , x , y , z , $y+z/(w+x+y+z)$, and $w+x/(w+x+y+z)$ are as described and exemplified above, and the subscript c has a value of from greater than 4 to 1,000.

[0110] The silicone resin having the formula (I) is as described and exemplified above for the first embodiment of the silicone composition. Also, the hydrosilylation catalyst and organic solvent are as described and exemplified above in the method of preparing the organohydrogenpolysiloxane resin having the formula (II). As used herein the term "soluble reaction product" means when organic solvent is present, the product of the reaction for preparing component (A") is miscible in the organic solvent and does not form a precipitate or suspension.

[0111] In the formula (VI) of the silicone rubber, R^1 and R^5 are as described and exemplified above, and the subscript c typically has a value of from greater than 4 to 1,000, alternatively from 10 to 500, alternatively from 10 to 50.

[0112] Examples of silicone rubbers having the formula (VI) include, but are not limited to, silicone rubbers having the following formulae:

$HMe_2SiO(Me_2SiO)_{50}SiMe_2H$, $HMe_2SiO(Me_2SiO)_{10}SiMe_2H$, $HMe_2SiO(PhMeSiO)_{25}SiMe_2H$, and $Me_3SiO(MeHSiO)_{10}SiMe_3$, wherein Me is methyl, Ph is phenyl, and the numerical subscripts indicate the number of each type of siloxane unit.

[0113] The silicone rubber having the formula (VI) can be a single silicone rubber or a mixture comprising two or more different silicone rubbers, each having the formula (VI).

[0114] Methods of preparing silicone rubbers containing silicon-bonded hydrogen atoms are well known in the art; many of these compounds are commercially available.

[0115] The silicone resin (I), silicone rubber (VI), hydrosilylation catalyst, and organic solvent can be combined in any order. Typically, the silicone resin, silicone rubber, and organic solvent are combined before the introduction of the hydrosilylation catalyst.

[0116] The reaction is typically carried out at a temperature of from room temperature ($\sim 23 \pm 2$ °C) to 150 °C, alternatively from room temperature to 100 °C.

[0117] The reaction time depends on several factors, including the structures of the silicone resin and the silicone rubber, and the temperature. The components are typically allowed to react for a period of time sufficient to complete the hydrosilylation reaction. This means the components are typically allowed to react until at least 95 mol%, alternatively at least 98 mol%, alternatively at least 99 mol%, of the silicon-bonded hydrogen atoms originally present in the silicone rubber have been consumed in the hydrosilylation reaction, as determined by FTIR spectrometry. The time of reaction is typically from 0.5 to 24 h at a temperature of from room temperature ($\sim 23 \pm 2$ °C) to 100 °C. The optimum reaction time can be determined by routine experimentation using the methods set forth in the Examples section below.

[0118] The mole ratio of silicon-bonded hydrogen atoms in the silicone rubber (VI) to silicon-bonded alkenyl groups in the silicone resin (I) is typically from 0.01 to 0.5, alternatively from 0.05 to 0.4, alternatively from 0.1 to 0.3.

[0119] The concentration of the hydrosilylation catalyst is sufficient to catalyze the addition reaction of the silicone resin (I) with the silicone rubber (VI). Typically, the concentration of

the hydrosilylation catalyst is sufficient to provide from 0.1 to 1000 ppm of a platinum group metal, based on the combined weight of the resin and the rubber.

[0120] The concentration of the organic solvent is typically from 0 to 95% (w/w), alternatively from 10 to 75% (w/w), alternatively from 40 to 60% (w/w), based on the total weight of the reaction mixture.

[0121] The rubber-modified silicone resin can be used without isolation or purification in the fifth embodiment of the hydrosilylation-curable silicone composition or the resin can be separated from most of the solvent by conventional methods of evaporation. For example, the reaction mixture can be heated under reduced pressure. Moreover, when the hydrosilylation catalyst is a supported catalyst, described above, the rubber-modified silicone resin can be readily separated from the hydrosilylation catalyst by filtering the reaction mixture. However, when the rubber-modified silicone resin is not separated from the hydrosilylation catalyst used to prepare the resin, the catalyst may be used as component (C) of the fifth embodiment of the hydrosilylation-curable silicone composition.

[0122] According to a sixth embodiment, the hydrosilylation-curable silicone composition comprises (A'') a rubber-modified silicone resin prepared by reacting a silicone resin having the formula $(R^1R^5_2SiO_{1/2})_w(R^5_2SiO_{2/2})_x(R^5SiO_{3/2})_y(SiO_{4/2})_z$ (III) and a silicone rubber having the formula $R^1R^2_2SiO(R^2_2SiO)_dSiR^2_2R^1$ (VII) in the presence of a hydrosilylation catalyst and, optionally, an organic solvent to form a soluble reaction product, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, subscript d has a value of from greater than 4 to 1,000, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin (III) has an average of at least two silicon-bonded hydrogen atoms per molecule, the silicone rubber (VII) has an average of at least two silicon-bonded alkenyl groups per molecule, and the mole ratio of silicon-bonded alkenyl groups in the silicone rubber (VII) to silicon-bonded hydrogen atoms in the silicone resin (III) is from 0.01 to 0.5; (B') an organosilicon compound having an average of at least two silicon-bonded alkenyl groups per molecule in an amount sufficient to cure the rubber-modified silicone resin; and (C) a catalytic amount of a hydrosilylation catalyst.

[0123] Components (B') and (C) of the sixth embodiment of the silicone composition are as described and exemplified above for the second embodiment.

[0124] The concentration of component (B') is sufficient to cure (cross-link) the rubber-modified silicone resin. The concentration of component (B') is such that the ratio of the sum of the number of moles of silicon-bonded alkenyl groups in component (B') and the silicone rubber (VII) to the number of moles of silicon-bonded hydrogen atoms in the silicone resin (III) is typically from 0.4 to 2, alternatively from 0.8 to 1.5, alternatively from 0.9 to 1.1.

[0125] Component (A'') is a rubber-modified silicone resin prepared by reacting at least one silicone resin having the formula $(R^1R^5_2SiO_{1/2})_w(R^5_2SiO_{2/2})_x(R^5SiO_{3/2})_y(SiO_{4/2})_z$ (III) and at least one silicone rubber having the formula $R^1R^2_2SiO(R^2_2SiO)_dSiR^2_2R^1$ (VII) in the presence of a hydrosilylation catalyst and an organic solvent to form a soluble reaction product, wherein R^1 , R^2 , R^5 , w , x , y , z , $y+z/(w+x+y+z)$, and $w+x/(w+x+y+z)$ are as described and exemplified above, and the subscript d has a value of from greater than 4 to 1,000.

[0126] The silicone resin having the formula (III) is as described and exemplified above for the second embodiment of the hydrosilylation-curable silicone composition. Also, the hydrosilylation catalyst and organic solvent are as described and exemplified above in the method of preparing the organohydrogenpolysiloxane resin having the formula (II). As in the previous embodiment of the silicone composition, the term "soluble reaction product" means when organic solvent is present, the product of the reaction for preparing component (A'') is miscible in the organic solvent and does not form a precipitate or suspension.

[0127] In the formula (VII) of the silicone rubber, R^1 and R^2 are as described and exemplified above, and the subscript d typically has a value of from 4 to 1,000, alternatively from 10 to 500, alternatively from 10 to 50.

[0128] Examples of silicone rubbers having the formula (VII) include, but are not limited to silicone rubbers having the following formulae:

$ViMe_2SiO(Me_2SiO)_{50}SiMe_2Vi$, $ViMe_2SiO(Me_2SiO)_{10}SiMe_2Vi$, $ViMe_2SiO(PhMeSiO)_{25}SiMe_2Vi$, and $Vi_2MeSiO(PhMeSiO)_{25}SiMe_2Vi$, wherein Me is methyl, Ph is phenyl, Vi is vinyl, and the numerical subscripts indicate the number of each type of siloxane unit.

[0129] The silicone rubber having the formula (VII) can be a single silicone rubber or a mixture comprising two or more different silicone rubbers, each having the formula (VII).

[0130] Methods of preparing silicone rubbers containing silicon-bonded alkenyl groups are well known in the art; many of these compounds are commercially available.

[0131] The reaction for preparing component (A''') can be carried out in the manner described above for preparing component (A'') of the fifth embodiment of the silicone composition, except the silicone resin having the formula (I) and the silicone rubber having the formula (VI) are replaced with the resin having the formula (III) and the rubber having the formula (VII), respectively. The mole ratio of silicon-bonded alkenyl groups in the silicone rubber (VII) to silicon-bonded hydrogen atoms in the silicone resin (III) is from 0.01 to 0.5, alternatively from 0.05 to 0.4, alternatively from 0.1 to 0.3. Moreover, the silicone resin and the silicone rubber are typically allowed to react for a period of time sufficient to complete the hydrosilylation reaction. This means the components are typically allowed to react until at least 95 mol%, alternatively at least 98 mol%, alternatively at least 99 mol%, of the silicon-bonded alkenyl groups originally present in the rubber have been consumed in the hydrosilylation reaction, as determined by FTIR spectrometry.

[0132] The hydrosilylation-curable silicone composition of the present method can comprise additional ingredients, provided the ingredient does not prevent the silicone composition from curing to form a cured silicone resin having low coefficient of thermal expansion, high tensile strength, and high modulus, as described below. Examples of additional ingredients include, but are not limited to, hydrosilylation catalyst inhibitors, such as 3-methyl-3-penten-1-yne, 3,5-dimethyl-3-hexen-1-yne, 3,5-dimethyl-1-hexyn-3-ol, 1-ethynyl-1-cyclohexanol, 2-phenyl-3-butyne-2-ol, vinylcyclosiloxanes, and triphenylphosphine; adhesion promoters, such as the adhesion promoters taught in U.S. Patent Nos. 4,087,585 and 5,194,649; dyes; pigments; anti-oxidants; heat stabilizers; UV stabilizers; flame retardants; flow control additives; and diluents, such as organic solvents and reactive diluents.

[0133] For example, the hydrosilylation-curable silicone composition can contain (E) a reactive diluent comprising (i) an organosiloxane having an average of at least two silicon-bonded alkenyl groups per molecule and a viscosity of from 0.001 to 2 Pa·s at 25 °C, wherein the viscosity of (E)(i) is not greater than 20% of the viscosity of the silicone resin, e.g., component (A), (A'), (A''), or (A''') above, of the silicone composition and the organosiloxane has the formula $(R^1R^2_2SiO_{1/2})_m(R^2_2SiO_{2/2})_n(R^1SiO_{3/2})_p(SiO_{4/2})_q$, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, m is 0 to 0.8, n is 0 to 1, p is 0 to 0.25, q is 0 to 0.2,

$m+n+p+q=1$, and $m+n$ is not equal to 0, provided when $p+q=0$, n is not equal to 0 and the alkenyl groups are not all terminal, and (ii) an organohydrogensiloxane having an average of at least two silicon-bonded hydrogen atoms per molecule and a viscosity of from 0.001 to 2 Pa·s at 25 °C, in an amount sufficient to provide from 0.5 to 3 moles of silicon-bonded hydrogen atoms in (E)(ii) per mole of alkenyl groups in (E)(i), wherein the organohydrogensiloxane has the formula $(HR^1_2SiO_{1/2})_s(R^1SiO_{3/2})_t(SiO_{4/2})_v$, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, s is from 0.25 to 0.8, t is from 0 to 0.5, v is from 0 to 0.3, $s+t+v=1$, and $t+v$ is not equal to 0.

[0134] Component (E)(i) is at least one organosiloxane having an average of at least two alkenyl groups per molecule and a viscosity of from 0.001 to 2 Pa·s at 25 °C, wherein the viscosity of (E)(i) is not greater than 20% of the viscosity of the silicone resin of the silicone composition and the organosiloxane has the formula $(R^1R^2_2SiO_{1/2})_m(R^2_2SiO_{2/2})_n(R^1SiO_{3/2})_p(SiO_{4/2})_q$, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, m is 0 to 0.8, $n = 0$ to 1, $p = 0$ to 0.25, $q = 0$ to 0.2, $m+n+p+q=1$, and $m+n$ is not equal to 0, provided when $p+q=0$, n is not equal to 0 and the alkenyl groups are not all terminal (i.e., not all the alkenyl groups in the organosiloxane are in the $R^1R^2_2SiO_{1/2}$ units). Further, organosiloxane (E)(i) can have a linear, branched, or cyclic structure. For example, when the subscripts m , p , and q in the formula of organosiloxane (E)(i) are each equal to 0, the organosiloxane is an organocyclosiloxane.

[0135] The viscosity of organosiloxane (E)(i) at 25 °C is typically from 0.001 to 2 Pa·s, alternatively from 0.001 to 0.1 Pa·s, alternatively from 0.001 to 0.05 Pa·s. Further, the viscosity of organosiloxane (E)(i) at 25 °C is typically not greater than 20%, alternatively not greater than 10%, alternatively not greater than 1%, of the viscosity of the silicone resin in the hydrosilylation-curable silicone composition.

[0136] Examples of organosiloxanes suitable for use as organosiloxane (E)(i) include, but are not limited to, organosiloxanes having the following formulae:

$(ViMeSiO)_3$, $(ViMeSiO)_4$, $(ViMeSiO)_5$, $(ViMeSiO)_6$, $(ViPhSiO)_3$, $(ViPhSiO)_4$, $(ViPhSiO)_5$, $(ViPhSiO)_6$, $ViMe_2SiO(ViMeSiO)_nSiMe_2Vi$, $Me_3SiO(ViMeSiO)_nSiMe_3$, and

$(\text{ViMe}_2\text{SiO})_4\text{Si}$, where Me is methyl, Ph is phenyl, Vi is vinyl, and the subscript n has a value such that the organosiloxane has a viscosity of from 0.001 to 2 Pa·s at 25 °C.

[0137] Component (E)(i) can be a single organosiloxane or a mixture comprising two or more different organosiloxanes, each as described above. Methods of making alkenyl-functional organosiloxanes are well known in the art.

[0138] Component (E)(ii) is at least one organohydrogensiloxane having an average of at least two silicon-bonded hydrogen atoms per molecule and a viscosity of from 0.001 to 2 Pa·s at 25 °C, in an amount sufficient to provide from 0.5 to 3 moles of silicon-bonded hydrogen atoms in (E)(ii) to moles of alkenyl groups in (E)(i), wherein the organohydrogensiloxane has the formula $(\text{HR}^1_2\text{SiO}_{1/2})_s(\text{R}^1\text{SiO}_{3/2})_t(\text{SiO}_{4/2})_v$, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, s is from 0.25 to 0.8, t is from 0 to 0.5, v is from 0 to 0.3, $s+t+v=1$, and $t+v$ is not equal to 0.

[0139] The viscosity of organohydrogensiloxane (E)(ii) at 25 °C is typically from 0.001 to 2 Pa·s, alternatively from 0.001 to 0.1 Pa·s, alternatively from 0.001 to 0.05 Pa·s.

[0140] Examples of organohydrogensiloxanes suitable for use as organohydrogensiloxane (E)(ii) include, but are not limited to, organohydrogensiloxanes having the following formulae:

$\text{PhSi}(\text{OSiMe}_2\text{H})_3$, $\text{Si}(\text{OSiMe}_2\text{H})_4$, $\text{MeSi}(\text{OSiMe}_2\text{H})_3$, $(\text{HMe}_2\text{SiO})_3\text{SiOSi}(\text{OSiMe}_2\text{H})_3$, and $(\text{HMe}_2\text{SiO})_3\text{SiOSi}(\text{Ph})(\text{OSiMe}_2\text{H})_2$, where Me is methyl and Ph is phenyl.

[0141] Component (E)(ii) can be a single organohydrogensiloxane or a mixture comprising two or more different organohydrogensiloxanes, each as described above. Methods of making organohydrogensiloxanes are well known in the art.

[0142] The concentration of component (E)(ii) is sufficient to provide from 0.5 to 3 moles of silicon-bonded hydrogen atoms, alternatively from 0.6 to 2 moles of silicon-bonded hydrogen atoms, alternatively from 0.9 to 1.5 moles of silicon-bonded hydrogen atoms, per mole of alkenyl groups in component (E)(i).

[0143] The concentration of the reactive diluent (E), component (E)(i) and (E)(ii) combined, in the hydrosilylation-curable silicone composition is typically from 0 to 90% (w/w), alternatively from 0 to 50% (w/w), alternatively from 0 to 20% (w/w), alternatively from 0 to 10% (w/w), based on the combined weight of the silicone resin, component (A),

(A'),(A''), or (A'''), and the organosilicon compound, component (B) or (B') in the embodiments above.

[0144] The silicone composition can be a one-part composition comprising the silicone resin, organosilicon compound, and hydrosilylation catalyst in a single part or, alternatively, a multi-part composition comprising these components in two or more parts. For example, a multi-part silicone composition can comprise a first part containing a portion of the silicone resin and all of the hydrosilylation catalyst, and a second part containing the remaining portion of the silicone resin and all of the organosilicon compound.

[0145] The one-part silicone composition is typically prepared by combining the principal components and any optional ingredients in the stated proportions at ambient temperature, with or without the aid of an organic solvent. Although the order of addition of the various components is not critical if the silicone composition is to be used immediately, the hydrosilylation catalyst is preferably added last at a temperature below about 30 °C to prevent premature curing of the composition. Also, the multi-part silicone composition can be prepared by combining the components in each part.

[0146] Mixing can be accomplished by any of the techniques known in the art such as milling, blending, and stirring, either in a batch or continuous process. The particular device is determined by the viscosity of the components and the viscosity of the final silicone composition.

[0147] The fiber reinforcement can be any reinforcement comprising fibers, provided the reinforcement has a high modulus and high tensile strength. The fiber reinforcement typically has a Young's modulus at 25 °C of at least 3 GPa. For example, the reinforcement typically has a Young's modulus at 25 °C of from 3 to 1,000 GPa, alternatively from 3 to 200 GPa, alternatively from 10 to 100 GPa. Moreover, the reinforcement typically has a tensile strength at 25 °C of at least 50 MPa. For example, the reinforcement typically has a tensile strength at 25 °C of from 50 to 10,000 MPa, alternatively from 50 to 1,000 MPa, alternatively from 50 to 500 MPa.

[0148] The fiber reinforcement can be a woven fabric, e.g., a cloth; a nonwoven fabric, e.g., a mat or roving; or loose (individual) fibers. The fibers in the reinforcement are typically cylindrical in shape and have a diameter of from 1 to 100 µm, alternatively from 1 to 20 µm, alternatively from 1 to 10 µm. Loose fibers may be continuous, meaning the fibers extend throughout the reinforced silicone resin film in a generally unbroken manner, or chopped.

[0149] The fiber reinforcement is typically heat-treated prior to use to remove organic contaminants. For example, the fiber reinforcement is typically heated in air at an elevated temperature, for example, 575 °C, for a suitable period of time, for example 2 h.

[0150] Examples of fiber reinforcements include, but are not limited to reinforcements comprising glass fibers; quartz fibers; graphite fibers; nylon fibers; polyester fibers; aramid fibers, such as Kevlar® and Nomex®; polyethylene fibers; polypropylene fibers; and silicon carbide fibers.

[0151] The fiber reinforcement can be impregnated in a hydrosilylation-curable silicone composition using a variety of methods. For example, according to a first method, the fiber reinforcement can be impregnated by (i) applying a hydrosilylation-curable silicone composition to a release liner to form a silicone film; (ii) embedding a fiber reinforcement in the film; (iii) degassing the embedded fiber reinforcement; and (iv) applying the silicone composition to the degassed embedded fiber reinforcement to form an impregnated fiber reinforcement.

[0152] In step (i), a hydrosilylation-curable silicone composition, described above, is applied to a release liner to form a silicone film. The release liner can be any rigid or flexible material having a surface from which the reinforced silicone resin film can be removed without damage by delamination after the silicone resin is cured, as described below. Examples of release liners include, but are not limited to, Nylon, polyethyleneterephthalate, and polyimide.

[0153] The silicone composition can be applied to the release liner using conventional coating techniques, such as spin coating, dipping, spraying, brushing, or screen-printing. The silicone composition is applied in an amount sufficient to embed the fiber reinforcement in step (ii), below.

[0154] In step (ii), a fiber reinforcement is embedded in the silicone film. The fiber reinforcement can be embedded in the silicone film by simply placing the reinforcement on the film and allowing the silicone composition of the film to saturate the reinforcement.

[0155] In step (iii), the embedded fiber reinforcement is degassed. The embedded fiber reinforcement can be degassed by subjecting it to a vacuum at a temperature of from room temperature ($\sim 23 \pm 2$ °C) to 60 °C, for a period of time sufficient to remove entrapped air in the embedded reinforcement. For example, the embedded fiber reinforcement can typically

be degassed by subjecting it to a pressure of from 1,000 to 20,000 Pa for 5 to 60 min. at room temperature.

[0156] In step (iv), the silicone composition is applied to the degassed embedded fiber reinforcement to form an impregnated fiber reinforcement. The silicone composition can be applied to the degassed embedded fiber reinforcement using conventional methods, as described above for step (i).

[0157] The first method can further comprise the steps of (v) degassing the impregnated fiber reinforcement; (vi) applying a second release liner to the degassed impregnated fiber reinforcement to form an assembly; and (vii) compressing the assembly.

[0158] The assembly can be compressed to remove excess silicone composition and/or entrapped air, and to reduce the thickness of the impregnated fiber reinforcement. The assembly can be compressed using conventional equipment such as a stainless steel roller, hydraulic press, rubber roller, or laminating roll set. The assembly is typically compressed at a pressure of from 1,000 Pa to 10 MPa and at a temperature of from room temperature ($\sim 23 \pm 2$ °C) to 50 °C.

[0159] Alternatively, according to a second method, the fiber reinforcement can be impregnated in a hydrosilylation-curable silicone composition by (i) depositing a fiber reinforcement on a release liner; (ii) embedding the fiber reinforcement in a hydrosilylation-curable silicone composition; (iii) degassing the embedded fiber reinforcement; and (iv) applying the silicone composition to the degassed embedded fiber reinforcement to form an impregnated fiber reinforcement. The second method can further comprise the steps of (v) degassing the impregnated fiber reinforcement; (vi) applying a second release liner to the degassed impregnated fiber reinforcement to form an assembly; and (vii) compressing the assembly. In the second method, steps (iii) to (vii) are as described above for the first method of impregnating a fiber reinforcement in a hydrosilylation-curable silicone composition.

[0160] In step (ii), the fiber reinforcement is embedded in a hydrosilylation-curable silicone composition. The reinforcement can be embedded in the silicone composition by simply covering the reinforcement with the composition and allowing the composition to saturate the reinforcement.

[0161] Furthermore, when the fiber reinforcement is a woven or nonwoven fabric, the reinforcement can be impregnated in a hydrosilylation-curable silicone composition by

passing it through the composition. The fabric is typically passed through the silicone composition at a rate of from 1 to 1,000 cm/s at room temperature ($\sim 23 \pm 2$ °C).

[0162] In the second step of the method of preparing a reinforced silicone resin film, the impregnated fiber reinforcement is heated at a temperature sufficient to cure the silicone resin. The impregnated fiber reinforcement can be heated at atmospheric, subatmospheric, or supraatmospheric pressure. The impregnated fiber reinforcement is typically heated at a temperature of from room temperature ($\sim 23 \pm 2$ °C) to 250 °C, alternatively from room temperature to 200 °C, alternatively from room temperature to 150 °C, at atmospheric pressure. The reinforcement is heated for a length of time sufficient to cure (cross-link) the silicone resin. For example, the impregnated fiber reinforcement is typically heated at a temperature of from 150 to 200 °C for a time of from 0.1 to 3 h.

[0163] Alternatively, the impregnated fiber reinforcement can be heated in a vacuum at a temperature of from 100 to 200 °C and a pressure of from 1,000 to 20,000 Pa for a time of from 0.5 to 3 h. The impregnated fiber reinforcement can be heated in a vacuum using a conventional vacuum bagging process. In a typically process, a bleeder (e.g., polyester) is applied over the impregnated fiber reinforcement, a breather (e.g., Nylon, polyester) is applied over the bleeder, a vacuum bagging film (e.g., Nylon) equipped with a vacuum nozzle is applied over the breather, the assembly is sealed with tape, a vacuum (e.g., 1,000 Pa) is applied to the sealed assembly, and the evacuated bag is heated as described above.

[0164] The reinforced silicone resin film of the present invention typically comprises from 10 to 99% (w/w), alternatively from 30 to 95% (w/w), alternatively from 60 to 95% (w/w), alternatively from 80 to 95% (w/w), of the cured silicone resin. Also, the reinforced silicone resin film typically has a thickness of from 15 to 500 μm , alternatively from 15 to 300 μm , alternatively from 20 to 150 μm , alternatively from 30 to 125 μm .

[0165] The reinforced silicone resin film typically has a flexibility such that the film can be bent over a cylindrical steel mandrel having a diameter less than or equal to 3.2 mm without cracking, where the flexibility is determined as described in ASTM Standard D522-93a, Method B.

[0166] The reinforced silicone resin film has low coefficient of linear thermal expansion (CTE), high tensile strength, and high modulus. For example the film typically has a CTE of from 0 to 80 $\mu\text{m}/\text{m}^\circ\text{C}$, alternatively from 0 to 20 $\mu\text{m}/\text{m}^\circ\text{C}$, alternatively from 2 to 10 $\mu\text{m}/\text{m}^\circ\text{C}$, at temperature of from room temperature ($\sim 23 \pm 2$ °C) to 200°C. Also, the film

typically has a tensile strength at 25 °C of from 50 to 200 MPa, alternatively from 80 to 200 MPa, alternatively from 100 to 200 MPa. Further, the reinforced silicone resin film typically has a Young's modulus at 25 °C of from 2 to 10 GPa, alternatively from 2 to 6 GPa, alternatively from 3 to 5 GPa.

[0167] The transparency of the reinforced silicone resin film depends on a number of factors, such as the composition of the cured silicone resin, the thickness of the film, and the refractive index of the fiber reinforcement. The reinforced silicone resin film typically has a transparency (% transmittance) of at least 50%, alternatively at least 60%, alternatively at least 75%, alternatively at least 85%, in the visible region of the electromagnetic spectrum.

[0168] The method of the present invention can further comprise forming a coating on at least a portion of the reinforced silicone resin film. Examples of coatings include, but are not limited to, cured silicone resins prepared by curing hydrosilylation-curable silicone resins or condensation-curable silicone resins; cured silicone resins prepared by curing sols of organosilsesquioxane resins; inorganic oxides, such as indium tin oxide, silicon dioxide, and titanium dioxide; inorganic nitrides, such as silicon nitride and gallium nitride; metals, such as copper, silver, gold, nickel, and chromium; and silicon, such as amorphous silicon, microcrystalline silicon, and polycrystalline silicon.

[0169] The reinforced silicone resin film of the present invention has low coefficient of thermal expansion, high tensile strength, and high modulus compared to an un-reinforced silicone resin film prepared from the same silicone composition. Also, although the reinforced and un-reinforced silicone resin films have comparable glass transition temperatures, the reinforced film exhibits a much smaller change in modulus in the temperature range corresponding to the glass transition.

[0170] The reinforced silicone resin film of the present invention is useful in applications requiring films having high thermal stability, flexibility, mechanical strength, and transparency. For example, the silicone resin film can be used as an integral component of flexible displays, solar cells, flexible electronic boards, touch screens, fire-resistant wallpaper, and impact-resistant windows. The film is also a suitable substrate for transparent or nontransparent electrodes.

EXAMPLES

[0171] The following examples are presented to better illustrate the method and reinforced silicone resin film of the present invention, but are not to be considered as limiting the invention, which is delineated in the appended claims. Unless otherwise noted, all parts and percentages reported in the examples are by weight. The following methods and materials were employed in the examples:

Measurement of Mechanical Properties

[0172] Young's modulus, tensile strength, and tensile strain at break were measured using an MTS Alliance RT/5 testing frame, equipped with a 100-N load cell. Young's modulus, tensile strength, and tensile strain were determined at room temperature ($\sim 23 \pm 2$ °C) for the test specimens of Examples 4 and 5. Young's modulus was measured at -100 °C, 25 °C, 100 °C, 200 °C, 300 °C, and 400 °C, for the test specimens of Examples 6 and 7.

[0173] The test specimen was loaded into two pneumatic grips spaced apart 25 mm and pulled at a crosshead speed of 1 mm/min. Load and displacement data were continuously collected. The steepest slope in the initial section of the load-displacement curve was taken as the Young's modulus. Reported values for Young's modulus (GPa), tensile strength (MPa), and tensile strain (%) each represent the average of three measurements made on different dumbbell-shaped test specimens from the same reinforced silicone resin film.

[0174] The highest point on the load-displacement curve was used to calculate the tensile strength according to the equation:

$$\sigma = F/(wb),$$

where:

σ = tensile strength, MPa,

F = highest force, N,

w = width of the test specimen, mm, and

b = thickness of the test specimen, mm.

[0175] The tensile strain at break was approximated by dividing the difference in grip separation before and after testing by the initial separation according to the equation:

$$\varepsilon = 100(l_2 - l_1)/l_1,$$

where:

ε = tensile strain at break, %,

l_2 = final separation of the grips, mm, and

l_1 = initial separation of the grips, mm.

[0176] WN1500 Vacuum Bagging Film, sold by Airtech, Inc. (Huntington Beach, CA), is a nylon bagging film having a thickness of 50 μm .

[0177] Glass Fabric, which is available from JPS Glass (Slater, SC), is an untreated style 106 electrical glass fabric having a plain weave and a thickness of 37.5 μm .

[0178] Relisse® 2520, sold by Nano Film Inc. (Westlake Village, CA), is a mold release gel.

[0179] Quartz Fabric, available from Fabric Development, Inc. (Quakertown, PA), is sold under the name 4581 Quartz Fabric. The fabric has no sizing and a fiber density of 125 (warp) and 2/0 (fill).

[0180] Quartz Fiber, which is available from Fabric Development, Inc. (Quakertown, PA), is a style 1794 quartz fiber having a 300, 20 end roving. Prior to use, the fiber was heat cleaned at 500 °C for 2 h in an air oven.

Example 1

[0181] This example demonstrates the preparation of the silicone resin used in Examples 4 to 7. Trimethoxyphenylsilane (200 g), tetramethyldivinylidisiloxane (38.7 g), deionized water (65.5 g), toluene (256 g), and trifluoromethanesulfonic acid (1.7 g) were combined in a 3-neck, round-bottom flask equipped with a Dean-Stark Trap and thermometer. The mixture was heated at 60 to 65 °C for 2 hours. The mixture was then heated to reflux and water and methanol were removed using a Dean-Stark trap. When the temperature of the mixture reached 80 °C and the removal of water and methanol was complete, the mixture was cooled to less than 50 °C. Calcium carbonate (3.3 g) and water (about 1 g) were added to the mixture. The mixture was stirred at room temperature for 2 hours and then potassium hydroxide (0.17 g) was added to the mixture. The mixture was then heated to reflux and water was removed using a Dean-Stark trap. When the reaction temperature reached 120 °C and the removal of water was complete, the mixture was cooled to less than 40 °C.

Chlorodimethylvinylsilane (0.37 g) was added to the mixture and mixing was continued at room temperature for 1 hour. The mixture was filtered to give a solution of a silicone resin having the formula $(\text{PhSiO}_{3/2})_{0.75}(\text{ViMe}_2\text{SiO}_{1/2})_{0.25}$ in toluene. The resin has a weight-

average molecular weight of about 1700, has a number-average molecular weight of about 1440, and contains about 1 mol% of silicon-bonded hydroxy groups.

[0182] The volume of the solution was adjusted to produce a solution containing 79.5 percent by weight of the silicone resin in toluene. The resin concentration of a solution was determined by measuring the weight loss after drying a sample (2.0 g) of the solution in an oven at 150 °C for 1.5 hours.

Example 2

[0183] This example describes the preparation of 1,4-bis(dimethylsilyl)benzene.

Magnesium (84 g) and tetrahydrofuran (406 g) were combined under nitrogen in a 5-L, three-neck flask equipped with a mechanical stirrer, condenser, two addition funnels, and thermometer. 1,2-dibromoethane (10 g) was added to the mixture and the contents of the flask were heated to 50 to 60 °C. Tetrahydrofuran (THF, 200 mL) and a solution of 1,2-dibromobenzene (270 g) in THF (526 g) were sequentially added to the mixture, the latter in a drop-wise manner. After about twenty minutes, heating was discontinued and the remainder of the 1,2-dibromobenzene was added over a period of about 1.5 hours at such a rate as to maintain a gentle reflux. During the addition, THF was periodically added to maintain a reaction temperature less than about 65 °C. After the addition of the 1,2-dibromobenzene was complete, THF (500 mL) was added to the flask and the mixture was heated at 65 °C for 5 hours. Heating was discontinued and the reaction mixture was stirred at room temperature overnight under nitrogen.

[0184] THF (500 mL) was added to the mixture and the flask was placed in an ice water bath. A dry-ice condenser was inserted into the top of the water condenser and chlorodimethylsilane (440 g) was added drop-wise to the mixture at such a rate as to maintain reflux. After the addition was complete, the flask was removed from the ice water bath and the mixture was heated at 60 °C overnight. The mixture was cooled to room temperature and treated sequentially with toluene (1000 mL) and saturated aqueous NH_4Cl (1500 mL). The contents of the flask were transferred to a separatory funnel and washed with several portions of water until a substantially transparent organic layer was obtained. The organic layer was removed, dried over magnesium sulfate, and concentrated by distillation until the temperature of the residue reached 150 °C. The concentrated crude product was purified by vacuum distillation. A fraction was collected at 125-159 °C under a pressure of 12 mmHg (1600 Pa)

to give p-bis(dimethylsilyl) benzene (140 g) as a colorless liquid. The identity of the product was confirmed by GC-MS, FT-IR, ^1H NMR, and ^{13}C NMR.

Example 3

[0185] The resin solution of Example 1 was mixed with 1,4-bis(dimethylsilyl)benzene, the relative amounts of the two ingredients sufficient to achieve a mole ratio of silicon-bonded hydrogen atoms to silicon-bonded vinyl groups (SiH/SiVi) of 1.1:1, as determined by ^{29}Si NMR and ^{13}C NMR. The mixture was heated at 80 °C under a pressure of 5 mmHg (667 Pa) to remove the toluene. Then, a small amount of 1,4-bis(dimethylsilyl) benzene was added to the mixture to restore the mole ratio SiH/SiVi to 1.1:1. To the mixture was added 0.5% w/w, based on the weight of the resin, of a platinum catalyst containing 1000 ppm of platinum. The catalyst was prepared by treating a platinum(0) complex of 1,1,3,3-tetramethyldisiloxane in the presence of a large molar excess of 1,1,3,3-tetramethyldisiloxane, with triphenylphosphine to achieve a mole ratio of triphenylphosphine to platinum of about 4:1.

Example 4

[0186] A flat glass plate (25.4 cm x 38.1 cm) was covered with a first Nylon film (WN1500 Vacuum Bagging Film) to form a release liner. The silicone composition of Example 3 was uniformly applied to the Nylon film using a No. 16 Mylar® metering rod to form a silicone film. Glass fabric having the same dimensions as the Nylon film was carefully laid down on the silicone film, allowing sufficient time for the composition to thoroughly wet the fabric. The embedded fabric was then degassed under vacuum (5.3 kPa) at room temperature for 0.5 h. The silicone composition of Example 3 was then uniformly applied to the degassed embedded fabric and the degassing procedure was repeated. The impregnated glass fabric was covered with a second Nylon film (WN1500 Vacuum Bagging Film) and the resulting composite was compressed with a stainless steel roller to drive out air bubbles and excess silicone composition. The composite was heated in an oven under an applied pressure (external weight) of 22.2 N according to the following cycle: room temperature to 100 °C at 1 °C/min., 100 °C for 2 h, 100 °C to 160 °C at 1 °C/min., 160 °C for 2 h, 160 °C to 200 °C at 1 °C/min., 200 °C for 1 h. The oven was turned off and the composite was allowed to cool to room temperature. The glass fiber-reinforced silicone resin film was separated from the Nylon films. The reinforced film had a uniform thickness (0.07 mm) and was substantially transparent and free of voids. The surface of the reinforced film

was embossed with the surface texture of the release liner (Nylon film). The mechanical properties of the glass fiber-reinforced silicone resin film are shown in Table 1.

Example 5

[0187] A glass fiber-reinforced silicone resin film was prepared according to the method of Example 4, except the first Nylon film was replaced with a glass plate. Prior to use, the glass plate was treated with Relisse® 2520 release gel to render the surface hydrophobic, and the treated glass was then washed in mild aqueous detergent and rinsed with water to remove excess gel. The Relisse® 2520 treated glass surface released very easily from the reinforced silicone resin film. The corresponding surface of the reinforced film was smooth, similar to the surface of the glass plate. The mechanical properties of the glass fiber-reinforced silicone resin film are shown in Table 1.

Table 1

Ex.	Thickness (mm)	Tensile Strength (MPa)		Young's Modulus (GPa)		Strain at Break (%)	
		Warp	Fill	Warp	Fill	Warp	Fill
4	0.07	162.1 ± 6.4	-	11.12 ± 0.24	-	1.7 ± 0.1	-
5	0.06	121.9 ± 21.0	123.8 ± 12.3	3.27 ± 0.32	2.55 ± 0.28	4.8 ± 1.0	5.4 ± 0.9

- Denotes value not measured.

Example 6

[0188] A fiber-reinforced silicone resin film was prepared according to the method of Example 4, except quartz fabric was substituted for the glass fabric reinforcement. The Young's moduli of the quartz fiber-reinforced silicone resin film at various temperatures are shown in Table 2.

Example 7

[0189] A fiber-reinforced silicone resin film was prepared according to the method of Example 4, except a quartz roving was substituted for the glass fabric reinforcement. Two strips of double-sided tape were laid down on the first Nylon film parallel to each other and 11.4 cm apart. The quartz roving was prepared by placing quartz fibers having a length of 12.7 cm alongside one another in a parallel alignment, fastening the two ends of the fibers to the strips of double-sided tape. Care was taken to ensure parallelism among the fiber

strands and uniformity of fiber density within the mat. The Young's moduli of the quartz fiber-reinforced silicone resin film at various temperatures are shown in Table 2.

Table 2.

Ex.	Thickness (mm)	Young's Modulus, Warp Direction (MPa)/Temperature (°C)					
		-100 °C	25 °C	100 °C	200 °C	300 °C	400 °C
6	0.07	11.5	10.5	2.7	2.2	2.1	6.1
7	0.06	1.4	2.4	2.8	2.1	3.4	3.8

That which is claimed is:

1. A method of preparing a reinforced silicone resin film, the method comprising the steps of:

impregnating a fiber reinforcement in a hydrosilylation-curable silicone composition comprising a silicone resin; and

heating the impregnated fiber reinforcement at a temperature sufficient to cure the silicone resin; wherein the reinforced silicone resin film comprises from 10 to 99% (w/w) of the cured silicone resin and the film has a thickness of from 15 to 500 μm .

2. The method according to claim 1, wherein the hydrosilylation-curable silicone composition comprises (A) a silicone resin having the formula $(\text{R}^1\text{R}^2_2\text{SiO}_{1/2})_w(\text{R}^2_2\text{SiO}_{2/2})_x(\text{R}^1\text{SiO}_{3/2})_y(\text{SiO}_{4/2})_z$ (I), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin has an average of at least two silicon-bonded alkenyl groups per molecule; (B) an organosilicon compound having an average of at least two silicon-bonded hydrogen atoms per molecule in an amount sufficient to cure the silicone resin; and (C) a catalytic amount of a hydrosilylation catalyst.

3. The method according to claim 1, wherein the hydrosilylation-curable silicone composition comprises (A') a silicone resin having the formula $(\text{R}^1\text{R}^5_2\text{SiO}_{1/2})_w(\text{R}^5_2\text{SiO}_{2/2})_x(\text{R}^5\text{SiO}_{3/2})_y(\text{SiO}_{4/2})_z$ (III), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^5 is R^1 or $-\text{H}$, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin has an average of at least two silicon-bonded hydrogen atoms per molecule; (B') an organosilicon compound having an average of at least two silicon-bonded alkenyl groups per molecule in an amount sufficient to cure the silicone resin; and (C) a catalytic amount of a hydrosilylation catalyst.

4. The method according to claim 1, wherein the hydrosilylation-curable silicone composition comprises (A) a silicone resin having the formula $(R^1R^2_2SiO_{1/2})_w(R^2_2SiO_{2/2})_x(R^1SiO_{3/2})_y(SiO_{4/2})_z$ (I); (B) an organosilicon compound having an average of at least two silicon-bonded hydrogen atoms per molecule in an amount sufficient to cure the silicone resin; (C) a catalytic amount of a hydrosilylation catalyst; and (D) a silicone rubber having a formula selected from (i) $R^1R^2_2SiO(R^2_2SiO)_aSiR^2_2R^1$ (IV) and (ii) $R^5R^1_2SiO(R^1R^5SiO)_bSiR^1_2R^5$ (V); wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, subscripts a and b each have a value of from 1 to 4, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin and the silicone rubber (D)(i) each have an average of at least two silicon-bonded alkenyl groups per molecule, the silicone rubber (D)(ii) has an average of at least two silicon-bonded hydrogen atoms per molecule, and the mole ratio of silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms in the silicone rubber (D) to silicon-bonded alkenyl groups in the silicone resin (A) is from 0.01 to 0.5.

5. The method according to claim 1, wherein the hydrosilylation-curable silicone composition comprises (A') a silicone resin having the formula $(R^1R^5_2SiO_{1/2})_w(R^5_2SiO_{2/2})_x(R^5SiO_{3/2})_y(SiO_{4/2})_z$ (III); (B') an organosilicon compound having an average of at least two silicon-bonded alkenyl groups per molecule in an amount sufficient to cure the silicone resin; (C) a catalytic amount of a hydrosilylation catalyst; and (D) a silicone rubber having a formula selected from (i) $R^1R^2_2SiO(R^2_2SiO)_aSiR^2_2R^1$ (IV) and (ii) $R^5R^1_2SiO(R^1R^5SiO)_bSiR^1_2R^5$ (V); wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, subscripts a and b each have a value of from 1 to 4, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin and the silicone rubber (D)(ii) each have an average of at least two silicon-bonded hydrogen atoms per molecule, the silicone rubber (D)(i) has an average of at least two silicon-bonded alkenyl

groups per molecule, and the mole ratio of silicon-bonded alkenyl groups or silicon-bonded hydrogen atoms in the silicone rubber (D) to silicon-bonded hydrogen atoms in the silicone resin (A') is from 0.01 to 0.5.

6. The method according to claim 1, wherein the hydrosilylation-curable silicone composition comprises (A'') a rubber-modified silicone resin prepared by reacting a silicone resin having the formula $(R^1R^2_2SiO_{1/2})_w(R^2_2SiO_{2/2})_x(R^1SiO_{3/2})_y(SiO_{4/2})_z$ (I) and a silicone rubber having the formula $R^5R^1_2SiO(R^1R^5SiO)_cSiR^1_2R^5$ (VI) in the presence of a hydrosilylation catalyst and, optionally, an organic solvent to form a soluble reaction product, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, subscript c has a value of from greater than 4 to 1,000, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided the silicone resin (I) has an average of at least two silicon-bonded alkenyl groups per molecule, the silicone rubber (VI) has an average of at least two silicon-bonded hydrogen atoms per molecule, and the mole ratio of silicon-bonded hydrogen atoms in the silicone rubber (VI) to silicon-bonded alkenyl groups in silicone resin (I) is from 0.01 to 0.5; (B) an organosilicon compound having an average of at least two silicon-bonded hydrogen atoms per molecule in an amount sufficient to cure the rubber-modified silicone resin; and (C) a hydrosilylation catalyst.

7. The method according to claim 1, wherein the hydrosilylation-curable silicone composition comprises (A''') a rubber-modified silicone resin prepared by reacting a silicone resin having the formula $(R^1R^5_2SiO_{1/2})_w(R^5_2SiO_{2/2})_x(R^5SiO_{3/2})_y(SiO_{4/2})_z$ (III) and a silicone rubber having the formula $R^1R^2_2SiO(R^2_2SiO)_dSiR^2_2R^1$ (VII) in the presence of a hydrosilylation catalyst and, optionally, an organic solvent to form a soluble reaction product, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, R^5 is R^1 or $-H$, subscript d has a value of from greater than 4 to 1,000, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from

0.01 to 0.8, provided the silicone resin (III) has an average of at least two silicon-bonded hydrogen atoms per molecule, the silicone rubber (VII) has an average of at least two silicon-bonded alkenyl groups per molecule, and the mole ratio of silicon-bonded alkenyl groups in the silicone rubber (VII) to silicon-bonded hydrogen atoms in the silicone resin (III) is from 0.01 to 0.5; (B') an organosilicon compound having an average of at least two silicon-bonded alkenyl groups per molecule in an amount sufficient to cure the rubber-modified silicone resin; and (C) a catalytic amount of a hydrosilylation catalyst.

8. The method according to any of the preceding claims, wherein the hydrosilylation-curable silicone composition further comprises (E) a reactive diluent comprising (i) an organosiloxane having an average of at least two silicon-bonded alkenyl groups per molecule and a viscosity of from 0.001 to 2 Pa·s at 25 °C, wherein the viscosity of (E)(i) is not greater than 20% of the viscosity of the silicone resin of the silicone composition and the organosiloxane has the formula $(R^1R^2_2SiO_{1/2})_m(R^2_2SiO_{2/2})_n(R^1SiO_{3/2})_p(SiO_{4/2})_q$, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^2 is R^1 or alkenyl, m is 0 to 0.8, n = 0 to 1, p = 0 to 0.25, q = 0 to 0.2, $m+n+p+q=1$, and $m+n$ is not equal to 0, provided when $p+q=0$, n is not equal to 0 and the alkenyl groups are not all terminal, and (ii) an organohydrogensiloxane having an average of at least two silicon-bonded hydrogen atoms per molecule and a viscosity of from 0.001 to 2 Pa·s at 25 °C, in an amount sufficient to provide from 0.5 to 3 moles of silicon-bonded hydrogen atoms in (E)(ii) per mole of alkenyl groups in (E)(i), wherein the organohydrogensiloxane has the formula $(HR^1_2SiO_{1/2})_s(R^1SiO_{3/2})_t(SiO_{4/2})_v$, wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, s is from 0.25 to 0.8, t is from 0 to 0.5, v is from 0 to 0.3, $s+t+v=1$, and $t+v$ is not equal to 0.

9. The method according to claims 2, 4, or 6, wherein the organosilicon compound of component (B) is an organohydrogenpolysiloxane resin having the formula $(R^1R^4_2SiO_{1/2})_w(R^4_2SiO_{2/2})_x(R^1SiO_{3/2})_y(SiO_{4/2})_z$ (II), wherein R^1 is C_1 to C_{10} hydrocarbyl or C_1 to C_{10} halogen-substituted hydrocarbyl, both free of aliphatic unsaturation, R^4 is R^1 or an organosilylalkyl group having at least one silicon-bonded hydrogen atom, w is from 0 to 0.8, x is from 0 to 0.6, y is from 0 to 0.99, z is from 0 to 0.35, $w+x+y+z=1$, $y+z/(w+x+y+z)$ is from 0.2 to 0.99, and $w+x/(w+x+y+z)$ is from 0.01 to 0.8, provided at least 50 mol% of the groups R^4 are organosilylalkyl.

10. The method according to claim 1, wherein the step of impregnating the fiber reinforcement comprises (i) applying a hydrosilylation-curable silicone composition to a release liner to form a silicone film; (ii) embedding a fiber reinforcement in the film; (iii) degassing the embedded fiber reinforcement; and (iv) applying the silicone composition to the degassed embedded fiber reinforcement to form an impregnated fiber reinforcement.

11. The method according to claim 1, wherein the step of impregnating the fiber reinforcement comprises (i) depositing a fiber reinforcement on a first release liner; (ii) embedding the fiber reinforcement in a hydrosilylation-curable silicone composition; (iii) degassing the embedded fiber reinforcement; and (iv) applying the silicone composition to the degassed embedded fiber reinforcement to form an impregnated fiber reinforcement.

12. The method according to claim 1, wherein the fiber reinforcement is a woven fabric or a non-woven fabric and the step of impregnating the fiber reinforcement comprises passing the fabric through the hydrosilylation-curable silicone composition.

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2006/003536

A. CLASSIFICATION OF SUBJECT MATTER
INV. C08L83/04 B32B25/20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08L B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 126 535 A (DOW CORNING CORPORATION) 28 November 1984 (1984-11-28) claims; example 8	1-9,12
X	US 2004/166332 A1 (ZHU BIZHONG ET AL) 26 August 2004 (2004-08-26) claims; examples	1-12
X	EP 0 850 998 A (DOW CORNING CORPORATION; MASSACHUSETTS INSTITUTE OF TECHNOLOGY) 1 July 1998 (1998-07-01) page 7, lines 16-50 page 9, lines 9-55	1-12

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

24 May 2006

Date of mailing of the international search report

02/06/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kolitz, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2006/003536

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0126535	A	28-11-1984	CA 1227625 A1	06-10-1987
			DE 3473436 D1	22-09-1988
			JP 1467073 C	30-11-1988
			JP 59199547 A	12-11-1984
			JP 63016350 B	08-04-1988
			US 4460640 A	17-07-1984
US 2004166332	A1	26-08-2004	EP 1597070 A1	23-11-2005
			WO 2004076175 A1	10-09-2004
EP 0850998	A	01-07-1998	DE 69728846 D1	03-06-2004
			DE 69728846 T2	21-04-2005
			JP 10212410 A	11-08-1998
			US 6046283 A	04-04-2000