

(11)

EP 1 637 934 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
22.03.2006 Bulletin 2006/12

(51) Int Cl.:
G03G 15/00 (2006.01)

(21) Application number: **05108099.2**

(22) Date of filing: **05.09.2005**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC NL PL PT RO SE SI
SK TR**
Designated Extension States:
AL BA HR MK YU

(71) Applicant: **Océ-Technologies B.V.**
5914 CC Venlo (NL)

(72) Inventor: **Smeyers, Johannes H.L.**
5924 EH, Venlo (NL)

(74) Representative: **Vanoppen, Ronny R.J. et al**
Océ-Technologies B.V.
Postbus 101
NL-5900 MA Venlo (NL)


(30) Priority: **20.09.2004 EP 04104533**

(54) Image registration device

(57) An image registration device for an image production system is disclosed which adjusts any axial image misregistration in situ and quasi instantaneously. This image registration device comprises in operation a rotating image carrying element (1) and a rotating image receiving element (7) in rolling contact with each other

and each having a flange (41,42) co-axially mounted on their respective shafts. The image registration device includes a further rotating element (50) in rolling contact with the flanges (41,42) of the rotating elements to ensure that the image carrying element axially follows the image receiving element or vice versa to establish axial image registration.

Fig.1

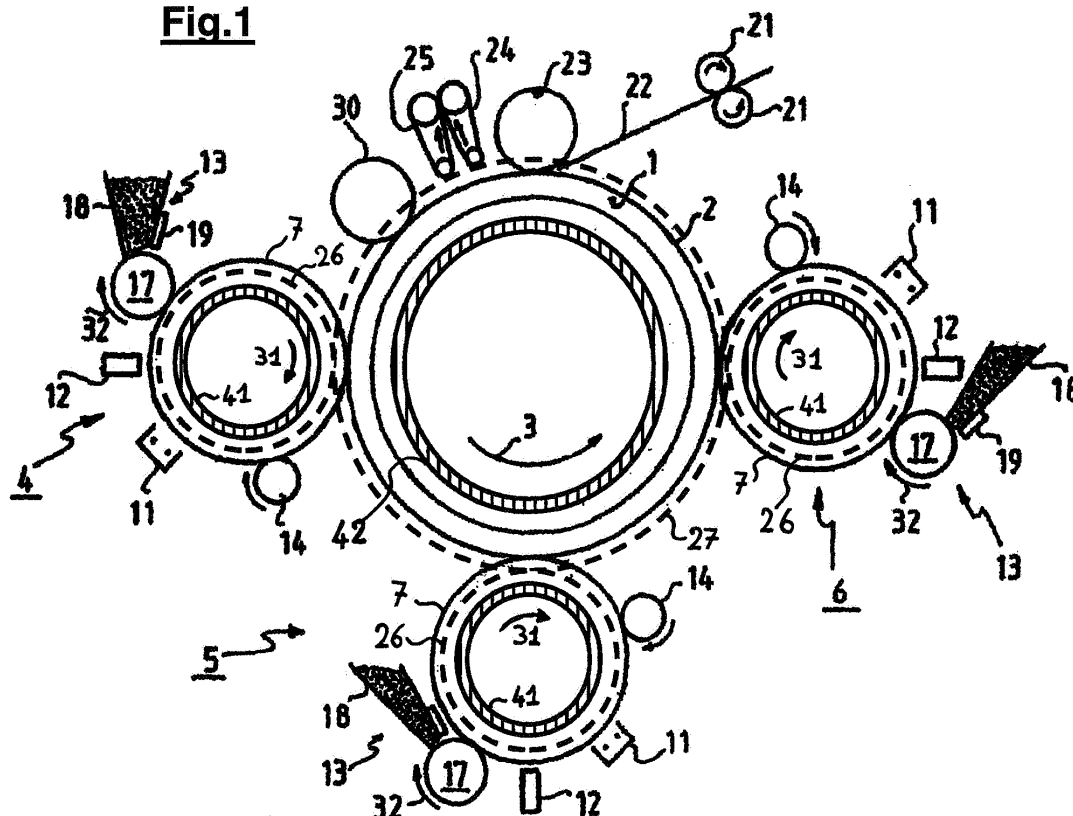

Description

FIELD OF THE INVENTION

[0001] The present invention is directed to an image registration device for an image production system for transferring separation images of a marking substance, including ink and toner, in register from a rotatable image-carrying member to a rotatable image-receiving member.

BACKGROUND OF THE INVENTION

[0002] Image production systems, such as printers and copiers, often include a rotatable image-receiving member, usually in the form of a belt or a drum, for receiving on its surface a marking substance, such as toner or ink, in image form from a rotatable image carrying member, usually also in the form of a drum or a belt. The image-receiving member may either receive the image directly on its surface or on a recording medium conveyed on its surface. The images of marking substance are transferred from the image-carrying member to the image-receiving member in a transfer zone where the image-receiving member and the image-carrying member are in rolling contact. The transfer may take place by means of pressure, or heat, or electrostatic forces, or magnetic forces, or vibrational forces, or a combination of some of the afore-mentioned forces and effects. The image may be a monochrome image or a composite image. In the latter case, to enable multi-colour printing, a plurality of process colours and a plurality of image-carrying members may be provided, each image-carrying member for carrying a separation image of the respective process colour. In operation, each of the plurality of image carrying members is engaged in rolling contact with the image-receiving member along its path of rotation thereby defining transfer zones where the separation images of the respective process colours are sequentially transferred in registration to the image-receiving member thereby forming a composite image of marking substance. The slightest misregistration may already lead to visual print quality degradation. To form an accurate and clear composite image on the image-receiving member, the rotational and lateral position of the respective image carrying members as well as the image receiving member must be mutually precisely aligned and this alignment must be maintained in use. Rotational position errors lead to registering errors in the process direction, i.e. the propagation direction of the medium. This phenomenon is also referred to as tangential image misregistration. Tangential image misregistration is usually controlled by adequately controlling the timing of the formation of the respective separation images and any subsequent image transfers. Lateral position errors lead to registering errors along the axis of rotation of the respective image-carrying and/or image-receiving members, i.e. the direction perpendicular to the process direction. This phenomenon is

also referred to as axial image misregistration. For instance, lateral position errors may be caused by wobbling of a rotating image-carrying and/or image-receiving member, thermal effects resulting in variations of the dimensions or position of the image-carrying and/or image-receiving member. To prevent or at least limit axial image misregistration, one may opt to form register marks in the respective process colours on the respective image carrying member and subsequently transfer them to the image-receiving member. By determining the axial positions of the respective register marks on the image receiving member or on the recording medium, an indication may be obtained for the potential axial disposition of an image-carrying element with respect to the image-receiving element or with respect to any other image-carrying element. This determination may be done by means of an image sensing device and may be done periodically or continuously, i.e. without interrupting the printing process. Control means and displacement means may be provided to adjust responsive to such indication the lateral position of one or more image-carrying elements and/or the image receiving element. Examples of displacement means include a lateral positioning motor, as disclosed in US4,135,664, or an actuator. Although the described approach for limiting axial image misregistration may work fine in most operating conditions, it does not deal effectively with sudden changes in the lateral position of one or more of the cycling members, such as e.g. changes caused by leaning on or accidentally pushing against the printing system. In the latter case, printing is to be stopped and the system has to be re-calibrated before continuing printing.

[0003] Thus it is an object of the present invention to provide an image registration device which allows for an improved axial image registration in all circumstances.

[0004] It is a further object of the present invention to provide an image registration device adjusting any axial image misregistration in situ and quasi instantaneously without affecting the productivity of the image production system.

[0005] To meet these objects, according to the present invention there is provided an image registration device for an image production system comprising a first rotatable element for carrying images of marking substance on its surface, the first rotatable element being provided with a first shaft and a first flange co-axially mounted on the first shaft adjacent the first rotatable element; and a second rotatable element for receiving on its surface images from the first rotatable element, the second rotatable element being mounted axially parallel with the first rotatable element such that in operation the second rotatable element is in rolling contact with the first rotatable element, the second rotatable element being provided with a second shaft and a second flange co-axially mounted on the second shaft adjacent the second rotatable element at the corresponding side compared to the mounting of the first flange;

characterised in that the image registration device further comprises:

a third rotatable element and pressure exerting means for pressing in operation the third rotatable element with a predetermined pressure in rolling contact with the first flange and the second flange such that one of the first and second rotatable element axially follows the other one. The image carrying element may be the or one of the image forming elements, while the image receiving element is a conveyor roller which is engaged in contact with the image forming element thereby defining a transfer zone through which the recording medium is conveyed either in web or in sheet form. Separate means may be provided to controllably align the recording medium with respect to the conveyor roller. Instead of a conveyor roller also a conveyor belt may be used. In the latter case the image receiving element may be the backing roller which is engaged in contact with the image forming element thereby defining a transfer zone through which both the recording medium and the conveyor belt are conveyed. Separate means may be provided to controllably align the recording medium with respect to the conveying belt and the conveying belt with respect to the backing roller.

[0006] The present invention is particularly relevant to printers and copiers where, to enable printing on a wide variety of recording media, an intermediate image transfer member is provided to transfer an image of marking substance originating from one or more image forming members via the intermediate image transfer member(s) to the recording medium. In such systems, the rotatable image carrying member may be one of the image forming members, while the rotatable image receiving member may be the intermediate image transfer member. Alternatively, the image carrying element may be the intermediate image transfer member, while the image receiving element is a conveyor roller which is engaged in contact with the intermediate image transfer member thereby defining a transfer zone through which the recording medium is conveyed either in web or in sheet form.

[0007] The feature that in operation the rotating image carrying element is enforced to axially follow the rotating image receiving element or vice versa by a mechanic construction using flanges on the respective rotating elements and a further rotating element in rolling contact with the flanges is advantageous as it allows to adjust any axial mispositioning quasi instantaneously and continuously. As this takes place in the operative state, i.e. the recording medium is fed in sheet or in web form through the transfer zone and hence prints or copies of images are generated, this registration process does not negatively affect the productivity of the printer or copier. When pressing the further rotating element towards the flanges with a predetermined pressure, the configuration

is such that either the image carrying element or the image receiving element remains in position. In other words, the rotatable element which maintains its axial position despite the predetermined pressure exerted by the pressure exerting means, is axially confined. For instance, in order to axially confine one of the rotatable elements, one may opt to rigidly connect that rotatable element to the base support frame of the image production system.

10 Preferably the axially confined element is the image receiving element. In the latter case, the image carrying element is mounted such that it can move in the axial direction when pressing the further rotatable element against its flange with the predetermined pressure. In particular the image carrying element is forced towards the further rotatable element with a fixed force being balanced against the force exerted on the flange of the image carrying element by the further rotatable element which is pressed towards the flanges with a predetermined fixed pressure. By consequence, the image carrying element will axially follow the axially confined image receiving element.

[0008] In an embodiment according to the present invention, the pressure exerting means for pressing the third rotatable element towards the flanges is an elastic pressure exerting means. In particular, the elastic pressure exerting means may comprise a first spring for pressing the third rotatable element towards the first and second flange and a second spring for pressing the non-confined one of the first and second rotatable element towards the third rotatable element.

[0009] In case of a printer or copier having an intermediate image transfer member, the axially confined element is preferably the intermediate image transfer member.

The image carrying element and the image receiving element may be selectively movable into and out of contact with each other and may be independently driven. Alternatively, these items can be driven by the movement of the image receiving element. The third rotatable element usually is a cylindrical element such as e.g. a roller.

[0010] The kind of marking substance and image forming member which is used depends on the imaging technique used. Examples of imaging techniques include ink jet, electrography including electrophotography, and magnetography. Examples of marking substance include ink, dry particulate toner, and liquid toner. For instance in case of electrophotography, the marking substance may be a dry particulate toner, while the image forming member is a drum or a belt with a photoconductive outer layer whereon a latent image is formed and subsequently developed with toner.

[0011] In another embodiment according to the present invention, the angle between the rotation axis of the third rotatable element and the first shaft can be chosen and set in the range from 85 degrees to 95 degrees. To accomplish this, control means may be provided for controlling the angle between the rotation axis of the third

rotatable element and the first shaft.

[0012] In yet another embodiment according to the present invention, the image receiving element of the image registration device is axially confined. Instead of a single image carrying element, a plurality of rotatable image carrying elements is provided each for carrying images of marking substance on its surface, each of the plurality of image carrying elements being provided with a first shaft and a first flange co-axially mounted on the first shaft adjacent the respective image carrying element. The image registration device further comprises a plurality of third rotatable elements and a plurality of pressure exerting means, each of the plurality of pressure exerting means for pressing in operation each of the plurality of third rotatable elements with a predetermined pressure in rolling contact with the flange of the respective image carrying element and the flange of the image receiving element such that each of the image carrying elements follows the axially confined image receiving element. Preferably, each of the angles between the rotation axis of each of the third rotatable elements and the shaft of the corresponding image carrying element is substantially the same.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013]

Figure 1 is a schematic illustration of a printer according to an embodiment of the present invention.

Figure 2 is a schematic illustration of an image registration device according to an embodiment of the present invention.

Figure 3 is a schematic illustration of the mounting of an image registration device to a printer according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0014] In relation to the appended drawings, the present invention is described in detail in the sequel. Several embodiments are disclosed. It is apparent however that a person skilled in the art can imagine several other equivalent embodiments or other ways of executing the present invention, the scope of the present invention being limited only by the terms of the appended claims.

[0015] A printing system capable of printing on sheets of a recording medium is depicted in Fig.1. The printing system comprises an image transfer member, which can be moved cyclically. The image transfer member is an endless member, such as e.g. a drum or a belt. In this case the image transfer member is a cylindrical drum (1), which can be moved in the direction of arrow (3). The image transfer member is constructed of a metal sleeve, e.g. aluminium, with an elastomeric covering (2). Optionally, the image transfer member may be provided with

an outer layer of silicone rubber, or a PTFE, or a fluororubber, e.g. by means of coating. One or more process colours are available on the printing system dependent whether it concerns a monochrome or a multi-colour printing system. For each process colour, an image forming unit (4)(5)(6) is disposed along the path of rotation of the intermediate transfer member. Each of these image forming units comprises a cylindrical image forming member (7) on which a colour separation image of the corresponding process colour is formed. In an operative state, the image forming members are all in pressure contact with the image transfer member, the force with which the image forming members are pressed against the image transfer member being at maximum 1100 N per linear metre, e.g. 250 N per linear metre. Each image forming member is formed of a metal drum with a photo-conductive outer layer thereon, the various image forming devices being positioned along the circumference of the image forming member. These image forming devices comprise a charging device (11), e.g. a corona device, an exposing device (12), e.g. a LED array, for image-wise exposure of the photo-conductive surface to thereby form a latent charge image thereon, a development device (13) for developing the latent image with marking substance, a cleaning device (14) for removing any residual marking substance present on the image forming member after transfer of the developed separation image to the image transfer member. The development device is in this case a magnetic brush development device which comprises a magnetic roller (17) consisting of a rotatable sleeve with a stationary magnet system therein. The magnetic roller is positioned along the circumference of the image forming member with its surface at short distance from the image forming member surface without contacting it. A reservoir (18) with electrically conductive magnetically attractable dry particulate toner is positioned near the surface of each of the magnetic rollers (17). Each reservoir contains toner in one of the process colours. A stripper (19) is provided at each reservoir to ensure that an even layer of particulate toner is applied to the sleeve of the magnetic roller.

[0016] Also disposed along the path of rotation of the image transfer member (1) is a rotatable counter roller (23) and a rotatable cleaning roller (30). The counter roller is selectively movable towards and away from the image transfer member surface with controlled pressure. Means (not shown) are provided to drive this counter member. When pressing the counter member against the image transfer member surface a transfer zone is defined through which in operation sheets of recording medium are passed using feed means and sheet discharging means. This feed means consists of co-operating conveyor rollers (21) and a guide plate (22). The sheet discharging means includes co-operating conveyor belts (24) (25). The rotatable cleaning roller has a tacky surface. The cleaning roller (30) may be driven by drive means (not shown) and is selectively movable into and out-of an operative position in which the cleaning mem-

ber surface is in contact with the image transfer member surface.

[0017] In one embodiment, also referring to Fig.2, the printer comprises an image registration device having a plurality of image carrying elements, being the rotatable image forming drums (7), and a rotatable image receiving element, being the image transfer drum (1). Each of the image forming drums has a shaft and is driven by a first gearwheel (26) co-axially mounted thereon. Each first gearwheel (26) engages a second gearwheel (27), which is co-axially mounted on the driven shaft of the image receiving drum. First gearwheel (26) and second gearwheel (27) are also indicated in Fig.1 in the form of interrupted circles which also indicate the pitch circle of each gearwheel. The transmission ratio between the second gearwheel and the first gearwheel is selected to be about the same or slightly greater than the transmission ratio that would occur if the image carrying drum and the image receiving drum would be driven only by friction as a result of the pressure contact. A first flange (41) is mounted between the first gearwheel and the bearings (49) of each of the image forming drums, while a second flange is mounted between the second gearwheel (27) and the bearings (49) of the image receiving drum. The image registration device also comprises for each image forming drum an associated further rotatable element (50). In operation, pressure contact is provided between each of these further rotating elements and both the first flange of the corresponding image forming drum (7) and the second flange of the image receiving drum. Means may be provided to set the angle between the rotation axis of each of the further rotatable elements (50) and the associated first shaft. This angle can be selected and set in the range from 85 degrees to 95 degrees. Preferably, each of the angles between the rotation axis of each of the further rotatable elements and the first shaft of the corresponding image carrying drum is substantially the same. The further rotatable elements are rollers, further referred to as follower rollers. A follower roller may have a diameter in the range from 1 cm to 5 cm, more preferably from 1 cm to 2 cm, and a length in the range from 1 cm to 15 cm, more preferably from 1 cm to 5 cm. It is advantageous to limit the mutual distance between the first and second flange and by consequence the length of the follower roller to minimise the influence of wobbling of the follower roller on the axial image registration. Preferably all follower rollers have substantially the same dimensions and all image carrying drums have substantially the same dimensions. The first and second flanges are made of stainless steel and are ring-shaped. Other stiff materials which are sufficiently resistant against wear may however also be used. The flanges typically have a limited thickness of e.g. about 2 mm. The thickness is the dimension in axial direction. The outer diameter of the ring-shaped flanges is preferably smaller than the outer diameter of the corresponding drum. More preferably the ratio between the outer diameter of the second flange and the diameter of the first flange is about the

same as the transmission ratio between the second and first gearwheel. Doing so assures a slipless rolling contact between the follower roller and the corresponding flanges. Optionally for each flange a scraping blade may be provided for contacting the contact surface thereof to remove any contaminants, including marking substance, present thereon. Preferably, these scraping blades are made of polyimide.

[0018] By axially confining the image receiving drum and maintaining pressure contact between each of the follower rollers and both the associated first flange and the second flange, each of the image carrying drums is enforced to axially follow the image receiving drum. There are several implementations possible. An exemplary implementation is depicted in Fig.3. In particular, Fig.3 schematically demonstrates how an image registration device is mounted to the printer and which pressure exerting means (47)(48) is provided to establish and maintain rolling contact in operation between a follower roller and the flanges (41) (42) on the image carrying drum (7) and the image receiving drum respectively. Rigid connections (51) are provided connecting the image receiving drum to the base support frame (43) of the printer. The image carrying drum is mounted to the drum support frame which is rigidly connected to an intermediate support frame (44). This intermediate support is suspended on the base support frame (43) by means of two leave springs (46) such that it is able to move in the axial direction but is confined in the tangential direction. A pre-tensioned pulling spring (47) is provided between the intermediate support frame and the base support frame, which exerts a first force on the image carrying drum to push the image carrying drum towards the follower roller. A pre-tensioned pushing spring (48) is provided between the follower roller and the intermediate support frame which exerts a predetermined second force on the follower roller to push the follower roller against the first flange (41) and the second flange (42). The pre-tensioning of the respective springs should be such that the first force is smaller than the second force. Preferably this first force is in the range between 20 and 80 percent of the second force. More preferably, the first force is between 30 and 50 percent of the second force. The second force is typically about 30N.

[0019] In operation, in order to reproduce an image on a printing system, a sequence of printing signals is generated. Responsive to this sequence of printing signals the printing system sequentially forms the respective separation images of marking substance of the corresponding process colour on the respective image forming members (7). In the respective pressure contact zones with the image transfer, the respective separation images are sequentially transferred to the image transfer member to thereby form a multi-colour image thereon. To ensure that a registered multi-colour image is formed on the image transfer member, the separation images need to be transferred to the image transfer member in register. The registration in the tangential direction is amongst oth-

ers accomplished by accurately timing the respective separation image formation and transfer processes and by the direct mechanical coupling between the image forming members and the image transfer member using gearwheels (26)(27). The registration in the axial direction between the respective separation images is accomplished by using the image registration device of Fig.2 and Fig.3 by providing for each image forming drum a follower roller which in operation is in rolling contact with both the flange on the associated image forming drum and the axially confined image transfer drum. Each follower roller is pressed towards the flange of the corresponding image forming drum and the flange of the image transfer drum with a second force exerted by spring (48) and being greater than the first force resulting from spring (47) and used for pressing the image forming drum towards the follower roller. The configuration is such that in balance, i.e. when the first force is equal to the force exerted by the follower roller on the flange of the image forming drum, the image forming drum and the image transfer drum are in a position resulting in perfect axial registration. When all the image forming drum are in balance, a registered multi-colour image is formed on the image transfer member. When one of the image forming drum is in temporarily unbalance, e.g. caused by a person leaning on the printer, the pressure of the associated rotating follower roller on the flange of the image forming drum will quasi instantaneously change thereby enforcing the image forming drum to axially follow the image transfer drum. Hence such disruption will have no or only limited influence on the registration of the images. The registered multi-colour toner image on the image transfer member is heated by means known per se so that the marking substance, in casu dry particulate toner, softens and is rendered tacky. The printing system is such that the respective separation images of marking particles are formed complementary. This means that marking particles of a process colour are accumulated on the free surface of the image-carrying member and substantially not on coloured marking particles already accumulated on the image-carrying member. Substantially not means that any superimposed marking particles of different process colours may not lead to visual deficiencies, i.e. visual with the naked human eye, in the finally printed image. The printing system subsequently transfers the registered multi-colour toner image to a sheet of a recording medium which is controllably fed at the appropriate time by the conveyor rollers (21) through the transfer zone defined by establishing pressure contact between the rotating image transfer member and the rotating counter member. The sheet carrying the printed image is subsequently discharged by the co-operating conveyor belts (24) and (25). The image transfer member is further advanced towards the cleaning zone where any contaminants present on its surface may be removed by transferring them to the tacky surface of the rotating cleaning roller (30).

Claims

1. An image registration device for an image production system comprising
a first rotatable element for carrying images of marking substance on its surface, the first rotatable element being provided with a first shaft and a first flange co-axially mounted on the first shaft adjacent the first rotatable element; and
a second rotatable element for receiving on its surface images from the first rotatable element, the second rotatable element being mounted axially parallel with the first rotatable element such that in operation the second rotatable element is in rolling contact with the first rotatable element, the second rotatable element being provided with a second shaft and a second flange co-axially mounted on the second shaft adjacent the second rotatable element at the corresponding side compared to the mounting of the first flange;
characterised in that the image registration device further comprises:
a third rotatable element and pressure exerting means for pressing in operation the third rotatable element with a predetermined pressure in rolling contact with the first flange and the second flange such that one of the first and second rotatable element axially follows the other one.
2. An image registration device as recited in claim 1, wherein only one of the first and second rotatable element is axially confined such that the other non-confined one axially follows the confined one.
3. An image registration device as recited in claim 2, wherein the pressure exerting means is an elastic pressure exerting means.
4. An image registration device as recited in claim 3, wherein the elastic pressure exerting means comprises a first spring for pressing the third rotatable element towards the first and second flange and a second spring for pressing the non-confined one of the first and second rotatable element towards the third rotatable element.
5. An image registration device as recited in claims 2 to 4, wherein the image production system comprises a base support frame, and wherein the axially confined one of the first and second rotatable element is rigidly connected to the base support frame.
6. An image registration device as recited in any preceding claim, wherein the angle between the rotation axis of the third rotatable element and the first shaft is in the range from 85 degrees to 95 degrees.

7. An image registration device as recited in claim 6, further comprising control means for controlling the angle between the rotation axis of the third rotatable element and the first shaft.
- 5
8. An image registration device as recited in claims 2 to 7, wherein the axially confined one of the first and second rotatable element is the second rotatable element.
- 10
9. An image registration device as recited in claim 8, wherein the first rotatable element is replaced by a plurality of first rotatable elements each for carrying images of marking substance on its surface, each being provided with a first shaft and a first flange co-axially mounted on the first shaft adjacent the respective first rotatable element, the image registration device further comprising a plurality of third rotatable elements and a plurality of pressure exerting means, each of the plurality of pressure exerting means for pressing in operation each of the plurality of third rotatable elements with a predetermined pressure in rolling contact with the first flange and the second flange such that each of the plurality of first rotatable elements follows the axially confined second rotatable element.
- 15
- 20
- 25
- 30
10. An image registration device as recited in claim 9, wherein each of the angles between the rotation axis of each of the third rotatable elements and each first shaft of the corresponding first rotatable element is substantially the same.

35

40

45

50

55

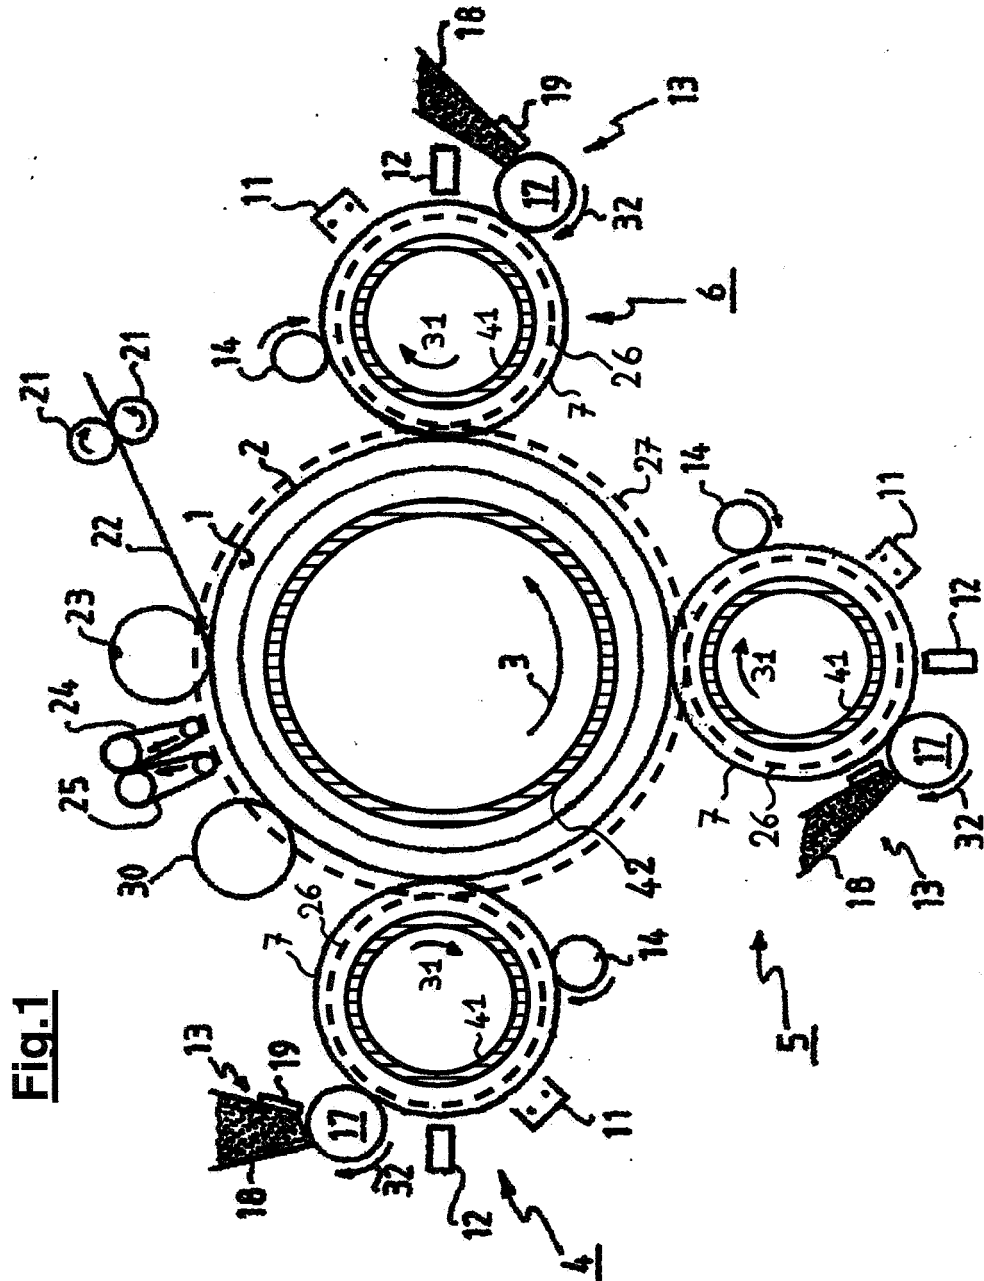


Fig.2


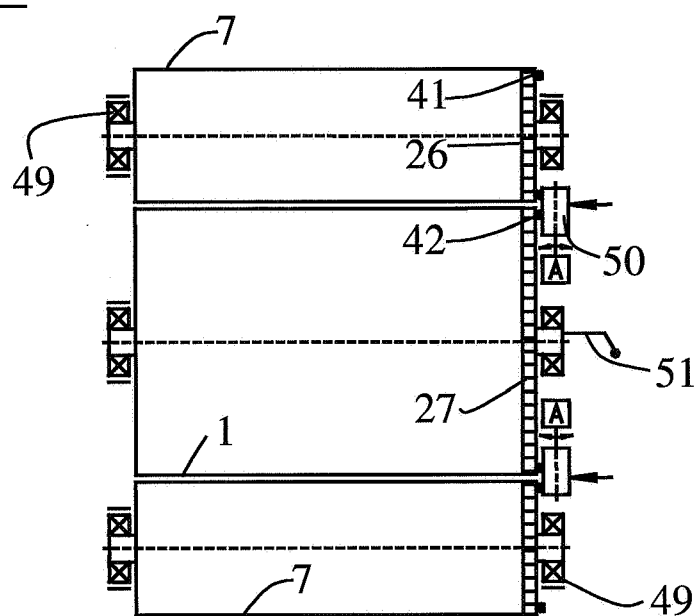


Fig.3



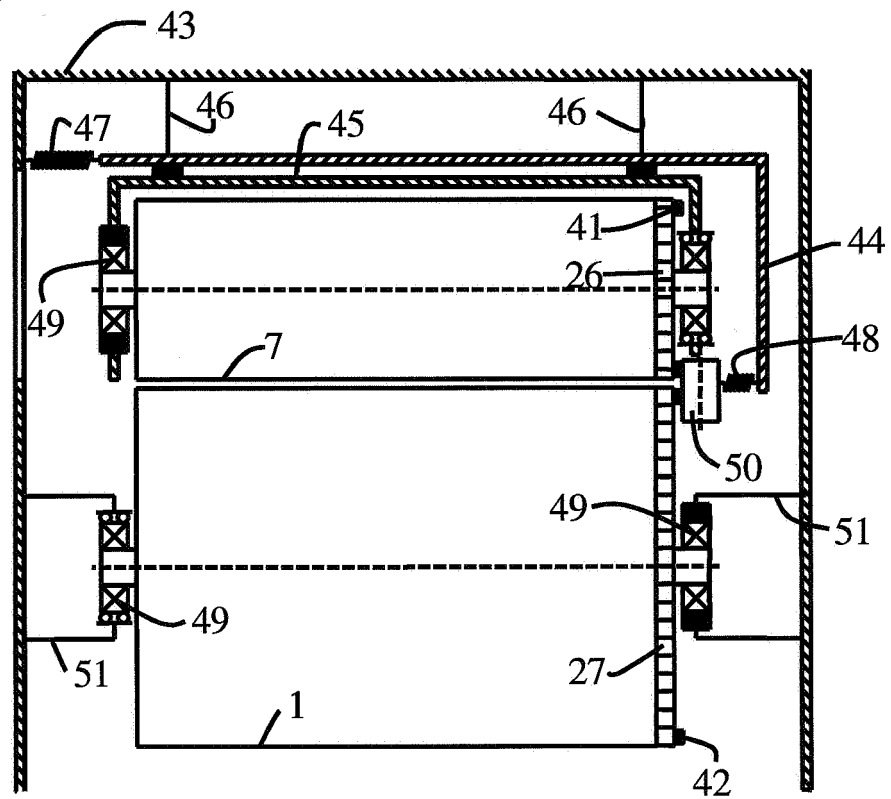

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 05 10 8099

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	DE 31 38 755 A1 (TOKYO SHIBAURA DENKI K.K; KABUSHIKI KAISHA TOSHIBA, KAWASAKI, KANAGAWA) 6 May 1982 (1982-05-06) * page 18, line 24 - page 19, line 37; figures 20,21 *	1-10	G03G15/00
A	----- PATENT ABSTRACTS OF JAPAN vol. 2003, no. 02, 5 February 2003 (2003-02-05) -& JP 2002 287570 A (BROTHER IND LTD), 3 October 2002 (2002-10-03) * abstract *	1	
A	----- PATENT ABSTRACTS OF JAPAN vol. 1996, no. 07, 31 July 1996 (1996-07-31) -& JP 08 063043 A (RICOH CO LTD), 8 March 1996 (1996-03-08) * abstract *	1	

The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G03G B65H
Place of search			Date of completion of the search
Munich			7 October 2005
Examiner			Lipp, G
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

3
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 05 10 8099

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-10-2005

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3138755 A1	06-05-1982	JP 1018426 B	05-04-1989
		JP 1546720 C	28-02-1990
		JP 57060347 A	12-04-1982
JP 2002287570 A	03-10-2002	US 2002141780 A1	03-10-2002
JP 08063043 A	08-03-1996	JP 3349596 B2	25-11-2002