



(22) Date de dépôt/Filing Date: 1997/08/29

(41) Mise à la disp. pub./Open to Public Insp.: 1998/03/20

(45) Date de délivrance/Issue Date: 2003/12/30

(62) Demande originale/Original Application: 2 214 597

(30) Priorité/Priority: 1996/09/20 (8-250492) JP

(51) Cl.Int.⁷/Int.Cl.⁷ B65H 23/08, B65B 43/04, B65B 47/02

(72) Inventeurs/Inventors:

YUYAMA, SHOJI, JP;
NOSE, HIROSHI, JP;
YASUNAGA, ITSUO, JP;
ETOU, NAOMICHI, JP;
AMANO, HIROKAZU, JP


(73) Propriétaire/Owner:

KABUSHIKI KAISHA YUYAMA SEISAKUSHO, JP

(74) Agent: FETHERSTONHAUGH & CO.


(54) Titre : SYSTEME DE DETECTION MAGNETIQUE A TUYAU CENTRAL PERMETTANT DE REGLER LA TENSION
DE PAPIER EN FEUILLES ENROULE

(54) Title: CORE PIPE BASED MAGNETIC SENSING SYSTEM FOR ADJUSTING TENSION IN ROLLS OF WINDING
SHEET MATERIAL

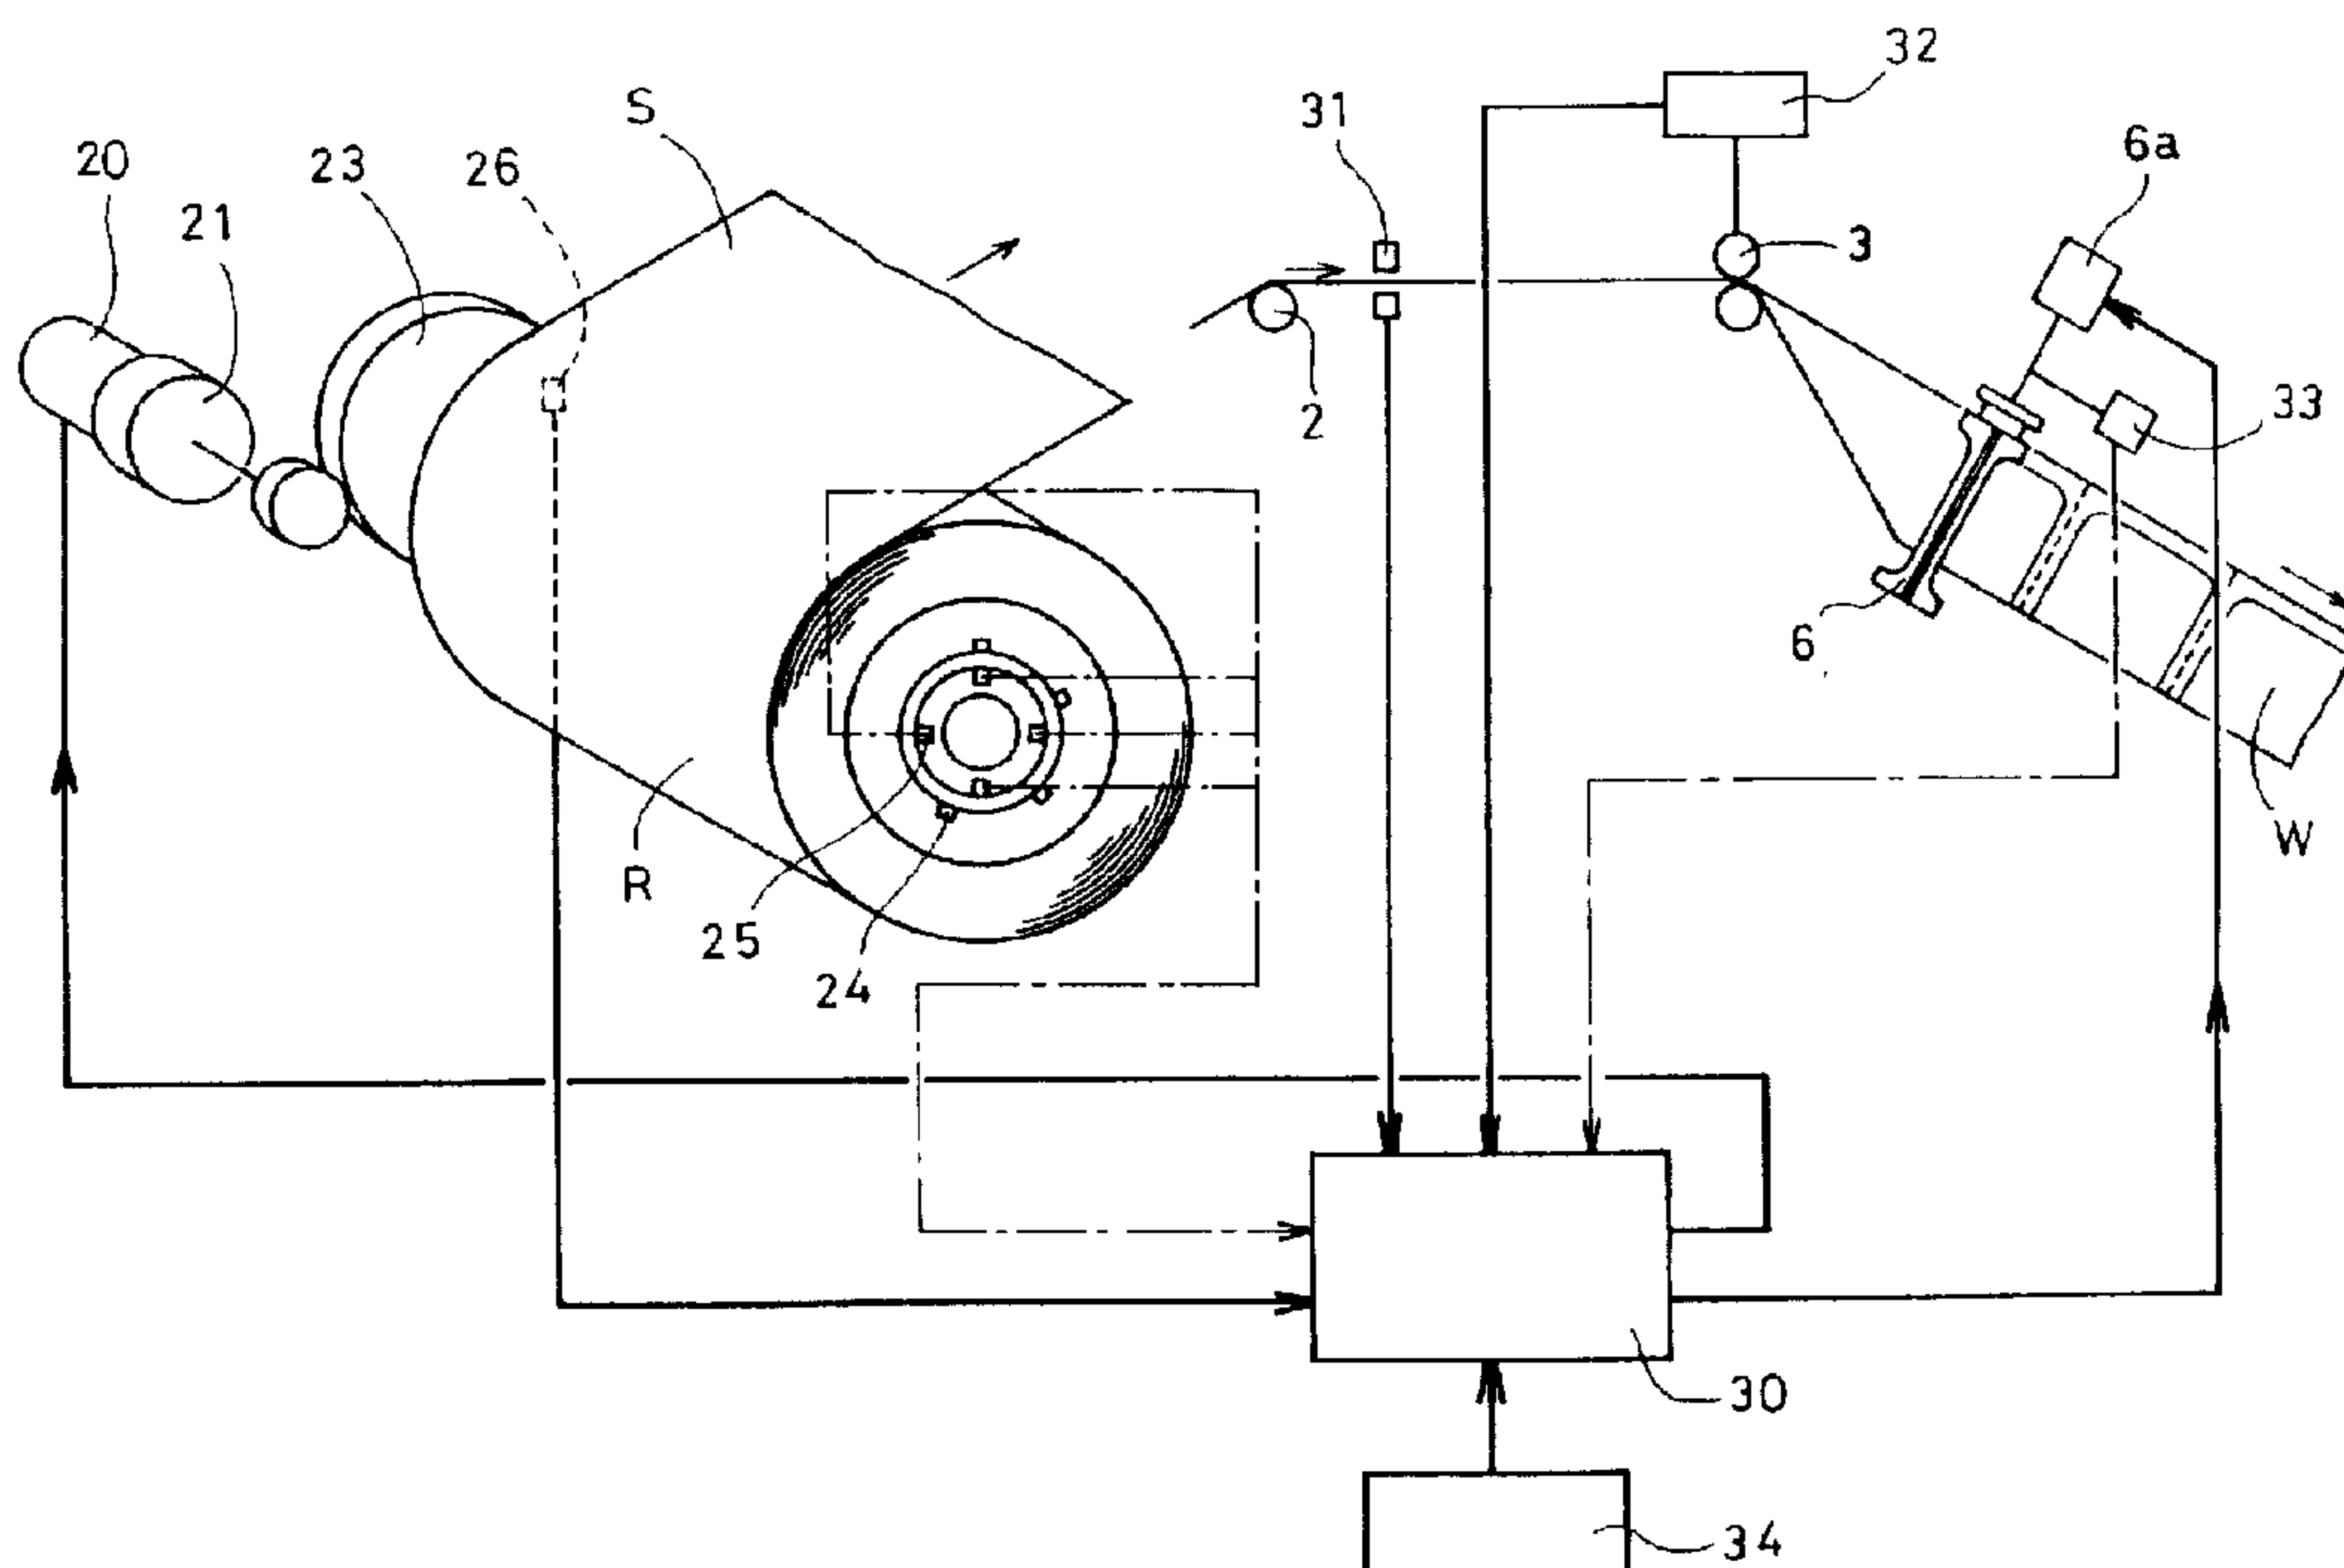

(57) Abrégé/Abstract:

It is desired to prevent disalignment of the edges of a folded sheet by smoothly feeding the sheet while keeping tension fluctuations to a minimum when the sheet is unwound from a paper roll set in a paper feed unit to a packaging unit even though the paper roll diameter decreases gradually as the sheet is unwound. A sheet length measuring sensor or rotary encoder is provided in the paper feed path through which the packaging sheet unwound from the paper roll is fed toward the packaging unit. An angle sensor is provided which comprises Hall element sensors provide on a support shaft and magnets provided on a core pipe of the paper roll. Any change in the signals from one of these sensors relative to the signal from the other sensor is used to calculate the paper roll winding length, and the sheet tension is adjusted to an optimum, constant level by controlling the sheet braking force stepwise according to the roll diameter measured by the sensors.

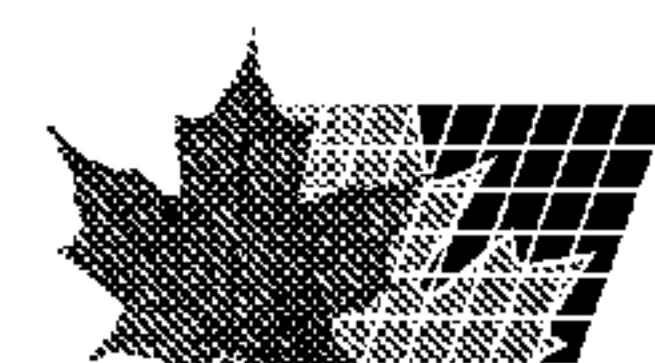

ABSTRACT

It is desired to prevent disalignment of the edges of a folded sheet by smoothly feeding the sheet while
5 keeping tension fluctuactions to a minimum when the sheet is unwound from a paper roll set in a paper feed unit to a packaging unit even though the paper roll diameter decreases gradually as the sheet is unwound. A sheet length measuring sensor or rotary encoder is provided in
10 the paper feed path through which the packaging sheet unwound from the paper roll is fed toward the packaging unit. An angle sensor is provided which comprises Hall element sensors provide on a support shaft and magnets provided on a core pipe of the paper roll. Any change is
15 the signals from one of these sensors relative to the signal from the other sensor is used to calculate the paper roll winding length, and the sheet tension is adjusted to an optimum, constant level by controlling the sheet braking force stepwise according to the roll
20 diameter measured by the sensors.

CORE PIPE BASED MAGNETIC SENSING SYSTEM FOR
ADJUSTING TENSION IN ROLLS OF WINDING SHEET MATERIAL

BACKGROUND OF THE INVENTION

5

This invention relates to a method of adjusting the tension applied to a sheet, more particularly a method of adjusting the tension applied to a sheet pulled out of a sheet roll in a stepwise manner according to the changing diameter of the sheet roll, and a device for carrying out the method.

One conventional drug packaging device includes a sheet feed unit rotatably supporting a rolled sheet of heat-fusible packaging paper, and a sealing device provided in a feed path through which the packaging sheet is unwound and fed. Upstream of the sealing device, the sheet is folded in half, drugs are supplied, and the sheet is heat-sealed in the width direction and along the edges by the sealing device to seal the drugs.

20 When the packaging sheet runs out, a new paper roll is set in the paper feed unit, and the new sheet is unwound and fed. When the sheet is fed, it has to be tensioned uniformly so that the sealing position will not deviate due to inaccurate folding of the sheet. But actually, the tension applied to the sheet changes gradually because the diameter of the paper roll changes

gradually as the sheet is unwound.

Examined Japanese patent utility model publication No. UM-136832 first published February 25, 1987 discloses a sheet tension adjusting device which can apply uniform tension to the sheet even if the diameter

5 of the sheet roll changes. The sheet tension adjusting device disclosed in this publication has a roll support cylinder on which is detachably mounted a sheet roll. A plurality of roll diameter detection sensors are provided at the side of the sheet roll. Signals from these
10 detection sensors are used to control the electromagnetic force produced by an electromagnetic brake provided in the roll support cylinder so that the braking force decreases stepwise as the roll diameter decreases.

With this conventional sheet tension adjusting
15 device, the sheet length of the sheet, which changes as the sheet is unwound, is detected stepwise by the roll diameter sensors arranged in the diametric direction of the roll. Thus, when the roll diameter decreases to a point where the detection sensor rank changes, the
20 braking force rank of the electromagnetic brake will fluctuate up and down for every rotation due to deviation of the axis of the core shaft, the weight of the sheet, or winding strain.

If this happens, the sheet edges cannot be aligned
25 accurately when the sheet is folded in half. Complete packaging is thus impossible. Since the braking force

rank changes sharply, the sheet may suffer a laceration in the width direction.

Light reflecting type detection sensors have a problem in that they are more likely to malfunction.

- 5 Packaging sheets used for a drug packaging device include semitransparent, or transparent heat-fusible paper and many other kinds of paper. If the end position of such a sheet changes, light is reflected differently, making it impossible to detect the reflected light as a signal.
- 10 This deteriorates detecting accuracy. Further, it tends to meander under the influence of humidity variations. Detection accuracy may deteriorate due to uneven end faces.

A thermal printer is usually provided upstream of

15 the position where the sheet is folded in half for printing the packaging sheet. If the sheet vibrates, its printing dots may chip, or the durability of a remainder indicator lamp may deteriorate.

An object of this invention is to provide a method

20 and a device of adjusting the tension in a sheet which is free of the problems of a conventional method of adjusting the tension in a sheet.

SUMMARY OF THE INVENTION

25

According to this invention, there is provided a

drug packaging device comprising: a sheet feed unit
comprising a fixed shaft, a first rotary shaft rotatably
mounted around said fixed shaft, a second rotary shaft
5 rotatably mounted around said first rotary shaft and carrying
a roll of sheet, brake means for applying a braking force to
said first rotary shaft, and feed rollers for feeding said
sheet from the roll; and a packaging unit comprising a
triangular plate for folding the sheet in half to form a
10 valley in the sheet, a hopper for dropping drugs into the
thus defined valley of the sheet, and heating rollers for
heat-sealing the sheet in a width direction at predetermined
intervals and along top edges thereof to form a plurality of
bags with the drugs sealed therein; one of said first and
15 second rotary shafts having at one end thereof a magnet that
attracts a magnetizable member provided on the other of said
first and second rotary shafts so that said first and second
rotary shafts are rotatable relative to each other against
the force of said magnet; said sheet feed unit further
20 comprising a sheet length sensor for measuring the feed
length of the sheet in the sheet feed path leading to said
packaging unit, a first angle sensor for detecting the
rotation angle of said second rotary shaft, and a control
unit for calculating the current sheet length on the roll and
25 the diameter of the roll based on the sheet length measured

by said sheet length sensor and the rotation angle measured by said angle sensor, and controlling a direct-current voltage applied to said brake means.

5

Other features and objects of the present invention will become apparent from the following description made with reference to the accompany drawings, in which:

10

15

20

25

5

BRIEF DESCRIPTION OF THE DRAWINGS

5

Fig. 1 is a partial schematic view of a paper feed unit and a packaging unit of a packing device;

Fig. 2 is a vertical sectional view of the paper feed unit with a roll of paper mounted thereon;


10

Fig. 3 is a schematic block diagram of a control

15

20

25

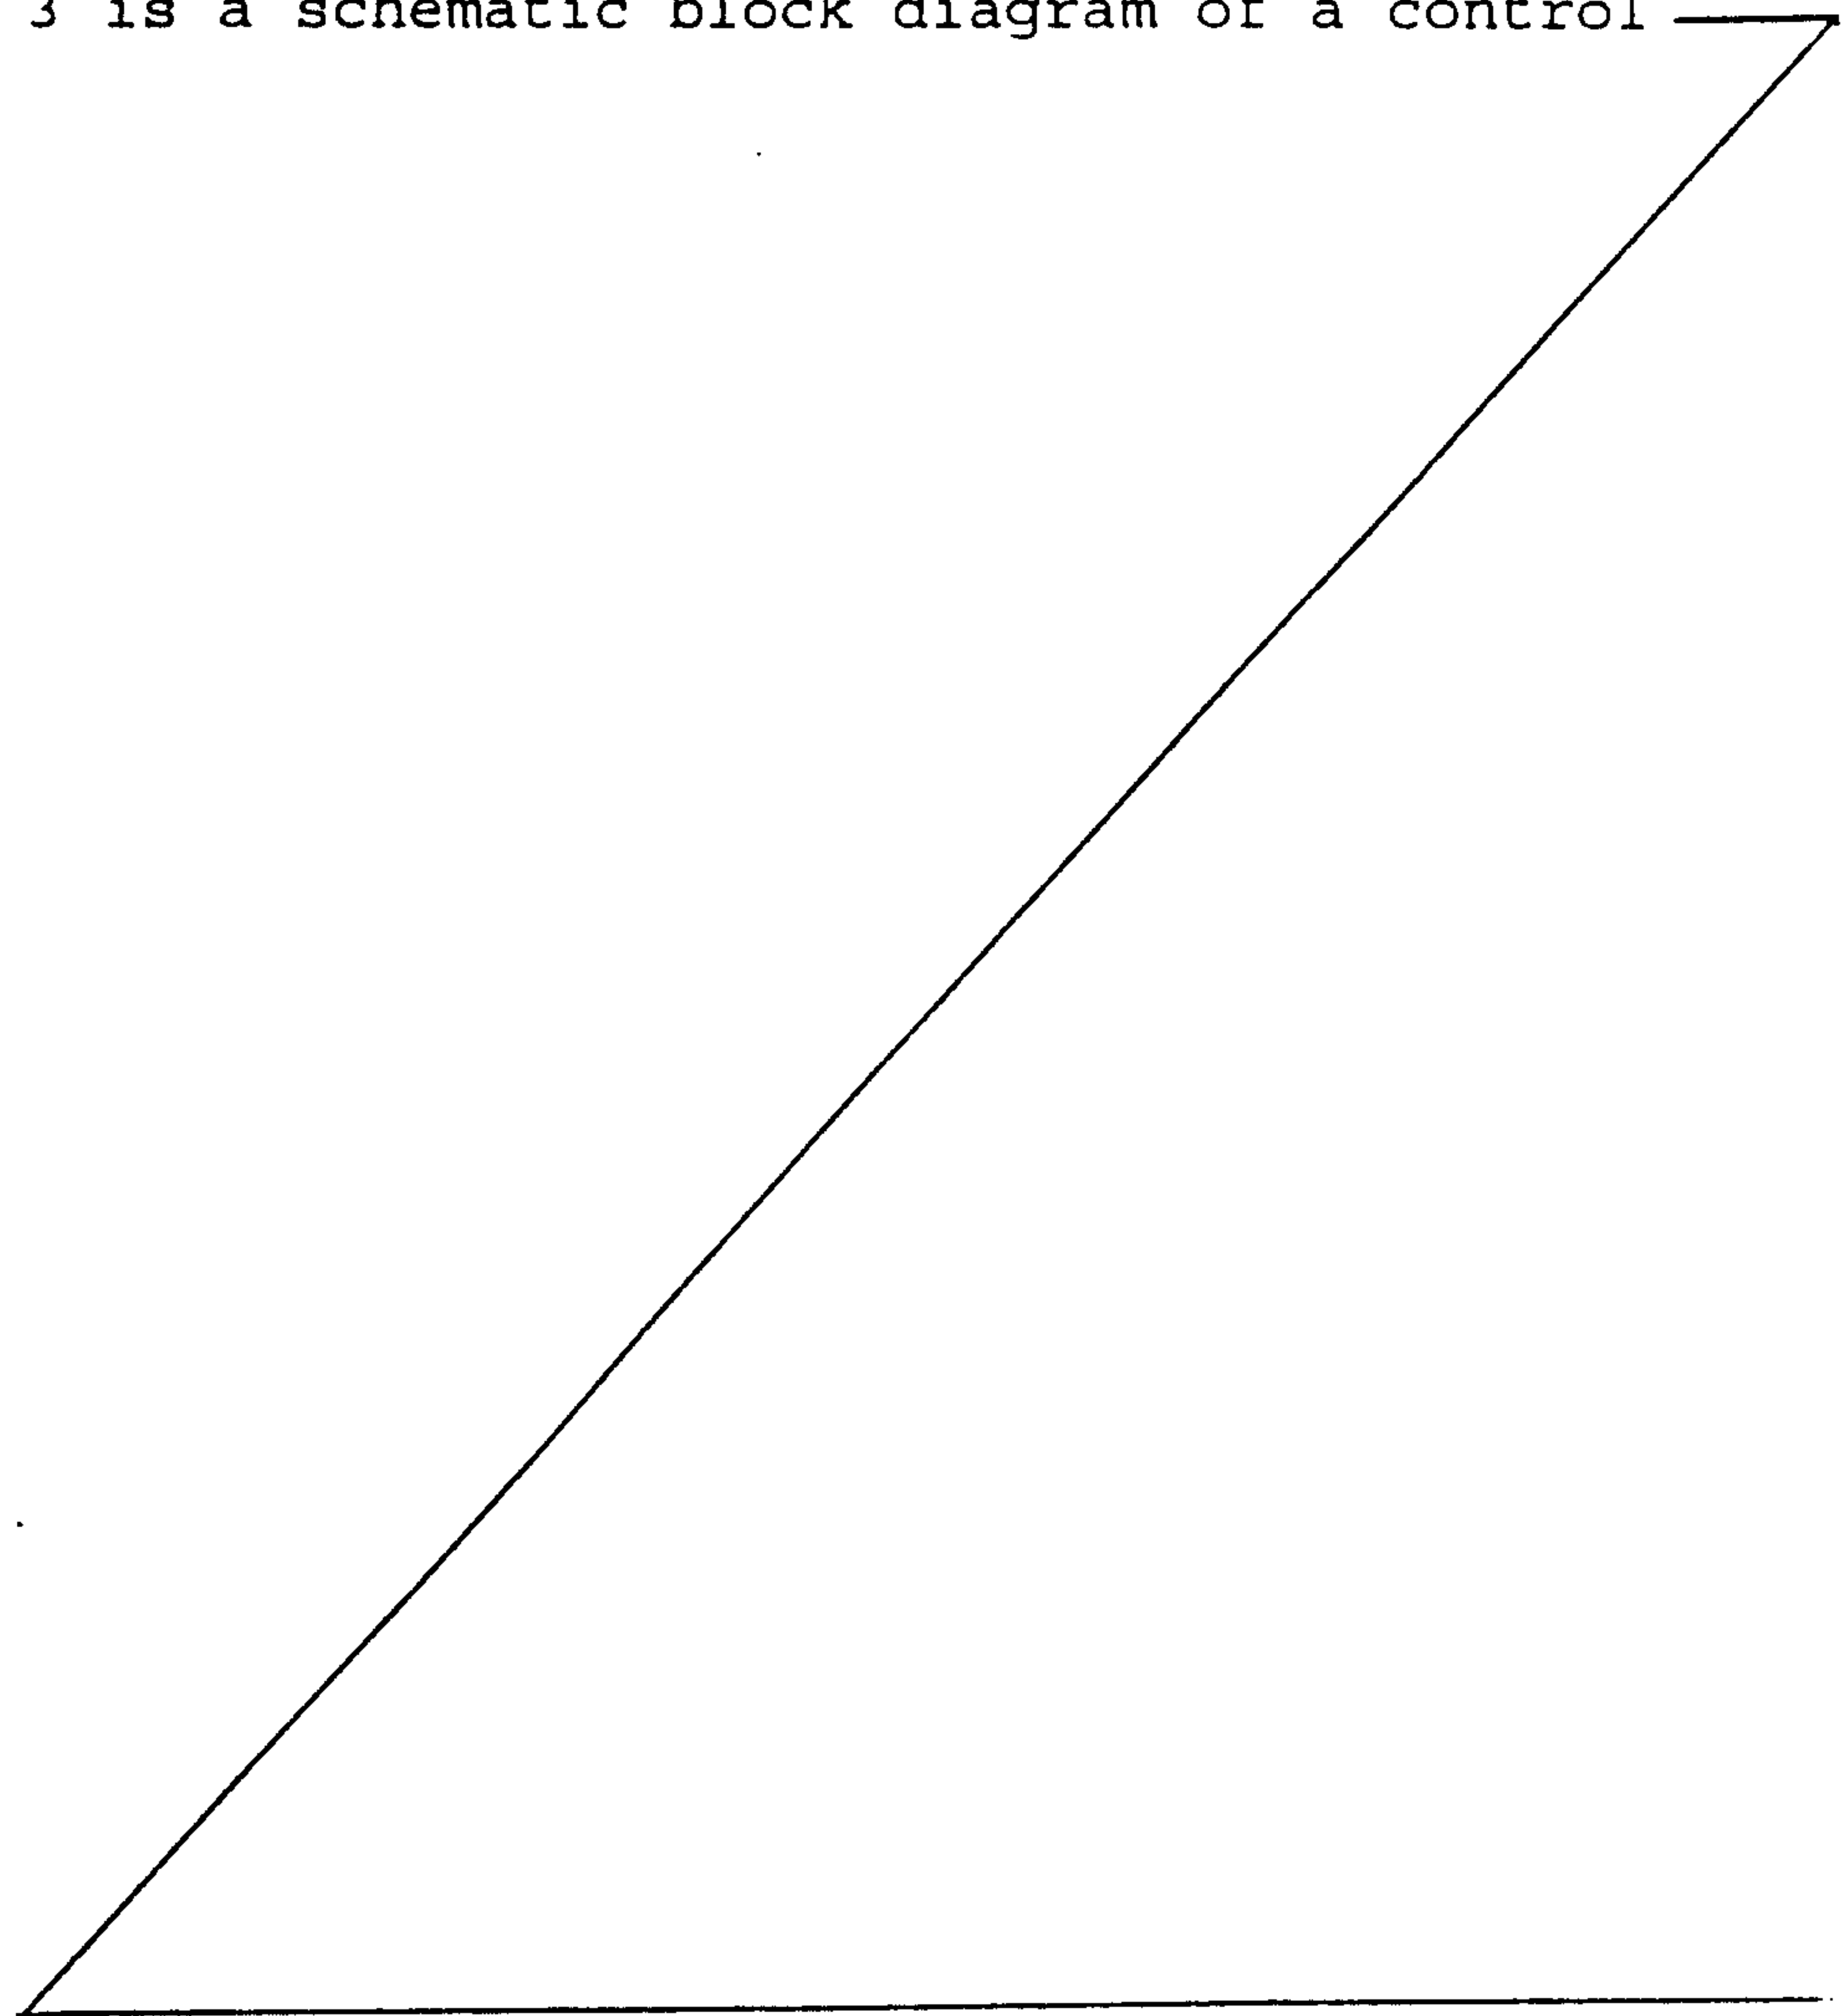

circuit of a tension adjusting device for a packaging sheet;

Fig. 4 is a flowchart illustrating the operation of a tension adjusting device of a first embodiment;

5 Fig. 5 is a side view of a paper feed unit of a second embodiment as viewed in the direction of arrow V-V of Fig. 2;

Fig. 6 is a side view of the paper feed unit of the second embodiment as viewed in the direction of the arrow
10 VI-VI of Fig. 2;

Fig. 7 is a schematic view of an angle sensor of a tension adjusting device of a second embodiment;

Figs. 8A-8D are schematic views of different type angle sensors;

15 Figs. 9A, 9B are views showing basic function of the tension adjusting device of the second embodiment;

Fig. 10 is a flowchart showing a special operation mode of the tension adjusting device of the second embodiment;

20 Fig. 11 is a flowchart showing a normal operation mode thereof;

Fig. 12 is a graph showing the relationship between the DC voltage applied and the winding length during the special mode; and

25 Fig. 13 illustrates how a slip detection sensor detects slipping.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Embodiments of this invention are described with
5 reference to the drawings. Fig. 1 is a schematic diagram
of a drug packaging machine showing mainly a paper feed
unit and a packaging unit. The paper feed unit has a
support shaft 1 on which is rotatably mounted a core pipe
P on which is wound a roll R of a drug packaging paper
10 sheet S. The sheet S is unwound from the roll R, and fed
through feed rollers 2, 3 to the packaging unit.

In the packaging unit, the sheet is longitudinally
folded in half by a triangular plate 4. Drugs are dropped
into the space defined in the folded sheet. The sheet is
15 then heat-sealed widthwise and along both side edges at
predetermined intervals by heating rollers 6 with
perforators. While the packaging unit includes numerous
other parts, only essential parts are shown for
simplicity.

20 Fig. 2 is a partial vertical section of the paper
feed unit in which the roll paper R and the core pipe P
are set. As shown, the support shaft 1 comprises a center
shaft 1a having one end thereof fixed to a support plate
11 by a nut, an outer shaft 1b integrally mounted around
25 the center shaft 1a, and a hollow shaft 1c rotatably
mounted on the outer shaft 1b through bearings 12

provided near both ends of the outer shaft 1b.

The center shaft 1a has a shaft head 13 at one end. The outer shaft 1b has a flange 14 at the same one end. The hollow shaft 1c has a flange 15 at the other end. The
5 core pipe P and the roll paper R, mounted on the hollow shaft 1c, are rotatable relative to the support shaft 1. A plurality of magnets 16 are provided on the inner peripheral surface of the flange 15 at suitable intervals. Ferromagnetic (iron) members 17 are provided along the
10 circumference of an end face of the core pipe P. The magnets 16 attract the ferromagnetic member 17 to detachably mount the core pipe P and the roll paper R on the hollow shaft 1c.

Packaging sheet S unwound from the roll paper R is
15 suitably tensioned by a motor brake 20 engaging the hollow shaft 1c. The motor brake 20, mounted on the support plate 11, is connected to a gear unit 21 through a transmission belt, not shown. The gear unit 21 has an output shaft on which is mounted a pinion 22 in mesh with
20 a large gear 23 provided on the outer peripheral surface of the flange 15. Thus, by activating the motor brake 20, braking force is applied to the hollow shaft 1c.

The motor brake 20 is a small AC motor powered by a DC voltage. As will be described below, braking force is
25 variable in four stages according to the tension in the packaging sheet S being unwound by changing the DC

voltage applied in four stages.

Magnets 24, Hall element sensors 25, a proximity switch 26 and projections 27 are described in the second embodiment.

5 Fig. 3 schematically shows a brake circuit for controlling various parts of the device for feeding packaging sheet from the paper feed unit and packaging drugs. Its control unit 30 receives signals from an end sensor 31, those from a rotary encoder 32 provided near
10 the feed rollers 3, and those from a revolving speed counter 33 mounted on the output shaft of a motor 6a coupled to the shaft of one of the heating rollers 6, and produces, based on one of the above signals, outputs for activating the motor brake 20 or the motor 6a. Numeral 34
15 indicates an input unit for inputting external data.

Drugs are packaged while adjusting the tension in the packaging sheet with the sheet tension adjusting device of the first embodiment.

In the first embodiment, the maximum diameter d_{max}
20 and the minimum diameter d_0 of the roll paper R to be set in the paper feed unit are known beforehand. Braking force produced by the motor brake 20 is varied in four stages according to the signal from the rotary encoder 32 to apply suitable tension to the sheet by adjusting the
25 braking force according to the changing diameter of the paper roll R.

The roll paper R shown has a maximum diameter $d_{\max} = 160$ mm, minimum diameter $d_0 \doteq 64$ mm, and sheet thickness $\gamma = 30 \mu\text{m}$. In this case, braking force produced by the motor brake is varied every time the diameter of the paper roll R decreases $(160 - 64)/4 = 24$ mm.

The length of the sheet forming a roll R of a given diameter is given by the following formula:

$$\begin{aligned}
 L &= [(d_0 + 2 \times \gamma) + (d_0 + 2 \times 2\gamma) + \dots + (d_0 + 2 \times (n-1)\gamma) \\
 &\quad + (d_0 + 2 \times n\gamma)] \pi \\
 10 \quad &= [nd_0 + 2(1+2+\dots+n-1+n) \gamma] \pi \\
 &= [nd_0 + 2 \times \frac{n(n+1)}{2} \gamma] \pi \\
 15 \quad &= [d_0 + (n+1)\gamma] n\pi \quad \dots (1)
 \end{aligned}$$

(wherein n is the number of turns)

The diameter of the roll R is given as follows:

$$d_{\max} = d_0 + 2 \times n\gamma \quad \dots (2)$$

20

From Formula (1), the length $L_{\max}$ of the sheet forming the roll R when the roll diameter is maximum is:

$$L_{\max} = [64 \times n + n(n+1) \times 30n \times 10^{-3}] \pi$$

25 (mm)

$$\text{From Formula (2), } d_{\max} = 64 + 2 \times 30n \times 10^{-3} = 160$$

$$\text{Thus, } n = 96/6 \times 10^{-2} = 1600$$

$$\begin{aligned}
 \text{Hence, } L_{\max} &= (64 + 1601 \times 30 \times 10^{-3}) \times 1600 \pi \\
 &= 562,688 \text{ (m)}
 \end{aligned}$$

Now, let the diameter range of the roll paper divide into four stages $N = 1$ (largest), 2 (second largest), 3 (third largest) and 4 (smallest). The maximum sheet length of the roll in each stage is given by the following formulas:

where $N = 1$, $L_{\max} = 562,688$ (m), ($n = 1600$, $d_{\max} = 160$)

where $N = 2$, $L_{\max} = 376,800$ (m), ($n = 1200$, $d_{\max} = 136$)

where $N = 3$, $L_{\max} = 221,056$ (m), ($n = 800$, $d_{\max} = 112$)

where $N = 4$, $L_{\max} = 95,456$ (m), ($n = 400$, $d_{\max} = 88$)

The control unit 30 receives the signal from the rotary encoder 32 to measure the length of packaging sheet S to the feed rollers 3 and determines in which one of the stages 1-4 the diameter of the roll R is. Then, the control unit determines the DC voltage to be applied to the motor brake 20 so that an equal tension is applied to the sheet for all the stages 1-4. For example, the DC voltage is determined as follows:

where $N = 1$, $V = 25V$

where $N = 2$, $V = 16V$

where $N = 3$, $V = 12V$

where $N = 4$, $V = 8V$

Referring now to the flowchart of Fig. 4, this method is described more specifically.

First, as shown in Fig. 1, the packaging sheet S is slightly unwound from the paper roll R to a point at least downstream of the heating rolls 6 and sandwiched between the heating rolls 6 so that the sheet can be
5 heat-sealed by the heating rolls 6.

In this state, the control unit is started. In Step S1, data on dimensions of the paper roll R is entered through the input unit 34. Such data, that is, data on the completely wound paper roll R may be stored
10 in the input unit 34 beforehand and fed to the control unit when a signal on an end product is entered. Otherwise, necessary data may be entered through a keyboard every time such data are needed. The latter method is advantageous when a half-used paper roll R is
15 reset. When these data are entered, the control unit 30 begins to control the computation and feed the packaging sheet S. In Step S2, a maximum DC voltage is applied to feed the packaging sheet S with its tension kept at the maximum.

20 In Step S3, a signal on the sheet length data is read. In this embodiment, this signal is the signal from the rotary encoder 32 and is inputted for every processing cycle in each of the steps described below.

In Step S4, based on the input signal, the control
25 unit calculates the number by which the turns of the paper roll has decreased from the maximum diameter until

the above signal is inputted, and based on this number, calculates the remaining sheet length of the paper roll and its diameter at this moment, using the formulas (1) and (2). In Step S5, based on the thus calculated
5 remaining sheet length of the paper roll, the tension level is determined.

That is, in Step S5, the control unit 30 determines, based on the remaining sheet length of the roll, in which one of the stages 1-4 the diameter of the paper roll R is.
10 If the diameter of the roll is in stage $N = 1$, a predetermined DC voltage for tensioning the sheet S to the maximum level is applied to the motor brake 20 in Step S6.

If $N \neq 1$, the control unit determines if $N = 2$ in
15 Step S7.

If $N = 2$, a DC voltage of 16 V is applied to the motor brake 20 in Step S8. If $N \neq 2$, the control unit determines if $N = 3$ in Step S9. If it is, a DC voltage 12 V is applied in Step S10. If not, the control unit
20 determines if $N = 4$ in Step S11. If it is, a DC voltage 8 V is applied in Step S12.

The above operation is carried out for every cycle in the processing loop. If $N \neq 4$ in Step S11, which means that the packaging sheet S has been unwound completely,
25 the control unit stops the feed of sheet S after confirming the signal from the end sensor 31 in Step 13.

This completes the entire control.

In this embodiment, the signal from the rotary encoder 32 is used to measure the sheet length and control the motor brake 20 based on the sheet length. But
5 instead, the sheet length may be measured by use of signal from a sensor provided on the support shaft 1 of the paper feed unit for detecting the rotary angle of the paper roll R. This sensor is used in the second embodiment.

10 In the first embodiment, it is assumed that the sheet has a thickness of 30 μm . But actually, while the sheet is being fed, it is stretched due to the tension applied to the sheet. Thus, the sheet thickness is usually smaller while being fed than while in a
15 stationary state. Thus, the sheet thickness while the sheet is being fed should be determined by reducing the sheet thickness in a stationary state by a certain rate which is estimated based on average elongation of the sheet while being fed.

20 Fig. 5 and the subsequent figures show the second embodiment, which is of basically the same construction as the first embodiment but includes additional elements so that the sheet tension can be controlled with higher accuracy.

25 The paper feed unit and the packaging unit of this embodiment are those shown in Figs. 1-3. This embodiment

differs from the first embodiment in that, as shown in Fig. 3, the control unit 30 receives the signals from a rotary angle sensor assembly comprising four magnets 24 on the core pipe P and four Hall element sensors 25, and a sheet displacement sensor comprising a proximity switch 26 and projections 27 (see Figs. 2 and 5).

Specifically, the control unit accurately calculates the length of the sheet S unwound from the paper roll R based on the sheet length sensor signal of the first embodiment and the signal from the rotation angle sensor, and adjusts the braking force corresponding to the variation in diameter of the roll R to adjust the tension applied to the sheet.

As shown in Fig. 7, the four magnets 24 of the second embodiment are provided on the inner peripheral surface of the core pipe P at angular intervals of 67.5° around the axis of the pipe P, while the four Hall element sensors 25 are provided at one end of the support shaft 1 at equal angular intervals of 90° around the axis of the pipe P.

The numbers and positions of magnets 24 and sensors 25 are however not limited to those shown in Fig. 7. Fig. 8 shows some variations of their numbers and arrangement. In any variation, the Hall element sensor or sensors 25 produces a pulse signal every time the core pipe P rotates 22.5° .

Also, instead of the combination of magnets 24 and Hall elements 25, photosensors may be used to detect the rotation of the core pipe P. Such photosensors comprise light emitting diodes and light interceptors and are
5 fixed to one end of the support shaft 1 (outer shaft 1b) as with the Hall elements 25.

More particularly, such photosensors are mounted on an extension or mounting seats provided on the flange end of the outer shaft 1b, while projections are provided on
10 the core pipe P at angular intervals of 22.5° so as to pass between the light emitting diodes and the light interceptors of the photosensors. The numbers of the photosensors and the projections are the same as the Hall element sensors 25 and the magnets 24.

15 Fig. 6 is a side view as viewed in the direction of arrow VI-VI of Fig. 2, and mainly shows the position of the displacement detection sensor for the packaging sheet. In this example, a single proximity switch 26 is provided on the support plate 11. Sixteen projections 27 are
20 provided on the flange 15 of the rotatable hollow shaft 1c of the support shaft 1.

If there is a difference in pitch between the rotation angle sensor signal detected by the Hall element sensors 25 and the signal detected by the displacement
25 detection sensor, the control unit determines that there is a displacement.

Now the operation of the second embodiment is described. As shown in Figs. 9A, 9B, this operation basically comprises determining the length of sheet forming the paper roll based on the total length l of the unwound sheet calculated from the sheet length signal produced by the rotary encoder 32, and the angle θ calculated from the pulse signal from the Hall element sensors 25 as the angle sensors.

In Figs. 9A, 9B, for convenience of the description of operation, the number and arrangement of magnets 24 and Hall element sensors 25 are different from those of Fig. 7 and 8. But its basic operation is the same in that one pulse signal is produced for every 22.5° rotation.

As shown Fig. 9A, when the radius of the paper roll is large, the angle sensor produces fewer pulses while the packaging sheet is unwound by the length l . As the paper roll radius decreases as shown in Fig. 9B, the number of pulses increases. If the pulse numbers when the paper roll radius is at its maximum and minimum is 3 and 10, respectively, the range of pulse numbers from 3-10 are divided into four stages so as to apply D/C currents that can apply suitable tension corresponding to the respective stages to the motor brake 20 to adjust the braking force.

There is the following relationship between the above tension level $N = 1-4$ and the pulse number. Provided

the maximum and minimum diameters of the paper roll R are 160 mm and 64 mm, respectively, the length of the sheet unwound from the roll when the roll diameter is maximum will be $\pi \times 160$ mm. Since the angle sensor 25 produces one pulse signal for every 22.5° rotation (16 pulses for every full turn), the sheet is unwound by $\pi \times 160/16 = 314$ m/m. For the unwound length of 3140 m/m, the pulse number will be 10.

When the roll diameter is minimum, there is the following relation between the length of sheet unwound and the pulse number. That is, since $\pi \times 64/16 = 129.5$ m/m, for the unwound length of 3140 m/m, the pulse number will be $3140/129.5 \times 10 = 24.2$.

The pulse number and the DC voltage for every tension level N are determined as follows:

	Tension Level N	Pulse Number	DC Voltage
	N = 1	10-13	25V
	N = 2	14-17	16V
	N = 3	18-21	12V
20	N = 4	22-24.2	8V

In the above description, the tension level N is adjusted according to the pulse number for a given unwound length of sheet. But the tension level may be determined based on the unwound length of sheet when a predetermined number of pulses have been produced. More

detailed description of this method follows:

Figs. 10 and 11 are flowcharts showing the operation of the tension adjusting device. Specifically, Fig. 10 is a flowchart of a special mode to be carried
5 out before the normal mode of the tension adjusting device. Fig. 11 is a flowchart of the normal mode.

In the special mode shown in Fig. 10, the control unit checks various conditions for the normal packaging operations in the packaging unit so that the normal mode
10 can be carried out smoothly. Before the normal packaging operation, packaging sheet has to be correctly set in the packaging unit. The packaging sheet is usually set manually by inching. The control mode always passes this special mode.

15 In Step S0, the control unit determines if the current mode is the special mode. The special mode starts if any one of the following conditions is met: i.e. the actuation of the end sensor or joint seal, and the detection of inching mode or reverse rotation of the
20 winding length sensor. The joint seal is activated while one paper roll has run out and a new roll is being set and spliced to the preceding sheet.

The inching mode starts by switching on the control unit before the start of all of the operations, and the
25 packaging sheet is manually set in the above-described manner.

The special mode is necessary because a new, complete paper roll is not always set but there is the possibility that a used roll paper having e.g. half the diameter of a new roll may be set. If the roll set has
5 only half the diameter of a new paper roll, the tension is initially adjusted to an intermediate level smaller than the tension corresponding to the diameter of the new roll.

If the current mode is judged to be the special
10 mode in Step S0, the tension is set at the maximum level in Step SS1, and various sensors (reference sensor, rotation number counter, winding length sensor, core pipe slip sensor) are activated (Step SS2). In this state, the packaging sheet is fed little by little by manual inching,
15 and the signals from the sheet length sensor or rotary encoder 32, and the angle sensors or Hall element sensors 25.

In Step SS5, the control unit calculates the sheet length of the paper roll based on these signals using the
20 above-described formulas to determine whether the roll has the maximum diameter or not, e.g. half the maximum diameter. If this calculation is not possible (NO), Step SS3 is carried out again. If possible, the control unit determines in Step SS7 if the conditions for reentering
25 the special mode are all removed. If they are, the tension is adjusted to a suitable level in Step SS8.

Steps SS9 and SS10 are steps for detecting slipping of the core pipe, which will be described later.

During tension adjustment in Step SS8, a DC voltage corresponding to maximum tension is set at 25 V if the paper roll has a maximum diameter (new) and at about 20 V if the paper roll diameter is about half the maximum diameter to prevent any abrupt change in tension.

When the tension has been adjusted to a suitable level, the program returns to Step S0 to determine whether or not to carry out the special mode operation again. This time, the program proceeds to the normal mode [A].

In the normal mode shown in Fig. 11, an inching mode switch is manually changed over, and then in Step S1, the previously set data is read out, and the various sensors are kept turned on (S2). By this time, the normal operation of the packaging unit has started. At the start of the normal operation, the tension is controlled to the DC current value suitably set in the special mode.

Then in Steps S3, S4 and S5, the sheet length signal and angle sensor signal are inputted in the same manner as in the special mode to calculate the sheet length of the roll. This calculation is carried out substantially in the above-described manner. If, as a result of calculation, the roll R turns out to be an unused, full-volume roll, the DC voltage is set at 25 V,

16 V, 12 V or 8V in Step S7, S9, S11 or S13 according to the judgment in Steps S6, S8, S10 and S12, in the same way as in the first embodiment. Fig. 12 shows the relationship between the above-described winding length
5 and the DC voltage control.

After the tension control has been carried out via any of the abovementioned routes, the control unit determines if the core pipe is slipping in Step S14 based on the signal from the proximity switch 26. As shown in
10 Fig. 6, the switch 26 is provided opposite to the 16 ferromagnetic projections, and produces a pulse signal every time the core pipe rotates 22.5° in exactly the same manner as the Hall element angle sensors 25.

In the embodiments, the angle sensors 25 and 26 are
15 different types, but they may be of the same type. The time chart of Fig. 13 shows the relationship between the pulse signals produced by the angle sensors and the rotation angle. As shown, the pulse signals by the slip detection sensor can be obtained synchronously with the
20 pulse signals by the winding length detecting sensor unless the winding condition changes with tension.

But if the rotation resistance of the motor brake
20 produced by each of the above-described DC voltages is inappropriate, for example, if the tension is too large
25 at the tension level $N = 2$, the paper roll R will rotate strongly together with the core pipe P. This may cause a

shift in the position where the ferromatnetic members 17 are attracted to the magnets 16. If this happens, although the Hall element sensors 25 keep producing pulse signals at regular angular intervals of 22.5° , the
5 proximity switch 26 may produce two pulse signals simultaneously and fails to produce a signal when the core pipe rotates another 22.5° .

Fig. 13 shows how pulse signals change when such a position shift occurs. As shown, the slip detection
10 sensor fails to produce pulse signals at positions C and D after the core pipe has made a complete turn. Instead, pulse signals are produced between D and A with some displacement.

In such a case, the control unit can determine that
15 the slip detection sensor has failed to produce a pulse signal at position C by referring to the signal from the winding length detection sensor. If, for example, the DC current of 16 V is too high at the level $N = 2$, so that the tension is too high, the voltage may be reduced to 14
20 V to adjust the tension to a suitable level. With this voltage adjustment, a pulse signal can be produced at any desired position after position D.

After adjusting any position shift of the core pipe P due to sheet tension variation, the control unit checks
25 in Step S16 if paper is still wound on the pipe P based on the signal from the end sensor 31. If the sensor 31 has

not yet detected the terminal end of the paper, the Step S3 operation is carried out, that is, the sheet tension is controlled according to the winding length of the paper roll by repeating the above calculations.

5 The tension control mode ends when the end sensor S1 detects the terminal end of the packaging sheet S. If it is necessary or desired to continue packaging thereafter, the program returns to the special mode to replace the roll R with a new one and connect the sheet
10 ends.

 Steps SS9 and SS10 are shown by chain lines in the flow chart for the special mode, which means that these steps are not essential. If provided, though, their functions are the same as Steps S14, S15 in the slip
15 detection operation in the normal mode.

 The above description has been made on the assumption that the paper roll R is a full-volume roll. If a roll about half the maximum diameter is set in the paper feed unit, after the tension has been adjusted in
20 the special mode to a level slightly larger than the tension during the normal mode when the full-volume roll is unwound to about half the maximum diameter, the normal mode is started. It is thus possible to smoothly start the normal mode without the possibility of an abrupt rise
25 in tension.

As described above, the paper roll diameter corresponding to the current winding length of the roll is calculated based on data on the sheet feed length measured by the single sheet length sensor and data on the full winding length of the roll to adjust the sheet tension to an optimum level by controlling the braking force in a stepwise manner based on the paper roll diameter measured. Thus, it is possible to adjust the sheet tension to an optimum level by selecting the braking force in a stepwise manner corresponding to the roll diameter corresponding to the gradually decreasing winding length of the roll, unless the winding length of the roll begins to increase. It is thus possible to smoothly adjust the sheet tension without the possibility of abrupt tension fluctuations due to sudden fluctuations in braking force when the roll diameter changes slightly.

Alternatively, the current winding length of the roll is determined based on the change in the signal from one of the sheet length sensor and the angle sensor relative to the signal from the other sensor, and the sheet tension is adjusted by selecting a braking force corresponding to the diameter corresponding to the current winding length. In this arrangement, even if data on the full winding length is not known, it is possible to adjust the sheet tension by selecting a braking force corresponding to the roll diameter corresponding to the current winding length determined based

on the measurement data. Thus, it is possible to smoothly adjust the sheet tension without the possibility of abrupt change in tension.

**THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE
PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:**

1. A drug packaging device comprising:

a sheet feed unit comprising a fixed shaft, a first rotary shaft rotatably mounted around said fixed shaft, a second rotary shaft rotatably mounted around said first rotary shaft and carrying a roll of sheet, brake means for applying a braking force to said first rotary shaft, and feed rollers for feeding said sheet from the roll; and

a packaging unit comprising a triangular plate for folding the sheet in half to form a valley in the sheet, a hopper for dropping drugs into the thus defined valley of the sheet, and heating rollers for heat-sealing the sheet in a width direction at predetermined intervals and along top edges thereof to form a plurality of bags with the drugs sealed therein;


one of said first and second rotary shafts having at one end thereof a magnet that attracts a magnetizable member provided on the other of said first and second rotary shafts so that said first and second rotary shafts are rotatable relative to each other against the force of said magnet;

said sheet feed unit further comprising a sheet length sensor for measuring the feed length of the sheet in the sheet feed path leading to said packaging unit, a first angle sensor for detecting the rotation angle of said second rotary shaft, and a control unit for calculating the current sheet length on the roll and the diameter of the roll based on the sheet length measured by said sheet length sensor and the rotation angle measured by said angle sensor, and controlling a direct-current voltage applied to said brake means.

2. A drug packaging device as recited in claim 1 wherein the control unit includes a special mode in which, before a normal mode in which the tension in the sheet is adjusted while the sheet is being fed, the paper winding length of the roll is calculated based on the signals from the sheet length sensor and the first angle sensor in the same manner as in the normal mode by an inching operation in which the sheet is intermittently fed by a predetermined length, and based on the roll diameter calculated from the paper winding length, the braking force is adjusted.


3. A drug packaging device as claimed in claim 1 or 2 further comprising a second angle sensor for detecting the rotation angle of said first rotary shaft, said control unit judging that said second rotary shaft is slipping relative to said first rotary shaft if a detection signal from said first angle sensor is detected and a detection signal from said second angle sensor is not detected.

FIG. 1

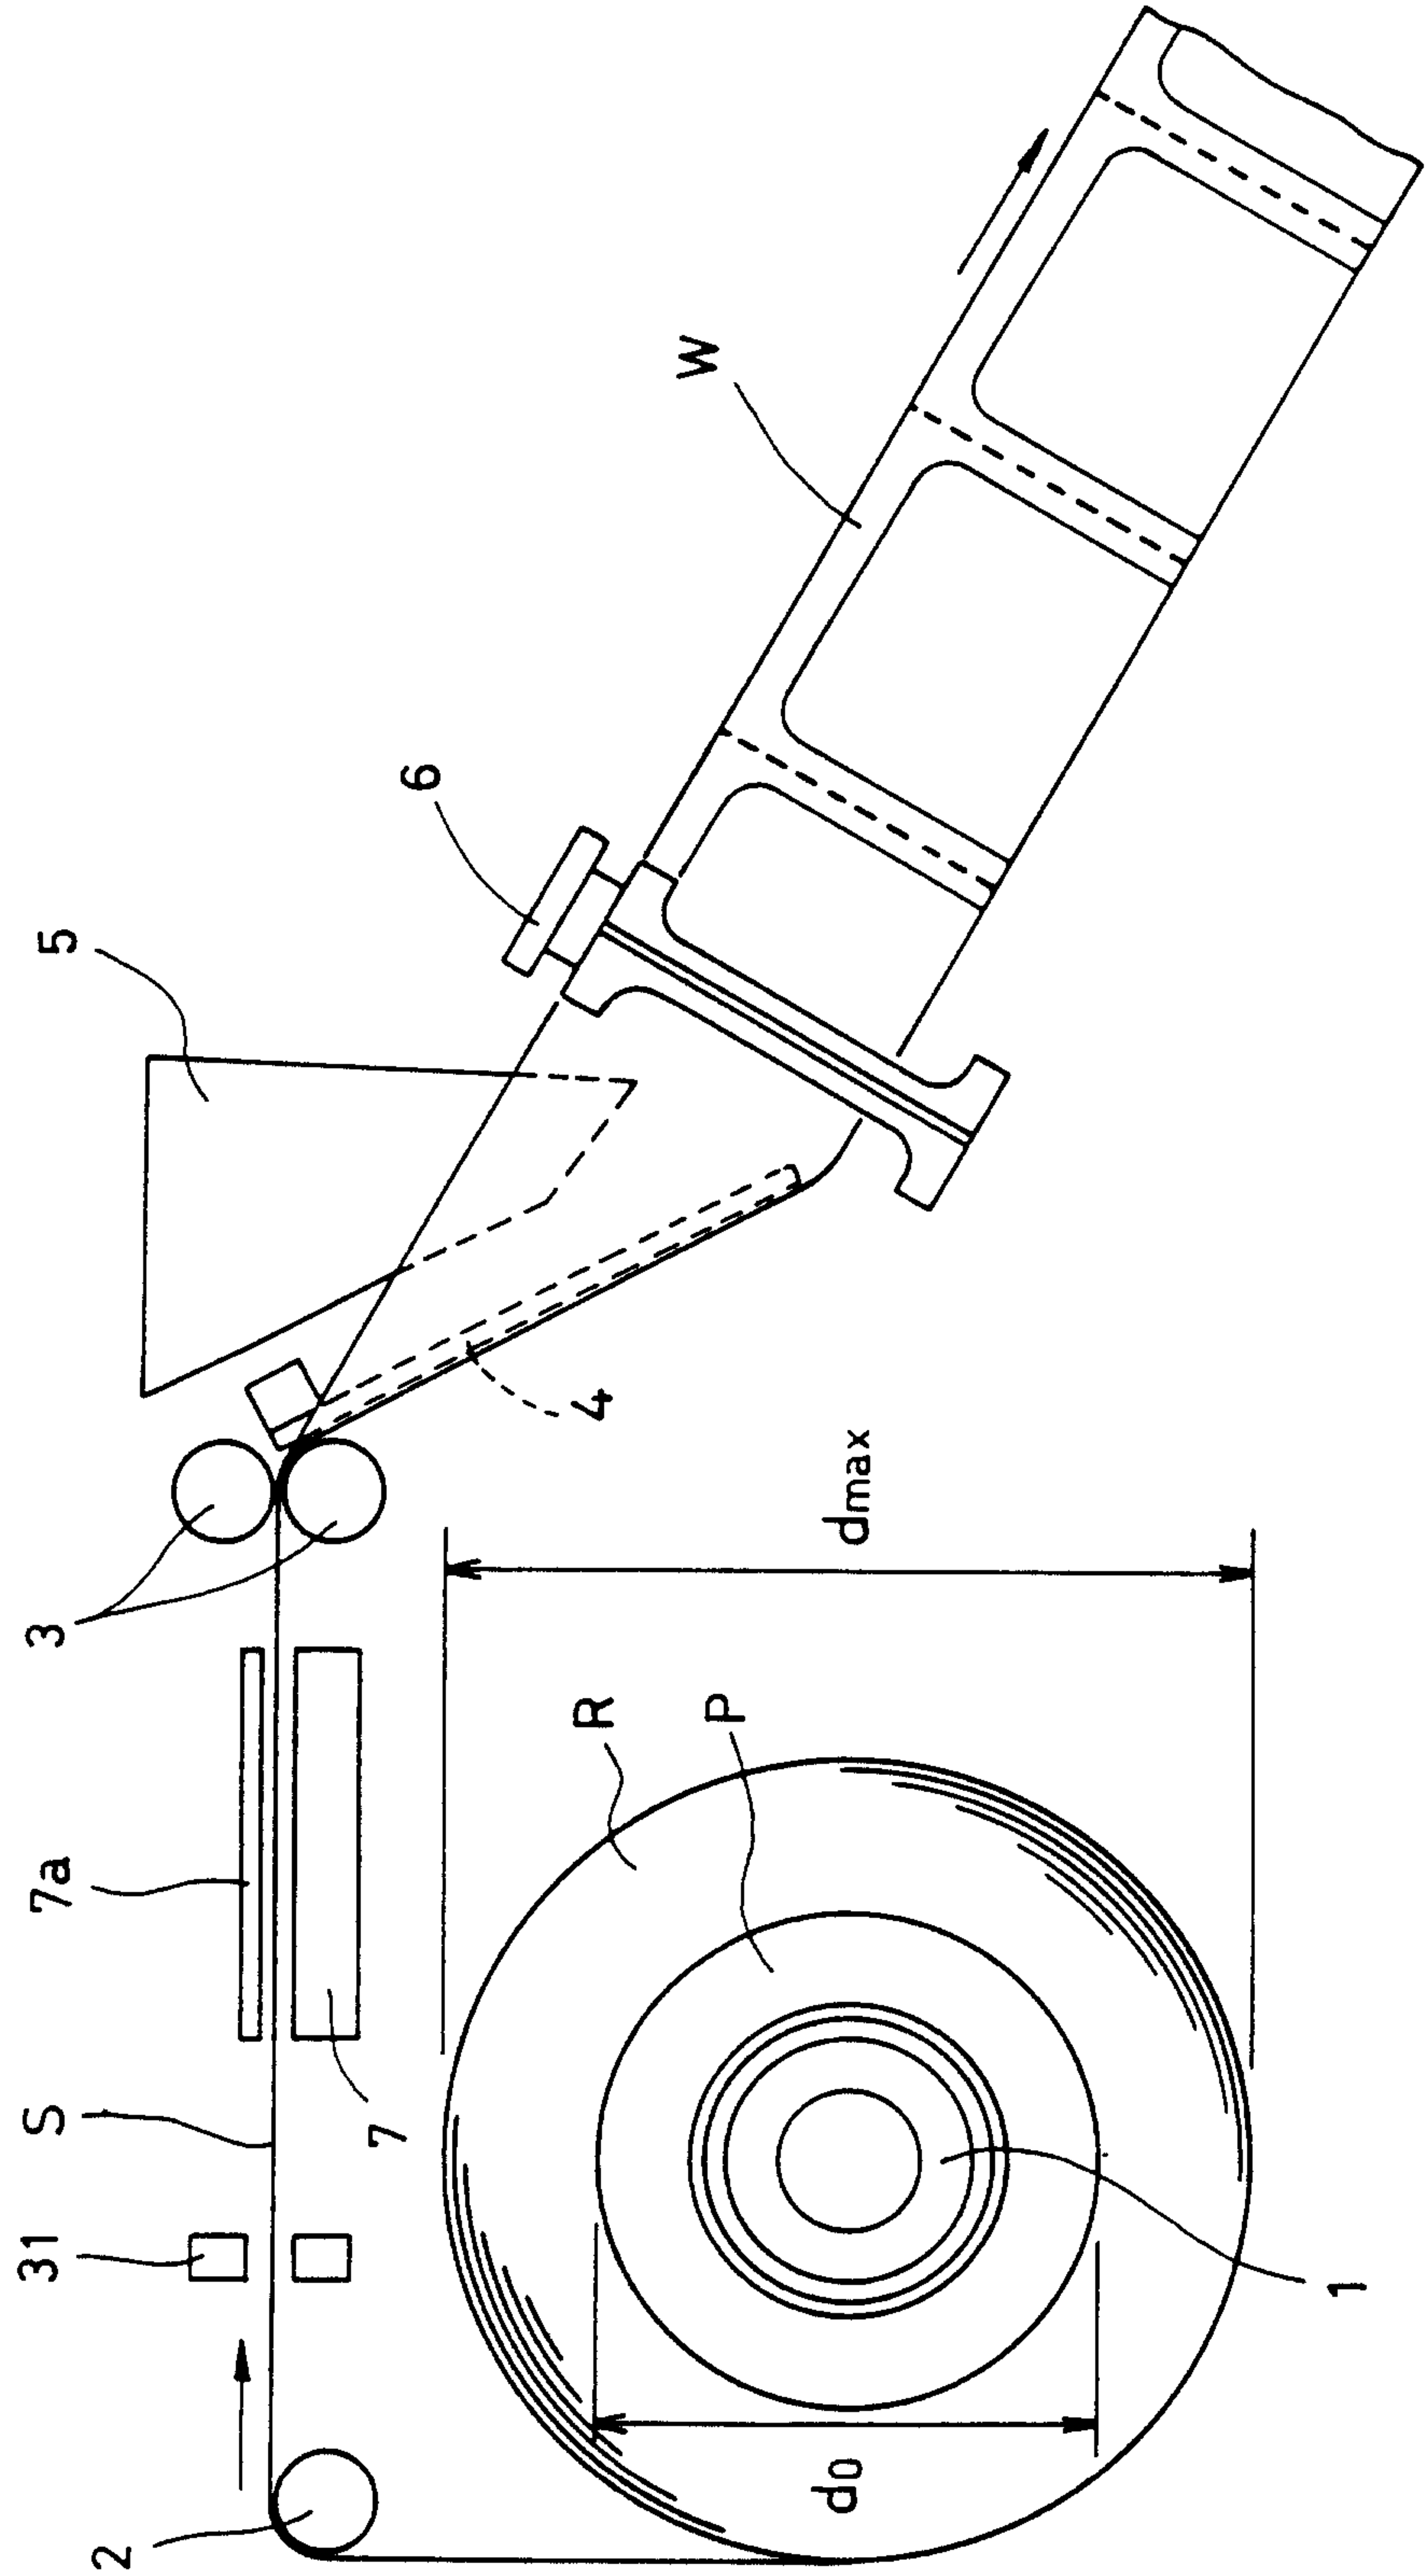


Patent Agents
Fetherstonhaugh & Co.

FIG. 2

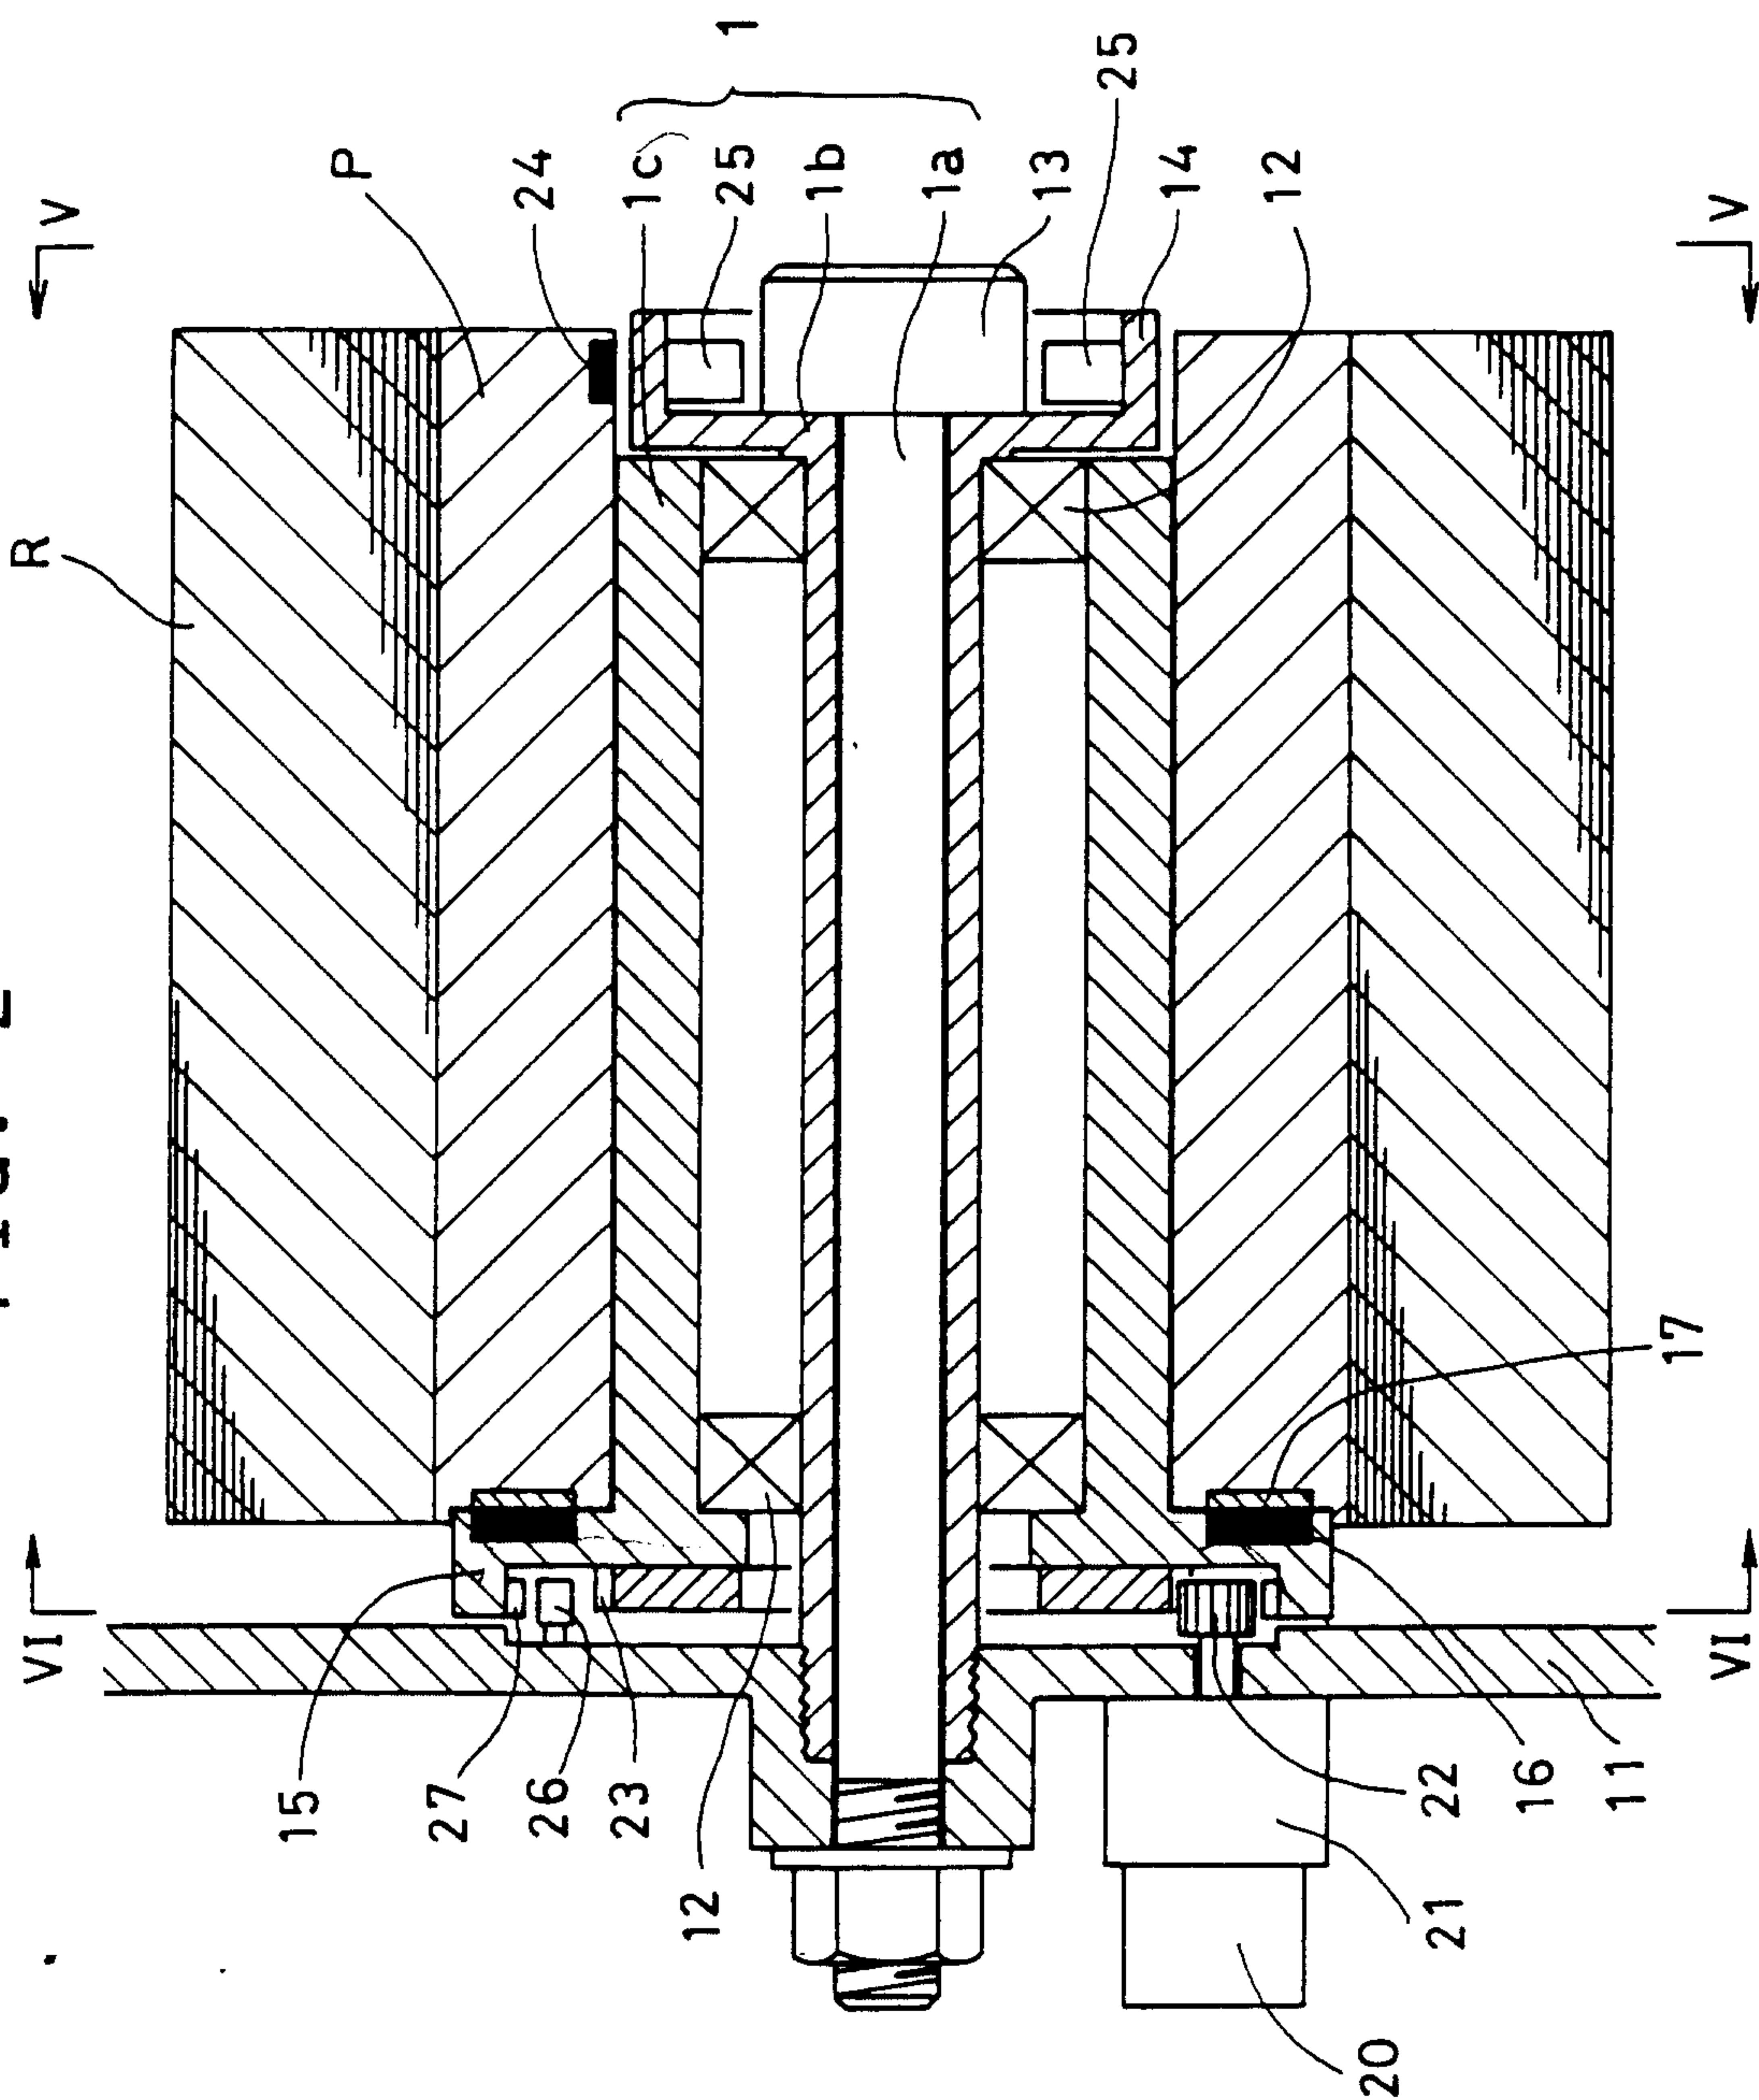


Patent Agents
Fetherstonhaugh & Co.

FIG. 3

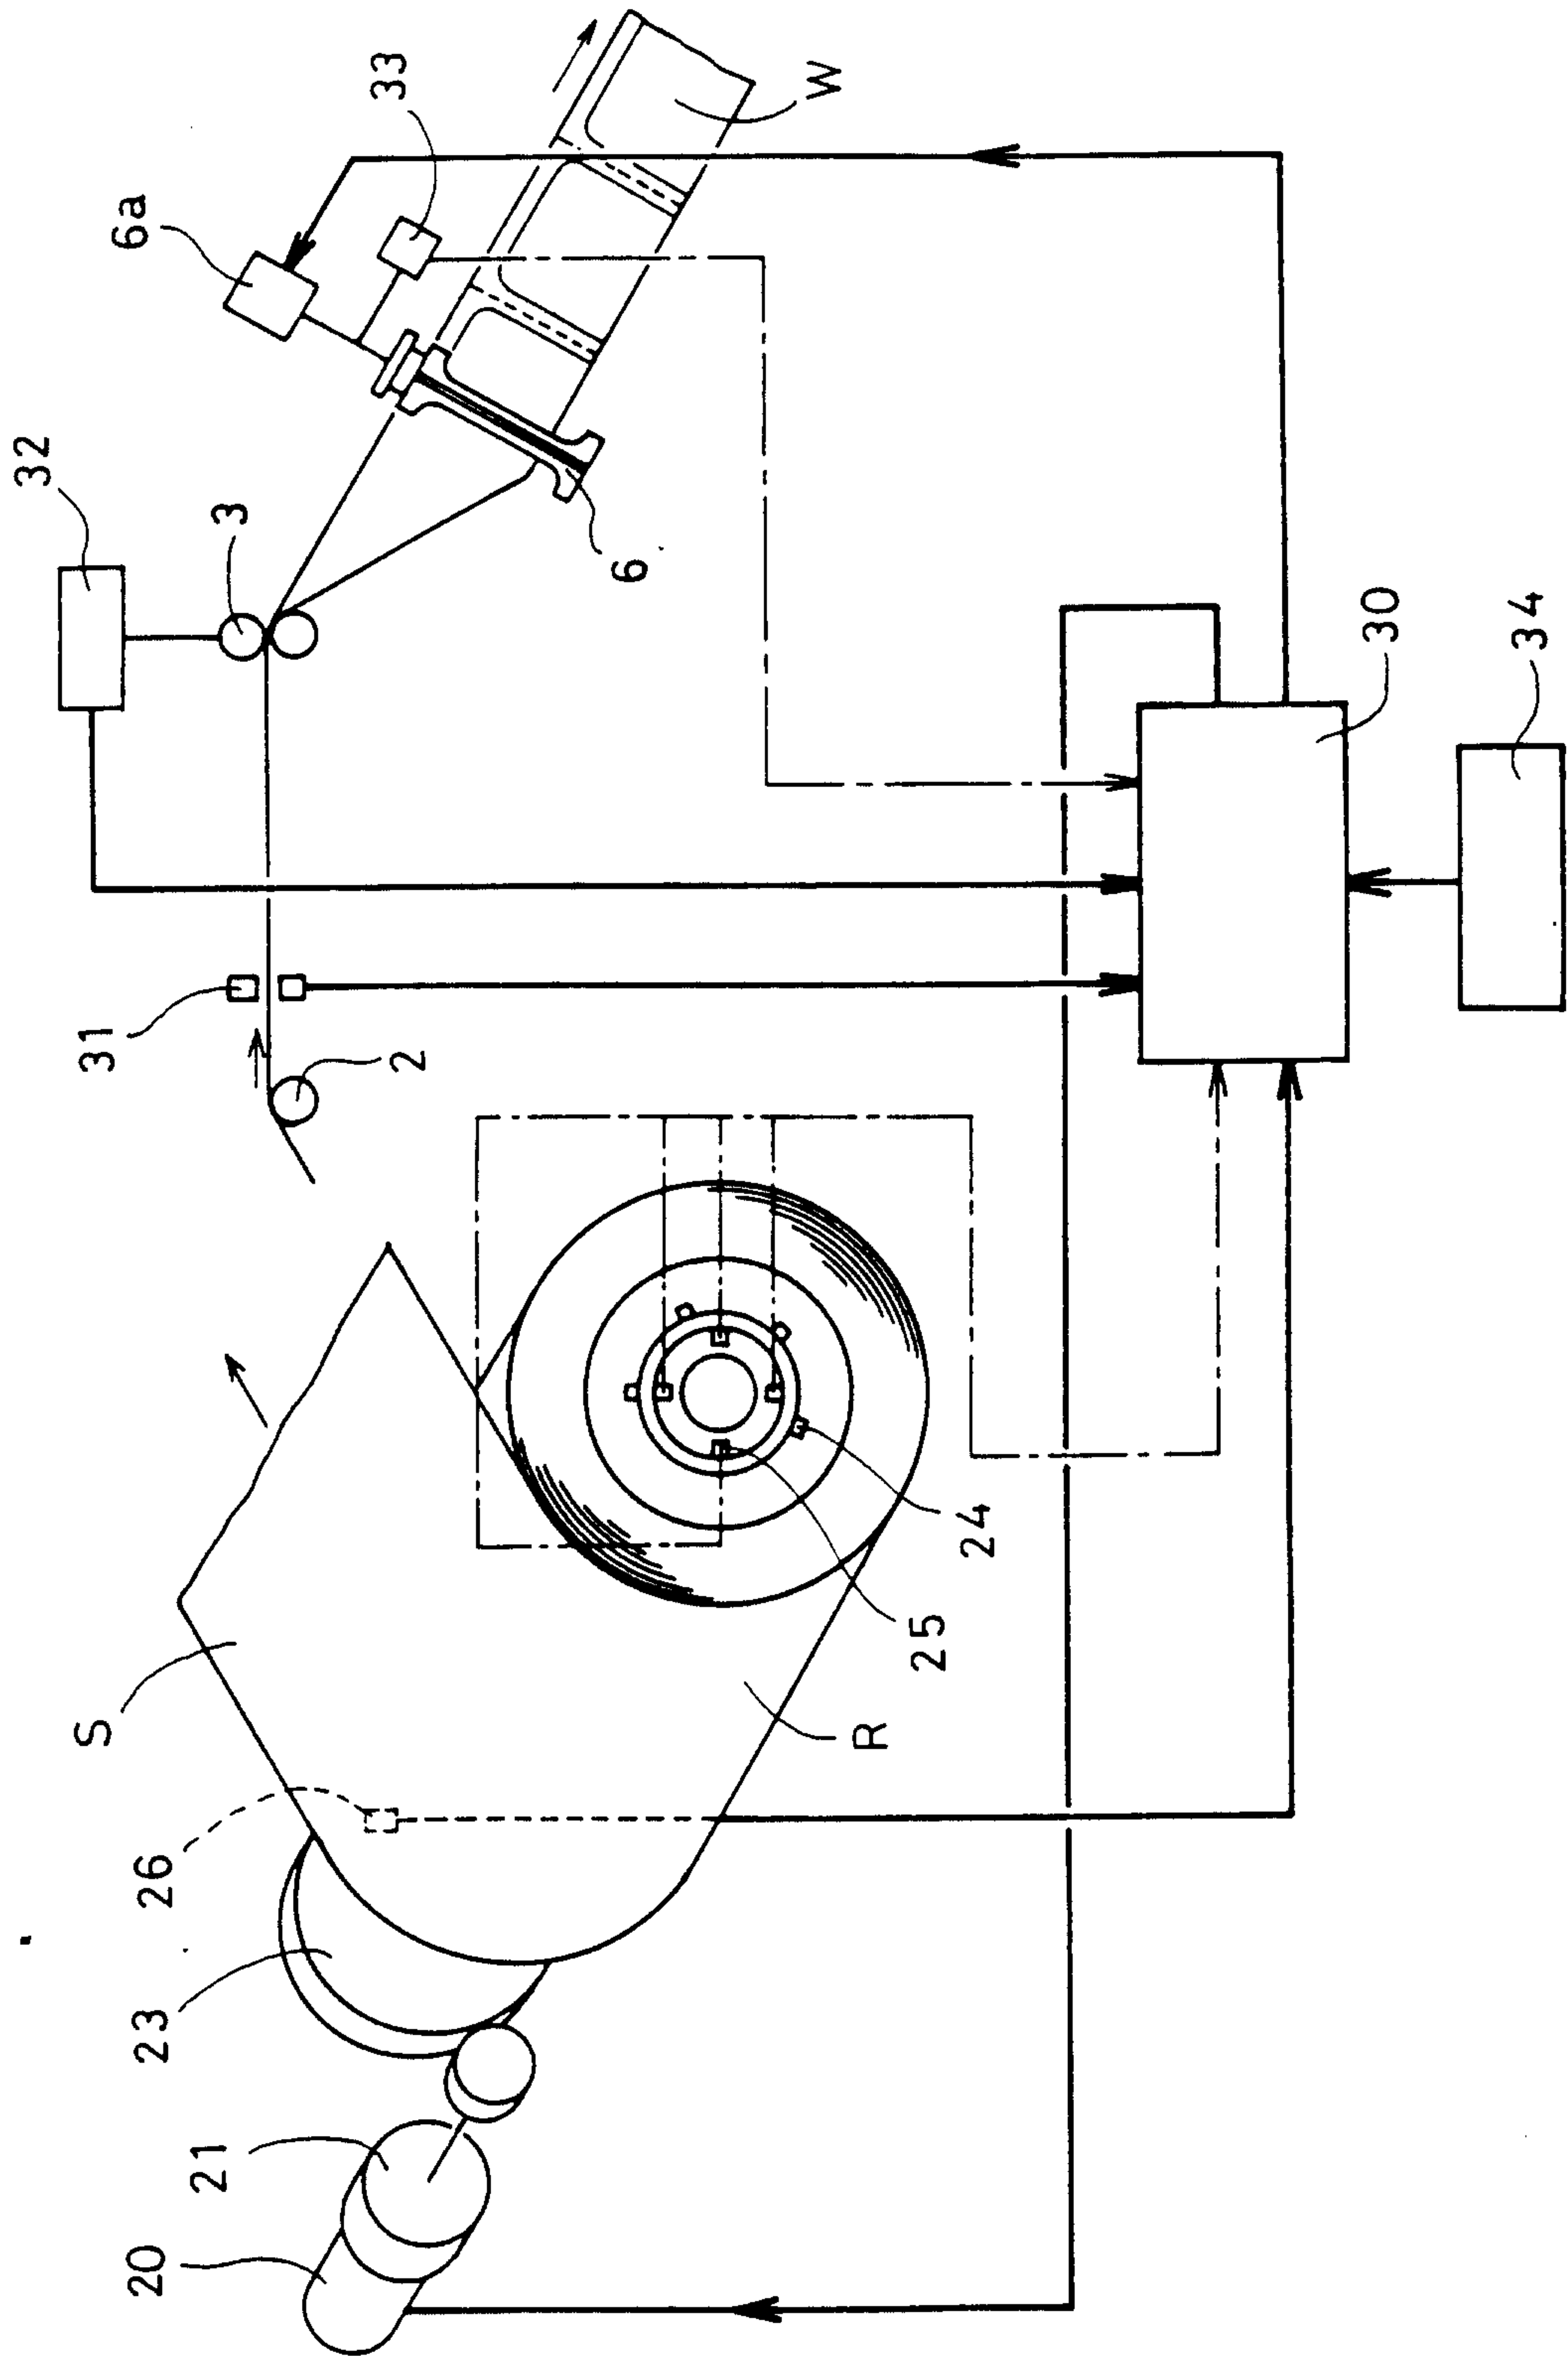

Patent Agents
Fetherstonhaugh & Co.

FIG. 4

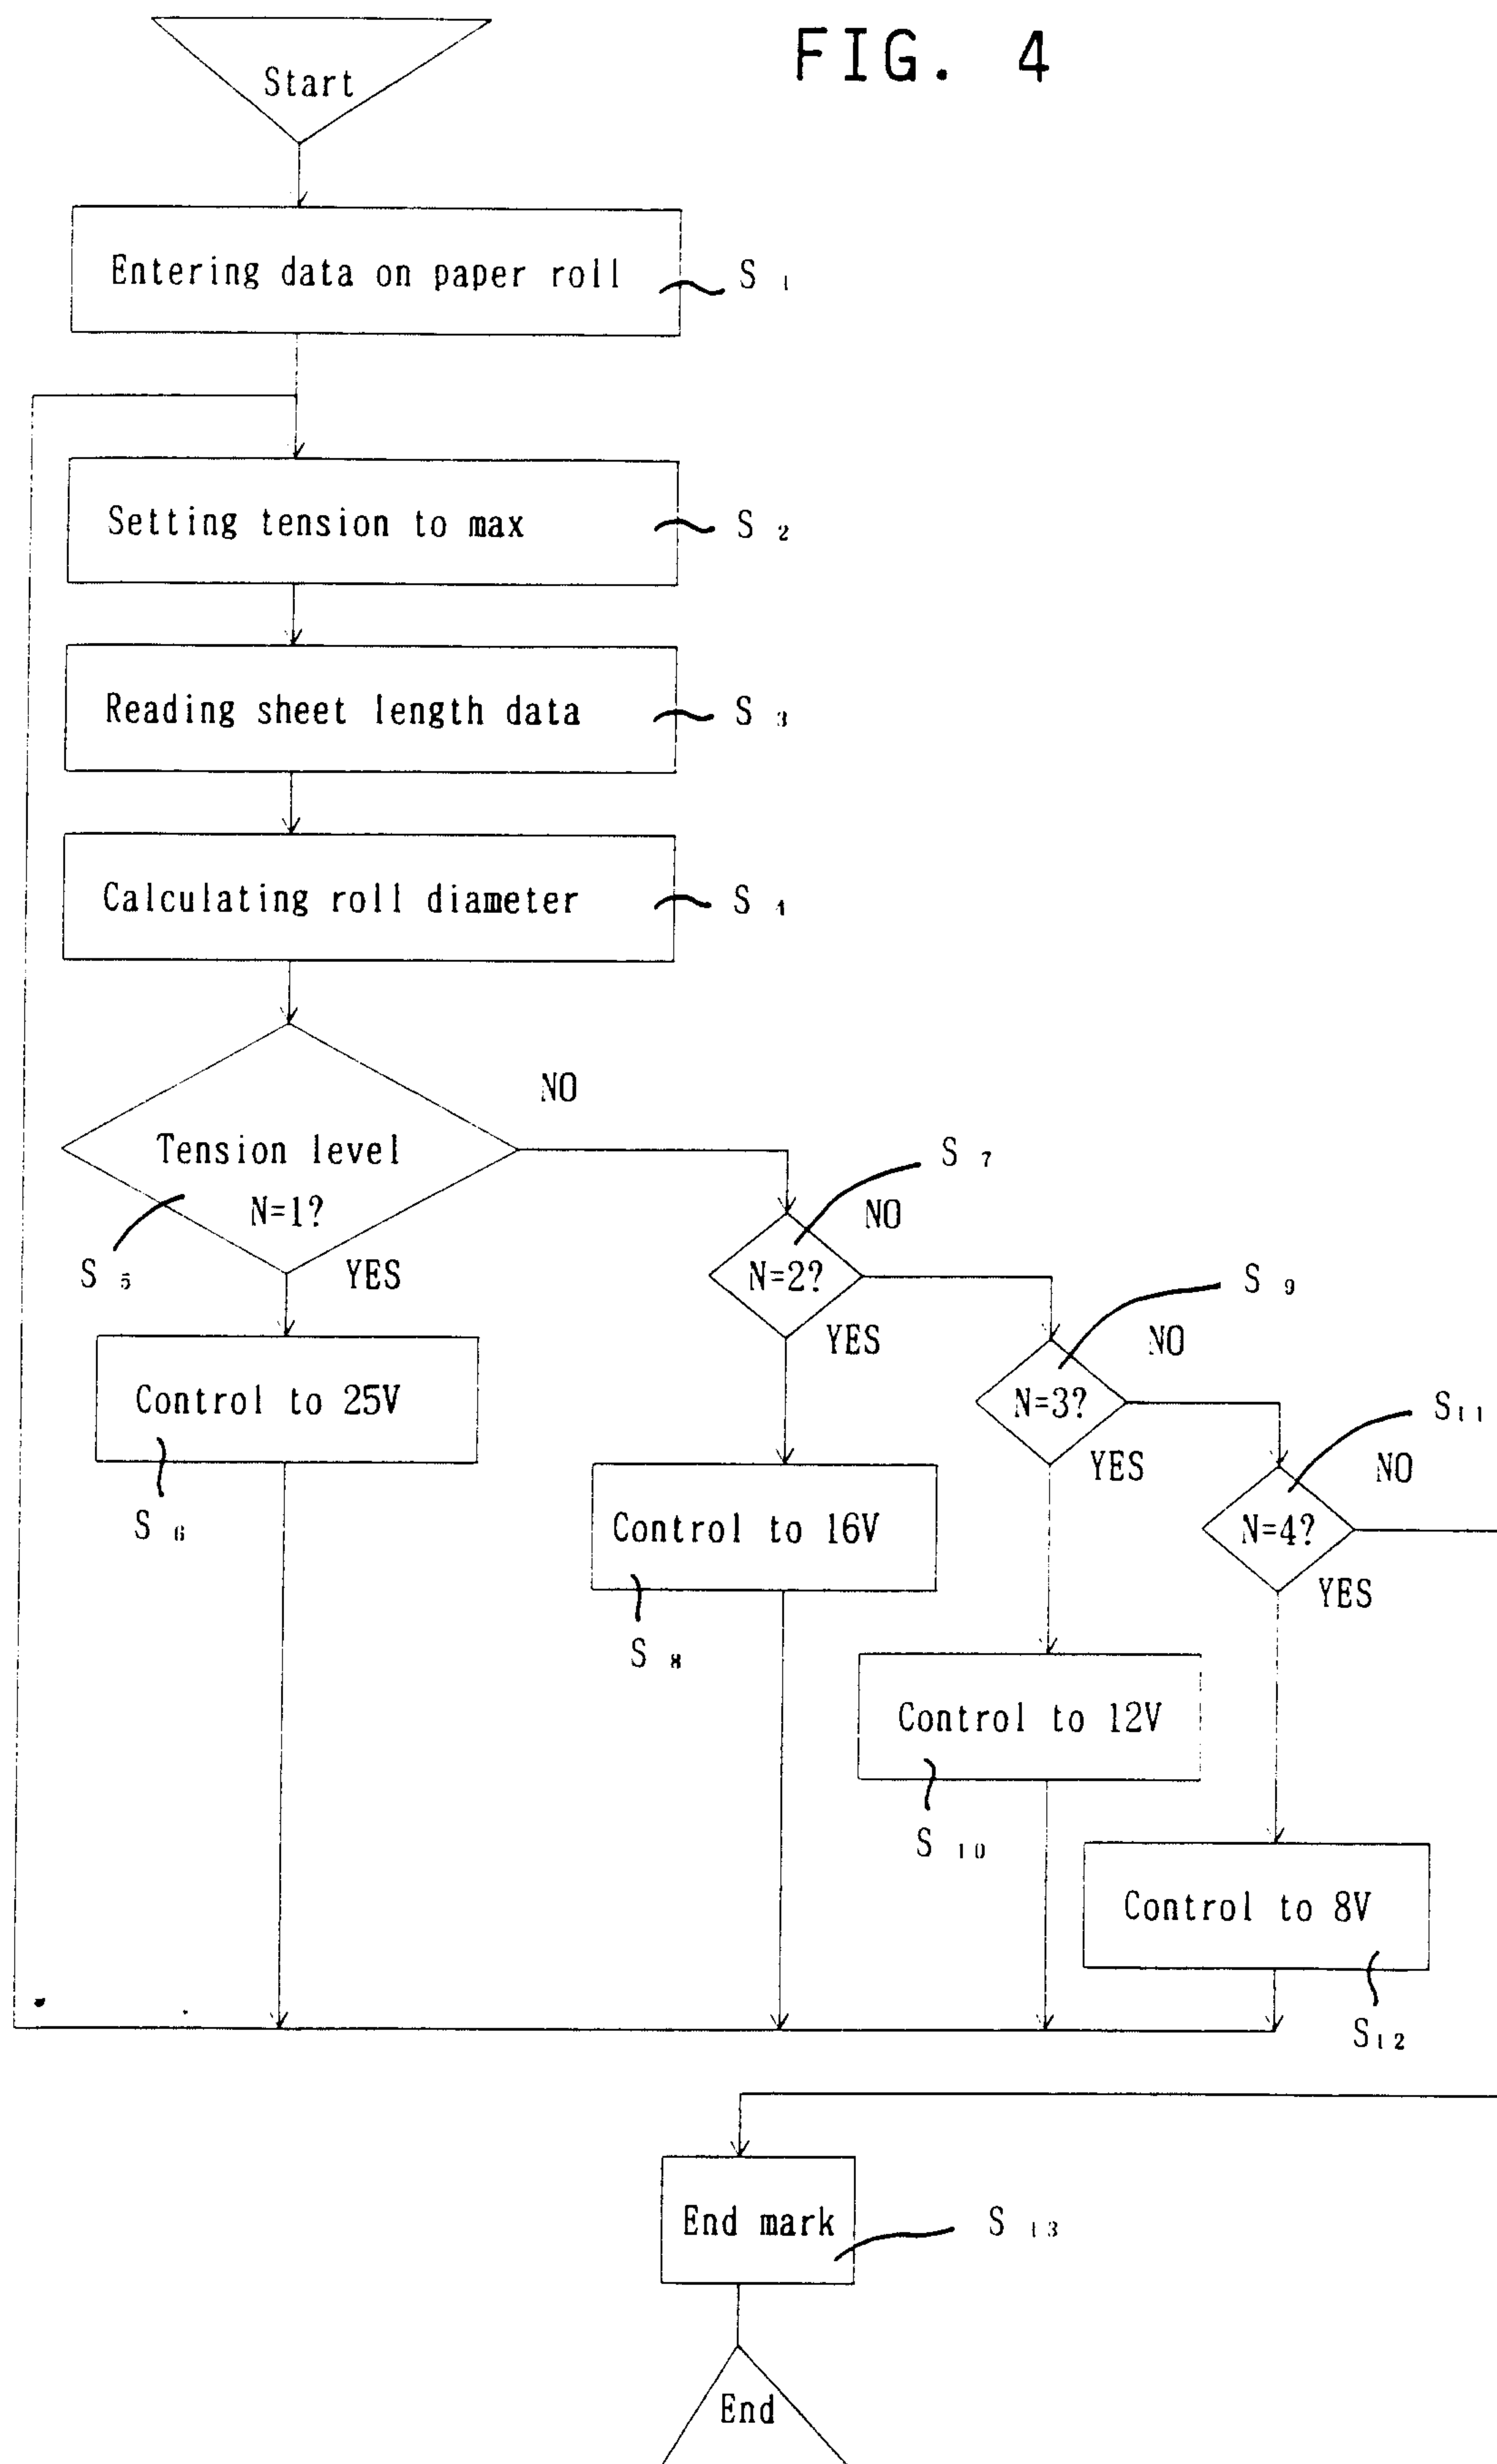

Patent Agents
Fetherstonhaugh & Co.

FIG. 5



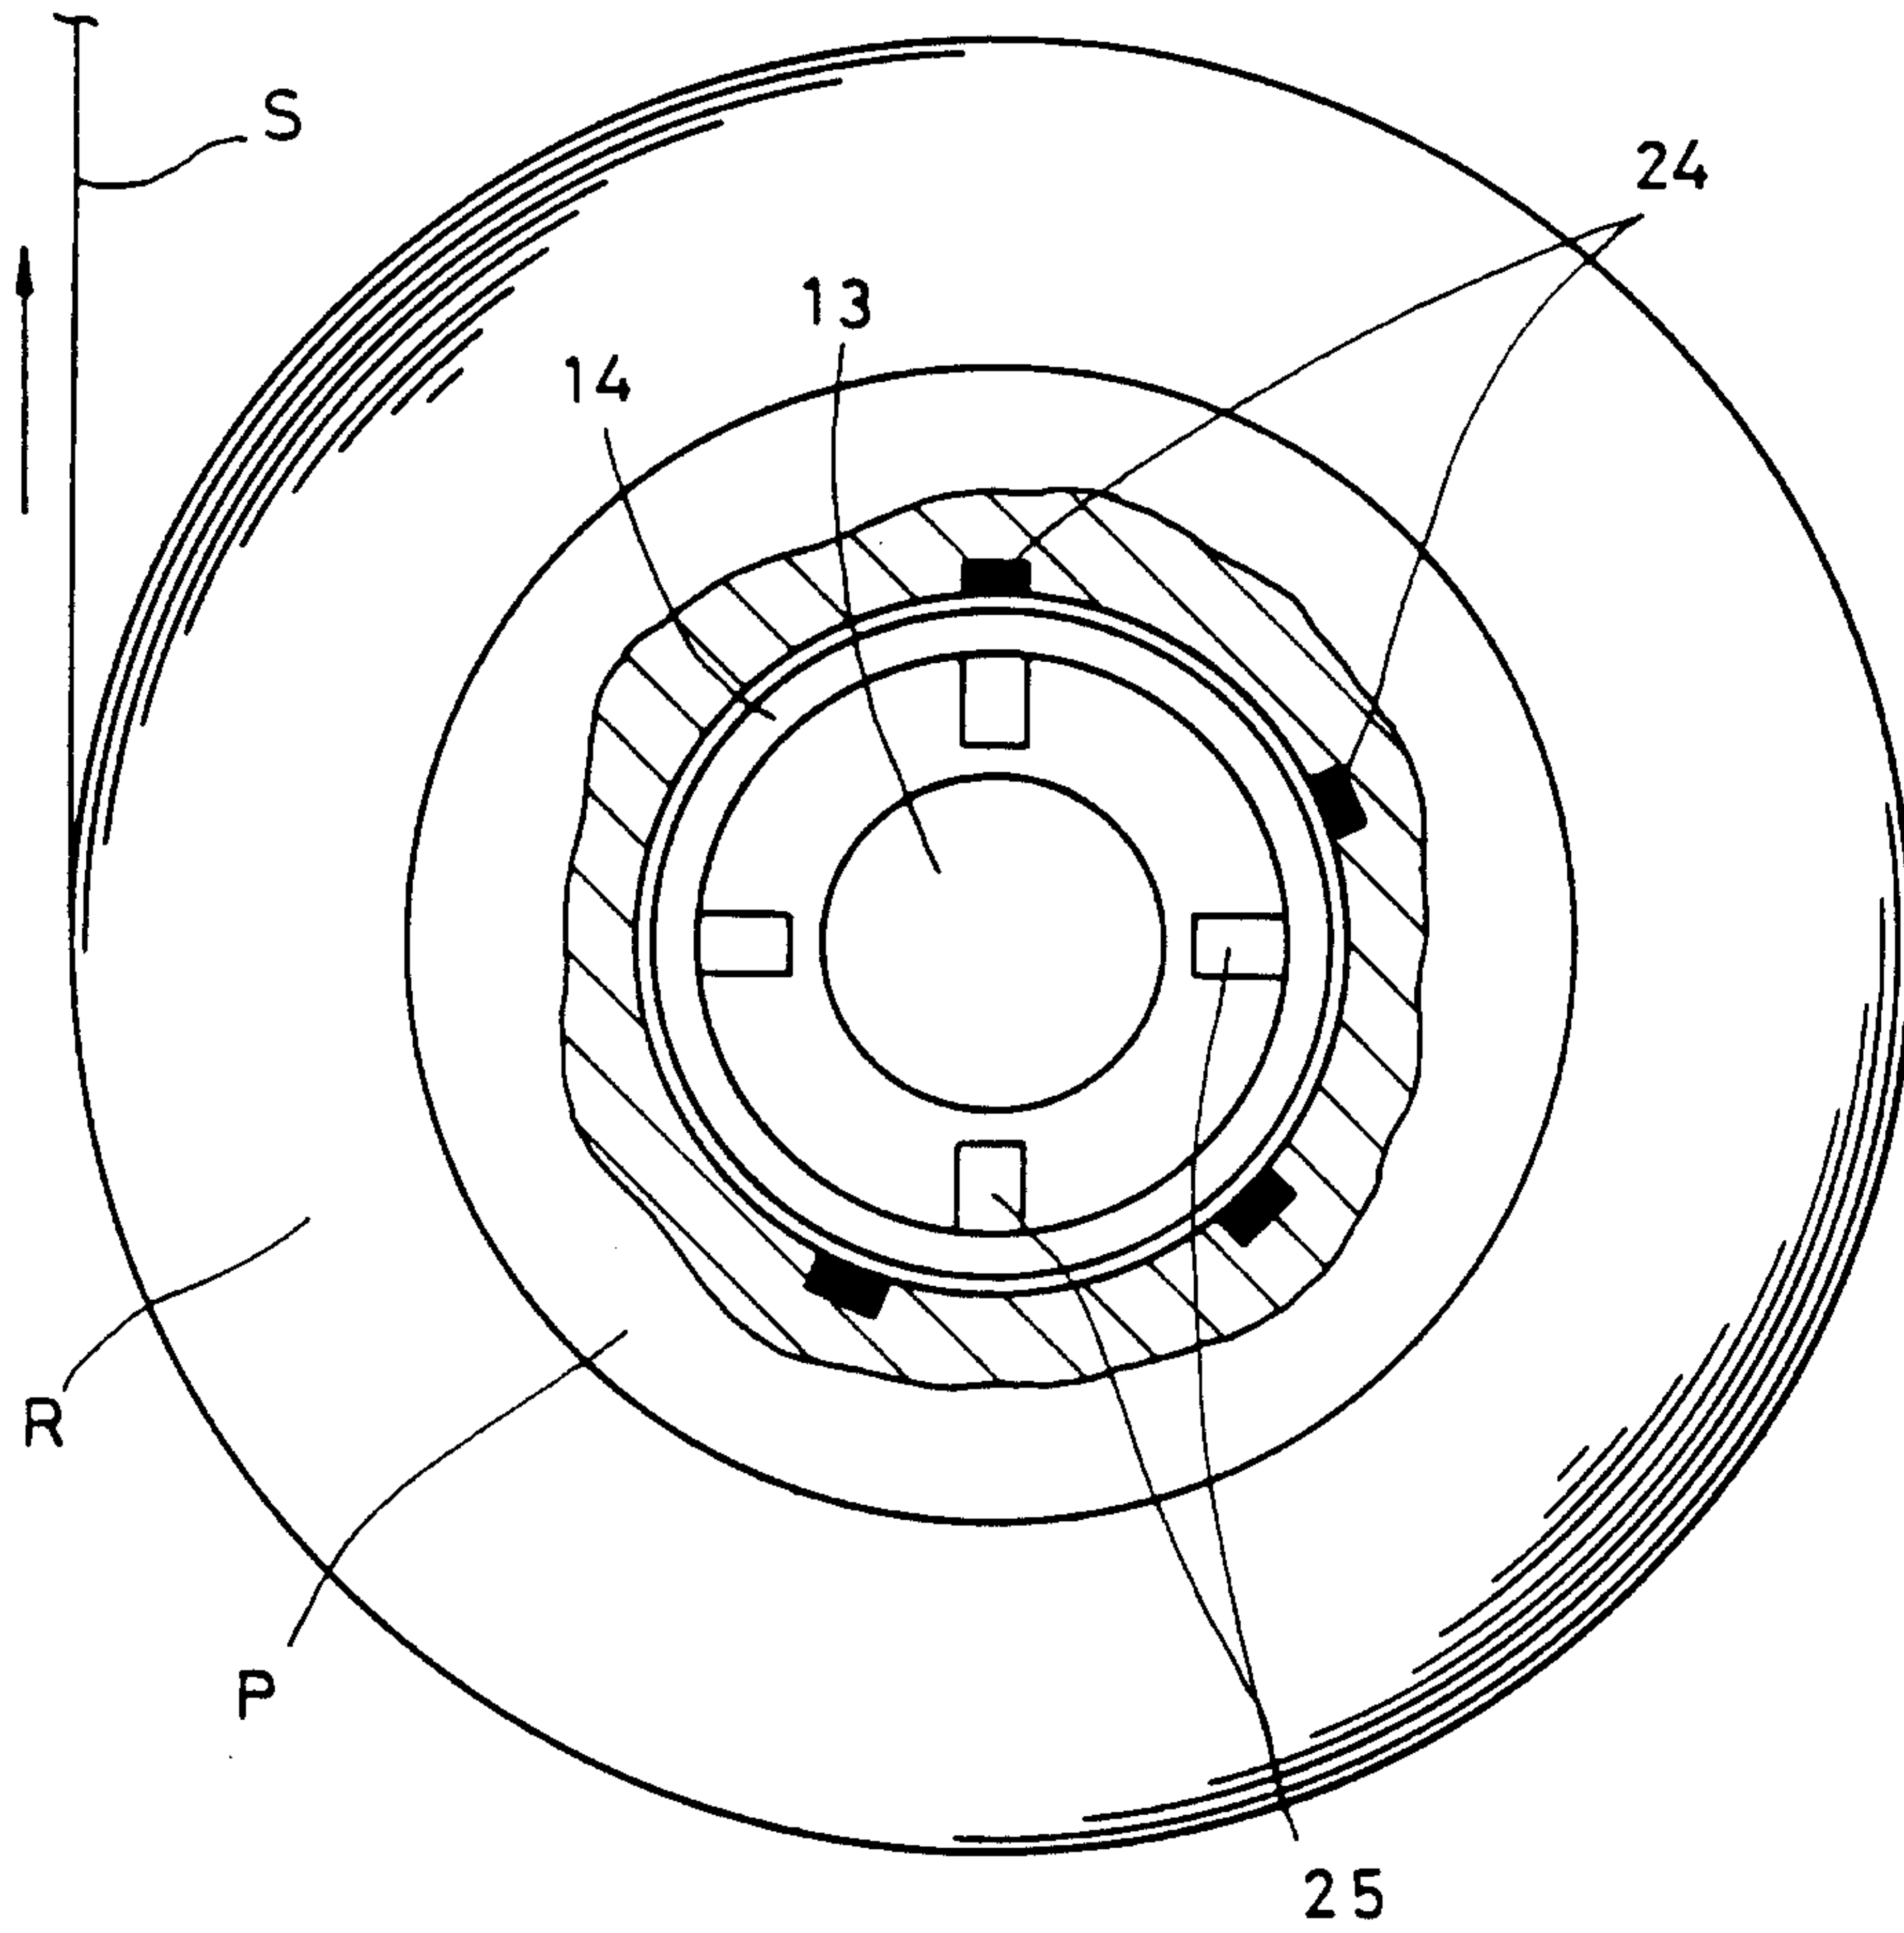


FIG. 6

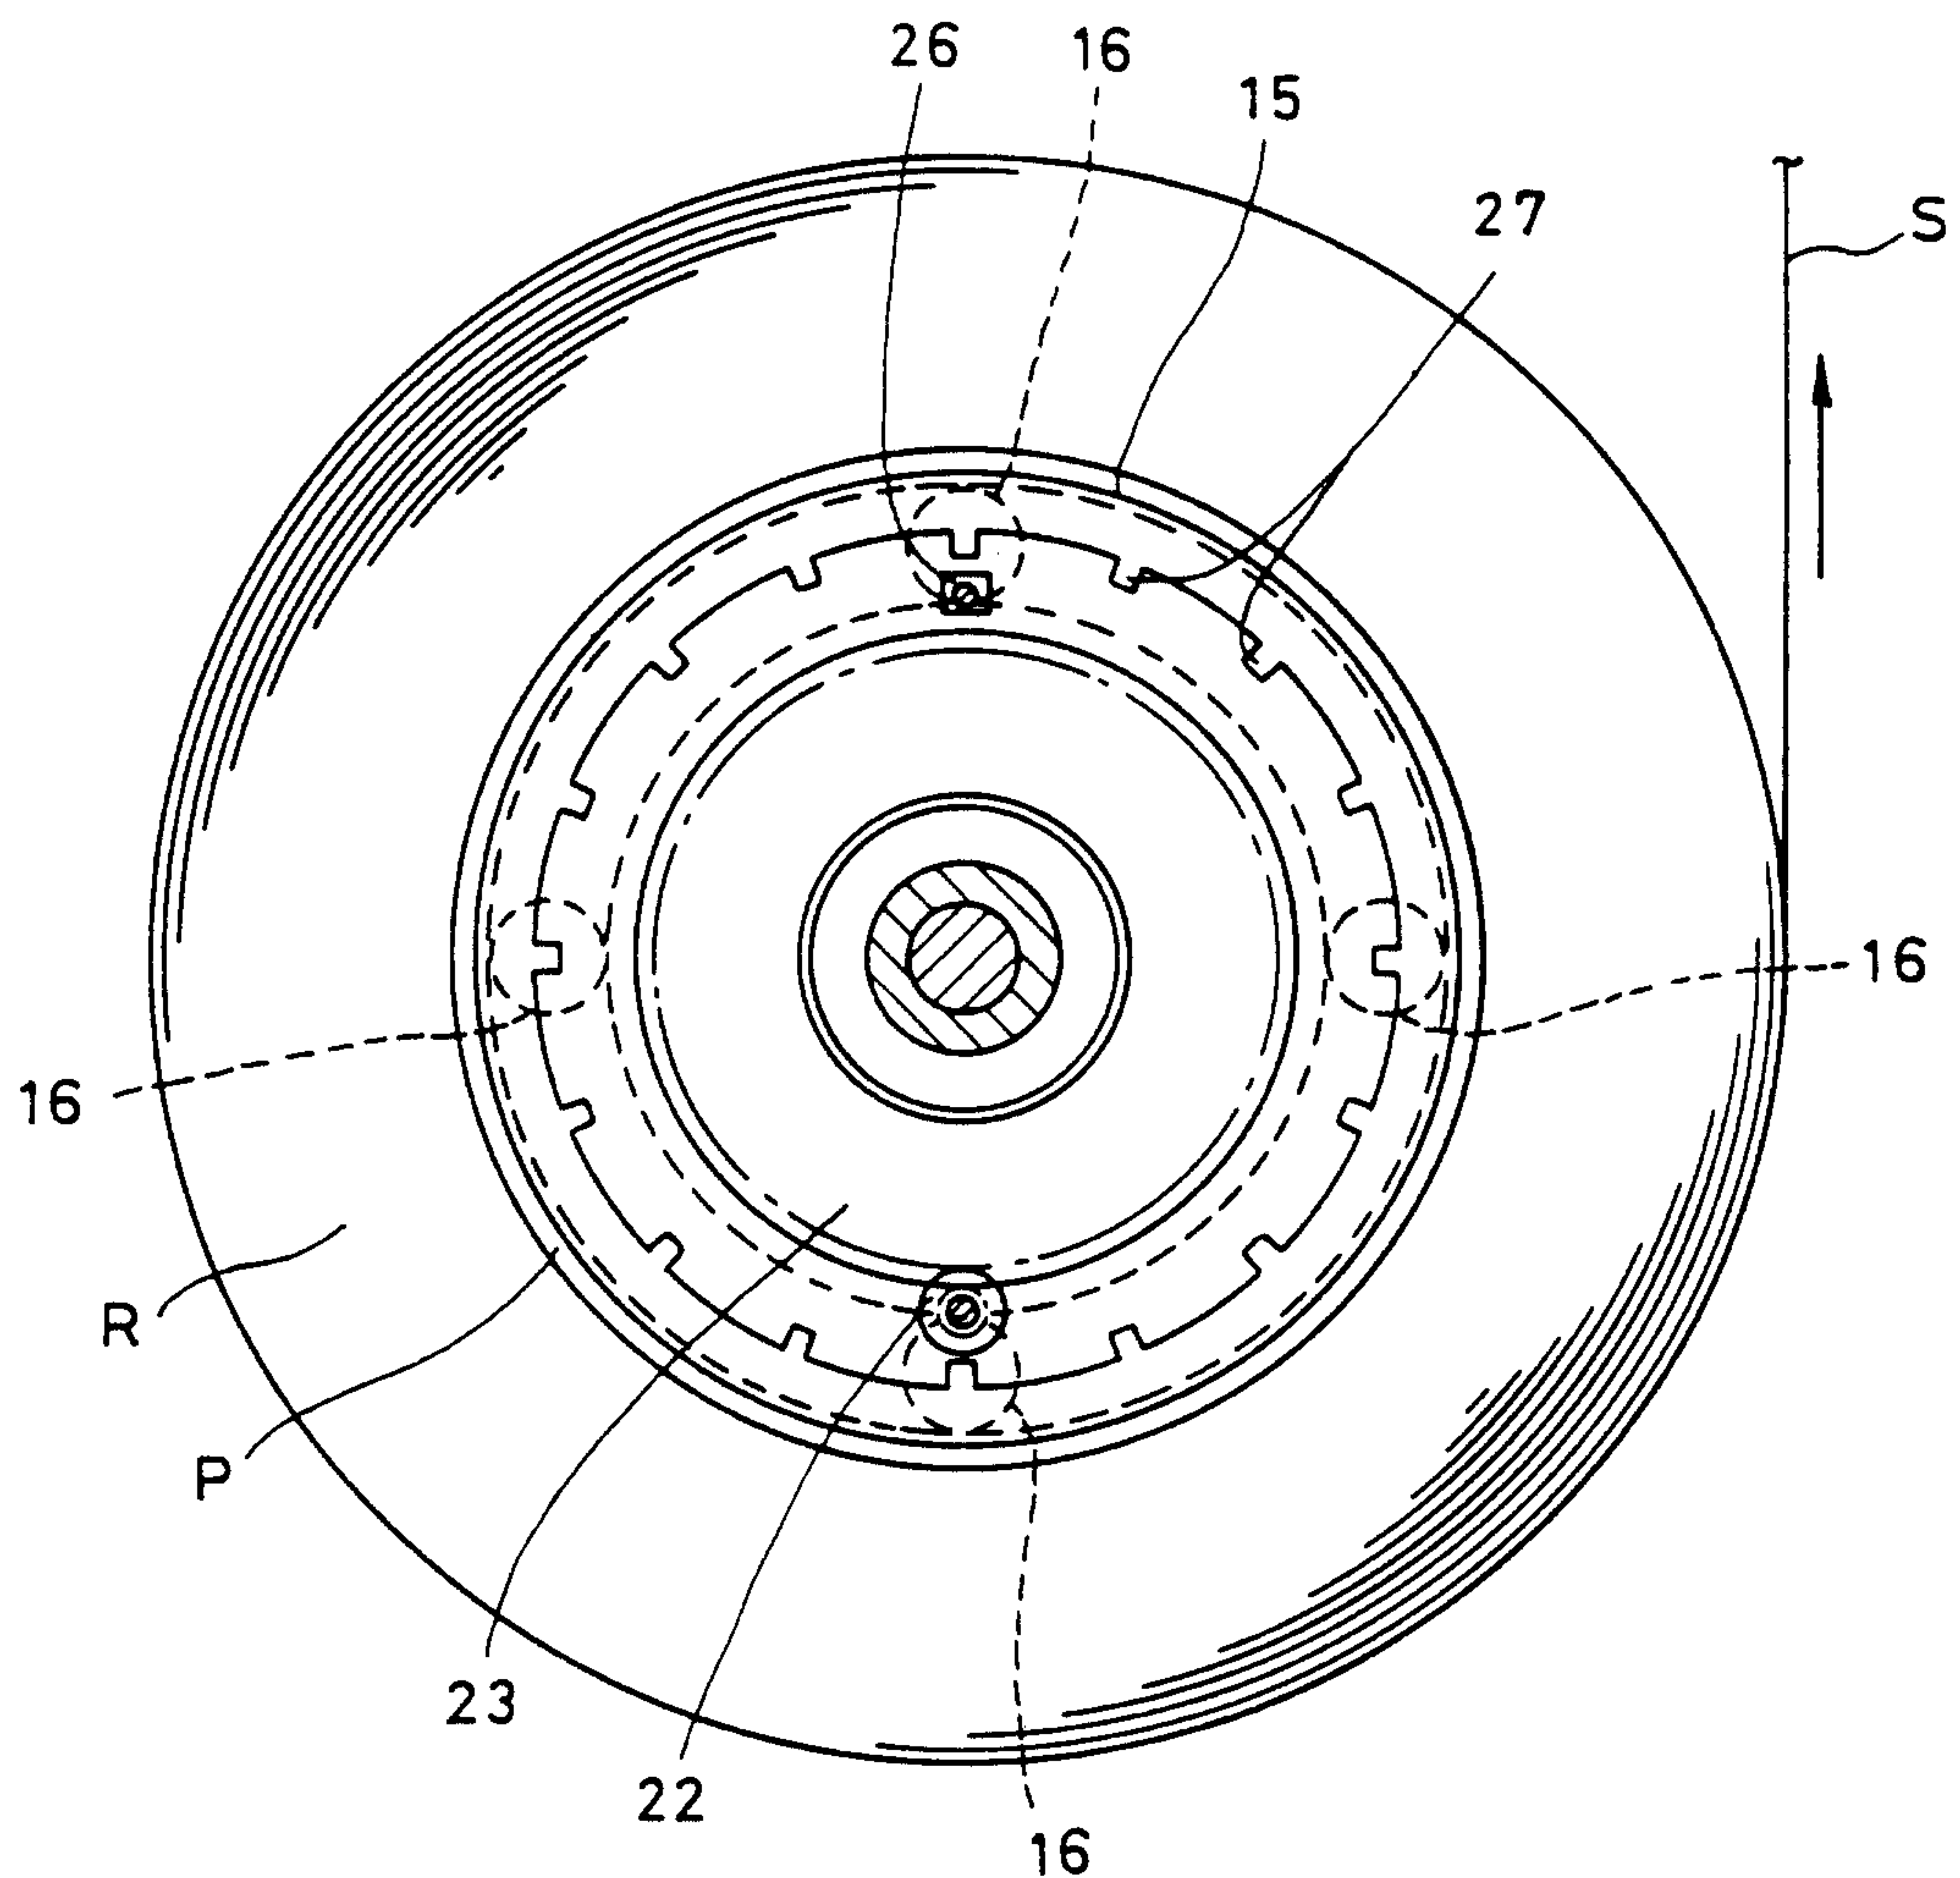

Patent Agents
Fetherstonhaugh & Co.

FIG. 7

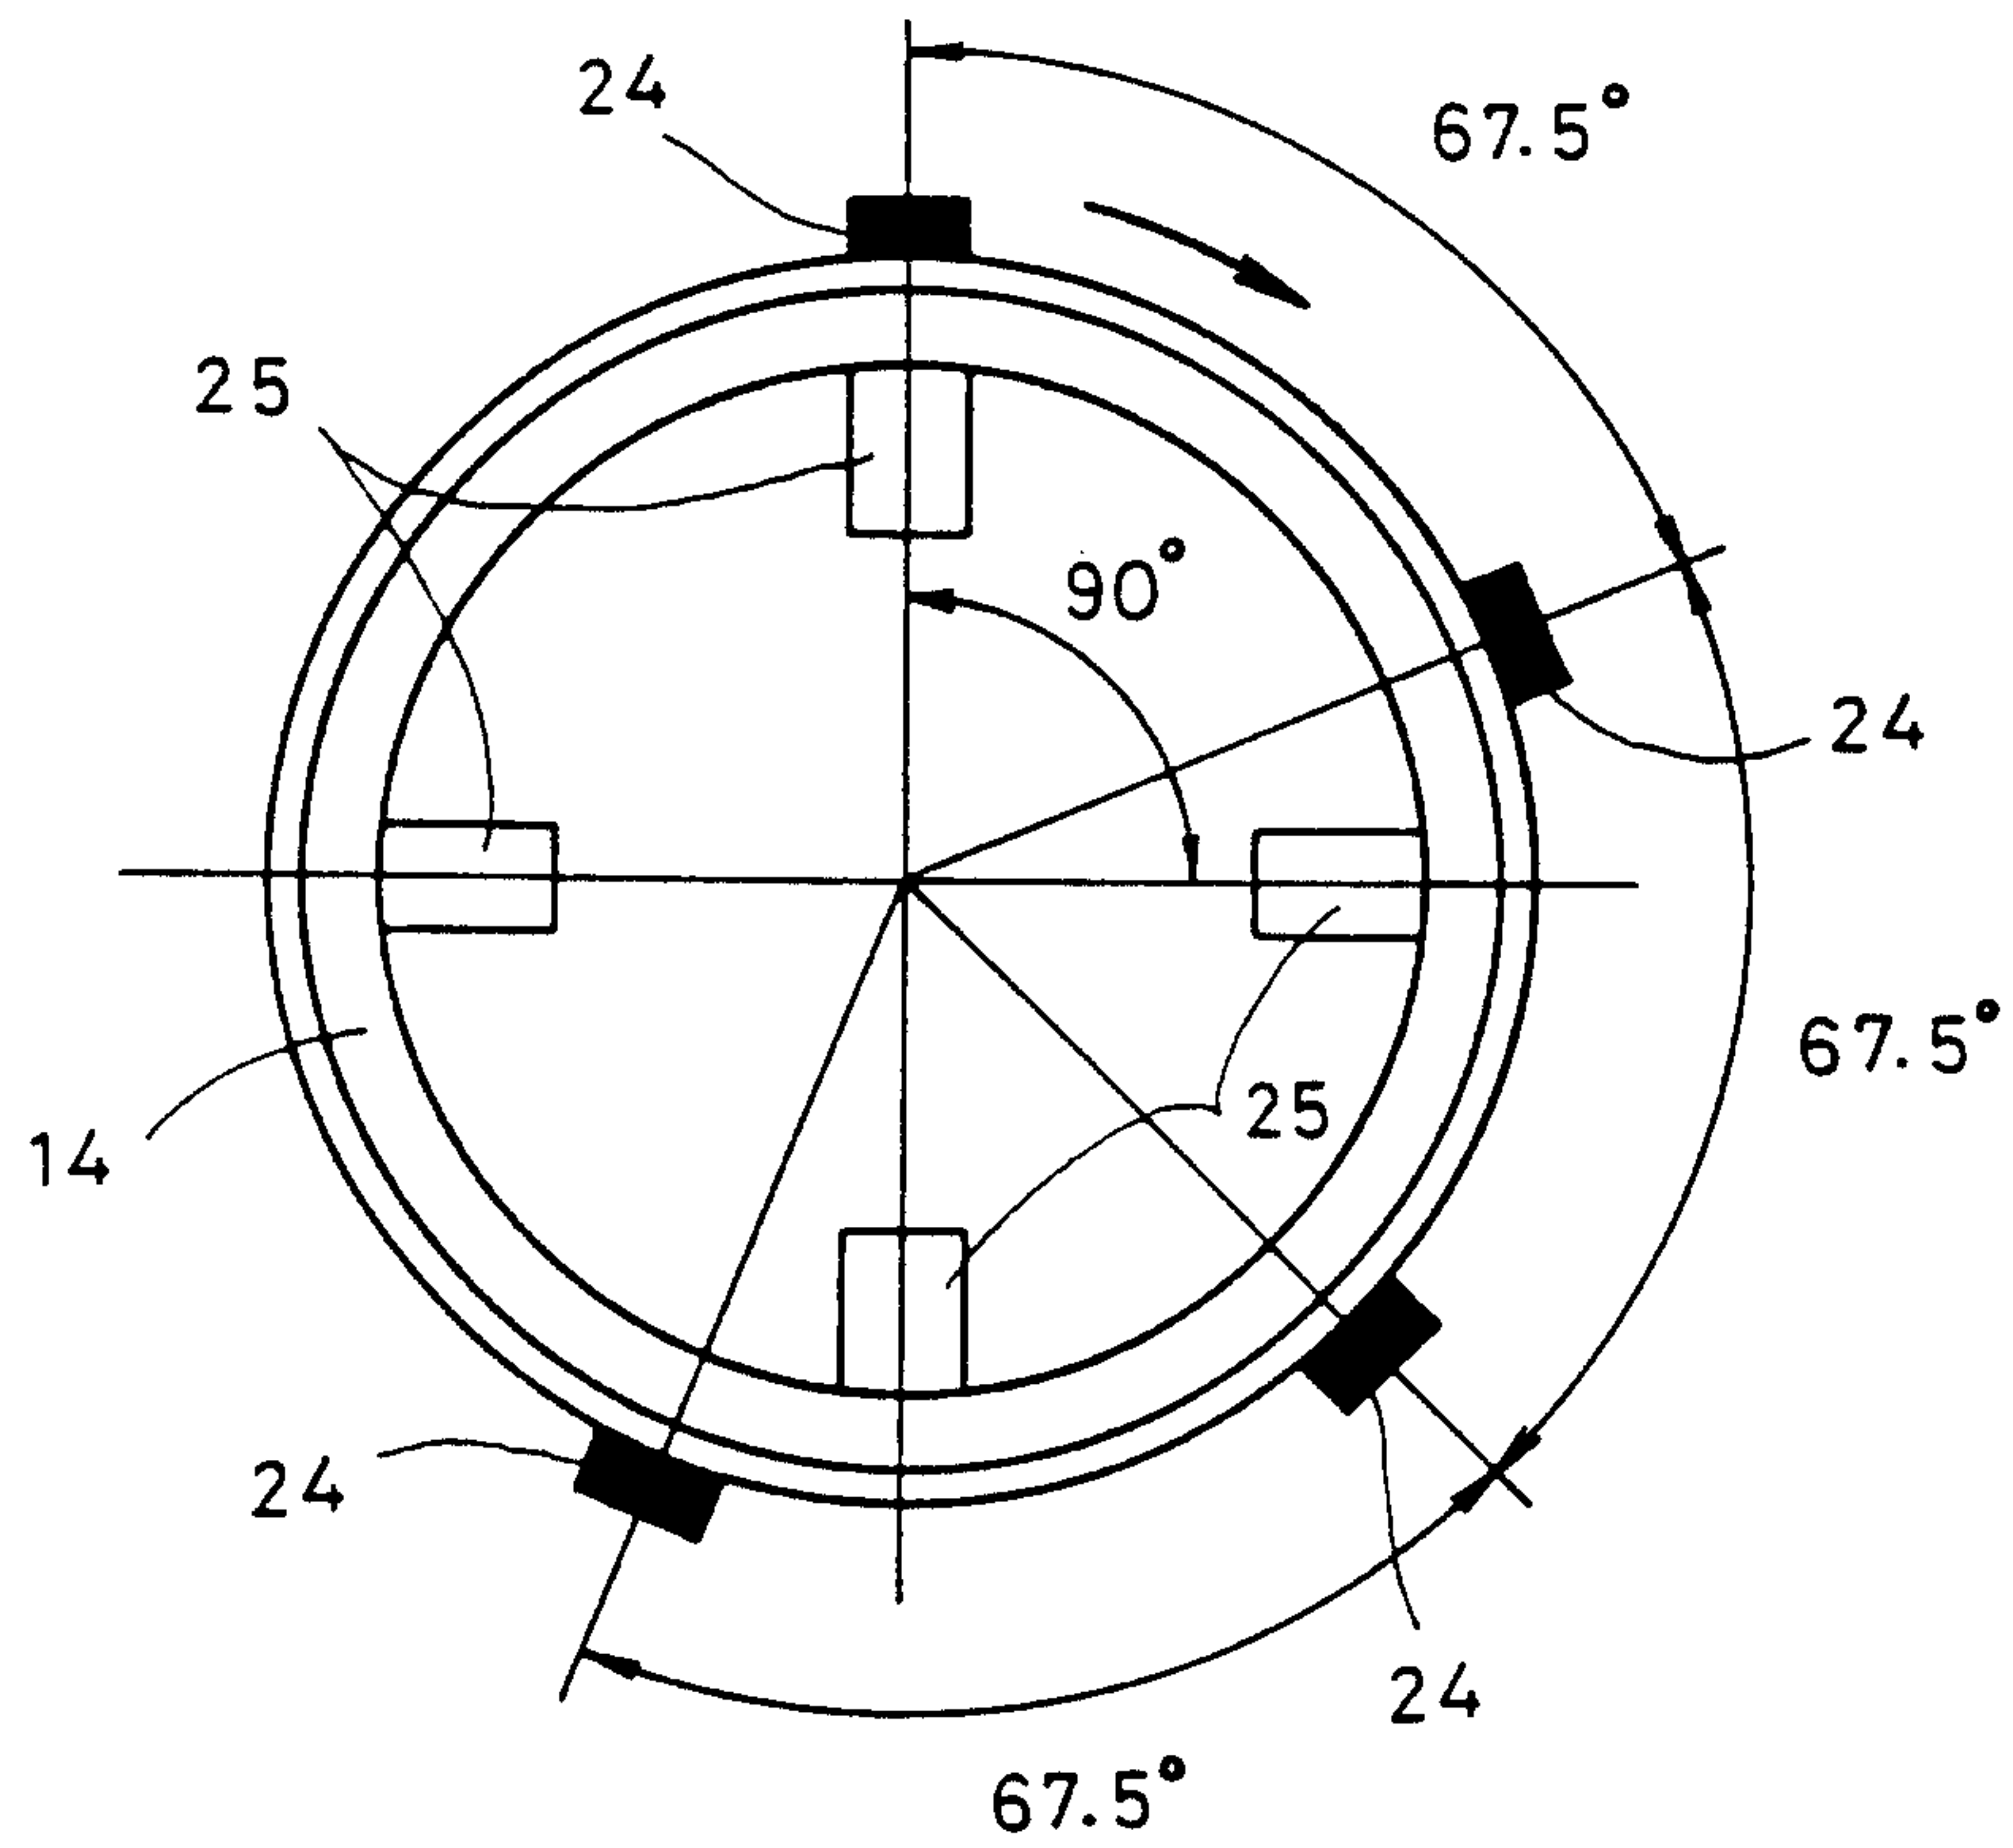

Patent Agents
Fetherstonhaugh & Co.

FIG. 8A

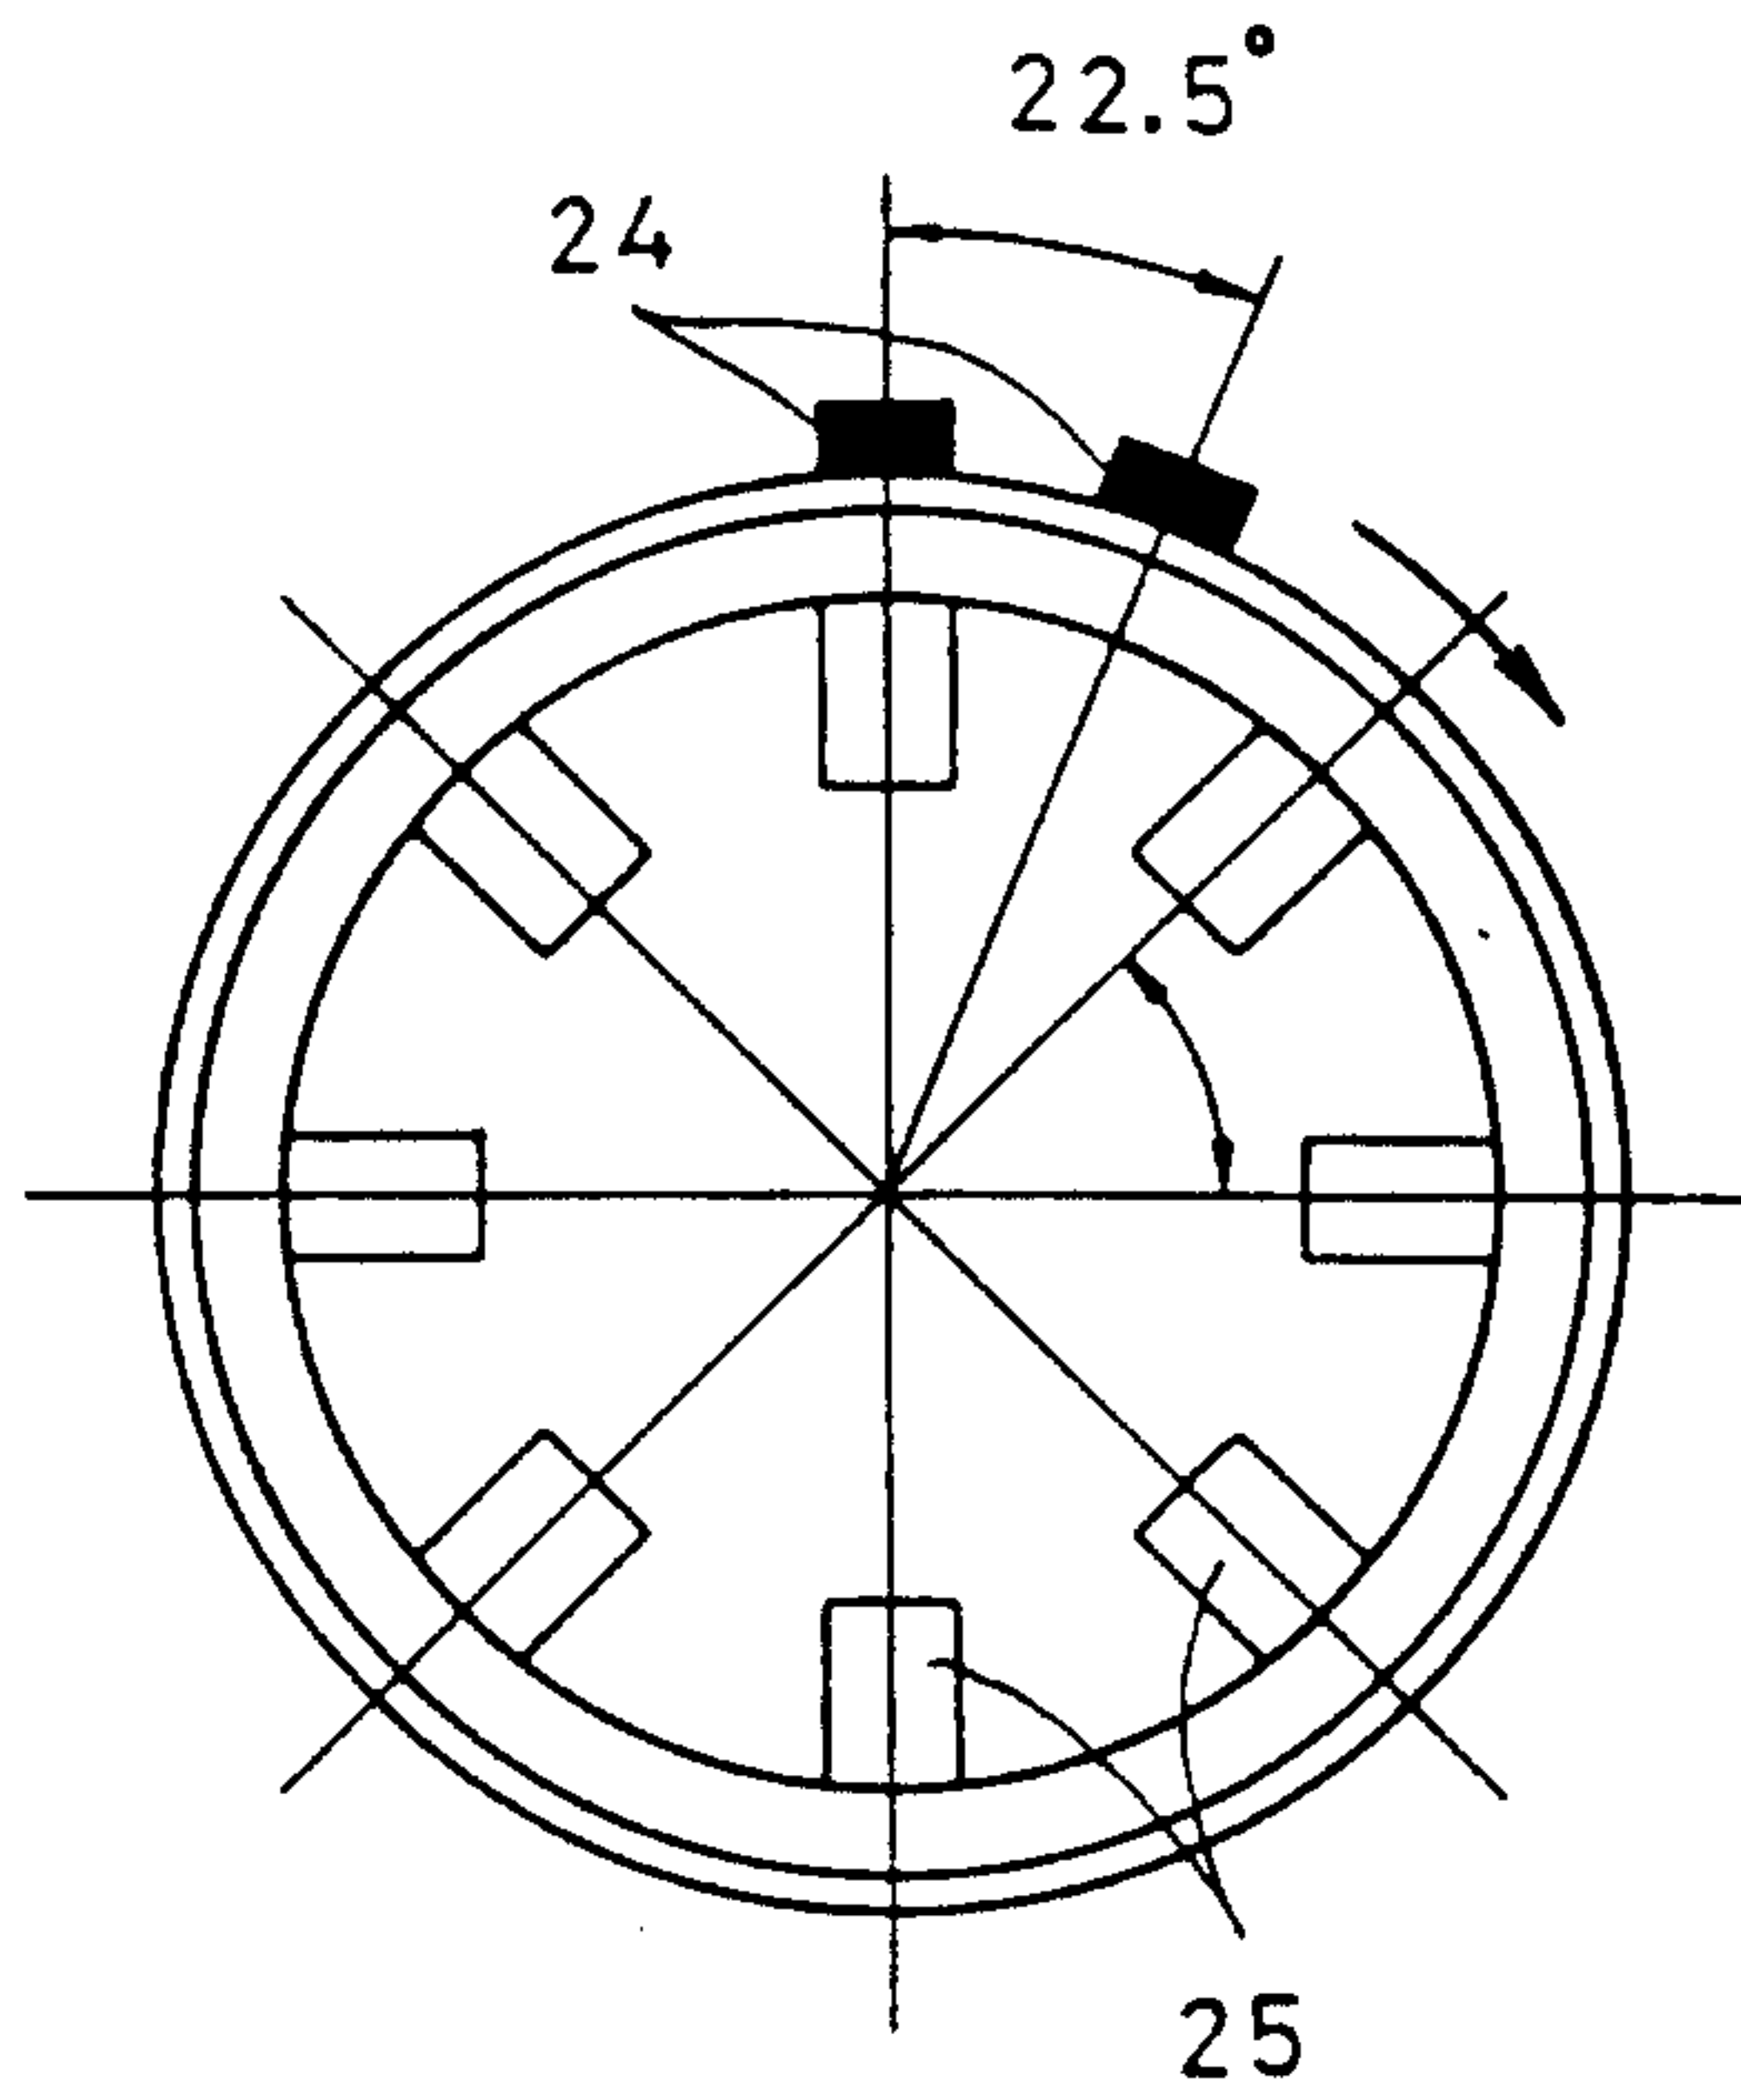


FIG. 8B

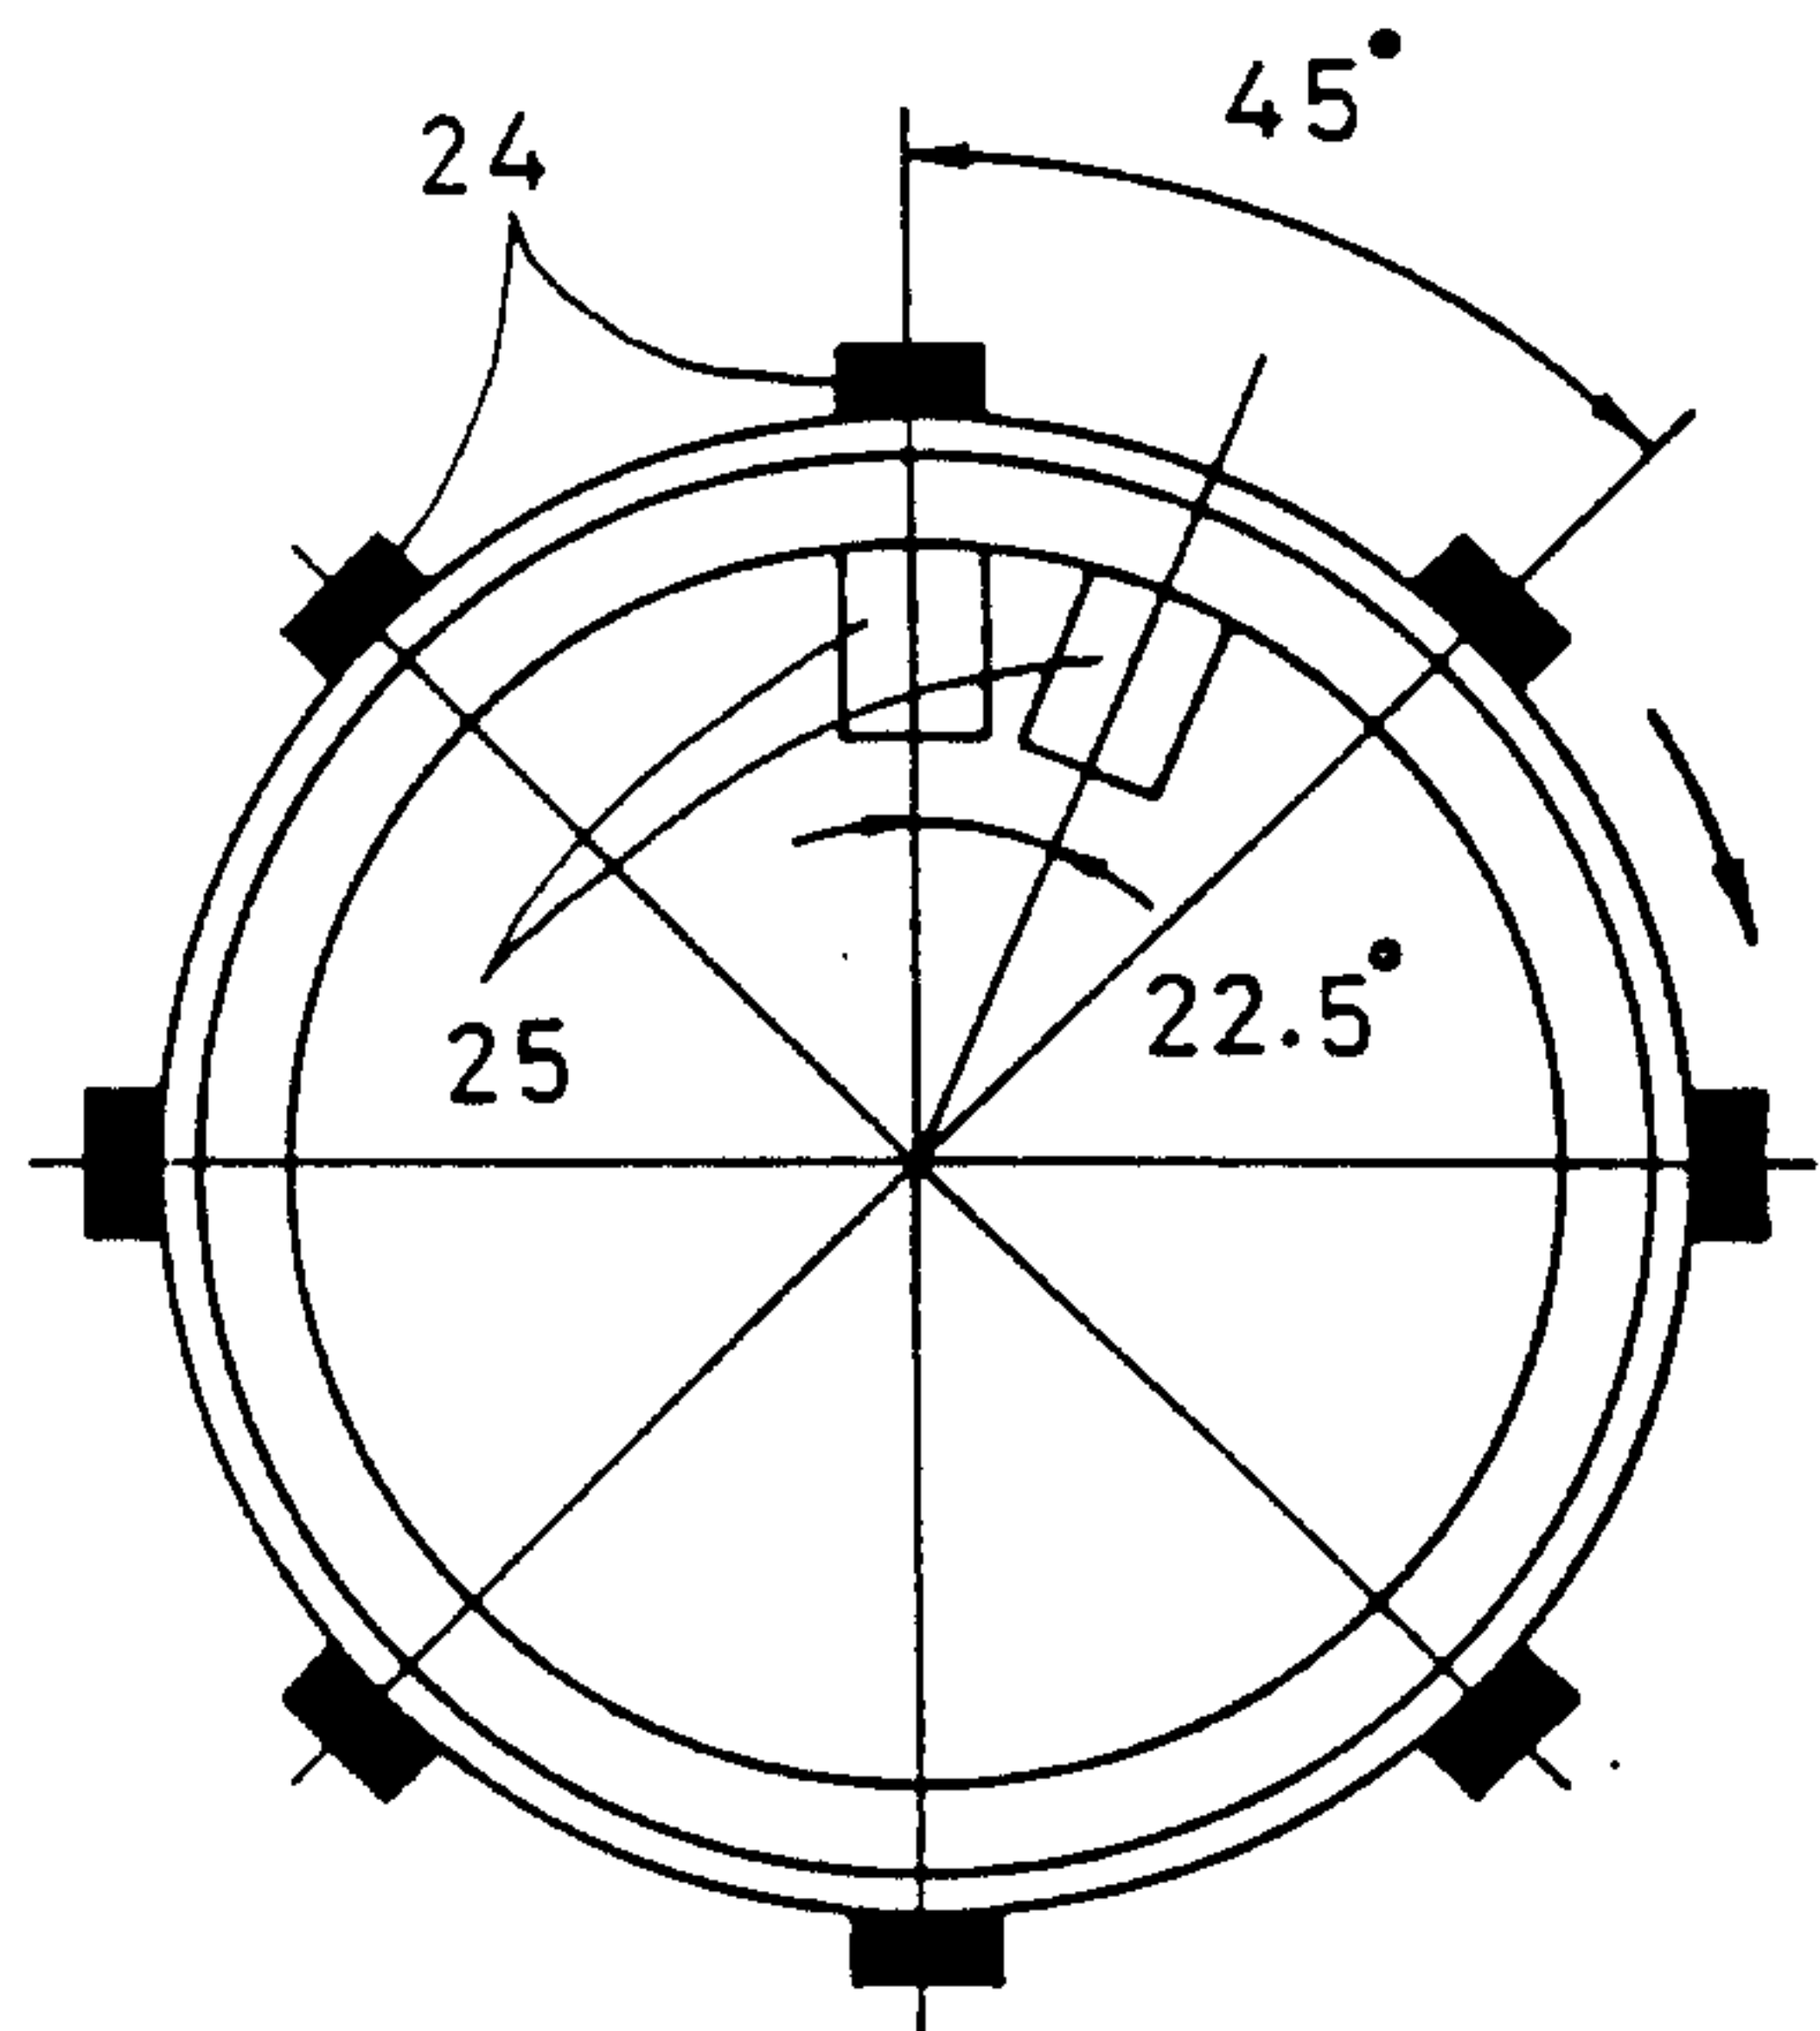


FIG. 8C



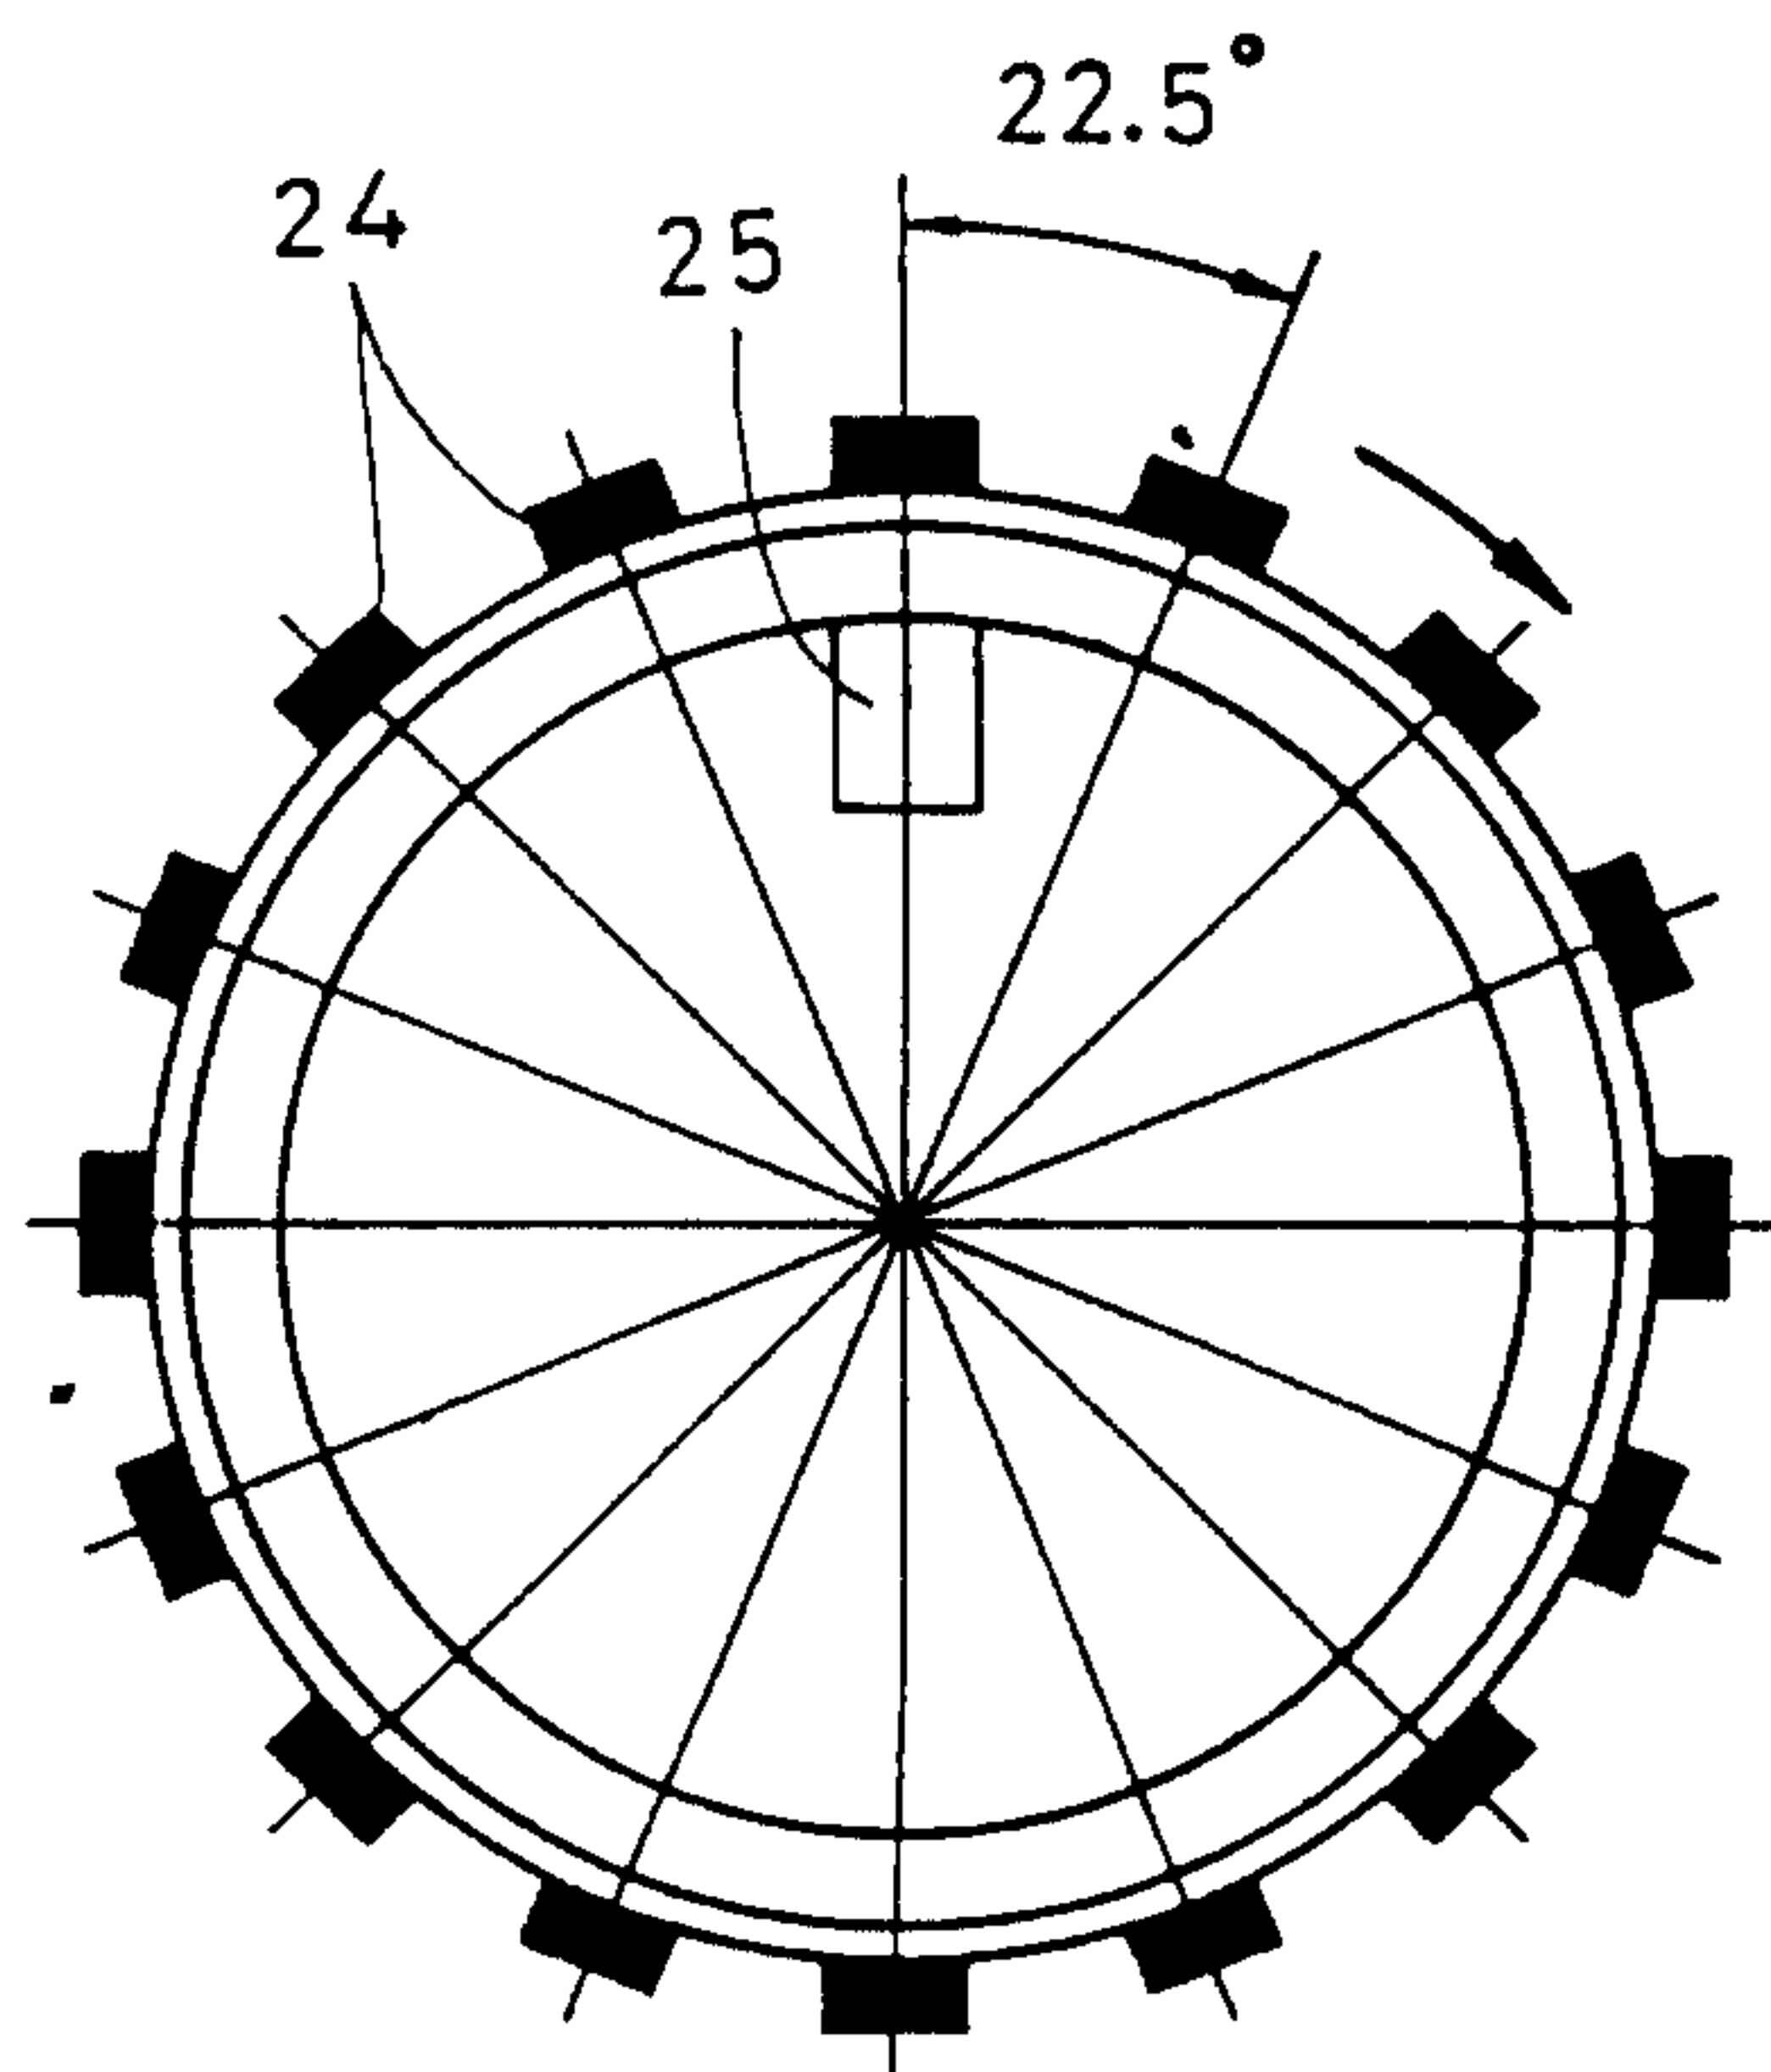


FIG. 8D

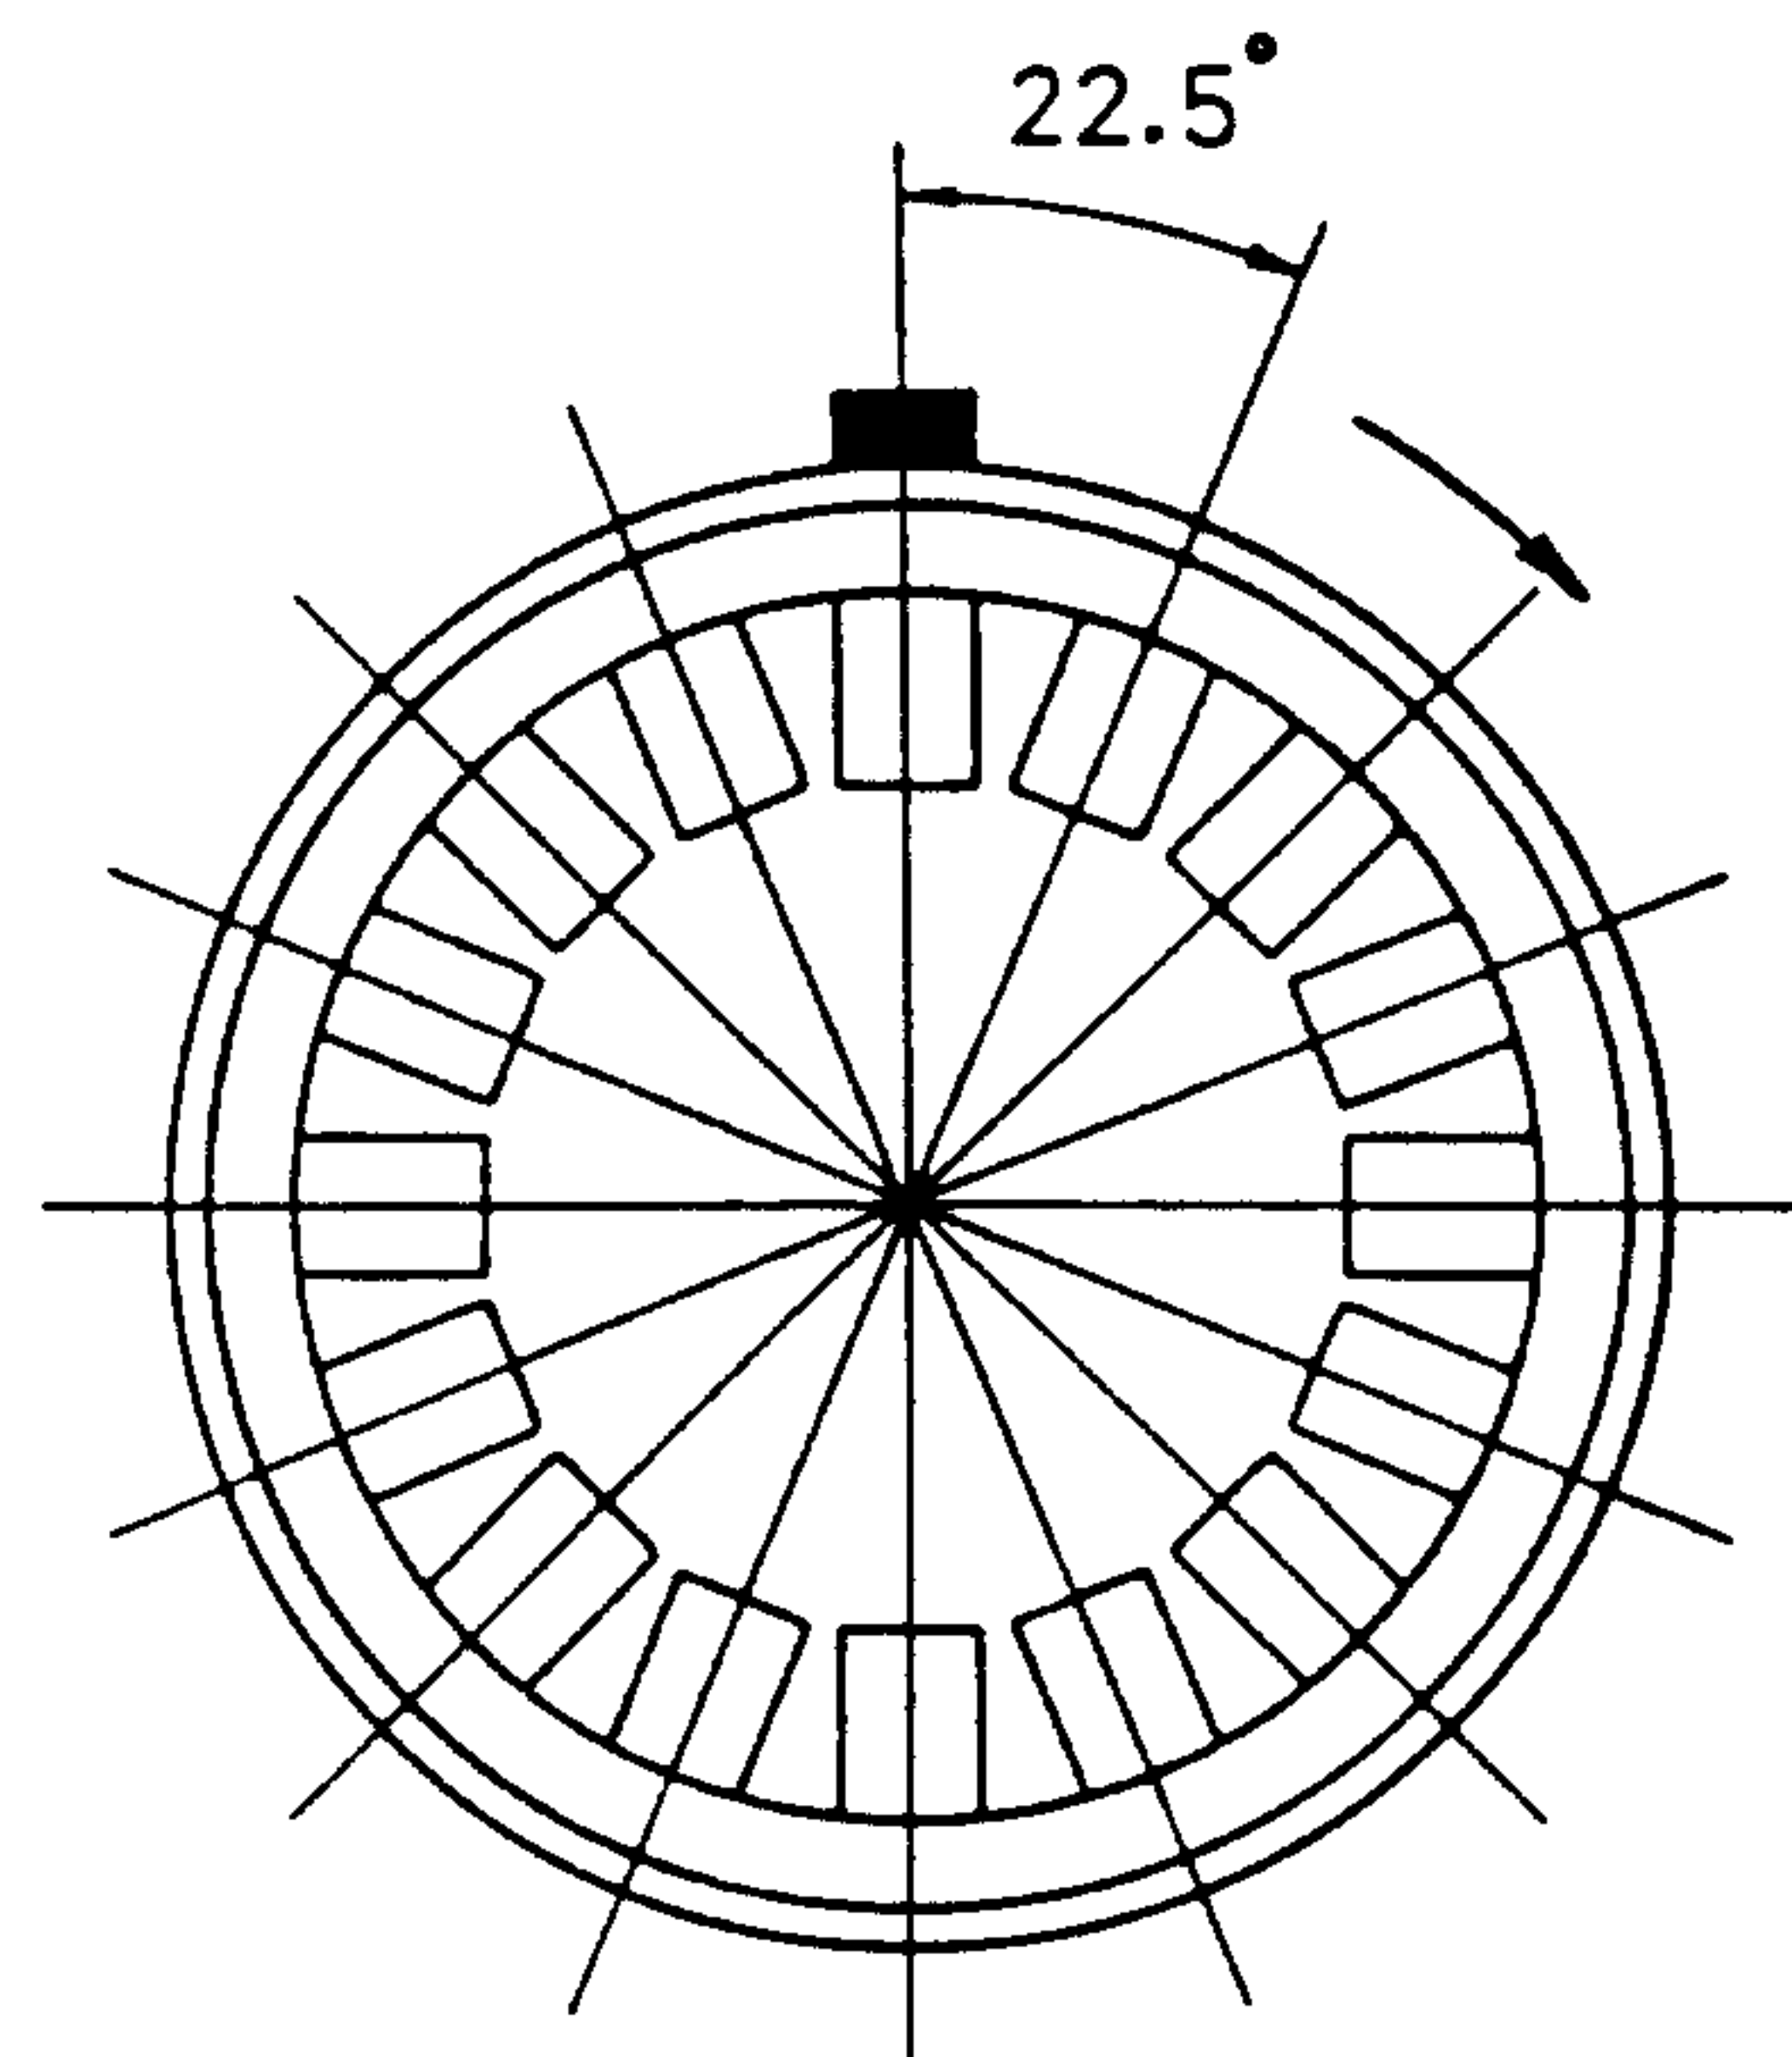


Patent Agents
Fetherstonhaugh & Co.

FIG. 9A

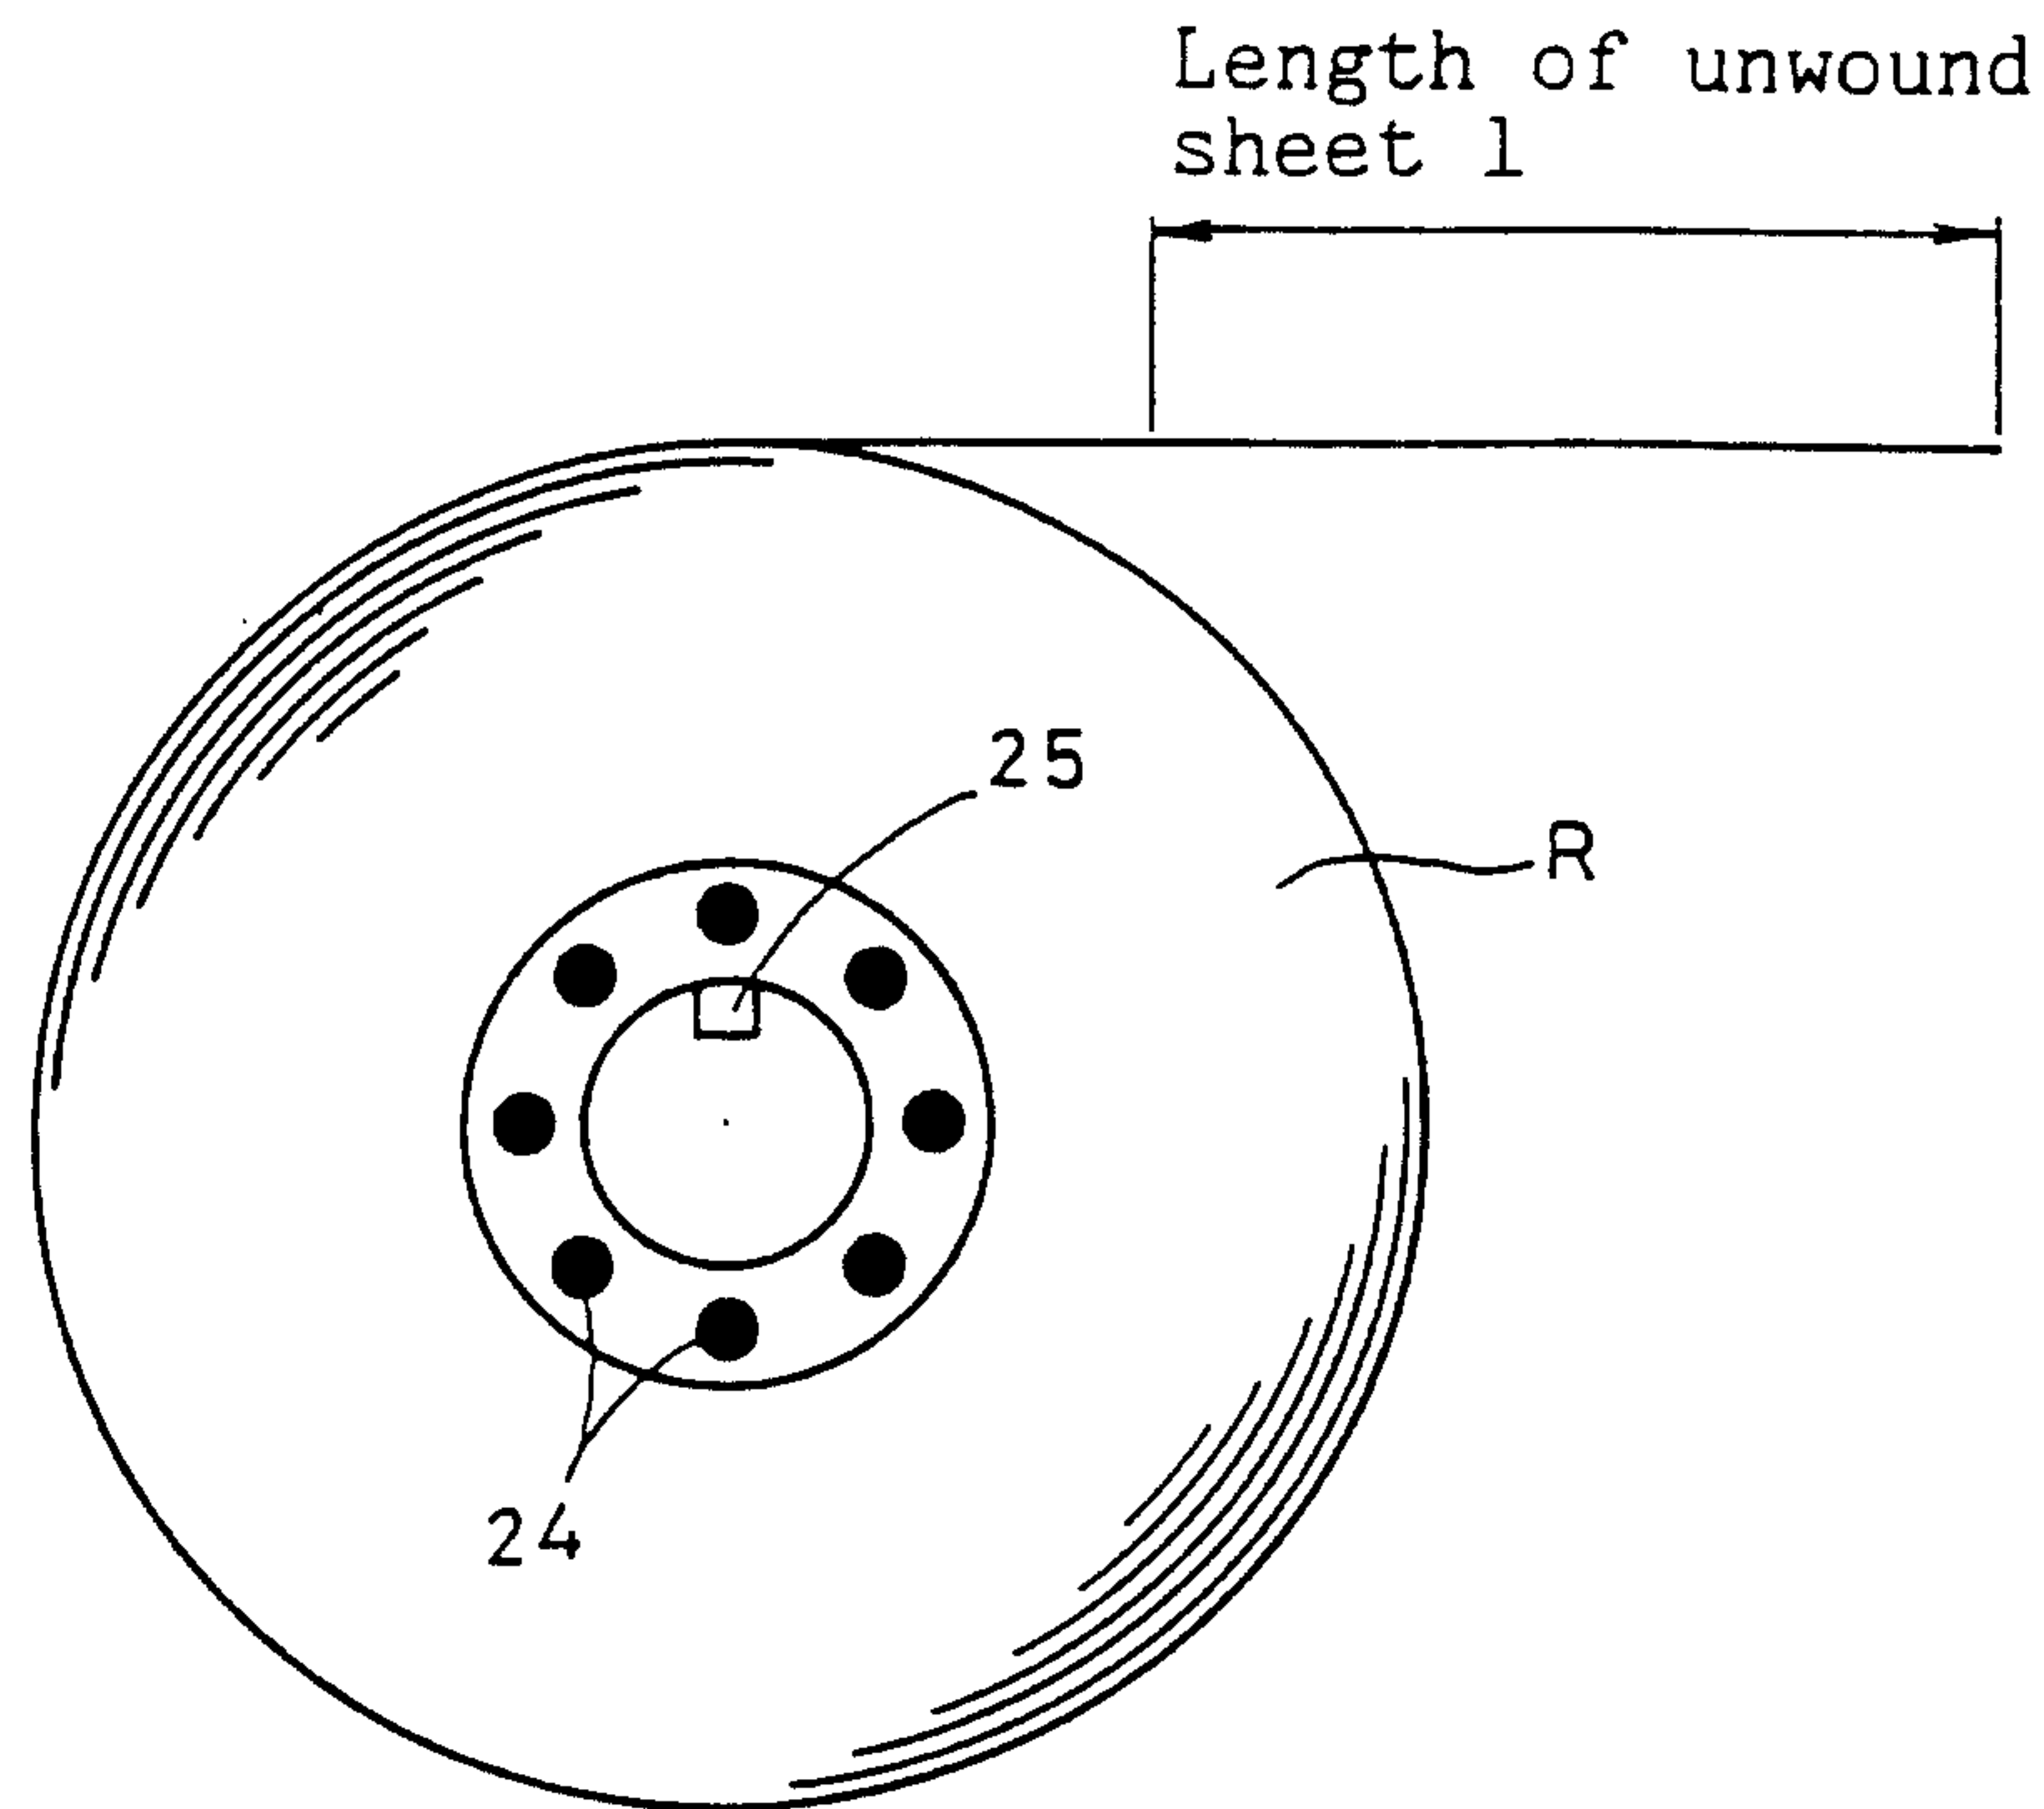

● ● ● ----- Number of pulses from angle sensor

FIG. 9B

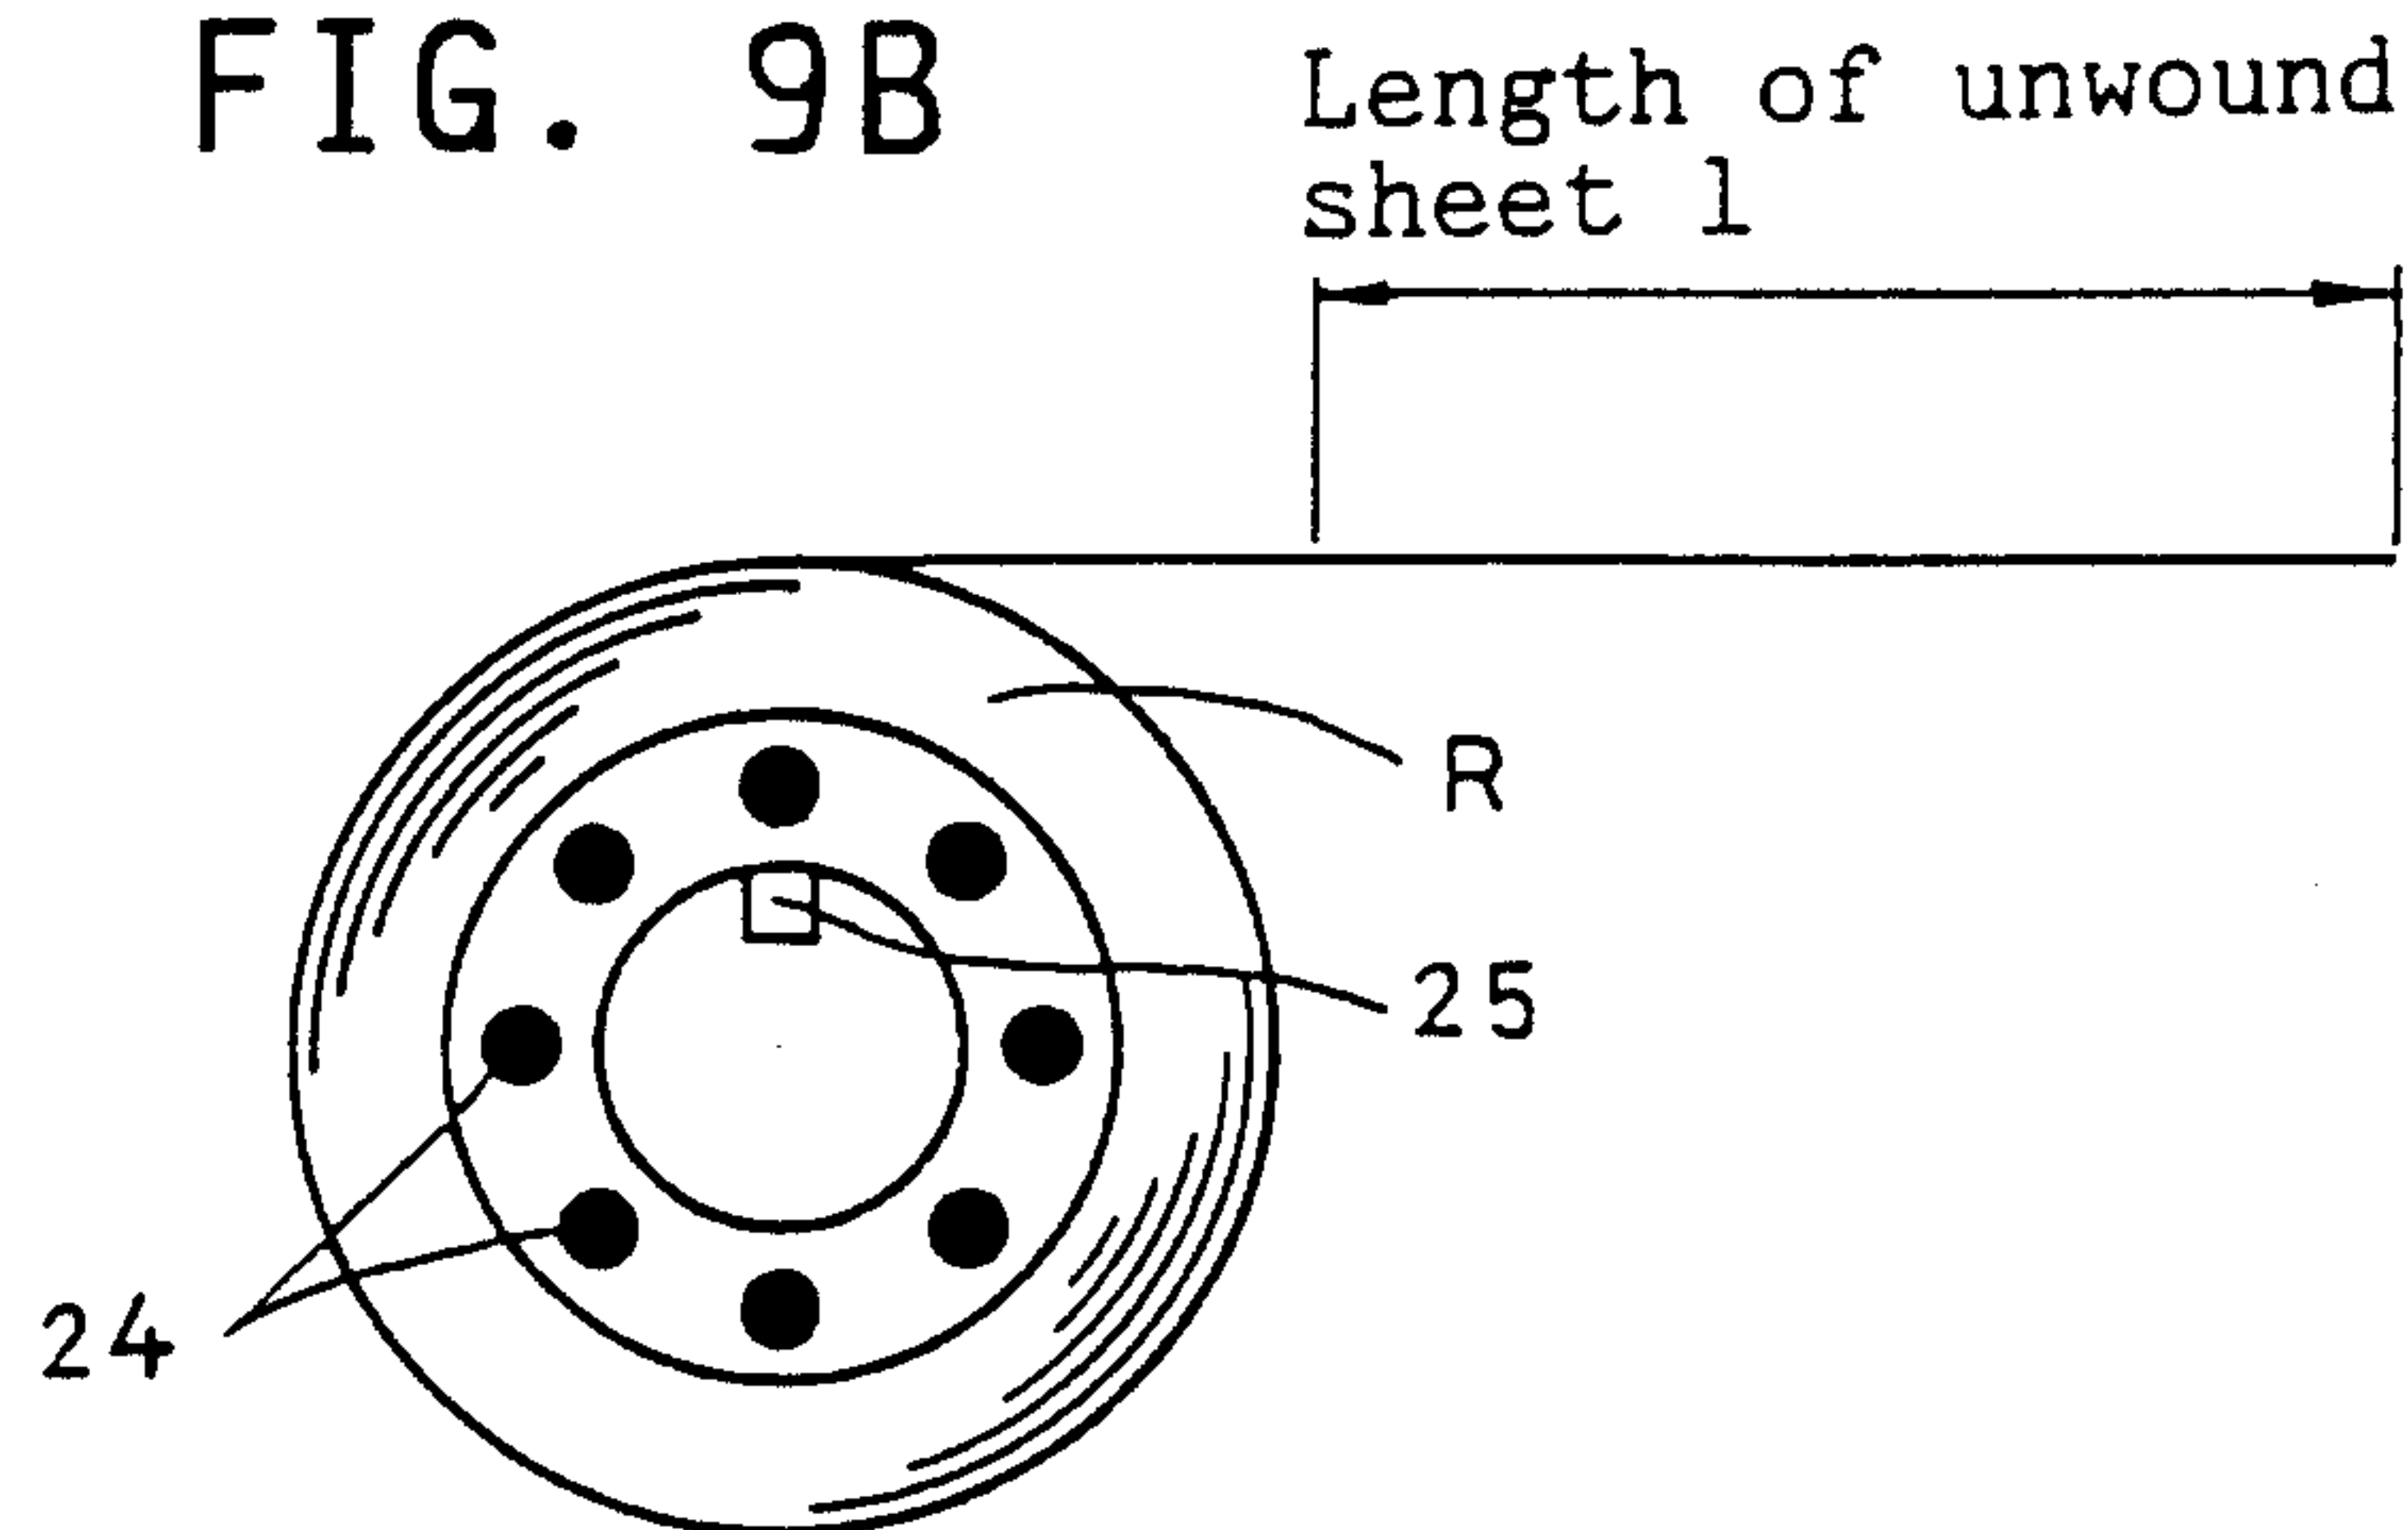

● ● ● ● ● ● ● ● ● ----- Number of pulses from angle sensor

Patent Agents
Fetherstonhaugh & Co.

FIG. 10



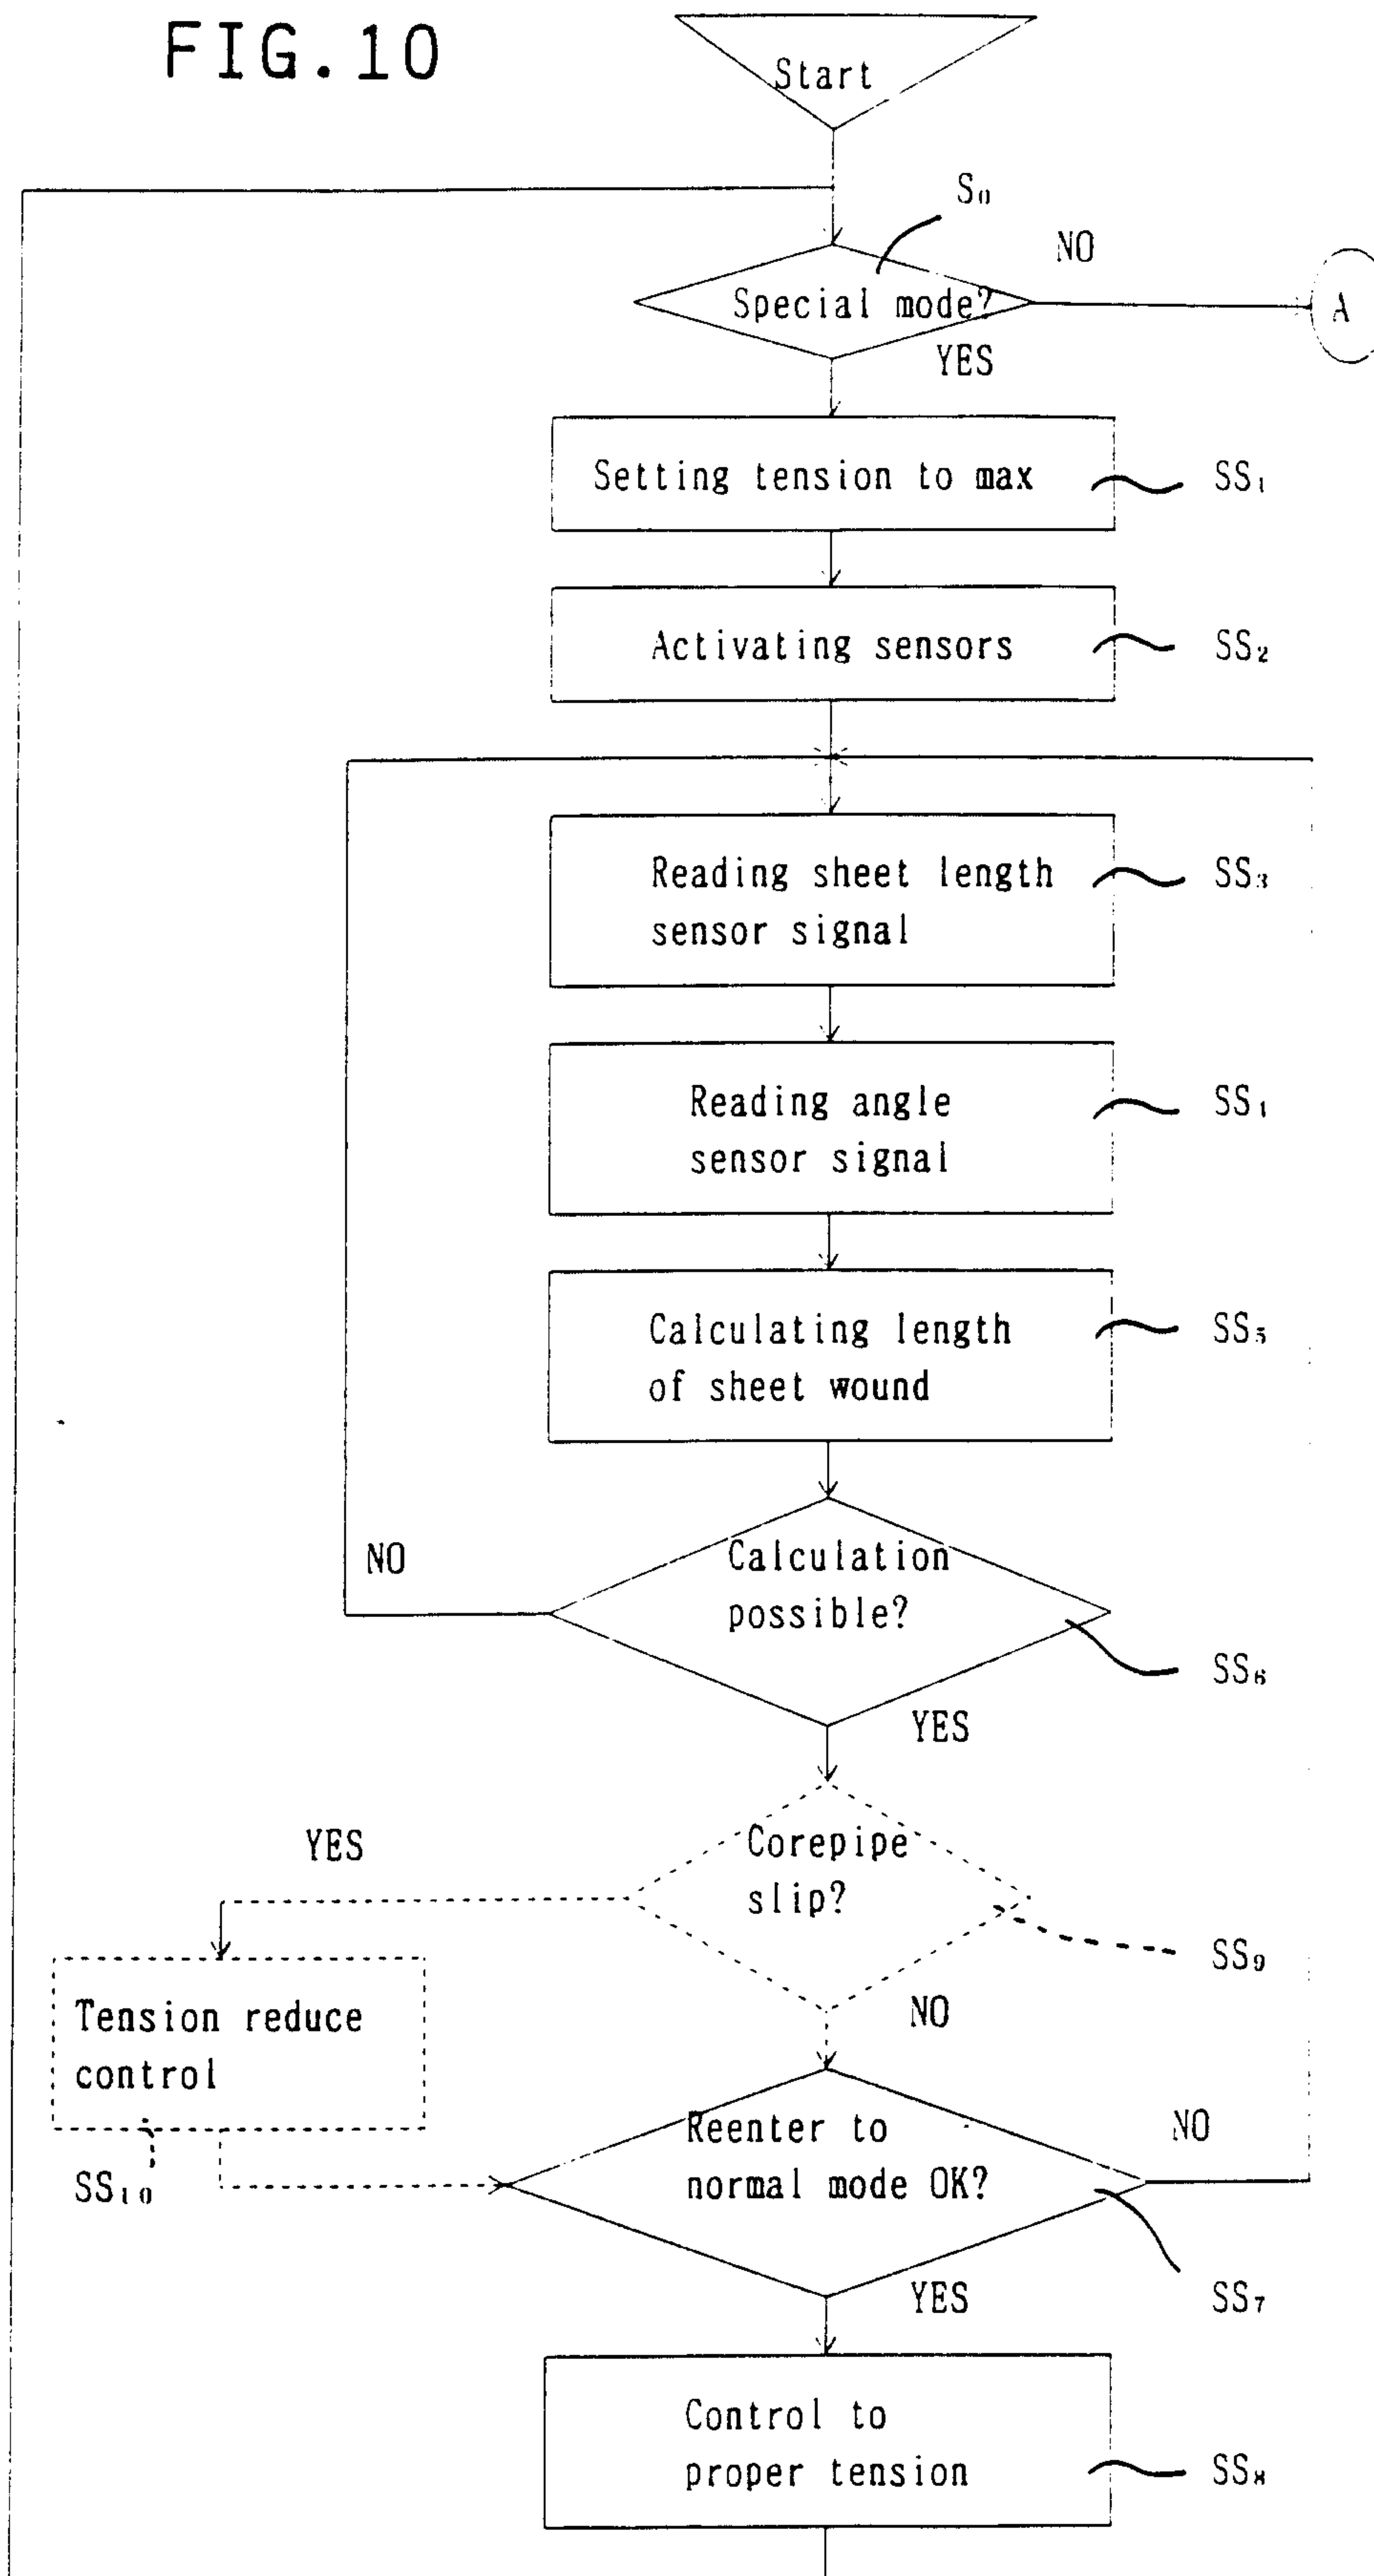


FIG. 11

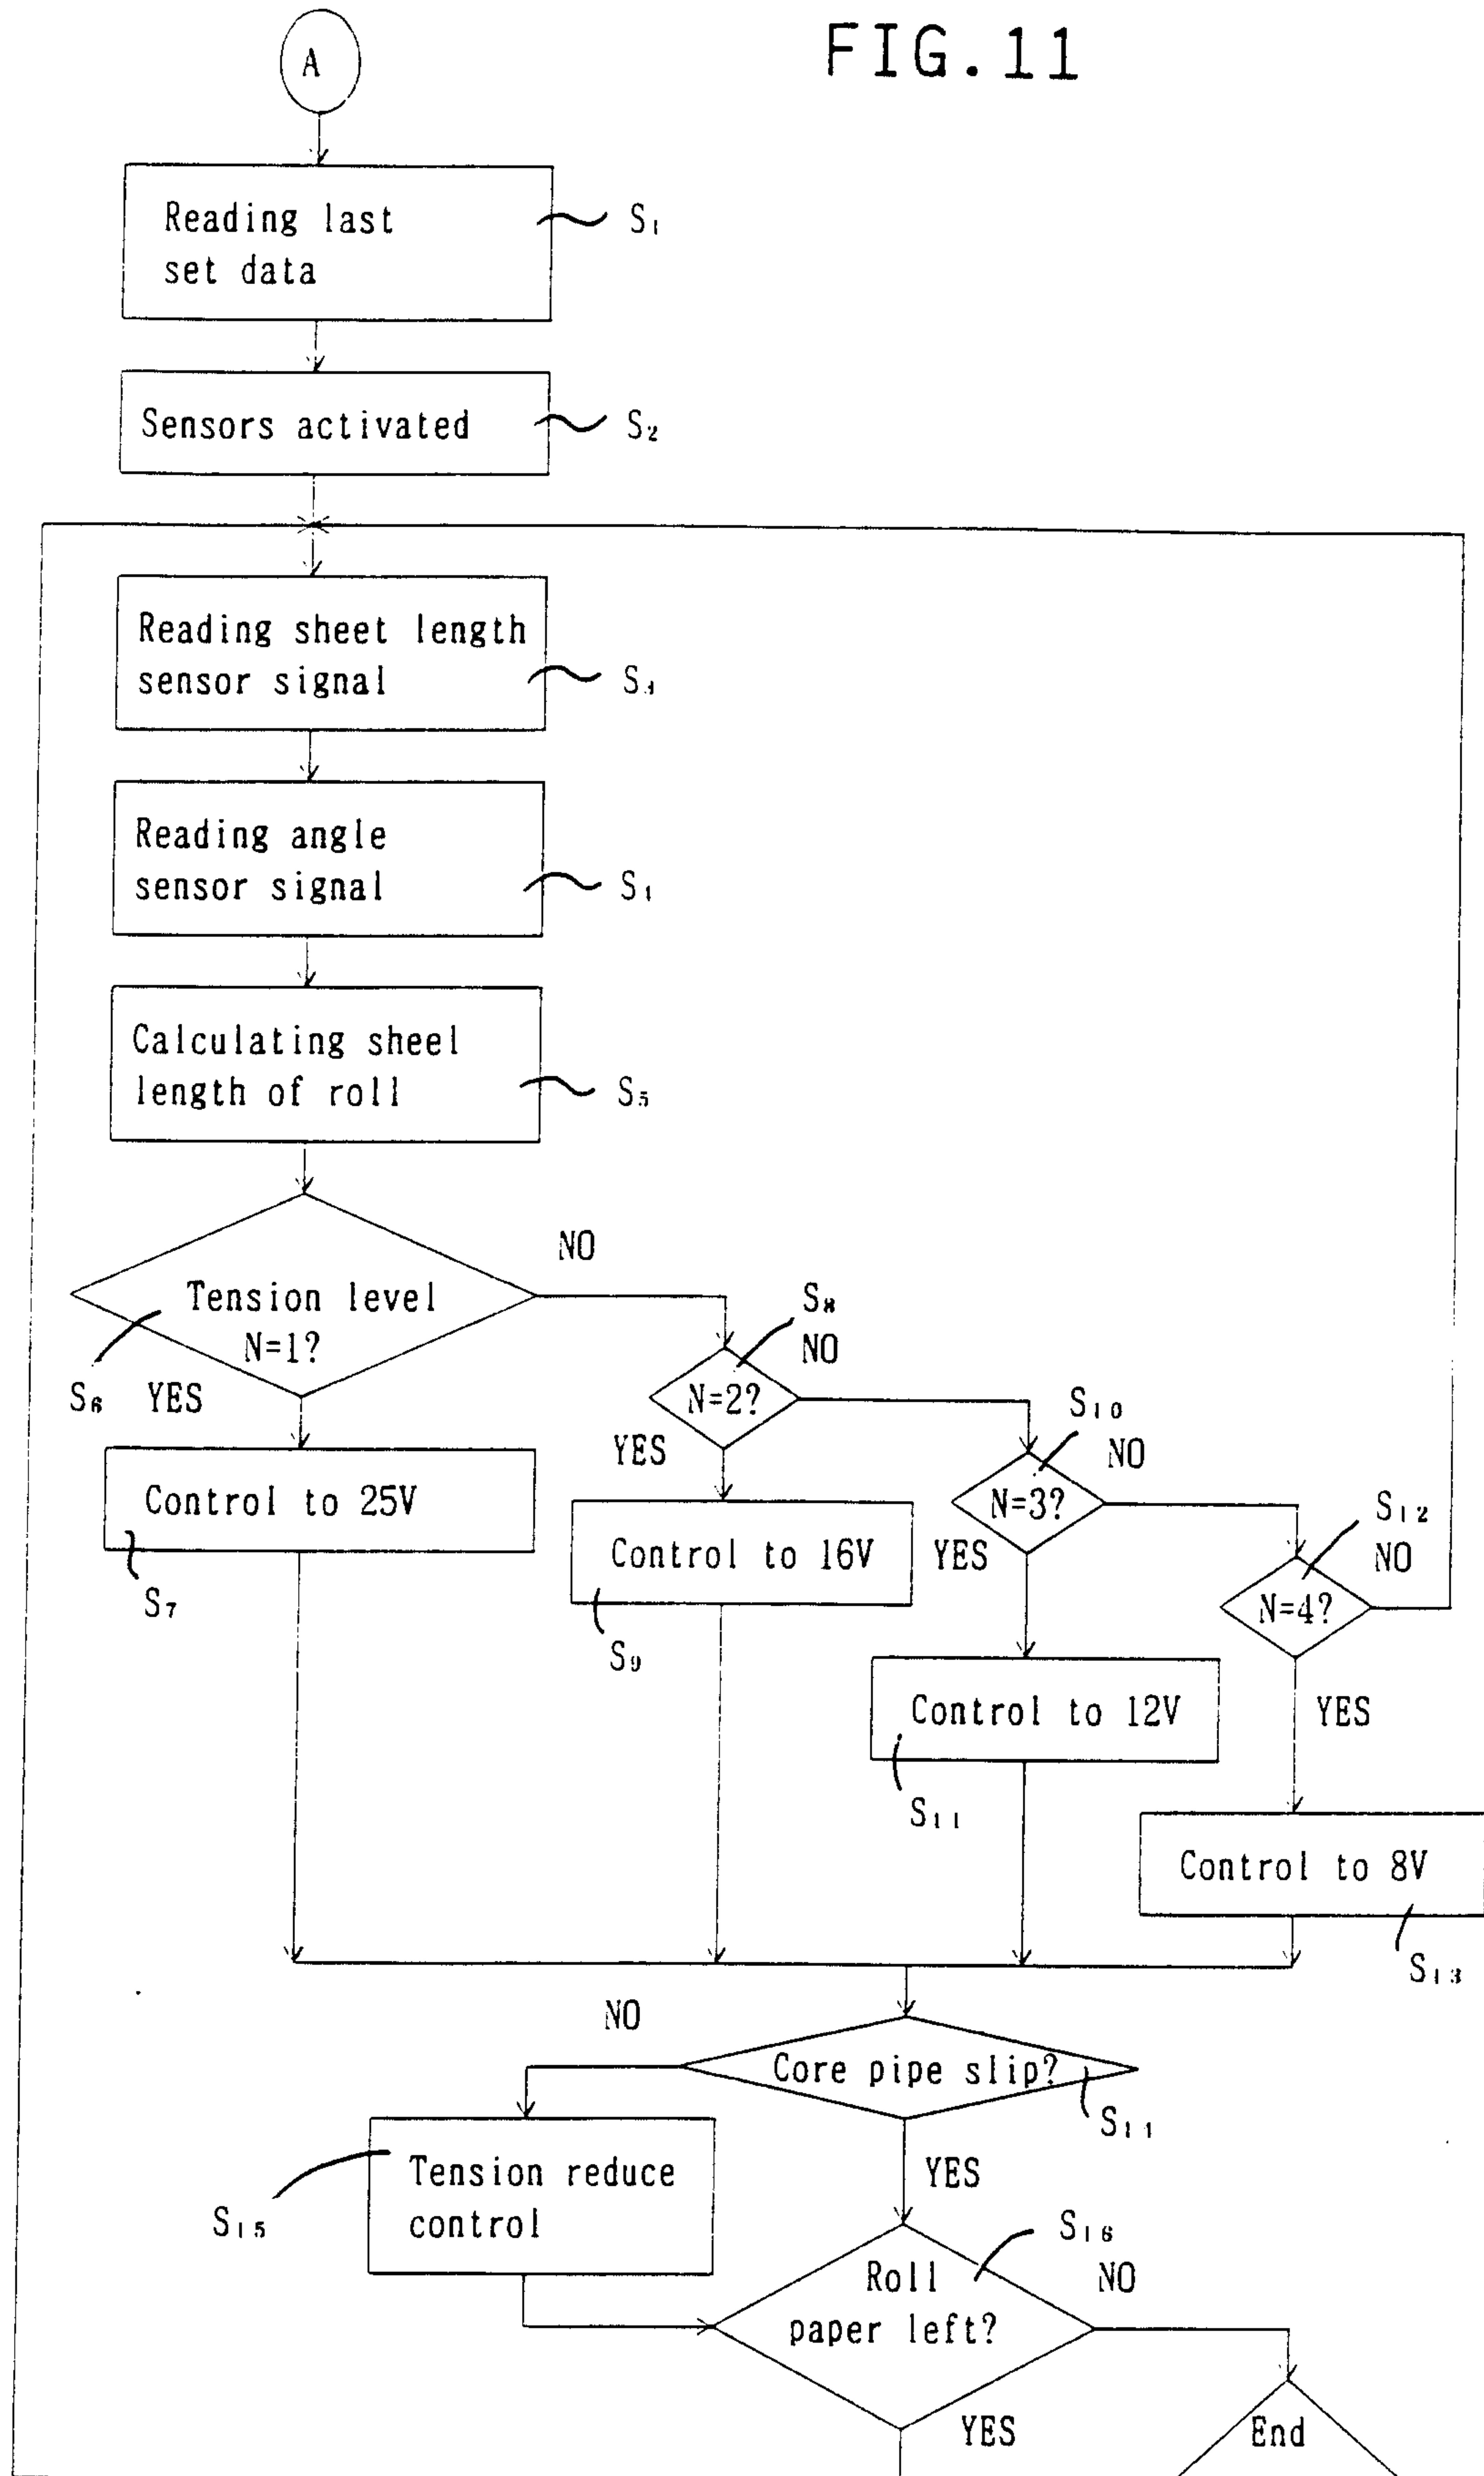


Patent Agents
Fetherstonhaugh & Co.

FIG. 12

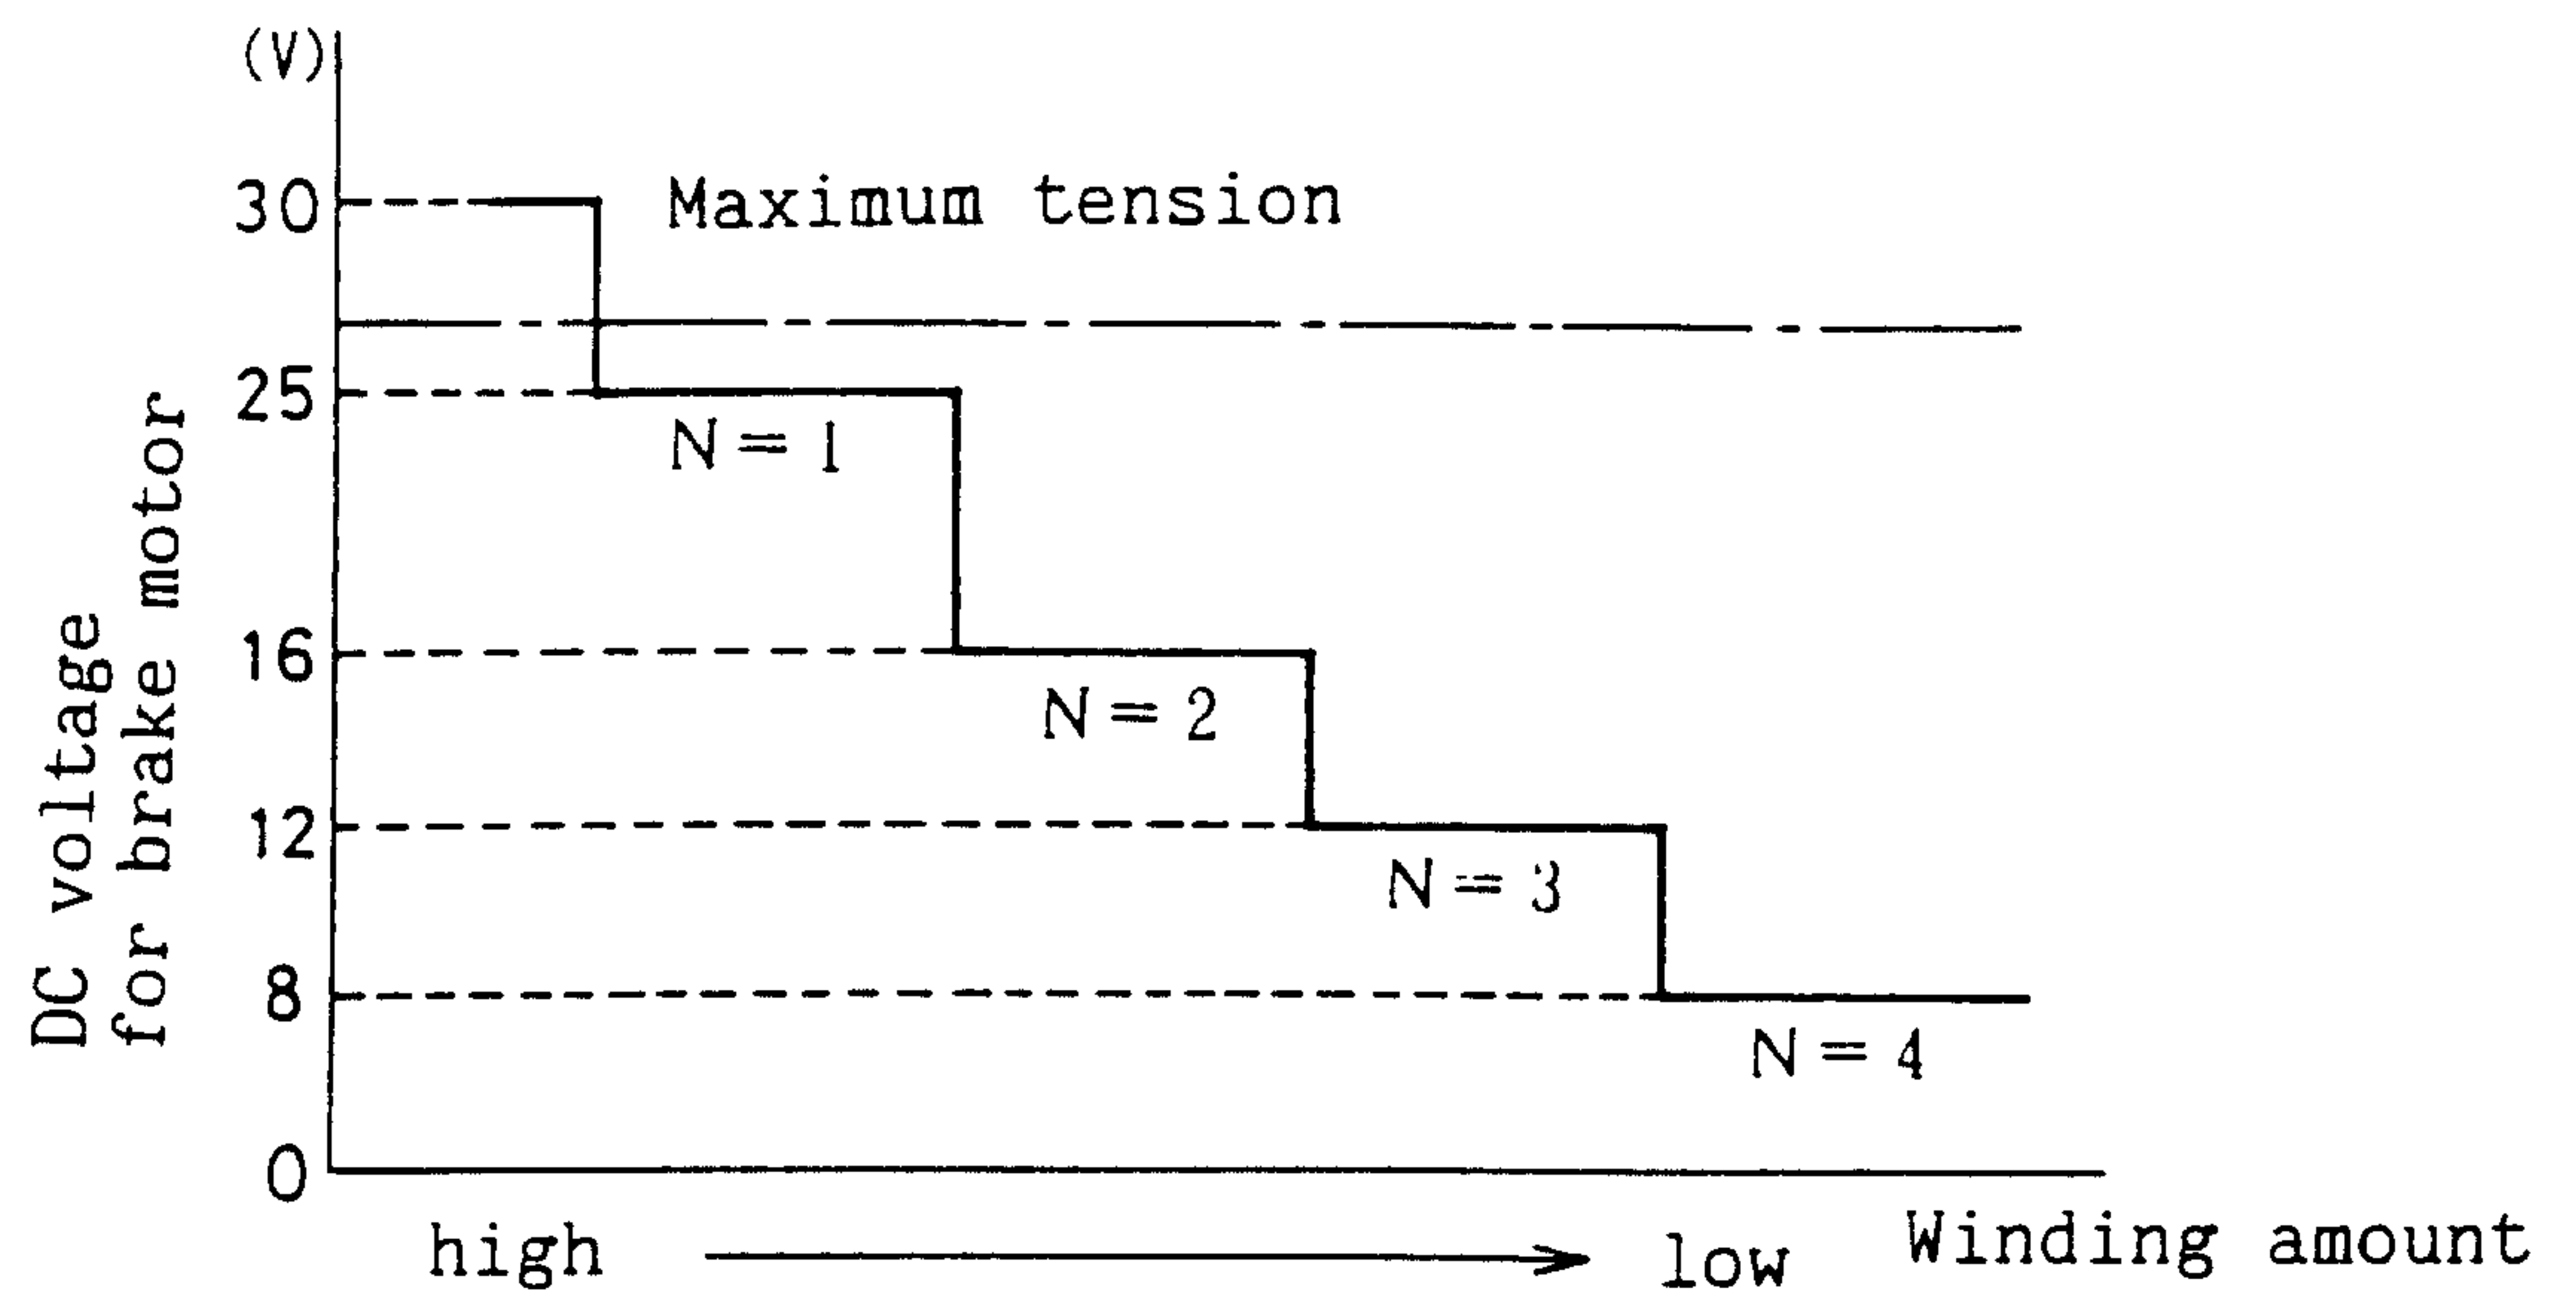

Patent Agents
Fetherstonhaugh & Co.

FIG. 13

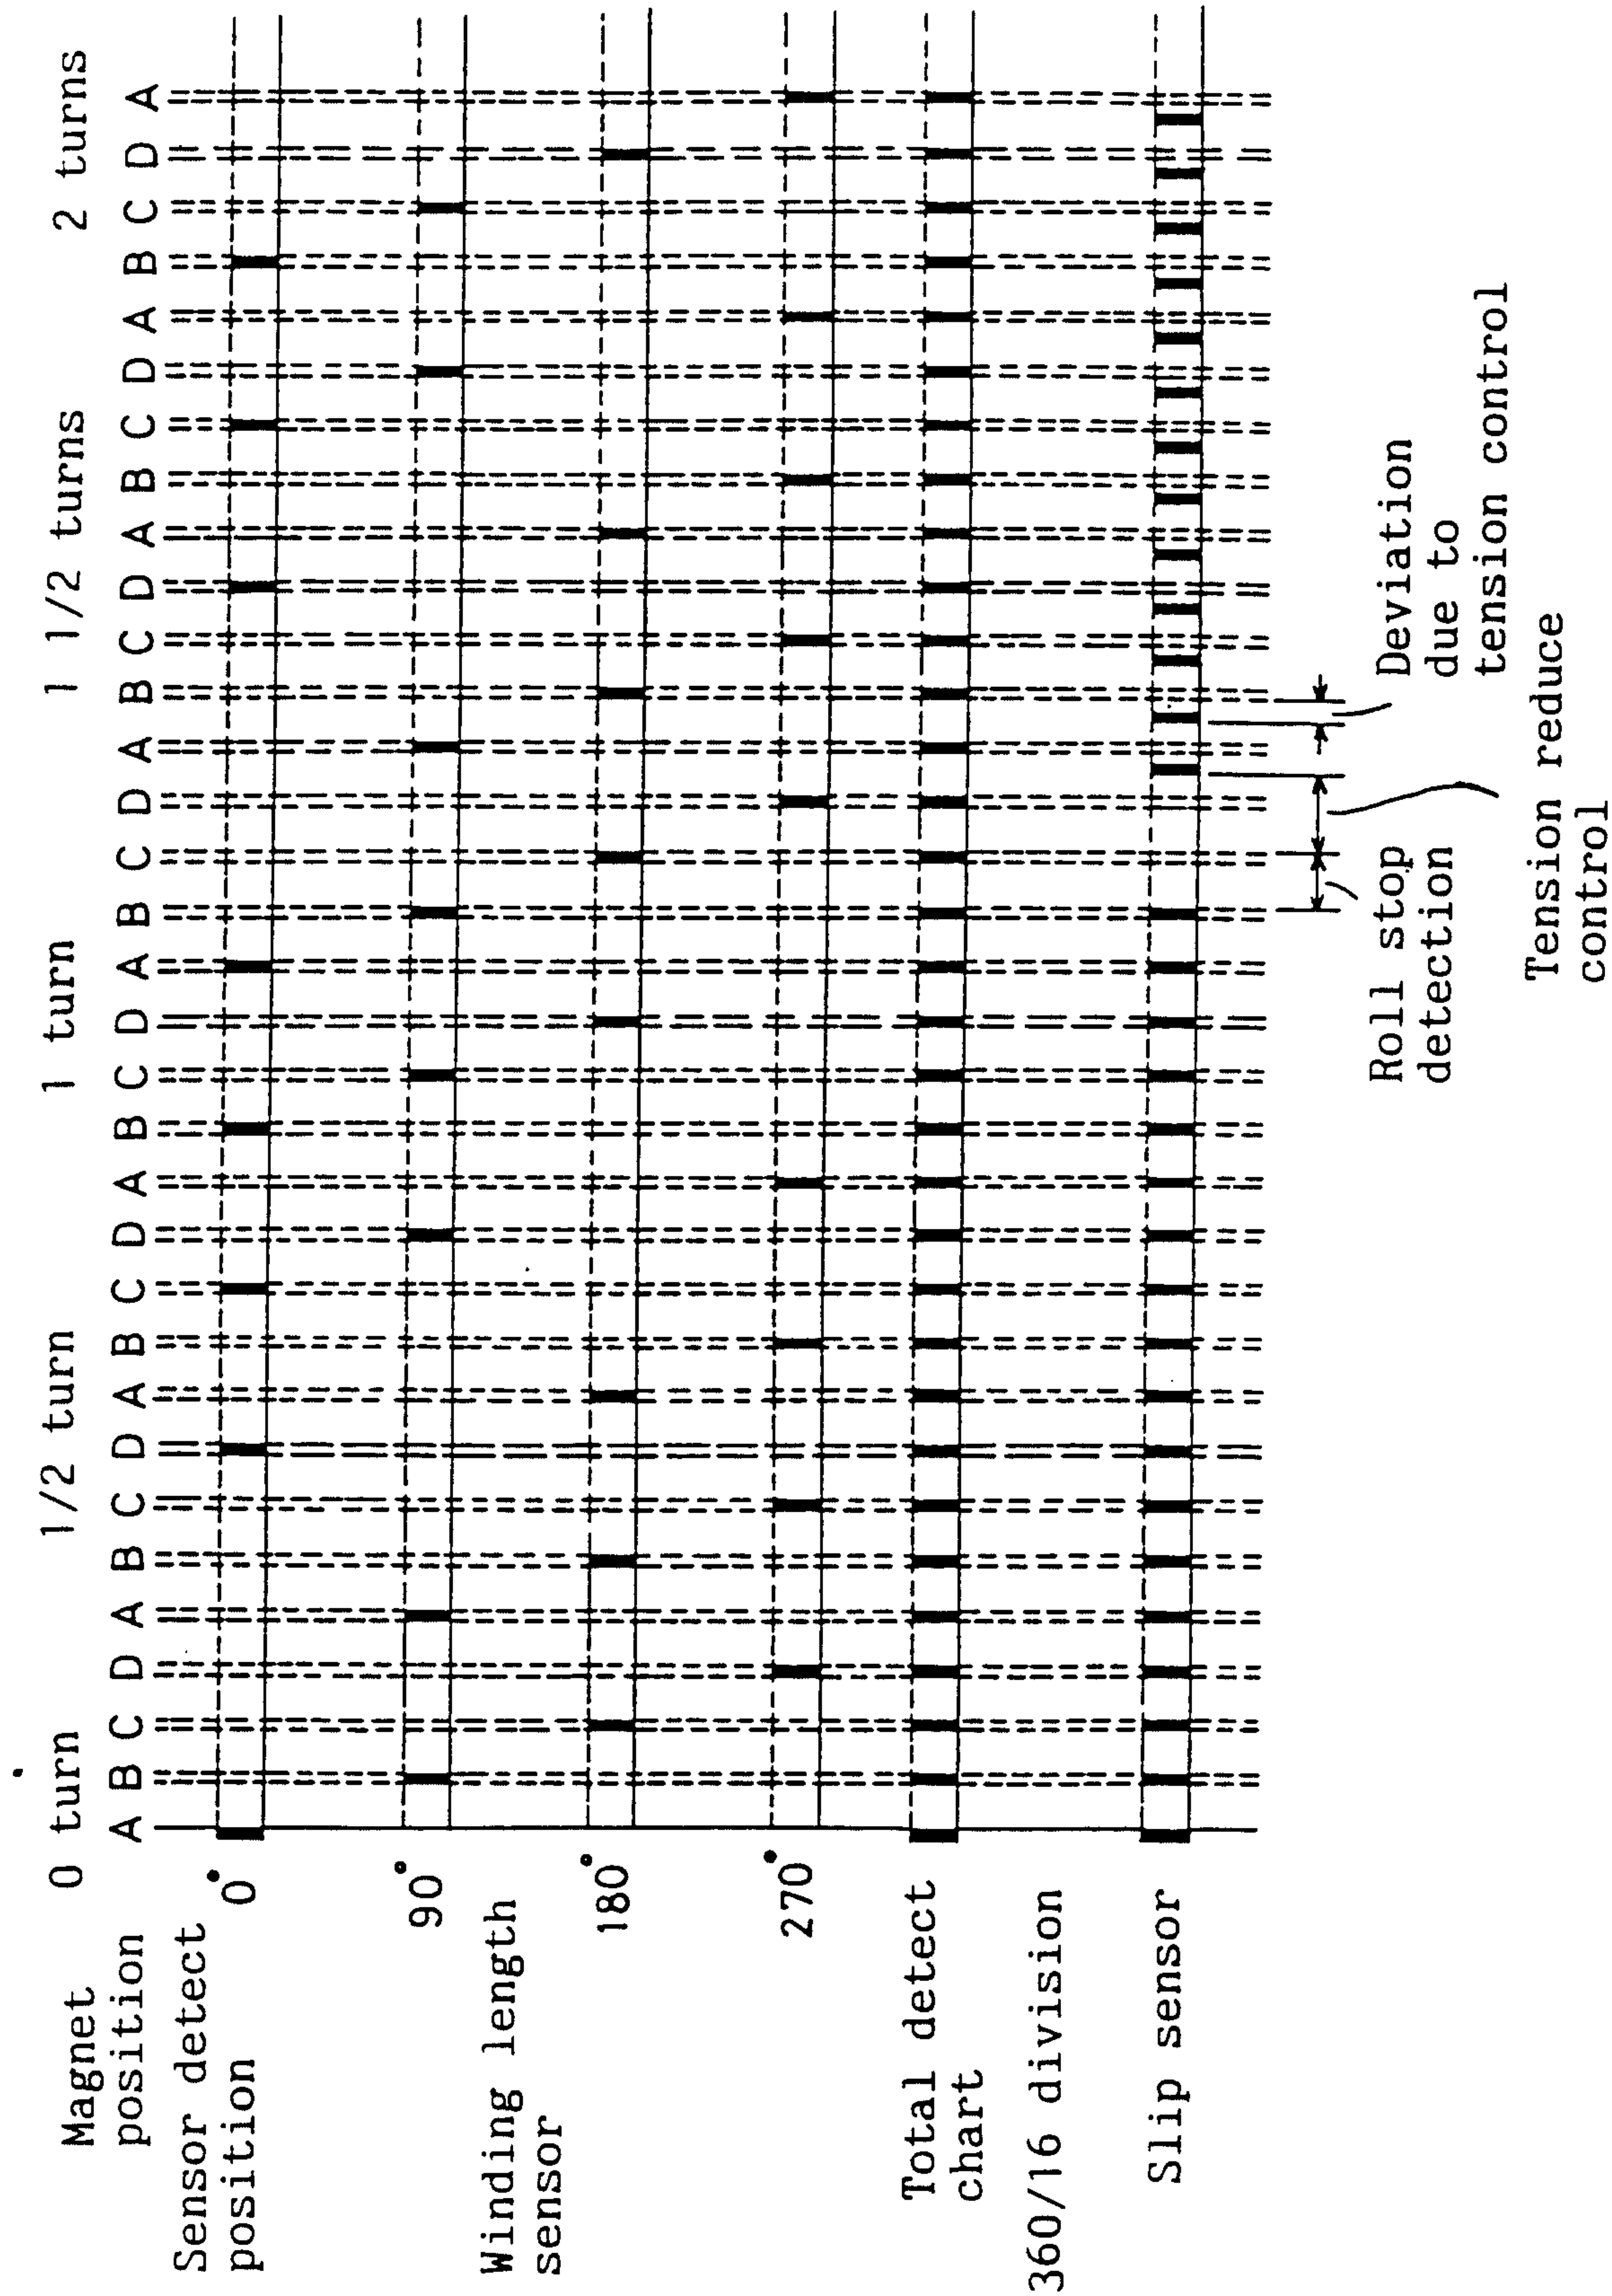

Patent Agents
Fetherstonhaugh & Co.

