



(51) International Patent Classification:

H04W 24/02 (2009.01) *H04W* 52/30 (2009.01)
H04W 52/06 (2009.01) *H04W* 52/24 (2009.01)

(21) International Application Number:

PCT/FI2015/050414

(22) International Filing Date:

11 June 2015 (11.06.2015)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant: TELESTE OYJ [FI/FI]; Telestenkatu 1, FI-20660 Littoinen (FI).

(72) Inventors: VÄRE, Jani; Valotie 7, FI-20780 Kaarina (FI).
VIRTANEN, Kari; Perkantie 11, FI-21160 Naantali (FI).

(74) Agent: TAMPEREEN PATENTTITOIMISTO OY;
Visiokatu 1, 33720 Tampere (FI).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: A METHOD FOR REDUCING INTERFERENCE

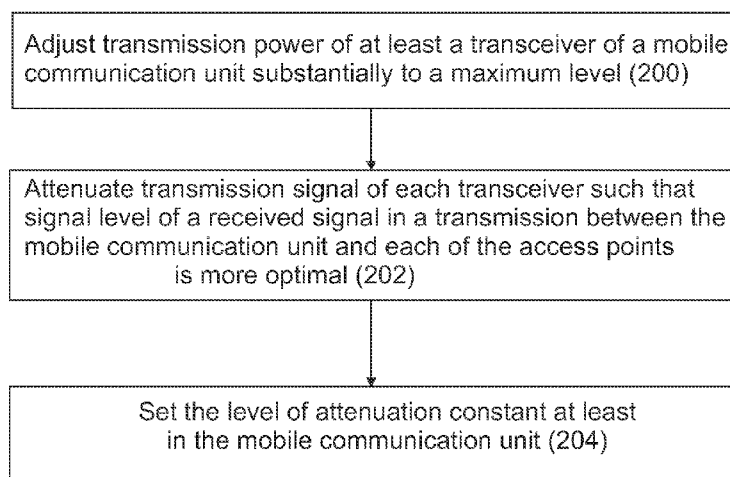


Fig. 2

(57) Abstract: A method and related apparatus for transferring data between a mobile communication unit and a plurality of access points, wherein each of said plurality of access points and said mobile communication unit is provided with a transceiver, said mobile communication unit being arranged to travel a predetermined route, the method comprising: adjusting transmission power of at least the transceiver of the mobile communication unit substantially to a maximum level; and attenuating transmission signal of each transceiver such that signal level of a received signal in a transmission between the mobile communication unit and each of the access points is more optimal, wherein the level of attenuation is set constant at least in the mobile communication unit.



A METHOD FOR REDUCING INTERFERENCE

Technical field

The invention relates to wireless data offload systems, specifically to interference reduction in such systems.

5 Background

The recent explosion in the use of video, social media and Internet gaming across a range of new devices, such as smartphones and tablets, has created a huge growth in network data traffic. While the next-generation network deployments aim to offer wider bandwidth and
10 higher data speed, the number of network users and the amount of data traffic is estimated to grow even faster, thus causing at least occasional local network congestions.

Data offload generally refers to a transfer process of data that is stored
15 on a physical medium, such as a Network video recorder. The offload can be carried out wirelessly or with wired connection. The use of complementary or dedicated technology for the data offload purposes is especially advantageous in a situation where the data network resource allocated for the data delivery is about to reach its maximum
20 capacity.

A specific challenge in wireless data traffic is the data delivery to and from mobile vehicles, especially public transportation vehicles, like trains, trams, metro trains and busses. A moving vehicle, as such,
25 poses challenges to reliable data transfer, where the usable data rate typically reduces as a function of the speed of the vehicle. Many public transportation operators have started to offer a wireless data connection, such as a Wi-Fi connection, for the passengers to use during their trip. Moreover, the requirements for using video
30 surveillance in public transportation vehicles are continuously increasing. The video data from a plurality of surveillance cameras, together with the data traffic of the passengers, easily amounts to an extensive quantity of data, which cannot be transferred within the capacity of current wireless networks without a significant delay.

A further challenge comes from the fact that wireless offload requires maximum throughput, typically meaning that the transmitting power needs to be as high as possible in order to achieve a maximum throughput. This, in turn, may significantly increase the interference that different wireless devices are causing to each other, which in turn causes packet losses and decreases robustness of offload performance.

Summary

Now, an improved arrangement has been developed to reduce the above-mentioned problems. As different aspects of the invention, we present a method, a system, a mobile communication unit and an access point, which are characterized in what will be presented in the independent claims.

The dependent claims disclose advantageous embodiments of the invention.

The first aspect of the invention comprises a method for transferring data between a mobile communication unit and a plurality of access points, wherein each of said plurality of access points and said mobile communication unit is provided with a transceiver, said mobile communication unit being arranged to travel a predetermined route, the method comprising: adjusting transmission power of at least the transceiver of the mobile communication unit substantially to a maximum level; and attenuating transmission signal of each transceiver such that signal level of a received signal in a transmission between the mobile communication unit and each of the access points is more optimal, wherein the level of attenuation is set constant at least in the mobile communication unit.

According to an embodiment, the method further comprises setting the level of attenuation in one or more of said plurality of access points to the same level as in the mobile communication unit.

According to an embodiment, the method further comprises adjusting the transmission power of the transceivers of one or more of said

plurality of access points to a level sufficient for transmitting acknowledgements.

5 According to an embodiment, the method further comprises determining a group of attenuation levels, each attenuation level providing optimal received signal level in the transmission between the mobile communication unit and one of the access points; and selecting the lowest attenuation level from said group to be used at least in the mobile communication unit.

10

According to an embodiment, the method further comprises determining a group of distances, each distance indicating the shortest distance between the route of the mobile communication unit and one of the access points; and adjusting the constant attenuation level to be used on the basis of the longest distance in said group.

15

According to an embodiment, the method further comprises adjusting the transmission power of the transceivers of the access points such that interference between said plurality of access points is minimized.

20

According to an embodiment, the transmission signal is attenuated by an attenuator between the transceiver and an antenna of the access point or the mobile communication unit.

25 According to an embodiment, the transmission between the mobile communication unit and the access points is carried out according to any of IEEE 802.11 standard series.

30 According to an embodiment, the mobile communication unit is arranged in a public transportation vehicle, such as a train, a tram, a metro train or a bus, arranged to travel a predetermined route.

35 According to an embodiment, the transmission between the mobile communication unit and the access points is used in wireless offload for transmitting data from the mobile communication unit to at least one of the access points for further forwarding the data to a data communication network.

- 5 A second aspect of the invention includes a wireless offload system for transferring data between a mobile communication unit and a plurality of access points, wherein each of said plurality of access points and said mobile communication unit is provided with a transceiver, said mobile communication unit being arranged to travel a predetermined route, wherein transmission power of at least the transceiver of the mobile communication unit is arranged to be adjusted substantially to a maximum level; transmission signal of each transceiver is arranged to be attenuated such that signal level of a received signal in a transmission between the mobile communication unit and each of the access points is more optimal, wherein the level of attenuation is constant at least in the mobile communication unit.
- 10
- 15 A third aspect of the invention relates to a mobile communication unit of a wireless offload system, said mobile communication unit comprising a transceiver, and said mobile communication unit being arranged to travel a predetermined route, wherein transmission power of the transceiver of the mobile communication unit is arranged to be adjusted substantially to a maximum level; transmission signal of the transceiver is arranged to be attenuated such that signal level of a received signal in an access point is more optimal, wherein the level of attenuation is constant.
- 20
- 25 A fourth aspect of the invention relates to an access point of a wireless offload system, said access point comprising a transceiver, said access point being arranged in a vicinity of a predetermined route of a mobile communication unit, wherein the transmission power of the transceivers is at a level sufficient for transmitting acknowledgements; and transmission signal of the transceiver is arranged to be attenuated such that signal level of a received signal in the mobile communication unit is more optimal.
- 30

Brief description of the drawings

The invention will now be described in more detail in connection with preferred embodiments with reference to the appended drawings, in which:

5

Fig. 1 shows a simplified example of the operating principle of a wireless data offload system;

10

Fig. 2 shows a flow chart of an interference reduction method according to an embodiment; and

Fig. 3 shows an example of determining the attenuation level according to the worst-case scenario according to an embodiment.

15

Detailed description

20

The rapid development of WLAN (wireless local area networks) technology has made the WLANs popular, besides in the home due to ease of installation and use, but also in offices and various public premises (so-called HotSpots) offering wireless access either to a limited group of users or to anyone. While various names and acronyms, such as WLAN, Wi-Fi, 802.11, etc. are used for wireless local area networks, they all typically refer to wireless access technology defined in IEEE standard series 802.11, including multiple versions of the IEEE 802.11, such as 802.11b, 802.11g, 802.11a, 802.11n, 802.11ac. Unlike licensed spectrum devices, such as mobile cellular networks, where the usage of bandwidth is strictly controlled, IEEE 802.11 technology is used as a shared medium that operates in unlicensed radio frequency ranges of 2.4 GHz and/or 5 GHz.

25

30

For this reason, WLAN clients and access points (AP) are vulnerable to interference caused by potential sources for interference, such as existing WLANs, rogues, and non-802.11 interference from sources such as weather radars and marine/aviation radars, and in some occasions also microwave ovens and many cordless telephones. If a WLAN client detects another signal, whether it is a WLAN signal or not, it will defer transmission until the signal ceases. Interference that

35

occurs during transmission also causes packet loss, which forces WLAN retransmissions slowing throughput and resulting in non-uniform performance for all users sharing the same access point.

- 5 When operating in a rather stable environment, such as home or office, RF interference can be addressed by at least three different approaches: lowering the physical (PHY) data rate, reducing the transmit power of the affected AP or changing the AP's channel assignment. While each of these can be useful in some respect, none
10 of them addresses directly with RF interference.

The omni-directional dipole antenna of a typical WLAN AP sends and receives transmissions equally in all directions. Upon interference, the AP must lower its physical data rate until an acceptable level of packet
15 loss is achieved. However, the longer transmission time makes the data packets more susceptible to periodic interference. Moreover, the approach is highly inefficient, and subsequently all users sharing the AP experience poorer performance.

- 20 Another method for addressing the interference is to reduce the AP transmit power to make better use of the limited number of channels. This reduces the number of devices sharing the AP, which may improve performance, but it also lowers the signal strength received by the clients. This translates into a lower data rate and smaller WLAN
25 cells that can create coverage holes.

Accordingly, in a rather stable environment, such as home or office, the most recommended way of addressing the interference is changing the AP's channel assignment; i.e. selecting automatically a different or
30 "interference-free" channel for the AP when RF interference increases. While changing channels has turned out to be a useful technique to deal with continuous interference on a given frequency, in many occasions interference tends to be highly variable and intermittent. With a limited number of available channels such a situation may be
35 difficult handle.

A known method for reducing interference is to use directional or adaptive antennas. Again, directional antenna may be useful in a stable environment, but the alignment of a directional antenna becomes very challenging in mobile environment. Adaptive antennas, in turn, are
5 expensive and require built-in intelligence in the system.

While the above methods may be helpful in addressing interference in a stable environment, they are poorly applicable to situations where the WLAN client is moving such that the primary direction of transmission
10 between the client and a particular AP may be different with each AP. The applicability of the above methods becomes even poorer, if the data transmission involves a great amount of data. Such a situation may occur, for example, in a wireless data offload system.

15 Figure 1 shows a simplified example of the operating principle of a wireless data offload system. Figure 1 illustrates a rail traffic vehicle 100, such as a train, a tram or a metro train, travelling on the rails 102. The rail traffic vehicle 100 may comprise one or more cars 100a, 100b, 100c, etc., typically arranged to transport passengers. A wireless data
20 connection, such as a Wi-Fi connection, may be offered for the passengers to be used during their trip. In Figure 1, a passenger 104 uses his/her mobile device via a wireless connection provided by a wireless base station 106. Moreover, each car may include one or more surveillance cameras 108 capturing video surveillance data within
25 the car. During the trip, especially the video surveillance data may amount to an extensive quantity of data.

The vehicle 100 comprises at least one mobile communication unit 110, which is arranged to communicate with at least one access point
30 112 arranged along a route of the vehicle 100. The mobile communication unit 110 is arranged to obtain data from one or more data sources, such as one or more surveillance cameras and/or one or more data terminals operated by passengers, arranged in functional connection with the mobile communication unit. The mobile
35 communication unit 110 comprises a transmitter arranged to transmit the data to the access point 112.

The access point 112 comprises a receiver arranged to receive the data, and it is further arranged to forward the data to a data target for decoding. The data targets may comprise, for example, a data communication network 116 and a video surveillance system 118, and
5 the access point 114 may be arranged to forward the video data from said one or more surveillance cameras to the video surveillance system 118 and user data from said one or more data terminals operated by the passengers to the data communication network 116. The system may comprise one or more routers 114 arranged to route
10 the data to an appropriate data target.

The mobile communication unit 110 may further comprise a video recorder arranged to buffer at least a part of the video data from said one or more surveillance cameras and/or a data storage arranged to
15 buffer at least a part of the user data from said one or more data terminals operated by the passengers before transmission to the access point.

A public transportation vehicle, such as a train, a tram, a metro train or
20 a bus, is typically arranged to travel a predetermined route, whereby the system may comprise a plurality of access points arranged along said route. The access points may be positioned, for example, at the stations where the vehicle is configured to stop, whereby the buffered video and/or user data may be transferred to the access point during
25 the stoppage. On the other hand, the plurality of access points may be distributed along the route such that the video data from said one or more surveillance cameras and/or the user data from said one or more data terminals operated by the passengers may be transferred to an access point substantially continuously during the trip.

30 As becomes evident from the above, the amount of data to be transmitted from the mobile communication unit to the access point may be very large. Furthermore, the speed of the vehicle may further make the transmission conditions in terms of interference highly
35 variable and intermittent. On the other hand, wireless offload requires maximum throughput and hence typically this means that the

transmitting power needs to be as high as possible in order that maximum throughput can be achieved.

5 Thus, there is a need for a reliable and inexpensive solution for addressing these mutually conflicting conditions and requirements.

10 In order to alleviate these problems, a new method for transferring data between a mobile communication unit and a plurality of access points is presented herein. The method is based on the idea of improving offload performance by decreasing interference of access points by attenuating received signals. The attenuation of the transmitted signal is compensated by increasing the power of transmitted signal.

15 A method according to a first aspect and various embodiments related thereto are now described by referring to the flow chart of Figure 2. The method of Figure 2 may be applied in a system, wherein each of a plurality of access points and a mobile communication unit is provided with a transceiver, and said mobile communication unit is arranged to travel a predetermined route. The method comprises adjusting (200)
20 transmission power of at least the transceiver of the mobile communication unit substantially to a maximum level, and attenuating (202) transmission signal of each transceiver such that signal level of a received signal in a transmission between the mobile communication unit and each of the access points is more optimal, wherein the level of
25 attenuation is set constant (204) at least in the mobile communication unit.

30 Hence, the maximum throughput requirement of the wireless offload system is addressed by adjusting the transmission power of each transceiver, both in the access points and in the mobile communication unit, to a high enough level. At least in the transceiver of the mobile communication unit this means adjusting the transmission power substantially to a maximum level. As a result, the power level received by an antenna (RSSI, Received Signal Strength Indicator) of the
35 access point becomes very high. As such, this would create significant interference between the transceivers. This is compensated by attenuating the transmission signal of each transceiver such that the

signal level of a received signal in a transmission between the mobile communication unit and each of the access points is at wanted level. By increasing the attenuation, the sensitivity of the transceivers is decreased, which, in turn, reduces the receiver cell size and decreases interference in the transmission between the mobile communication unit and the access point. The level of attenuation is set constant at least in the mobile communication unit, possibly also in each of the access points. This simplifies the implementation since no adjustments of transmission, such as channel changes or configuration of attenuation, are required, but the mobile communication unit may operate successfully throughout the wireless offload system.

According to an embodiment, the method further comprises adjusting the transmission power of the transceivers of one or more of said plurality of access points to a level sufficient for transmitting acknowledgements. It is noted that the transmission power of the access points does not necessarily need to be maximum, since especially in wireless offload environment the main purpose is to maximize link rates from the mobile communication unit to the access point. The data traffic from the access point to the mobile communication unit comprises mostly low-bitrate acknowledgements. Thus, for the transmission channel from the access point to the mobile communication unit, it is only required that the RSSI or link rate is at sufficient level, which may be significantly lower than the maximum level.

For example, considering a 802.11n network, experiments have shown that for the transmission channel from the mobile communication unit to the access point, the Signal-to-Noise Ratio (SNR) needs to be over 25 dB, preferably over 28 dB. However, for the transmission channel from the access point to the mobile communication unit the SNR may be a lot lower; in practise the link may be operable with SNR values of lower than 10 dB.

According to an embodiment, the method further comprises setting the level of attenuation in one or more of said plurality of access points to the same level as in the mobile communication unit. Thus, best results

in interference reduction are probably achieved, if the level of attenuation is set the same in the mobile communication unit and in each of the access points. Nevertheless, it is further noted that remarkable reduction in interference may be achieved even if the level of attenuation is somewhat different in the mobile communication unit and in one or more access points.

According to an embodiment, the transmission signal is attenuated by an attenuator between the transceiver and an antenna of the access point or the mobile communication unit. Thus, by placing an appropriately adjusted attenuator between the transceiver and the antenna, a straightforward and an inexpensive way for adjusting the attenuation level to compensate for the maximum transmission power is provided. The attenuator may preferably be an adjustable-stepped attenuator and a continuously adjustable attenuator so as to control the received signal level to be appropriate.

According to an embodiment, the method further comprises determining a group of attenuation levels, each attenuation level providing optimal received signal level in the transmission between the mobile communication unit and one of the access points; and selecting the lowest attenuation level from said group to be used at least in the mobile communication unit.

Thereby, the attenuation level may be determined while the mobile communication unit moves along its predetermined route, wherein the multiple access points are arranged in the vicinity of the route. When the mobile communication unit approaches the first access point, a first attenuation level is determined for the transmission between the mobile communication unit and the first access point such that received signal level is optimal, thus providing the minimum cell size around the first access point. The mobile communication unit then continues to travel along its route and approaches the second access point. A second attenuation level is then determined for the transmission between the mobile communication unit and the second access point providing the minimum cell size around the second access point.

The same procedure is repeated for the multiple access points, thereby determining a group of attenuation levels G_{AL} comprising the first attenuation level, the second attenuation level, etc.; $G_{AL} = \{AL_1, AL_2, \dots, AL_n\}$, where n is the number of access points. From the group of attenuation levels G_{AL} , the lowest attenuation level, i.e. $\min(G_{AL}) = \min\{AL_1, AL_2, \dots, AL_n\}$ is selected to be used at least in the mobile communication unit. The lowest attenuation level corresponds to the weakest transmission conditions between the mobile communication unit and one of the access points; i.e. the weakest received signal without the attenuation applied. In other words, by selecting the lowest attenuation level to be used in the mobile communication unit, the worst-case scenario along the route of the mobile communication unit is met, thereby ensuring that the communication is most probably successful with other access points as well.

According to an embodiment, the method further comprises determining a group of distances, each distance indicating the shortest distance between the route of the mobile communication unit and one of the access points; and adjusting the constant attenuation level to be used on the basis of the longest distance in said group.

Thus, in addition to or instead of determining the group of attenuation levels, adjusting the constant attenuation level may be simplified or supplemented by measuring the shortest distances between the route of the mobile communication unit and each of the access points. Thus, for each of the access points, the shortest distance between the route of the mobile communication unit and the particular access point is determined. All said distances may be grouped as a group of distances G_D comprising the first distance (the shortest distance between the route of the mobile communication unit and the first access point), the second distance, etc.; $G_D = \{D_1, D_2, \dots, D_n\}$, where n is the number of access points. From the group of distances G_D , the longest distance, i.e. $\max(G_D) = \max\{D_1, D_2, \dots, D_n\}$ is selected to be used as a basis for adjusting the attenuation level at least in the mobile communication unit. The longest distance typically corresponds to the weakest transmission conditions between the mobile communication unit and one of the access points; i.e. the weakest received signal without the

attenuation applied. Again, by selecting the longest distance to be used as a basis for adjusting the attenuation level in the mobile communication unit, the worst-case scenario along the route of the mobile communication unit is met, thereby ensuring that the communication is most probably successful with other access points as well.

This can be illustrated by an example shown in Figure 3, where a train is travelling along its route, the route having four access points AP1 – AP4 in the vicinity of the route. The shortest distance from the route to each of the access points is indicated as D1 – D4, correspondingly. As can be seen in Figure 3, from the group of distances $\{D_1, D_2, D_3, D_4\}$ distance D_3 is the longest; i.e. $\max \{D_1, D_2, D_3, D_4\} = D_3$. Therefore, the worst-case scenario for the attenuation is determined based on distance D_3 between the route and AP3.

According to an embodiment, the method further comprises adjusting the transmission power of the transceivers of the access points such that interference between said plurality of access points is minimized. Hence, if the distance between two or more access points is short, which may be the case especially in urban environment, the access points may cause interference to each other. Therefore, it is preferable to take the interference between the access points into account, and adjusting the transmission power of the transceivers of the access points at the access points such that the mutual interference is minimized. As described above, the transmitting power can be lower in the access points since wireless offload needs high throughput only from the mobile communication unit to the access point and bitrates from the access point to the mobile communication unit are typically significantly lower. This helps to minimize interference between access points.

According to an embodiment, the transmission between the mobile communication unit and the access points is carried out according to any of IEEE 802.11 standard series. While the WLAN technology according to any of IEEE 802.11 standard series provides several advantages in wireless data offload, it is undeniable that the

interference problem arises especially in radio communication taking place on unlicensed radio frequency ranges. It is, however, noted that the implementation of the embodiments disclosed herein are not limited to the WLAN technology according to any of IEEE 802.11 standard series only, but the embodiments may be applied to any similar wireless communication technology encountering the interference problem.

In the above examples the mobile communication unit has been described as being connected to a public transportation vehicle. However, the embodiments are not limited to vehicles, but at least some of the embodiments are applicable, for example, to any portable or handheld communication devices, such mobile phones, smart phones, tablets or laptop computers.

A skilled man appreciates that any of the embodiments described above may be implemented as a combination with one or more of the other embodiments, unless there is explicitly or implicitly stated that certain embodiments are only alternatives to each other.

With the arrangement described above, interference of a plurality of wireless devices can be minimized and hence the performance of wireless offload may be improved. Moreover, by determining the attenuation level based on the worst case scenario, a simplified implementation of the attenuation is enabled in a system where the distance between the mobile communication unit and the access points varies.

It will be obvious for a person skilled in the art that with technological developments, the basic idea of the invention can be implemented in a variety of ways. Thus, the invention and its embodiments are not limited to the above-described examples but they may vary within the scope of the claims.

Claims:

1. A method for transferring data between a mobile communication unit and a plurality of access points, wherein each of
5 said plurality of access points and said mobile communication unit is provided with a transceiver, said mobile communication unit being arranged to travel a predetermined route, the method comprising:
adjusting transmission power of at least the transceiver of
the mobile communication unit substantially to a maximum level; and
10 attenuating transmission signal of each transceiver such that signal level of a received signal in a transmission between the mobile communication unit and each of the access points is more optimal,
wherein the level of attenuation is set constant at least in
15 the mobile communication unit.
2. The method according to claim 1, further comprising:
setting the level of attenuation in one or more of said
plurality of access points to the same level as in the mobile
20 communication unit.
3. The method according to claim 1 or 2, further comprising:
adjusting the transmission power of the transceivers of one
or more of said plurality of access points to a level sufficient for
25 transmitting acknowledgements.
4. The method according to any preceding claim, further comprising:
determining a group of attenuation levels, each attenuation
30 level providing optimal received signal level in the transmission between the mobile communication unit and one of the access points; and
selecting the lowest attenuation level from said group to be
used at least in the mobile communication unit.
35
5. The method according to any preceding claim, further comprising:

determining a group of distances, each distance indicating the shortest distance between the route of the mobile communication unit and one of the access points; and

5 adjusting the constant attenuation level to be used on the basis of the longest distance in said group.

6. The method according to any preceding claim, further comprising:

10 adjusting the transmission power of the transceivers of the access points such that interference between said plurality of access points is minimized.

15 7. The method according to any preceding claim, wherein the transmission signal is attenuated by an attenuator between the transceiver and an antenna of the access point or the mobile communication unit.

20 8. The method according to any preceding claim, wherein the transmission between the mobile communication unit and the access points is carried out according to any of IEEE 802.11 standard series.

25 9. The method according to any preceding claim, wherein the mobile communication unit is arranged in a public transportation vehicle, such as a train, a tram, a metro train or a bus, arranged to travel a predetermined route.

30 10. The method according to any preceding claim, wherein the transmission between the mobile communication unit and the access points is used in wireless offload for transmitting data from the mobile communication unit to at least one of the access points for further forwarding the data to a data communication network.

35 11. A wireless offload system for transferring data between a mobile communication unit and a plurality of access points, wherein each of said plurality of access points and said mobile communication

unit is provided with a transceiver, said mobile communication unit being arranged to travel a predetermined route, wherein

transmission power of at least the transceiver of the mobile communication unit is arranged to be adjusted substantially to a maximum level;

transmission signal of each transceiver is arranged to be attenuated such that signal level of a received signal in a transmission between the mobile communication unit and each of the access points is more optimal,

wherein the level of attenuation is constant at least in the mobile communication unit.

12. The system according to claim 11, wherein the level of attenuation in one or more of said plurality of access points is at the same level as in the mobile communication unit.

13. The system according to claim 11 or 12, wherein the transmission power of the transceivers of one or more of said plurality of access points is at a level sufficient for transmitting acknowledgements.

14. The system according to any of claims 11 - 13, wherein a group of attenuation levels is arranged to be determined, each attenuation level providing optimal received signal level in the transmission between the mobile communication unit and one of the access points; and

the lowest attenuation level from said group is used at least in the mobile communication unit.

15. The system according to any of claims 11 - 14, wherein a group of distances is arranged to be determined, each distance indicating the shortest distance between the route of the mobile communication unit and one of the access points; and

the constant attenuation level to be used is arranged to be adjusted on the basis of the longest distance in said group.

16. The system according to any of claims 11 - 15, wherein the transmission power of the transceivers of the access points is adjusted to minimize interference between said plurality of access points.

5

17. The system according to any of claims 11 - 16, comprising an attenuator between the transceiver and an antenna of the access point or the mobile communication unit.

10

18. The system according to any of claims 11 - 17, wherein the transmission between the mobile communication unit and the access points is arranged to be carried out according to any of IEEE 802.11 standard series.

15

19. The system according to any of claims 11 - 18, wherein the mobile communication unit is arranged in a public transportation vehicle, such as a train, a tram, a metro train or a bus, arranged to travel a predetermined route.

20

20. The system according to any of claims 11 - 19, wherein the transmission between the mobile communication unit and the access points is used in wireless offload for transmitting data from the mobile communication unit to at least one of the access points for further forwarding the data to a data communication network.

25

21. A mobile communication unit of a wireless offload system, said mobile communication unit comprising a transceiver, and said mobile communication unit being arranged to travel a predetermined route, wherein

30

transmission power of the transceiver of the mobile communication unit is arranged to be adjusted substantially to a maximum level;

35

transmission signal of the transceiver is arranged to be attenuated such that signal level of a received signal in an access point is more optimal, wherein the level of attenuation is constant.

22. The mobile communication unit according to claim 21, wherein

5 a group of attenuation levels is arranged to be determined, each attenuation level providing optimal received signal level in the transmission between the mobile communication unit and one or more access points; and

the lowest attenuation level from said group is used at least in the mobile communication unit.

10 23. The mobile communication unit according to claim 21 or 22, wherein

a group of distances is arranged to be determined, each distance indicating the shortest distance between the route of the mobile communication unit and one of the access points; and

15 the constant attenuation level to be used is arranged to be adjusted on the basis of the longest distance in said group.

20 24. The mobile communication unit according to any of claims 21 - 23, comprising an attenuator between the transceiver and an antenna of the mobile communication unit.

25 25. The mobile communication unit according to any of claims 21 - 24, wherein the transmission between the mobile communication unit and the access points is arranged to be carried out according to any of IEEE 802.11 standard series.

26. The mobile communication unit according to any of claims 21 - 27, wherein

30 the mobile communication unit is arranged in a public transportation vehicle, such as a train, a tram, a metro train or a bus, arranged to travel a predetermined route.

35 27. An access point of a wireless offload system, said access point comprising a transceiver, said access point being arranged in a vicinity of a predetermined route of a mobile communication unit, wherein

the transmission power of the transceivers is at a level sufficient for transmitting acknowledgements; and

transmission signal of the transceiver is arranged to be attenuated such that signal level of a received signal in the mobile communication unit is more optimal.

28. The access point according to claim 27, wherein the level of attenuation is at the same level as in the mobile communication unit.

10

29. The access point according to claim 27 or 28, wherein the transmission power of the transceiver is adjusted to minimize interference between a plurality of access points.

30. The access point according to any of claims 27 - 29, comprising an attenuator between the transceiver and an antenna of the access point.

15

31. The access point according to any of claims 27 - 30, wherein the transmission between the mobile communication unit and the access points is arranged to be carried out according to any of IEEE 802.11 standard series.

20

25

30

1/2

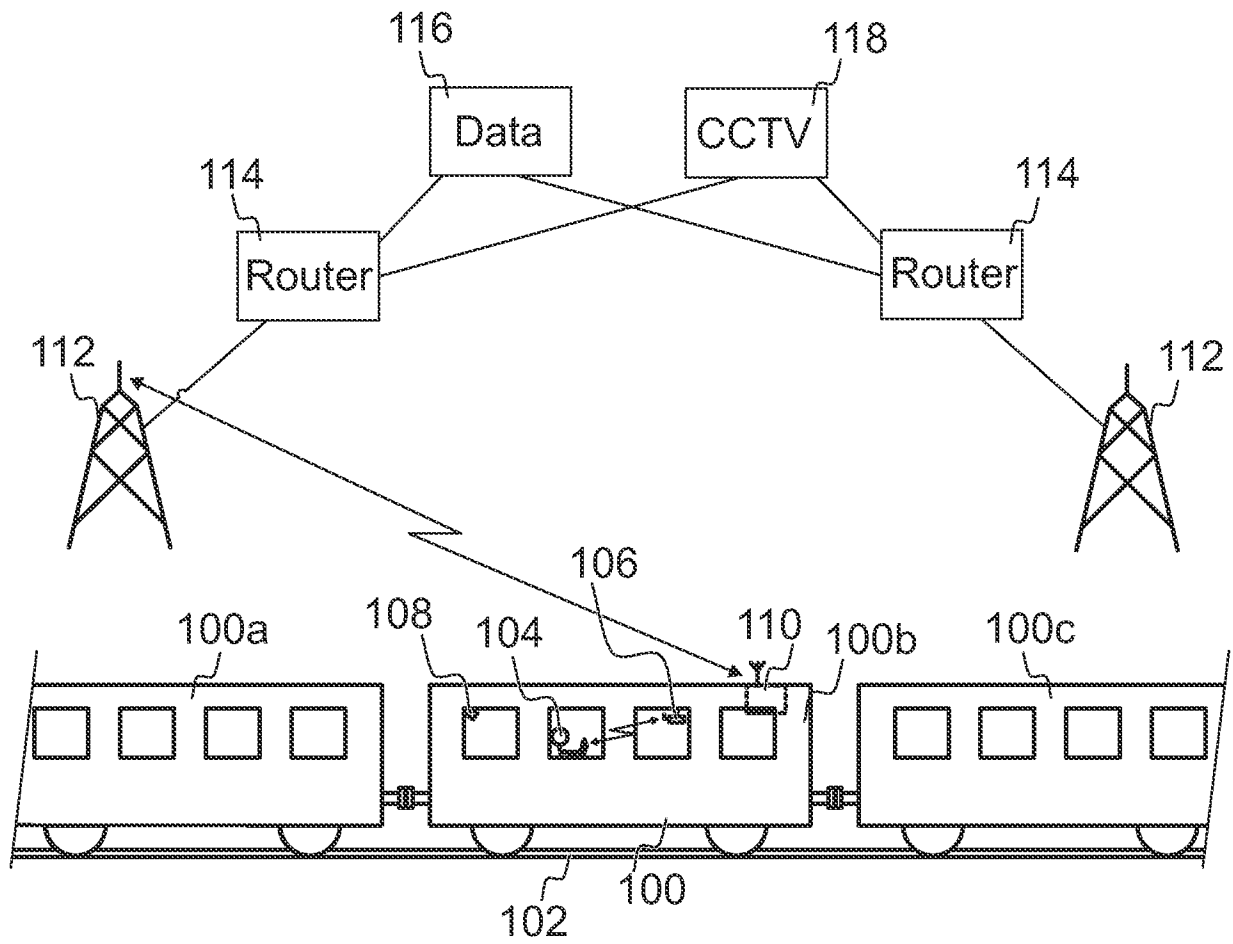


Fig. 1

2/2

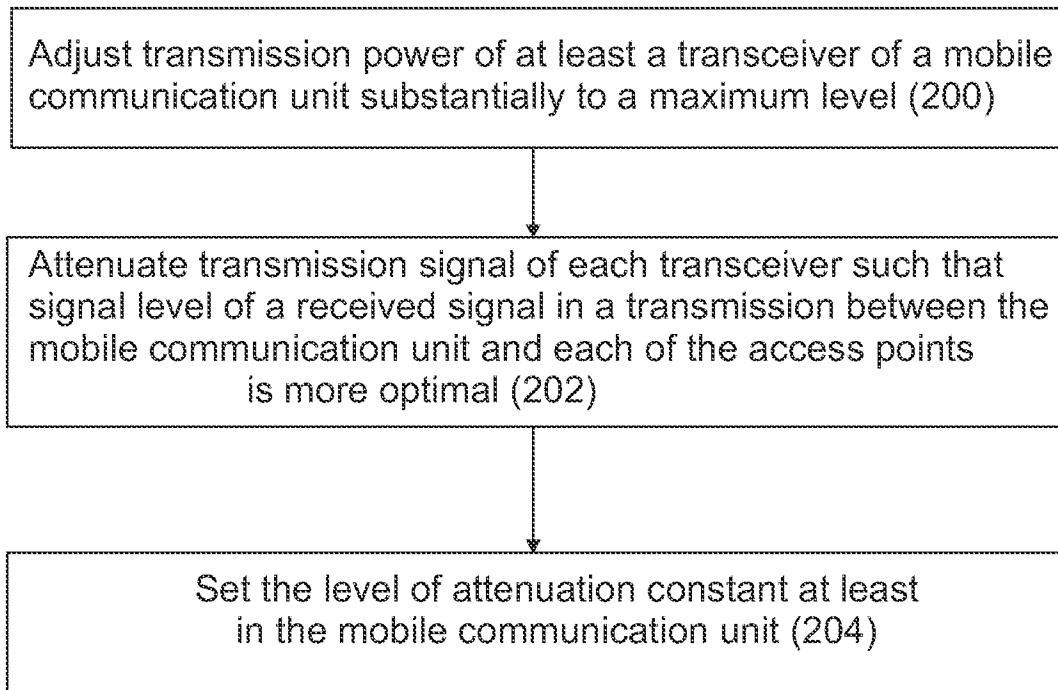


Fig. 2

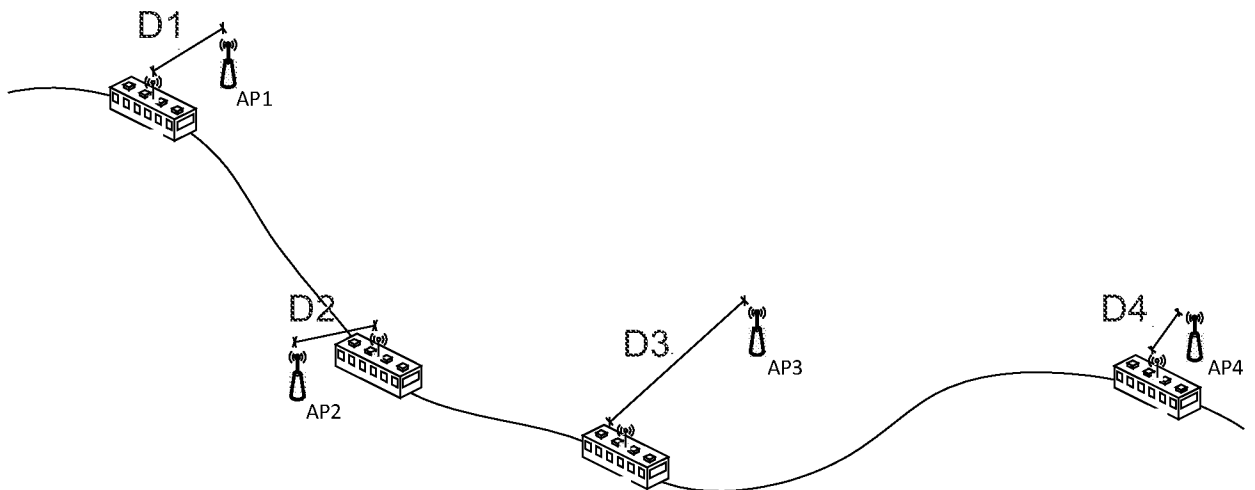


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050414

A. CLASSIFICATION OF SUBJECT MATTER

See extra sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC: H04W, H04B, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

FI, SE, NO, DK

Electronic data base consulted during the international search (name of data base, and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 103476128 A (NAT RADIO MONITORING CT) 25 December 2013 (25.12.2013) abstract	1-31
A	WO 2005050855 A1 (CELLVINE LTD [IL]) 02 June 2005 (02.06.2005)	1-31
A	US 7359730 B2 (DENNIS GARY J [US] et al.) 15 April 2008 (15.04.2008)	1-31
A	EP 1895714 B1 (NTT DOCOMO INC [JP]) 17 July 2013 (17.07.2013)	1-31
A	EP 1427117 B1 (SIEMENS MOBILE COMM SPA [IT]) 23 May 2007 (23.05.2007)	1-31

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 17 August 2015 (17.08.2015)	Date of mailing of the international search report 19 August 2015 (19.08.2015)
Name and mailing address of the ISA/FI Finnish Patent and Registration Office P.O. Box 1160, FI-00101 HELSINKI, Finland Facsimile No. +358 9 6939 5328	Authorized officer Jorma Ristola Telephone No. +358 9 6939 500

INTERNATIONAL SEARCH REPORT
Information on Patent Family Members

International application No.
PCT/FI2015/050414

Patent document cited in search report	Publication date	Patent family members(s)	Publication date
CN 103476128 A	25/12/2013	None	
.....			
WO 2005050855 A1	02/06/2005	AU 2003274656 A1	08/06/2005
		EP 1676374 A1	05/07/2006
		JP 2007519267 A	12/07/2007
		US 2007135042 A1	14/06/2007
		US 8000649 B2	16/08/2011
.....			
US 7359730 B2	15/04/2008	US 7359730 B2	15/04/2008
.....			
EP 1895714 B1	17/07/2013	EP 1895714 B1	17/07/2013
		CN 101136821 A	05/03/2008
		CN 101136821 B	18/04/2012
		JP 2008060994 A	13/03/2008
		JP 4805756 B2	02/11/2011
		US 2008056177 A1	06/03/2008
		US 7804797 B2	28/09/2010
.....			
EP 1427117 B1	23/05/2007	EP 1427117 B1	23/05/2007
		AT 363162 T	15/06/2007
		DE 60220292 D1	05/07/2007
		DE 60220292 T2	20/09/2007
		ES 2284809 T3	16/11/2007
.....			

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI2015/050414

CLASSIFICATION OF SUBJECT MATTER

IPC

H04W 24/02 (2009.01)

H04W 52/06 (2009.01)

H04W 52/30 (2009.01)

H04W 52/24 (2009.01)