

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 July 2008 (17.07.2008)

PCT

(10) International Publication Number
WO 2008/085485 A1

(51) International Patent Classification:
H04Q 7/38 (2006.01)

(74) Agent: **BALLARINI, Robert, J.**; Volpe And Koenig, P.C., United Plaza, Suite 1600, 30 S. 17th Street, Philadelphia, PA 19103 (US).

(21) International Application Number:
PCT/US2007/026351

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
26 December 2007 (26.12.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/883,521 5 January 2007 (05.01.2007) US

(71) Applicant (for all designated States except US): **INTER-DIGITAL TECHNOLOGY CORPORATION** [US/US]; 3411 Silverside Road, Concord Plaza, Suite 105, Hagley Building, Wilmington, DE 19810 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(72) Inventors; and

(75) Inventors/Applicants (for US only): **MARINIER, Paul** [CA/CA]; 1805 Stravinski, Brossard, Québec J4X 2J7 (CA). **CAVE, Christopher, R.** [CA/CA]; 201 chemin du Golf, Apt. 304, Ile-des-soeurs (Verdun), Québec H3H 1Z4 (CA). **TERRY, Stephen, E.** [US/US]; 15 Summit Avenue, Northport, NY 11768 (US). **PANI, Diana** [CA/CA]; 1950 Lincoln Avenue, Apt. #1812, Montreal, Québec H3H 2N8 (CA).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING AND RECEIVING COMMON LOGICAL CHANNEL AND DEDICATED LOGICAL CHANNEL TRANSMISSIONS VIA A HIGH SPEED DOWNLINK SHARED CHANNEL

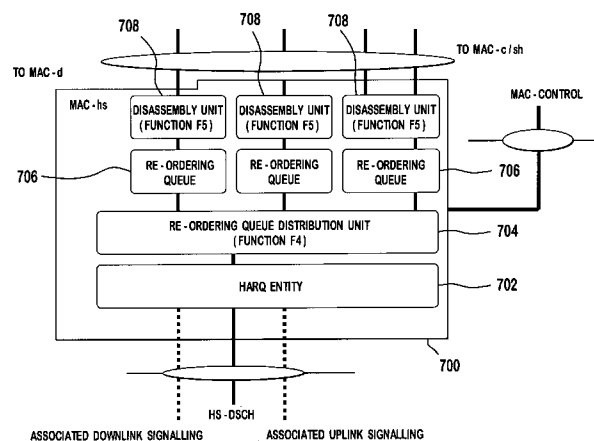

(57) Abstract: A method and apparatus for transmitting and receiving common logical channel and dedicated logical channel transmissions via a high speed downlink shared channel (HS-DSCH) are disclosed. A medium access control (MAC)-hs entity generates a MAC-hs protocol data unit (PDU) carrying a MAC-c/sh/m PDU and/or a MAC-d PDU. A UE-specific HS-DSCH radio network temporary identifier (H-RNTI) may be used for the MAC-d PDU, and a cell-specific H-RNTI may be used for the MAC-c/sh/b PDU. Alternatively, a cell-specific H-RNTI and one of a cell RNTI (C-RNTI) and a universal terrestrial radio access network RNTI (U-RNTI) may be used in a Cell_FACH state. The logical channel type and identity may be inserted in a MAC-hs PDU header or indicated by a distinct H-RNTI. A logical channel type for common logical channels may be identified in a MAC-c/sh/m PDU header. The logical channel type and identity may be identified by a queue identity.

WO 2008/085485 A1

[0001] METHOD AND APPARATUS FOR TRANSMITTING AND RECEIVING COMMON LOGICAL CHANNEL AND DEDICATED LOGICAL CHANNEL TRANSMISSIONS VIA A HIGH SPEED DOWNLINK SHARED CHANNEL

[0002] FIELD OF INVENTION

[0003] The present invention is related to wireless communication.

[0004] BACKGROUND

[0005] High-speed shared channels for downlink and uplink transmissions are available in third generation partnership project (3GPP) Release 6 systems. Currently, these channels are only available when a user equipment (UE) is in a Cell_DCH state. The UE is in the Cell_DCH state if dedicated channels are allocated for the UE. In other radio resource control (RRC) states of the connected mode, (i.e., Cell_FACH, Cell_PCH, and URA_PCH states), the UE is not allocated dedicated channels. Communication with the UE takes place over a random access channel (RACH) and a forward access channel (FACH) in the Cell_FACH state, and over a paging channel (PCH) in the Cell_PCH and URA_PCH states.

[0006] Figures 1 and 2 show conventional medium access control (MAC) entities in the network and in the UE, respectively. A plurality of sub-MAC entities are included in the MAC entity. The MAC-b entity controls a broadcast channel (BCH). The MAC-c/sh/m controls access to all common transport channels, except a high speed downlink shared channel (HS-DSCH). The MAC-d controls access to all dedicated transport channels to MAC-c/sh/m and MAC-hs. The MAC-hs handles high speed downlink packet access (HSDPA) specific functions and controls access to the HS-DSCH. The MAC-e/es controls access to an enhanced dedicated channel (E-DCH).

[0007] The data rates available on the FACH channel in the downlink are in practice limited to low values due to the inability of a radio network controller

(RNC) to modify its transmission power or a modulation and coding scheme to adapt to the requirements of the different UEs served by the FACH. This data rate limitation means that the duration needed to set up dedicated channels for the UE is relatively long and this, in turn, results in long call setup times which degrade end-user experience. Because of this, it has been proposed to allow the use of the HS-DSCH while the UE is in the Cell_FACH state. It has also been proposed to allow the use of the HS-DSCH for paging in the Cell_PCH and URA_PCH states.

[0008] While allowing the utilization of the HS-DSCH in the Cell_FACH, Cell_PCH, and URA_PCH states would improve the system performance, there are a number of issues that need to be solved in order to avoid inefficiencies. MAC architecture should be modified to allow the utilization of the HS-DSCH in other RRC states. MAC sub-entities should also be modified to solve the following issues: how to efficiently identify UEs that the data carried over the HS-DSCH belong to; how to efficiently identify types of logical channels that the data carried over the HS-DSCH belong to; and how to handle legacy UEs that do not support the feature.

[0009] SUMMARY

[0010] A method and apparatus for transmitting and receiving common logical channel and dedicated logical channel transmissions via an HS-DSCH are disclosed. A MAC-hs entity in a network generates a MAC-hs protocol data unit (PDU) carrying the MAC-c/sh/m PDU and/or the MAC-d PDU and transmitting the MAC-hs PDU via an HS-DSCH. A UE-specific HS-DSCH radio network temporary identifier (H-RNTI) may be used for the MAC-d PDU, and a cell-specific H-RNTI may be used for the MAC-c/sh/b PDU. Alternatively, the MAC-hs entity may use a cell-specific H-RNTI and one of a cell RNTI (C-RNTI) and a universal terrestrial radio access network RNTI (U-RNTI) when the UE is in a Cell_FACH state. The logical channel type and identity may be inserted in a MAC-hs PDU header. A distinct H-RNTI may be used to identify a logical channel type and identity. A logical channel type for the common logical channel

may be identified in a MAC-c/sh/m PDU header. The logical channel type and identity may be identified by a queue identity (ID).

[0011] BRIEF DESCRIPTION OF THE DRAWINGS

[0012] A more detailed understanding may be had from the following description, given by way of example and to be understood in conjunction with the accompanying drawings wherein:

[0013] Figure 1 shows a conventional MAC entity in the network;

[0014] Figure 2 shows a conventional MAC entity in the UE;

[0015] Figure 3 shows a MAC-c/sh/m entity in the network;

[0016] Figure 4 shows a MAC-c/sh/m entity in a wireless transmit/receive unit (WTRU);

[0017] Figure 5 shows a MAC-hs entity in the network;

[0018] Figure 6 shows a MAC-hs entity in the WTRU in accordance with one embodiment;

[0019] Figure 7 shows a MAC-hs entity in the WTRU in accordance with another embodiment;

[0020] Figure 8 shows a MAC-d entity in the network;

[0021] Figure 9 shows a MAC-d entity in the WTRU;

[0022] Figure 10 shows an example MAC-hs PDU format in case that multiplexing is allowed; and

[0023] Figure 11 shows an example MAC-hs PDU format in case that multiplexing is not allowed.

[0024] DETAILED DESCRIPTION

[0025] When referred to hereafter, the terminology "UE" includes but is not limited to a wireless transmit/receive unit (WTRU), a mobile station, a fixed or mobile subscriber unit, a pager, a cellular telephone, a personal digital assistant (PDA), a computer, or any other type of user device capable of operating in a wireless environment. When referred to hereafter, the terminology "Node-B" includes but is not limited to a base station, a site controller, an access point

(AP), or any other type of interfacing device capable of operating in a wireless environment.

[0026] Conventional MAC entities in the network and in the UE are modified to enable mapping of common and shared logical channels, (hereinafter collectively "common logical channels"), and dedicated logical channels onto the HS-DSCH and identify a UE and/or a logical channel for the HS-DSCH transmission. The common logical channels include, but are not limited to, a paging control channel (PCCH), a common control channel (CCCH), a broadcast control channel (BCCH), a shared channel control channel (SHCCH), a common traffic channel (CTCH), a multimedia broadcast multicast services (MBMS) traffic channel (MTCH), an MBMS scheduling channel (MSCH), an MBMS control channel (MCCH), and the like. The dedicated logical channels include, but are not limited to, a dedicated control channel (DCCH) and a dedicated traffic channel (DTCH). New functions are added or conventional functions are modified in the sub-MAC entities in the network and the UE as shown in Figures 3-9.

[0027] Figure 3 shows a MAC-c/sh/m entity 300 in the network. The MAC-c/sh/m entity 300 receives MAC service data unit (SDU) via the common logical channels, (e.g., PCCH, BCCH, SHCCH, CCCH, CTCH, MCCH, MSCH, MTCH, etc.), and receives MAC-d PDUs from a MAC-d entity. The MAC-c/sh/m entity 300 may output a MAC-c/sh/m PDU to the MAC-hs entity for transmission over the HS-DSCH. Alternatively, the MAC-c/sh/m entity 300 may transmit the MAC SDUs from the common logical channels via common transport channels, (such as a RACH, an FACH, etc.), as in prior art.

[0028] The MAC-c/sh/m entity 300 includes an F1 function unit 302. The F1 function unit 302 receives MAC SDUs via the common logical channels and MAC-d PDUs from the MAC-d entity 800 via a flow control unit 304. The F1 function unit 302 dynamically determines whether the logical channel should be mapped to the HS-DSCH or another transport channel as in prior art. Such determination may be based on the knowledge of the capabilities of the UE(s) to which the information is intended if known because legacy UEs may not have the

capability of utilizing HS-DSCH in an RRC state other than the Cell_DCH state. The F1 function unit 302 may insert logical channel identity, (e.g., target channel type field (TCTF)), in the MAC-c/sh/m PDU, which will be explained in detail below.

[0029] The MAC SDUs and MAC-d PDUs processed by the F1 function unit 302 may be sent to the MAC-hs entity 500 via a flow control unit 306 for transmission over the HS-DSCH. Alternatively, the MAC SDUs and the MAC-d PDUs processed by the F1 function unit may be first processed by the scheduling/buffering/priority handling/ demultiplexing unit 308 and then forwarded to the MAC-hs entity 500 via the flow control unit 306.

[0030] The MAC-c/sh/m entity 300 must provide appropriate timing information to the MAC-hs entity 500 to ensure that the BCCH and PCCH information is transmitted at the appropriate time.

[0031] Figure 4 shows a corresponding MAC-c/sh/m entity 400 in the UE. The MAC-c/sh/m entity 400 includes an F2 function unit 402. The F2 function unit 402 receives a MAC-hs SDU from the MAC-hs entity 600. The F2 function unit 402 detects logical channel identity, (e.g., TCTF), in the header, and maps between logical channels and transport channels.

[0032] Figure 5 shows a MAC-hs entity 500 in the network. The MAC-hs entity 500 receives MAC-c/sh/m PDU and MAC-d PDU and outputs a MAC-hs PDU for transmission over the HS-DSCH. The MAC-hs entity 500 includes a scheduling and priority handling unit 502, an HARQ entity 504, and a transport format and resource combination (TFRC) selection unit 506. The scheduling and priority handling unit 502 manages HS-DSCH resources between the HARQ entity 504 and data flows according to their priority. The scheduling and priority handling unit 502 also determines the queue ID and TSN for each new MAC-hs PDU being serviced. The HARQ entity 504 handles the HARQ functionality for the UE. The TFRC selection unit 5-6 selects an appropriate transport format and resource for the data to be transmitted on HS-DSCH. In addition, the TFRC selection unit 506 performs function F3 to insert logical channel type and identity, (e.g., TCTF and C/T Mux), in the MAC-hs header and/or select an HS-

DSCH radio network temporary identity (H-RNTI), and insert "UE-ID" and/or "UE-ID Type" fields in the MAC-hs header, which will be explained in detail below.

[0033] Figure 6 shows a corresponding MAC-hs entity 600 in the UE. The MAC-hs entity 600 includes an HARQ entity 602, a reordering queue distribution unit 604, a plurality of reordering queues 606, and a plurality of disassembly units 608, 610. The HARQ entity 602 performs HARQ functionality. The reordering queue distribution unit 604 distributes the received MAC-hs PDUs to the correct reordering queue 606 based on the queue ID. The reordering queue distribution unit 604 also performs function F4 to distribute the received MAC-hs PDUs to the correct reordering buffer. The distribution may be based on the logical channel ID or the detected H-RNTI or both, depending on the method that is used to signal logical channel. When different queues or logical channels are multiplexed in one MAC-hs PDU, the reordering queue distribution unit 604, (more specifically Function 4 in unit 604), may perform de-multiplexing or de-assembly of the MAC-hs PDU into the respective logical channels or queues. The de-assembly/de-multiplexing shall be done prior to reordering.

[0034] The disassembly entities 608, 610 are responsible for the disassembly of MAC-hs PDUs. When a MAC-hs PDU is disassembled the MAC-hs header is removed, the MAC-d PDUs or MAC-c/sh/m PDUs are extracted and padding bits are removed. Then, the MAC-d PDUs or MAC-c/sh/m PDUs are delivered to the MAC-d entity or MAC-c/sh/m entity, respectively. The disassembly unit 608 performs function F5d for MAC-d PDUs and the disassembly unit 610 performs function F5c for MAC-c/sh/m PDUs. The disassembly unit 608 de-multiplexes MAC-hs PDUs based on MAC-hs header, (e.g., C/T field or other fields indicating the logical channel). The disassembly unit 610 de-multiplexes MAC-hs PDUs based on the MAC-hs header, (e.g., TCTF or other field indicating the logical channel).

[0035] Figure 7 shows an alternative MAC-hs entity 700 in the UE. The MAC-hs entity 700 includes an HARQ entity 702, a reordering queue distribution unit 704, a plurality of reordering queues 706, and a plurality of disassembly

units 708. When different queues and/or logical channels are multiplexed in one MAC-hs PDU, the reordering queue distribution unit 704, (more specifically Function 4 in unit 704), may perform de-multiplexing or de-assembly of the MAC-hs PDU into the respective logical channels or queues. The de-assembly/de-multiplexing shall be done prior to reordering. The reordering queue distribution unit 704 performs distributes the received de-assembled MAC-hs PDUs to the correct reordering buffer. The distribution of MAC-hs PDUs may be based on the logical channel ID and/or based on the detected H-RNTI. The disassembly unit 708 performs function F5 to de-multiplex MAC-hs PDUs based on the MAC-hs header, (e.g., a field indicating logical channel identifier).

[0036] If MAC-hs segmentation/concatenation based on available physical resources is performed in the Node B, the disassembly unit 608, 610, 708 may perform re-assembly of the segmented packets and disassembly of the concatenated packets. The received MAC-hs PDU is disassembled into the group of reordering SDUs that belong to the same reordering queue. The group of reordering SDUs is distributed to reordering queues for reordering. Concatenated group of reordering SDUs are disassembled into complete MAC-hs SDUs or MAC-hs SDU segments after reordering is performed. The MAC-hs SDU segments are reassembled into complete MAC-hs SDUs. The complete MAC-hs SDUs are demultiplexed based on logical channel identifiers in MAC-hs headers. The segmentation and concatenation information should be identified in the MAC header.

[0037] Figure 8 shows a MAC-d entity 800 in the network. The MAC-d entity 800 includes an F6 function unit 802. The F6 function unit 802 inserts C/T Mux field in the MAC-d header to indicate the logical channel identity.

[0038] Figure 9 shows a MAC-d entity 900 in the UE. The MAC-d entity 900 includes an F7 function unit 902. The F7 function unit 902 extracts the C/T Mux field.

[0039] UE identification for HS-DSCH transmission is explained hereinafter. UE identification should be provided for the HS-DSCH transmission to allow a UE to determine if the UE should read (or attempt to read) the HS-DSCH transmission and pass it to the layer above the MAC entity.

[0040] In accordance with a first embodiment, the TFRC selection unit 506 in the MAC-hs entity 500 in the network uses a UE-specific H-RNTI for dedicated logical channels, (i.e., DTCH and DCCH), mapped to the HS-DSCH, and a cell-specific H-RNTI for common logical channels mapped to the HS-DSCH. The UE-specific H-RNTI is provided to the UE by higher layers along with (or in place of) a cell radio network temporary identity (C-RNTI). The cell-specific H-RNTI is provided to UEs camped on or connected to the cell. In accordance with the first embodiment, the F1 function unit 302 in the MAC-c/sh/m entity 300 in the network is not required to add "UE ID" and "UE ID Type" fields to the MAC header of every incoming MAC-d PDU that is mapped to common transport channel. The MAC-c/sh/m entity 400 in the UE is not required to read "UE ID" field in the MAC-d PDU header.

[0041] For a PCCH, the network may derive a UE-specific H-RNTI from a UE identity, (such as international mobile equipment identity (IMEI) or international mobile subscriber identity (IMSI)). The network may also derive a UE-specific H-RNTI from a UE identity plus a cell-specific identity or the cell-specific H-RNTI. Alternatively, a unique H-RNTI may be used and the IMEI/IMSI based ID is signaled on the HS-DSCH. This may be used when the UE is in the Cell_PCH or URA_PCH states.

[0042] In accordance with a second embodiment, a cell-specific H-RNTI is used for dedicated logical channels mapped to the HS-DSCH when the UE is in the Cell_FACH state. In the Cell_PCH or URA_PCH states, either the cell-specific H-RNTI or a unique H-RNTI is used and the IMEI/IMSI based ID is signaled on the HS-DSCH. The UE is identified with the C-RNTI or U-RNTI as in prior art (in the "UE-ID Type" and "UE-ID" fields) if the UE has a mapped FACH. When a UE is configured for reception of HS-DSCH, the UE no longer receives a FACH.

[0043] The TFRC selection unit 503 in the MAC-hs entity 500 in the network inserts the "UE-ID Type" and "UE-ID" fields into the MAC-hs header. The "UE-ID type" and "UE-ID" fields are no longer inserted in the header for every MAC SDU in the MAC-c/sh/m entity. The MAC-c/sh/m header is not applied. A new version of the MAC-hs PDU header is defined to include the "UE-ID type" and "UE-ID" fields.

[0044] Alternatively, a high speed shared control channel (HS-SCCH) transmission may incorporate the "UE-ID type" and "UE-ID" fields. This new information is applied to the cyclic redundancy check (CRC) overlay in a unique way so that existing H-RNTI coding can be maintained.

[0045] In case that multiplexing of logical channels from different UEs is allowed in a MAC-hs PDU, multiple "UE-ID Type" and "UE-ID" fields may be included in the MAC-hs header along with a size index identifier (SID), number of MAC-d PDUS (N), and flag (F) fields to identify the UE that the data belongs to. Alternatively the information may be included in the HS-SCCH transmission.

[0046] In addition, a distinct transmission sequence number (TSN) may be included for each UE. This allows the UE to disregard information not destined to the UE when reordering. Specifically, the UE first de-multiplexes the MAC-hs PDU and keeps only the information destined to the UE, and then performs reordering using the TSN associated with this piece of the MAC-hs PDU.

[0047] Identification of logical channels is explained hereinafter. Since common logical channels may be transmitted over the HS-DSCH, the network should identify which logical channel a MAC SDU received from the network belongs to.

[0048] In accordance with the first embodiment, the logical channel type, or the logical channel type and identity, is indicated in the MAC-hs PDU when the UE is in the Cell_FACH state. The TFRC selection unit 503 in the MAC-hs entity inserts logical channel identification in the MAC-hs header. A new version for the MAC-hs PDU is defined and indicated by a new value of the version field (VF) that includes additional fields for identifying type and identity of logical

channels. For instance, the "TCTF" and "C/T Mux" fields may be utilized to indicate the logical channel type and identity.

[0049] The TCTF field indicates the logical channel type, (i.e., whether it carries BCCH, CCCH, CTCH, SHCCH, MCCH, MTCH, MSCH or dedicated logical channel information). The C/T Mux field indicates the logical channel instance when multiple logical channels are carried on the same transport channel or on the same MAC-d flow. The "C/T Mux" field is required only if the "TCTF" field indicates that the logical channel is dedicated logical channel, (i.e., DTCH and/or DCCH), and if there are multiple dedicated logical channels mapped to the HS-DSCH.

[0050] The format of the MAC-hs PDU header depends on whether multiplexing of logical channels is allowed in a MAC-hs PDU. Figure 10 shows an example MAC-hs PDU format in case that multiplexing is allowed. The MAC-hs PDU 1000 includes a MAC-hs header 1010 and a MAC-hs payload 1020. The MAC-hs payload 1020 includes one or more MAC-hs SDUs 1022 and optionally padding 1024. The MAC-hs header 1010 includes a VF, Queue ID, TSN, SID_n, N_n, F_n, TCTF_n, and C/T Mux_n fields. The VF field is a one bit flag providing extension capabilities of the MAC-hs PDU format. The Queue ID field provides identification of the reordering queue in order to support independent buffer handling of data belonging to different reordering queues. The TSN field is used for reordering purposes to support in-sequence delivery to higher layers. The SID_n field identifies the size of a set of consecutive MAC-d PDUs. The N_n field identifies the number of consecutive MAC-d PDUs with equal size. The F_n field indicates if more fields are present in the MAC-hs header or not.

[0051] Figure 11 shows an example MAC-hs PDU 1100 in case that multiplexing is not allowed. The MAC-hs PDU 1100 is similar to the MAC-hs PDU 1000 except in the MAC-hs PDU header 1110, only one TCTF and one C/T Mux field are included. It should be noted that the MAC-hs PDU formats shown in Figures 10 and 11 are examples and may be different depending on the specific way queue multiplexing, reordering and/or segmentation (if applicable) are implemented.

[0052] Logical channel type may be implicitly indicated to be a PCCH when the UE is in the Cell_PCH or URA_PCH states. Alternatively, an additional value of the TCTF field may be defined for the PCCH.

[0053] The MAC-hs PDU header may include a single TSN and Queue ID for the whole MAC-hs PDU as shown in Figures 10 and 11. Alternatively, the MAC-hs PDU header may include multiple TSNs and multiple Queue IDs if multiplexing of different queues is allowed. In this case, reordering is performed after demultiplexing of queues. Alternatively, no TSN may be signaled in the MAC-hs PDU header and reordering may be performed above the MAC-hs entity.

[0054] In accordance with a second embodiment, the logical channel type and identity are identified by distinct H-RNTI assigned to the UE. The TFRC selection unit 506 selects an H-RNTI for MAC-hs PDU, and the reordering queue distribution unit 604 distributes the received MAC-hs PDUs to a proper reordering queue 606 based on the detected H-RNTI. The mapping between the H-RNTI and the logical channel type is signaled to the UE through an RRC signaling.

[0055] In accordance with a third embodiment, the logical channel type is partly identified by H-RNTI and partly by "TCTF" and/or "C/T Mux" fields in the MAC-hs PDU header and/or the HS-SCCH transmission. For instance, the UE may be assigned an H-RNTI for dedicated logical channel traffic and another H-RNTI for common logical channel traffic. The TFRC selection unit 506 selects a proper H-RNTI for the common logical channel traffic and the dedicated logical channel traffic. For the dedicated logical channel traffic, the TFRC selection unit 506 in the MAC-hs entity inserts a "C/T Mux" field into the MAC-hs PDU header to identify the logical channel identity while for the common logical channel traffic, the TFRC selection unit 506 inserts a "TCTF" field into the MAC-hs PDU header to identify the common logical channel type. In the UE, the reordering queue distribution unit 604, 704 detects the H-RNTI and distributes the MAC-hs PDU to a proper reordering queue 606, 706 based on the detected H-RNTI, and the disassembly units 608, 610, 708 extract "TCTF" or "C/T Mux" fields and

transfer MAC SDU or MAC-d PDU to a higher layer based on the "TCTF" or "C/T Mux" field.

[0056] In accordance with a fourth embodiment, the logical channel type is identified in the MAC-c/sh/m PDU as in prior art, (i.e., "TCTF" field is included in the MAC header of every single MAC SDU by the F1 function unit). The "TCTF" field is included in the MAC-d PDUs that are mapped to the common transport channel. The logical channel identity for the dedicated logical channel is indicated in the MAC-d PDU as in prior art, (i.e., "C/T Mux" field is included in the MAC-d PDU header by the F6 function unit 802 when multiple dedicated logical channels are mapped to the HS-DSCH). In the UE, the F2 function unit 402 extracts the "TCTF" field and maps the MAC-hs PDU to a proper logical channel or to the MAC-d entity. The F7 function unit 902 then extracts the "C/T Mux" field to identify the logical channel identity.

[0057] In accordance with a fifth embodiment, the logical channel type and/or identity is partially or completely identified by the "Queue ID" field of the MAC-hs PDU header. A mapping is defined between a priority queue and a logical channel type or a group of logical channel types. In the latter case, the F1 function unit 302 adds a "TCTF" field to the header of each MAC SDU from one of the grouped logical channel types. In the UE, the reordering queue distribution unit 604 distributes the MAC-hs PDU based on the Queue ID.

[0058] Logical channel identity for dedicated logical channel is optionally identified by a "C/T Mux" field in either the MAC-hs PDU header or the MAC-d PDU header if only the logical channel type is identified by the Queue ID.

[0059] Multiplexing of different queues in one MAC-hs PDU may be performed. As described above, a MAC-hs PDU may contain a single pair of Queue ID and TSN values, multiple pairs of Queue ID and TSN values, or no TSN anywhere (neither MAC-d PDU header nor MAC-hs PDU header).

[0060] Tables 1 and 2 are summary of the functions performed by the function units in the sub-MAC entities in accordance with different embodiments of the UE identification and the logical channel identification.

[0061] Embodiments.

[0062] 1. A Node-B for transmitting common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.

[0063] 2. The Node-B of embodiment 1 comprising a MAC-hs entity for generating a MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU for a common logical channel SDU and a MAC-d PDU for a dedicated logical channel SDU and transmitting the MAC-hs PDU to a UE via an HS-DSCH.

[0064] 3. The Node-B of embodiment 2 wherein the MAC-hs entity using a UE-specific H-RNTI for identifying a UE to which the MAC-d PDU is destined, and using a cell-specific H-RNTI for identifying a UE to which the MAC-c/sh/b PDU is destined.

[0065] 4. The Node-B as in any one of embodiments 2-3, comprising a physical layer for transmitting the MAC-hs PDU.

[0066] 5. The Node-B as in any one of embodiments 2-4, wherein the MAC-hs entity inserts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

[0067] 6. The Node-B of embodiment 5, wherein multiple logical channels are multiplexed into one MAC-hs PDU and multiple logical channel types and identities are inserted in the MAC-hs PDU header.

[0068] 7. The Node-B of embodiment 6, wherein a logical channel type is implicitly indicated to be a PCCH when the UE is in one of Cell_PCH and URA_PCH states.

[0069] 8. The Node-B as in any one of embodiments 2-7, wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and identity.

[0070] 9. The Node-B as in any one of embodiments 2-7, wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and inserts a logical channel identity field in a MAC-hs PDU header to indicate a logical channel identity.

[0071] 10. The Node-B as in any one of embodiments 2-7, wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.

[0072] 11. The Node-B as in any one of embodiments 2-10, wherein at least one of logical channel type and identity is identified by a queue ID field of a MAC-hs PDU header.

[0073] 12. The Node-B of embodiment 11 wherein a group of logical channel types is indicated by the queue ID and a TCTF in a MAC-c/sh/m PDU header indicates a logical channel type of the grouped logical channel types.

[0074] 13. The Node-B as in any one of embodiments 11-12, wherein a logical channel identity for dedicated logical channel is identified by a C/T Mux field.

[0075] 14. The Node-B as in any one of embodiments 11-13, wherein the MAC-hs PDU includes multiple pairs of queue ID and TSN.

[0076] 15. The Node-B as in any one of embodiments 2-14, wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.

[0077] 16. The Node-B of embodiment 15, wherein one TSN is included for each of the logical channel identities in the MAC-hs header.

[0078] 17. A Node-B for transmitting common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.

[0079] 18. The Node-B of embodiment 17 comprising a MAC-hs entity for generating a MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU for a common logical channel SDU and a MAC-d PDU for a dedicated logical channel SDU and transmitting the MAC-hs PDU to a UE via an HS-DSCH.

[0080] 19. The Node-B of embodiment 18 wherein the MAC-hs entity using a cell-specific H-RNTI and one of a C-RNTI and a U-RNTI when the UE is in a Cell_FACH state.

[0081] 20. The Node-B as in any one of embodiments 18-19, comprising a physical layer for transmitting the MAC-hs PDU.

[0082] 21. The Node-B as in any one of embodiments 18-20, wherein the MAC-hs entity uses one of a cell-specific H-RNTI and a unique H-RNTI when the UE is in Cell_PCH and URA_PCH states.

[0083] 22. The Node-B as in any one of embodiments 19-21, wherein the MAC-hs entity inserts a UE-ID Type and UE-ID fields into a MAC-hs PDU header.

[0084] 23. The Node-B as in any one of embodiments 19-21, wherein an HS-SCCH transmission incorporates a UE-ID type and UE-ID fields.

[0085] 24. The Node-B as in any one of embodiments 18-23, wherein the MAC-hs entity inserts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

[0086] 25. The Node-B of embodiment 24 wherein a logical channel type is implicitly indicated to be a PCCH when the UE is in one of Cell_PCH and URA_PCH states.

[0087] 26. The Node-B as in any one of embodiments 18-25, wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and identity.

[0088] 27. The Node-B as in any one of embodiments 18-25, wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and inserts a logical channel identity field in a MAC-hs PDU header to indicate a logical channel identity.

[0089] 28. The Node-B as in any one of embodiments 18-25, wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.

[0090] 29. The Node-B as in any one of embodiments 18-28, wherein at least one of logical channel type and identity is identified by a queue ID field of a MAC-hs PDU header.

[0091] 30. The Node-B of embodiment 29, wherein a group of logical channel types is indicated by the queue ID and a TCTF in a MAC-c/sh/m PDU header indicates a logical channel type of the grouped logical channel types.

- [0092] 31. The Node-B as in any one of embodiments 29-30, wherein a logical channel identity for dedicated logical channel is identified by a C/T Mux field.
- [0093] 32. The Node-B as in any one of embodiments 29-31, wherein the MAC-hs PDU includes multiple pairs of queue ID and TSNs.
- [0094] 33. The Node-B as in any one of embodiments 18-32, wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.
- [0095] 34. The Node-B of embodiment 33, wherein one TSN is included for each of the logical channel identities in the MAC-hs header.
- [0096] 35. The Node-B as in any one of embodiments 18-34, wherein a distinct TSN is used for each UE.
- [0097] 36. A UE for receiving common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.
- [0098] 37. The UE of embodiment 36 comprising a MAC-d entity for processing a MAC-d PDU for a dedicated logical channel transmission.
- [0099] 38. The UE as in any one of embodiments 36-37, comprising a MAC-c/sh/m entity for processing a MAC-c/sh/m PDU for a common logical channel transmission.
- [00100] 39. The UE as in any one of embodiments 36-38, comprising a MAC-hs entity for processing a MAC-hs PDU transmitted over an HS-DSCH, the MAC-hs PDU carrying at least one of the MAC-c/sh/m PDU and the MAC-d PDU.
- [00101] 40. The UE of embodiment 39 wherein the MAC-hs entity uses a UE-specific H-RNTI for determining that the MAC-d PDU is destined to the UE and using a cell-specific H-RNTI for determined that the MAC-c/sh/m PDU is destined to the UE.
- [00102] 41. The UE as in any one of embodiments 39-40, wherein the MAC-hs entity extracts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

[00103] 42. The UE as in any one of embodiments 39-41, wherein the MAC-hs entity identifies a logical channel type and identity using a distinct H-RNTI.

[00104] 43. The UE as in any one of embodiments 39-41, wherein the MAC-hs entity identifies a logical channel type and identity using both an H-RNTI and logical channel information included in a MAC-hs PDU header.

[00105] 44. The UE as in any one of embodiments 39-43, wherein the MAC-c/sh/m entity identifies a logical channel type for the common logical channel using information included in a MAC-c/sh/m PDU header.

[00106] 45. The UE as in any one of embodiments 39-44, wherein the MAC-hs entity identifies at least one of logical channel type and identity using a queue ID field in a MAC-hs PDU header.

[00107] 46. The UE as in any one of embodiments 39-45, wherein the MAC-hs PDU includes multiple pairs of queue ID and TSNs.

[00108] 47. The UE as in any one of embodiments 39-46, wherein the MAC-hs PDU includes multiple pairs of logical channel identity and TSN.

[00109] 48. The UE as in any one of embodiments 39-47, wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in a MAC-hs PDU header.

[00110] 49. The UE of embodiment 48, wherein one TSN is included for each of the logical channel identities in the MAC-hs PDU header.

[00111] 50. A UE for receiving common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.

[00112] 51. The UE of embodiment 50 comprising a MAC-d entity for processing a MAC-d PDU for a dedicated logical channel transmission.

[00113] 52. The UE as in any one of embodiments 50-51, comprising a MAC-c/sh/m entity for processing a MAC-c/sh/m PDU for a common logical channel transmission.

[00114] 53. The UE as in any one of embodiments 50-52, comprising a MAC-hs entity for processing a MAC-hs PDU transmitted over an HS-DSCH, the MAC-hs PDU carrying at least one of the MAC-c/sh/m PDU and the MAC-d PDU.

[00115] 54. The UE of embodiment 53 wherein a cell-specific H-RNTI and one of a C-RNTI and a U-RNTI are used to determine whether the MAC-hs PDU is destined to the UE when the UE is in a Cell_FACH state.

[00116] 55. The UE as in any one of embodiments 53-54, wherein the MAC-hs entity uses one of a cell-specific H-RNTI and a unique H-RNTI when the UE is in Cell_PCH and URA_PCH states.

[00117] 56. The UE as in any one of embodiments 53-55, wherein the MAC-hs entity extracts a UE-ID Type and UE-ID fields in a MAC-hs PDU header to determine whether the MAC-hs PDU is destined to the UE.

[00118] 57. The UE as in any one of embodiments 53-55, wherein a UE-ID type and UE-ID fields are transmitted over an HS-SCCH.

[00119] 58. The UE as in any one of embodiments 53-57, wherein the MAC-hs entity extracts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

[00120] 59. The UE as in any one of embodiments 53-58, wherein the MAC-hs entity uses a distinct H-RNTI to identify a logical channel type and identity.

[00121] 60. The UE as in any one of embodiments 53-59, wherein the MAC-hs entity uses a distinct H-RNTI to identify a logical channel type, and extracts a TCTF to identify a common logical channel type and a C/T Mux field to identify a dedicated logical channel identity.

[00122] 61. The UE as in any one of embodiments 53-60, wherein the MAC-c/sh/m entity identifies a logical channel type for the common logical channel using information included in a MAC-c/sh/m PDU header.

[00123] 62. The UE as in any one of embodiments 53-61, wherein at least one of logical channel type and identity is identified by a queue ID field of a MAC-hs PDU header.

[00124] 63. The UE as in any one of embodiments 53-62, wherein the MAC-hs PDU includes multiple pairs of queue ID and TSNs.

[00125] 64. The UE as in any one of embodiments 53-63, wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.

[00126] 65. The UE of embodiment 64, wherein one TSN is included for each of the logical channel identities in the MAC-hs header.

[00127] 66. The UE as in any one of embodiments 53-65, wherein a distinct TSN is used for each UE.

[00128] 67. A method for transmitting common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.

[00129] 68. The method of embodiment 67 comprising generating a MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU for a common logical channel SDU and a MAC-d PDU for a dedicated logical channel SDU.

[00130] 69. The method of embodiment 68 comprising transmitting the MAC-hs PDU via an HS-DSCH, wherein a UE-specific H-RNTI is used for identifying a UE to which the MAC-d PDU is destined, and using a cell-specific H-RNTI for identifying a UE to which the MAC-c/sh/m PDU is destined.

[00131] 70. The method as in any one of embodiments 68-69, wherein at least one of a logical channel type and a logical channel identity is inserted in a MAC-hs PDU header.

[00132] 71. The method as in any one of embodiments 68-70, wherein multiple logical channels are multiplexed into one MAC-hs PDU and multiple logical channel types and identities are inserted in the MAC-hs PDU header.

[00133] 72. The method of embodiment 71 wherein a distinct H-RNTI is used to identify a logical channel type and identity.

[00134] 73. The method of embodiment 71 wherein a distinct H-RNTI is used to partially identify a logical channel type, and a TCTF and a C/T Mux field are used to specifically identify a logical channel type and identity.

[00135] 74. The method as in any one of embodiments 68-73, wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.

[00136] 75. The method as in any one of embodiments 68-73, wherein at least one of logical channel type and identity is identified by a queue ID field of a MAC-hs PDU header.

[00137] 76. The method as in any one of embodiments 68-75, wherein one TSN is included for each of the logical channel identities in the MAC-hs header.

[00138] 77. The method as in any one of embodiments 68-76, wherein the MAC-hs PDU includes multiple pairs of queue ID and TSN.

[00139] 78. The method as in any one of embodiments 68-77, wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.

[00140] 79. The method of embodiment 78 wherein one TSN is included for each of the logical channel identities in the MAC-hs header.

[00141] 80. A method for transmitting common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.

[00142] 81. The method of embodiment 80 comprising generating a MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU for a common logical channel SDU and a MAC-d PDU for a dedicated logical channel SDU.

[00143] 82. The method of embodiment 81 comprising transmitting the MAC-hs PDU via an HS-DSCH, wherein a cell-specific H-RNTI and one of a C-RNTI and a U-RNTI are used for identifying a UE to which the MAC-hs PDU is destined when the UE is in a Cell_FACH state.

[00144] 83. The method as in any one of embodiments 81-82, wherein one of a cell-specific H-RNTI and a unique H-RNTI is used when the UE is in Cell_PCH and URA_PCH states.

[00145] 84. The method as in any one of embodiments 81-83, wherein a UE-ID Type and UE-ID fields are inserted into a MAC-hs PDU header.

[00146] 85. The method as in any one of embodiments 81-83, wherein UE-ID type and UE-ID fields are transmitted via an HS-SCCH.

[00147] 86. The method as in any one of embodiments 81-85, wherein at least one of a logical channel type and a logical channel identity is inserted in a MAC-hs PDU header.

- [00148] 87. The method as in any one of embodiments 81-86, wherein a distinct H-RNTI is used to identify a logical channel type and identity.
- [00149] 88. The method as in any one of embodiments 81-87, wherein a distinct H-RNTI is used to partially identify a logical channel type, and a TCTF and a C/T Mux field are used to identify a logical channel type and identity.
- [00150] 89. The method as in any one of embodiments 81-88, wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.
- [00151] 90. The method as in any one of embodiments 81-89, wherein at least one of logical channel type and identity is identified by a queue ID field of a MAC-hs PDU header.
- [00152] 91. The method as in any one of embodiments 81-90, wherein a distinct TSN is used for each UE.
- [00153] 92. The method as in any one of embodiments 81-91, wherein the MAC-hs PDU includes multiple pairs of queue ID and TSN.
- [00154] 93. The method as in any one of embodiments 81-92, wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.
- [00155] 94. The method of embodiment 93 wherein one TSN is included for each of the logical channel identities in the MAC-hs header.
- [00156] 95. A method for receiving at least one of common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.
- [00157] 96. The method of embodiment 95 comprising receiving a MAC-hs PDU via an HS-DSCH, the MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU and a MAC-d PDU.
- [00158] 97. The method of embodiment 96 comprising detecting whether the MAC-d PDU is destined to the UE using a UE-specific H-RNTI and whether the MAC-c/sh/m PDU is destined to the UE using a cell-specific H-RNTI.
- [00159] 98. The method of embodiment 97 further comprising disassembling the MAC-hs PDU into the group of reordering SDUs that belong to the same reordering queue.

- [00160] 99. The method of embodiment 98 further comprising distributing the group of reordering SDUs to reordering queues for reordering.
- [00161] 100. The method of embodiment 99 further comprising disassembling concatenated group of reordering SDUs into complete MAC-hs SDUs or MAC-hs SDU segments after reordering is performed.
- [00162] 101. The method of embodiment 100 further comprising reassembling the MAC-hs SDU segments into complete MAC-hs SDUs.
- [00163] 102. The method of embodiment 101 further comprising demultiplexing the complete MAC-hs SDUs based on logical channel identifiers in MAC-hs headers.
- [00164] 103. The method as in any one of embodiments 96-102, wherein at least one of a logical channel type and a logical channel identity is extracted using information in a MAC-hs PDU header.
- [00165] 104. The method as in any one of embodiments 96-103, wherein a logical channel type and identity are detected using a distinct H-RNTI.
- [00166] 105. The method as in any one of embodiments 96-104, wherein a logical channel type and identity is detected using both an H-RNTI and information included in a MAC-hs PDU header.
- [00167] 106. The method as in any one of embodiments 96-105, wherein a logical channel type for the common logical channel is identified using information included in a MAC-c/sh/m PDU header.
- [00168] 107. The method as in any one of embodiments 96-106, wherein at least one of logical channel type and identity is identified using a queue ID field in a MAC-hs PDU header.
- [00169] 108. A method for receiving common logical channel transmission and dedicated logical channel transmission via an HS-DSCH.
- [00170] 109. The method of embodiment 108 comprising receiving a MAC-hs PDU via an HS-DSCH, the MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU and a MAC-d PDU.

[00171] 110. The method of embodiment 109 comprising detecting whether the MAC-hs PDU is destined to the UE using a cell-specific H-RNTI and one of a C-RNTI and a U-RNTI when the UE is in a Cell_FACH state.

[00172] 111. The method of embodiment 110 further comprising disassembling the MAC-hs PDU into a group of reordering SDUs that belong to the same reordering queue.

[00173] 112. The method of embodiment 111 further comprising distributing the group of reordering SDUs to the reordering queues for reordering.

[00174] 113. The method of embodiment 112 further comprising disassembling concatenated group of reordering SDUs into complete MAC-hs SDUs or MAC-hs SDU segments after reordering is performed.

[00175] 114. The method of embodiment 113 further comprising reassembling the MAC-hs SDU segments into complete MAC-hs SDUs.

[00176] 115. The method of embodiment 114 further comprising demultiplexing the complete MAC-hs SDUs based on logical channel identifiers in the MAC-hs headers.

[00177] 116. The method as in any one of embodiments 110-115, wherein one of a cell-specific H-RNTI and a unique H-RNTI is used when the UE is in Cell_PCH and URA_PCH states.

[00178] 117. The method as in any one of embodiments 110-116, wherein UE-ID Type and UE-ID fields are extracted in a MAC-hs PDU header to determine whether the MAC-hs PDU is destined to the UE.

[00179] 118. The method as in any one of embodiments 110-116, wherein UE-ID type and UE-ID fields are transmitted over an HS-SCCH.

[00180] 119. The method as in any one of embodiments 110-118, wherein at least one of a logical channel type and a logical channel identity is extracted in a MAC-hs PDU header.

[00181] 120. The method as in any one of embodiments 110-119, wherein a distinct H-RNTI is used to identify a logical channel type and identity.

[00182] 121. The method as in any one of embodiments 110-120, wherein a distinct H-RNTI is used to partially identify a logical channel type, and a TCTF and a C/T Mux field are used specifically to identify a logical channel identity.

[00183] 122. The method as in any one of embodiments 110-121, wherein a logical channel type for the common logical channel is identified using information included in a MAC-c/sh/m PDU header.

[00184] 123. The method as in any one of embodiments 110-122, wherein at least one of logical channel type and identity is identified by a queue ID field of a MAC-hs PDU header.

[00185] Although the features and elements are described in embodiments in particular combinations, each feature or element may be used alone without the other features and elements or in various combinations with or without other features and elements. The methods or flow charts provided may be implemented in a computer program, software, or firmware tangibly embodied in a computer-readable storage medium for execution by a general purpose computer or a processor. Examples of computer-readable storage mediums include a read only memory (ROM), a random access memory (RAM), a register, cache memory, semiconductor memory devices, magnetic media such as internal hard disks and removable disks, magneto-optical media, and optical media such as CD-ROM disks, and digital versatile disks (DVDs).

[00186] Suitable processors include, by way of example, a general purpose processor, a special purpose processor, a conventional processor, a digital signal processor (DSP), a plurality of microprocessors, one or more microprocessors in association with a DSP core, a controller, a microcontroller, Application Specific Integrated Circuits (ASICs), Field Programmable Gate Arrays (FPGAs) circuits, any other type of integrated circuit (IC), and/or a state machine.

[00187] A processor in association with software may be used to implement a radio frequency transceiver for use in a wireless transmit receive unit (WTRU), user equipment (UE), terminal, base station, radio network controller (RNC), or any host computer. The UE may be used in conjunction with modules, implemented in hardware and/or software, such as a camera, a video camera

module, a videophone, a speakerphone, a vibration device, a speaker, a microphone, a television transceiver, a hands free headset, a keyboard, a Bluetooth® module, a frequency modulated (FM) radio unit, a liquid crystal display (LCD) display unit, an organic light-emitting diode (OLED) display unit, a digital music player, a media player, a video game player module, an Internet browser, and/or any wireless local area network (WLAN) module.

* * *

CLAIMS

What is claimed is:

1. A Node-B for transmitting common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the Node-B comprising:

a medium access control (MAC)-hs entity for generating a MAC-hs protocol data unit (PDU) carrying at least one of a MAC-c/sh/m PDU for a common logical channel service data unit (SDU) and a MAC-d PDU for a dedicated logical channel SDU and transmitting the MAC-hs PDU to a user equipment (UE) via an HS-DSCH, the MAC-hs entity using a UE-specific HS-DSCH radio network temporary identifier (H-RNTI) for identifying a UE to which the MAC-d PDU is destined, and using a cell-specific H-RNTI for identifying a UE to which the MAC-c/sh/b PDU is destined; and

a physical layer for transmitting the MAC-hs PDU.

2. The Node-B of claim 1 wherein the MAC-hs entity inserts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

3. The Node-B of claim 2 wherein multiple logical channels are multiplexed into one MAC-hs PDU and multiple logical channel types and identities are inserted in the MAC-hs PDU header.

4. The Node-B of claim 1 wherein a logical channel type is implicitly indicated to be a paging control channel (PCCH) when the UE is in one of Cell_PCH and URA_PCH states.

5. The Node-B of claim 1 wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and identity.

6. The Node-B of claim 1 wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and inserts a logical channel identity field in a MAC-hs PDU header to indicate a logical channel identity.

7. The Node-B of claim 1 wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.

8. The Node-B of claim 1 wherein at least one of logical channel type and identity is identified by a queue identity (ID) field of a MAC-hs PDU header.

9. The Node-B of claim 8 wherein a group of logical channel types is indicated by the queue ID and a target channel type field (TCTF) in a MAC-c/sh/m PDU header indicates a logical channel type of the grouped logical channel types.

10. The Node-B of claim 8 wherein a logical channel identity for dedicated logical channel is identified by a C/T Mux field.

11. The Node-B of claim 8 wherein the MAC-hs PDU includes multiple pairs of queue identity (ID) and transmission sequence number (TSN).

12. The Node-B of claim 1 wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.

13. The Node-B of claim 12 wherein one transmission sequence number (TSN) is included for each of the logical channel identities in the MAC-hs header.

14. A Node-B for transmitting common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the Node-B comprising:

a medium access control (MAC)-hs entity for generating a MAC-hs protocol data unit (PDU) carrying at least one of a MAC-c/sh/m PDU for a common logical channel service data unit (SDU) and a MAC-d PDU for a dedicated logical channel SDU and transmitting the MAC-hs PDU to a user equipment (UE) via an HS-DSCH, the MAC-hs entity using a cell-specific HS-DSCH radio network temporary identity (H-RNTI) and one of a cell RNTI (C-RNTI) and a universal terrestrial radio access network RNTI (U-RNTI) when the UE is in a Cell_FACH state; and

a physical layer for transmitting the MAC-hs PDU.

15. The Node-B of claim 14 wherein the MAC-hs entity uses one of a cell-specific H-RNTI and a unique H-RNTI when the UE is in Cell_PCH and URA_PCH states.

16. The Node-B of claim 14 wherein the MAC-hs entity inserts a UE-ID Type and UE-ID fields into a MAC-hs PDU header.

17. The Node-B of claim 14 wherein a high speed shared control channel (HS-SCCH) transmission incorporates a UE-ID type and UE-ID fields.

18. The Node-B of claim 14 wherein the MAC-hs entity inserts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

19. The Node-B of claim 14 wherein a logical channel type is implicitly indicated to be a paging control channel (PCCH) when the UE is in one of Cell_PCH and URA_PCH states.

20. The Node-B of claim 14 wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and identity.

21. The Node-B of claim 14 wherein the MAC-hs entity selects a distinct H-RNTI to identify a logical channel type and inserts a logical channel identity field in a MAC-hs PDU header to indicate a logical channel identity.

22. The Node-B of claim 14 wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.

23. The Node-B of claim 14 wherein at least one of logical channel type and identity is identified by a queue identity (ID) field of a MAC-hs PDU header.

24. The Node-B of claim 23 wherein a group of logical channel types is indicated by the queue ID and a target channel type field (TCTF) in a MAC-c/sh/m PDU header indicates a logical channel type of the grouped logical channel types.

25. The Node-B of claim 24 wherein a logical channel identity for dedicated logical channel is identified by a C/T Mux field.

26. The Node-B of claim 24 wherein the MAC-hs PDU includes multiple pairs of queue identity (ID) and transmission sequence numbers (TSNs).

27. The Node-B of claim 14 wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.

28. The Node-B of claim 27 wherein one transmission sequence number (TSN) is included for each of the logical channel identities in the MAC-hs header.

29. The Node-B of claim 14 wherein a distinct transmission sequence number (TSN) is used for each UE.

30. A user equipment (UE) for receiving common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the UE comprising:

a medium access control (MAC)-d entity for processing a MAC-d protocol data unit (PDU) for a dedicated logical channel transmission;

a MAC-c/sh/m entity for processing a MAC-c/sh/m PDU for a common logical channel transmission; and

a MAC-hs entity for processing a MAC-hs PDU transmitted over an HS-DSCH, the MAC-hs PDU carrying at least one of the MAC-c/sh/m PDU and the MAC-d PDU, the MAC-hs entity using a UE-specific HS-DSCH radio network temporary identifier (H-RNTI) for determining that the MAC-d PDU is destined to the UE and using a cell-specific H-RNTI for determined that the MAC-c/sh/m PDU is destined to the UE.

31. The UE of claim 30 wherein the MAC-hs entity extracts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

32. The UE of claim 30 wherein the MAC-hs entity identifies a logical channel type and identity using a distinct H-RNTI.

33. The UE of claim 30 wherein the MAC-hs entity identifies a logical channel type and identity using both an H-RNTI and logical channel information included in a MAC-hs PDU header.

34. The UE of claim 30 wherein the MAC-c/sh/m entity identifies a logical channel type for the common logical channel using information included in a MAC-c/sh/m PDU header.

35. The UE of claim 30 wherein the MAC-hs entity identifies at least one of logical channel type and identity using a queue identity (ID) field in a MAC-hs PDU header.

36. The UE of claim 30 wherein the MAC-hs PDU includes multiple pairs of queue identity (ID) and transmission sequence numbers (TSNs).

37. The UE of claim 30 wherein the MAC-hs PDU includes multiple pairs of logical channel identity and transmission sequence number (TSN).

38. The UE of claim 30 wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in a MAC-hs PDU header.

39. The UE of claim 38 wherein one transmission sequence number (TSN) is included for each of the logical channel identities in the MAC-hs PDU header.

40. A user equipment (UE) for receiving common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the UE comprising:

a medium access control (MAC)-d entity for processing a MAC-d protocol data unit (PDU) for a dedicated logical channel transmission;

a MAC-c/sh/m entity for processing a MAC-c/sh/m PDU for a common logical channel transmission; and

a MAC-hs entity for processing a MAC-hs PDU transmitted over an HS-DSCH, the MAC-hs PDU carrying at least one of the MAC-c/sh/m PDU and the MAC-d PDU, wherein a cell-specific HS-DSCH radio network temporary identity (H-RNTI) and one of a cell RNTI (C-RNTI) and a universal terrestrial radio

access network RNTI (U-RNTI) are used to determine whether the MAC-hs PDU is destined to the UE when the UE is in a Cell_FACH state.

41. The UE of claim 40 wherein the MAC-hs entity uses one of a cell-specific H-RNTI and a unique H-RNTI when the UE is in Cell_PCH and URA_PCH states.

42. The UE of claim 40 wherein the MAC-hs entity extracts a UE-ID Type and UE-ID fields in a MAC-hs PDU header to determine whether the MAC-hs PDU is destined to the UE.

43. The UE of claim 40 wherein a UE-ID type and UE-ID fields are transmitted over a high speed shared control channel (HS-SCCH).

44. The UE of claim 40 wherein the MAC-hs entity extracts at least one of a logical channel type and a logical channel identity in a MAC-hs PDU header.

45. The UE of claim 40 wherein the MAC-hs entity uses a distinct H-RNTI to identify a logical channel type and identity.

46. The UE of claim 40 wherein the MAC-hs entity uses a distinct H-RNTI to identify a logical channel type, and extracts a target channel type field (TCTF) to identify a common logical channel type and a C/T Mux field to identify a dedicated logical channel identity.

47. The UE of claim 40 wherein the MAC-c/sh/m entity identifies a logical channel type for the common logical channel using information included in a MAC-c/sh/m PDU header.

48. The UE of claim 40 wherein at least one of logical channel type and identity is identified by a queue identity (ID) field of a MAC-hs PDU header.

49. The UE of claim 40 wherein the MAC-hs PDU includes multiple pairs of queue identity (ID) and transmission sequence numbers (TSNs).

50. The UE of claim 40 wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in a MAC-hs header.

51. The UE of claim 50 wherein one transmission sequence number (TSN) is included for each of the logical channel identities in the MAC-hs header.

52. The UE of claim 40 wherein a distinct transmission sequence number (TSN) is used for each UE.

53. A method for transmitting common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the method comprising:

generating a medium access control (MAC)-hs protocol data unit (PDU) carrying at least one of a MAC-c/sh/m PDU for a common logical channel service data unit (SDU) and a MAC-d PDU for a dedicated logical channel SDU; and

transmitting the MAC-hs PDU via an HS-DSCH, wherein a user equipment (UE)-specific HS-DSCH radio network temporary identifier (H-RNTI) is used for identifying a UE to which the MAC-d PDU is destined, and using a cell-specific H-RNTI for identifying a UE to which the MAC-c/sh/m PDU is destined.

54. The method of claim 53 wherein at least one of a logical channel type and a logical channel identity is inserted in a MAC-hs PDU header.

55. The method of claim 54 wherein multiple logical channels are multiplexed into one MAC-hs PDU and multiple logical channel types and identities are inserted in the MAC-hs PDU header.

56. The method of claim 53 wherein a distinct H-RNTI is used to identify a logical channel type and identity.

57. The method of claim 53 wherein a distinct H-RNTI is used to partially identify a logical channel type, and a target channel type field (TCTF) and a C/T Mux field are used to specifically identify a logical channel type and identity.

58. The method of claim 53 wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.

59. The method of claim 53 wherein at least one of logical channel type and identity is identified by a queue identity (ID) field of a MAC-hs PDU header.

60. The method of claim 53 wherein one transmission sequence number (TSN) is included for each of the logical channel identities in the MAC-hs header.

61. The method of claim 53 wherein the MAC-hs PDU includes multiple pairs of queue identity (ID) and transmission sequence number (TSN).

62. The method of claim 53 wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.

63. The method of claim 62 wherein one transmission sequence number (TSN) is included for each of the logical channel identities in the MAC-hs header.

64. A method for transmitting common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the method comprising:

generating a medium access control (MAC)-hs protocol data unit (PDU) carrying at least one of a MAC-c/sh/m PDU for a common logical channel service data unit (SDU) and a MAC-d PDU for a dedicated logical channel SDU; and

transmitting the MAC-hs PDU via an HS-DSCH, wherein a cell-specific HS-DSCH radio network temporary identity (H-RNTI) and one of a cell RNTI (C-RNTI) and a universal terrestrial radio access network RNTI (U-RNTI) are used for identifying a UE to which the MAC-hs PDU is destined when the UE is in a Cell_FACH state.

65. The method of claim 64 wherein one of a cell-specific H-RNTI and a unique H-RNTI is used when the UE is in Cell_PCH and URA_PCH states.

66. The method of claim 64 wherein a UE-ID Type and UE-ID fields are inserted into a MAC-hs PDU header.

67. The method of claim 64 wherein UE-ID type and UE-ID fields are transmitted via a high speed shared control channel (HS-SCCH).

68. The method of claim 64 wherein at least one of a logical channel type and a logical channel identity is inserted in a MAC-hs PDU header.

69. The method of claim 64 wherein a distinct H-RNTI is used to identify a logical channel type and identity.

70. The method of claim 64 wherein a distinct H-RNTI is used to partially identify a logical channel type, and a target channel type field (TCTF) and a C/T Mux field are used to identify a logical channel type and identity.

71. The method of claim 64 wherein a logical channel type for the common logical channel is identified in a MAC-c/sh/m PDU header.

72. The method of claim 64 wherein at least one of logical channel type and identity is identified by a queue identity (ID) field of a MAC-hs PDU header.

73. The method of claim 64 wherein a distinct transmission sequence number (TSN) is used for each UE.

74. The method of claim 64 wherein the MAC-hs PDU includes multiple pairs of queue identity (ID) and transmission sequence number (TSN).

75. The method of claim 64 wherein multiple logical channels are multiplexed into the MAC-hs PDU and multiple logical channel identities are included in the MAC-hs header.

76. The method of claim 75 wherein one transmission sequence number (TSN) is included for each of the logical channel identities in the MAC-hs header.

77. A method for receiving at least one of common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the method comprising:

receiving a medium access control (MAC)-hs protocol data unit (PDU) via an HS-DSCH, the MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU and a MAC-d PDU; and

detecting whether the MAC-d PDU is destined to the UE using a UE-specific HS-DSCH radio network temporary identifier (H-RNTI) and whether the MAC-c/sh/m PDU is destined to the UE using a cell-specific H-RNTI.

78. The method of claim 77 further comprising:

disassembling the MAC-hs PDU into the group of reordering SDUs that belong to the same reordering queue.

79. The method of claim 78 further comprising:
distributing the group of reordering SDUs to reordering queues for reordering.

80. The method of claim 79 further comprising:
disassembling concatenated group of reordering SDUs into complete MAC-hs SDUs or MAC-hs SDU segments after reordering is performed.

81. The method of claim 80 further comprising:
reassembling the MAC-hs SDU segments into complete MAC-hs SDUs.

82. The method of claim 81 further comprising:
demultiplexing the complete MAC-hs SDUs based on logical channel identifiers in MAC-hs headers.

83. The method of claim 77 wherein at least one of a logical channel type and a logical channel identity is extracted using information in a MAC-hs PDU header.

84. The method of claim 77 wherein a logical channel type and identity are detected using a distinct H-RNTI.

85. The method of claim 77 wherein a logical channel type and identity is detected using both an H-RNTI and information included in a MAC-hs PDU header.

86. The method of claim 77 wherein a logical channel type for the common logical channel is identified using information included in a MAC-c/sh/m PDU header.

87. The method of claim 77 wherein at least one of logical channel type and identity is identified using a queue identity (ID) field in a MAC-hs PDU header.

88. A method for receiving common logical channel transmission and dedicated logical channel transmission via a high speed downlink shared channel (HS-DSCH), the method comprising:

receiving a medium access control (MAC)-hs protocol data unit (PDU) via an HS-DSCH, the MAC-hs PDU carrying at least one of a MAC-c/sh/m PDU and a MAC-d PDU; and

detecting whether the MAC-hs PDU is destined to the UE using a cell-specific HS-DSCH radio network temporary identity (H-RNTI) and one of a cell RNTI (C-RNTI) and a universal terrestrial radio access network RNTI (U-RNTI) when the UE is in a Cell_FACH state.

89. The method of claim 88 further comprising:

disassembling the MAC-hs PDU into a group of reordering SDUs that belong to the same reordering queue.

90. The method of claim 89 further comprising:

distributing the group of reordering SDUs to the reordering queues for reordering.

91. The method of claim 90 further comprising:

disassembling concatenated group of reordering SDUs into complete MAC-hs SDUs or MAC-hs SDU segments after reordering is performed.

92. The method of claim 91 further comprising:
reassembling the MAC-hs SDU segments into complete MAC-hs SDUs.
93. The method of claim 92 further comprising:
demultiplexing the complete MAC-hs SDUs based on logical channel identifiers in the MAC-hs headers.
94. The method of claim 88 wherein one of a cell-specific H-RNTI and a unique H-RNTI is used when the UE is in Cell_PCH and URA_PCH states.
95. The method of claim 88 wherein UE-ID Type and UE-ID fields are extracted in a MAC-hs PDU header to determine whether the MAC-hs PDU is destined to the UE.
96. The method of claim 88 wherein UE-ID type and UE-ID fields are transmitted over a high speed shared control channel (HS-SCCH).
97. The method of claim 88 wherein at least one of a logical channel type and a logical channel identity is extracted in a MAC-hs PDU header.
98. The method of claim 88 wherein a distinct H-RNTI is used to identify a logical channel type and identity.
99. The method of claim 88 wherein a distinct H-RNTI is used to partially identify a logical channel type, and a target channel type field (TCTF) and a C/T Mux field are used specifically to identify a logical channel identity.
100. The method of claim 88 wherein a logical channel type for the common logical channel is identified using information included in a MAC-c/sh/m PDU header.

101. The method of claim 88 wherein at least one of logical channel type and identity is identified by a queue identity (ID) field of a MAC-hs PDU header.

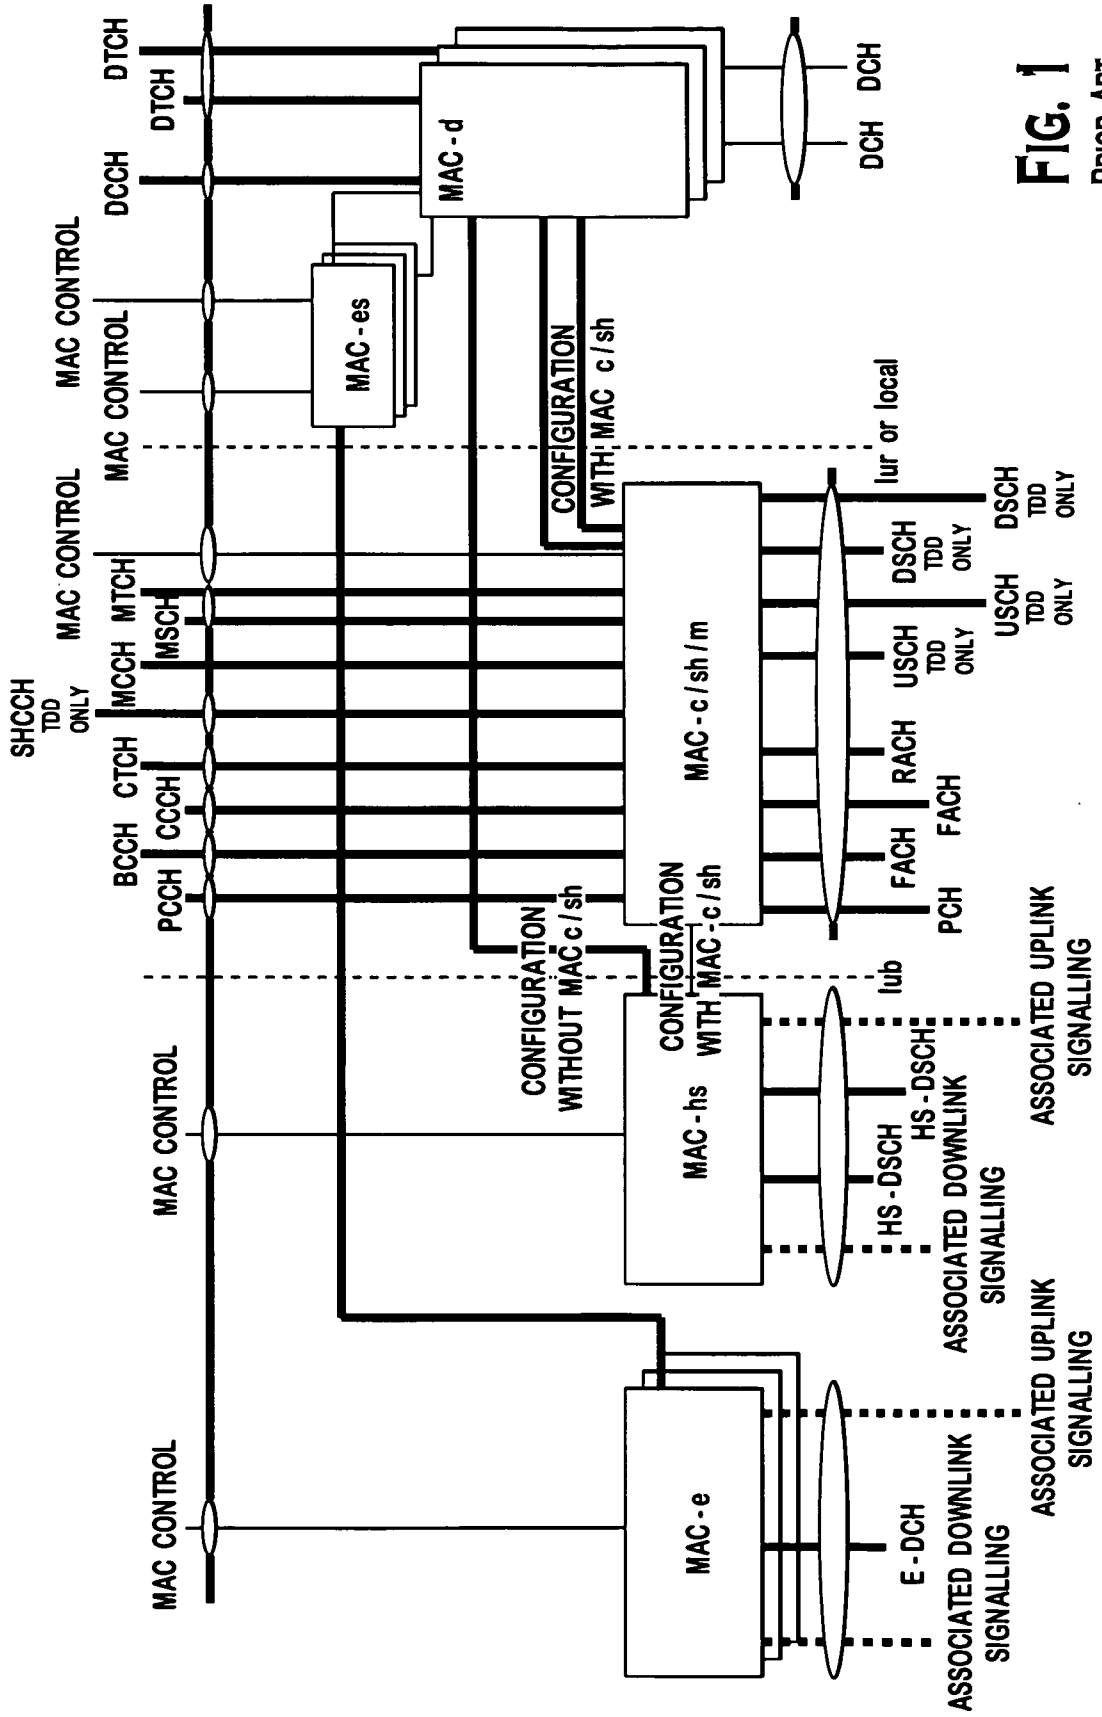


FIG. 1
PRIOR ART

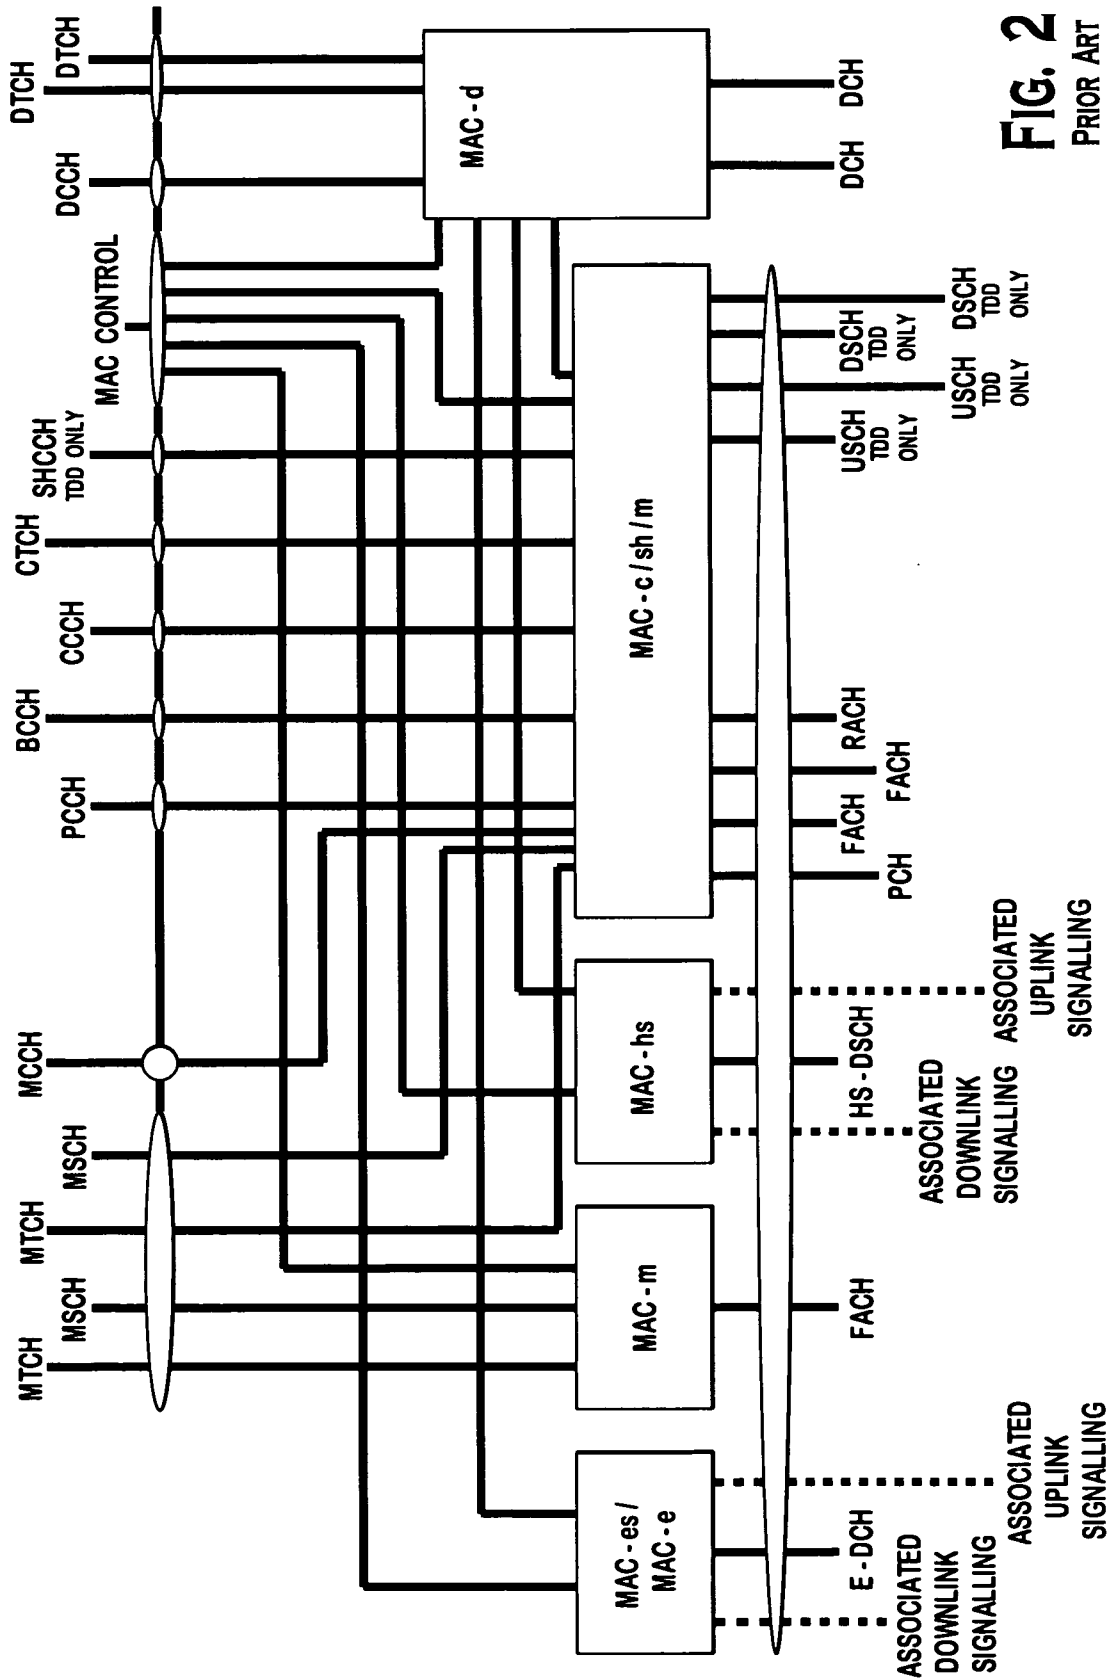


FIG. 2
PRIOR ART

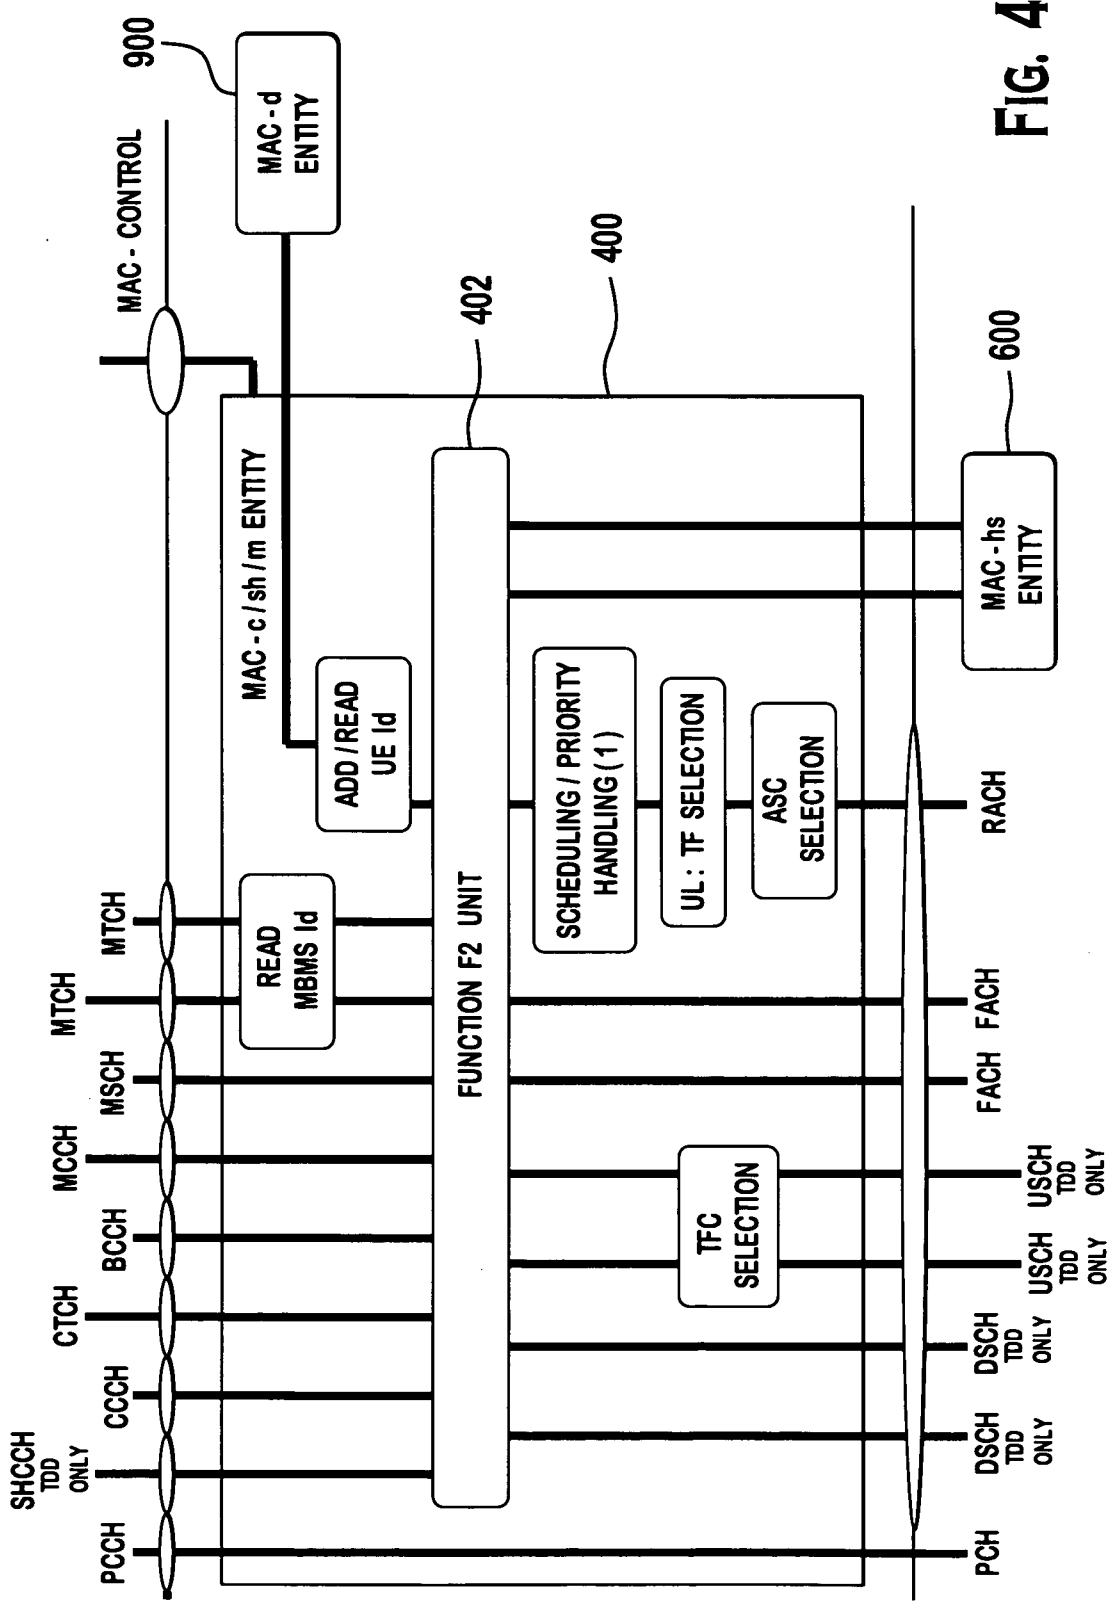


FIG. 4

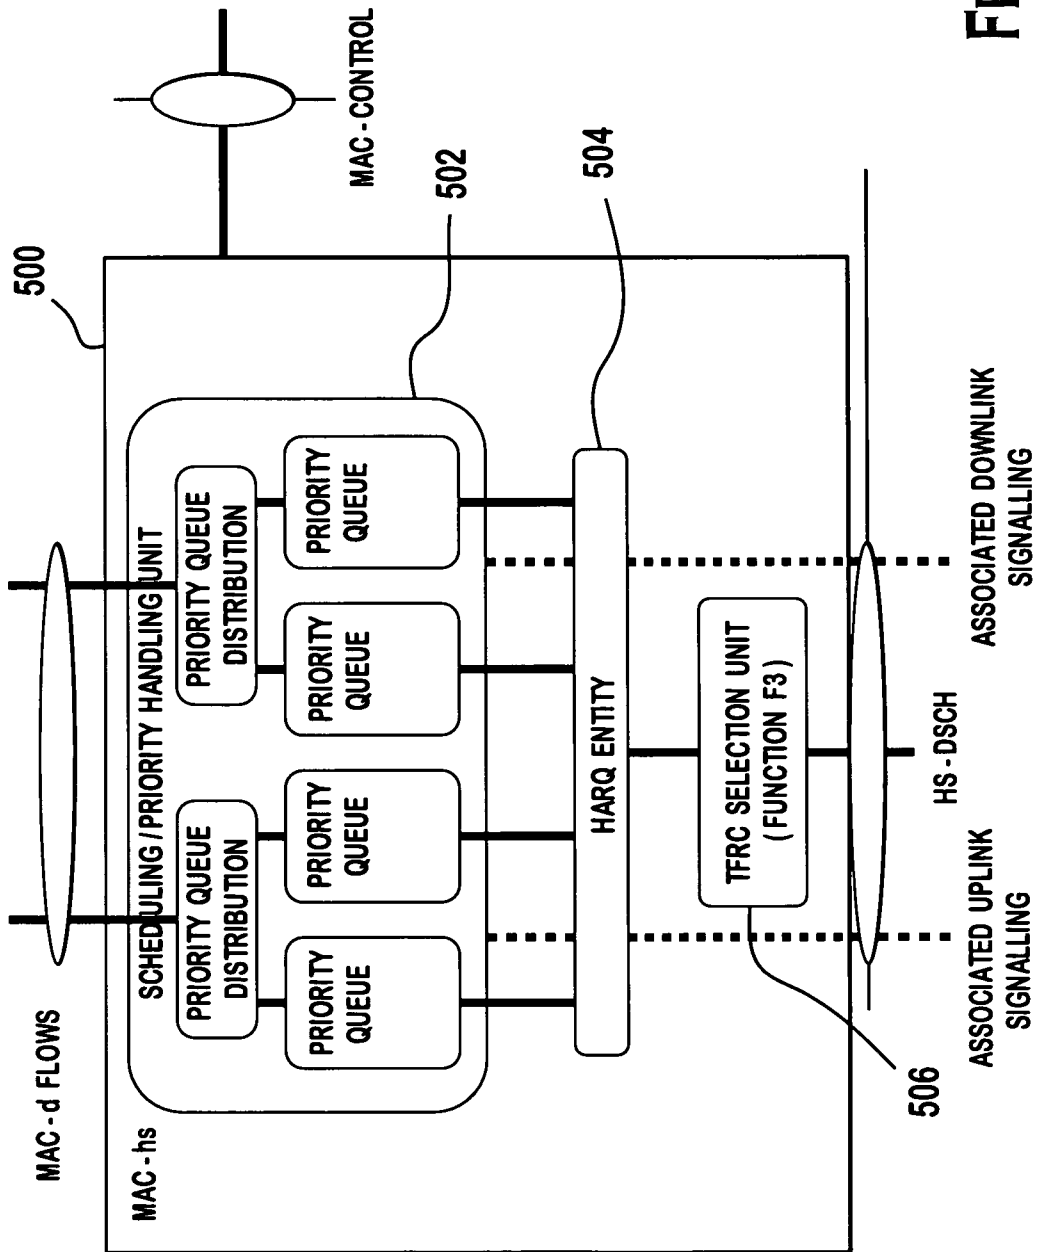


FIG. 5

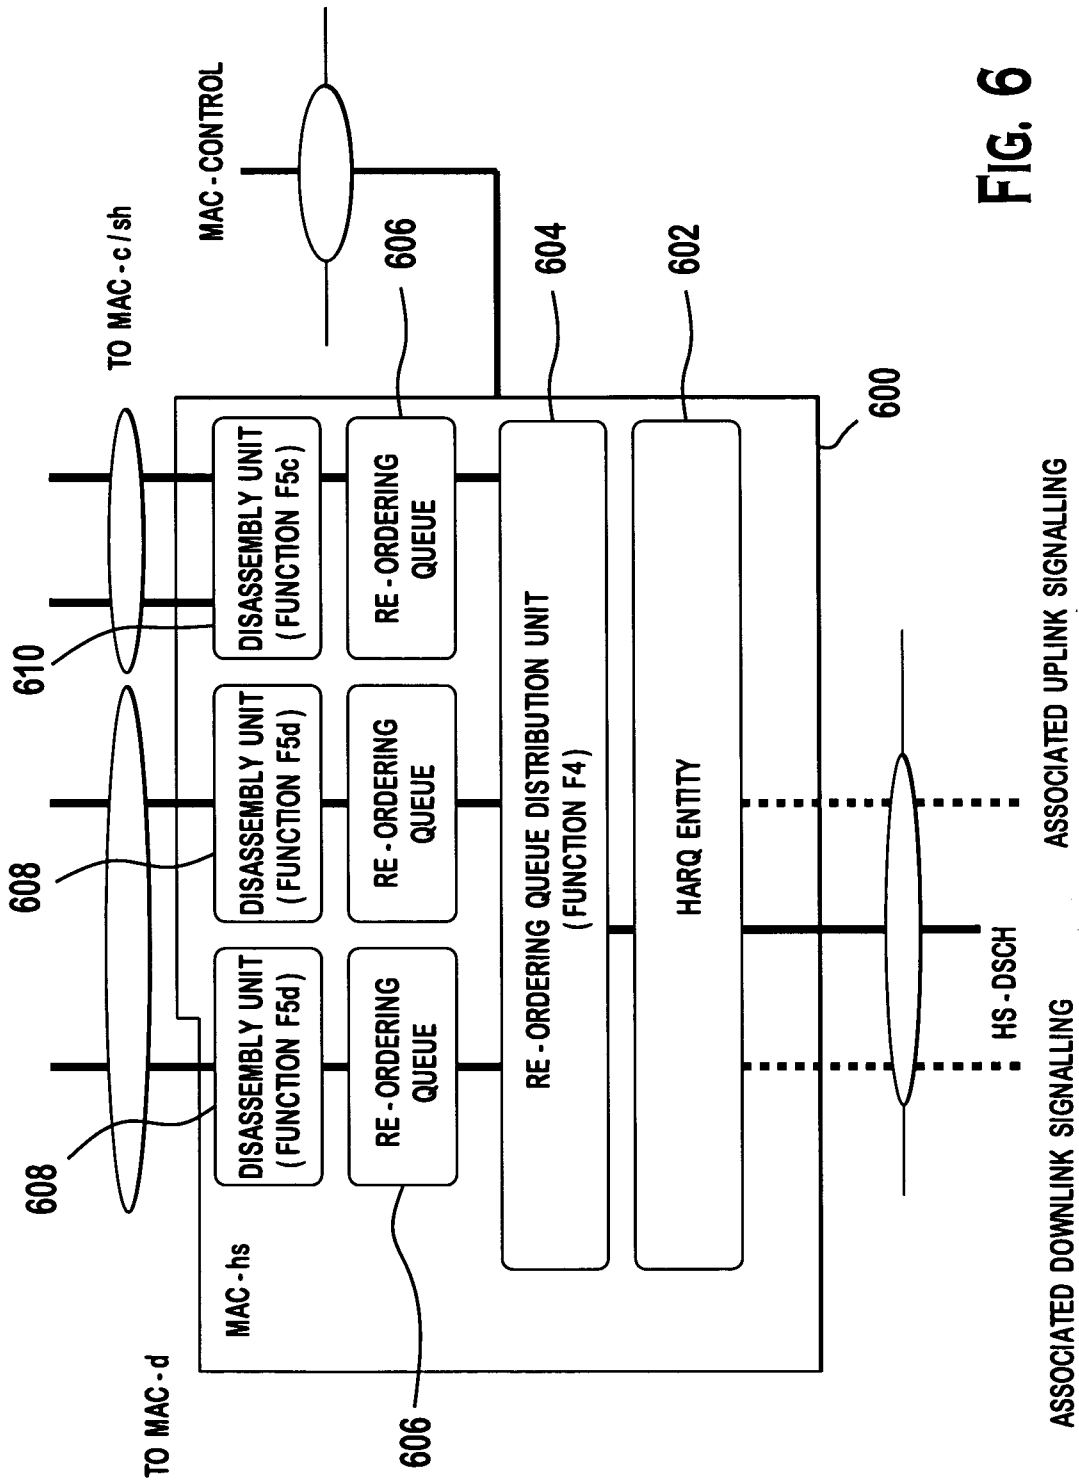


FIG. 6

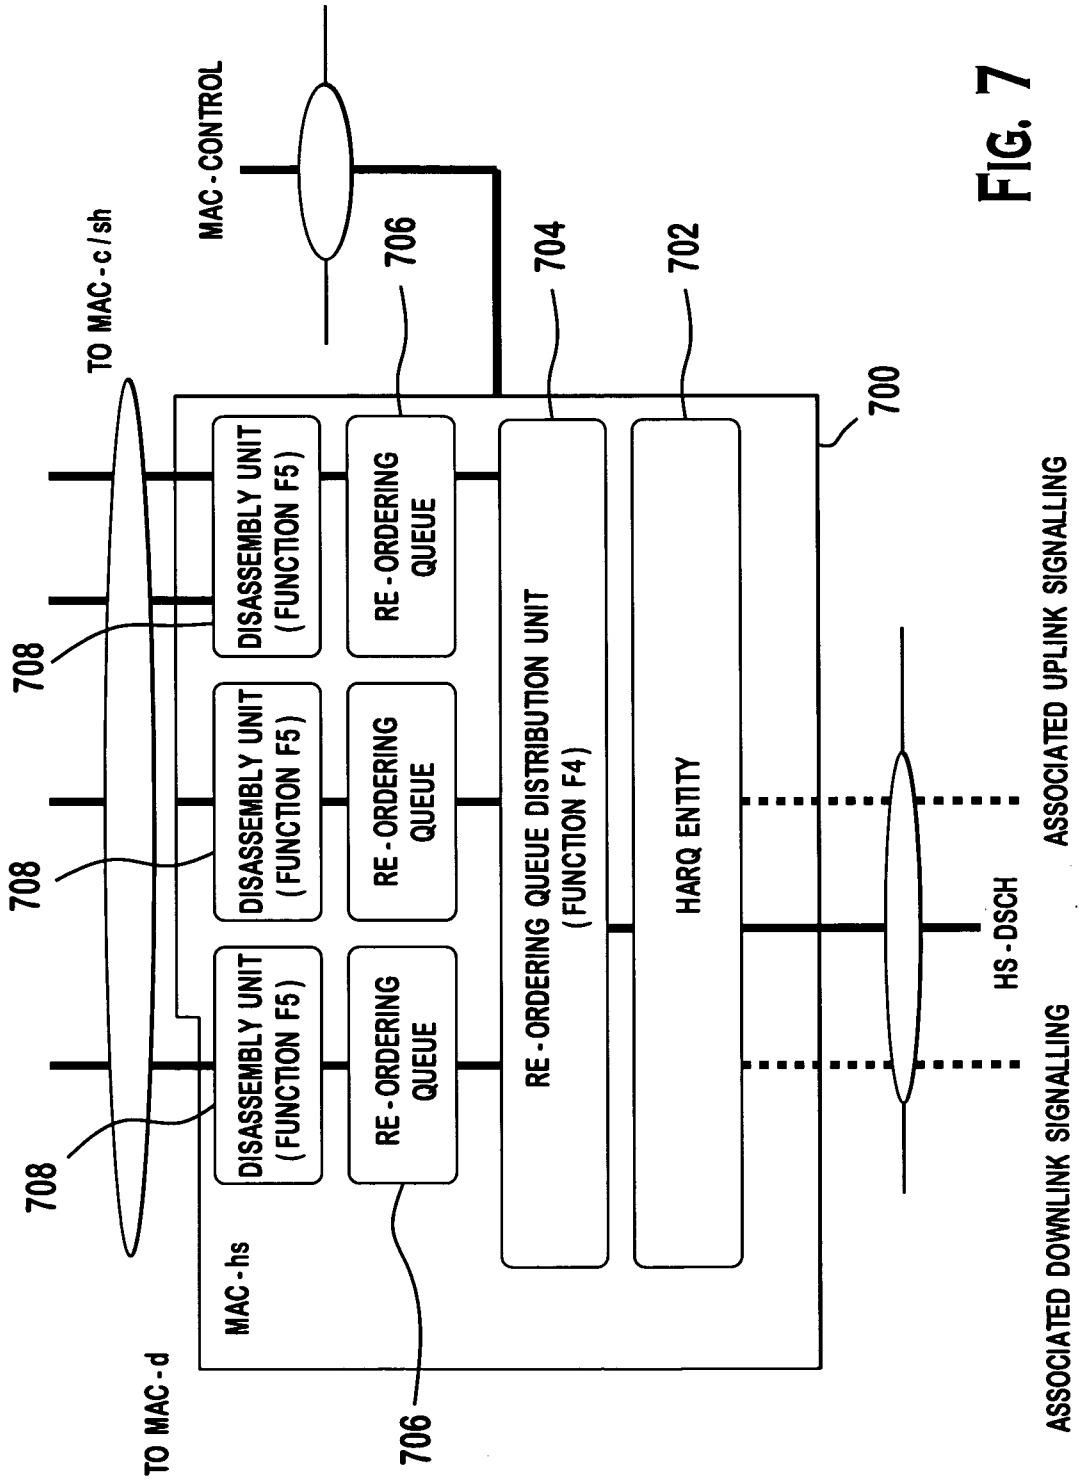


FIG. 7

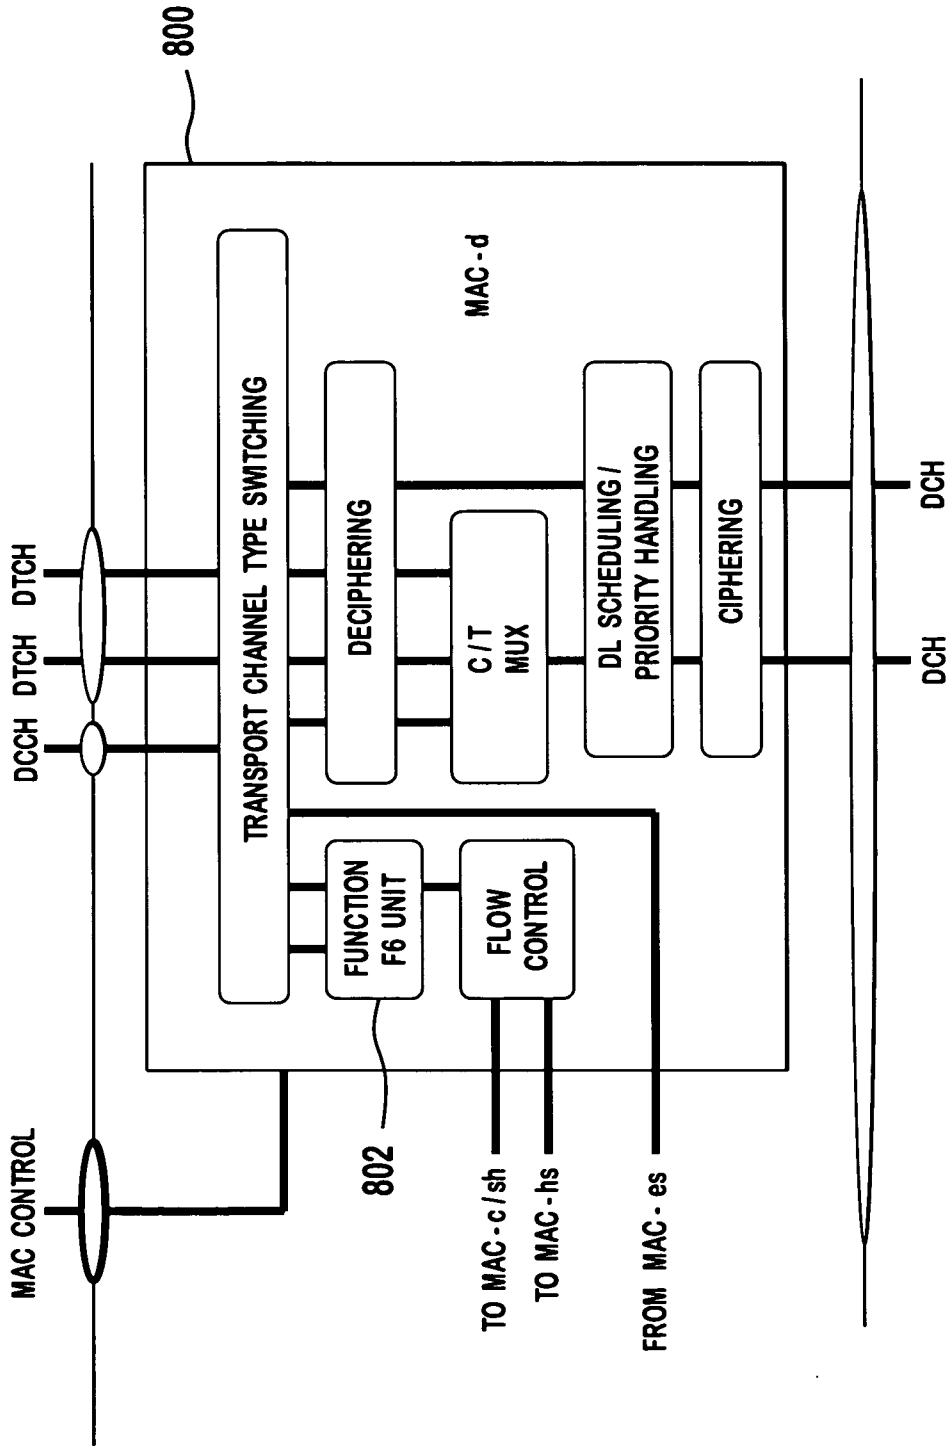


FIG. 8

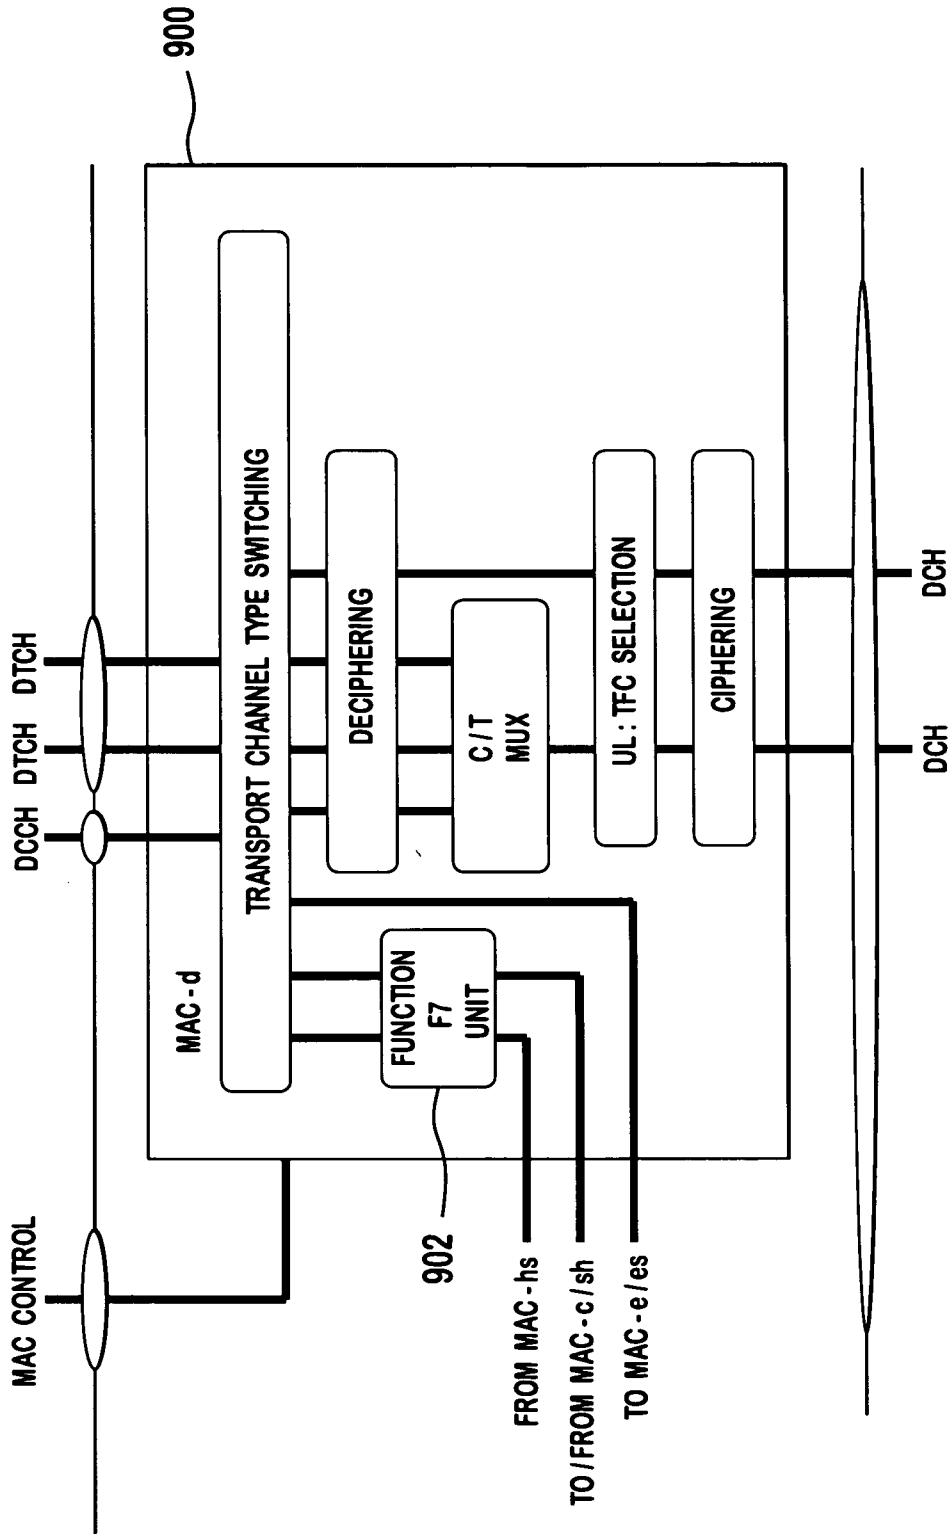


FIG. 9

10/10

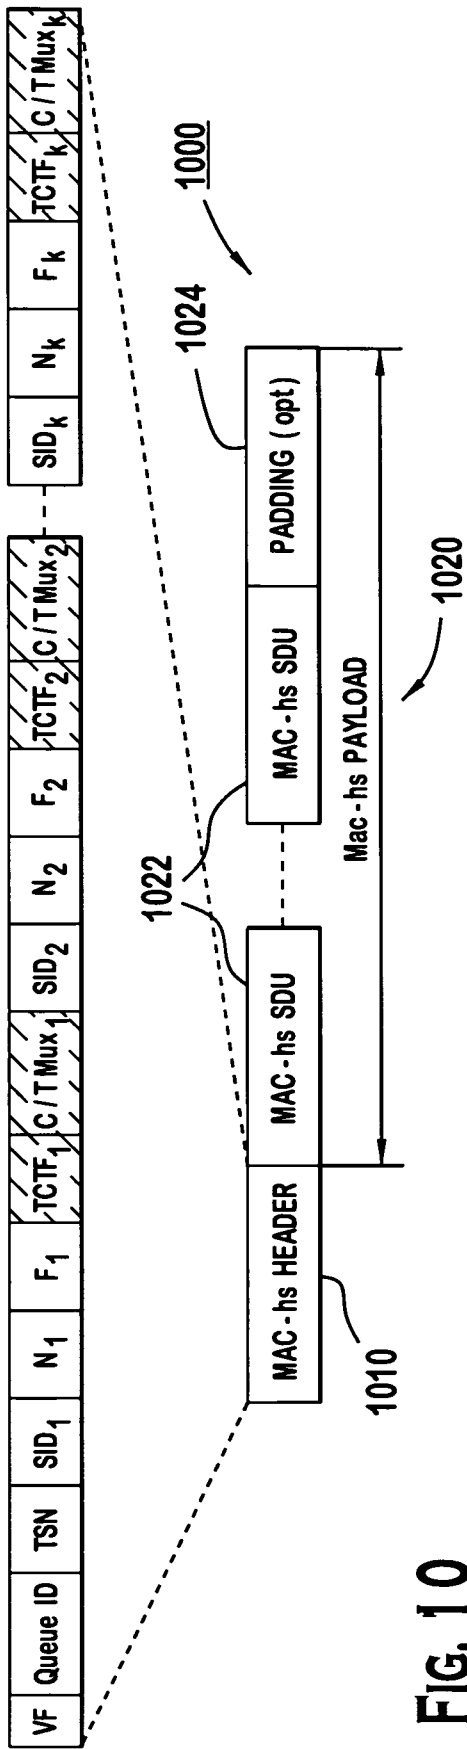


FIG. 10

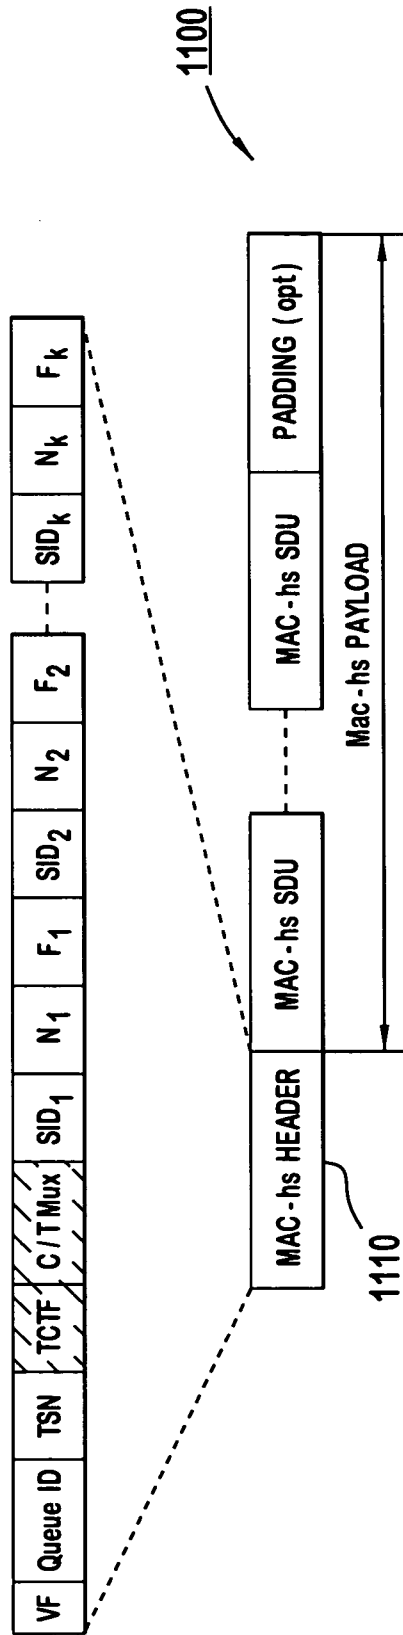


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/026351A. CLASSIFICATION OF SUBJECT MATTER
INV. H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 2008/033072 A (ERICSSON TELEFON AB L M [SE]; BEMING PER [SE]; PEISA JANNE [FI]; SAGFO) 20 March 2008 (2008-03-20) page 5, line 25 - line 29 page 10, line 15 - page 12, line 10 claim 1	1-101
A	WO 2004/028041 A (LG ELECTRONICS INC [KR]) 1 April 2004 (2004-04-01) page 16, line 1 - line 14 page 22, line 3 - line 16	1-101
A	WO 2006/125472 A (ERICSSON TELEFON AB L M [SE]; MEYER MICHAEL [DE]; WIEMANN HENNING [DE]) 30 November 2006 (2006-11-30) claim 1	1-101
	----- -/--	

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

21 May 2008

Date of mailing of the international search report

24/06/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Bernedo Azpiri, P

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/026351

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2006/113829 A (INTERDIGITAL TECH CORP [US]; TERRY STEPHEN E [US]; ZHANG GUODONG [US];) 26 October 2006 (2006-10-26) paragraph [0011]	1-101

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2007/026351

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2008033072	A	20-03-2008	NONE
WO 2004028041	A	01-04-2004	AU 2003264959 A1 08-04-2004 CN 1643820 A 20-07-2005 EP 1540851 A1 15-06-2005 JP 2005535268 T 17-11-2005 JP 2008061263 A 13-03-2008 KR 20040025482 A 24-03-2004 MX PA04006496 A 04-10-2004 RU 2310276 C2 10-11-2007 UA 80100 C2 27-08-2007 US 2004117860 A1 17-06-2004 ZA 200404747 A 26-04-2006
WO 2006125472	A	30-11-2006	EP 1884080 A1 06-02-2008
WO 2006113829	A	26-10-2006	CA 2605498 A1 26-10-2006 EP 1875626 A2 09-01-2008 KR 20070122540 A 31-12-2007 KR 20080016946 A 22-02-2008 US 2006268884 A1 30-11-2006