

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



A standard 1D barcode is located at the bottom of the page, spanning most of the width. It is used for document tracking and identification.

(43) International Publication Date
27 April 2006 (27.04.2006)

PCT

(10) International Publication Number
WO 2006/044411 A1

(51) International Patent Classification:
C10M 133/16 (2006.01) *C10M 163/00* (2006.01)
C10M 129/72 (2006.01)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/US2005/036569

(22) International Filing Date: 11 October 2005 (11.10.2005)

(22) International Filing Date: 11 October 2005 (11.10.2005)

(25) Filing Language: English
(26) Publication Language: English

(30) Priority Data: 10/963,082 12 October 2004 (12.10.2004) US

(71) **Applicant (for all designated States except US): THE LUBRIZOL CORPORATION [US/US]; 29400 Lake-**

(71) **Applicant (for all designated States except US): THE LUBRIZOL CORPORATION [US/US]; 29400 Lake-**

land Blvd., Wickliffe, OH 44092-2298 (US).

(75) **Inventors/Applicants (for US only): KOCSIS, Jody** [US/US]; 29400 Lakeland Blvd., Wickliffe, OH 44092-2298 (US). **VILARDO, Jonathan, S.** [US/US]; 29400 Lakeland Blvd., Wickliffe, OH 44092-2298 (US). **BROWN, Jason, R.** [US/US]; 29400 Lakeland Blvd., Wickliffe, OH 44092-2298 (US). **BARRER, Daniel, E.** [US/US]; 786 Kenbridge Drive, Richmond Hts., OH 44143 (US).

(74) **Agent: FOKENS, Jason, S.**; The Lubrizol Corporation, Patent Dept., Mail Drop 022B, 29400 Lakeland Blvd., Wickliffe, OH 44092-2298 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 2006/044411 A1

(54) Title: TARTARIC ACID DERIVATIVES AS FUEL ECONOMY IMPROVERS AND ANTIWEAR AGENTS IN CRANKCASE OILS AND PREPARATION THEREOF

(57) Abstract: Formulations using tartaric compounds of the present invention in a low sulfur, low ash and low phosphorous lubricant lower wear, and friction and improves fuel economy.

TITLE

Tartaric Acid Derivatives as Fuel Economy Improvers and Antiwear Agents in
Crankcase Oils and Preparation Thereof

5

BACKGROUND OF THE INVENTION

The present invention relates to a low sulfur, low ash, low phosphorous lubricant composition and method for lubricating an internal combustion engine, providing improved fuel economy and retention of fuel economy and wear and friction reduction.

10

Fuel economy is of great importance, and lubricants which can foster improved fuel economy by, for instance, reducing friction within an engine, are of significant value. The present invention provides a low sulfur, low ash, low phosphorous lubricant composition, including an additive package, which leads to improved fuel economy in an internal combustion engine. This improvement is effected by providing an additive package in which the friction modifier component is exclusively or predominantly a tartramide or a tartramide or combinations thereof.

15

U.S. Patent 4,237,022, Barrer, December 2, 1980, discloses tartramides useful as additives in lubricants and fuels for effective reduction in squeal and friction as well as improvement in fuel economy.

20

U.S. Patent 4,952,328, Davis et al., August 28, 1990, discloses lubricating oil compositions for internal combustion engines, comprising (A) oil of lubricating viscosity, (B) a carboxylic derivative produced by reacting a succinic acylating agent with certain amines, and (C) a basic alkali metal salt of sulfonic or carboxylic acid. An illustrative lubricant composition (Lubricant III) includes base oil including viscosity index modifier; a basic magnesium alkylated benzene sulfonate; an overbased sodium alkylbenzene sulfonate; a basic calcium alkylated benzene sulfonate; succinimide dispersant; and zinc salts of a phosphorodithioic acids.


25

U.S. Patent 4,326,972, Chamberlin, April 27, 1982, discloses lubricant compositions for improving fuel economy of internal combustion engines. The composition includes a specific sulfurized composition (based on an ester of a carboxylic acid) and a basic alkali metal sulfonate. Additional ingredients may include at least one oil-dispersible detergent or dispersant, a viscosity improving agent, and a specific salt of a phosphorus acid.

SUMMARY OF THE INVENTION

The present invention provides a low-sulfur, low-phosphorus, low-ash lubricant composition suitable for lubricating an internal combustion engine, comprising the following components:

5 (a) an oil of lubricating viscosity, and
 (b) a condensation product of a material represented by formula I and an alcohol or amine having about 8 to about 30 carbon atoms and combinations thereof;

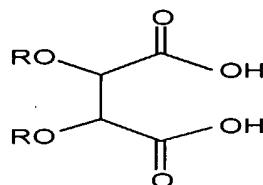

10

I

wherein each R is independently H or a hydrocarbyl group, or wherein the R groups together form a ring; and wherein if R is H, the condensation product is optionally further functionalized by acylation or reaction with a boron compound;

wherein said lubricant composition has a sulfated ash value of up to about 1.0, a phosphorus content of up to about 0.08 percent by weight and a sulfur content of up to about 0.4 percent by weight.

20 It further provides a method of lubricating an internal combustion engine, comprising supplying the lubricant composition to the engine.

DETAILED DESCRIPTION OF THE INVENTION

Various preferred features and embodiments will be described below by 25 way of non-limiting illustration.

The present invention provides a composition as described above. Often the composition has total sulfur content in one aspect below 0.4 percent by weight, in another aspect below 0.3 percent by weight, in yet another aspect 0.2 percent by weight or less and in yet another aspect 0.1 percent by weight or less. 30 Often the major source of sulfur in the composition of the invention is derived from conventional diluent oil. A typical range for the total sulfur content is 0.1 to 0.01 percent by weight.

Often the composition has a total phosphorus content of less than or equal to 800 ppm, in another aspect equal to or less than 500 ppm, in yet another aspect equal to or less than 300 ppm, in yet another aspect equal to or less than 200 ppm and in yet another aspect equal to or less than 100 ppm of the composition. A typical range for the total phosphorus content is 500 to 100 ppm.

Often the composition has a total sulfated ash content as determined by ASTM D-874 of below 1.0 percent by weight, in one aspect equal to or less than 0.7 percent by weight, in yet another aspect equal to or less than 0.4 percent by weight, in yet another aspect equal to or less than 0.3 percent by weight and in yet another aspect equal to or less than 0.05 percent by weight of the composition. . A typical range for the total sulfate ash content is 0.7 to 0.05 percent by weight.

Oil of Lubricating Viscosity

The low-sulfur, low-phosphorus, low-ash lubricating oil composition is comprised of one or more base oils which are generally present in a major amount (i.e. an amount greater than about 50 percent by weight). Generally, the base oil is present in an amount greater than about 60 percent, or greater than about 70 percent, or greater than about 80 percent by weight of the lubricating oil composition. The base oil sulfur content is typically less than 0.2 percent by weight.

The low-sulfur, low-phosphorus, low-ash lubricating oil composition may have a viscosity of up to about 16.3 mm²/s at 100°C, and in one embodiment 5 to 16.3 mm²/s (cSt) at 100°C, and in one embodiment 6 to 13 mm²/s (cSt) at 100°C. In one embodiment, the lubricating oil composition has an SAE Viscosity Grade of 0W, 0W-20, 0W-30, 0W-40, 0W-50, 0W-60, 5W, 5W-20, 5W-30, 5W-40, 5W-50, 5W-60, 10W, 10W-20, 10W-30, 10W-40 or 10W-50.

The low-sulfur, low-phosphorus, low-ash lubricating oil composition may have a high-temperature/high-shear viscosity at 150°C as measured by the procedure in ASTM D4683 of up to 4 mm²/s (cSt), and in one embodiment up to 3.7 mm²/s (cSt), and in one embodiment 2 to 4 mm²/s (cSt), and in one embodiment 2.2 to 3.7 mm²/s (cSt), and in one embodiment 2.7 to 3.5 mm²/s (cSt).

The base oil used in the low-sulfur low-phosphorus, low-ash lubricant composition may be a natural oil, synthetic oil or mixture thereof, provided the sulfur content of such oil does not exceed the above-indicated sulfur concentration limit required for the inventive low-sulfur, low-phosphorus, low-ash lubricating oil composition. The natural oils that are useful include animal oils and vegetable oils (e.g., castor oil, lard oil) as well as mineral lubricating oils such

as liquid petroleum oils and solvent treated or acid-treated mineral lubricating oils of the paraffinic, naphthenic or mixed paraffinic-naphthenic types. Oils derived from coal or shale are also useful. Synthetic lubricating oils include hydrocarbon oils such as polymerized and interpolymerized olefins (e.g., polybutylenes, polypropylenes, propylene isobutylene copolymers, etc.); poly(1-hexenes), poly(1-octenes), poly(1-decenes), etc. and mixtures thereof; alkylbenzenes (e.g., dodecylbenzenes, tetradecylbenzenes, dinonylbenzenes, di-(2-ethylhexyl)benzenes, etc.); polyphenyls (e.g., biphenyls, terphenyls, alkylated polyphenyls, etc.); alkylated diphenyl ethers and the derivatives, 5 analogs and homologs thereof and the like.

10 Alkylene oxide polymers and interpolymers and derivatives thereof where the terminal hydroxyl groups have been modified by esterification, etherification, etc., constitute another class of known synthetic lubricating oils that can be used. These are exemplified by the oils prepared through polymerization of ethylene oxide or propylene oxide, the alkyl and aryl ethers of these 15 polyoxyalkylene polymers (e.g., methyl-polyisopropylene glycol ether having an average molecular weight of about 1000, diphenyl ether of polyethylene glycol having a molecular weight of about 500-1000, diethyl ether of polypropylene glycol having a molecular weight of about 1000-1500, etc.) or mono- and 20 polycarboxylic esters thereof, for example, the acetic acid esters, mixed C3-8 fatty acid esters, or the carboxylic acid diester of tetraethylene glycol.

25 Another suitable class of synthetic lubricating oils that can be used comprises the esters of dicarboxylic acids (e.g., phthalic acid, succinic acid, alkyl succinic acids, alkenyl succinic acids, maleic acid, azelaic acid, suberic acid, sebacic acid, fumaric acid, adipic acid, linoleic acid dimer, malonic acid, alkyl 30 malonic acids, alkenyl malonic acids, etc.) with a variety of alcohols (e.g., butyl alcohol, hexyl alcohol, dodecyl alcohol, 2-ethylhexyl alcohol, ethylene glycol, diethylene glycol monoether, propylene glycol, etc.) Specific examples of these esters include dibutyl adipate, di(2-ethylhexyl) sebacate, di-n-hexyl fumarate, dioctyl sebacate, diisooctyl azelate, diisodecyl azelate, dioctyl phthalate, didecyl phthalate, dieicosyl sebacate, the 2-ethylhexyl diester of linoleic acid dimer, the complex ester formed by reacting one mole of sebacic acid with two moles of tetraethylene glycol and two moles of 2-ethylhexanoic acid and the like.

35 Esters useful as synthetic oils also include those made from C5 to C12 monocarboxylic acids and polyols and polyol ethers such as neopentyl glycol, trimethylol propane, pentaerythritol, dipentaerythritol, tripentaerythritol, etc.

The oil can be a poly-alpha-olefin (PAO). Typically, the PAOs are derived from monomers having from 4 to 30, or from 4 to 20, or from 6 to 16 carbon atoms. Examples of useful PAOs include those derived from octene, decene, mixtures thereof, and the like. These PAOs may have a viscosity from 5 2 to 15, or from 3 to 12, or from 4 to 8 mm²/s (cSt), at 100°C. Examples of useful PAOs include 4 mm²/s (cSt) at 100°C poly-alpha-olefins, 6 mm²/s (cSt) at 100°C poly-alpha-olefins, and mixtures thereof. Mixtures of mineral oil with one or more of the foregoing PAOs may be used.

10 Unrefined, refined and rerefined oils, either natural or synthetic (as well as mixtures of two or more of any of these) of the type disclosed hereinabove can be used in the lubricants of the present invention. Unrefined oils are those obtained directly from a natural or synthetic source without further purification treatment. For example, a shale oil obtained directly from retorting operations, a petroleum oil obtained directly from primary distillation or ester oil obtained 15 directly from an esterification process and used without further treatment would be an unrefined oil. Refined oils are similar to the unrefined oils except they have been further treated in one or more purification steps to improve one or more properties. Many such purification techniques are known to those skilled in the art such as solvent extraction, secondary distillation, acid or base extraction, filtration, percolation, etc. Rerefined oils are obtained by processes similar 20 to those used to obtain refined oils applied to refined oils which have been already used in service. Such rerefined oils are also known as reclaimed or reprocessed oils and often are additionally processed by techniques directed to removal of spent additives and oil breakdown products.

25 Additionally, oils prepared by a Fischer-Tropsch gas to liquid synthetic procedure are known and can be used.

Friction Modifier

30 The tartrimides, tartramides or combinations thereof of the present invention can be prepared by the reaction of tartaric acid and one or more amines, for example, having the formula RR'NH wherein R and R' each independently represent H, a hydrocarbon-based radical of 1 to 150 carbon atoms provided that the sum of carbon atoms in R and R' is at least 8, or -R''OR''' in which R'' is a divalent alkylene radical of 2 to 6 carbon atoms and R''' is a hydrocarbyl radical of 5 to 150 carbon atoms.

35 Amines suitable for the present tartrimide, tartramides or combinations thereof include those represented by the formula or RR'NH wherein R and R' represent H or a long chain hydrocarbyl radical of 1 to 150 carbon atoms pro-

vided that the sum of the carbon atoms in R and R' is at least 8. In one embodiment R or R' contain 8 to 26 carbons and in another embodiment from 12 to 18 carbon atoms.

The tartrimides, tartramides or combinations thereof of the present invention are prepared conveniently by reacting tartaric acid with one or more of the corresponding amine. The tartaric acid used for preparing the tartrimides, or tartramides of the invention can be the commercially available type (obtained from Sargent Welch), and it is likely to exist in one or more isomeric forms such as *d*-tartaric acid, *l*-tartaric acid or mesotartaric acid, often depending on the source (natural) or method of synthesis (e.g. from maleic acid). These derivatives can also be prepared from functional equivalents to the diacid readily apparent to those skilled skilled in the art, such as esters, acid chlorides, anhydrides, etc.

The tartrimides, tartramides or combinations thereof of the present invention can be solids, semi-solids, or oils depending on the particular amine used in preparing the tartrimide, or tartramides. For use as additives in oleaginous compositions including lubricating and fuel compositions the tartrimides, or tartramides will have to be soluble and/or stably dispersible in such oleaginous compositions. Thus, for example, compositions intended for use in oils are oil-soluble and/or stably dispersible in an oil in which they are to be used. The term "oil-soluble" as used in this specification and appended claims does not necessarily mean that all the compositions in question are miscible or soluble in all proportions in all oils. Rather, it is intended to mean that the composition is soluble in an oil (mineral, synthetic, etc.) in which it is intended to function to an extent which permits the solution to exhibit one or more of the desired properties. Similarly, it is not necessary that such "solutions" be true solutions in the strict physical or chemical sense. They may instead be micro-emulsions or colloidal dispersions which, for the purpose of this invention, exhibit properties sufficiently close to those of true solutions to be, for practical purposes, interchangeable with them within the context of this invention.

As previously indicated, the tartrimides, tartramides or combinations thereof compositions of this invention are useful as additives for lubricants, in which they function primarily as rust and corrosion inhibitors, friction modifiers, antiwear agents and demulsifiers. They can be employed in a variety of lubricants based on diverse oils of lubricating viscosity, including natural and synthetic lubricating oils and mixtures thereof. These lubricants include crankcase lubricating oils for spark-ignited and compression-ignited internal combus-

tion engines, including automobile and truck engines, two-cycle engines, aviation piston engines, marine and railroad diesel engines, and the like. They can also be used in gas engines, stationary power engines and turbines, and the like. Automatic transmission fluids, transaxle lubricants, gear lubricants, metalworking lubricants, hydraulic fluids and other lubricating oil and grease compositions can also benefit from the incorporation therein of the compositions of the present invention.

Other friction modifiers maybe present in the lubricants of the present invention and can include glycerol monooleates, oleyl amides, diethanol fatty amines and mixtures thereof. A useful list of friction modifiers is included in U.S. Pat. No. 4,792,410.

Fatty acid esters of glycerol can be prepared by a variety of methods well known in the art. Many of these esters, such as glycerol monooleate and glycerol monotallowate, are manufactured on a commercial scale. The esters useful for this invention are oil-soluble and are preferably prepared from C₈ to C₂₂ fatty acids or mixtures thereof such as are found in natural products. The fatty acid may be saturated or unsaturated. Certain compounds found in acids from natural sources may include licanic acid which contains one keto group. Useful C₈ to C₂₂ fatty acids are those of the formula R-COOH wherein R is alkyl or alkenyl.

The fatty acid monoester of glycerol is useful. Mixtures of mono and diesters may be used. Mixtures of mono- and diester can contain at least about 40% of the monoester. Mixtures of mono- and diesters of glycerol containing from about 40% to about 60% by weight of the monoester can be used. For example, commercial glycerol monooleate containing a mixture of from 45% to 55% by weight monoester and from 55% to 45% diester can be used.


Useful fatty acids are oleic, stearic, isostearic, palmitic, myristic, palmitoleic, linoleic, lauric, linolenic, and eleostearic, and the acids from the natural products tallow, palm oil, olive oil, peanut oil.

Fatty acid amides have been discussed in detail in U.S. Pat. No. 4,280,916. Suitable amides are C₈-C₂₄ aliphatic monocarboxylic amides and are well known. Reacting the fatty acid base compound with ammonia produces the fatty amide. The fatty acids and amides derived therefrom may be either saturated or unsaturated. Important fatty acids include lauric C₁₂, palmitic C₁₆ and steric C₁₈. Other important unsaturated fatty acids include oleic, linoleic and linolenic acids, all of which are C₁₈. In one embodiment, the fatty amides of the instant invention are those derived from the C₁₈ unsaturated fatty acids.


The fatty amines and the diethoxylated long chain amines such as N,N-bis-(2-hydroxyethyl)-tallowamine themselves are generally useful as components of this invention. Both types of amines are commercially available. Fatty amines and ethoxylated fatty amines are described in greater detail in U.S. Patent 4,741,848

5 Miscellaneous

Antioxidants (that is, oxidation inhibitors), including hindered phenolic antioxidants such as 2,6-di-t-butylphenol, and hindered phenolic esters such as the type represented by the following formula:

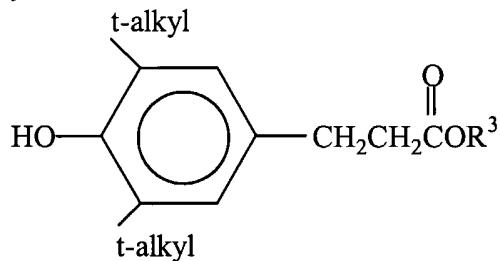

10 and in a specific embodiment,

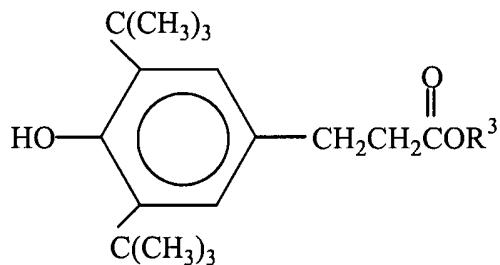

wherein R³ is a straight chain or branched chain alkyl group containing 2 to 10 carbon atoms, in one embodiment 2 to 4, and in another embodiment 4 carbon atoms. In one embodiment, R³ is an n-butyl group. In another embodiment R³ can be 8 carbons, as found in Irganox L-135TM from Ciba. The preparation of these antioxidants can be found in Patent 6,559,105.

Further antioxidants can include secondary aromatic amine antioxidants such as dialkyl (e.g., dinonyl) diphenylamine, sulfurized phenolic antioxidants, oil-soluble copper compounds, phosphorus-containing antioxidants, molybdenum compounds such as the Mo dithiocarbamates, organic sulfides, disulfides, and polysulfides (such as sulfurized Diels Alder adduct of butadiene and butyl acrylate). An extensive list of antioxidants is found in U.S. Patent 6,251,840.

25 The EP/antiwear agent used in connection with the present invention is typically in the form of a zinc dialkyldithiophosphate. Although there are an extremely large number of different types of antiwear agents which might be

utilized in connection with such functional fluids, the present inventors have found that zinc dialkyldithiophosphate type antiwear agents work particularly well in connection with the other components to obtain the desired characteristics. In one embodiment, at least 50% of the alkyl groups (derived from the alcohol) in the dialkyldithiophosphate are secondary groups, that is, from secondary alcohols. In another embodiment, at least 50% of the alkyl groups are derived from isopropyl alcohol.

10 Ashless detergents and dispersants depending on their constitution may upon combustion yield a non-volatile material such as boric oxide or phosphorus pentoxide. However, ashless detergents and dispersants do not ordinarily contain metal and therefore do not yield a metal-containing ash on combustion. Many types of ashless dispersants are known in the art. Such materials are commonly referred to as "ashless" even though they may associate with a metal ion from another source *in situ*.


15 (1) "Carboxylic dispersants" are reaction products of carboxylic acylating agents (acids, anhydrides, esters, etc.) containing at least 34 and preferably at least 54 carbon atoms which are reacted with nitrogen containing compounds (such as amines), organic hydroxy compounds (such as aliphatic compounds including monohydric and polyhydric alcohols, or aromatic compounds including phenols and naphthols), and/or basic inorganic materials. These reaction products include imide, amide, and ester reaction products of carboxylic ester dispersants.

20 The carboxylic acylating agents include fatty acids, isoaliphatic acids (e.g. 8-methyl-octadecanoic acid), dimer acids, addition dicarboxylic acids 4+2 and 2+2 addition products of an unsaturated fatty acid with an unsaturated carboxylic reagent), trimer acids, addition tricarboxylic acids (Empol® 1040, Hystrene® 5460 and Unidyme® 60), and hydrocarbyl substituted carboxylic acylating agents (from olefins and/or polyalkenes). In one embodiment, the carboxylic acylating agent is a fatty acid. Fatty acids generally contain from 8 up to 30, or from 12 up to 24 carbon atoms. Carboxylic acylating agents are taught in U.S. Patents No. 2,444,328, 3,219,666, 4,234,435 and 6,077,909.

25 The amine may be a mono- or polyamine. The monoamines generally have at least one hydrocarbyl group containing from 1 to 24 carbon atoms, or from 1 to 12 carbon atoms. Examples of monoamines include fatty (C8-30) amines (Armeens™), primary ether amines (SURFAM® amines), tertiary-aliphatic primary amines (Primenes™), hydroxyamines (primary, secondary or tertiary alkanol amines), ether N-(hydroxyhydrocarbyl) amines, and hydroxyhy-

drocarbyl amines (EthomeensTM and PropomeensTM). The polyamines include alkoxylated diamines (EthoduomeensTM), fatty diamines (DuomeensTM), alkylenepolyamines (ethylenepolyamines), hydroxy-containing polyamines, polyoxyalkylene polyamines (JeffaminesTM), condensed polyamines (a condensation reaction between at least one hydroxy compound with at least one polyamine reactant containing at least one primary or secondary amino group), and heterocyclic polyamines. Useful amines include those disclosed in U.S. Patent 4,234,435 (Meinhart) and U.S. Patent 5,230,714 (Steckel).

The polyamines from which the dispersant is derived include principally alkylene amines conforming, for the most part, to the formula

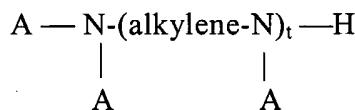

wherein t is an integer typically less than 10, A is hydrogen or a hydrocarbyl group typically having up to 30 carbon atoms, and the alkylene group is typically an alkylene group having less than 8 carbon atoms. The alkylene amines include principally methylene amines, ethylene amines, hexylene amines, heptylene amines, octylene amines, other polymethylene amines. They are exemplified specifically by: ethylene diamine, diethylene triamine, triethylene tetramine, propylene diamine, decamethylene diamine, octamethylene diamine, di(heptamethylene) triamine, tripropylene tetramine, tetraethylene pentamine, trimethylene diamine, pentaethylene hexamine, di(trimethylene) triamine. Higher homologues such as are obtained by condensing two or more of the above-illustrated alkylene amines likewise are useful. Tetraethylene pentamines is particularly useful.

The ethylene amines, also referred to as polyethylene polyamines, are especially useful. They are described in some detail under the heading "Ethylene Amines" in Encyclopedia of Chemical Technology, Kirk and Othmer, Vol. 5, pp. 898-905, Interscience Publishers, New York (1950).

Hydroxyalkyl-substituted alkylene amines, i.e., alkylene amines having one or more hydroxyalkyl substituents on the nitrogen atoms, likewise are useful. Examples of such amines include N-(2-hydroxyethyl)ethylene diamine, N,N'-bis(2-hydroxyethyl)-ethylene diamine, 1-(2-hydroxyethyl)piperazine, monohydroxypropyl-piperazine, di-hydroxypropyl-substituted tetraethylene pentamine, N-(3-hydroxypropyl)-tetra-methylene diamine, and 2-heptadecyl-1-(2-hydroxyethyl)-imidazoline.

Higher homologues, such as are obtained by condensation of the above-illustrated alkylene amines or hydroxy alkyl-substituted alkylene amines through amino radicals or through hydroxy radicals, are likewise useful. Condensed polyamines are formed by a condensation reaction between at least one hydroxy compound with at least one polyamine reactant containing at least one primary or secondary amino group and are described in U.S. Patent 5,230,714 and 5,296,154 (Steckel).


Examples of these "carboxylic dispersants" are described in British Patent 1,306,529 and in many U.S. Patents including the following: 3,219,666, 10 3,316,177, 3,340,281, 3,351,552, 3,381,022, 3,433,744, 3,444,170, 3,467,668, 3,501,405, 3,542,680, 3,576,743, 3,632,511, 4,234,435, 6,077,909 and 6,165,235.

(2) Succinimide dispersants are a species of carboxylic dispersants. They are the reaction product of a hydrocarbyl substituted succinic acylating agent with an organic hydroxy compound or, an amine containing at least one hydrogen attached to a nitrogen atom, or a mixture of said hydroxy compound and amine. The term "succinic acylating agent" refers to a hydrocarbon-substituted succinic acid or succinic acid-producing compound (which term also encompasses the acid itself). Such materials typically include hydrocarbyl-substituted succinic acids, anhydrides, esters (including half esters) and halides. 15 20

Succinic based dispersants have a wide variety of chemical structures including typically structures such as

25

30

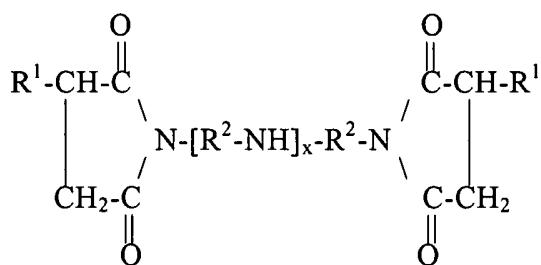

In the above structure, each R¹ is independently a hydrocarbyl group, such as a polyolefin-derived group having an \bar{M}_n of 500 or 700 to 10,000. 35 Typically the hydrocarbyl group is an alkyl group, frequently a polyisobutyl group with a molecular weight of 500 or 700 to 5000, or alternatively 1500 or 2000 to 5000. Alternatively expressed, the R¹ groups can contain 40 to 500 carbon atoms, for instance at least 50, e.g., 50 to 300 carbon atoms, such as 40 aliphatic carbon atoms. The R² are alkylene groups, commonly ethylene (C₂H₄)

groups. Such molecules are commonly derived from reaction of an alkenyl acylating agent with a polyamine, and a wide variety of linkages between the two moieties is possible beside the simple imide structure shown above, including a variety of amides and quaternary ammonium salts. Succinimide dispersants are more fully described in U.S. Patents 4,234,435, 3,172,892 and 6,165,235.

The polyalkenes from which the substituent groups are derived are typically homopolymers and interpolymers of polymerizable olefin monomers of 2 to 16 carbon atoms; usually 2 to 6 carbon atoms. The amines which are reacted with the succinic acylating agents to form the carboxylic dispersant composition can be monoamines or polyamines as described above.

The succinimide dispersant is referred to as such since it normally contains nitrogen largely in the form of imide functionality, although it may be in the form of amine salts, amides, imidazolines as well as mixtures thereof. To prepare the succinimide dispersant, one or more of the succinic acid-producing compounds and one or more of the amines are heated, typically with removal of water, optionally in the presence of a normally liquid, substantially inert organic liquid solvent/diluent at an elevated temperature, generally in the range of 80°C up to the decomposition point of the mixture or the product; typically 100°C to 20 300°C.

Additional details and examples of the procedures for preparing the succinimide dispersants of the present invention are included in, for example, U.S. Pat. Nos. 3,172,892, 3,219,666, 3,272,746, 4,234,435, 6,440,905 and 6,165,235.

(3) "Amine dispersants" are reaction products of relatively high molecular weight aliphatic halides and amines, preferably polyalkylene polyamines. Examples thereof are described, for example, in the following U.S. Patents: 3,275,554, 3,438,757, 3,454,555, and 3,565,804.

(4) "Mannich dispersants" are the reaction products of alkyl phenols in which the alkyl group contains at least 30 carbon atoms with aldehydes (especially formaldehyde) and amines (especially polyalkylene polyamines). The materials described in the following U.S. Patents are illustrative: 3,036,003, 3,236,770, 3,414,347, 3,448,047, 3,461,172, 3,539,633, 3,586,629, 3,591,598, 3,634,515, 3,725,480, 3,726,882, and 3,980,569.

(5) Post-treated dispersants are obtained by reacting carboxylic, amine or Mannich dispersants with reagents such as dimercaptothiadiazoles, urea, thiourea, carbon disulfide, aldehydes, ketones, carboxylic acids, hydrocarbon-substituted succinic anhydrides, nitriles epoxides, boron compounds,

phosphorus compounds or the like. Exemplary materials of this kind are described in the following U.S. Patents: 3,200,107, 3,282,955, 3,367,943, 3,513,093, 3,639,242, 3,649,659, 3,442,808, 3,455,832, 3,579,450, 3,600,372, 3,702,757, and 3,708,422.

5 (6) Polymeric dispersants are interpolymers of oil-solubilizing monomers such as decyl methacrylate, vinyl decyl ether and high molecular weight olefins with monomers containing polar substituents, e.g., aminoalkyl acrylates or acrylamides and poly-(oxyethylene)-substituted acrylates. Examples of polymer dispersants thereof are disclosed in the following U.S. Patents:
10 3,329,658, 3449,250, 3,519,656, 3,666,730, 3,687,849, and 3,702,300.

The composition can also contain one or more detergents, which are normally salts, and specifically overbased salts. Overbased salts, or overbased materials, are single phase, homogeneous Newtonian systems characterized by a metal content in excess of that which would be present according to the
15 stoichiometry of the metal and the particular acidic organic compound reacted with the metal. The overbased materials are prepared by reacting an acidic material (typically an inorganic acid or lower carboxylic acid, preferably carbon dioxide) with a mixture comprising an acidic organic compound, a reaction medium comprising at least one inert, organic solvent (such as mineral oil, naphtha, toluene, xylene) for said acidic organic material, a stoichiometric
20 excess of a metal base, and a promoter.

The acidic organic compounds useful in making the overbased compositions of the present invention include carboxylic acids, sulfonic acids, phosphorus-containing acids, phenols or mixtures thereof. Preferably, the acidic organic
25 compounds are carboxylic acids or sulfonic acids with sulfonic or thiosulfonic groups (such as hydrocarbyl-substituted benzenesulfonic acids), and hydrocarbyl-substituted salicylic acids. Another type of compound useful in making the overbased composition of the present invention is salixarates. A description of the salixarates useful for of the present invention can be found in publication
30 WO 04/04850.

The metal compounds useful in making the overbased salts are generally any Group 1 or Group 2 metal compounds (CAS version of the Periodic Table of the Elements). The Group 1 metals of the metal compound include Group 1a alkali metals (e.g., sodium, potassium, lithium) as well as Group 1b metals such
35 as copper. The Group 1 metals are preferably sodium, potassium, lithium and copper, preferably sodium or potassium, and more preferably sodium. The Group 2 metals of the metal base include the Group 2a alkaline earth metals

(e.g., magnesium, calcium, strontium, barium) as well as the Group 2b metals such as zinc or cadmium. Preferably the Group 2 metals are magnesium, calcium, barium, or zinc, preferably magnesium or calcium, more preferably calcium.

5 Examples of the overbased detergent of the present invention include, but are not limited to calcium sulfonates, calcium phenates, calcium salicylates, calcium salixarates and mixtures thereof.

10 The amount of the overbased material, that is, the detergent, if present, is in one embodiment 0.05 to 3 percent by weight of the composition, or 0.1 to 3 percent, or 0.1 to 1.5 percent, or 0.15 to 1.5 percent by weight.

Anti-foam agents used to reduce or prevent the formation of stable foam include silicones or organic polymers. Examples of these and additional anti-foam compositions are described in "Foam Control Agents", by Henry T. Kerner (Noyes Data Corporation, 1976), pages 125-162.

15 The compositions of the present invention are employed in practice as lubricants by supplying the lubricant to an internal combustion engine (such as a stationary gas-powered internal combustion engine) in such a way that during the course of operation of the engine the lubricant is delivered to the critical parts of the engine, thereby lubricating the engine.

20 As used herein, the term "hydrocarbyl substituent" or "hydrocarbyl group" is used in its ordinary sense, which is well-known to those skilled in the art. Specifically, it refers to a group having a carbon atom directly attached to the remainder of the molecule and having predominantly hydrocarbon character. Examples of hydrocarbyl groups include: hydrocarbon substituents, that is, aliphatic (e.g., alkyl or alkenyl), alicyclic (e.g., cycloalkyl, cycloalkenyl) substituents, and aromatic-, aliphatic-, and alicyclic-substituted aromatic substituents, as well as cyclic substituents wherein the ring is completed through another portion of the molecule (e.g., two substituents together form a ring); substituted hydrocarbon substituents, that is, substituents containing non-hydrocarbon groups which, in the context of this invention, do not alter the predominantly hydrocarbon nature of the substituent (e.g., halo (especially chloro and fluoro), hydroxy, alkoxy, mercapto, alkylmercapto, nitro, nitroso, and sulfoxy); hetero substituents, that is, substituents which, while having a predominantly hydrocarbon character, in the context of this invention, contain other than carbon in a ring or chain otherwise composed of carbon atoms. Heteroatoms include sulfur, oxygen, nitrogen, and encompass substituents as pyridyl, furyl, thienyl and imidazolyl. In general, no more than two, preferably

no more than one, non-hydrocarbon substituent will be present for every ten carbon atoms in the hydrocarbyl group; typically, there will be no non-hydrocarbon substituents in the hydrocarbyl group.

It is known that some of the materials described above may interact in 5 the final formulation, so that the components of the final formulation may be different from those that are initially added. For instance, metal ions (of, e.g., a detergent) can migrate to other acidic or anionic sites of other molecules. The products formed thereby, including the products formed upon employing the 10 composition of the present invention in its intended use, may not be susceptible of easy description. Nevertheless, all such modifications and reaction products are included within the scope of the present invention; the present invention encompasses the composition prepared by admixing the components described above.

EXAMPLES

15 The invention will be further illustrated by the following examples, which set forth particularly advantageous embodiments. While the examples are provided to illustrate the present invention, they are not intended to limit it.

The lubricants are evaluated in the Sequence VIB fuel economy test as defined by the ILSAC GF-4 specification for fuel economy and durability.

20 The following formulations are prepared in an oil of lubricating viscosity, where the amounts of the additive components are in percent by weight, including conventional diluent oil.

TABLE I

Example	C1	C2	Ex. 3
Succinimide dispersant	5.1	5	5
Zinc dialkyldithiophosphate	0.84	0.86	0.86
Antioxidants	2.44	2.2	2.2
Pour Point Depressant	0	0	0.3
Overbased calcium sulfonate detergent(s)	1.53	1.53	1.53
Viscosity Index Improver	8.15	8.15	8
Alkyl Borate	0	0.05	0.05
Friction Modifier	0	0.1	0.1
Glycerol monooleate	n.p.	0.4	n.p.
Oleylamine Tartrimide	n.p.	n.p.	0.5
Sequence VIB Engine			
Initial Fuel Economy (passing \geq 1.5)	1.5	1.8	1.9
Durability (passing \geq 1.5)	1.2	1.4	1.9

*n.p. = not present in the formulation

5 The results show that formulations using oleylamine tartrimide in a low sulfur, ash and phosphorous crankcase lubricant significantly improves fuel economy compared to formulations using glycerol monooleate, a conventional friction modifier, as demonstrated in the Sequence VIB engine test.

10 The lubricants are further evaluated in the 4 Ball Low Phosphorous/Sulfur (4 Ball Low PS) test, High Frequency Reciprocating Rig 1% cumene hydroperoxide (HFRR 1%CHP) test and the Cameron-Plint High Temperature Reciprocating Wear test for wear and friction reduction.

15 The 4 Ball Low PS procedure utilizes the same test conditions as ASTM D4172 with the addition of cumene hydroperoxide (CHP) as a lubricant pre-stress. The basic operation of the four ball wear test can be described as three stationary 0.5 diameter steel ball bearings locked in a triangle pattern. A fourth steel ball bearing is loaded against and rotated against the three stationary balls. The wear scar is measured on each of the three stationary balls using a microscope and averaged to determine the average wear scar diameter in millimeters.

20 The HFRR 1% CHP test is used to evaluated the friction and wear performance of lubricants containing reduced levels of phosphorous and sulfur. The wear scar diameter and percent film thickness by using a reciprocating steel

ball bearing which slides against a flat steel plate is measured. This test is run using 1% cumene hydroperoxide (CHP) in conjunction with the High Frequency Reciprocating Wear Rig, which is a commercially available piece of tribology test equipment.

5 The Cameron-Plint High Temperature Reciprocating Wear test is used to evaluate the friction and wear performance of lubricants. The wear scar diameter and percent film thickness are obtained by using a reciprocating steel ball bearing which slides against a flat steel plate is measure. This test is run using the Cameron-Plint Reciprocating Wear Rig, which is a commercially available 10 piece of tribology test equipment.

The following formulations are prepared in an oil of lubricating viscosity, where the amounts of the additive components are in percent by weight, unless indicated otherwise: 0.15% pour point depressant (including about 35% diluent oil), 8% viscosity index improver (including about 91% diluent oil), 15 0.89% diluent oil, 5.1% succinimide dispersant (including about 47% diluent oil), 0.48% zinc dialkyldithiophosphate (except for C3, which contains 0.98%) (each including about 9% diluent oil), 1.53% overbased calcium sulfonate detergent (including about 42% diluent oil), 0.1% glycerol monooleate (including about 0% diluent oil), antioxidants (including about 5% diluent oil), 90-100 20 ppm of a commercial defoamer, and the remainder base oil.

To the above formulation are added the components, as found in the following table and run in the 4 Ball Low PS test, the High Frequency Reciprocating Rig 1% Cumene Hydroperoxide test and the Cameron-Plint High Temperature Reciprocating Wear test. The results are found in the table below.

25

30

35

TABLE II

	C3 0.1 %P	C4 0.05 %P	Ex. 5 0.05% P	Ex. 6 0.05% P	Ex. 7 0.05% P	Ex. 8 0.05% P	Ex. 9 0.05% P	Ex. 10 0.05% P
Additional Component:								
[1,3]Dioxolane C12-14 Alkyl Tartrate Ester			0.5					
Oleyl Tartrimide				0.5				
Oleyl Tartrimide					1			
Branched C13 Alkyl Tartrate Ester						1		
TriDecylPropoxyAmine Tartrimide							1	
Borated TriDecyl-PropoxyAmine Tartrimide								1
Test:								
1. 4 Ball Low PS Test								
Average Scar Diameter (mm)	0.59	0.61, 0.77	0.51	0.7	n.r.	n.r.	0.45	0.41
2. HFRR 1%CHP Test								
Wear Scar Diameter (μm)	161, 185	285, 295, 435	236	251	260	286	297	183
Film Thickness (%)	94, 83	1,1, 23	86	66	58	56	97	50
3. Cameron-Plint High Temperature Reciprocating Wear Test								
Wear Scar Diameter (μm)	339	661	n.r.	n.r.	375	352	n.r.	n.r.
Film Thickness (%)	100	62	n.r.	n.r.	100	99	n.r.	n.r.

Note: n.r. = not reported

5

The results show that formulations using tartaric acid derived compounds of the present invention in a low sulfur, ash and phosphorous lubricant (Ex. 5-

10) reduce wear compared to low SAPS formulation with 0.05 percent by weight of phosphorus delivered to the composition (C4), which do not contain tartaric acid derived compounds. They further provide equivalent wear protection compared to conventional GF-3 formulations (C3), which has higher 5 phosphorous.

Each of the documents referred to above is incorporated herein by reference. Except in the Examples, or where otherwise explicitly indicated, all numerical quantities in this description specifying amounts of materials, reaction conditions, molecular weights, number of carbon atoms, and the like, are to 10 be understood as modified by the word "about." Unless otherwise indicated, each chemical or composition referred to herein should be interpreted as being a commercial grade material which may contain the isomers, by-products, derivatives, and other such materials which are normally understood to be present in the commercial grade. However, the amount of each chemical component is 15 presented exclusive of any solvent or diluent oil, which may be customarily present in the commercial material, unless otherwise indicated. It is to be understood that the upper and lower amount, range, and ratio limits set forth herein may be independently combined. Similarly, the ranges and amounts for each element of the invention can be used together with ranges or amounts for 20 any of the other elements. As used herein, the expression "consisting essentially of" permits the inclusion of substances that do not materially affect the basic and novel characteristics of the composition under consideration.


What is claimed is:

5

1. A low-sulfur, low-phosphorus, low-ash lubricant composition suitable for use in an internal combustion engine, comprising:

- (a) an oil of lubricating viscosity, and
- (b) a condensation product of a material represented by formula I and

10 an alcohol or amine having about 8 to about 30 carbon atoms and combinations thereof;

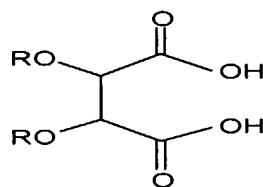

I

15

wherein each R is independently H, or a hydrocarbyl group, or wherein the R groups together form a ring; and wherein if R is H, the condensation product is optionally further functionalized by acylation or reaction with a boron compound;

20

wherein said lubricant composition has a sulfated ash value of up to about 1.0, a phosphorus content of up to about 0.08 percent by weight and a sulfur content of up to about 0.4 percent by weight.

25

2. The composition of claim 1, wherein the amount of the condensation product is about 0.05 to about 5.0 percent by weight.

3. The composition of claim 2, wherein the amount of condensation product is about 0.1 to about 2.0 percent by weight.

30

4. The composition of claim 2, wherein the amount of condensation product is about 0.25 to about 1.25 percent by weight.

5. The composition of claim 1, further comprising a metal dialkyldithiophosphate.

6. The composition of claim 1, wherein the metal dialkyldithiophosphate is zinc dialkyldithiophosphate wherein at least about 50 percent of the alkyl groups thereof are secondary alkyl groups.

7. The composition of claim 1, further comprising a dispersant.

10 8. The composition of claim 7, wherein the dispersant is a succinimide.

9. The composition of claim 1, further comprising at least one calcium overbased detergent.

15 10. The composition of claim 9, wherein the calcium overbased detergent is selected from the group consisting of calcium sulfonates, calcium phenates, calcium salicylates, calcium salixarates and mixtures thereof.

20 11. The composition of claim 1, further comprising at least one antioxidant.

25 12. The composition of claim 11, wherein the antioxidant is selected from the group consisting of hindered phenols, aryl amines and mixtures thereof.


13. The composition of claim 1, further comprising additional friction modifiers other than (b).

30 14. The additional friction modifiers are selected from the group consisting of glycerol monooleates, oleyl amides, diethanol fatty amines and mixtures thereof.

35 15. The composition of claim 1, further comprising a defoamer

16. A method of lubricating an internal combustion engine, comprising supplying to said engine an oil of lubricating viscosity, and a condensation

product of a material represented by formula I and an alcohol or amine having about 8 to about 30 carbon atoms and combinations thereof;

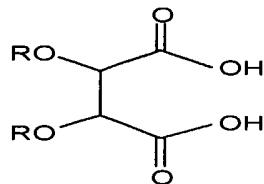

I

5

wherein in the product each R is independently H or a hydrocarbyl group, or wherein the R groups together form a ring; or wherein if R is H, then the resulting hydroxyl group is further functionalized by acylation or reaction with a boron compound;


10

wherein said lubricant composition has a sulfated ash value of up to about 1.0, a phosphorus content of up to about 0.08 percent by weight and a sulfur content of up to about 0.4 percent by weight.

15

17. The method of making a lubricant composition comprising:

(a) blending an oil of lubricating viscosity and a condensation product of a material represented by formula I and an alcohol or amine having about 8 to about 30 carbon atoms and combinations thereof;

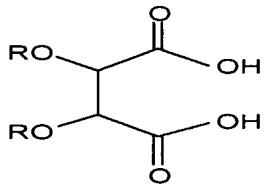

I

20

wherein in the product each R is independently H or a hydrocarbyl group, or wherein the R groups together form a ring; or wherein if R is H, then the resulting hydroxyl group is further functionalized by acylation or reaction with a boron compound;

resulting in a lubricant composition wherein said lubricant composition has a sulfated ash value of up to about 1.0, a phosphorus content of up to about 0.08 percent by weight and a sulfur content of up to about 0.4 percent by weight.

5

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2005/036569

A. CLASSIFICATION OF SUBJECT MATTER
C10M133/16 C10M129/72 C10M163/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
C10M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 237 022 A (BARRER ET AL) 2 December 1980 (1980-12-02) cited in the application column 1, line 62 - column 2, line 2 column 2, lines 62-68 column 3, line 40 - column 4, line 57 column 6, lines 25-42 column 7, line 65 - column 8, line 6 column 9, lines 28-49 column 11, lines 25-50; examples I-XI	1-17
X	GB 2 105 743 A (THE LUBRIZOL CORPORATION) 30 March 1983 (1983-03-30) page 23, lines 27-32; examples; tables II-IV	1-12, 15-17

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

15 February 2006

Date of mailing of the international search report

28/02/2006

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kazemi, P

INTERNATIONAL SEARCH REPORT

International application No	
PCT/US2005/036569	

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 741 848 A (KOCH ET AL) 3 May 1988 (1988-05-03) column 17, lines 1-20; examples 9-A,10-A,14-A,15-A,17-A,19-32-A,XI column 18, line 45 - column 19, line 60 column 20, lines 35-42 -----	1-17
Y	WO 2004/003117 A (NIPPON OIL CORPORATION; YAGISHITA, KAZUHIRO; YAGUCHI, AKIRA) 8 January 2004 (2004-01-08) tables 1-4 & EP 1 516 910 A (NIPPON OIL CORPORATION) 23 March 2005 (2005-03-23) paragraphs '0001!, '0088!, '0096!; tables 1-4 -----	1-17
Y	US 4 304 678 A (SCHICK ET AL) 8 December 1981 (1981-12-08) column 2, lines 25-53; claims 1,10,11,20; table 1 -----	1-17
X	US 2 977 309 A (GODFREY KENNETH L ET AL) 28 March 1961 (1961-03-28) column 2, lines 48-55; claim 1; table 1 -----	1-4,17
A	US 3 785 975 A (HUMPHREY E,US ET AL) 15 January 1974 (1974-01-15) tables I,II -----	1-4,11, 12,15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2005/036569

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 4237022	A	02-12-1980	NONE			
GB 2105743	A	30-03-1983	CA DE FR IT JP MX	1183125 A1 3232028 A1 2512458 A1 1149072 B 58057499 A 162192 A		26-02-1985 24-03-1983 11-03-1983 03-12-1986 05-04-1983 08-04-1991
US 4741848	A	03-05-1988	AU AU BR CA EP ES JP MX MX MX MX SG WO ZA	605481 B2 7166687 A 8706200 A 1339696 C 0258423 A1 2004257 A6 8032709 B 165752 B 9101703 A1 9101705 A2 174120 B 19292 G 8705605 A1 8701765 A		17-01-1991 09-10-1987 23-02-1988 03-03-1998 09-03-1988 16-12-1988 29-03-1996 03-12-1992 01-07-1992 01-04-1992 20-04-1994 16-04-1992 24-09-1987 25-11-1987
WO 2004003117	A	08-01-2004	AU CN EP	2003241824 A1 1671827 A 1516910 A1		19-01-2004 21-09-2005 23-03-2005
EP 1516910	A	23-03-2005	AU CN WO	2003241824 A1 1671827 A 2004003117 A1		19-01-2004 21-09-2005 08-01-2004
US 4304678	A	08-12-1981	NONE			
US 2977309	A	28-03-1961	GB	828701 A		24-02-1960
US 3785975	A	15-01-1974	NONE			