




US 20070066992A1

(19) **United States**(12) **Patent Application Publication****Hanson et al.**(10) **Pub. No.: US 2007/0066992 A1**(43) **Pub. Date: Mar. 22, 2007**(54) **FILTER DELIVERY AND RETRIEVAL
DEVICE****Publication Classification**(51) **Int. Cl.****A61M 29/00** (2006.01)(52) **U.S. Cl.** **606/200**(75) Inventors: **Scott M. Hanson**, Savage, MN (US);
Andrew J. Dusbabek, Dayton, MN
(US); **Gary L. Hendrickson**, Big Lake,
MN (US)

Correspondence Address:

CROMPTON, SEAGER & TUFTE, LLC
1221 NICOLLET AVENUE
SUITE 800
MINNEAPOLIS, MN 55403-2420 (US)(73) Assignee: **SCIMED LIFE SYSTEMS, INC.**,
Maple Grove, MN (US)(21) Appl. No.: **11/557,780**(22) Filed: **Nov. 8, 2006****Related U.S. Application Data**(63) Continuation of application No. 10/621,599, filed on
Jul. 17, 2003, which is a continuation of application
No. 09/801,263, filed on Mar. 7, 2001, now Pat. No.
6,616,681.(60) Provisional application No. 60/238,188, filed on Oct.
5, 2000.(57) **ABSTRACT**

Methods and devices for providing temporary placement of a filter in a blood vessel are disclosed. A filter delivery system in accordance with one exemplary embodiment of the present invention includes a catheter having an elongate shaft and a tubular member disposed within a shaft lumen defined by the elongate shaft. The elongate shaft also includes a proximal end, a distal end, and a wall defining the shaft lumen. The tubular member has a first end fixed to the wall of the elongate shaft, and a second end disposed within the shaft lumen. The tubular member defines a guidewire lumen that is in fluid communication with a distal guidewire port defined by the second end of the tubular member. The catheter also includes a proximal guidewire port extending through the wall of the elongate shaft. A filter may be disposed within a distal portion of the shaft lumen. A distal end of a guidewire is fixed to the filter. The guidewire preferably extends through the distal guidewire port, the guidewire lumen, and the proximal guidewire port.

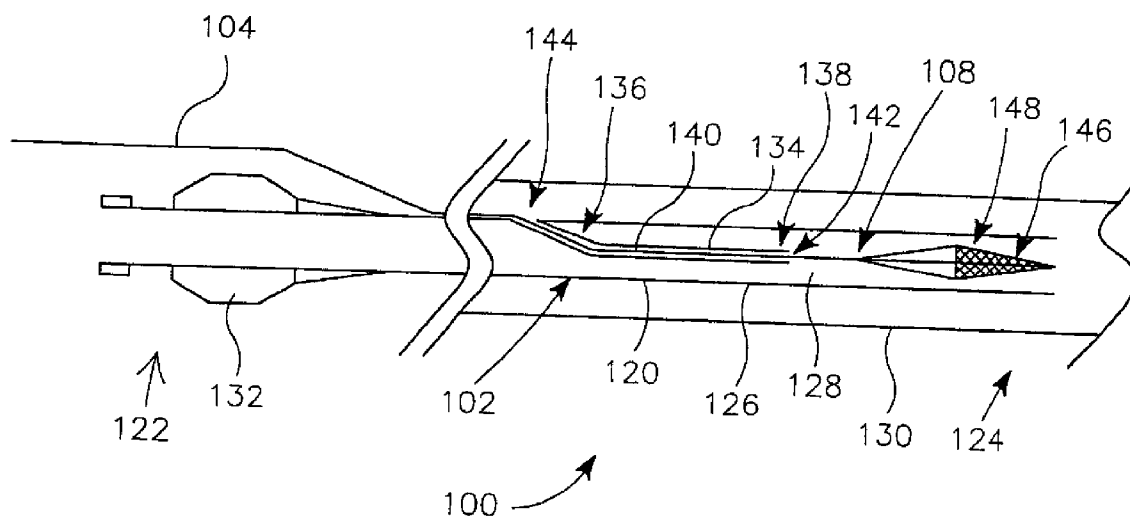

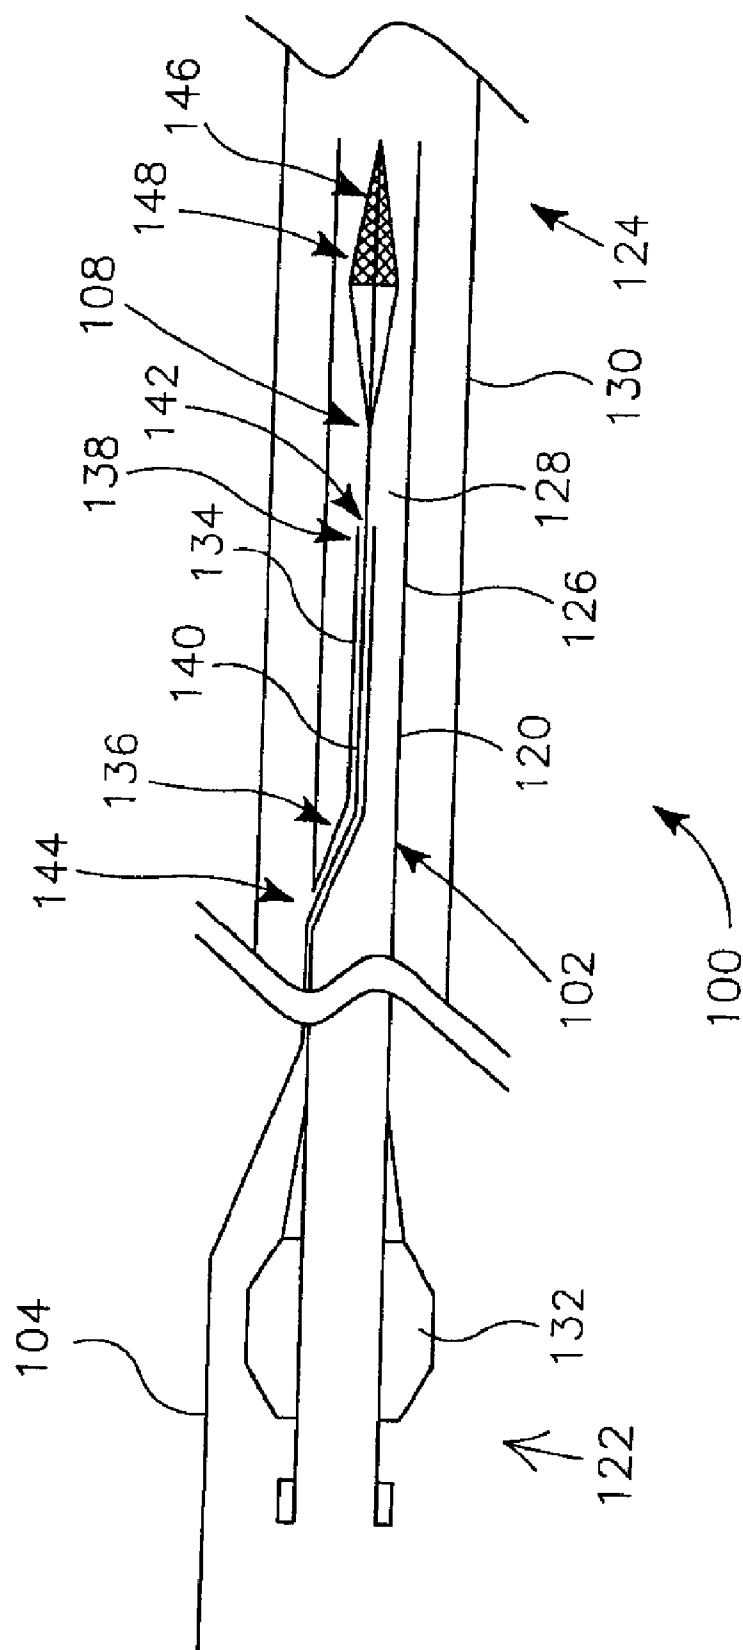


FIGURE 1

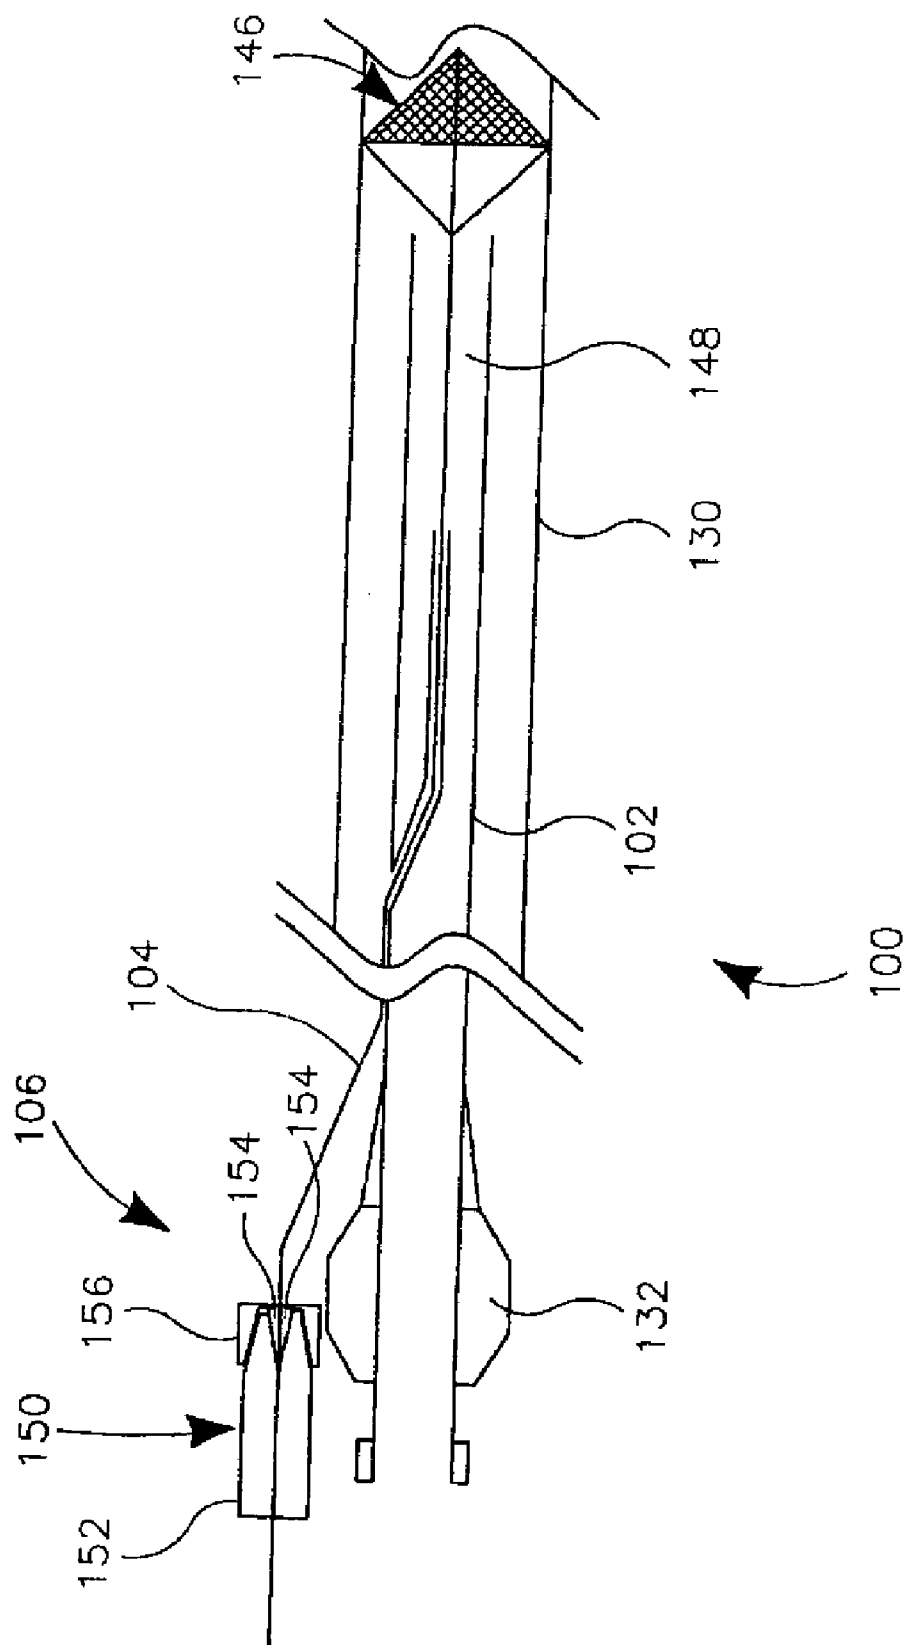
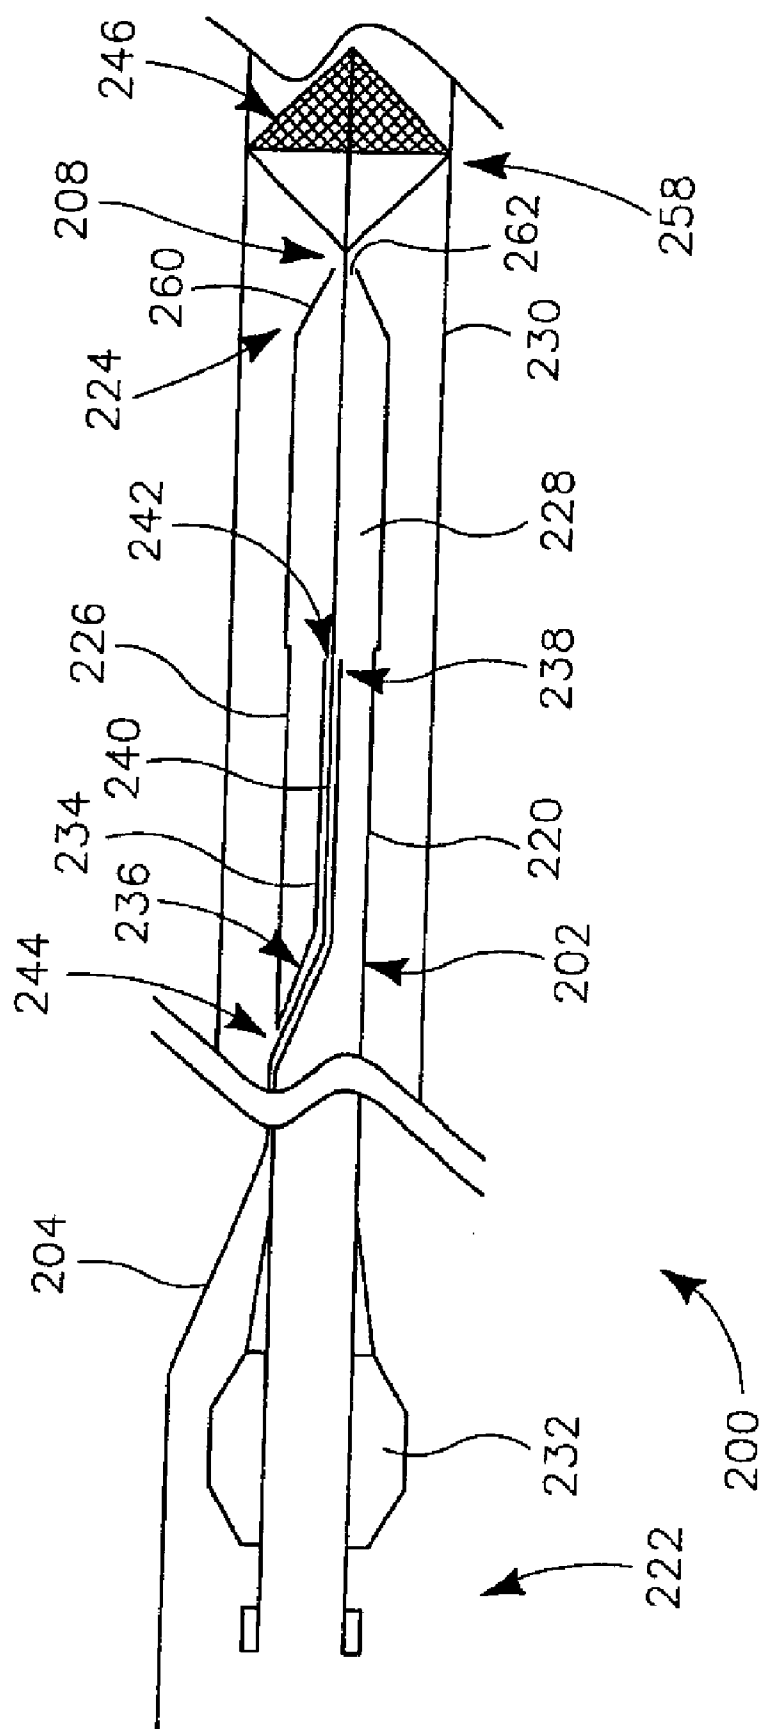


FIGURE 2



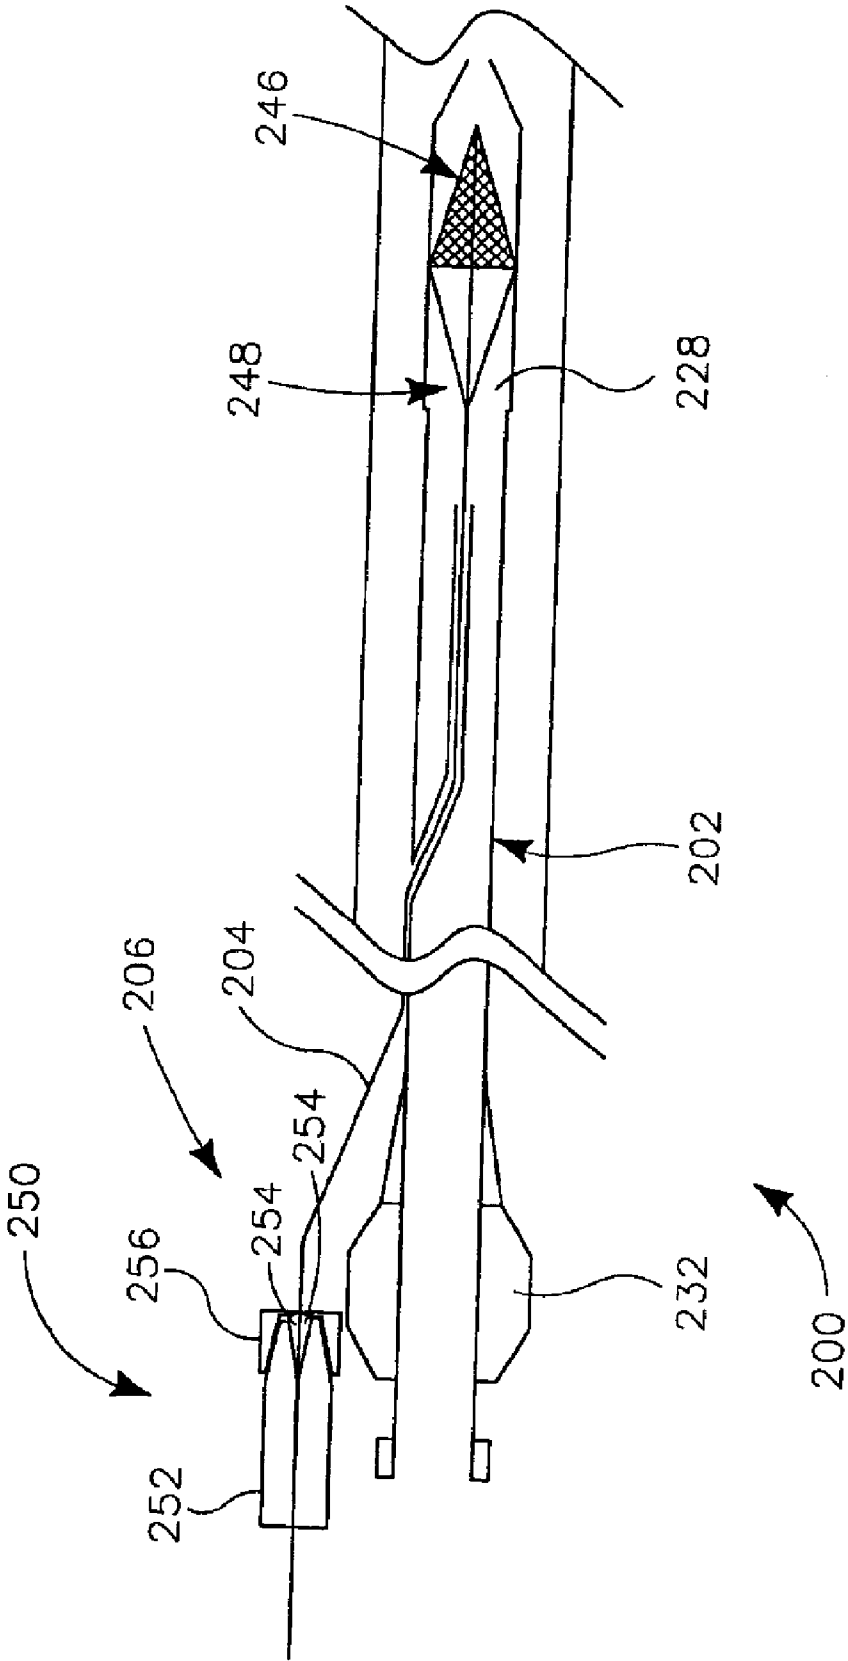
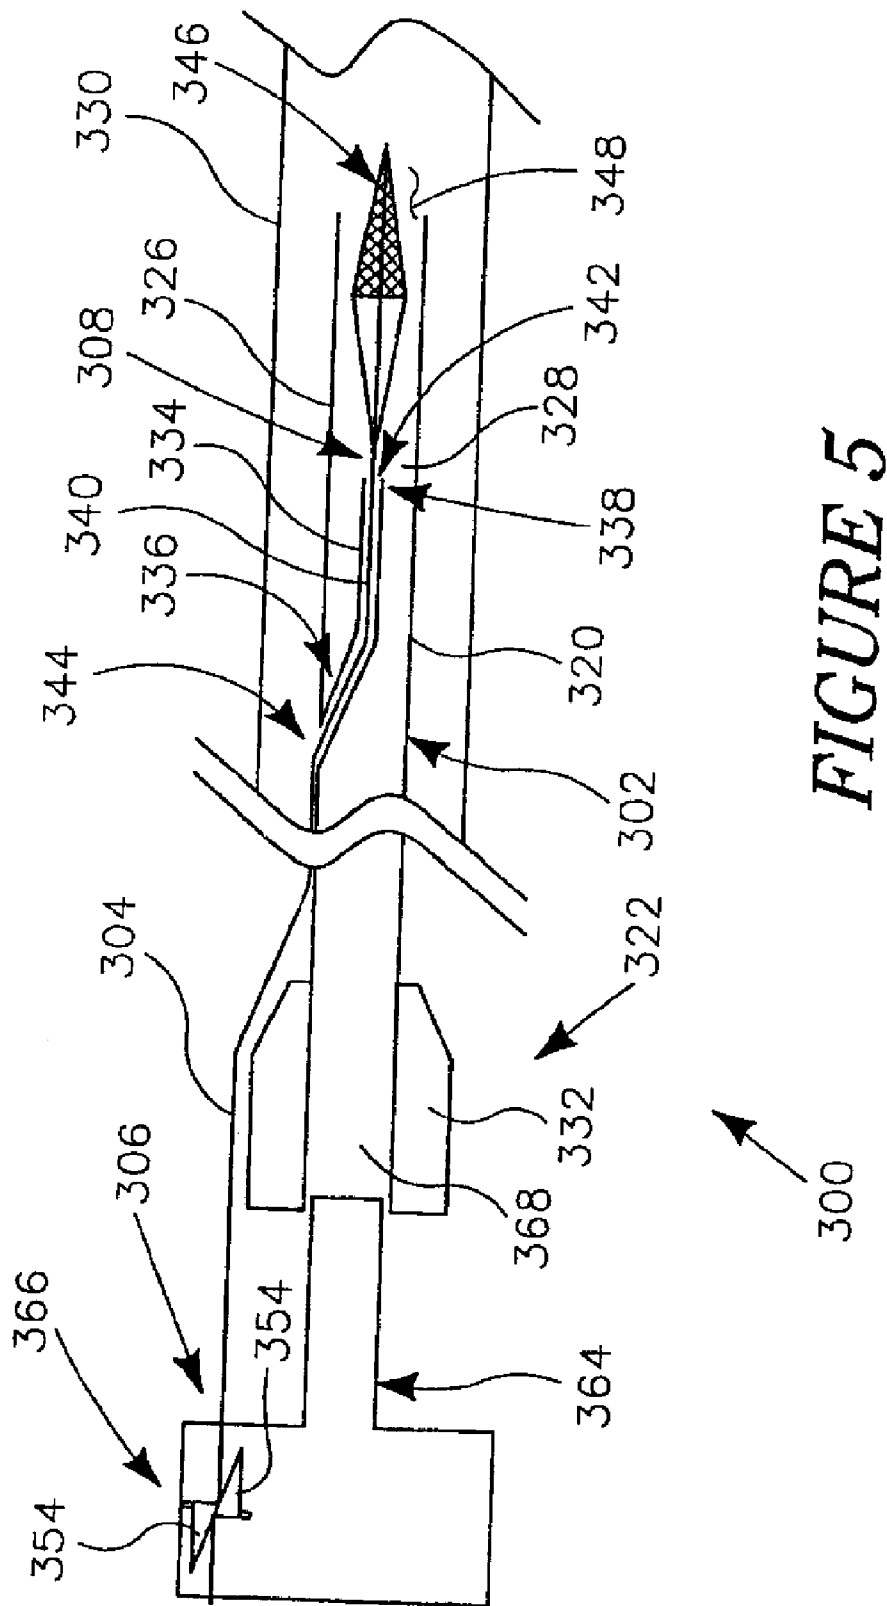


FIGURE 4



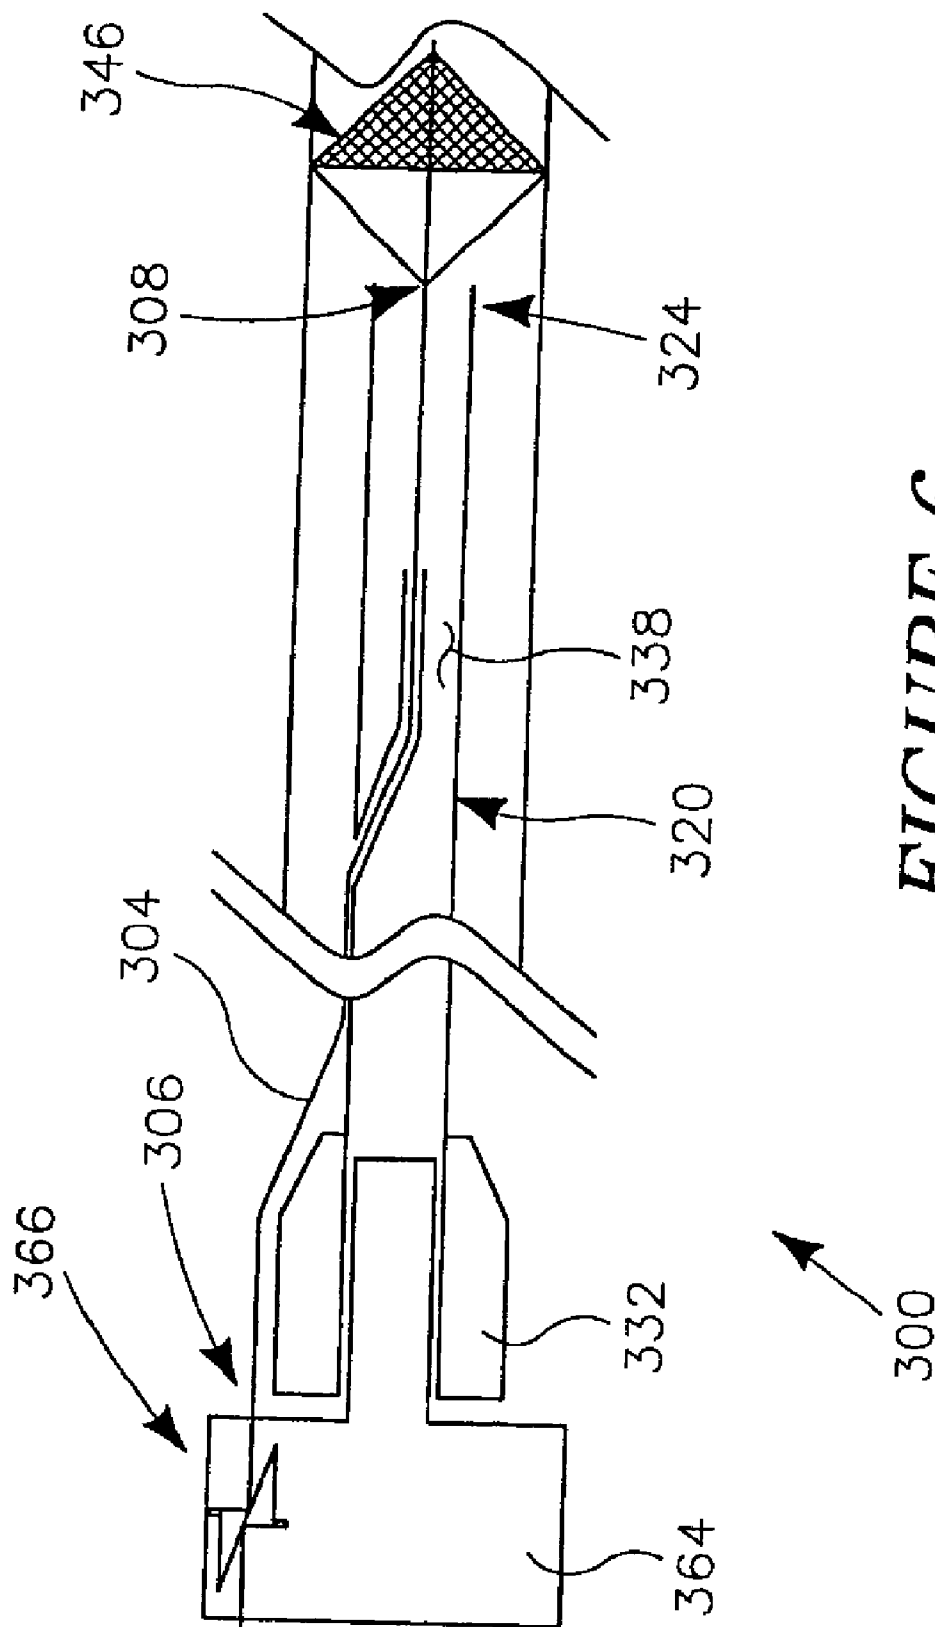
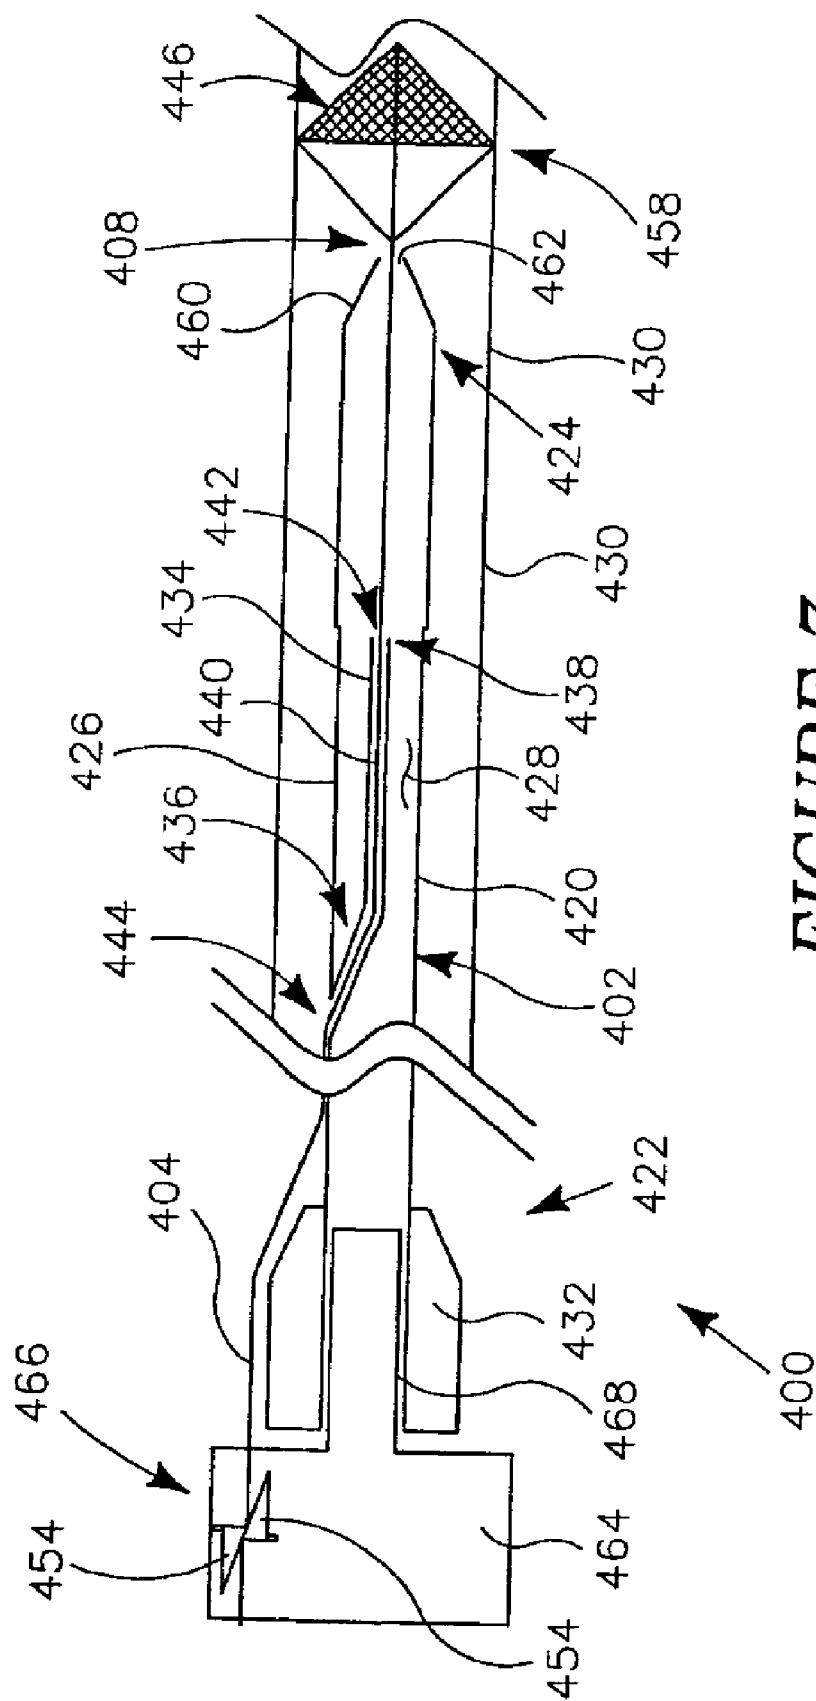


FIGURE 6



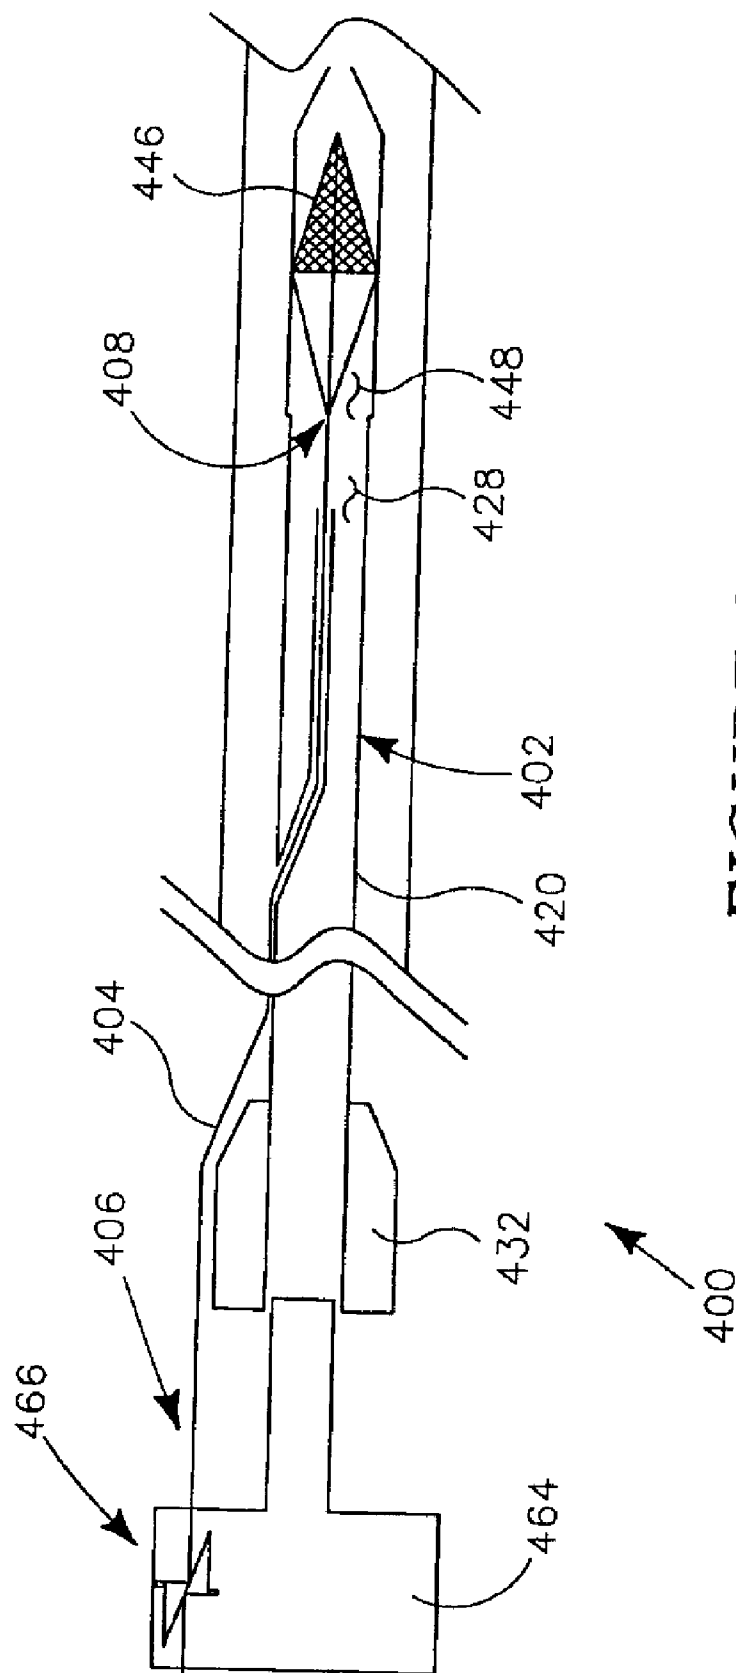
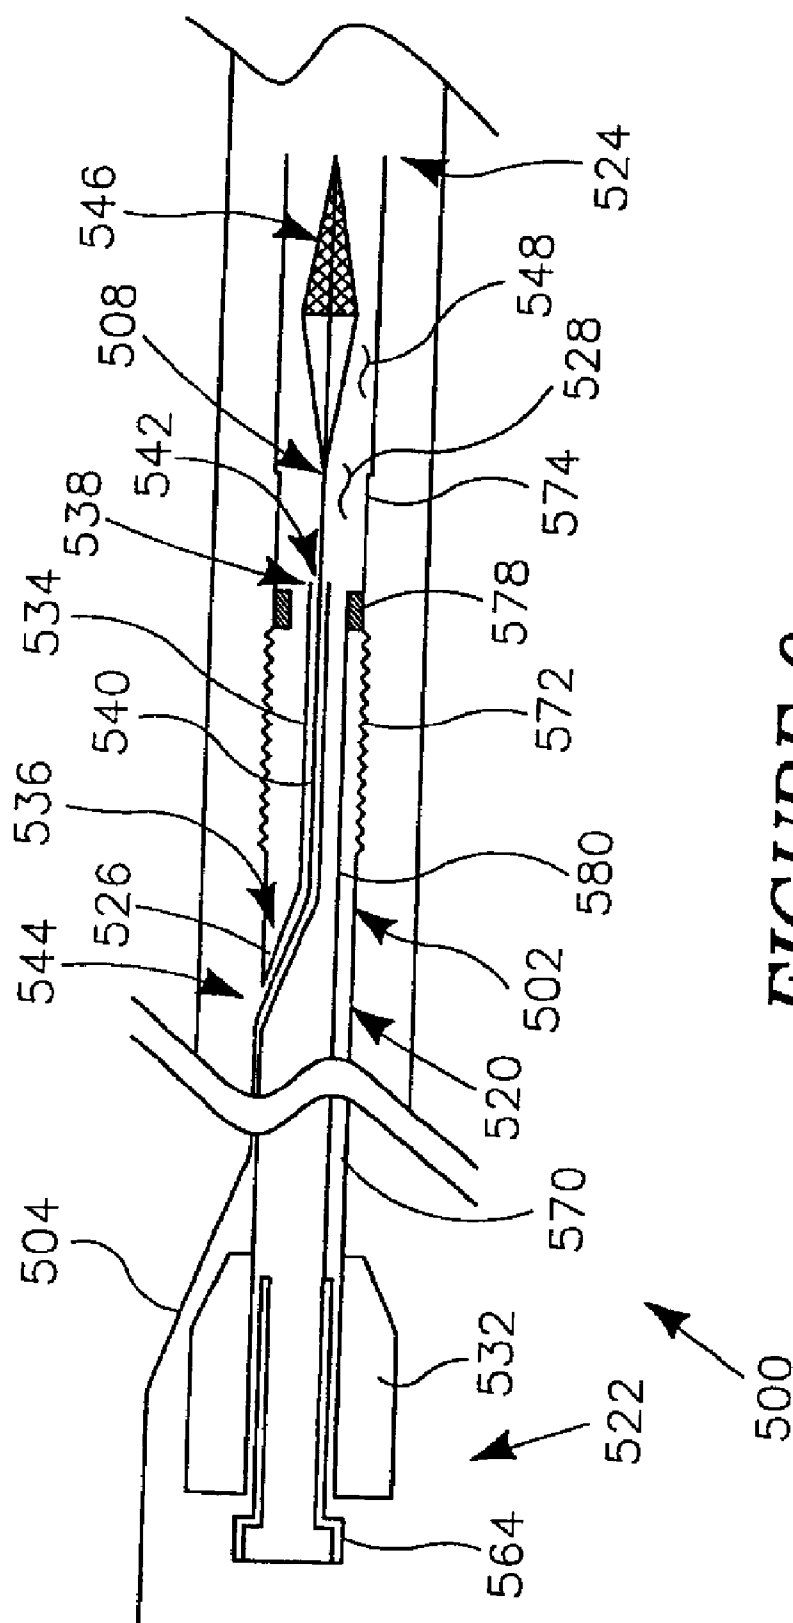


FIGURE 8



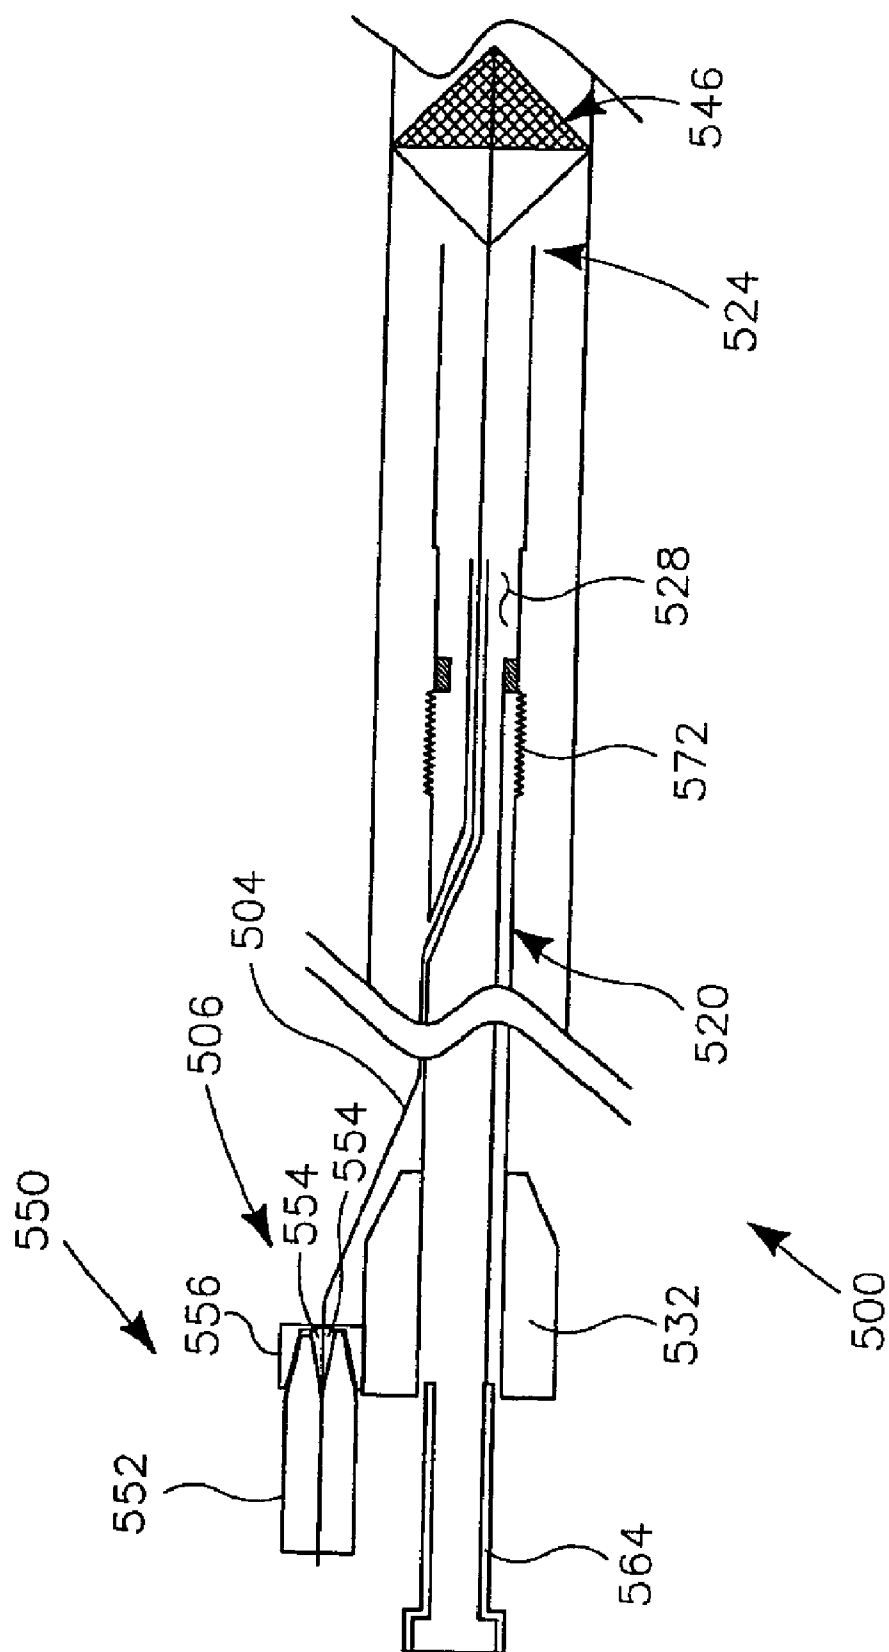
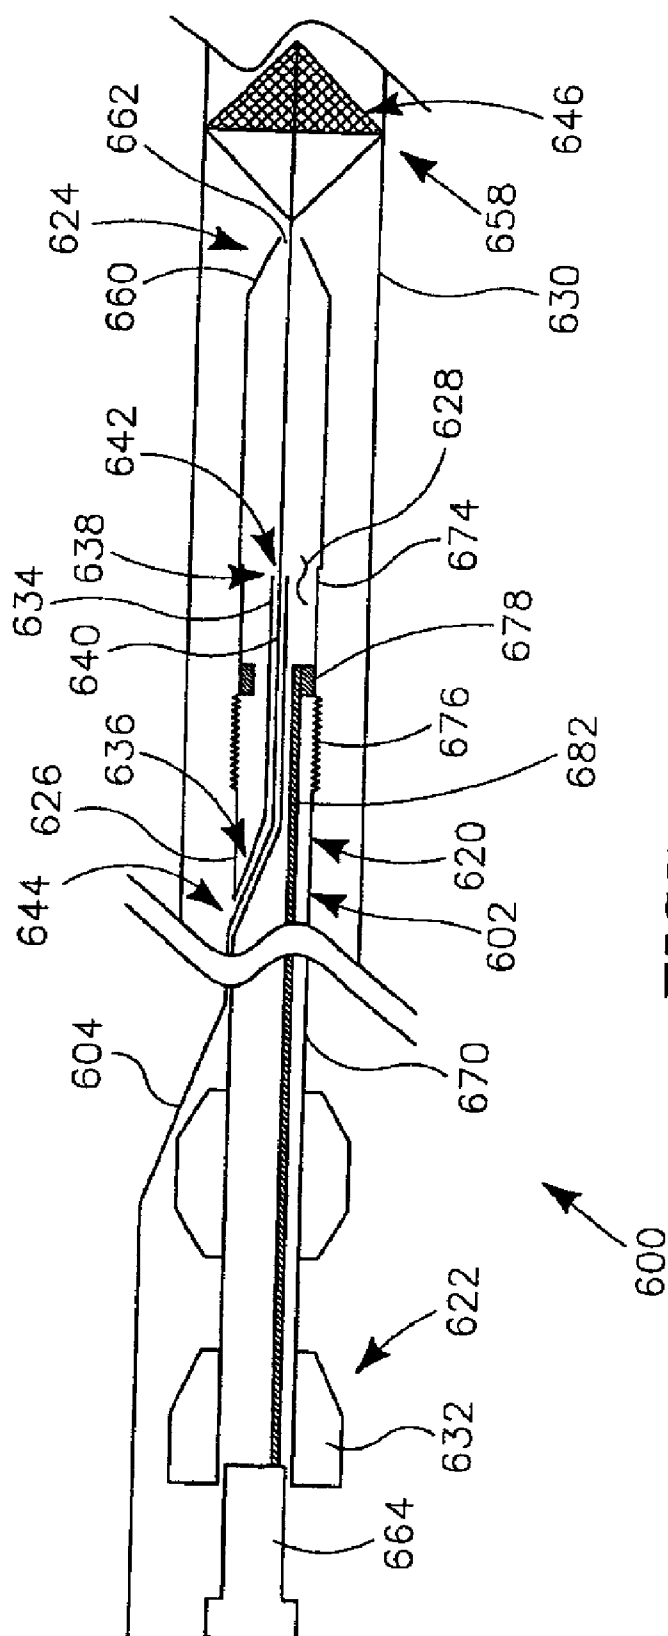


FIGURE 10



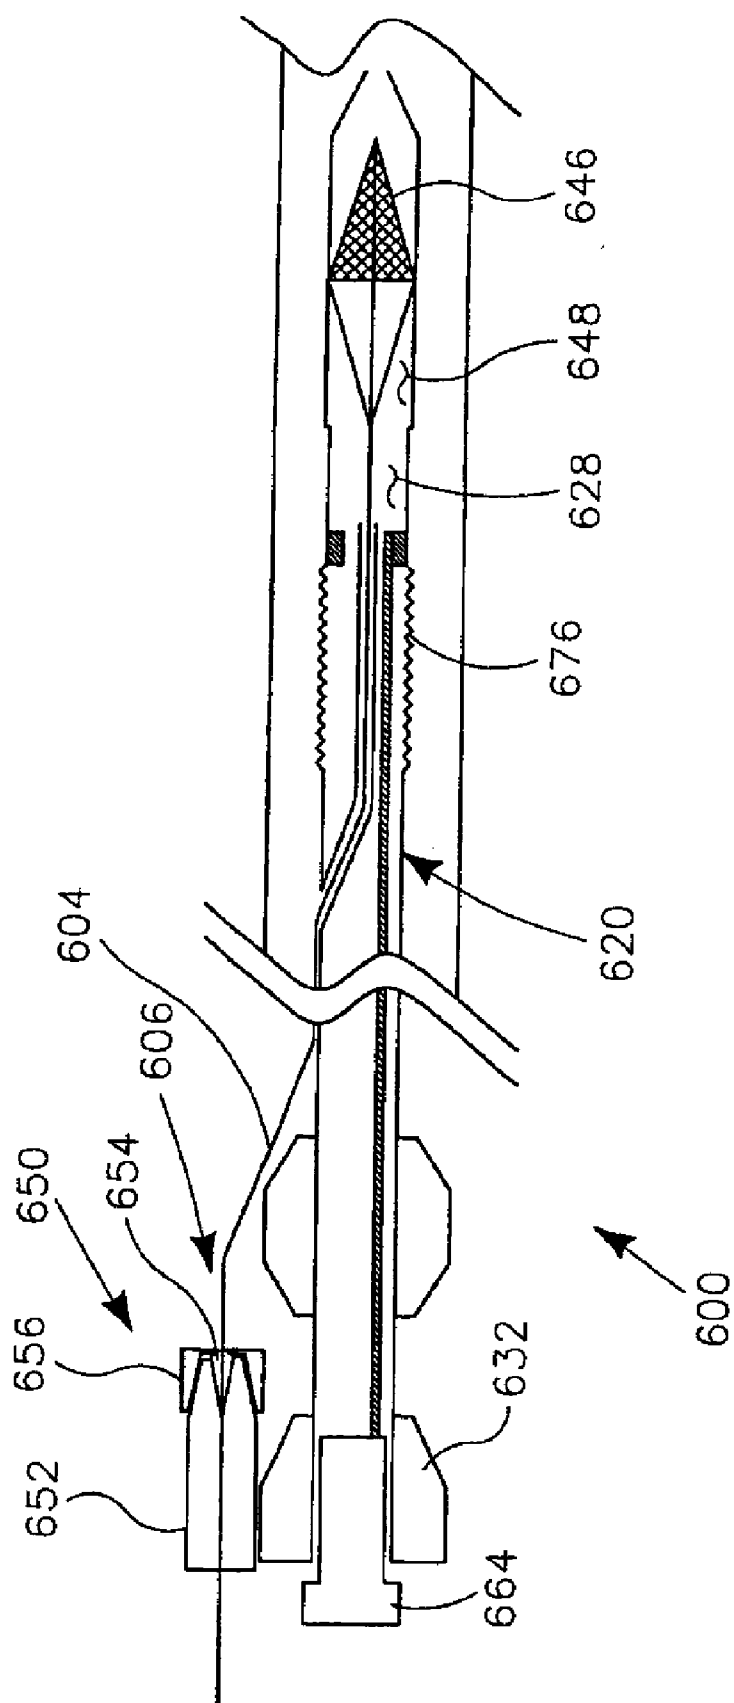
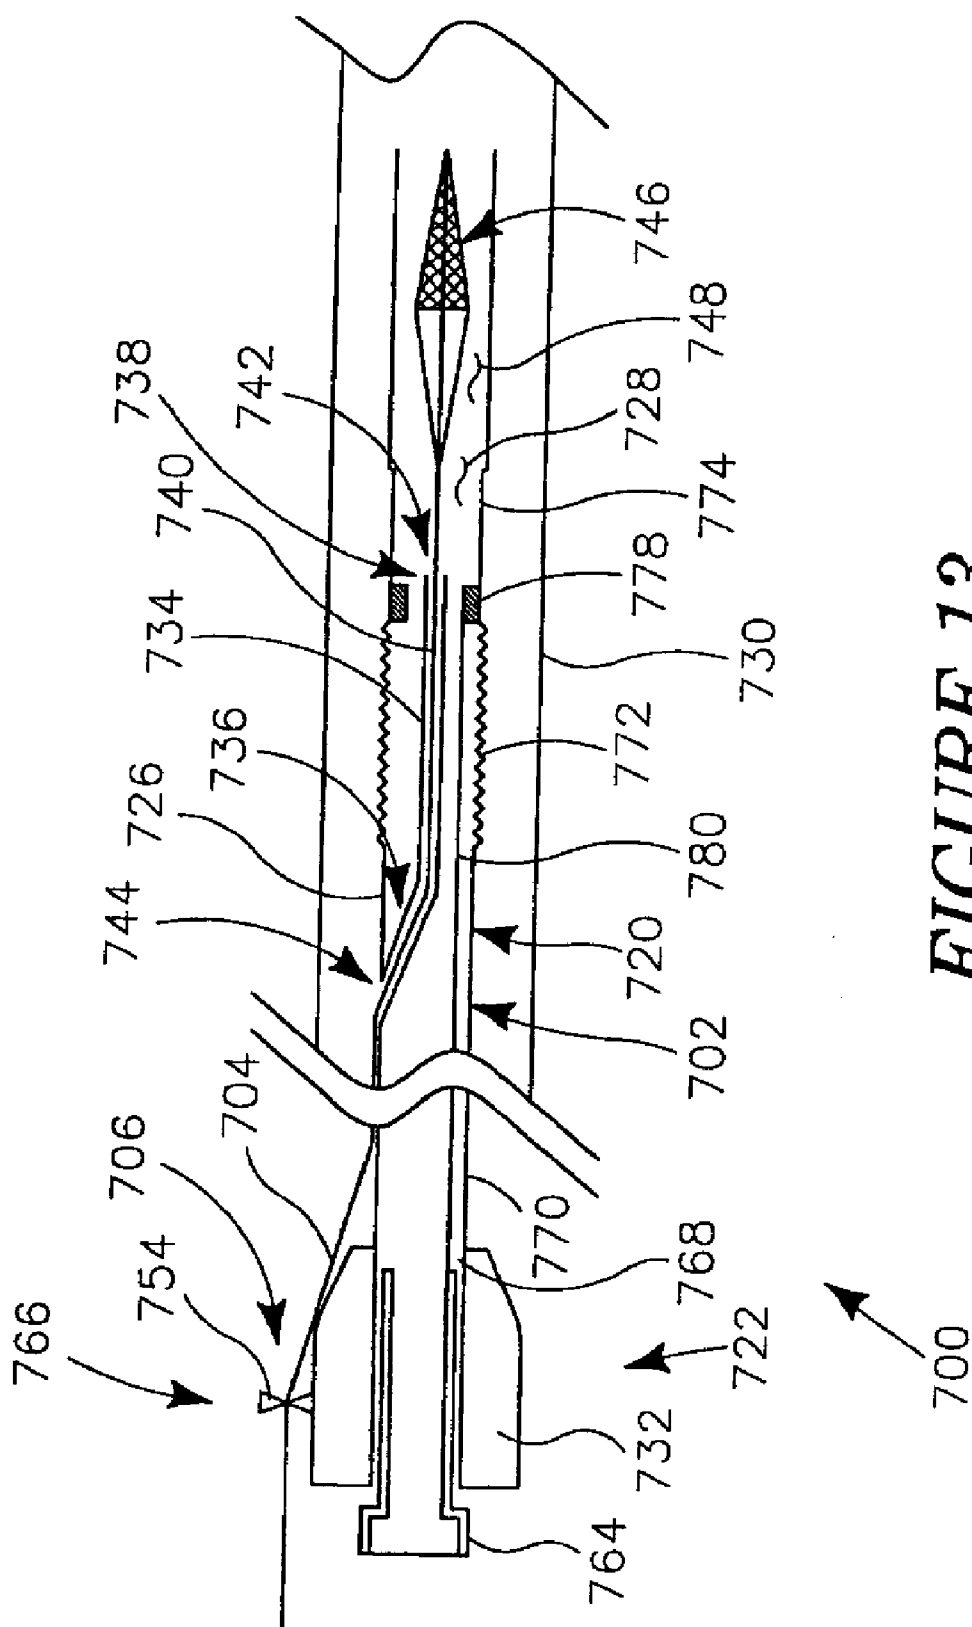


FIGURE 12



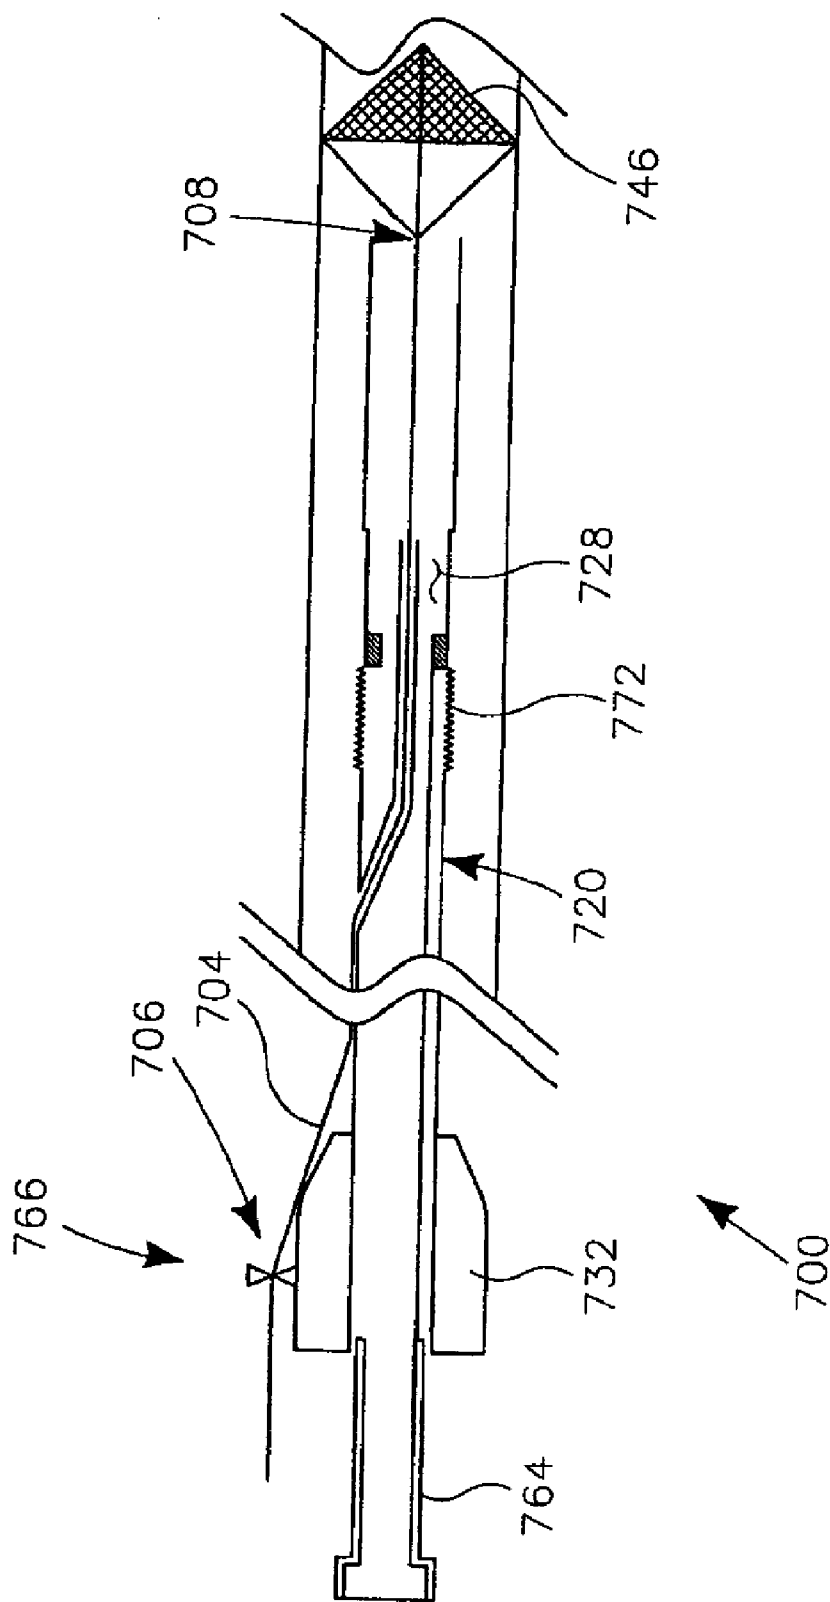


FIGURE 14

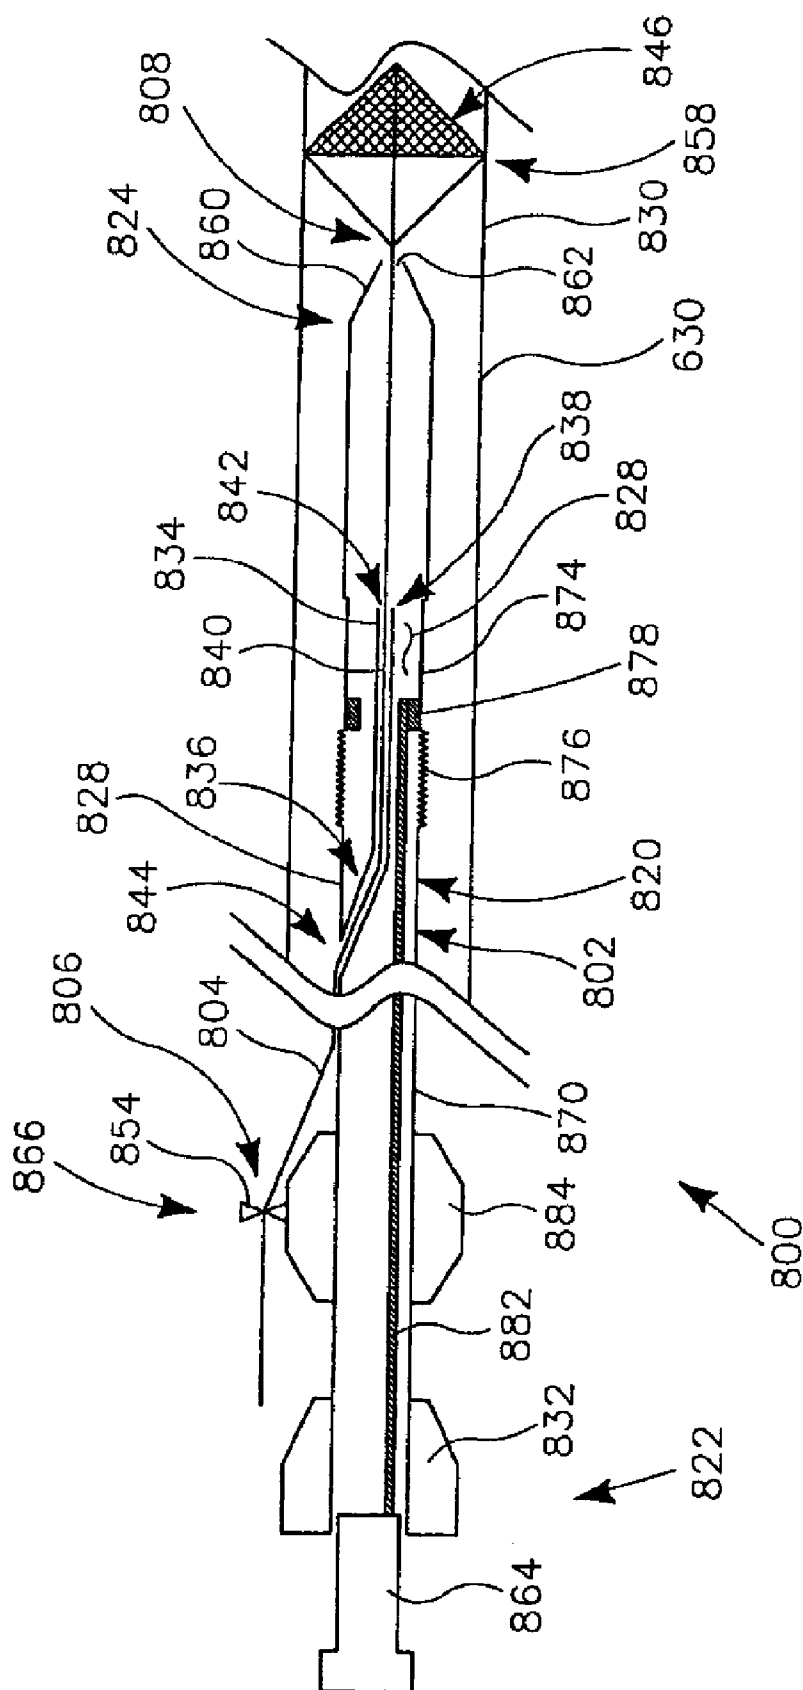


FIGURE 15

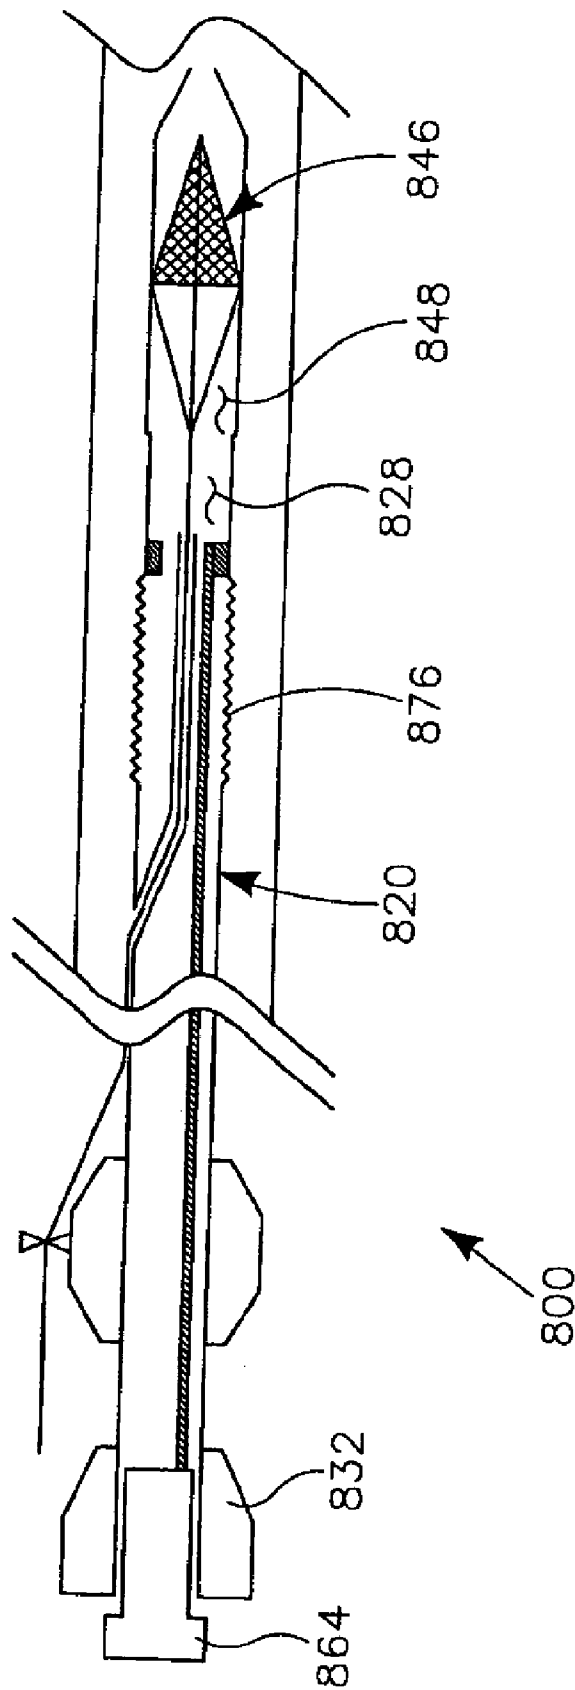


FIGURE 16

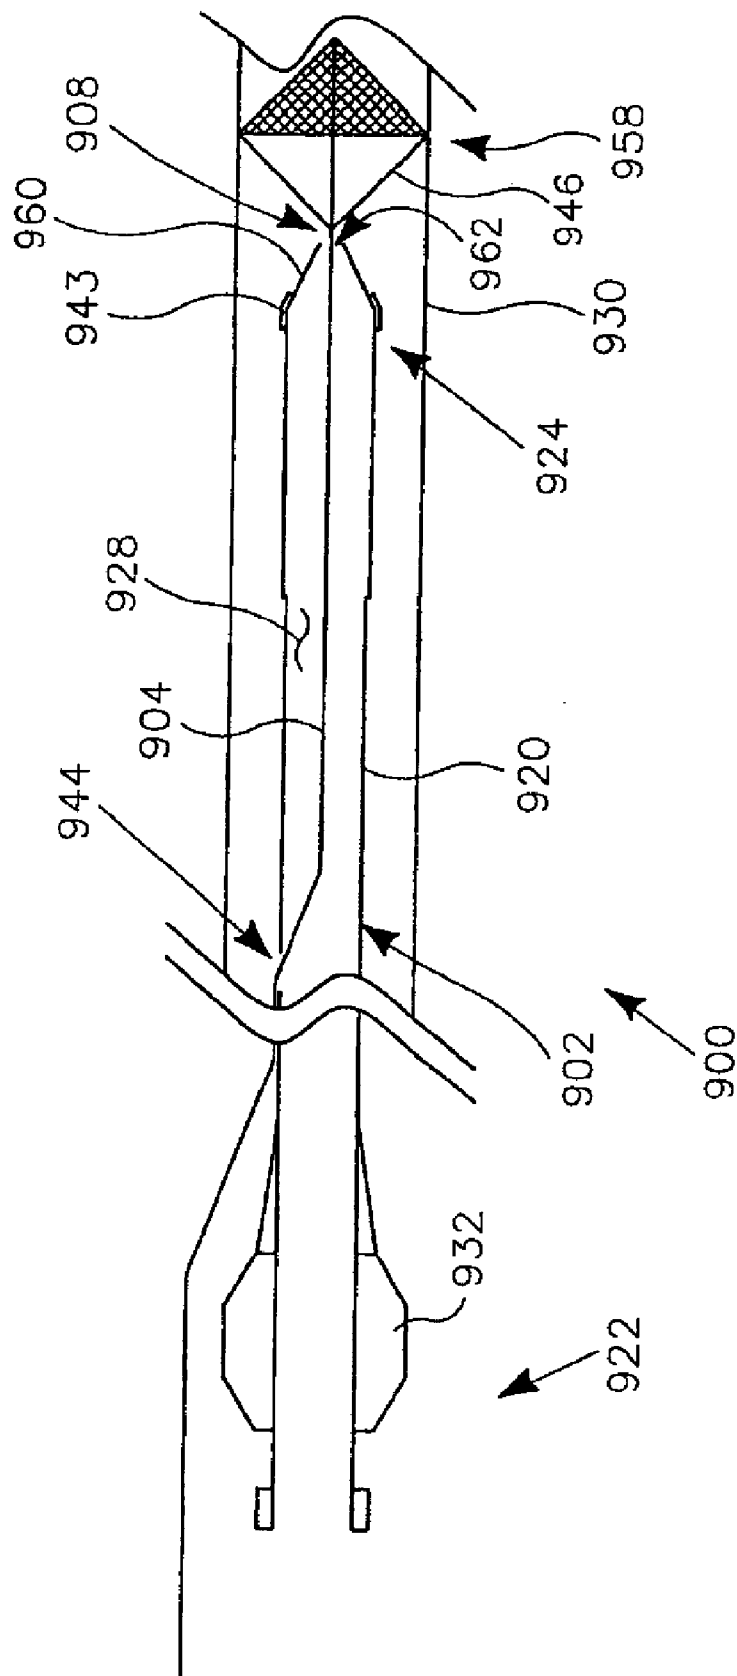
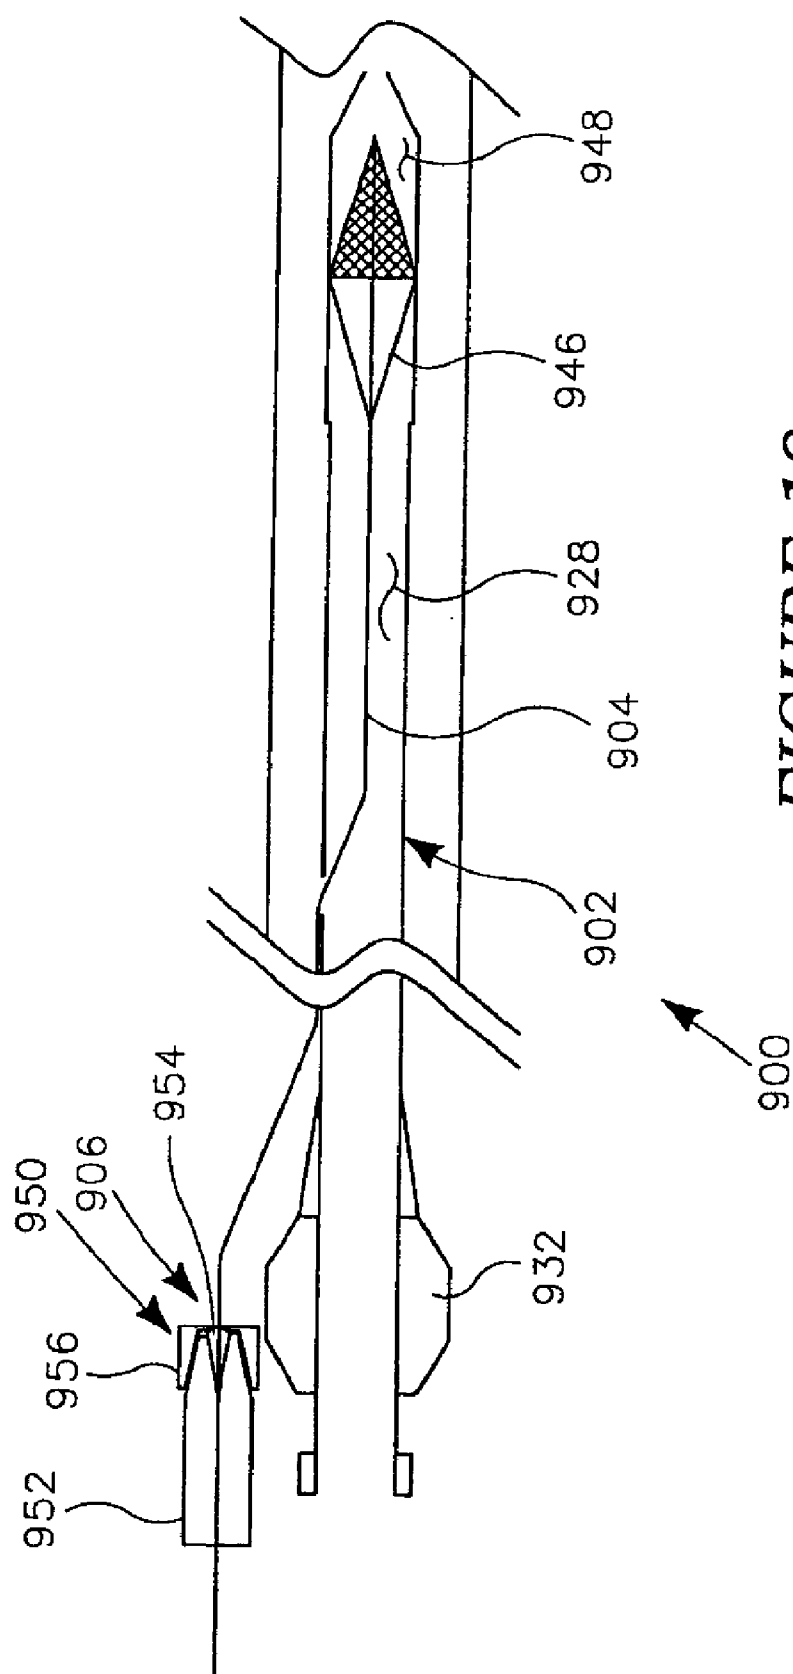
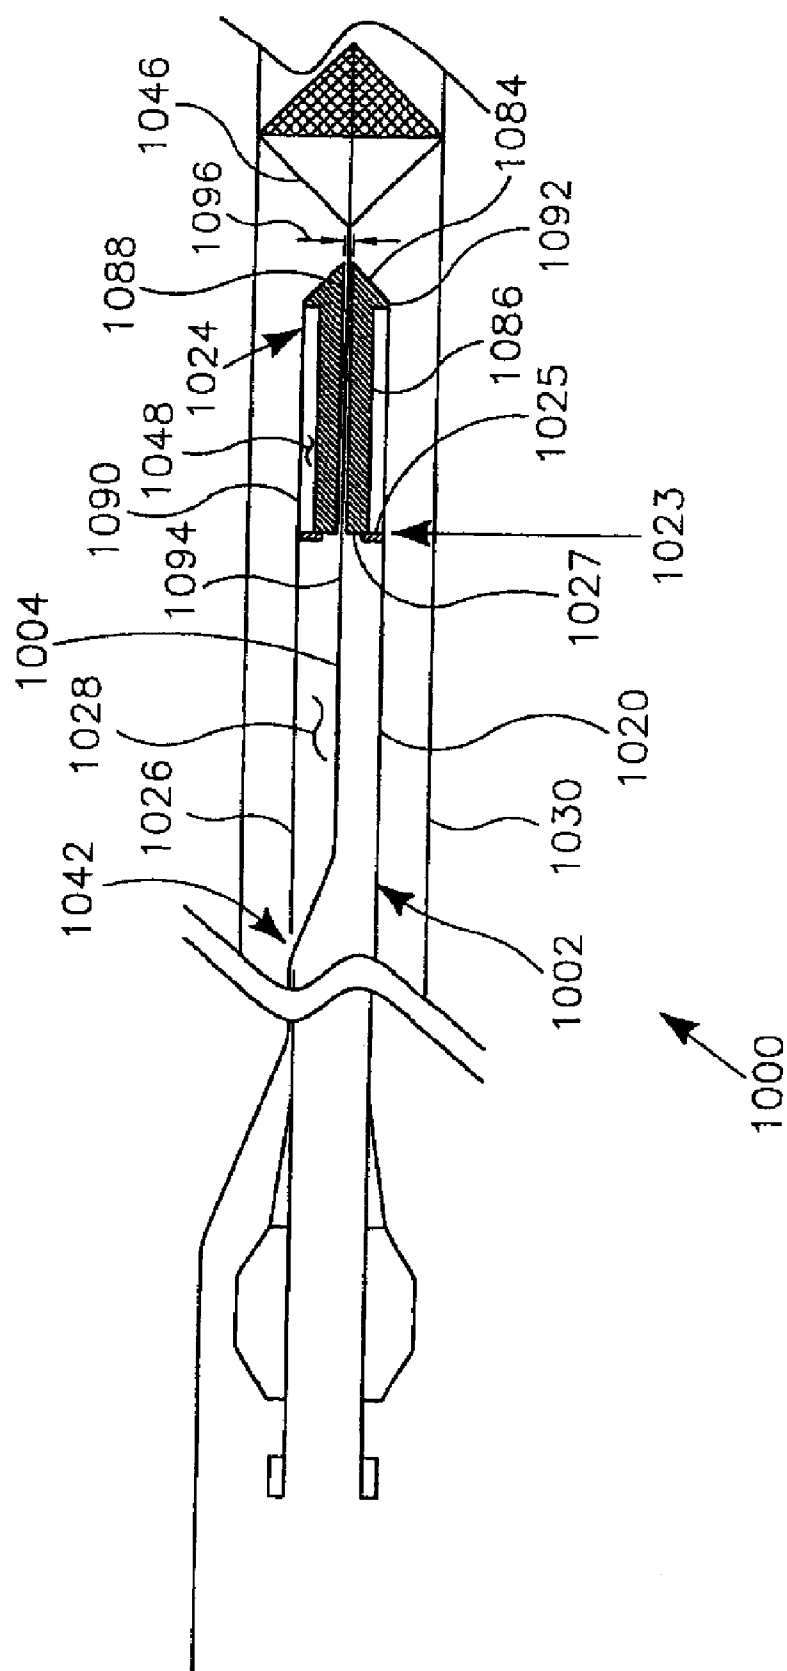


FIGURE 17





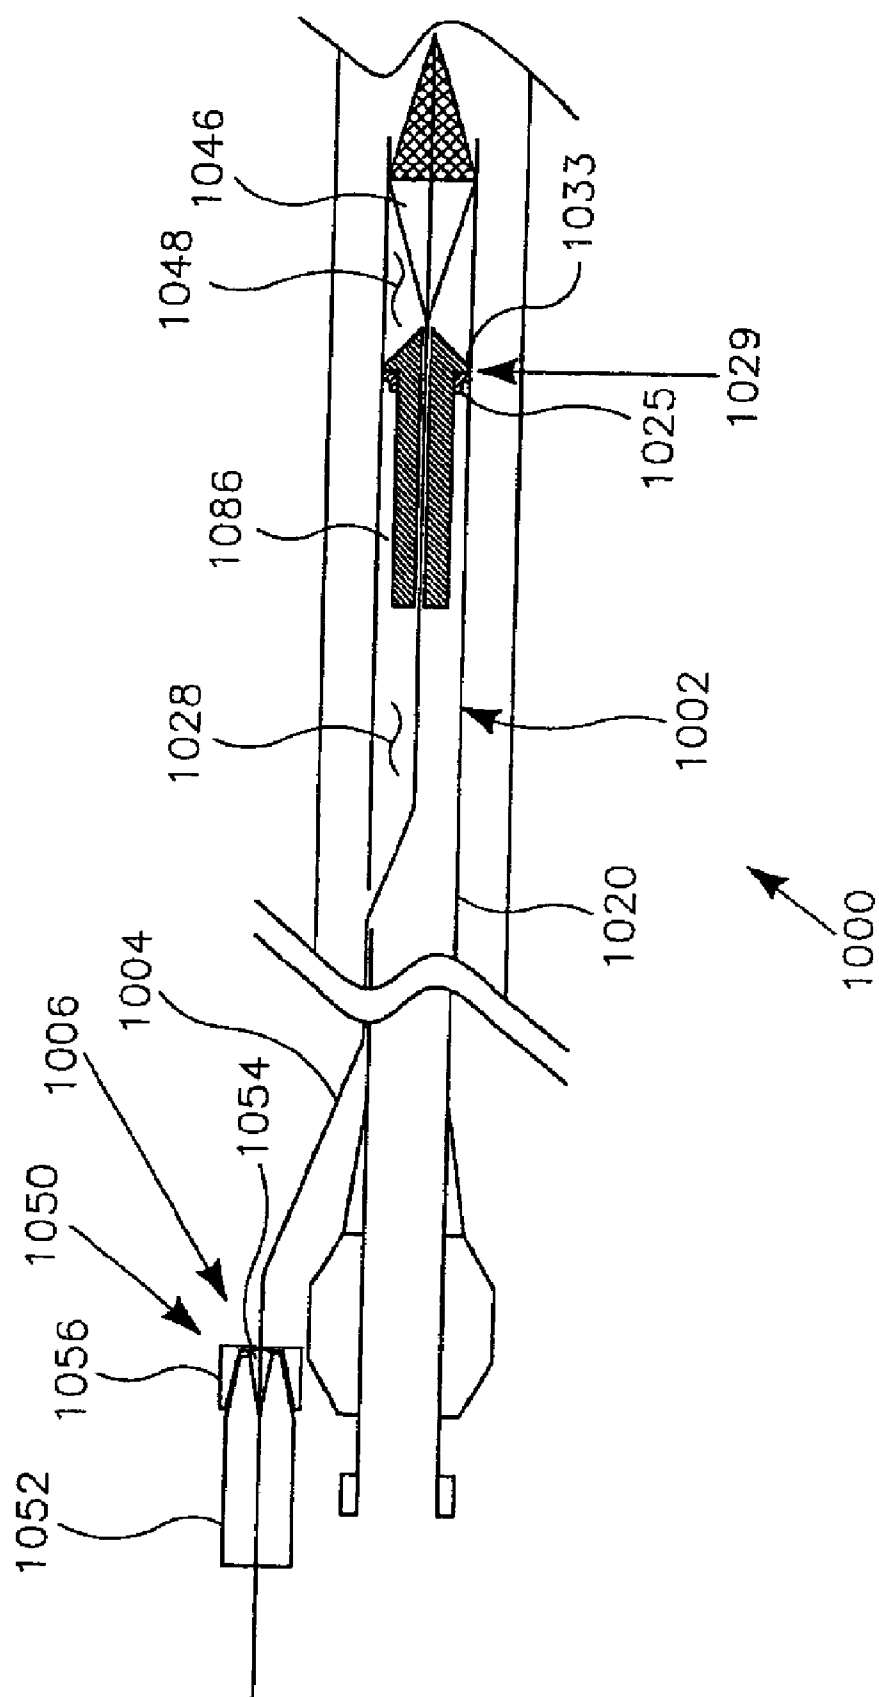


FIGURE 20

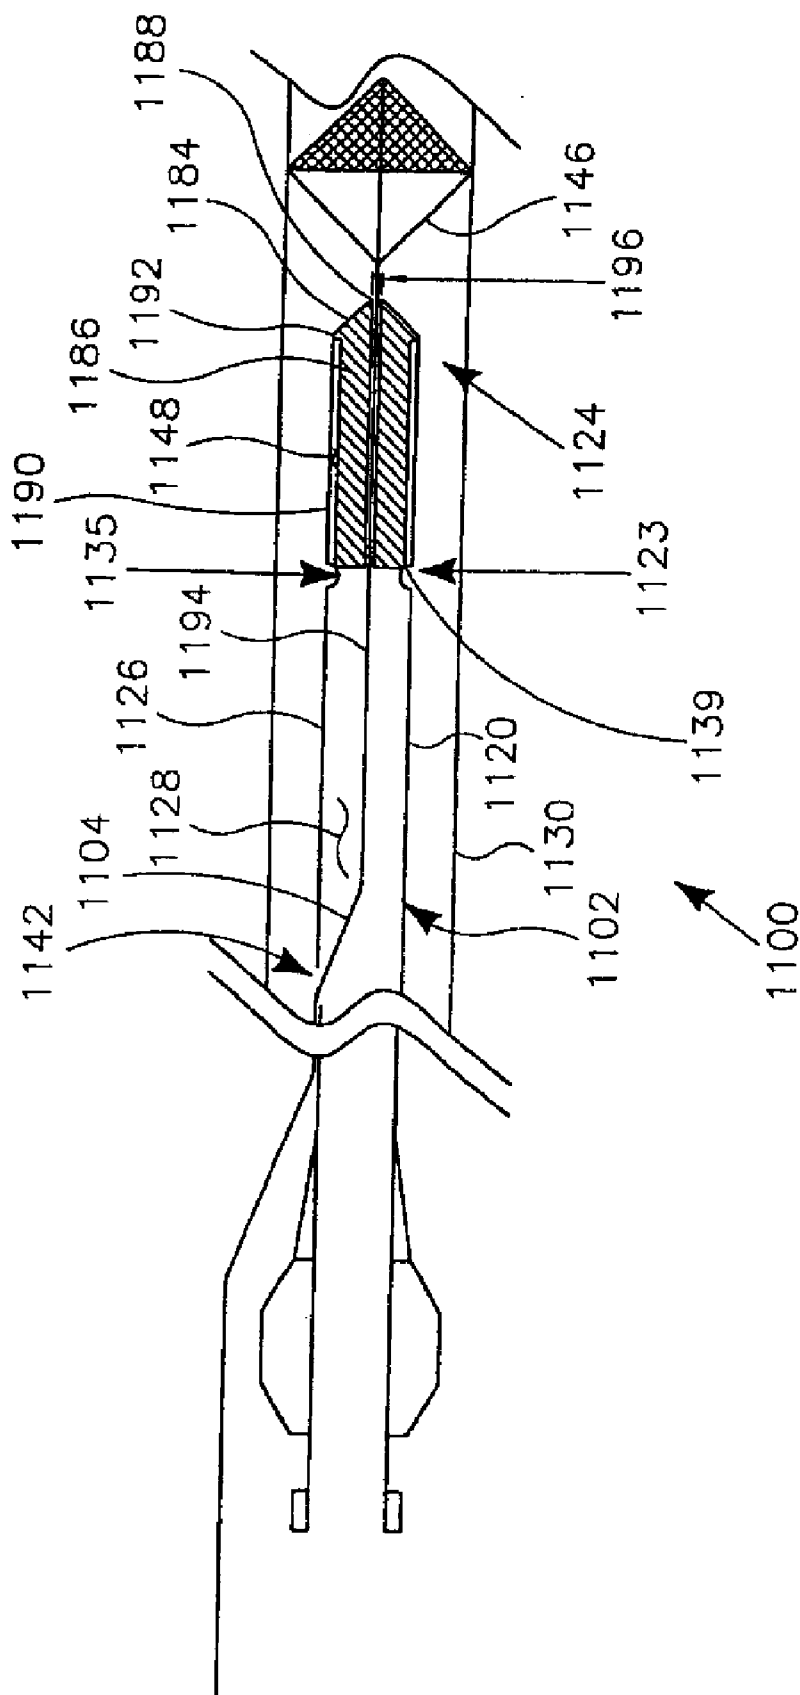


FIGURE 21

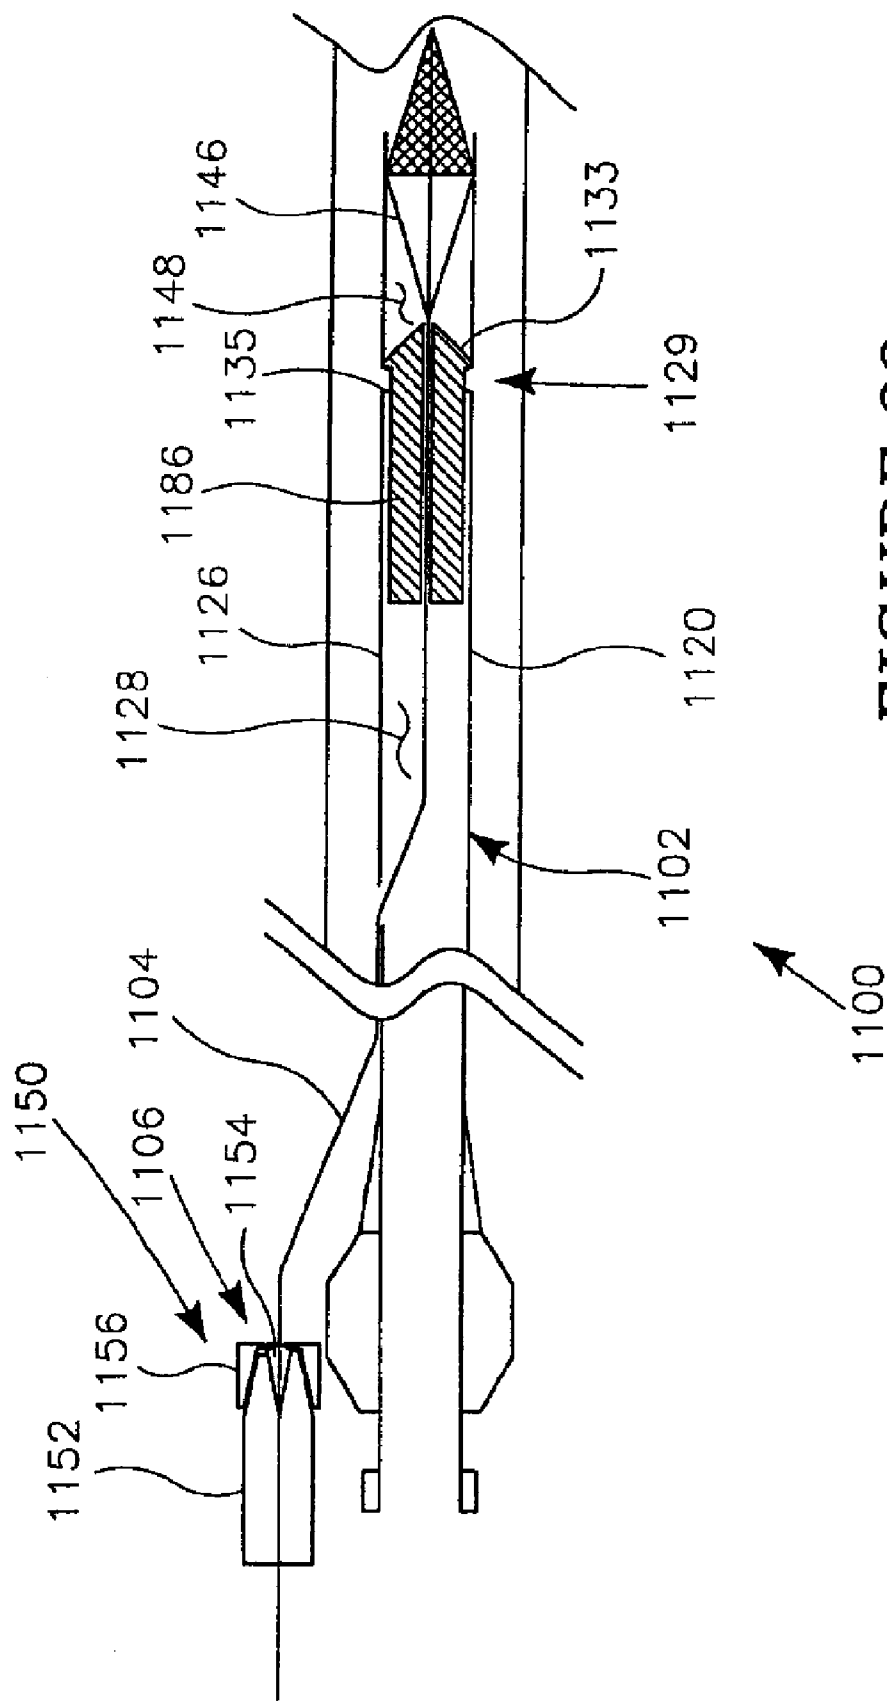
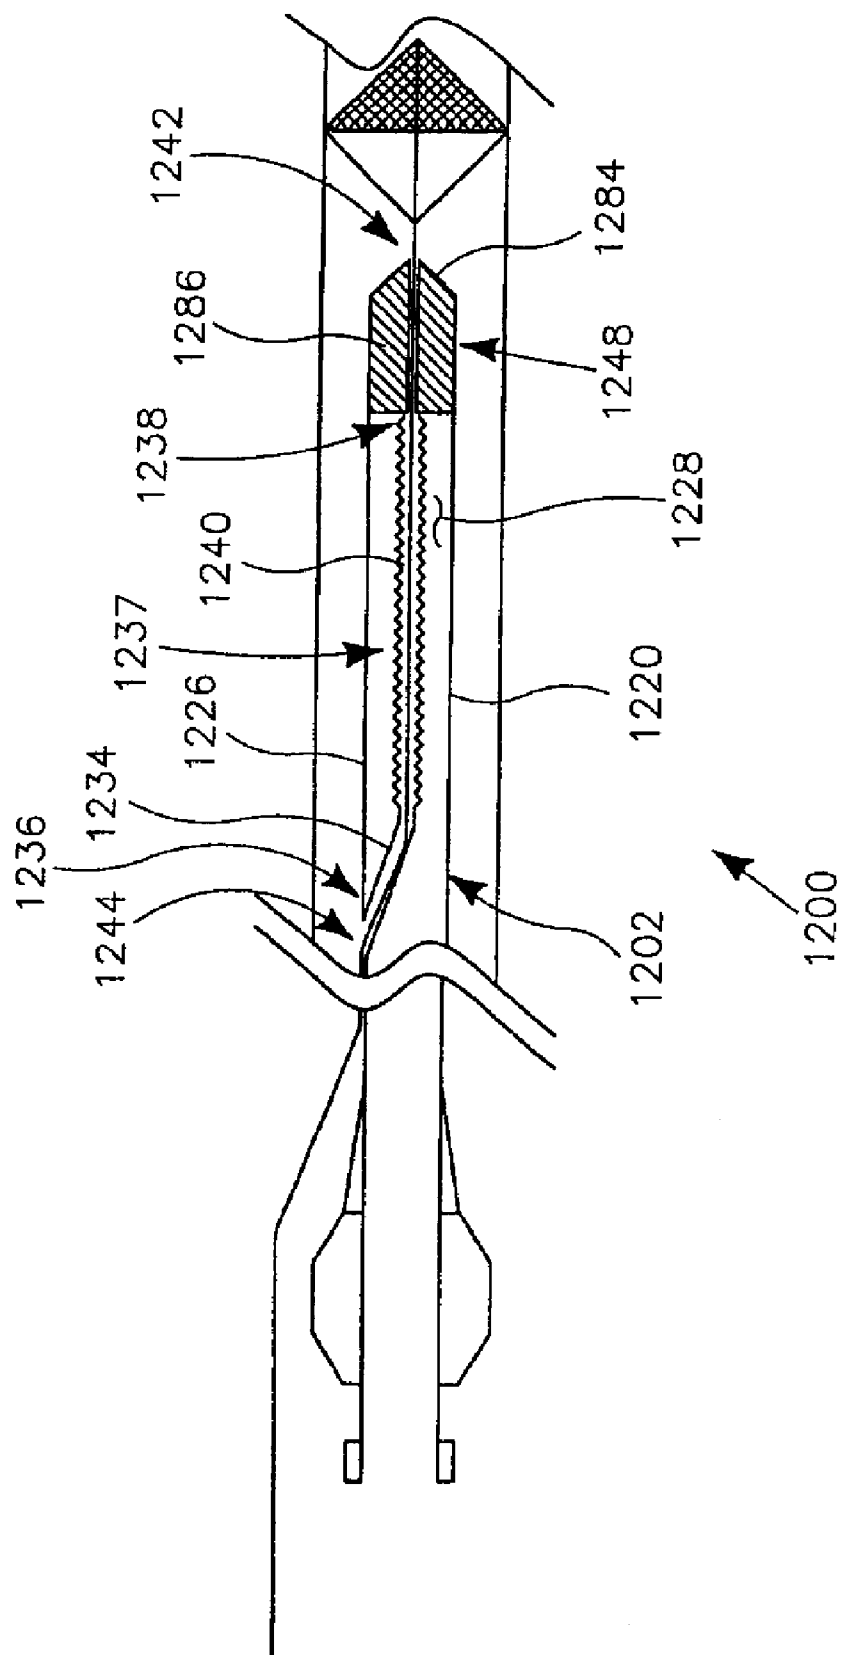


FIGURE 22



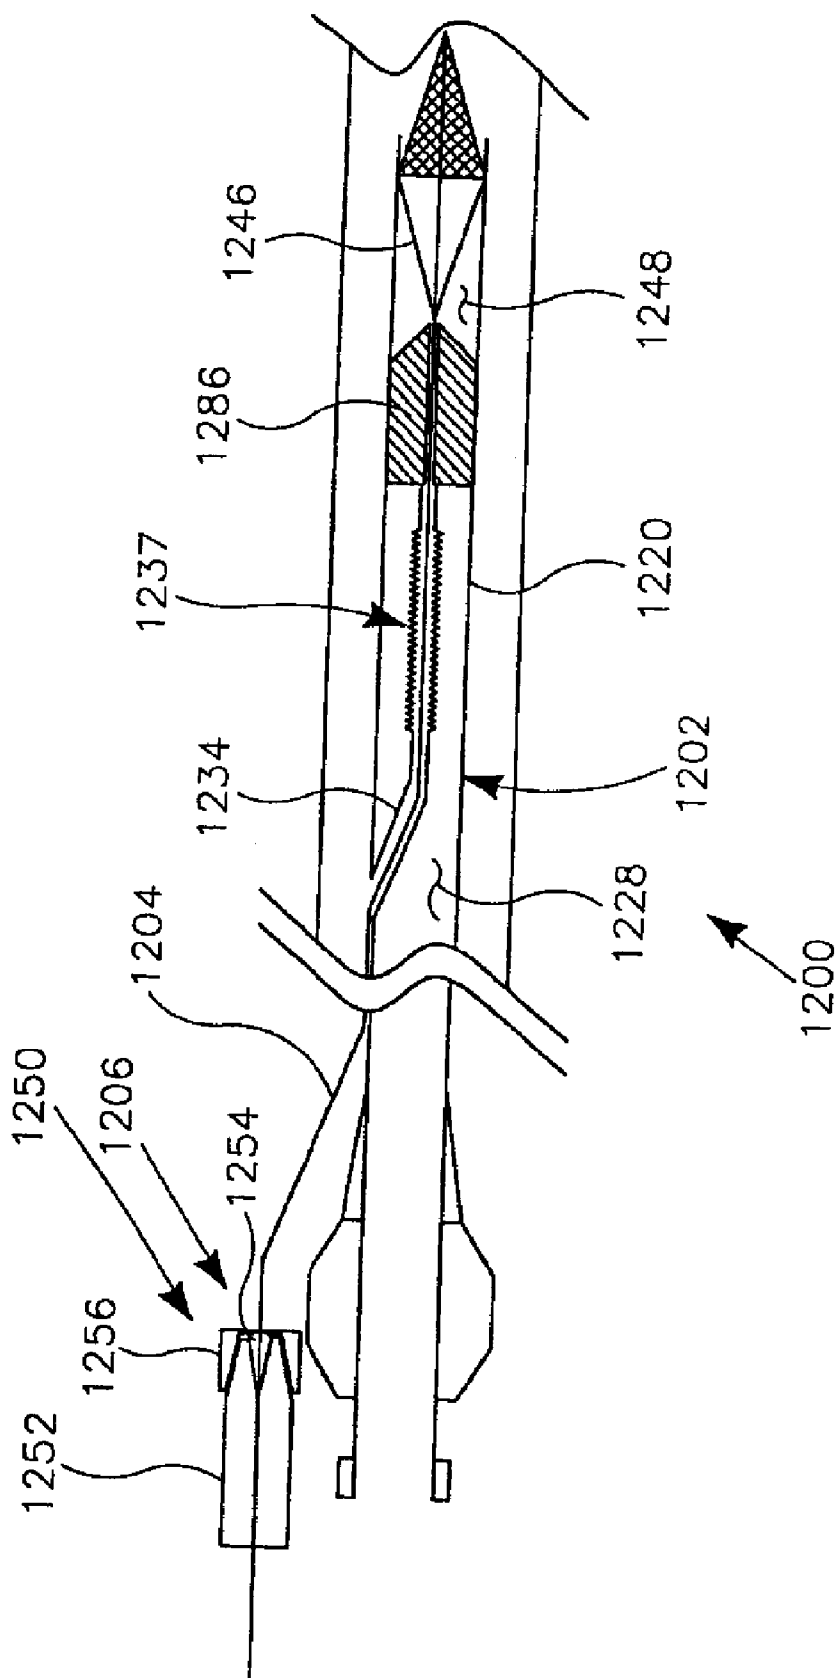


FIGURE 24

FILTER DELIVERY AND RETRIEVAL DEVICE

CROSS REFERENCE TO RELATED APPLICATION

[0001] This is a continuation of copending application Ser. No. 10/621,599 filed on Jul. 17, 2003, which is a continuation of application Ser. No. 09/801,263 filed on Mar. 7, 2001, now U.S. Pat. No. 6,616,681, which in turn claims priority to U.S. Provisional Application Ser. No. 60/238,188, filed Oct. 5, 2000.

FIELD OF THE INVENTION

[0002] The present invention relates generally to devices and methods for treating occluded or stenotic blood vessels. More particularly, the present invention relates to devices and methods for providing temporary placement of a filter in a blood vessel during a procedure to remove an occlusion or stenosis.

BACKGROUND OF THE INVENTION

[0003] It is critical that the heart muscle be well oxygenated so that the blood pumping action of the heart is not impaired. Blood vessels which have become occluded (blocked) or stenotic (narrowed) may interrupt the oxygen supply to the heart muscle.

[0004] Occluded or stenotic blood vessels may be treated with a number of medical procedures including angioplasty and atherectomy. Angioplasty techniques such as percutaneous transluminal angioplasty (PTA) and percutaneous transluminal coronary angioplasty (PTCA) are relatively non-invasive methods of treating a stenotic lesion. These angioplasty techniques typically involve the use of a guidewire and a balloon catheter. In these procedures, a balloon catheter is advanced over a guidewire such that the balloon is positioned proximate a restriction in a diseased vessel. The balloon is then inflated and the restriction in the vessel is opened. During an atherectomy procedure, the stenotic lesion is mechanically cut or abraded away from the blood vessel wall using an atherectomy catheter.

[0005] During atherectomy procedures, stenotic debris that is separated from the stenosis may be free to flow within the lumen of the vessel. If this debris enters the circulatory system, it may facilitate the formation of an occlusion in the neural vasculature, or in the lungs, both of which are highly undesirable. An occlusion in the neural vasculature may cause a stroke, and an occlusion in the lungs may interfere with the oxygenation of the blood. During angioplasty procedures, stenotic debris may also break loose due to manipulation of the blood vessel.

SUMMARY OF THE INVENTION

[0006] The present invention relates generally to devices and methods for treating occluded or stenotic blood vessels. More particularly, the present invention relates to devices and methods for providing temporary placement of a filter in a blood vessel during a procedure to remove an occlusion or stenosis. A filter delivery system in accordance with one exemplary embodiment of the present invention includes a catheter having an elongate shaft and a tubular member disposed within a shaft lumen defined by the elongate shaft. The elongate shaft also includes a proximal end, a distal end, and a wall defining the shaft lumen. The tubular member has

a first end fixed to the wall of the elongate shaft, and a second end disposed within the shaft lumen. The tubular member defines a guidewire lumen that is in fluid communication with a distal guidewire port defined by the second end of the tubular member. The catheter also includes a proximal guidewire port extending through the wall of the elongate shaft.

[0007] A filter may be disposed within a distal portion of the shaft lumen. A distal end of a guidewire is preferably fixed to the filter. The guidewire preferably extends through the distal guidewire port, the guidewire lumen, and the proximal guidewire port. The elongate shaft of the catheter may be moved proximally relative to the guidewire so that the filter is disposed outside of the shaft lumen. The filter is preferably free to assume an expanded configuration when it is outside of the shaft lumen.

[0008] The catheter may be moved relative to the guidewire, for example, by grasping a proximal portion of the guidewire and applying a pulling force to a hub of the catheter. The pulling force may be applied to the hub until the filter is deployed in the expanded configuration. The pulling force may also be continued until the catheter is removed from the blood vessel. Once the catheter has been removed from the blood vessel, the guidewire may be utilized to guide additional catheters (e.g., balloon catheters, atherectomy catheters, etc.) as they are advanced through the blood vessel.

[0009] A wire gripper may be used to aid in grasping the guidewire. One exemplary embodiment of a wire gripper includes a handle and a plurality of jaws for grasping the guidewire. A knurl nut fitting is used to urge the jaws against the guidewire.

[0010] An additional exemplary embodiment of a filter delivery system in accordance with the present invention includes a catheter having an elongate shaft and a hub disposed about the elongate shaft proximate the proximal end thereof. A slider is disposed in sliding engagement with a cavity of the hub. The slider includes a wire lock having a plurality of jaws. The wire lock may be used to selectively fix a proximal portion of a guidewire to the slider. A distal end of the guidewire is preferably fixed to a filter which is disposed in a shaft lumen of the catheter.

[0011] During a procedure to deliver the filter to a target location in a blood vessel, the hub and the shaft of the catheter may be moved proximally relative to the slider and the guidewire. When the hub is moved proximally relative to slider, the filter is urged out of the shaft lumen of the catheter. Once the filter is out of the shaft lumen it is free to assume an expanded configuration. The sliding relationship between the slider and the hub gives the user of the filter deployment system a defined distance to move the slider relative to the hub when deploying the filter.

[0012] Yet another exemplary embodiment of a filter delivery system in accordance with the present invention includes a catheter having an elongate shaft including a proximal portion, a distal portion, and a longitudinally collapsible portion disposed between the proximal portion and the distal portion. A ring is fixed to the distal portion of the elongate shaft distally of the collapsible portion. A pull wire is disposed within a shaft lumen defined by the elongate shaft. The distal end of the pull wire is fixed to the ring and

the proximal end of the pull wire is fixed to a slider. The slider is disposed in sliding engagement with a hub that is disposed about a proximal end of the elongate shaft. In a preferred embodiment, the slider and the pull wire may be used to selectively collapse the longitudinally collapsible portion of the elongate shaft. The collapsible portion of the elongate shaft is preferably collapsed by urging the slider proximally relative to the hub. In a preferred method, the guidewire is held stationary relative to the slider, while the slider is moved proximally.

[0013] A filter retrieval system in accordance with an exemplary embodiment of the present invention includes a retrieval catheter which may be utilized to retrieve a filter that was previously delivered to a target location in a blood vessel. The filter may be delivered to the target location, for example, using a filter delivery system in accordance with an exemplary embodiment of the present invention.

[0014] During a retrieval procedure, the retrieval catheter may be advanced along the guidewire until a distal end of the catheter is proximate the filter. In a preferred embodiment, the catheter includes an elongate shaft and a cone disposed at a distal end of the elongate shaft. The cone preferably has a generally tapered shape that may aid in advancing the catheter through the blood vessel. Also in a preferred embodiment, the cone comprises a flexible material, allowing the cone to deflect as the filter is drawn through an aperture defined by the cone. Embodiments of the cone are possible in which the cone is adapted to fold proximally. Embodiments of the cone are also possible in which the aperture of the cone is adapted to expand radially as the filter passes through the aperture. The distal end of the catheter may be advanced distally relative to the guidewire so that the filter is disposed within a shaft lumen of the catheter.

[0015] An additional exemplary embodiment of a filter retrieval system in accordance with the present invention includes a catheter having an elongate shaft and a hub disposed about the elongate shaft proximate the proximal end thereof. A slider is disposed in sliding engagement with a cavity of the hub. The slider includes a wire lock having a plurality of jaws. The wire lock may be used to selectively fix a proximal portion of a guidewire to the slider. A distal end of the guidewire is preferably fixed to a filter which is disposed within a blood vessel.

[0016] During a filter retrieval procedure, the hub and the elongate shaft of the catheter may be moved distally relative to the slider and the guidewire. During the movement of the elongate shaft, the longitudinal position of the filter is preferably fixed by the guidewire, since the proximal portion of the guidewire is fixed to the slider by the wire lock. As the catheter is advanced distally, it preferably engulfs the filter. The sliding relationship between the slider and the hub gives the user of the system a defined distance to move the slider relative to the hub when retrieving the filter.

[0017] Yet another exemplary embodiment of a filter retrieval system in accordance with the present invention includes a catheter having an elongate shaft including a proximal portion, a distal portion, and a longitudinally expandable portion disposed between the proximal portion and the distal portion. A ring is fixed to the distal portion of the elongate shaft distally of the expandable portion. A push rod is disposed within a shaft lumen defined by the elongate

shaft. The distal end of the push rod is fixed to the ring and the proximal end of the push rod is fixed to a slider. The slider is disposed in sliding engagement with a hub that is disposed about a proximal end of the elongate shaft. In a preferred embodiment, the slider and the push rod may be used to selectively expand the longitudinally expandable portion of the elongate shaft. The expandable portion of the elongate shaft is preferably expanded by urging the slider distally relative to the hub. In a preferred method, the guidewire is held stationary relative to the slider, while the slider is moved distally. When this is the case, the filter is preferably engulfed by the distal portion of the catheter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 is a partial cross-sectional view of a filter delivery system in accordance with an exemplary embodiment of the present invention;

[0019] FIG. 2 is a partial cross-sectional view of the filter delivery system of FIG. 1;

[0020] FIG. 3 is a partial cross-sectional view of a filter retrieval system in accordance with an exemplary embodiment of the present invention;

[0021] FIG. 4 is a partial cross-sectional view of the filter retrieval system of FIG. 3;

[0022] FIG. 5 is a partial cross-sectional view of a filter delivery system in accordance with an additional exemplary embodiment of the present invention;

[0023] FIG. 6 is a partial cross-sectional view of the filter delivery system of FIG. 5;

[0024] FIG. 7 is a partial cross-sectional view of a filter retrieval system in accordance with an additional exemplary embodiment of the present invention;

[0025] FIG. 8 is a partial cross-sectional view of the filter retrieval system of FIG. 7;

[0026] FIG. 9 is a partial cross-sectional view of a filter delivery system in accordance with an additional exemplary embodiment of the present invention;

[0027] FIG. 10 is a partial cross-sectional view of the filter delivery system of FIG. 9;

[0028] FIG. 11 is a partial cross-sectional view of a filter retrieval system in accordance with an additional exemplary embodiment of the present invention;

[0029] FIG. 12 is a partial cross-sectional view of the filter retrieval system of FIG. 11;

[0030] FIG. 13 is a partial cross-sectional view of a filter delivery system in accordance with an additional exemplary embodiment of the present invention;

[0031] FIG. 14 is a partial cross-sectional view of the filter delivery system of FIG. 13;

[0032] FIG. 15 is a partial cross-sectional view of a filter retrieval system in accordance with an additional exemplary embodiment of the present invention;

[0033] FIG. 16 is a partial cross-sectional view of the filter retrieval system of FIG. 15;

[0034] FIG. 17 is a partial cross-sectional view of a filter retrieval system in accordance with an exemplary embodiment of the present invention;

[0035] FIG. 18 is a partial cross-sectional view of the filter retrieval system illustrated in FIG. 17;

[0036] FIG. 19 is a partial cross-sectional view of a filter retrieval system in accordance with an exemplary embodiment of the present invention;

[0037] FIG. 20 is an additional partial cross-sectional view of filter retrieval system illustrated in FIG. 19;

[0038] FIG. 21 is a partial cross-sectional view of a filter retrieval system in accordance with an exemplary embodiment of the present invention;

[0039] FIG. 22 is an additional partial cross-sectional view of filter retrieval system illustrated in FIG. 21;

[0040] FIG. 23 is a partial cross-sectional view of a filter retrieval system in accordance with an exemplary embodiment of the present invention; and

[0041] FIG. 24 is an additional partial cross-sectional view of filter retrieval system illustrated in FIG. 23.

DETAILED DESCRIPTION OF THE INVENTION

[0042] The following detailed description should be read with reference to the drawings, in which like elements in different drawings are numbered in like fashion. The drawings which are not necessarily to scale, depict selected embodiments and are not intended to limit the scope of the invention. In some cases, the drawings may be highly diagrammatic in nature. Examples of constructions, materials, dimensions, and manufacturing processes are provided for various elements. Those skilled in the art will recognize that many of the examples provided have suitable alternatives which may be utilized.

[0043] FIG. 1 is a partial cross-sectional view of a filter delivery system 100 in accordance with an exemplary embodiment of the present invention. Filter delivery system 100 includes a catheter 102 having an elongate shaft 120. Elongate shaft 120 includes a proximal end 122, a distal end 124, and a wall 126 defining a shaft lumen 128. In the embodiment of FIG. 1, the distal portion of catheter 102 is disposed within a blood vessel 130. In a preferred embodiment, catheter 102 extends out of blood vessel 130, and proximal end 122 of elongate shaft 120 is disposed outside the patient's body. A hub 132 is disposed about elongate shaft 120 proximate proximal end 122.

[0044] Catheter 102 also includes a tubular member 134 having a first end 136 fixed to wall 126 of elongate shaft 120, and a second end 138 disposed within shaft lumen 128. Tubular member 134 defines a guidewire lumen 140 which is in fluid communication with a distal guidewire port 142 defined by second end 138 of tubular member 134. Catheter 102 also includes a proximal guidewire port 144 extending through wall 126 of elongate shaft 120. Various embodiments of proximal guidewire port 144 are possible without deviating from the spirit and scope of the present invention. For example, proximal guidewire port 144 may be defined by wall 126 of elongate shaft 120. By way of a second

example, proximal guidewire port 144 may be defined by first end 136 of tubular member 134.

[0045] In the embodiment of FIG. 1, distal guidewire port 142 is disposed proximally of distal end 124 of elongate shaft 120, and proximal guidewire port 144 is disposed proximally of distal guidewire port 142. In FIG. 1, it may be appreciated that distal guidewire port 142 and proximal guidewire port 144 are separated by a longitudinal distance. In a preferred embodiment, the longitudinal distance between proximal guidewire port 144 and distal guidewire port 142 is less than about 55 centimeters and the length of elongate shaft 120 is between about 100 centimeters and about 300 centimeters. In a more preferred embodiment, the longitudinal distance between proximal guidewire port 144 and distal guidewire port 142 is less than about 45 centimeters. In a particularly preferred embodiment, the longitudinal distance between proximal guidewire port 144 and distal guidewire port 142 is less than about 35 centimeters.

[0046] In FIG. 1, it may be appreciated that system 100 includes a filter 146 disposed within a distal portion 148 of shaft lumen 128. In the embodiment of FIG. 1, filter 146 is in a contracted configuration. System 100 of FIG. 1 also includes a guidewire 104 having a distal end 108 that is fixed to filter 146. In the embodiment of FIG. 1, guidewire 104 extends through distal guidewire port 142, guidewire lumen 140, and proximal guidewire port 144.

[0047] FIG. 2 is a partial cross-sectional view of the filter delivery system 100 of FIG. 1. In the embodiment of FIG. 2, catheter 102 has been moved proximally relative to guidewire 104 so that filter 146 is disposed outside of shaft lumen 128. As shown in FIG. 2, filter 146 is free to assume an expanded configuration when it is outside of shaft lumen 128. Catheter 102 may be moved relative to guidewire 104, for example, by grasping a proximal portion 106 of guidewire 104 and applying a pulling force to hub 132 of catheter 102. The pulling force may be applied to hub 132 until filter 146 is deployed in the expanded configuration. The pulling force may also be continued until catheter 102 is removed from blood vessel 130. Once catheter 102 has been removed from blood vessel 130, guidewire 104 may be utilized to guide additional catheters (e.g., balloon catheters, atherectomy catheters, etc.) as they are advanced through blood vessel 130.

[0048] In the embodiment of FIG. 2, a wire gripper 150 is disposed about proximal portion 106 of guidewire 104. Wire gripper 150 includes a handle 152 and a plurality of jaws 154 for grasping guidewire 104. A knurl nut fitting 156 is used to selectively urge jaws 154 against guidewire 104. Wire gripper 150 may be used to assist a surgeon in grasping proximal portion 106 of guidewire 104.

[0049] FIG. 3 is a partial cross-sectional view of a filter retrieval system 200 in accordance with an exemplary embodiment of the present invention. Filter retrieval system 200 includes a catheter 202 that may be utilized to retrieve a filter 246 that was previously delivered to a target location 258 in a blood vessel 230. Filter 246 may be delivered to target location, for example, using the filter delivery system of FIG. 1 and FIG. 2, and/or other filter delivery systems in accordance with the present invention. In FIG. 3 it may be appreciated that a distal end 208 of a guidewire 204 is fixed to filter 146.

[0050] In the embodiment of FIG. 3, guidewire 204 extends through a distal guidewire port 242, and a guidewire

lumen 240 defined by a tubular member 234 of catheter 202. In the embodiment of FIG. 3, a first end 236 of tubular member 234 is fixed to a wall 226 of elongate shaft 220 of catheter 202. A second end 238 of tubular member 234 is disposed within a shaft lumen 228 defined by wall 226 of elongate shaft 220.

[0051] Guidewire 204 also extends through a proximal guidewire port 244 extending through wall 226 of elongate shaft 220. Various embodiments of proximal guidewire port 244 are possible without deviating from the spirit and scope of the present invention. For example, proximal guidewire port 244 may be defined by wall 226 of elongate shaft 220. By way of a second example, proximal guidewire port 244 may be defined by first end 236 of tubular member 234.

[0052] In the embodiment of FIG. 3, catheter 202 has been advanced along guidewire 204 until a distal end 224 of elongate shaft 220 is proximate filter 246. In FIG. 3, it may be appreciated that a cone 260 is disposed at distal end 224 of elongate shaft 220. The generally tapered shape of cone 260 may aid in advancing catheter 202 through blood vessel 230. In a preferred embodiment, cone 260 comprises a flexible material, allowing cone 260 to deflect as filter 246 is drawn through an aperture 262 defined by cone 260. Embodiments of cone 260 are possible in which cone 260 is adapted to fold proximally as filter 246 passes through aperture 262. Embodiments of cone 260 are also possible in which cone 260 is adapted to expand radially as filter 246 passes through aperture 262.

[0053] In a preferred embodiment, catheter 202 extends out of blood vessel 230, so that a proximal end 222 of elongate shaft 220 is disposed outside the patient's body. As shown in FIG. 3, a hub 232 is disposed about elongate shaft 220 proximate proximal end 222. Hub 232 may aid a surgeon in grasping elongate shaft 220.

[0054] In the embodiment of FIG. 3, distal guidewire port 242 is disposed proximally of distal end 224 of elongate shaft 220, and proximal guidewire port 244 is disposed proximally of distal guidewire port 242. In FIG. 3, it may be appreciated that distal guidewire port 242 and proximal guidewire port 244 are separated by a longitudinal distance. In a preferred embodiment, the longitudinal distance between proximal guidewire port 244 and distal guidewire port 242 is less than about 55 centimeters. In a more preferred embodiment, the longitudinal distance between proximal guidewire port 244 and distal guidewire port 242 is less than about 45 centimeters. In a particularly preferred embodiment, the longitudinal distance between proximal guidewire port 244 and distal guidewire port 242 is less than about 35 centimeters. In FIG. 3, it may be appreciated that filter 246 is disposed within blood vessel 230 in an expanded configuration.

[0055] FIG. 4 is a partial cross-sectional view of the filter retrieval system 200 of FIG. 3. In the embodiment of FIG. 4, catheter 202 has been advanced distally relative to guidewire 204 so that filter 246 is disposed within a distal portion 248 of shaft lumen 228. As shown in FIG. 4, filter 246 has been urged into a contracted configuration. Catheter 202 may be moved relative to guidewire 204, for example, by grasping a proximal portion 206 of guidewire 204 and applying a pushing force to hub 232.

[0056] In the embodiment of FIG. 4, a wire gripper 250 is disposed about proximal portion 206 of guidewire 204. Wire

gripper 250 includes a handle 252 and a plurality of jaws 254 for grasping guidewire 204. A knurl nut fitting 256 is used to selectively urge jaws 254 against guidewire 204. Wire gripper 250 may be used to assist a surgeon in grasping proximal portion 206 of guidewire 204.

[0057] FIG. 5 is a partial cross-sectional view of a filter delivery system 300 in accordance with an additional exemplary embodiment of the present invention. Filter delivery system 300 includes a catheter 302 having an elongate shaft 320. A hub 332 is disposed about elongate shaft 320 proximate proximal end 322 thereof. A slider 364 is disposed in sliding engagement with a cavity 368 of hub 332. Slider 364 includes a wire lock 366 having a plurality of jaws 354. Wire lock 366 may be used to selectively fix a proximal portion 306 of a guidewire 304 to slider 364.

[0058] Guidewire 304 extends distally away from wire lock 366. As shown in FIG. 5, a portion of guidewire 304 is disposed in a guidewire lumen 340 defined by a tubular member 334. A first end 336 of tubular member 334 is fixed to a wall 326 of elongate shaft 320, and a second end 338 of tubular member 334 is disposed within a shaft lumen 328 defined by wall 326. Guidewire lumen 340 is in fluid communication with a distal guidewire port 342 defined by second end 338 of tubular member 334. Catheter 302 also includes a proximal guidewire port 344 extending through wall 326 of elongate shaft 320.

[0059] In FIG. 5, it may be appreciated that a distal end 308 of guidewire 304 is fixed to a filter 346 that is disposed within a distal portion 348 of shaft lumen 328. In the embodiment of FIG. 5, filter 346 is in a contracted configuration. System 300 may be utilized to deploy filter 346 into a blood vessel 330 as shown in FIG. 6.

[0060] FIG. 6 is a partial cross-sectional view of the filter retrieval system 300 of FIG. 5. In the embodiment of FIG. 6, hub 332 of catheter 302 has been moved proximally relative to slider 364. As described previously, proximal portion 306 of guidewire 304 is fixed to slider 364 by wire lock 366, and filter 346 is fixed to distal end 308 of guidewire 304. Thus, when hub 332 is moved proximally relative to slider 364, distal end 324 of elongate shaft 320 is urged proximally so that filter 346 is disposed outside of shaft lumen 328 of elongate shaft 320. Once filter 346 is out of shaft lumen 328 it is free to assume an expanded configuration as shown in FIG. 6. The sliding relationship between slider 364 and hub 332 gives the user of system 300 a defined distance to move slider 364 relative to hub 332 when deploying filter 346.

[0061] FIG. 7 is a partial cross-sectional view of a filter retrieval system 400 in accordance with an exemplary embodiment of the present invention. Filter retrieval system 400 includes a catheter 402 that may be utilized to retrieve a filter 446 that was previously delivered to a target location 458 in a blood vessel 430.

[0062] In the embodiment of FIG. 7, a distal end 408 of a guidewire 404 is fixed filter 446. Guidewire 404 extends proximally away from filter 446 passing through a distal guidewire port 442, and a guidewire lumen 440 defined by a tubular member 434 of catheter 402. In the embodiment of FIG. 7, a first end 436 of tubular member 434 is fixed to a wall 426 of an elongate shaft 420 of catheter 402. A second end 438 of tubular member 434 is disposed within a shaft lumen 428 defined by wall 426 of elongate shaft 420.

[0063] Guidewire 404 also extends through a proximal guidewire port 444 extending through wall 426 of elongate shaft 420. Various embodiments of proximal guidewire port 444 are possible without deviating from the spirit and scope of the present invention. For example, proximal guidewire port 444 may be defined by wall 426 of elongate shaft 420. By way of a second example, proximal guidewire port 444 may be defined by first end 436 of tubular member 434.

[0064] In the embodiment of FIG. 7, catheter 402 has been advanced along guidewire 404 until a distal end 424 of elongate shaft 420 is proximate filter 446. In FIG. 7, it may be appreciated that a cone 460 is disposed at distal end 424 of elongate shaft 420. The generally tapered shape of cone 460 may aid in advancing catheter 402 through blood vessel 430. In a preferred embodiment, cone 460 comprises a flexible material, allowing cone 460 to deflect as filter 446 is drawn through an aperture 462 defined by cone 460. Embodiments of cone 460 are possible in which cone 460 is adapted to fold proximally as filter 446 passes through aperture 462. Embodiments of cone 460 are also possible in which cone 460 is adapted to expand radially as filter 446 passes through aperture 462.

[0065] In a preferred embodiment, catheter 402 extends out of blood vessel 430, so that a proximal end 422 of elongate shaft 420 is disposed outside the patient's body. As shown in FIG. 7, a hub 432 is disposed about elongate shaft 420 proximate proximal end 422. A slider 464 is disposed in sliding engagement with a cavity 468 of hub 432. Slider 464 includes a wire lock 466 having a plurality of jaws 454. Wire lock 466 may be used to selectively fix a proximal portion 406 of guidewire 404 to slider 464. System 400 may be utilized to retrieve filter 446 from blood vessel 430 as shown in FIG. 8.

[0066] FIG. 8 is a partial cross-sectional view of the filter retrieval system 400 of FIG. 7. In the embodiment of FIG. 8, hub 432 and elongate shaft 420 of catheter 402 have been moved distally relative to slider 464. During the movement of elongate shaft 420, the longitudinal position of filter 446 is fixed by guidewire 404, since proximal portion 406 of guidewire 404 is fixed to slider 464 by wire lock 466 and distal end 408 of guidewire 404 is fixed to filter 446.

[0067] As elongate shaft 420 is advanced distally, it engulfs filter 446. In the embodiment of FIG. 8 filter 446 is disposed within a distal portion 448 of shaft lumen 428. As shown in FIG. 8, filter 446 is urged into a contracted configuration when it is disposed within shaft lumen 428. The sliding relationship between slider 464 and hub 432 gives the user of system 400 a defined distance to move slider 464 relative to hub 432 when retrieving filter 446.

[0068] FIG. 9 is a partial cross-sectional view of a filter delivery system 500 in accordance with yet another exemplary embodiment of the present invention. Filter delivery system 500 includes a catheter 502 having an elongate shaft 520. Elongate shaft 520 includes a proximal portion 570, a distal portion 574, and a longitudinally collapsible portion 572 disposed between proximal portion 570 and distal portion 574.

[0069] A ring 578 is fixed to distal portion 574 of elongate shaft 520 distally of collapsible portion 572. A pull wire 580 is disposed within a shaft lumen 528 defined by elongate shaft 520. The distal end of pull wire 580 is fixed to ring 578

and the proximal end of pull wire 580 is fixed to a slider 564. Slider 564 is disposed in sliding engagement with a hub 532 which is disposed about a proximal end 522 of elongate shaft 520. In a preferred embodiment, slider 564 and pull wire 580 may be used to selectively collapse longitudinally collapsible portion 572 of elongate shaft 520.

[0070] Catheter 502 also includes a tubular member 534 having a first end 536 fixed to a wall 526 of proximal portion 570 of elongate shaft 520, and a second end 538 disposed within shaft lumen 528. Tubular member 534 defines a guidewire lumen 540 which is in fluid communication with a distal guidewire port 542 defined by second end 538 of tubular member 534. Catheter 502 also includes a proximal guidewire port 544 extending through wall 526 of proximal portion 570 of elongate shaft 520. Various embodiments of proximal guidewire port 544 are possible without deviating from the spirit and scope of the present invention. For example, proximal guidewire port 544 may be defined by wall 526 of proximal portion 570 of elongate shaft 520. By way of a second example, proximal guidewire port 544 may be defined by first end 536 of tubular member 534.

[0071] In the embodiment of FIG. 9, distal guidewire port 542 is disposed proximally of a distal end 524 of elongate shaft 520, and proximal guidewire port 544 is disposed proximally of distal guidewire port 542. In FIG. 9, it may be appreciated that distal guidewire port 542 and proximal guidewire port 544 are separated by a longitudinal distance. In a preferred embodiment, the longitudinal distance between proximal guidewire port 544 and distal guidewire port 542 is less than about 55 centimeters. In a more preferred embodiment, the longitudinal distance between proximal guidewire port 544 and distal guidewire port 542 is less than about 45 centimeters. In a particularly preferred embodiment, the longitudinal distance between proximal guidewire port 544 and distal guidewire port 542 is less than about 35 centimeters.

[0072] In FIG. 9, it may be appreciated that system 500 includes a filter 546 disposed within a distal portion 548 of shaft lumen 528. In the embodiment of FIG. 9, filter 546 is in a contracted configuration. System 500 of FIG. 9 also includes a guidewire 504 having a distal end 508 that is fixed to filter 546. In the embodiment of FIG. 9, guidewire 504 extends through distal guidewire port 542, guidewire lumen 540, and proximal guidewire port 544.

[0073] FIG. 10 is a partial cross-sectional view of the filter delivery system 500 of FIG. 9. In the embodiment of FIG. 10, longitudinally collapsible portion 572 of elongate shaft 520 has been collapsed by urging slider 564 proximally relative to hub 532. In a preferred method in accordance with the present invention, guidewire 504 is held stationary while slider 564 is moved proximally.

[0074] A wire gripper 550 may be used to assist a surgeon grasping a proximal portion 506 of guidewire 504 and holding it stationary. In the embodiment of FIG. 10, wire gripper 550 is disposed about proximal portion 506 of guidewire 504. Wire gripper 550 includes a handle 552 and a plurality of jaws 554 for grasping guidewire 504. A knurl nut fitting 556 is used to selectively urge jaws 554 against guidewire 504.

[0075] In the embodiment of FIG. 10, collapsible portion 572 has been collapsed to such an extent that distal end 524

of elongate shaft 520 is located proximally of filter 546 and filter 546 is disposed outside of shaft lumen 528. In FIG. 10 it may be appreciated that filter 546 is free to assume an expanded configuration when it is outside of shaft lumen 528.

[0076] FIG. 11 is a partial cross-sectional view of a filter retrieval system 600 in accordance with an exemplary embodiment of the present invention. Filter retrieval system 600 includes a catheter 602 that may be utilized to retrieve a filter 646 that was previously delivered to a target location 658 in a blood vessel 630. Filter 646 may be delivered to a target location, for example, using the filter delivery system of FIG. 9 and FIG. 10, and/or other filter delivery systems in accordance with the present invention.

[0077] Catheter 602 of filter retrieval system 600 includes an elongate shaft 620 including a proximal portion 670, a distal portion 674, and a longitudinally expandable portion 676 disposed between proximal portion 670 and distal portion 674. A ring 678 is fixed to distal portion 674 of elongate shaft 620 distally of expandable portion 676. A push rod 682 is disposed within a shaft lumen 628 defined by elongate shaft 620. The distal end of push rod 682 is fixed to ring 678 and the proximal end of push rod 682 is fixed to a slider 664. Slider 664 is disposed in sliding engagement with a hub 632 which is disposed about a proximal end 622 of elongate shaft 620. In a preferred embodiment, slider 664 and push rod 682 may be used to selectively expand longitudinally expandable portion 676 of elongate shaft 620.

[0078] In the embodiment of FIG. 11, a guidewire 604 extends through a distal guidewire port 642, and a guidewire lumen 640 defined by a tubular member 634 of catheter 602. In the embodiment of FIG. 11, a first end 636 of tubular member 634 is fixed to a wall 626 of elongate shaft 620 of catheter 602. A second end 638 of tubular member 634 is disposed within shaft lumen 628 of elongate shaft 620. Guidewire 604 also extends through a proximal guidewire port 644 extending through wall 626 of elongate shaft 620. Various embodiments of proximal guidewire port 644 are possible without deviating from the spirit and scope of the present invention. For example, proximal guidewire port 644 may be defined by wall 626 of elongate shaft 620. By way of a second example, proximal guidewire port 644 may be defined by first end 636 of tubular member 634.

[0079] In the embodiment of FIG. 11, catheter 602 has been advanced along guidewire 604 until a distal end 624 of elongate shaft 620 is proximate filter 646. In FIG. 11, it may be appreciated that a cone 660 is disposed at distal end 624 of elongate shaft 620. The generally tapered shape of cone 660 may aid in advancing catheter 602 through blood vessel 630. In a preferred embodiment, cone 660 comprises a flexible material, allowing cone 660 to deflect as filter 646 is drawn through an aperture 662 defined by cone 660. Embodiments of cone 660 are possible in which cone 660 is adapted to fold proximally as filter 646 passes through aperture 662. Embodiments of cone 660 are also possible in which cone 660 is adapted to expand radially as filter 646 passes through aperture 662.

[0080] In the embodiment of FIG. 11, distal guidewire port 642 is disposed proximally of distal end 624 of elongate shaft 620, and proximal guidewire port 644 is disposed proximally of distal guidewire port 642. In FIG. 11, it may be appreciated that distal guidewire port 642 and proximal

guidewire port 644 are separated by a longitudinal distance. In a preferred embodiment, the longitudinal distance between proximal guidewire port 644 and distal guidewire port 642 is less than about 55 centimeters. In a more preferred embodiment, the longitudinal distance between proximal guidewire port 644 and distal guidewire port 642 is less than about 45 centimeters. In a particularly preferred embodiment, the longitudinal distance between proximal guidewire port 644 and distal guidewire port 642 is less than about 35 centimeters. In FIG. 11, it may be appreciated that filter 646 is disposed within blood vessel 630 in an expanded configuration.

[0081] FIG. 12 is a partial cross-sectional view of the filter retrieval system 600 of FIG. 11. In the embodiment of FIG. 12, expandable portion 676 of elongate shaft 620 has been expanded so that filter 646 is disposed within a distal portion 648 of shaft lumen 628. Expandable portion 676 of elongate shaft 620 may be expanded, for example, by urging slider 664 distally relative to hub 632. As shown in FIG. 12, filter 646 has been urged into a contracted configuration.

[0082] In a preferred method in accordance with the present invention, guidewire 604 is held in place while selectively expandable portion 676 is expanded, for example, by grasping a proximal portion 606 of guidewire 604. In the embodiment of FIG. 12, a wire gripper 650 is disposed about proximal portion 606 of guidewire 604. Wire gripper 650 includes a handle 652 and a plurality of jaws 654 for grasping guidewire 604. A knurl nut fitting 656 is used to selectively urge jaws 654 against guidewire 604. Wire gripper 650 may be used to assist a surgeon in grasping proximal portion 606 of guidewire 604.

[0083] FIG. 13 is a partial cross-sectional view of a filter delivery system 700 in accordance with an additional exemplary embodiment of the present invention. Filter delivery system 700 includes a catheter 702 having an elongate shaft 720 having a proximal end 722. A hub 732 is disposed about elongate shaft 720 proximate proximal end 722. A slider 764 is disposed in sliding engagement with a cavity 768 of hub 732. Hub 732 includes a wire lock 766 having a plurality of jaws 754. Wire lock 766 may be used to selectively fix a proximal portion 706 of a guidewire 704 to hub 732.

[0084] Elongate shaft 720 includes a proximal portion 770, a distal portion 774, and a longitudinally collapsible portion 772 disposed between proximal portion 770 and distal portion 774. A ring 778 is fixed to distal portion 774 of elongate shaft 720 distally of collapsible portion 772. A pull wire 780 is disposed within a shaft lumen 728 defined by elongate shaft 720. The distal end of pull wire 780 is fixed to ring 778 and the proximal end of pull wire 780 is fixed to slider 764. In a preferred embodiment, slider 764 and pull wire 780 may be used to selectively collapse longitudinally collapsible portion 772 of elongate shaft 720.

[0085] Guidewire 704 extends distally away from hub 732 and wire lock 766. As shown in FIG. 13, a portion of guidewire 704 is disposed in a guidewire lumen 740 defined by a tubular member 734. A first end 736 of tubular member 734 is fixed to a wall 726 of proximal portion 770 of elongate shaft 720, and a second end 738 of tubular member 734 is disposed within shaft lumen 728 of elongate shaft 720. Guidewire lumen 740 is in fluid communication with a distal guidewire port 742 defined by second end 738 of tubular member 734. Catheter 702 also includes a proximal

guidewire port **744** extending through wall **726** of proximal portion **770** of elongate shaft **720**.

[0086] In FIG. **13**, it may be appreciated that system **700** includes a filter **746** disposed within a distal portion **748** of shaft lumen **728**. In the embodiment of FIG. **13**, filter **746** is in a contracted configuration. System **700** may be utilized to deploy filter **746** into a blood vessel **730** as shown in FIG. **14**.

[0087] FIG. **14** is a partial cross-sectional view of the filter delivery system **700** of FIG. **13**. In the embodiment of FIG. **14**, longitudinally collapsible portion **772** of elongate shaft **720** has been collapsed by urging slider **764** proximally relative to hub **732**. In a preferred method in accordance with the present invention, guidewire **704** is held stationary while slider **764** is moved proximally.

[0088] As described previously, proximal portion **706** of guidewire **704** may be selectively fixed to hub **732** by wire lock **766**, and filter **746** is fixed to a distal end **708** of guidewire **704**. Thus, when collapsible portion **772** of elongate shaft **720** is collapsed, the longitudinal position of filter **746** is maintained by guidewire **704**. In a preferred method, collapsible portion **772** is collapsed to the point that filter **746** is disposed outside of shaft lumen **728** as shown in FIG. **14**.

[0089] FIG. **15** is a partial cross-sectional view of a filter retrieval system **800** in accordance with an exemplary embodiment of the present invention. Filter retrieval system **800** includes a catheter **802** that may be utilized to retrieve a filter **846** that was previously delivered to a target location **858** in a blood vessel **830**.

[0090] In the embodiment of FIG. **15**, a distal end **808** of a guidewire **804** is fixed to filter **846**. Guidewire **804** extends through a distal guidewire port **842**, and a guidewire lumen **840** defined by a tubular member **834** of catheter **802**. In the embodiment of FIG. **15**, a first end **836** of tubular member **834** is fixed to a wall **826** of an elongate shaft **820** of catheter **802**. A second end **838** of tubular member **834** is disposed within a shaft lumen **828** defined by wall **826** of elongate shaft **820**.

[0091] Guidewire **804** also extends through a proximal guidewire port **844** extending through wall **826** of elongate shaft **820**. Various embodiments of proximal guidewire port **844** are possible without deviating from the spirit and scope of the present invention. For example, proximal guidewire port **844** may be defined by wall **826** of elongate shaft **820**. By way of a second example, proximal guidewire port **844** may be defined by first end **836** of tubular member **834**.

[0092] Elongate shaft **820** of catheter **802** includes a proximal portion **870**, a distal portion **874**, and a longitudinally expandable portion **876** disposed between proximal portion **870** and distal portion **874**. A ring **878** is fixed to distal portion **874** of elongate shaft **820** distally of expandable portion **876**. A push rod **882** is disposed within shaft lumen **828** defined by elongate shaft **820**. The distal end of push rod **882** is fixed to ring **878** and the proximal end of push rod **882** is fixed to a slider **864**. Slider **864** is disposed in sliding engagement with a hub **832** which is disposed about a proximal end **822** of elongate shaft **820**. In a preferred embodiment, slider **864** and push rod **882** may be used to selectively expand longitudinally expandable portion **876** of elongate shaft **820**.

[0093] A grabber **884** is also disposed about elongate shaft **820**. Grabber **884** may be used to assist a surgeon in grasping elongate shaft **820** of catheter **802**. Grabber **884** includes a wire lock **866** having a plurality of jaws **854**. Wire lock **866** may be used to selectively fix a proximal portion **806** of a guidewire **804** to grabber **884**.

[0094] In the embodiment of FIG. **15**, catheter **802** has been advanced along guidewire **804** until a distal end **824** of elongate shaft **820** is proximate filter **846**. In FIG. **15**, it may be appreciated that a cone **860** is disposed at distal end **824** of elongate shaft **820**. The generally tapered shape of cone **860** may aid in advancing catheter **802** through a blood vessel **830**. Cone **860** defines an aperture **862**. Embodiments of cone **860** are possible in which cone **860** is adapted to fold proximally as filter **846** passes through aperture **862**. Embodiments of cone **860** are also possible in which aperture **862** of cone **860** is adapted to expand radially as filter **846** passes therethrough.

[0095] FIG. **16** is a partial cross-sectional view of the filter retrieval system **800** of FIG. **15**. In the embodiment of FIG. **16**, selectively expandable portion **876** of elongate shaft **820** has been expanded so that filter **846** is disposed within a distal portion **848** of shaft lumen **828**. As shown in FIG. **16**, filter **846** has been urged into a contracted configuration. In a preferred method in accordance with the present invention, a proximal portion **806** of guidewire **804** is fixed to grabber **884** using wire lock **866** prior to expanding longitudinally expandable portion **876**. Expandable portion **876** may be expanded, for example, by urging slider **864** distally relative to hub **832**.

[0096] FIG. **17** is a partial cross-sectional view of a filter retrieval system **900** in accordance with an exemplary embodiment of the present invention. Filter retrieval system **900** includes a catheter **902** that may be utilized to retrieve a filter **946** that was previously delivered to a target location **958** in a blood vessel **930**. Filter **946** may be delivered to target location, for example, using the filter delivery system of FIG. **1** and FIG. **2**, and/or other filter delivery systems in accordance with the present invention. In FIG. **17** it may be appreciated that a distal end **908** of a guidewire **904** is fixed to filter **946**.

[0097] In the embodiment of FIG. **17**, guidewire **904** extends through a proximal guidewire port **944** and a shaft lumen **928** defined by an elongate shaft **920** of catheter **902**. In the embodiment of FIG. **17**, catheter **902** has been advanced along guidewire **904** until a distal end **924** of elongate shaft **920** is proximate filter **946**. In FIG. **17**, it may be appreciated that a cone **960** is disposed at distal end **924** of elongate shaft **920**. In a preferred embodiment, cone **960** is fixed to elongate shaft **920** by a hinge **943**. In a particularly preferred embodiment, hinge **943** comprises a flexible material, allowing hinge **943** to deflect as filter **946** is drawn through an aperture **962** defined by cone **960**. Embodiments of cone **960** are possible in which hinge **943** and cone **960** are adapted to fold proximally as filter **946** passes through aperture **962**.

[0098] In a preferred embodiment, catheter **902** extends out of blood vessel **930**, so that a proximal end **922** of elongate shaft **920** is disposed outside the patient's body. As shown in FIG. **17**, a hub **932** is disposed about elongate shaft **920** proximate proximal end **922**. Hub **932** may aid a surgeon in grasping elongate shaft **920**.

[0099] FIG. 18 is a partial cross-sectional view of the filter retrieval system 900 of FIG. 17. In the embodiment of FIG. 18, catheter 902 has been advanced distally relative to guidewire 904 so that filter 946 is disposed within a distal portion 948 of shaft lumen 928. As shown in FIG. 18, filter 946 has been urged into a contracted configuration. Catheter 902 may be moved relative to guidewire 904, for example, by grasping a proximal portion 906 of guidewire 904 and applying a pushing force to hub 932.

[0100] In the embodiment of FIG. 18, a wire gripper 950 is disposed about proximal portion 906 of guidewire 904. Wire gripper 950 includes a handle 952 and a plurality of jaws 954 for grasping guidewire 904. A knurl nut fitting 956 is used to selectively urge jaws 954 against guidewire 904. Wire gripper 950 may be used to assist a surgeon in grasping proximal portion 906 of guidewire 904.

[0101] FIG. 19 is a partial cross-sectional view of a filter retrieval system 1000 in accordance with an exemplary embodiment of the present invention. Filter retrieval system 1000 includes a filter retrieval catheter 1002. In the embodiment of FIG. 19, a portion of filter retrieval catheter 1002 is disposed within a blood vessel 1030. Filter retrieval catheter 1002 includes an elongate shaft 1020 defining a shaft lumen 1028 having a distal portion 1048. A tip member 1086 is partially disposed within distal portion 1048 of shaft lumen 1028. A tapered distal portion 1084 of tip member 1086 extends distally beyond elongate shaft 1020. The generally conical shape of tapered distal portion 1084 may facilitate the tracking of filter retrieval catheter 1002 as it is advanced through blood vessel 1030.

[0102] Tip member 1086 defines a tip lumen 1088. In the embodiment of FIG. 19, a portion of a guidewire 1004 is disposed within tip lumen 1088. Guidewire 1004 extends through tip lumen 1088, a portion of shaft lumen 1028, and a proximal guidewire port 1042 defined by a wall 1026 of elongate shaft 1020. In the embodiment of FIG. 19, catheter 1002 has been advanced along guidewire 1004 until a distal end 1024 of elongate shaft 1020 is proximate a filter 1046 disposed within blood vessel 1030. Catheter 1002 may preferably be utilized to remove filter 1046 from blood vessel 1030 using methods in accordance with the present invention.

[0103] In a preferred embodiment, tip member 1086 is configured such that guidewire 1004 is substantially centered within elongate shaft 1020. Centering elongate shaft 1020 about guidewire 1004 may facilitate the tracking of filter retrieval catheter 1002 as it is advanced along a guidewire disposed within a blood vessel. Centering elongate shaft 1020 about guidewire 1004 may also reduce the magnitude of force which is required to urge elongate shaft 1020 over filter 1046 or other similar collapsible devices attached to guidewires.

[0104] Distal portion 1048 of shaft lumen 1028 has an inner diameter 1090. Tip member 1086 has an outer radial extent comprising an outer diameter 1092. In a preferred embodiment, outer diameter 1092 of tip member 1086 is similar to inner diameter 1090 of elongate shaft 1020. In a particularly preferred embodiment, outer diameter 1092 of tip member 1086 is slightly smaller than inner diameter 1090 of elongate shaft 1020.

[0105] In a preferred embodiment, tip lumen 1088 of tip member 1086 has a lumen diameter 1096 and guidewire

1004 has a guidewire diameter 1094. In a particularly preferred embodiment, lumen diameter 1096 is similar to guidewire diameter 1094. In a more particularly preferred embodiment, lumen diameter 1096 is slightly larger than guidewire diameter 1094.

[0106] The position of tip member 1086 shown in FIG. 19 may be referred to as an extended position. Tip member 1086 of filter retrieval catheter 1002 preferably also has a retracted position. Distal portion 1048 of shaft lumen 1028 and tip member 1086 are preferably configured such that a filter may be partially or completely disposed within distal portion 1048 of shaft lumen 1028 when tip member 1086 is in the retracted position.

[0107] When tip member 1086 is in the extended position, tapered distal portion 1084 of tip member 1086 preferably extends distally from distal portion 1048 of shaft lumen 1028. Filter retrieval catheter 1002 preferably includes a distal stop mechanism 1023 that is preferably biased to retain tip member 1086 in the extended position. In the embodiment of FIG. 19, distal stop mechanism 1023 includes a stop member 1025 that is preferably fixed to elongate shaft 1020 and a trailing surface 1027 of tip member 1086. As shown in FIG. 19, trailing surface 1027 preferably seats against stop member 1025 when tip member 1086 is in the extended position.

[0108] FIG. 20 is an additional partial cross-sectional view of filter retrieval system 1000 of FIG. 19. In the embodiment of FIG. 20, tip member 1086 is disposed in the retracted position and filter 1046 is partially disposed within distal portion 1048 of shaft lumen 1028. Tip member 1086 and filter 1046 may be urged into distal portion 1048 of shaft lumen 1028, for example, by grasping guidewire 1004 and applying a distally directed pushing force to elongate shaft 1020. A wire gripper 1050 may assist a physician in grasping guidewire 1004. In the embodiment of FIG. 20, wire gripper 1050 is disposed about a proximal portion 1006 of guidewire 1004. Wire gripper 1050 includes a handle 1052 and a plurality of jaws 1054 for grasping guidewire 1004. A knurl nut fitting 1056 is used to selectively urge jaws 1054 against guidewire 1004. Wire gripper 1050 may be used to assist a surgeon in grasping proximal portion 1006 of guidewire 1004.

[0109] Filter retrieval catheter 1002 preferably includes a proximal stop mechanism 1029. In the embodiment of FIG. 20, proximal stop mechanism 1029 includes stop member 1025 that is preferably fixed to elongate shaft 1020 and a flange 1033 of tip member 1086. As shown in FIG. 20, flange 1033 preferably seats against stop member 1025 when tip member 1086 is in the retracted position. In FIG. 20, it may be appreciated that stop member 1025 may deflect when tip member 1086 is moved from the extended position to the retracted position. In a particularly preferred embodiment, proximal stop mechanism 1029 is adapted to provide a hard stop that may be sensed by a physician using filter retrieval catheter 1002 in a surgical procedure. This hard stop provides tactile feedback indicating that tip member 1086 has been successfully placed in the retracted position.

[0110] In FIG. 20, it may be appreciated that filter 1046 has been urged into a contracted configuration. As described above, filter retrieval catheter 1002 preferably includes a proximal stop mechanism 1029 that is adapted to stop relative movement between tip member 1086 and elongate

shaft 1020 when tip member 1086 is in the retracted position. In a particularly preferred embodiment, the relative movement required to move tip member 1086 from the extended position to the retracted position is similar to the relative movement required to urge filter 1046 into distal portion 1048 of shaft lumen 1028 and into a contracted configuration. Also in a particularly preferred embodiment, proximal stop mechanism 1029 is adapted to provide a hard stop that provides tactile feedback indicating that tip member 1086 has been successfully placed in the retracted position and filter 1046 has been successfully urged into a contracted configuration. When a physician feels this hard stop, he or she will know that filter 1046 has been urged into a retracted position, and the likelihood that a physician will attempt to withdraw filter 1046 from blood vessel 1030 while it is in an expanded condition is reduced.

[0111] FIG. 21 is a partial cross-sectional view of a filter retrieval system 1100 in accordance with an exemplary embodiment of the present invention. Filter retrieval system 1100 includes a filter retrieval catheter 1102. In the embodiment of FIG. 21, a portion of filter retrieval catheter 1102 is disposed within a blood vessel 1130. Filter retrieval catheter 1102 includes an elongate shaft 1120 defining a shaft lumen 1128 having a distal portion 1148. A tip member 1186 is partially disposed within distal portion 1148 of shaft lumen 1128. A tapered distal portion 1184 of tip member 1186 extends distally beyond elongate shaft 1120. The generally conical shape of tapered distal portion 1184 may facilitate the tracking of filter retrieval catheter 1102 as it is advanced through blood vessel 1130.

[0112] Tip member 1186 defines a tip lumen 1188. In the embodiment of FIG. 21, a portion of a guidewire 1104 is disposed within tip lumen 1188. Guidewire 1104 extends through tip lumen 1188, a portion of shaft lumen 1128, and a proximal guidewire port 1142 defined by a wall 1126 of elongate shaft 1120. In the embodiment of FIG. 21, catheter 1102 has been advanced along guidewire 1104 until a distal end 1124 of elongate shaft 1120 is proximate a filter 1146 disposed within blood vessel 1130. Catheter 1102 may preferably be utilized to remove filter 1146 from blood vessel 1130 using methods in accordance with the present invention.

[0113] In a preferred embodiment, tip member 1186 is configured such that guidewire 1104 is substantially centered within elongate shaft 1120. Centering elongate shaft 1120 about guidewire 1104 may facilitate the tracking of filter retrieval catheter 1102 as it is advanced along a guidewire disposed within a blood vessel. Centering elongate shaft 1120 about guidewire 1104 may also reduced the magnitude of force which is required to urge elongate shaft 1120 over filter 1146 or other similar collapsible devices attached to guidewires.

[0114] Distal portion 1148 of shaft lumen 1128 has an inner diameter 1190. Tip member 1186 has an outer radial extent comprising an outer diameter 1192. In a preferred embodiment, outer diameter 1192 of tip member 1186 is similar to inner diameter 1190 of elongate shaft 1120. In a particularly preferred embodiment, outer diameter 1192 of tip member 1186 is slightly smaller than inner diameter 1190 of elongate shaft 1120.

[0115] In a preferred embodiment, tip lumen 1188 of tip member 1186 has a lumen diameter 1196 and guidewire

1104 has a guidewire diameter 1194. In a particularly preferred embodiment, lumen diameter 1196 is similar to guidewire diameter 1194. In a more particularly preferred embodiment, lumen diameter 1196 is slightly larger than guidewire diameter 1194.

[0116] The position of tip member 1186 shown in FIG. 21 may be referred to as an extended position. Tip member 1186 of filter retrieval catheter 1102 preferably also has a retracted position. Distal portion 1148 of shaft lumen 1128 and tip member 1186 are preferably configured such that a filter may be partially or completely disposed within distal portion 1148 of shaft lumen 1128 when tip member 1186 is in the retracted position.

[0117] When tip member 1186 is in the extended position, tapered distal portion 1184 of tip member 1186 preferably extends distally from distal portion 1148 of shaft lumen 1128. Filter retrieval catheter 1102 preferably includes a distal stop mechanism 1123 that is preferably biased to retain tip member 1186 in the extended position. In the embodiment of FIG. 21, distal stop mechanism 1123 includes an annular bead 1135 formed by wall 1126 of elongate shaft 1120 and a trailing edge 1139 of tip member 1186. As shown in FIG. 21, trailing edge 1139 preferably seats against annular bead 1135 when tip member 1186 is in the extended position.

[0118] FIG. 22 is an additional partial cross-sectional view of filter retrieval system 1100 of FIG. 21. In the embodiment of FIG. 22, tip member 1186 is disposed in the retracted position and filter 1146 is partially disposed within distal portion 1148 of shaft lumen 1128. Tip member 1186 and filter 1146 may be urged into distal portion 1148 of shaft lumen 1128, for example, by grasping guidewire 1104 and applying a distally directed pushing force to elongate shaft 1120. A wire gripper 1150 may assist a physician in grasping guidewire 1104. In the embodiment of FIG. 22, wire gripper 1150 is disposed about a proximal portion 1106 of guidewire 1104. Wire gripper 1150 includes a handle 1152 and a plurality of jaws 1154 for grasping guidewire 1104. A knurl nut fitting 1156 is used to selectively urge jaws 1154 against guidewire 1104. Wire gripper 1150 may be used to assist a surgeon in grasping proximal portion 1106 of guidewire 1104.

[0119] Filter retrieval catheter 1102 preferably includes a proximal stop mechanism 1129. In the embodiment of FIG. 22, proximal stop mechanism 1129 includes annular bead 1135 formed by wall 1126 of elongate shaft 1120 and a flange 1133 of tip member 1186. As shown in FIG. 22, flange 1133 preferably seats against annular bead 1135 when tip member 1186 is in the retracted position. In FIG. 22, it may be appreciated that annular bead 1135 may deflect when tip member 1186 is moved from the extended position to the retracted position. In a particularly preferred embodiment, proximal stop mechanism 1129 is adapted to provide a hard stop that may be sensed by a physician using filter retrieval catheter 1102 in a surgical procedure. This hard stop provides tactile feedback indicating that tip member 1186 has been successfully placed in the retracted position.

[0120] In FIG. 22, it may be appreciated that filter 1146 has been urged into a contracted configuration. As described above, filter retrieval catheter 1102 preferably includes a proximal stop mechanism 1129 that is adapted to stop relative movement between tip member 1186 and elongate

shaft 1120 when tip member 1186 is in the retracted position. In a particularly preferred embodiment, the relative movement required to move tip member 1186 from the extended position to the retracted position is similar to the relative movement required to urge filter 1146 into distal portion 1148 of shaft lumen 1128 and into a contracted configuration. Also in a particularly preferred embodiment, proximal stop mechanism 1129 is adapted to provide a hard stop that provides tactile feedback indicating that tip member 1186 has been successfully placed in the retracted position and filter 1146 has been successfully urged into a contracted configuration. When a physician feels this hard stop, he or she will know that filter 1146 has been urged into a retracted position, and the likelihood that a physician will attempt to withdraw filter 1146 from blood vessel 1130 while it is in an expanded condition is reduced.

[0121] FIG. 23 is a partial cross-sectional view of a filter retrieval system 1200 in accordance with an exemplary embodiment of the present invention. Filter retrieval system 1200 includes a filter retrieval catheter 1202. Filter retrieval catheter 1202 includes an elongate shaft 1220 and a tubular member 1234. A first end 1236 of tubular member 1234 is fixed to a wall 1226, and a second end 1238 of tubular member 1234 is preferably fixed to a tip member 1286 of filter retrieval catheter 1202. Tip member 1286 is slidably disposed within a distal portion 1248 of a shaft lumen 1228 defined by elongate shaft 1220.

[0122] Filter retrieval catheter 1202 includes a distal guidewire port 1242 defined by tip member 1286 and a proximal guidewire port 1244 extending through wall 1226 of elongate shaft 1220. Various embodiments of proximal guidewire port 1244 are possible without deviating from the spirit and scope of the present invention. For example, proximal guidewire port 1244 may be defined by wall 1226 of proximal portion 1270 of elongate shaft 1220. By way of a second example, proximal guidewire port 1244 may be defined by first end 1236 of tubular member 1234. Tubular member 1234 defines a guidewire lumen 1240 which is in fluid communication with proximal guidewire port 1244 and distal guidewire port 1242.

[0123] Tubular member 1234 preferably includes a longitudinally collapsible portion 1237 disposed between first end 1236 and second end 1238. In the embodiment of FIG. 23, collapsible portion 1237 is in an extended state and tip member 1286 is disposed in an extended position. Collapsible portion 1237 preferably also has a contracted state. In a preferred embodiment, tip member 1286 is disposed in a retracted position when collapsible portion 1237 is in a contracted state. Distal portion 1248 of shaft lumen 1228 and tip member 1286 are preferably configured such that a filter may be partially or completely disposed within distal portion 1248 of shaft lumen 1228 when tip member 1286 is in the retracted position. When tip member 1286 is in the extended position, tapered distal portion 1284 of tip member 1286 preferably extends distally from distal portion 1248 of shaft lumen 1228.

[0124] FIG. 24 is an additional partial cross-sectional view of filter retrieval system 1200 of FIG. 23. In the embodiment of FIG. 24, tip member 1286 is disposed in the retracted position and collapsible portion 1237 of tubular member 1234 is in a contracted state. Also in the embodiment of FIG. 24, filter 1246 is partially disposed within distal portion 1248 of shaft lumen 1228.

[0125] One method in accordance with the present invention may include the steps of grasping guidewire 1204 near the proximal end thereof and applying a distally directed pushing force to elongate shaft 1220 near the proximal end thereof. This application of force to proximal portions of filter retrieval catheter 1202 may be used to urge collapsible portion 1237 of tubular member 1234 into a contracted state, to urge tip member 1286 and filter 1246 into distal portion 1248 of shaft lumen 1228, and to urge filter 1246 into a contracted configuration. A wire gripper 1250 may assist a physician in grasping guidewire 1204. In the embodiment of FIG. 24, wire gripper 1250 is disposed about a proximal portion 1206 of guidewire 1204. Wire gripper 1250 includes a handle 1252 and a plurality of jaws 1254 for grasping guidewire 1204. A knurl nut fitting 1256 is used to selectively urge jaws 1254 against guidewire 1204.

[0126] Having thus described the preferred embodiments of the present invention, those of skill in the art will readily appreciate that yet other embodiments may be made and used within the scope of the claims hereto attached. Numerous advantages of the invention covered by this document have been set forth in the foregoing description. It will be understood, however, that this disclosure is, in many respects, only illustrative. Changes may be made in details, particularly in matters of shape, size, and arrangement of parts without exceeding the scope of the invention. The invention's scope is, of course, defined in the language in which the appended claims are expressed.

What is claimed is:

1. A filter retrieval system comprising:

an elongate shaft having a proximal end, a distal end, and a wall defining a shaft lumen;

a proximal guidewire port disposed distal of the proximal end of the elongate shaft;

a distal tip disposed near the distal end of the elongate shaft, the distal tip having an aperture defining a distal guidewire port;

a tubular member having a first end fixed to the proximal guidewire port, a second end fixed to the distal tip, and a longitudinally collapsible region therebetween, the tubular member defining a guidewire lumen;

a guidewire extending through the distal guidewire port and the proximal guidewire port; and

a filter disposed on the guidewire.

2. The filter retrieval system of claim 1 wherein the longitudinally collapsible region has an extended state and a contracted state.

3. The filter retrieval system of claim 2 wherein the distal tip is movable relative to the elongate shaft.

4. The filter retrieval system of claim 3 wherein the distal tip moves between an extended position and a retracted position.

5. The filter retrieval system of claim 4 wherein the distal tip is in the extended position when the longitudinally collapsible region is in the extended state.

6. The filter retrieval system of claim 4 wherein the distal tip is in the retracted position when the longitudinally collapsible region is in the contracted state.

7. The filter retrieval system of claim 1 further comprising a wire gripper.

8. The filter retrieval system of claim 7 wherein the wire gripper includes a plurality of jaws for grasping the guidewire.

9. A filter retrieval system comprising:

a catheter including an elongate shaft having a proximal end, a distal end, and a wall defining a shaft lumen;

a proximal guidewire port disposed distal of the proximal end of the elongate shaft;

a generally conical tip slidably disposed within the distal end of the elongate shaft, the distal tip having an aperture defining a distal guidewire port;

a tubular member having a first end fixed to the proximal guidewire port, a second end fixed to the distal tip, and a longitudinally collapsible region therebetween, the tubular member defining a guidewire lumen;

a guidewire extending through the distal guidewire port and the proximal guidewire port; and

a filter disposed on the guidewire.

10. The filter retrieval system of claim 9 wherein the longitudinally collapsible region has an extended state and a contracted state.

11. The filter retrieval system of claim 10 wherein the distal tip is movable relative to the elongate shaft.

12. The filter retrieval system of claim 11 wherein the distal tip moves between an extended position and a retracted position.

13. The filter retrieval system of claim 12 wherein the distal tip is in the extended position when the longitudinally collapsible region is in the extended state.

14. The filter retrieval system of claim 12 wherein the distal tip is in the retracted position when the longitudinally collapsible region is in the contracted state.

15. The filter retrieval system of claim 9 further comprising a wire gripper.

16. The filter retrieval system of claim 15 wherein the wire gripper includes a plurality of jaws for grasping the guidewire.

17. The system of claim 9, wherein the generally conical tip includes a flexible tip member.

18. A filter system comprising:

an elongate shaft having a proximal end, a distal end, and a wall defining a shaft lumen;

a proximal guidewire port disposed distal of the proximal end of the elongate shaft;

a tubular member having a first end fixed to the proximal guidewire port, a second end near the distal end of the elongate shaft, and a longitudinally collapsible region therebetween, the tubular member defining a guidewire lumen;

a guidewire extending through the guidewire lumen; and

a filter disposed on the guidewire.

19. The filter retrieval system of claim 18 wherein the longitudinally collapsible region has an extended state and a contracted state.

20. The filter retrieval system of claim 19 wherein the filter is within the shaft lumen when the longitudinally collapsible region is in the contracted state and the filter is deployed from the shaft when the longitudinally collapsible region is in the extended state.

* * * * *