



(51) International Patent Classification:

B32B 13/12 (2006.01) *B32B 27/08* (2006.01)
B32B 27/28 (2006.01) *B32B 27/20* (2006.01)
B32B 27/32 (2006.01) *B32B 27/30* (2006.01)
B32B 25/14 (2006.01) *B32B 27/34* (2006.01)

(21) International Application Number:

PCT/EP2016/082003

(22) International Filing Date:

20 December 2016 (20.12.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15202469.1 23 December 2015 (23.12.2015) EP

(71) Applicant: **SIKA TECHNOLOGY AG** [CH/CH]; Zugerstrasse 50, 6340 Baar (CH).

(72) Inventors: **ACKERMANN, Herbert**; Glämischstrasse 4, 8632 Tann (CH). **HOEFFLIN, Frank**; Oesterliwaldweg 9, 5400 Baden (CH). **ROHRER, Roman**; Kernserstrasse 18, 6060 Sarnen (CH). **GUTJAHR, Lisa**; Goethestrasse 18, 63739 Aschaffenburg (DE). **Z'ROTZ, Roy**; Zugerstrasse 12, 6030 Ebikon (CH). **SCHOENBRODT, Simon**; Kernserstr. 18, 6060 Sarnen (CH).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: WATERPROOFING MEMBRANE WITH A SOLID FILLER COMPONENT

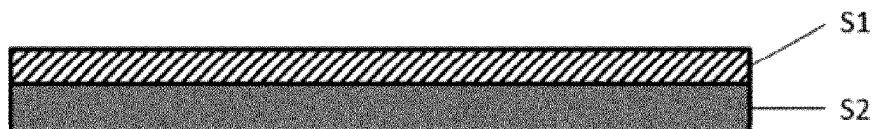


Fig. 1

(57) Abstract: The invention is directed to a membrane used in waterproofing and roofing applications, the membrane comprising a barrier layer S1 comprising a thermoplastic polymer component P1 and a contact layer S2 bonded to at least portion of the barrier layer S1, the contact layer S2 comprising a mixture of a solid filler component F and a thermoplastic polymer component P2. The invention is also directed to a method for producing the membrane, a method for waterproofing a substrate, to a waterproofed construction, to a method for sealing a substrate against water penetration and to a sealed construction for sealing a substrate against water penetration.



Waterproofing membrane with a solid filler component

Technical field

5

The invention relates to waterproofing membranes for use in the construction industry, for example for basements, roofing and tunneling applications to protect concrete structures against water penetration.

10

Background Art

Waterproofing membranes are commonly used in the construction industry for sealing bases, underground surfaces or buildings against water penetration.

15

State-of-the-art waterproofing membranes are multilayer systems comprising a polymer-based barrier layer as the principal layer to provide watertightness. Typical polymers used in barrier layers include thermoplastics such as plasticized polyvinylchloride (p-PVC) and thermoplastic polyolefins (TPO) or elastomers such as ethylene-propylene diene monomer (EPDM) and crosslinked chlorosulfonated polyethylene (CSPE). One of the drawbacks of polymer-based barrier layers is their poor bonding properties; they typically show low bonding strength to adhesives that are commonly used in the construction industry, such as epoxy adhesives, polyurethane adhesives, and cementitious compositions. Therefore, a contact layer, for example, a fleece backing, is typically used to provide sufficient bonding of the polymer-based barrier layer and the structure to be waterproofed.

20

25

In waterproofing applications, the membrane is typically post-applied to an existing concrete structure. In this case the membrane is bonded with an adhesive or a sealing tape via its contact layer to the surface of the concrete structure to be waterproofed. In pre-applied waterproofing applications, however, the membrane is laid out before the concrete structure to be

30

waterproofed is built. In this case, the membrane is placed with its barrier layer against an underlying structure or formwork and fresh concrete is then cast against the surface of the contact layer, thereby fully and permanently bonding the membrane to the surface of the hardening concrete.

5

In pre-applied waterproofing applications, typically an adhesive is used, to bond the barrier layer to the contact layer and to the fresh concrete cast against the contact layer. The adhesive should also enable the fresh concrete to penetrate deeply into to contact layer before hardening in order to provide high resistance to penetrating water.

10

One of the main challenges related to the multilayer waterproofing membranes is to ensure watertightness after infiltration in case of leak in the barrier layer. Watertightness after infiltration means in general that the sealing construction should be able to prevent the infiltrated water from penetrating to the space between the membrane and the waterproofed surface. A leak in the barrier layer can be a result of inward growing tree roots, material failure or tensile or shear forces directed to the membrane. If the watertightness after infiltration is lost, water is able to flow laterally underneath the membrane and to invade the interior of the building structure. In such cases the exact location of the leak in the barrier layer is also difficult to detect.

15

20

US8793862B2 describes a waterproofing membrane comprising a barrier layer, a composite layer arranged on one side of the barrier layer and a network of sealant between the barrier layer and the composite layer. The network of sealant is said to limit the size of area affected by penetrating water in case of water leakage in the barrier layer. In waterproofing applications the membrane is applied on a subsurface in such way that the barrier layer is directed against a concrete base and the composite layer is facing the concrete casted against the membrane. During the hardening process, the composite layer is penetrated by the liquid concrete forming a good bond with the hardened concrete.

25

30

US2015/0231863A1 discloses a waterproofing membrane including a barrier layer and a functional layer including a thermoplastic polymer that changes consistency under influence of highly alkaline media and an adhesive. Once the functional layer gets into contact with liquid concrete, the thermoplastic
5 polymer dissolves and allows the adhesive to bond to the cast concrete. The functional layer may additionally comprise other thermoplastic polymers, fillers or concrete constituents. The construction of the functional layer is said to enable working with membranes in adverse weather conditions without diminishing the adhesive capacity of the membrane.

10

One disadvantage of state-of-the-art multilayer waterproofing membranes is related to the use of adhesives, which increases the complexity of the membrane build-up and consequently the production costs of such membranes. The adhesive has to provide good binding to the low surface
15 energy polymers in the barrier layers, form a strong bond to the contact layer and to fresh concrete and have a good resistance to varying temperature ranges, UV irradiation and oxidation. Adhesives fulfilling all the requirements, if available at all, are expensive and thus increase the production cost of such membranes by a significant amount.

20

Another disadvantage of state-of-the-art multilayer waterproofing membranes is related to the use of fleece backings as contact layer to provide sufficient bonding between the membrane and the substrate to be waterproofed. In waterproofing and roofing applications the adjacent membrane sheets have to
25 be homogenously joined to each other in a reliable way to ensure watertightness of the sealing construction. Membranes having a fleece backing cannot be joined by heat welding but instead the edges of the membranes have to be bonded together either with an adhesive or with a sealing tape adhered on top of the seam and/or under the seam. The use of an adhesive or
30 a sealing tape to join adjacent membrane sheets complicates the installation process and increases application costs.

Summary of the invention

The objective of the present invention is to provide a simplified membrane, which can be used to protect surfaces against water penetration, for example
5 in basement waterproofing, roofing and tunneling applications, and which fully and permanently bonds to concrete and other cementitious compositions cast onto the membrane after hardening, as well as to adhesives commonly used in the construction industry.

10 Another objective of the present invention is to provide a membrane, which retains watertightness after infiltration in case of a leaking barrier layer.

Still another objective of the present invention is to provide a membrane, which has good heat welding properties and good stability against mechanical
15 stresses.

According to the invention, the aforementioned objectives are achieved with the membrane according to claim 1.

20 The main concept of the invention is that the membrane comprises a thermoplastic barrier layer and a contact layer bonded to at least a portion of the barrier layer, wherein the contact layer comprises a mixture of a solid filler component and a thermoplastic polymer component. The properties of the contact layer enable the membrane to be fully bonded to cementitious
25 compositions after hardening as well as to adhesives commonly used in the construction industry.

One of the advantages of the membrane is its simple build-up, which enables lower production costs compared to state-of-the-art membranes while still
30 providing full and permanent bonding to cementitious compositions and watertightness after infiltration.

Another advantage of the present invention is that the membrane has good heat welding properties, which means that adjacent membranes can be homogeneously joined by heat welding instead of using an adhesive or a sealing tape to bond overlapping membrane sheets.

5

In another aspect of the present invention there is provided a method for producing a membrane of the present invention, a method for waterproofing a substrate, a waterproofed construction, a method for sealing a substrate and a sealed arrangement.

10

Brief description of the Drawings

Fig. 1 shows a cross-section of a membrane having a barrier layer and a contact layer

15

Fig. 2 shows a cross-section of a membrane of the present invention having a barrier layer and two contact layers

20

Detailed description of the invention

The term "polymer" designates a collective of chemically uniform macromolecules produced by a polyreaction (polymerization, polyaddition, polycondensation) where the macromolecules differ with respect to their degree of polymerization, molecular weight and chain length. The term also comprises derivatives of said collective of macromolecules resulting from polyreactions, that is, compounds which are obtained by reactions such as, for example, additions or substitutions, of functional groups in predetermined macromolecules and which may be chemically uniform or chemically non-uniform.

25

30

The term "polymer component" designates polymer compositions comprising one or more polymers.

5 The term "inert mineral fillers" designates mineral fillers that are not chemically reactive. They are produced from natural mineral sources by mining followed by comminution to required particle size and shape. In particular, inert mineral fillers include sand, calcium carbonate, crystalline silicas, dolomite, clay, talc, mica, Wollastonite, barite, perlite, diatomaceous earth, pumice, and vermiculite.

10

By calcium carbonate as mineral filler is understood in the present document calcitic fillers produced from chalk, limestone or marble by grinding and/or precipitation.

15 The term "sand" designates mineral clastic sediments (clastic rocks) which are loose conglomerates (loose sediments) of round or angular small grains, which were detached from the original grain structure during the mechanical and chemical degradation and transported to their deposition point, said sediments having an SiO₂ content of greater than 50 wt.-%, in particular greater than
20 75 wt.-%, particularly preferably greater than 85 wt.-%.

The term "mineral binder" designates a binder, which in the presence of water reacts in a hydration reaction under formation of solid hydrates or hydrate phases. In particular, the term "mineral binder" refers to non-hydrated mineral
25 binders, i.e. mineral binders, which have not been mixed with water and reacted in a hydration reaction.

The term "hydraulic binder" designates substances that harden as a result of chemical reactions with water ("hydration reactions") and produce hydrates that
30 are not water-soluble. In particular, the hydration reactions of the hydraulic binder take essentially place independently of the water content. This means that hydraulic binders can harden and retain their strength even when exposed to water, for example underwater or under high humidity conditions. Examples

of hydraulic binders include cement, cement clinker and hydraulic lime. In contrast, "non-hydraulic binders" such as air-slaked lime (non-hydraulic lime) and gypsum, are at least partially water soluble and must be kept dry in order to retain their strength.

5

The term "gypsum" designates any known form of gypsum, in particular calcium sulfate dehydrate, calcium sulfate α -hemihydrate, calcium sulfate β -hemihydrate, or calcium sulfate anhydrite or mixtures thereof.

- 10 The term "latent hydraulic binders" designates particular type II concrete additives with latent hydraulic character according to DIN EN 206-1:2000. These materials are calcium aluminosilicates that are not able to harden directly or harden too slowly when mixed with water. The hardening process is accelerated in the presence of alkaline activators, which break the chemical
- 15 bonds in the binder's amorphous (or glassy) phase and promote the dissolution of ionic species and the formation of calcium aluminosilicate hydrate phases. Examples of latent hydraulic binders include granulated blast furnace slag.

- The term "pozzolanic binders" designates in particular type II concrete
- 20 additives with pozzolanic character according to DIN EN 206-1:2000. These materials are siliceous or aluminosilicate compounds that react with water and calcium hydroxide to form calcium silicate hydrate or calcium aluminosilicate hydrate phases. Pozzolanic binders include natural pozzolans such as trass and artificial pozzolans such as fly ash and silica fume.

25

- The term "cement" designates ground hydraulic binders, which apart from the hydraulic binders as the main constituents, usually contain small quantities of calcium sulfate (gypsum and/or hemihydrate and/or anhydrite), and optionally secondary constituents and/or cement additives such as grinding aids. The
- 30 main constituents are contained in quantities of more than 5% by weight. The main constituents can be Portland cement clinker, also referred to as clinker or cement clinker, slag sand, natural or artificial pozzolans, fly ash, for example, siliceous or calcareous fly ash, burnt shale, limestone and/or silica fume. As

secondary constituents, the cements can contain up to 5% by weight of finely divided inorganic, mineral substances, which originate from clinker production.

The term "cementitious composition" designates concrete, shotcrete, grout, mortar, paste or a combination thereof. The terms "paste", "mortar", "concrete", "shotcrete", and "grout" are well-known terms in the state-of-the-art. Pastes are mixtures comprising a hydratable cement binder, usually Portland cement, masonry cement, or mortar cement. Mortars are pastes additionally including fine aggregate, for example sand. Concrete are mortars additionally including coarse aggregate, for example crushed gravel or stone. Shotcrete is concrete (or sometimes mortar) conveyed through a hose and pneumatically projected at high velocity onto a surface. Grout is a particularly flowable form of concrete used to fill gaps. The cementitious compositions can be formed by mixing required amounts of certain components, for example, a hydratable cement, water, and fine and/or coarse aggregate, to produce the particular cementitious composition.

The term "fresh cementitious composition" or "liquid cementitious composition" designate cementitious compositions before hardening, particularly before setting.

The present invention relates in a first aspect to a membrane comprising a barrier layer **S1** having a first and a second opposing surface and a contact layer **S2** having a first and a second opposing surface, wherein at least a portion of the first surface of the barrier layer **S1** and the second surface of the contact layer **S2** are directly bonded to each other, and wherein the barrier layer **S1** comprises a thermoplastic polymer component **P1** and the contact layer **S2** comprises a mixture of a solid filler component **F** and a thermoplastic polymer component **P2**.

30

The barrier layer **S1** and the contact layer **S2** are typically sheet-like elements having first and second surfaces defined by peripheral edges. The second surface of the contact layer can be bonded to at least a portion of first surface

of the barrier layer or across the entire first surface of the barrier layer.
Preferably the second surface of the contact layer is bonded across the entire surface of the barrier layer.

- 5 One embodiment of the membrane of the present invention is shown in Fig. 1, which shows a cross-section of a membrane consisting of a barrier layer **S1** having a first and a second opposing surface and a contact layer **S2** having a first and a second opposing surface, which is bonded to at least a portion of the first surface of the barrier layer **S1**.

10

The first surface of the barrier layer **S1** is directly bonded to the second surface of the contact layer **S2**. The expression “directly bonded” is understood to mean that no further layer or substance is present between the layers, and that the two layers are directly bonded to each other or adhere to each other. At the
15 transition area between the two layers, the materials forming the layers can also be present mixed with each other.

Preferably, the thermoplastic polymer component **P2** has a melting point of 25 - 250°C , preferably 55 – 225°C, more preferably 60 - 200 °C, most preferably
20 65 - 150°C. Contact layers with the melting point of the thermoplastic polymer component **P2** in the above mentioned ranges were found to provide particularly good concrete adhesion strengths.

The term “melting point” refers to the maximum of the curve determined
25 according to ISO 11357 standard by means of dynamic differential calorimetry (DSC). At the melting point the material undergoes transition from the solid to the liquid state. The measurement can be performed with a Mettler Toledo 822e device at a heating rate of 2 degrees centigrade/min. The melting point values can be determined from the measured DSC curve with the help of the
30 DSC software.

The solid filler component **F** is preferably dispersed throughout, preferably uniformly, the thermoplastic polymer component **P2** in the contact layer **S2** to

ensure that the properties of the contact layer do not change considerably along the length of the membrane.

The solid filler component **F** is preferably present in the contact layer **S2** as a discontinuous particle based phase, which is dispersed in a continuous phase of the thermoplastic polymer component **P2**.

The amount of the solid filler component **F** in the contact layer **S2** should be high enough to enable sufficient strength of adhesion by which the contact layer is bonded to cementitious compositions. On the other hand, increasing the amount of the solid filler component **F** also increases the stiffness of the contact layer, which may make the membrane unsuitable for certain sealing applications.

The amount of the solid filler component **F** can be 10.0 - 90.0 wt.-% based on the total weight of the contact layer **S2**. Preferably, the amount of the solid filler component **F** is 15.0 – 80.0 wt.-%, more preferably 20.0 – 75.0 wt.-%, most preferably 25.0 – 70.00 wt.-%, based on the total weight of the contact layer **S2**. Particularly, the amount of the solid filler component **F** is 30.0 – 70.0 wt.-%, preferably 35.0 – 70.0 wt.-%, most preferably 35.0 – 65.0 wt.-%, based on the total weight of the contact layer **S2**.

In waterproofing applications, one of the most important characteristics of a membrane is the strength of adhesion by which the membrane is bonded to the substrate, for example a concrete surface, to be sealed against water penetration. In case the strength of adhesion is too low, gaps are more easily formed between the membrane and the surface of the substrate, which may lead to loss of watertightness after infiltration.

Preferably, the membrane has concrete adhesion strength of at least 5 N/50 mm, more preferably at least 10 N/50 mm, even more preferably of at least 15 N/50 mm, even more preferably of at least 20 N/50 mm, most preferably of at least 30 N/50 mm. In particular, the membrane has concrete adhesion strength

of at least 40 N/50 mm, preferably of at least 45 N/50 mm, more preferably of at least 50 N/50 mm, even more preferably of at least 55 N/50 mm, most preferably of at least 60 N/50 mm.

- 5 Preferably, the membrane has concrete adhesion strength in the range of 10 - 400 N/50 mm, more preferably of 15-350 N/50 mm, even more preferably of 20-300 N/50 mm, most preferably of 30-250 N/50 mm.

The term "concrete adhesion strength of a membrane" refers to the average
10 peel resistance [N/mm] per unit width of the membrane upon peeling the membrane from a surface of a concrete specimen, which has been casted on the surface of the contact layer and hardened for 28 days under standard atmosphere (air temperature 23°C, relative air humidity 50%).

- 15 In the context of the present invention, the concrete adhesion strength of a membrane is determined using the measurement method described below.

Method for determining the concrete adhesion strength of a membrane

20

For the measurement of the average peel resistance, a concrete test specimen having a sample of the test membrane adhered on its surface is first prepared.

- A sample membrane with a dimension of 200 mm (length) x 50 mm (width) is
25 first cut from the test membrane. One edge of the sample membrane on the side of the contact layer is covered with an adhesive tape having a length of 50 mm and a width coinciding with the width of the sample membrane to prevent the adhesion to the hardened concrete. The adhesive tapes are used to provide easier installation of the concrete test specimens to the peel resistance
30 testing apparatus. The sample membrane is placed into a formwork having a dimension of 200 mm (length) x 50 mm (width) x 30 mm (height) with the contact layer of the sample membrane facing upwards and the barrier layer against the bottom of the formwork.

For the preparation of the concrete specimen, a fresh concrete formulation is prepared by mixing 92.06 wt.-% of a concrete dry batch of type MC 0.45 with 7.73 wt.-% of water and 0.21 wt.-% of Sikament-12S for five minutes in a tumbling mixer. The concrete dry batch of type MC 0.45 contains 17.21 wt.-% of CEM I 42.5 N cement (preferably Normo 4, Holcim) and 74.84 wt.-% of aggregates containing 3.0 wt.-% of Nekafill-15 (from KFN) concrete additive (limestone filler), 24.0 wt.-% of sand having a particle size of 0-1 mm, 36.0 wt.-% of sand having a particle size of 1-4 mm, and 37 wt.-% of gravel having a particle size of 4-8 mm. Before blending with water and Sikament-12S the concrete dry batch is homogenized for five minutes in a tumbling mixer.

The formwork containing the sample membrane is subsequently filled with the fresh concrete formulation and vibrated for two minutes to release the entrapped air. After hardening for one day the concrete specimen is stripped from the formwork and stored under standard atmosphere (air temperature 23°C, relative air humidity 50%) for 28 days before measuring the average peel resistance.

The average peel resistance upon peeling the sample membrane from the surface of the concrete specimen is measured using a Zwick Roell AllroundLine Z010 material testing apparatus equipped with a Zwick Roell 90°-peeling device or using a similar testing apparatus fulfilling the requirements of the DIN EN 1372 standard.

In the peel resistance measurement, the concrete specimen is clamped with the upper grip of the material testing apparatus for a length of 10 mm at the end of the concrete specimen comprising the taped section of the sample membrane. Following, the sample membrane is peeled off from the surface of the concrete specimen at a peeling angle of 90° and at a constant cross beam speed of 100 ± 10 mm/min. During the peel resistance measurement the distance of the rolls is preferably approximately 570 mm. The peeling of the sample membrane is continued until a length of approximately 140 mm of the

sample membrane is peeled off from the surface of the concrete specimen. The average peel resistance is calculated as average peel force per unit width of the membrane [N/ 50 mm] during peeling over a length of approximately 70 mm thus excluding the first and last quarter of the total peeling length from the calculation.

The solid filler component **F** is preferably selected from the group consisting of organic fillers, inert mineral fillers and mineral binders and mixtures thereof. More preferably the solid filler component **F** is selected from the group consisting of inert mineral fillers and mineral binders and mixtures thereof.

In one embodiment the solid filler component **F** is inert mineral filler. The inert mineral filler is preferably selected from the group consisting of sand, calcium carbonate, crystalline silicas, and talc, and mixtures thereof.

Preferably, the solid filler component **F** comprises at least one mineral binder selected from the group consisting of hydraulic, non-hydraulic, latent hydraulic, pozzolanic binders, and mixtures thereof. The solid filler component **F** can further comprise inert mineral fillers such sand, calcium carbonate, crystalline silicas or talc. Preferably the solid filler component **F** contains at least 60.0 wt.-%, more preferably at least 70.0 wt.-%, even more preferably at least 80.0 wt.-%, most preferably at least 90.0 wt.-% of mineral binders.

The solid filler component **F** preferably comprises a hydraulic binder, in particular cement or cement clinker. The solid filler component **F** can further comprise latent hydraulic and/or pozzolanic binders, preferably slag and/or fly ash. In one advantageous embodiment, the solid filler component **F** contains 5.0-50.0 wt.-%, preferably 5.0-40.0 wt.-%, more preferably 5.0-30.0 wt.-% of latent hydraulic and/or pozzolanic binders, preferably slag and/or fly ash and at least 35.0 wt.-%, more preferably at least 65.0 wt.-% of hydraulic binder, preferably cement or cement clinker.

Preferably, the solid filler component **F** is a hydraulic binder, preferably cement.

The cement can be any conventional cement, for example, one in accordance with the five main cement types according to DIN EN 197-1: namely, Portland cement (CEM I), Portland composite cements (CEM II), blast-furnace cement (CEM III), pozzolan cement (CEM IV) and composite cement (CEM V). These
5 main cement types are subdivided, depending on the amount added, into an additional 27 cement types, which are known to the person skilled in the art and listed in DIN EN 197-1. Naturally, all other cements that are produced according to another standard are also suitable, for example, according to
10 ASTM standard or Indian standard. To the extent that reference is made here to cement types according to DIN standard, this naturally also relates to the corresponding cement compositions which are produced according to another cement standard.

15 The solid filler component **F** is preferably in the form of finely divided particles, in order to obtain a contact layer with uniform surface properties. The term “finely divided particles” refers to particles, whose median particle size d_{50} does not exceed 500 μm . The term median particle size d_{50} refers to a particle size below which 50 % of all particles by volume are smaller than the d_{50} value.

20

The term “particle size” refers to the area-equivalent spherical diameter of a particle. The particle size distribution can be measured by laser diffraction according to the method as described in standard ISO 13320:2009. For determination of the particle size distribution, the particles are suspended in
25 water (wet dispersion method). A Mastersizer 2000 device (trademark of Malvern Instruments Ltd, GB) can be used in measuring particle size distribution.

Preferably the median particle size d_{50} of the solid filler component **F** is
30 1.0 – 300.0 μm , more preferably 1.5 – 250.0 μm , even more preferably 2.0 – 200.0 μm , most preferably 2.0 – 150.0 μm .

Preferably, less than 40 wt.-%, more preferably less than 30 wt.-%, even more preferably less than 20-wt.-%, most preferably less than 10 wt.-% of the particles of the solid filler component **F** have a particle size of less than 5 μm and preferably less than 40 wt.-%, more preferably less than 30 wt.-%, even
5 more preferably less than 20-wt.-%, most preferably less than 10 wt.-% of the particles of the solid filler component **F** have a particle size of above 100 μm .

Preferably, the overall particle size of the solid filler component **F** (of at least 98 percent of the particles) is below 250 μm , more preferably below 200 μm , even
10 more preferably below 100 μm .

Increasing the amount of the thermoplastic polymer component **P2** in the contact layer **S2** improves the strength of adhesion between the barrier layer **S1** and the contact layer **S2**. However, increasing the amount of the
15 thermoplastic polymer component **P2** over a certain limit tends to also decrease the concrete adhesion strength of the membrane.

Preferably, the amount of the thermoplastic polymer component **P2** is 10.0 - 90.0 wt.-%, preferably 15.0 - 80.0 wt.-%, more preferably 20.0 - 75.0 wt.-%,
20 most preferably 25.0 – 70.0 wt.-%, based on the total weight of the contact layer **S2**. Particularly, the amount of the thermoplastic polymer component **P2** is 30.0 – 70.0 wt.-%, preferably 35.0 – 70.0 wt.-%, most preferably 35.0 – 65.0 wt.-%, based on the total weight of the contact layer **S2**.

25 Any kind of thermoplastic polymer component is in principle suitable to be used in the contact layer **S2**. Preferably, the thermoplastic polymer component **P2** comprises at least one polymer selected from the group consisting of ethylene – vinyl acetate copolymer (EVA), ethylene – acrylic ester copolymers, ethylene – α -olefin co-polymers, ethylene – propylene co-polymers, polypropylene (PP),
30 polyethylene (PE), polyvinylchloride (PVC), polyethylene terephthalate (PET), polystyrene (PS), polyamides (PA), chlorosulfonated polyethylene (CSPE), ethylene propylene diene rubber (EPDM), polyisobutylene (PIB), and mixtures thereof.

Preferably the thermoplastic polymer component **P2** comprises at least one polymer selected from the group consisting of low-density polyethylene, linear low-density polyethylene, high-density polyethylene, ethylene – vinyl acetate copolymer, ethylene – acrylic ester copolymers, ethylene – α -olefin co-polymers, and ethylene – propylene co-polymers.

The thermoplastic polymer component **P** may have a Young's modulus measured according to ISO 527-3 standard at a temperature of 23°C of not more than 1000 MPa, more preferably not more than 750 MPa, even more preferably not more than 500 MPa, most preferably not more than 450 MPa. In particular, the thermoplastic component **P** may have a Young's modulus measured according to ISO 527-3 standard at a temperature of 23°C in the range from 50 to 1000 MPa, preferably from 50 to 750 MPa, more preferably from 100 to 750 MPa, most preferably from 100 to 700 MPa. Contact layers containing a thermoplastic polymer component **P** having a Young's modulus at the above mentioned ranges were found to provide good concrete adhesion strengths.

Preferably, the thermoplastic polymer component **P2** has a Young's modulus measured according to ISO 527-3 standard at a temperature of 23 °C of less than 150 MPa, more preferably less than 100 MPa, most preferably less than 50 MPa. Contact layers with the thermoplastic polymer component **P2** having a Young's modulus at the above mentioned ranges were found to provide particularly high concrete adhesion strengths.

The properties of the membrane were found especially suitable when the thermoplastic polymer component **P2** comprises at least one ethylene-vinyl acetate copolymer, preferably having a content of a structural unit derived from vinyl acetate (hereinafter referred to as "vinyl acetate unit") of at least 7.0 wt.-%, more preferably at least 30 wt.-%, even more preferably at least 35 wt.-%, most preferably at least 40 wt.-%.

Preferably, the at least one ethylene-vinyl acetate copolymer has a content of vinyl acetate unit in the range from 7.0 wt.-% to 90.0 wt.-%, more preferably from 7.0 to 80.0 wt.-%, most preferably from 7.0 to 70.0 wt.-%.

- 5 Preferably, the amount of the at least one ethylene-vinyl acetate co-polymer is at least 5.0 wt.-%, more preferably at least 10.0 wt.-%, most preferably at least 15.0 wt.-%, based on the total weight of the thermoplastic polymer component **P2**. In particular, the amount of the at least one ethylene-vinyl acetate co-polymer is in the range from 5.0 wt.-% to 90.0 wt.-%, preferably from 10.0 to 10 90.0 wt.-%, more preferably from 15.0 to 80 wt.-%, most preferably from 15.0 to 70.0 wt.-%.

- The amount of the at least one ethylene-vinyl acetate co-polymer, preferably having a content of vinyl acetate unit of at least 7.0 wt.-%, more preferably at 15 least 20.0 wt.-%, is preferably at least 30.0 wt.-%, more preferably at least 35.0 wt.-%, even more preferably at least 40.0 wt.-%, most preferably at least 50.0 wt.-%, based on the total amount of the at least on thermoplastic polymer component **P2**.

- 20 The glass transition temperature (T_g) of the thermoplastic polymer component **P2** is preferably below the temperatures occurring during the use of the contact layer. It is therefore preferred that the T_g of the thermoplastic polymer component **P2** is below 0°C, more preferably below -15°C, most preferably below -30°C.

25

- The term “glass transition temperature” refers to the temperature measured by DSC according to ISO 11357 standard above which temperature a polymer component becomes soft and pliable, and below which it becomes hard and glassy. The measurements can be performed with a Mettler Toledo 822e 30 device at a heating rate of 2 degrees centigrade /min. The T_g values can be determined from the measured DSC curve with the help of the DSC software.

Typically, the contact layer **S2** contains only small amounts of water before it is contacted with a fresh cementitious composition. Preferably, the amount of water in the contact layer **S2** is less than 5.0 wt.-%, preferably less than 3.0 wt.-%, even more preferably less than 1.5 wt.-%, based on the total weight of the contact layer **S2**. In particular, the amount of water in the contact layer **S2** is less than 2.0 wt.-%, preferably less than 1.0 wt.-%, even more preferably less than 0.5 wt.-%, based on the total weight of the contact layer **S2**.

In case the solid filler component comprises or consists of mineral binders, the mineral binders should remain in substantially non-hydrated state at least until the contact layer is contacted with a composition containing water, such as fresh cementitious composition. Hydration of the mineral binder particles contained in the contact layer would decrease the flexibility and thus deteriorate the handling properties of the membrane. It would also affect negatively the concrete adhesion strength of the membrane. It has been found that the mineral binders contained in the contact layer remain in substantially non-hydrated if the membrane is stored for several weeks at normal room temperature and relative humidity of 50 %.

The contact layer **S2** may comprise not more than 10.0 wt.-%, preferably not more than 5.0 wt.-% of hydrated mineral binders, based on the total weight of the contact layer **S2**. Preferably, the contact layer **S2** comprises not more than 2.5 wt.-%, more preferably not more than 1.0 wt.-%, even more preferably not more than 0.5 wt.-%, most preferably not more than 0.1 wt.-% of hydrated mineral binders, based on the total weight of the contact layer **S2**.

In order to produce a contact layer **S2** containing non-hydrated mineral binders, the solid filler component **F** containing the mineral binder is preferably mixed with the thermoplastic polymer component **P2** in dry form, i.e. without being mixed with water. Mixing the mineral binder with water would result in initiation of the hydration reactions, which is not desired. The contact layer **S2** is preferably obtained by melt-processing a composition containing the solid filler component **F** and the thermoplastic polymer component **P2** to a

homogenized melt, which is then extruded through a manifold or a flat die followed by cooling the extruded material between calender cooling rolls.

The homogenized melt is preferably obtained by melt-processing a composition comprising the solid filler component **F** and the thermoplastic polymer component **P2** at a temperature, which is above the melting point of point of the thermoplastic polymer component **P2**. Preferably, the homogenized melt is substantially free of water. In particular, the amount of water in the homogenized melt is less than 5.0 wt.-%, preferably less than 2.5 wt.-%, more preferably less than 1.0 wt.-%, even more preferably less than 0.5 wt.-%, most preferably less than 0.1 wt.-%, based on the total weight of the homogenized melt.

The second surface of the contact layer **S2** is preferably non-tacky at normal room temperature (25 °C). Whether a surface of a specimen is tacky or not can be determined by pressing the surface with the thumb at a pressure of about 5 kg for 1 second and then trying to lift the specimen by raising the hand. In case the thumb does not remain adhered to the surface and the specimen cannot be raised up, the surface is considered to be non-tacky. In the context of membrane of the present invention, the "specimen" used in the tackiness test refers to a membrane having width of 10 cm and length of 20 cm.

Non-tackiness of the second surface of the contact layer **S2** enables to produce membranes without release tapes (different surfaces of the membrane do not adhere to each), which would have to be removed and disposed of at the job site.

Preferably, the thermoplastic polymer component **P1** is miscible with the thermoplastic polymer component **P2**.

30

More preferably, the thermoplastic polymer component **P1** is weldable with the thermoplastic polymer component **P2**. The polymer components being "weldable" with each other means here that a thermoplastic layer consisting of

the thermoplastic polymer component **P1** can be homogenously joined by heat welding with another thermoplastic layer consisting of the at least thermoplastic component **P2**.

5 According to one embodiment, the thermoplastic polymer component **P1** and the thermoplastic polymer component **P2** comprise at least common polymer. The thermoplastic polymer component **P1** and the thermoplastic polymer component **P2** can have the same composition.

10 The contact layer **S2** can comprise, in addition to the solid filler component **F** and the thermoplastic polymer component **P2** additives such as UV- and heat stabilizers, plasticizers, foaming agents, dyes, colorants, pigments, matting agents, antistatic agents, impact modifiers, flame retardants, and processing aids such as lubricants, slip agents, antiblock agents, and denest aids.

15

It was surprisingly found that the concrete adhesion strength of a membrane depends at least partly on the surface roughness of the contact layer **S2**. The term "roughness" designates unevenness of a surface, which is quantified with three-dimensional (3D) surface roughness parameters defined according to
20 ISO 25178 standard. The 3D-surface roughness parameters are calculated based on a surface geometry determined with an optical measurement method.

The following 3D-surface roughness parameters defined according to ISO
25 25178 standard for the first surface of a contact layer **S2** were found to correlate with the concrete adhesion strength of the membrane: root mean square roughness (S_q), average roughness (S_a), and maximum height of the surface (S_z).

30 The average roughness (S_a) and the root mean square roughness (S_q) represent an overall measure of the unevenness of the surface. They are relatively insensitive in differentiating peaks, valleys, and the spacing of the various texture features.

Maximum height of the surface (S_z) is calculated as difference between maximum peak height (S_p) and maximum valley depth (S_v). The maximum peak is the height of the highest point and maximum valley depth is the depth
5 of the lowest point of the surface.

In the context of the present invention, the root mean square roughness (S_q), the average roughness (S_a), and the maximum height of the surface (S_z) for the surface of a contact layer **S2** are determined using the measurement
10 method described below.

Method for determining the 3D-surface roughness parameters for a surface

15 In determination of the 3D-surface roughness parameters, the surface geometry of the surface is first measured.

For measuring of the surface geometry, a sample sheet, preferably with a size of 100 mm (length) x 100 mm (width), is adhered with the surface to be
20 measured facing upwards to an aluminum sheet, preferably having a dimension of 100 mm (length) x 100 mm (width) x 5 mm (height), to ensure a completely planar lying of the sample sheet. A double-sided adhesive tape can be used in attaching the sample sheet to the aluminum sheet.

25 The surface geometry of the surface is measured with a 3D-laser measuring confocal microscope Olympus LEXT OLS4000 using the laser modus, a 5x objective lens/magnification with 1x optical zoom, a large-field observation with an image stitching of 25 single images and a measurement area of 1 cm² in the x-y-direction. In conducting the surface geometry measurements, the top and
30 bottom limit of confocal acquisition in z-direction is preferably adjusted manually in the laser modus after adjusting the coarse and fine focus in the live color image modus.

The 3D-surface roughness parameters for the surface are then calculated based on the measured surface geometry with the Olympus LEXT OLS4000 Application Version 2.1.3 software. The 3D-surface roughness parameters are calculated using unfiltered primary dataset obtained from the optical
5 measurements. By “unfiltered data set” is meant that the dataset has not been adapted by using any of the filters characterized by the cutoff lengths λ_s , λ_c , or λ_f .

Preferably, the first surface of the contact layer **S2** has a 3D-root mean square
10 roughness (Sq) according to EN ISO 25178 of at least 1.0 μm , preferably of at least 2.0 μm , more preferably of at least 4.0 μm , even more preferably of at least 10.0 μm , most preferably of at least 15.0 μm .

Particularly, the 3D-root mean square roughness (Sq) according to EN ISO
15 25178 of the first surface of the contact layer **S2** is preferably in the range of 10.0 – 500.0 μm , more preferably 15.0 – 400.0 μm , even more preferably 20.0 – 300.0 μm , and most preferably 25.0 – 250.0 μm . Particularly preferably the 3D-root mean square roughness (Sq) according to EN ISO 25178 of the first surface of the contact layer **S2** is in the range of 10.0 – 300.0 μm , more
20 preferably 15.0 – 250.0 μm , even more preferably 20.0 – 200.0 μm , most preferably 30.0 – 200.0 μm .

Membranes having a 3D-root mean square roughness (Sq) of the first surface of the contact layer **S2** in the aforementioned range were found to have
25 particularly good concrete adhesion strength.

Preferably, the first surface of the contact layer **S2** has 3D-average roughness (Sa) according to EN ISO 25178 of at least 10.0 μm , preferably at least 15.0 μm , more preferably at least 20.0 μm , and most preferably at least 25.0 μm .

30

Particularly, the 3D-average roughness (Sa) according to EN ISO 25178 of the first surface of the contact layer **S2** is preferably in the range of 10.0 – 500.0 μm , more preferably 15.0 – 400.0 μm , even more preferably 20.0 – 300.0 μm ,

and most preferably 25.0 – 250.0 μm . Particularly preferably the 3D-average roughness (S_a) according to EN ISO 25178 of the first surface of the contact layer **S2** is in the range of 15.0 – 300.0 μm , more preferably 20.0 – 250.0 μm , even more preferably 25.0 – 200.0 μm , and most preferably 30.0 – 200.0 μm

5

Membranes having a 3D-average roughness (S_a) of the first surface of the contact layer **S2** in the aforementioned range were found to have particularly good concrete adhesion strength.

- 10 Preferably, the first surface of the contact layer **S2** has 3D-maximum surface height (S_z) according to EN ISO 25178 of at least 100.0 μm , more preferably of at least 125.0 μm , even more preferably of at least 150.0 μm , most preferably of at least 200.0 μm .

- 15 Membranes having a 3D-maximum surface height (S_z) of the first surface of the contact layer **S2** in the aforementioned ranges were found to have particularly good concrete adhesion strength.

- Even more preferably, the first surface of the contact layer **S2** has a 3D-root mean square roughness (S_q) according to EN ISO 25178 of at least 1.0 μm ,
20 preferably of at least 2.0 μm , more preferably of at least 4.0 μm , even more preferably of at least 10.0 μm , most preferably of at least 15.0 μm and a 3D-maximum surface height (S_z) according to EN ISO 25178 of at least 100.0 μm , more preferably of at least 125.0 μm , even more preferably of at least 150.0
25 μm , most preferably of at least 200.0 μm .

- Even more preferably, the first surface of the contact layer **S2** has a 3D-average roughness (S_a) according to EN ISO 25178 of at least 10.0 μm , preferably at least 15.0 μm , more preferably at least 20.0 μm , and most
30 preferably at least 25.0 μm and 3D-maximum surface height (S_z) according to EN ISO 25178 of at least 100.0 μm , more preferably of at least 125.0 μm , even more preferably of at least 150.0 μm , most preferably of at least 200.0 μm .

The content of the thermoplastic polymer component **P1** in the barrier layer **S1** is preferably at least 50.0 wt.-% based on the total weight of the barrier layer. More preferably the content of the thermoplastic polymer component **P1** is at least 70.0 wt.-%, most preferably at least 80.0 wt.-%, based on the total weight
5 of the barrier layer **S1**.

Any kind of thermoplastic polymer component is in principle suitable to be used in the barrier layer. The thermoplastic polymer component **P1** preferably comprises at least one polymer selected from the group consisting of ethylene
10 – vinyl acetate copolymers (EVA), ethylene – acrylic ester copolymers, ethylene – α -olefin co-polymers, ethylene – propylene co-polymers, polypropylene (PP), polyethylene (PE), polyvinylchloride (PVC), polyethylene terephthalate (PET), polystyrene (PS), polyamides (PA), chlorosulfonated polyethylene (CSPE), ethylene propylene diene rubber (EPDM),
15 polyisobutylene (PIB), and mixtures thereof.

The barrier layer **S1** can comprise additives and processing agents, such as fillers, UV and heat stabilizers, plasticizers, lubricants, biocides, flameproofing agents, antioxidants, pigment, such as for example titanium dioxide or carbon
20 black, dyes, and colorants.

There are no particular restrictions for the thickness of the contact layer **S2**. However, membranes with contact layer thickness of above 50 mm are not practical in waterproofing applications and contact layers with a thickness of
25 below 50 μ m have been found to be difficult to produce with the desired mechanical properties. In particular, the contact layer **S2** has a thickness of at least 0.1 mm, preferably of 0.1 – 75.0 mm, more preferably 0.1 – 25.0 mm, most preferably 0.1 – 10.0 mm. Preferably, the contact layer **S2** has a thickness of 0.1 – 50.0 mm, preferably 0.2 – 10.0 mm, more preferably 0.3 –
30 5.0 mm, most preferably 0.4 – 2.0 mm. The thickness of the contact layer **S2** is measured according to EN 1849-2.

It is preferable that the contact layer **S2** has a certain flexibility to allow the membrane to be wound into rolls, typically during production, and then easily applied to a surface of a substrate. The inventors of the present invention, however, also have found that membranes with a flexible contact layer have
5 better concrete adhesion strength. Preferably, the contact layer **S2** has a shear modulus at a temperature of 30°C measured according to EN ISO 6721-2:2008 of less than 600 MPa, more preferably less than 200 MPa, and most preferably less than 100 MPa.

10 The contact layer **S2** preferably has a mass per unit area of 100 – 10000 g/m², more preferably of 200 – 6000 g/m², even more preferably of 300 – 3000 g/m². The mass per unit area is measured according to EN 1849-2 standard.

The density of the contact layer **S2** is preferably 0.25-3.00 g/cm³, particularly
15 0.30-2.75 g/cm³, more preferably 0.35-2.50 g/cm³, even more preferably 0.40-2.00 g/cm³, most preferably 0.50-1.50 g/cm³. The density of the contact layer is measured by using the buoyancy method.

The thickness of the barrier layer **S1** is not subjected to any particular
20 restrictions. However, membranes with barrier layer thickness of above 15 mm and below 10 µm are usually not practical in waterproofing applications. The thickness of the barrier layer **S1** is preferably in the range of 0.1 – 10.0 mm, more preferably 0.1 – 7.5 mm, most preferably 0.1 – 5.0 mm.

25 It is preferable that the barrier layer is in the form of a flexible plastic layer. This allows the membrane to be wound into rolls, typically during production, and then easily applied to a surface of a substrate. The inventors of the present invention, however, also have found that increasing the flexibility of the barrier layer has a positive effect to the concrete adhesion strength of the membrane.
30 Preferably, the barrier layer **S1** has a shear modulus at a temperature of 30 °C according to EN ISO 6721-2:2008 of less than 600 MPa, more preferably less than 500 MPa, and most preferably less than 250 MPa.

Preferably, wherein the contact layer **S2** is weldable with the barrier layer **S1**.
“Weldable” means here that the layers can be homogenously joined to each other by heat welding.

- 5 In case the membrane is applied as a waterproofing membrane, the barrier layer **S1** should be as waterproof as possible and not to decompose or be mechanically damaged even under prolonged influence of water or moisture. Typically such barrier layer **S1** shows:
- 10 impact resistance of 200 - 1500 mm measured according to EN 12691: 2005,
- longitudinal and transversal tensile strength of at least 5 MPa at a temperature of 23°C measured according to DIN ISO 527-3,
- 15 longitudinal and transversal elongation at break of at least 300% at a temperature of 23°C measured according to DIN ISO 527-3,
- water resistance at 0.6 bar for 24 hours measured according to EN 1928 B, and
- 20 maximum tear strength of at least 100 N measured according to EN 12310-2.

- Another embodiment of the membrane of the present invention is shown in Fig.
- 25 2, which shows a cross-section of a membrane further comprising a second contact layer **S2'** having a first surface and a second opposing, wherein at least a portion of the second surface of the barrier layer **S1** and the first surface of the contact layer **S2'** are directly bonded to each other, and wherein the second contact layer **S2'** comprises a mixture of a solid filler component **F'** and
- 30 a thermoplastic polymer component **P2'**.

The contact layer **S2'** is typically a sheet-like element having first and second surfaces defined by peripheral edges.

Preferably, the solid filler component **F'** is dispersed throughout, preferably uniformly, the thermoplastic polymer component **P2'** in the second contact layer **S2'**.

5

The amount of the solid filler component **F'** can be 10.0 - 80.0 wt.-%, based on the total weight of the second contact layer **S2'**. Preferably, the amount of the solid filler component **F'** is 20.0 - 75.0 wt.-%, more preferably 30.0 - 70.0 wt.-%, even more preferably 35.0 - 65.00 wt.-%, most preferably 40.0 - 60.0 wt.-%, based on the total weight of the second contact layer **S2'**.

10

The solid filler component **F'** is preferably selected from the group consisting of organic fillers, inert mineral fillers and mineral binders and mixtures thereof.

More preferably the solid filler component **F'** is selected from the group

15 consisting of inert mineral fillers and mineral binders and mixtures thereof.

The solid filler component **F** preferably comprises a hydraulic binder, in particular cement or cement clinker.

20 The thermoplastic polymer component **P2'** is preferably miscible with the thermoplastic polymer component **P1**. More preferably, the thermoplastic polymer component **P2'** is weldable with the thermoplastic polymer component **P1**.

25 Preferably, the amount of the thermoplastic polymer component **P2'** is 20.0 - 85.0 wt.-%, more preferably 30.0 - 80.0 wt.-%, even more preferably 35.0 - 75.0 wt.-%, most preferably 40.0 - 70.0 wt.-%, based on the total weight of the second contact layer **S2'**.

30 Any kind of thermoplastic polymer component is in principle suitable to be used in the second contact layer **S2'**. Preferably, the thermoplastic polymer component **P2'** comprises at least one polymer selected from the group consisting of ethylene - vinyl acetate copolymers (EVA), ethylene - acrylic

ester copolymers, ethylene – α -olefin co-polymers, ethylene – propylene co-polymers, polypropylene (PP), polyethylene (PE), polyvinylchloride (PVC), polyethylene terephthalate (PET), polystyrene (PS), polyamides (PA), chlorosulfonated polyethylene (CSPE), ethylene propylene diene rubber
5 (EPDM), polyisobutylene (PIB), and mixtures thereof.

Preferably the first contact layer **S2** and the second contact layer **S2'** have the same compositions.

10 Especially when the membrane is used for waterproofing of uneven concrete surfaces, it is necessary to ensure that the membrane is not broken due to the pressure of the concrete casted on the surface of the membrane or due to local stresses applied to the membrane stretched over concave parts of the surface.

15 Preferably, the membrane has a tensile strength at temperature of 23°C measured according to standard DIN ISO 527-3 of at least 5 MPa, more preferably at least 10 MPa and a elongation at break at a temperature of 23°C measured according to standard DIN ISO 527-3 of at least 100%, more preferably of at least 200%, most preferably of at least 300%.

20

One important characteristic of membranes used in waterproofing applications is the watertightness after infiltration. Watertightness after infiltration describes the ability of the membrane to resist spreading of infiltrated water in the space between the membrane and the waterproofed surface or between the layers of
25 the membrane after leakage in the barrier layer.

The watertightness after infiltration can be measured with a modified watertightness test based on the ASTM 5385 standard measurement method. In the modified watertightness test ASTM 5385M, a hole with a diameter of 10
30 mm is punched to the membrane, which is then adhered to a concrete slab. The watertightness of the punched membrane is tested with the same kind of apparatus as described in the original ASTM 5385 method. The water pressure inside the test apparatus is increased to a value between 0.25 and 7 bar and

the test is continued for a specified time period. At the end of the test, the concrete slab is removed from the test apparatus and at least part of the membrane is peeled off from the concrete surface to determine, how far the water has invaded between the concrete surface and the membrane and/or
5 between different layers of the membrane. In case only a small area, such as a circle with a diameter of 2.50 mm or less, near the hole is affected by water, the membrane is considered to be watertight after infiltration according to ASTM 5385M.

10 Preferably, the membrane is watertight after infiltration according to ASTM 5385M, when the test is conducted at a pressure of 7 bars and continued for 7 days.

Preferably, the interlayer peel strength of the contact layer **S2** from the barrier
15 layer **S1** is at least 50 N/50 mm, more preferably at least 100 N/50 mm, most preferably at least 200 N/50 mm.

The term "interlayer peel strength" refers to the average peeling resistance (N) per 50 mm of the contact layer upon peeling the contact layer **S1** from one
20 edge at an angle of 180° from the barrier layer **S2**. The interlayer peel resistance is measured according to the T-peel resistance test according to ISO 1139 standard.

The preferences given above for the solid filler components **F** and **F'**, for the
25 thermoplastic polymer components **P1**, **P2**, **P2'** apply equally to all aspects of the invention.

In another aspect of the present invention, a method for producing a
30 membrane, as it was described above in detail, is provided. The method for producing a membrane is not particularly limited and any conventional technology used for producing composite membranes comprising polymer based sheets and films can be used.

The membrane can be produced by extruding, calendering, compressing or casting processes.

- 5 Preferably, the method for producing a membrane comprises extruding and/or calendering and/or co-extruding a homogenized melt comprising the components of the contact layer **S2** and a homogenized melt comprising the components of the barrier layer **S1**.
- 10 The homogenized melt comprising the components of the contact layer **S2** can be obtained by melt-homogenizing a composition comprising the solid filler component **F** and the thermoplastic polymer component **P2** in an extruder or kneader. The melt-homogenizing is preferably conducted at a temperature that is higher than the melting point of the thermoplastic polymer component **P2**,
- 15 typically at least 20 °C higher, preferably at least 30 °C higher. Preferably, the amount of water in the homogenized melt is less than 1.0 wt.-%, preferably less than 0.5 wt.-%, most preferably less than 0.1 wt.-%.

- Preferably, the thermoplastic polymer component **P2** is melt-processed in an extruder before the solid filler component **F** is fed into the extruder through a
- 20 side feeder. Some or all of the components of the composition can also be first mixed in a mixing device to obtain a dry blend, which is then fed into extruder or kneader. The components of the composition can also be first mixed in a compounding extruder to obtain pellets or granulates, which are then fed into
- 25 extruder or kneader.

The homogeneous melt comprising the components of the barrier layer **S1** can be obtained by melt-homogenizing a composition comprising the thermoplastic polymer component **P1** in an extruder or a kneader.

30

The method for producing a membrane can comprise producing the barrier layer **S1** and the contact layer **S2** in separate processes after which the layers are bonded to each other by lamination.

The barrier layer **S1** and the contact layer **S2** can be produced by an extrusion process, which process comprises extruding homogenized melts comprising the components of the barrier and contact layers through a manifold or a flat,
5 annular, slot or cast die, preferably through a manifold or a flat die and quenching the extruded web of material between calender cooling rolls. The thickness of the produced layers can be controlled by die lip adjustment and/or by adjusting the gap size between the cooling rolls. Any conventional extruder apparatus used for producing flat film sheet as described in "Kunststoff
10 Verarbeitung" by Schwarz, Ebeling and Furth, 10th Edition 2005, Vogel Buchverlag, paragraph 5.7.2 can be used in the extrusion process.

The barrier layer **S1** and the contact layer **S2** can also be produced by a calendering process comprising passing the homogenized melts comprising
15 the components of the respective layers between a series of calender rolls, in the course of which the homogenized melt is spread across the width of the rolls, stretched and finally cooled to the form of a film or sheet with defined thickness. The homogenized melt can be fed with an extruder to the top of the calendering section and into the gap between the first and second rolls.
20 Preferably, the calendering section comprises at least four rolls. Any conventional calendering apparatus used for producing films or sheets from thermoplastic materials as described in "Kunststoff Verarbeitung" by Schwarz, Ebeling and Furth, 10th Edition 2005, Vogel Buchverlag, chapter 3 can be used in the calendering process.

25 The produced barrier and contact layers can subsequently be bonded to each other by any conventional lamination technique, preferably by welding under the influence of pressure, pressing with IR radiation, or by pressing between heated calender rolls.

30 The method for producing a membrane can be a co-extrusion-calendering process, in which process homogenized melts of compositions comprising the components of the barrier layer **S1** and the contact layer **S2**, respectively, are

simultaneously extruded as layers on top of each other followed by quenching the extruded double layer material web between calender cooling rolls.

The method for producing a membrane can also be a two-step process

5 comprising a first step, in which a first layer, the barrier layer **S1** or the contact layer **S2**, is produced followed by a second step, in which a homogenized melt comprising the components of the second layer is extruded through a manifold or a flat, annular, slot or cast die, preferably through a manifold or a flat die, on the surface of the first layer. The thus obtained double layer material

10 construction is then cooled between cooling rolls of a calendering apparatus. The first layer can be produced by an extrusion-calendering process or by a calendering process as described above.

According to one embodiment, the method for producing a membrane

15 comprises a first step of extruding a homogenized melt comprising the components of the contact layer **S2** through a flat die of a first extrusion apparatus to obtain a contact layer **S2** followed by a second step of extruding a homogenized melt comprising the components the barrier layer **S1** through a flat die of a second extrusion apparatus to obtain a sheet like mass, which is

20 welded together under the influence of pressure with the incoming contact layer **S2** between two calender rolls.

Preferably, the method for producing a membrane comprises extruding a homogenized melt of a composition comprising the components of the contact

25 layer **S2** through a manifold or flat die followed by passing the extruded material between calender rolls.

The optimal extrusion temperature depends on the composition of the contact layer **S2** and on the desired throughput of the extrusion process. The extrusion

30 temperature is preferably 80 – 250°C, more preferably 100 – 240°C, even more preferably 120 – 220°C, most preferably 140 – 200°C. The term “extrusion temperature” refers to the temperature of the molten material in the extruder die or manifold. Membranes having a contact layer produced by an

extrusion-calendering process with an extrusion temperature within the above described temperature ranges were found to have particularly good concrete adhesion strengths.

- 5 Preferably, the extrusion pressure is 20.0-350.0 bar, preferably 30.0-240 bar, more preferably 35.0-200 bar, most preferably 40.0-130.0 bar. The “extrusion pressure” refers to the pressure of the molten material inside the extruder just before the material enters the extruder die or manifold.
- 10 The gap size between the calender rolls can be wider than the thickness of the contact layer **S2**. For example, the gap size between the calender rolls can be 10%, 25%, 50%, or 75% wider than the thickness of the contact layer **S2**.

Preferably, the method for producing a membrane further comprises extruding
15 a homogenized melt comprising the components of the barrier layer **S1** through a manifold or a flat die on the surface of the contact layer **S2** followed by passing the thus obtained double layer material web between calender rolls.

According to one embodiment, the method for producing a membrane
20 comprises extruding and/or calendering and/or co-extruding a homogenized melt of a composition comprising the components of a barrier layer **S1**, a homogenized melt of a composition comprising the components of a first contact layer **S2**, and a homogenized melt of a composition comprising the components a second contact layer **S2'**.

25 The homogenized melt comprising the components of the second contact layer **S2'** can be obtained by melt-homogenizing a composition comprising the solid filler component **F'** and the thermoplastic polymer component **P2'** in an extruder or kneader.

30 The homogenized melts comprising the aforementioned components of the barrier layer **S1** and the contact layers **S2** and **S2'** can further comprise typical additives used in extrusion and calendering processes such as internal

lubricants, slip agents, antiblock agents, denest aids, oxidative stabilizers, melt strength enhancers. The homogenized melts can also further comprise other additives such as plasticizers, dyes, colorants, pigments, matting agents, antistatic agents, impact modifiers, and flame retardants.

5

According to one embodiment, the homogenized melts for the contact layers **S2** and **S2'** comprise, in addition to the solid filler component **F/F'** and the at least thermoplastic polymer component **P2/P2'**, at least one chemical or physical foaming agent and optionally at least one activator for the foaming

10

agent. Examples of suitable chemical foaming agents include

azodicarbonamide, azobisisobutyronitrile, benzenesulphonyl hydrazide, 4,4-oxybenzenesulphonyl semicarbazide, 4,4-oxybis(benzenesulphonyl hydrazide), diphenyl sulphone-3,3-disulphonyl hydrazide, p-toluenesulphonyl semicarbazide, sodium bicarbonate, ammonium carbonate, ammonium

15

bicarbonate, potassium bicarbonate, diazoaminobenzene, diazoaminotoluene, hydrazodicarbonamide, diazoisobutyronitrile, barium azodicarboxylate and 5-hydroxytetrazole. Preferably, the foaming agent is sodium bicarbonate.

20

The method for producing a membrane can further comprise a post-treatment step such as brushing and/or sand blasting and/or plasma treatment, in particular air plasma treatment, to optimize the surface properties of the produced contact layer. The final product is preferably stored in the form of rolls.

25

In another aspect of the present invention a method for waterproofing a substrate is provided. The substrate can be any structural or civil engineering structure, which is to be sealed against moisture and water, such as a hardened concrete structure or a subsurface. The surface of the substrate can orientated horizontally or not.

30

The method for waterproofing a substrate comprises steps of

- applying a membrane according to the present invention to a surface of a substrate such that the second surface of the barrier layer **S1** is directed against the surface of the substrate,
- casting a fresh cementitious composition on the first surface of the contact
- 5 layer **S2**, and
- hardening the fresh cementitious composition.

Preferably, the fresh cementitious composition is a fresh concrete composition.

The casted cementitious composition after hardening can be part of a

10 structure, in particular, an above-ground or underground structure, for example a building, garage, tunnel, landfill, water retention, pond, dike or an element for use in pre-fabricated constructions.

- According to one embodiment, the method for waterproofing a substrate
- 15 comprises steps of
- applying a layer of adhesive on the surface of the substrate and covering the layer of the adhesive with a membrane of the present invention such that the second surface of the second contact layer **S2'** is brought in contact with the layer of adhesive,
 - 20 - casting a fresh cementitious composition on the first surface of the contact layer **S2**, and
 - hardening the layer of adhesive and the fresh cementitious composition.

The adhesive can be a fresh cementitious composition or a synthetic resin

25 based adhesive, such as epoxy based two-component adhesive or EVA-based adhesive, preferably a fresh cementitious composition.

The casted cementitious composition after hardening can be part of a

structure, in particular, an above-ground or underground structure, for example

30 a building, garage, tunnel, landfill, water retention, pond, dike or an element for use in pre-fabricated constructions.

In another aspect of the present invention a waterproofed construction for waterproofing a substrate against water penetration is provided. The waterproofed construction comprises a layer of concrete and a membrane according to the present invention arranged between the surface of the substrate and the layer of concrete such that the second surface of the barrier layer **S1** is directed against the surface of the substrate and the first surface of the contact layer **S2** is fully bonded to the surfaced of the layer of concrete.

The term "fully bonded" refers to two surfaces being adhesively joined over the full surface.

The substrate can be any structural or civil engineering structure, which is to be sealed against moisture and water, such as a hardened concrete structure or a subsurface.

According to one embodiment, the waterproofed construction for waterproofing a substrate against water penetration comprises a layer of concrete and a membrane according to the present invention arranged between the surface of the substrate and the layer of concrete such that the second surface of the second contact layer **S2'** is directed against the surface of the substrate and the first surface of the contact layer **S2** is fully bonded to the surface of the layer of concrete.

The substrate can be any structural or civil engineering structure, which is to be sealed against moisture and water, such as a hardened concrete structure or a subsurface.

In another aspect of the present invention a method for sealing a substrate against water penetration is provided. The method for sealing comprises steps of

- applying a layer of adhesive on the surface of the substrate,

- covering the layer of the adhesive with a membrane of the present invention such that the first surface of the contact layer **S2** or the second surface of the second contact layer **S2'** is brought in contact with the layer of adhesive, and
- hardening the layer of adhesive.

5

The adhesive can be a fresh cementitious composition or a synthetic resin based adhesive, such as epoxy based two-component adhesive or EVA-based adhesive, preferably a fresh cementitious composition, particularly a fresh concrete or shotcrete composition.

10

According to one embodiment, the method for sealing a substrate against water penetration comprises steps of

- applying a layer of adhesive on the first surface of a contact layer **S2** or on the second surface of a second contact layer **S2'**,

- 15 - covering surface of the substrate with the membrane of the present invention such that the layer of adhesive is brought in contact with surface of the substrate, and
- hardening the layer of adhesive.

- 20 The adhesive can be a fresh cementitious composition or a synthetic resin based adhesive, such as epoxy based two-component adhesive or EVA-based adhesive, preferably a fresh cementitious composition, particularly a fresh concrete or shotcrete composition.

25

In another aspect of the present invention a sealed construction for sealing a substrate against water penetration is provided. The sealed construction comprises a membrane according to the present invention and a layer of adhesive arranged between a surface of the substrate and the membrane such

30 that the first surface of the first contact layer **S2** or the second surface of the second contact layer **S2'** is bonded to the surface of the substrate with the layer of adhesive.

The adhesive can be a fresh cementitious composition or a synthetic resin based adhesive such as epoxy based two-component adhesive or EVA-based adhesive, preferably a fresh cementitious composition, particularly a fresh concrete or shotcrete composition.

5

Examples

The materials shown in Table 1 were used in the examples.

10

Table 1. Materials used in the experiments

Trade name	Composition	Provider
Evatane 18-150	EVA copolymer with 18 wt.-% vinyl acetate	Arkema
Elvax 260A	EVA copolymer with 28 wt.-% vinyl acetate	DuPont
Levapren 400	EVA copolymer with 40 wt.-% vinyl acetate	Lanxess
Levapren 700	EVA copolymer with 70 wt.-% vinyl acetate	Lanxess
Levapren 900	EVA copolymer with 90 wt.-% vinyl acetate	Lanxess
Elvaloy AC 2116	EEA copolymer with 16 wt.-% acrylic acid	DuPont
Vistamax 6202	PP-PE copolymer with 15 wt.-% polyethylene	Exxon Mobile
Holcim Optimo 4	CEM II/B-M (T-LL) 42,5 N SN EN 197-1 cement	LaFargeHolcim

^a EVA, ethylene vinyl acetate copolymer

^b EEA, ethylene acrylic acid copolymer

15

Example 1

Preparation of the example membranes

- 5 The example membranes EX1-EX9 each comprising a barrier layer and a contact layer were produced with a laboratory scale extrusion-calendering apparatus comprising a flat die and set of water-cooled calender rolls. The layers were extruded with a twin screw extruder (Berstorff GmbH).
- 10 For each example membrane (EX), a contact layer (E) was first produced with the extrusion-calendering apparatus after which a barrier layer was extruded and bonded on one surface of the contact layer using the same extrusion-calendering apparatus. A polyethylene-based thermoplastic membrane (WT 1210 HE available from Sika) was used as a barrier layer in all example
- 15 membranes EX1-EX9.

The extruder part of the apparatus was equipped with a flat die and the melted compositions of the contact layers were extruded without using a die lip. The polymer component of the contact layer was first melt-processed in the

20 extruder at a temperature, which is approximately 30 °C above the melting temperature of the polymer component before the solid filler component was fed into the extruder through a side feeder. The produced contact layers had a thickness of approximately 1.50 mm while the thickness of the barrier layer was approximately 0.5 mm. A melted composition consisting of the constituents of

25 the barrier layer was extruded with a flat die on the surface of each contact layer and the layers were pressed together and cooled between calender cooling rolls.

The operating conditions of the extruder-calender apparatus during producing

30 the example membranes are presented in Table 2 and the compositions of the contact layers (E) of the example membranes EX1-EX9 are presented in Table 3. The extrusion temperature and pressure were measured at a point, where

the melted mass entered the flat die. The temperature of the cooling rolls was approximately 20°C during the production period.

Table 2. Operating conditions of the extrusion process

Contact layer	Extrusion pressure [bar]	Extrusion temperature [°C]	Extrusion flux [kg/h]	Roller gap [mm]	Roller speed [m/min]
E1	72	160	12	3.00	0.49
E2	53	160	12	3.00	0.52
E3	83	160	12	3.00	0.5
E4	77	160	12	3.00	0.47
E5	65	160	12	3.00	0.51
E6	79	160	12	3.00	0.53
E7	59	160	12	3.00	0.5
E8	59	160	13	3.00	0.5
E9	58	160	13	3.00	0.51
Barrier layer	61	160	10	1.80	0.78

Preparation of concrete test specimen

Three sample membranes with a dimension of 200 mm (length) x 50 mm (width) were cut from each of the example membranes EX1-EX9 produced as described above. The sample membranes were placed into formworks having a dimension of 200 mm (length) x 50 mm (width) x 30 mm (height) with the contact layer facing upwards and with the barrier layer against the bottom of the formwork.

One edge of each sample membrane on the side of the contact layer was covered with an adhesive tape having a length of 50 mm and width coinciding with the width of the membrane sample to prevent the adhesion to the hardened concrete. The adhesive tapes were used to provide easier installation of the test specimens to the peel resistance testing apparatus.

For the preparation of concrete specimens a batch of fresh concrete formulation was prepared. The fresh concrete formulation was obtained by mixing 8.9900 kg of a concrete dry batch of type MC 0.45 conforming to EN 1766 standard, 0.7553 kg of water and 0.0202 kg of Sikament-12S for five minutes in a tumbling mixer. The concrete dry batch of type MC 0.45 contained 1.6811 kg of CEM I 42.5 N cement (Normo 4, Holcim), 7.3089 kg of aggregates containing 3% Nekafill-15 (from KFN) concrete additive (limestone filler), 24% sand having a particle size of 0-1 mm, 36% sand having a particle size of 1-4 mm, and 37% gravel having a particle size of 4-8 mm. Before blending with water and Sikament-12S the concrete dry batch was homogenized for five minutes in a tumbling mixer.

The formworks containing the sample membranes were subsequently filled with the fresh concrete formulation and vibrated for two minutes to release the entrapped air. After hardening for one day the test concrete specimens were stripped from the formworks and stored under standard atmosphere (air temperature 23°C, relative air humidity 50%) before measuring the peel resistances.

Measurement of peel resistances

The measurement of peel resistances of sample membranes from hardened concrete specimen was conducted in accordance with the procedure laid out in
5 the standard DIN EN 1372:2015-06. A Zwick Roell AllroundLine Z010 material testing apparatus equipped with a Zwick Roell 90°-peeling device (type number 316237) was used for conducting the peel resistance measurements.

For the peel resistance measurements, a concrete specimen was clamped with
10 the upper grip of the material testing apparatus for a length of 10 mm at the end of the concrete specimen comprising the taped section of the sample membrane. Following, the sample membrane was peeled off from the surface of the concrete specimen at a peeling angle of 90 ° and at a constant cross beam speed of 100 mm/min. During the measurements the distance of the rolls
15 was approximately 570 mm. The peeling of the sample membrane was continued until a length of approximately 140 mm of the sample membrane was peeled off from the surface of the concrete specimen. The values for peel resistance were calculated as average peel force per width of the sample membrane [N/ 50 mm] during peeling over a length of approximately 70 mm
20 thus excluding the first and last quarter of the total peeling length from the calculation.

The average peel resistance values for the example membranes EX1-EX9 presented in Table 3 have been calculated as an average of measured values
25 obtained with three sample membranes cut from the same example membrane.

Table 3. Compositions of the contact layers and measured peel resistances

Contact layer	EX1	EX2	EX3	EX4	EX5	EX6	EX7	EX8	EX9
Polymer component									
Elvax 260 A [wt.-%]	10.5			10.5	10.5			25	
Evatane 18-150 [wt.-%]		10.5					10.5		
Elvaloy AC 2116 [wt.-%]			10.5						
Levapren 400 [wt.-%]	39.5	39.5	39.5			50			
Levapren 700 [wt.-%]				39.5			39.5		
Levapren 900 [wt.-%]					39.5			25	25
Vistamaxx 6202 [wt.-%]									25
Solid filler component									
Holcim optimo 4 [wt.-%]	50	50	50	50	50	50	50	50	50
Peel resistance									
1 day [N/50mm]	14.9	27.8	15.2	54.7	97.2	44.4	75.8	64.1	36.1
7 days [N/50mm]	86.7	83.3	100.3	82.7	152.9	109.2	104.5	136.0	54.4
28 days [N/50mm]	105.8	105.2	108.1	92.4	169.1	124.0	124.2	134.6	98.2

Example 2

3D-average roughness (S_a), 3D-root mean square roughness (S_q), and 3D-maximum surface height (S_z) according to EN ISO 25178 standard were
5 determined for the surfaces of contact layers of the example membranes EX10-EX15.

The example membranes were produced as described above in Example 1 by using an extruder-calender apparatus. A polyethylene-based thermoplastic
10 membrane (WT 1210 HE available from Sika) was used as a barrier layer in all example membranes. The operating conditions of the extruder-calender apparatus during producing the example membranes are presented in Table 4 and the compositions of the contact layers (E) of the example membranes EX10-EX15 are presented in Table 5. The extrusion temperature is the
15 temperature of the melted mass in the flat die and the extrusion pressure was measured at a point, where the melted mass entered the flat die. The temperature of the cooling rolls was approximately 20 °C during the production period. The peel resistances from hardened concrete specimens were determined as described above in Example 1.

20

For measuring the surface geometry of the contact layers, a sample membrane with a size of 100 mm (length) x 100 mm (width) was cut from each example membrane and adhered to an aluminum sheet having a dimension of 100 mm (length) x 100 mm (width) x 5 mm (height), with the contact layer facing
25 upwards, to ensure a completely planar lying of the sample. A double-sided adhesive tape was used in attaching the sample to the aluminum sheet.

The surface geometry of each contact layer was measured with a 3D-laser measuring confocal microscope Olympus LEXT OLS4000 using the laser
30 modus, a 5x objective lens/magnification with 1x optical zoom, a large-field observation with an image stitching of 25 single images and a measurement area of 1 cm² in the x-y-direction. In conducting the surface geometry measurements, the top and bottom limit of confocal acquisition in z-direction

was adjusted manually in the laser modus after adjusting the coarse and fine focus in the live color image modus.

The 3D-surface roughness parameters were calculated from the measured surface geometry with the attached Olympus LEXT OLS4000 Application Version 2.1.3 software. The 3D-surface roughness parameters were calculated by using unfiltered primary dataset obtained from the optical measurements without using any of the cutoff lengths λ_s , λ_c , or λ_f . The 3D-surface roughness parameters shown in Table 5 have been obtained as average from at least two measurements conducted at different locations on the surface of a contact layer of each sample membrane.

Table 4. Operating conditions of the extrusion process

Contact layer	Extrusion pressure [bar]	Extrusion temperature [°C]	Extrusion flux [kg/h]	Roller gap [mm]
E10	56	175	13	2.6
E11	94	190	14	3.0
E12	57	220	16	3.0
E13	93	185	16	3.0
Barrier layer	61	160	10	1.8

15

20

25

Table 5. Compositions, peel resistances and 3D-roughness parameters

Contact layer	EX10	EX11	EX12	EX13
Polymer component				
Elvax 260 A [wt.-%]	13.1	13.1	13.1	13.1
Levapren 400 [wt.-%]	12.3	12.3	12.3	12.3
* Additives	12.9	12.9	12.9	12.9
Solid filler component				
Holcim optimo 4 [wt.-%]	60	60	60	60
3D-surface roughness				
Sa [μm]	35.8	111.0	115.5	126.1
Sq [μm]	44.1	142.1	146.5	160.7
Sz [μm]	524.3	1265.4	978.0	1118.3
Peel resistance				
28 days [N/50mm]	68.0	75.0	79.8	91.0

* Paraloid KM370, Antioxidant 1010, Loxiol 93P, Tinuvin 783FDL

Claims

1. A membrane comprising a barrier layer **S1** having a first and a second
5 opposing surface and a contact layer **S2** having a first and a second
opposing surface, wherein at least a portion of the first surface of the
barrier layer **S1** and the second surface of the contact layer **S2** are
directly bonded to each other, and wherein the barrier layer **S1**
comprises a thermoplastic polymer component **P1** and the contact layer
10 **S2** comprises a mixture of a solid filler component **F** and a thermoplastic
polymer component **P2**, and wherein the amount of the solid filler
component **F** is 10.0 – 90.0 wt.-%, based on the total weight of the
contact layer **S2** .
- 15 2. The membrane according to claim 1, wherein the contact layer **S2**
comprises not more than 2.5 wt.-%, preferably not more than 1.0
wt.-%, even more preferably not more than 0.5 wt.-%, most preferably
not more than 0.1 wt.-% of hydrated mineral binders, based on the total
weight of the contact layer **S2**.
- 20 3. The membrane according to claim 1 or 2, wherein the thermoplastic
polymer component **P2** has a melting point determined according to ISO
11357 of 25 – 250°C , preferably 55 – 225°C, more preferably 60 –
200°C, most preferably 65 – 150°C.
- 25 4. The membrane according to any of previous claims, wherein the amount
of the solid filler component **F** is 15.0 – 80.0 wt.-%, preferably 20.0 –
75.0 wt.-%, most preferably 25.0 – 70.00 wt.-% based on the total
weight of the contact layer **S2**.
- 30 5. The membrane according to any of previous claims, wherein the
membrane has a concrete adhesion strength, determined by means of
the method cited in the description, of at least 10 N/50 mm, more

preferably of at least 15 N/50 mm, even more preferably of at least 20 N/50 mm, most preferably of at least 30 N/50 mm.

- 5 6. The membrane according to claim any of previous claims, wherein the solid filler component **F** is selected from the group consisting of consisting of organic fillers, inert mineral fillers and mineral binders and mixtures thereof, preferably from the group consisting of inert mineral fillers and mineral binders and mixtures thereof.
- 10 7. The membrane according to claim any of previous claims, wherein the solid filler component **F** comprises at least one mineral binder selected from the group consisting of hydraulic binders, non-hydraulic binders, latent hydraulic binders, and pozzolanic binders, and mixtures thereof.
- 15 8. The membrane according to any of previous claims, wherein the amount of the thermoplastic polymer component **P2** is 10.0 – 90.0 wt.-%, preferably 15.0 – 80.0 wt.-%, more preferably 20.0 – 75.0 wt.-%, most preferably 25.0 – 70.0 wt.-%, based on the total weight of the contact layer **S2**, and wherein the thermoplastic polymer component **P2**
20 comprises at least one polymer selected from the group consisting of ethylene – vinyl acetate co-polymers (EVA), ethylene – acrylic ester copolymers, ethylene – α -olefin co-polymers, ethylene – propylene co-polymers polypropylene (PP), polyethylene (PE), polyvinylchloride (PVC), polyethylene terephthalate (PET), polystyrene (PS), polyamides
25 (PA), chlorosulfonated polyethylene (CSPE), ethylene propylene diene rubber (EPDM), and polyisobutylene (PIB), and mixtures thereof.
9. The membrane according to any of previous claims, wherein the thermoplastic polymer component **P1** is miscible, more preferably
30 weldable with the thermoplastic polymer component **P2**.
10. The membrane according to any of previous claims, wherein the contact layer **S2** has a thickness of 0.1 – 50.0 mm, preferably 0.2 – 10.0 mm, more preferably 0.3 – 5.0 mm, most preferably 0.4 – 2.0 mm.

11. The membrane according to any of previous claims, wherein the membrane further comprises a second contact layer **S2'** having a first surface and a second opposing surface, and wherein at least a portion of the second surface of the barrier layer **S1** and the first surface of the contact layer **S2'** are directly bonded to each other, and wherein the second contact layer **S2'** comprises a mixture of a solid filler component **F'** and a thermoplastic polymer component **P2'**.
12. A method for producing a membrane according to any of claims 1-11 comprising extruding and/or calendering and/or co-extruding a homogenized melt comprising the components of the barrier layer **S1**, a homogenized melt comprising the components of the contact layer **S2** and optionally a homogenized melt comprising the components of the second contact layer **S2'**.
13. A method for waterproofing a substrate, the method comprising steps of
- applying a membrane according to any of claims 1-11 to a surface of a substrate such that the second surface of the barrier layer **S1** is directed against the surface of the substrate,
 - casting a fresh cementitious composition on the first surface of the contact layer **S2**, and
 - hardening the fresh cementitious composition.
14. A waterproofed construction comprising a layer of concrete and a membrane according to any of claims 1-11 arranged between a surface of a substrate and the layer of concrete such that the second surface of the barrier layer **S1** is directed against the surface of the substrate and the first surface of the contact layer **S2** is fully bonded to the layer of concrete.
15. A method for sealing a substrate against water penetration, the method comprising the steps of

- applying a layer of adhesive on the surface of the substrate,
- covering the layer of the adhesive with a membrane according to any of claims 1-11 such that first surface of the first contact layer **S2** or the second surface of the second contact layer **S2'** is brought in contact with the layer of adhesive, and
- hardening the layer of adhesive.

5

16. A sealed construction comprising a membrane according to any of the claims 1-11 and a layer of adhesive arranged between a surface of a substrate and the membrane such that the first surface of the first contact layer **S2** or the second surface of the second contact layer **S2'** is bonded to the surface of the substrate with the layer of adhesive.

10

15

20

25

30

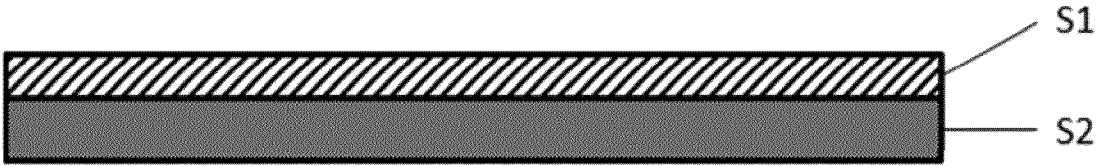


Fig. 1

5

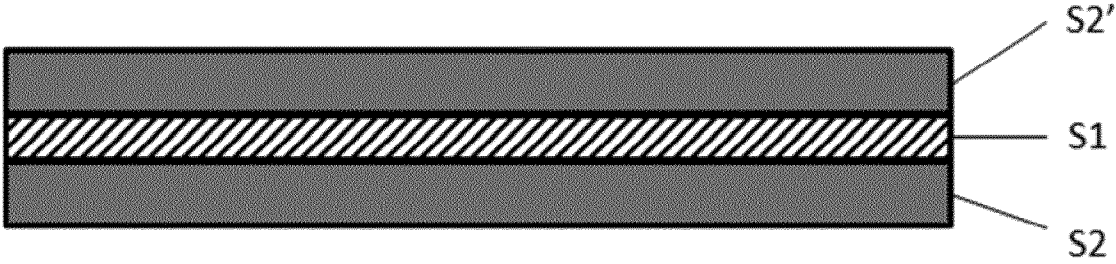


Fig. 2

10

15

20

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/082003

A. CLASSIFICATION OF SUBJECT MATTER INV. B32B13/12 B32B27/28 B32B27/32 B32B25/14 B32B27/08 B32B27/20 B32B27/30 B32B27/34 ADD. According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) B32B Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/14063 A1 (GRACE W R & CO [US]; WIERCINSKI ROBERT A [US]; SETH JYOTI [US]) 21 February 2002 (2002-02-21) page 3, line 8 - page 9, line 12; claims 1-22; figures 1-2 -----	1-14
X	WO 2008/100777 A2 (UNITED STATES GYPSUM CO [US]; ENGBRECHT DICK C [US]; LIU QINGXIA [US];) 21 August 2008 (2008-08-21) paragraphs [0013] - [0062]; claims 1-43 -----	1-10,12,13
X	US 2015/231863 A1 (KNEBEL GUSTL [CH] ET AL) 20 August 2015 (2015-08-20) cited in the application paragraphs [0020] - [0066]; claims 1-29; figures 1a-1b -----	1-16
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 10 March 2017		Date of mailing of the international search report 16/03/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Joly, Florence

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/082003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0214063	A1	21-02-2002	AT 264361 T 15-04-2004
		AU 8111701 A 25-02-2002	
		AU 2001281117 B2 07-04-2005	
		CA 2355004 A1 14-02-2002	
		CN 1454142 A 05-11-2003	
		DE 60102765 D1 19-05-2004	
		DE 60102765 T2 14-04-2005	
		EP 1193283 A1 03-04-2002	
		ES 2217093 T3 01-11-2004	
		HK 1058650 A1 13-05-2005	
		HU 0300760 A2 29-09-2003	
		JP 4388742 B2 24-12-2009	
		JP 2004513801 A 13-05-2004	
		KR 20030023757 A 19-03-2003	
		MX PA03000840 A 06-06-2003	
		NZ 524731 A 30-07-2004	
		PL 359921 A1 06-09-2004	
		TW 592970 B 21-06-2004	
		US 6500520 B1 31-12-2002	
		WO 0214063 A1 21-02-2002	
		ZA 200300841 B 19-02-2004	
WO 2008100777	A2	21-08-2008	AR 066224 A1 05-08-2009
		AU 2008216467 A1 21-08-2008	
		CA 2676994 A1 21-08-2008	
		CL 2008001145 A1 07-11-2008	
		CN 101605654 A 16-12-2009	
		CN 102991013 A 27-03-2013	
		CO 6231015 A2 20-12-2010	
		EP 2117828 A2 18-11-2009	
		EP 2508340 A1 10-10-2012	
		JP 3183641 U 30-05-2013	
		JP 5302218 B2 02-10-2013	
		JP 5563686 B2 30-07-2014	
		JP 2010517827 A 27-05-2010	
		JP 2013107404 A 06-06-2013	
		NZ 578554 A 12-01-2012	
		NZ 597323 A 28-06-2013	
		RU 146857 U1 20-10-2014	
		RU 2009134228 A 20-03-2011	
		TW 200900234 A 01-01-2009	
		US 2008190062 A1 14-08-2008	
		US 2012040168 A1 16-02-2012	
		WO 2008100777 A2 21-08-2008	
US 2015231863	A1	20-08-2015	CN 104583351 A 29-04-2015
		EP 2885361 A1 24-06-2015	
		US 2015231863 A1 20-08-2015	
		WO 2014029763 A1 27-02-2014	